

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz b mode M ch/Area Scan

(7x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.200 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz b mode M ch/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.118 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

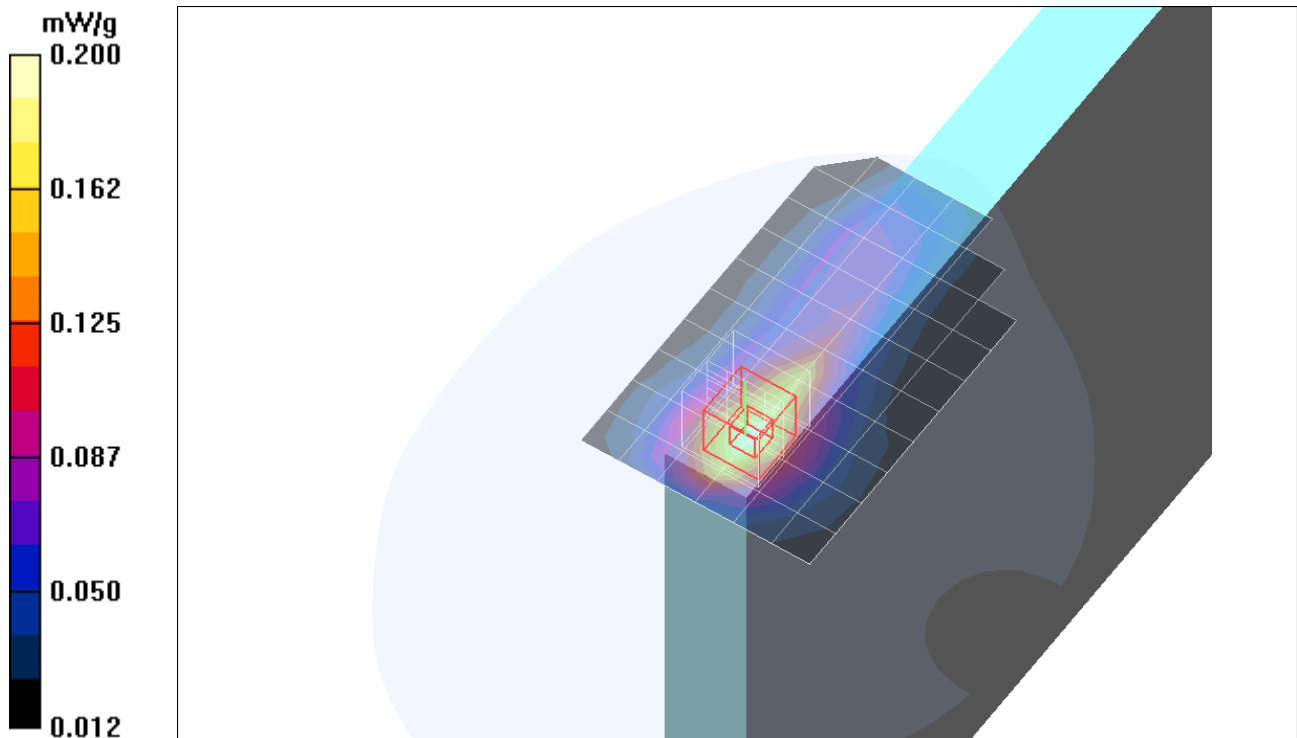

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz g mode M ch/Area Scan

(7x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.212 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz g mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 15.1 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.127 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.230 mW/g

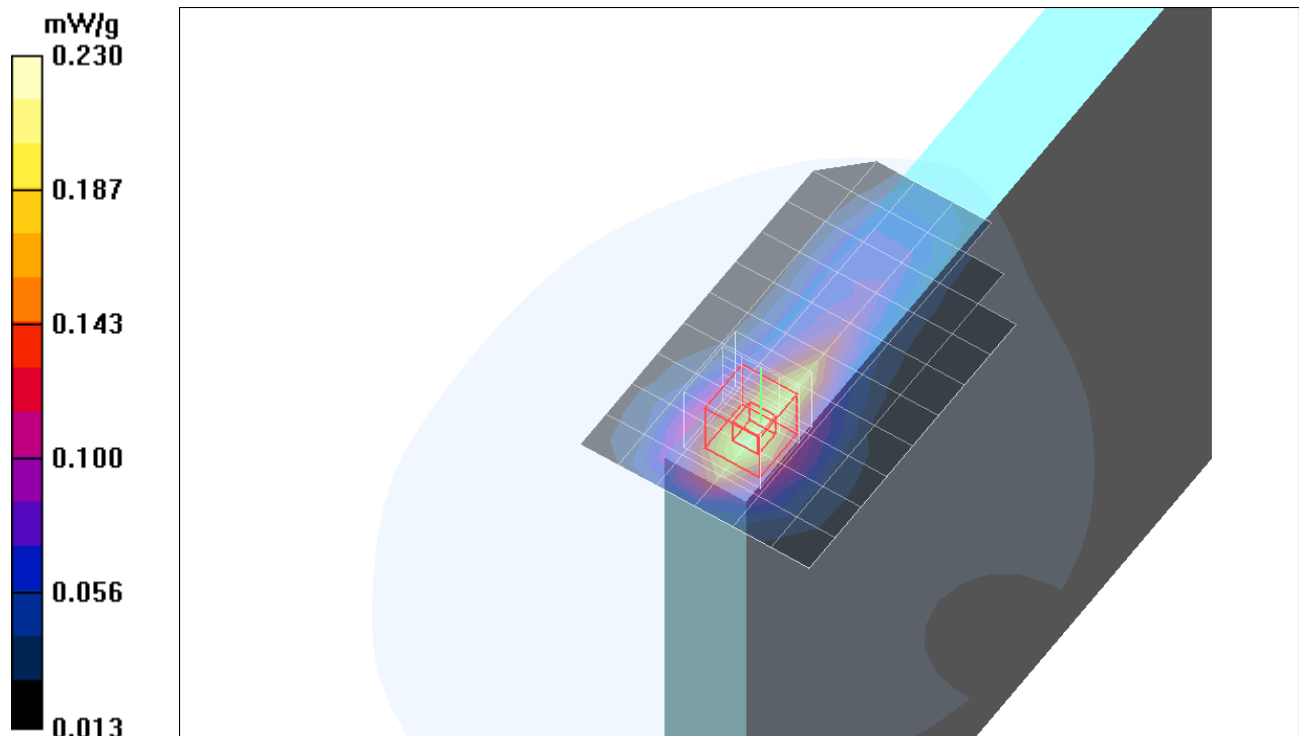

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait


DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz;Duty Cycle: 1:4

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz g mode M ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.140 mW/g

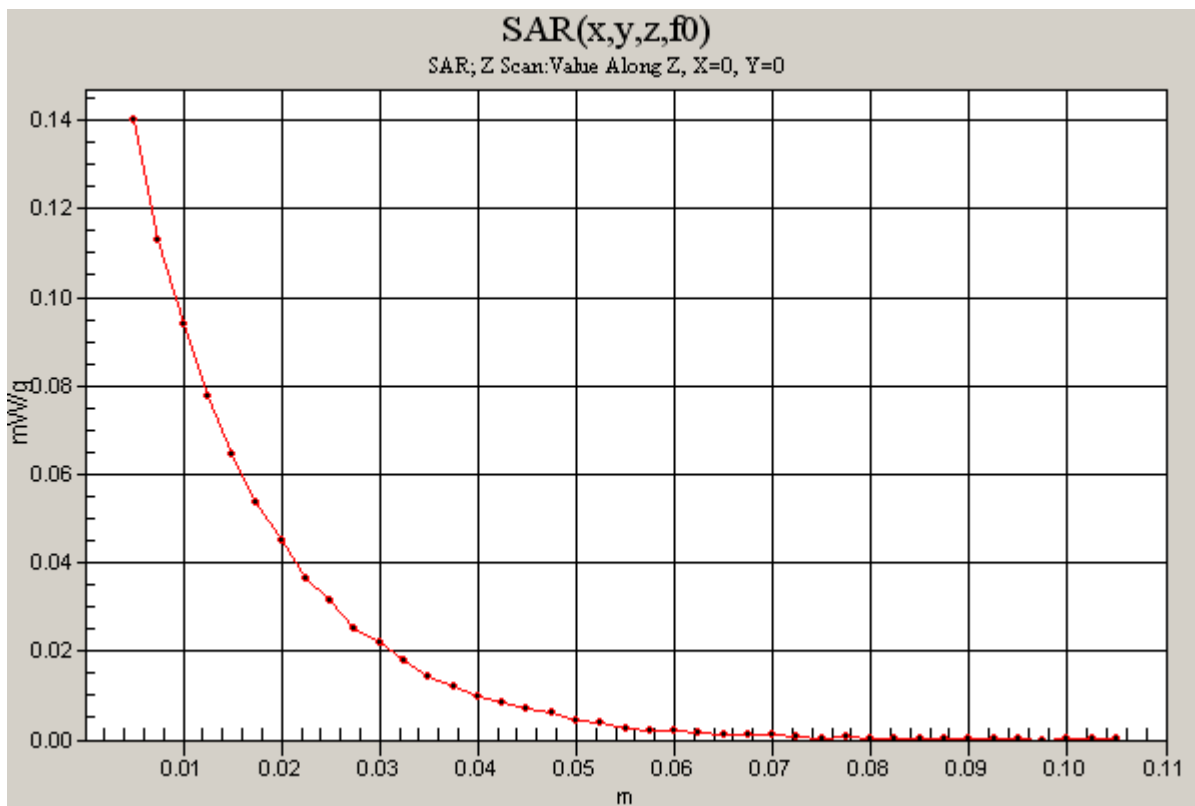

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.209 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 15.0 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.123 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.219 mW/g

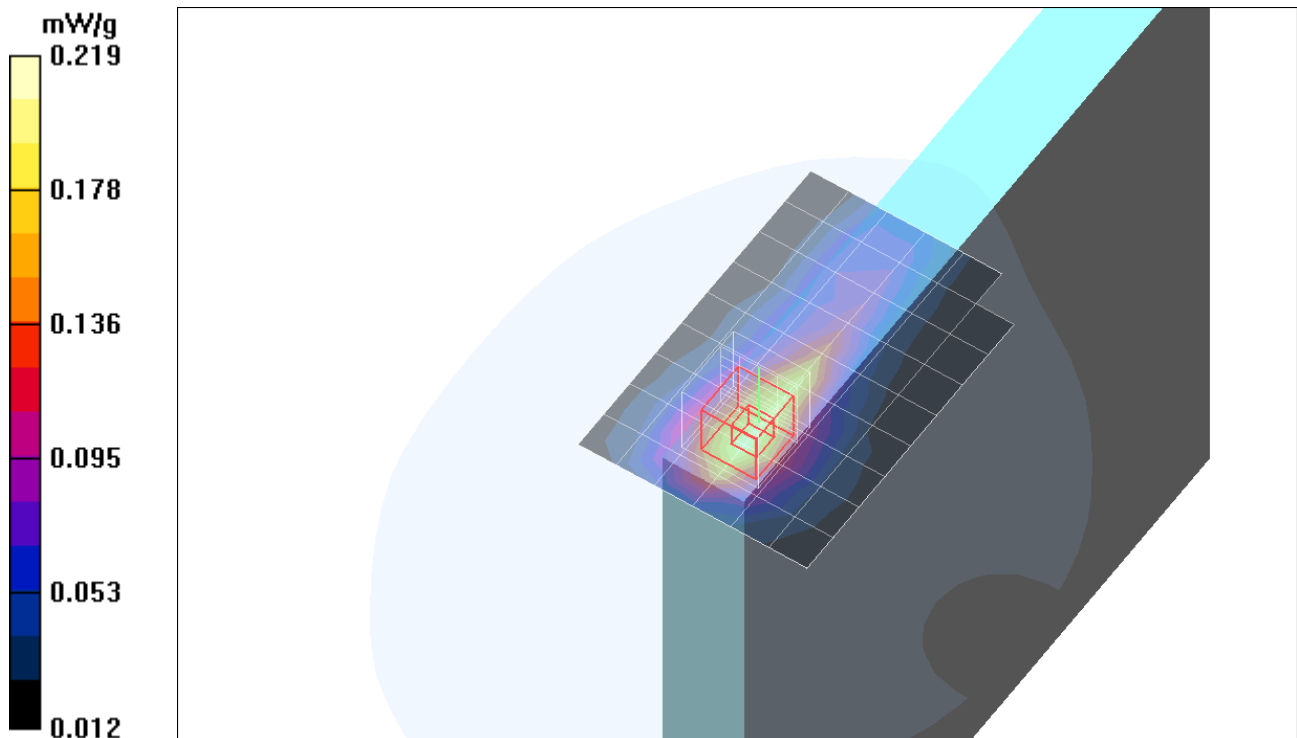

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.197 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 2.4GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.6 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.116 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.194 mW/g

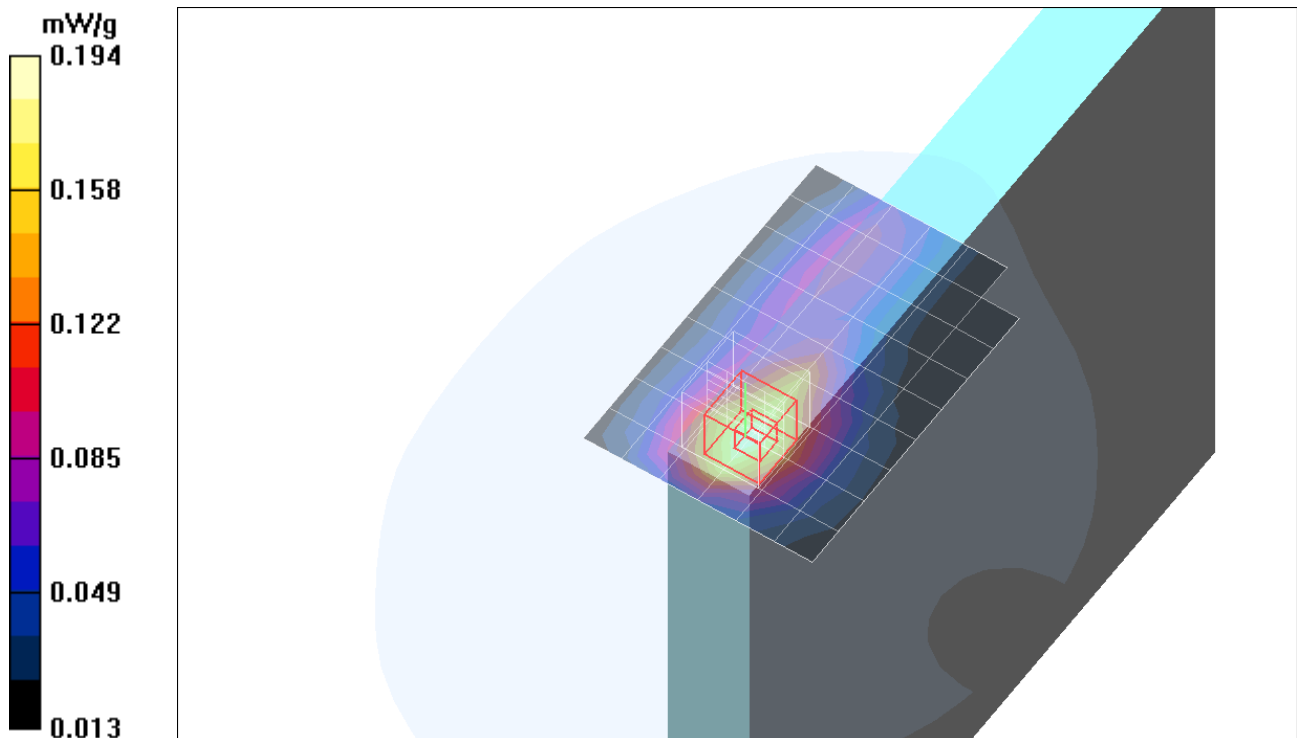

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz a mode M ch/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz a mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.9 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.112 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.193 mW/g

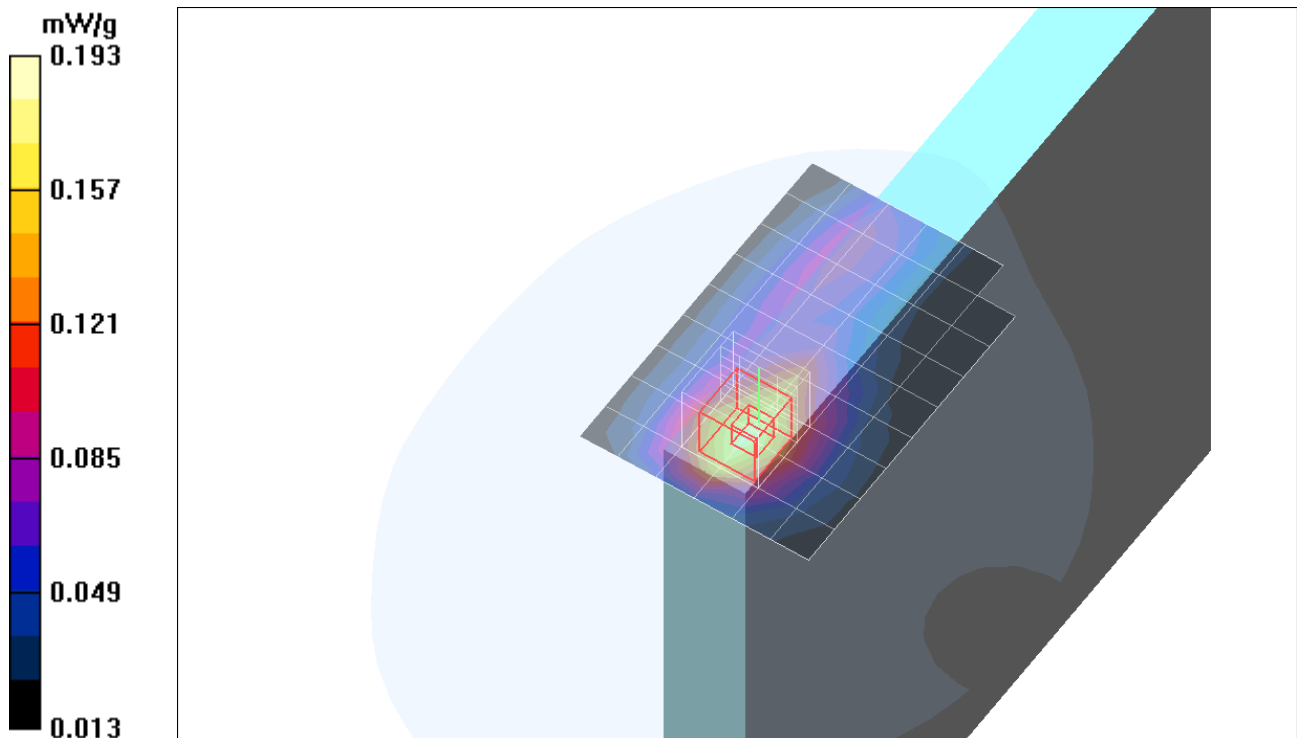

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.8 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.182 mW/g

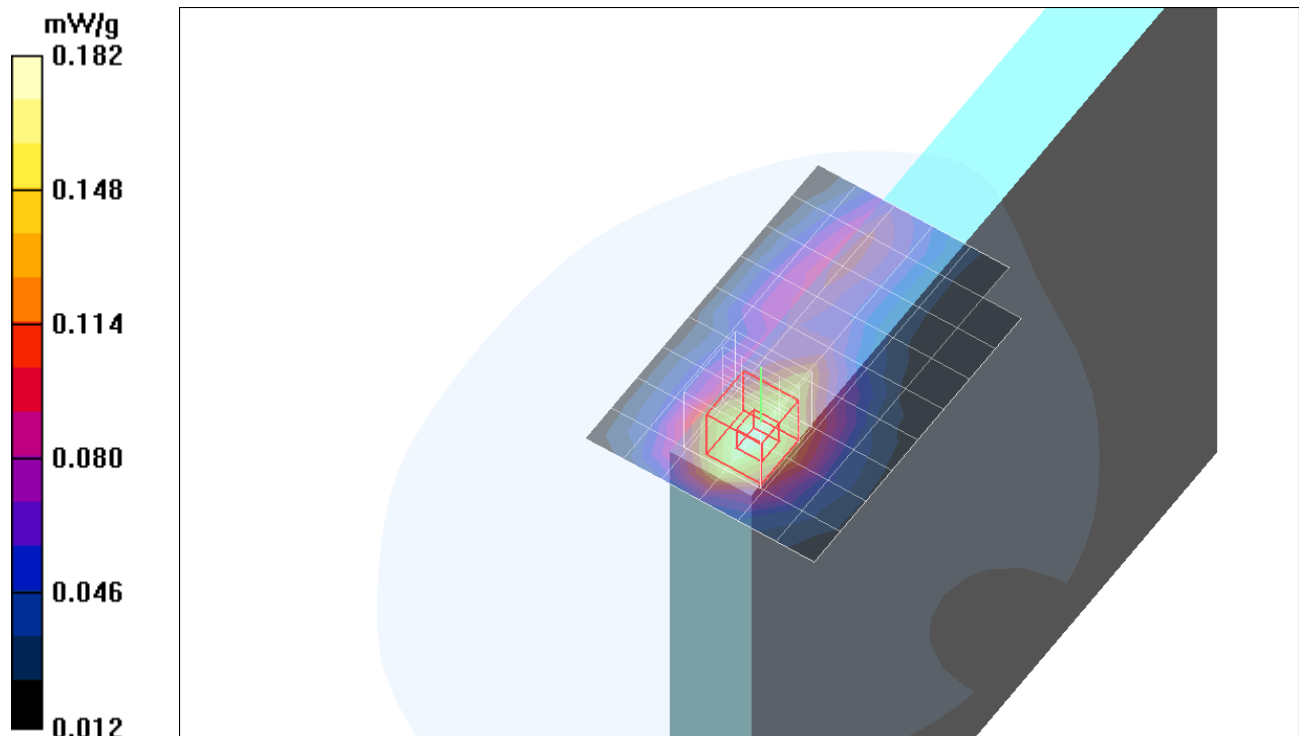

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.186 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.2GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.8 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.185 mW/g

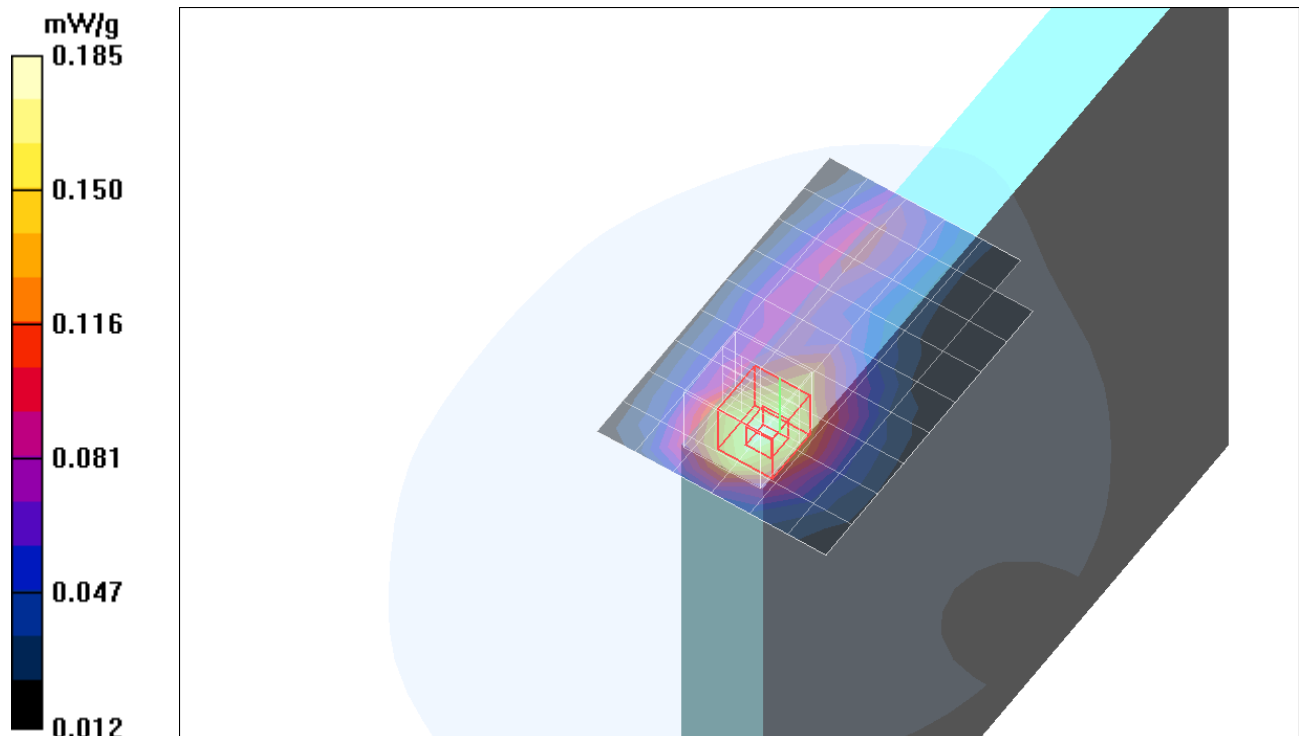

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz a mode M ch/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz a mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.5 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.111 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.188 mW/g

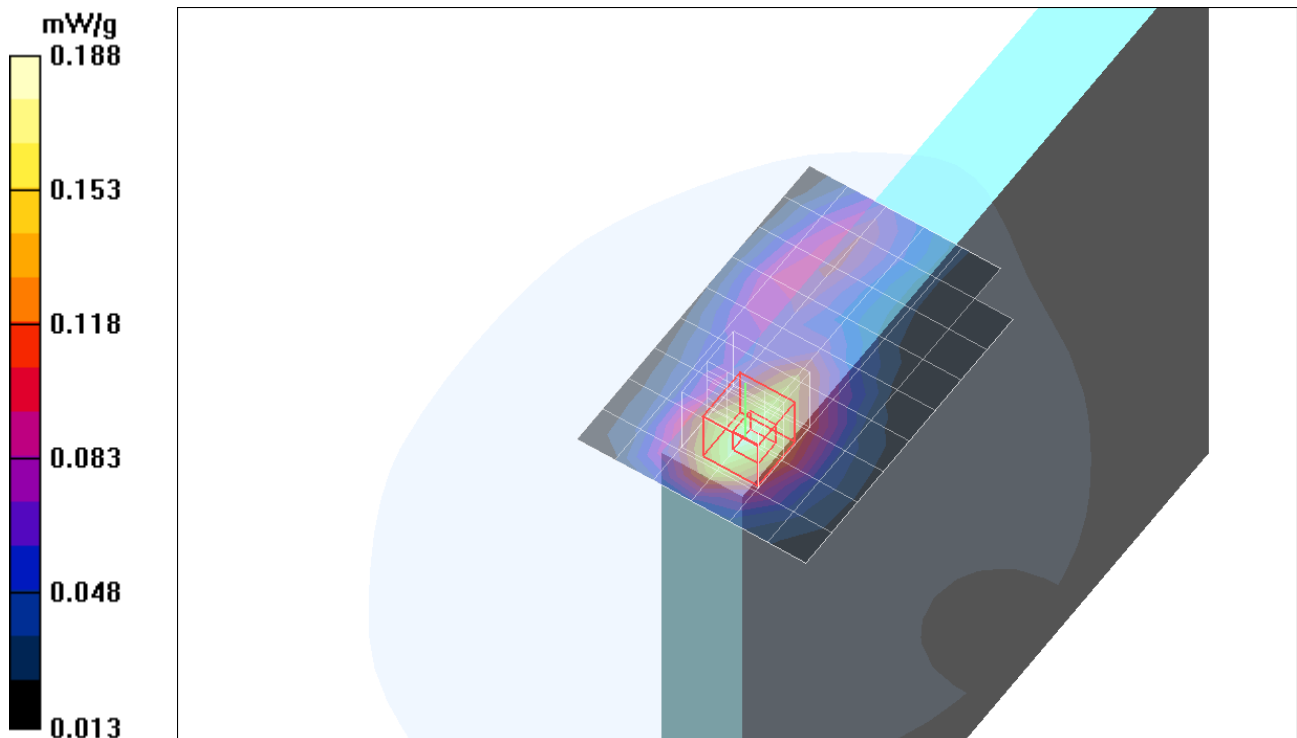

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 13.9 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.114 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.189 mW/g

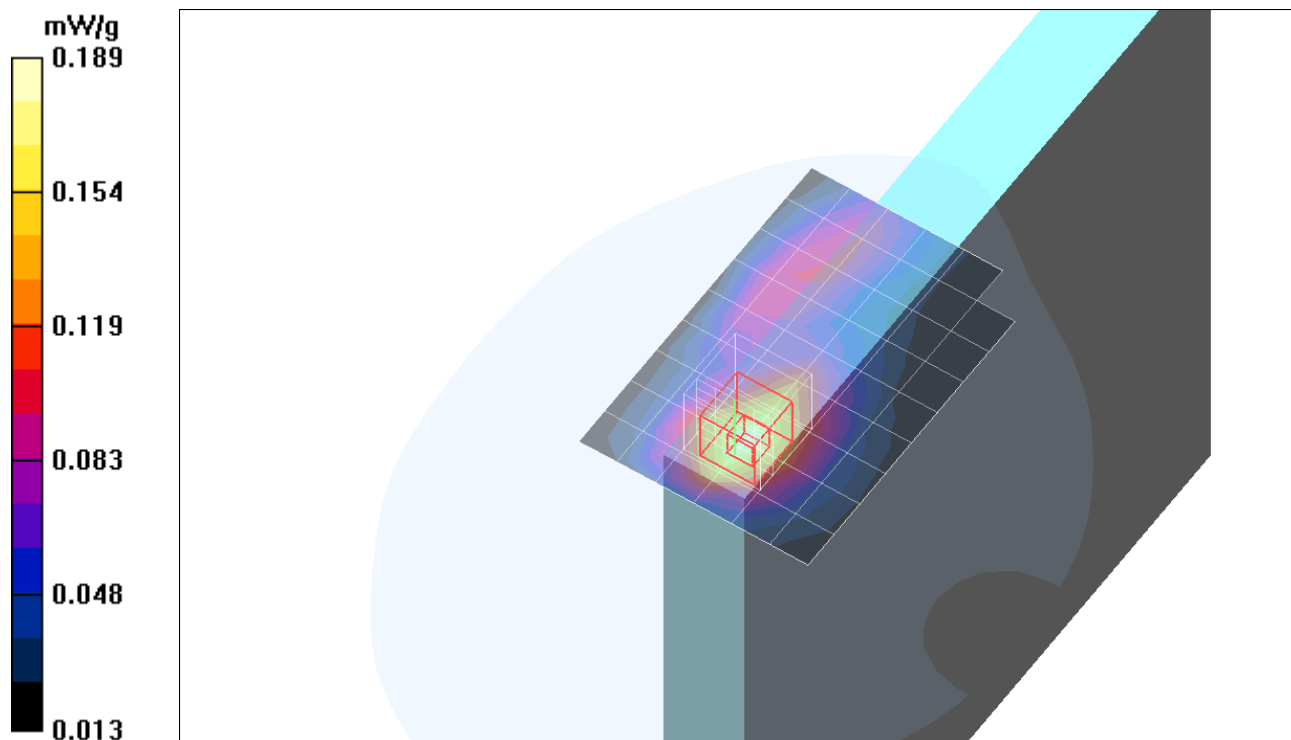

Test Laboratory: Compliance Certification Services

Cell Band - LCD Edge Position - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.233 mW/g

GPRS H ch collocation with Bluetooth and WLAN @ 5.8GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.1 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.133 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.234 mW/g

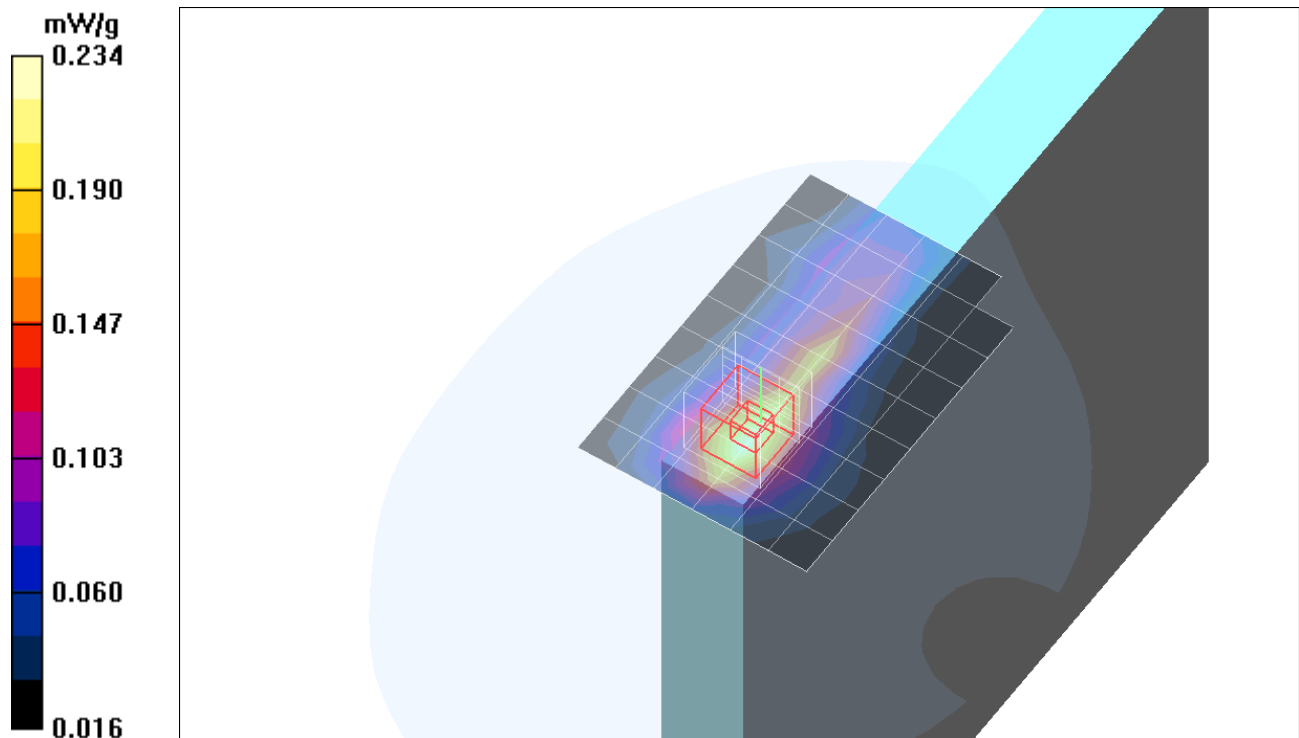

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz b mode M ch/Area Scan

(9x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.167 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz b mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.13 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.098 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.163 mW/g

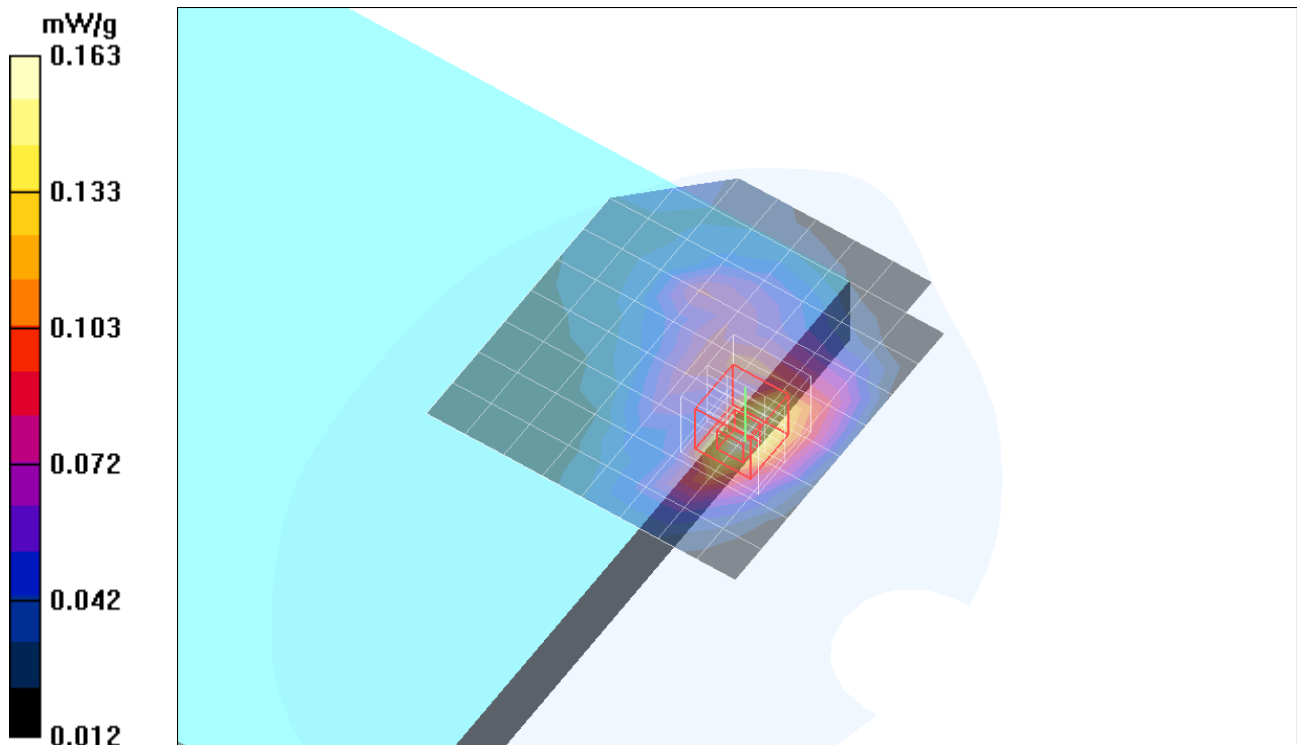

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz g mode M ch/Area Scan

(9x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.139 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz g mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.44 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.088 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.158 mW/g

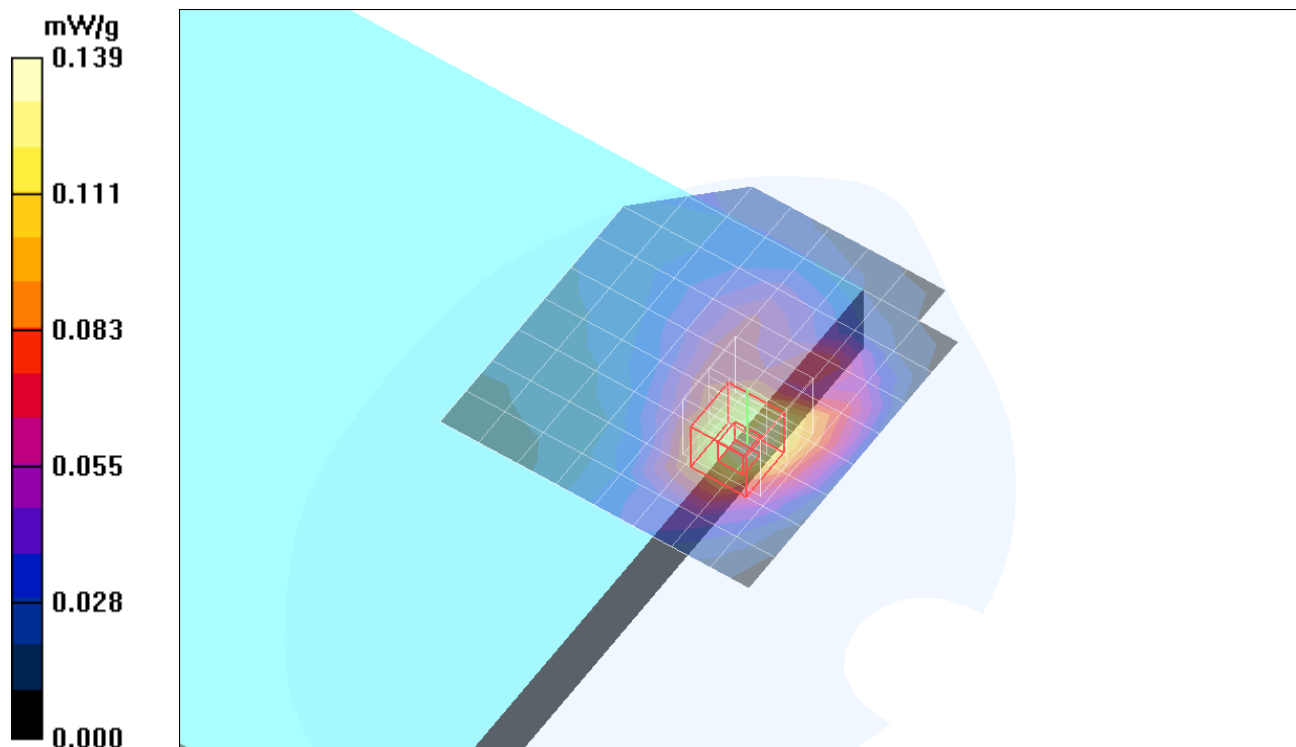

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.116 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.09 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.072 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.120 mW/g

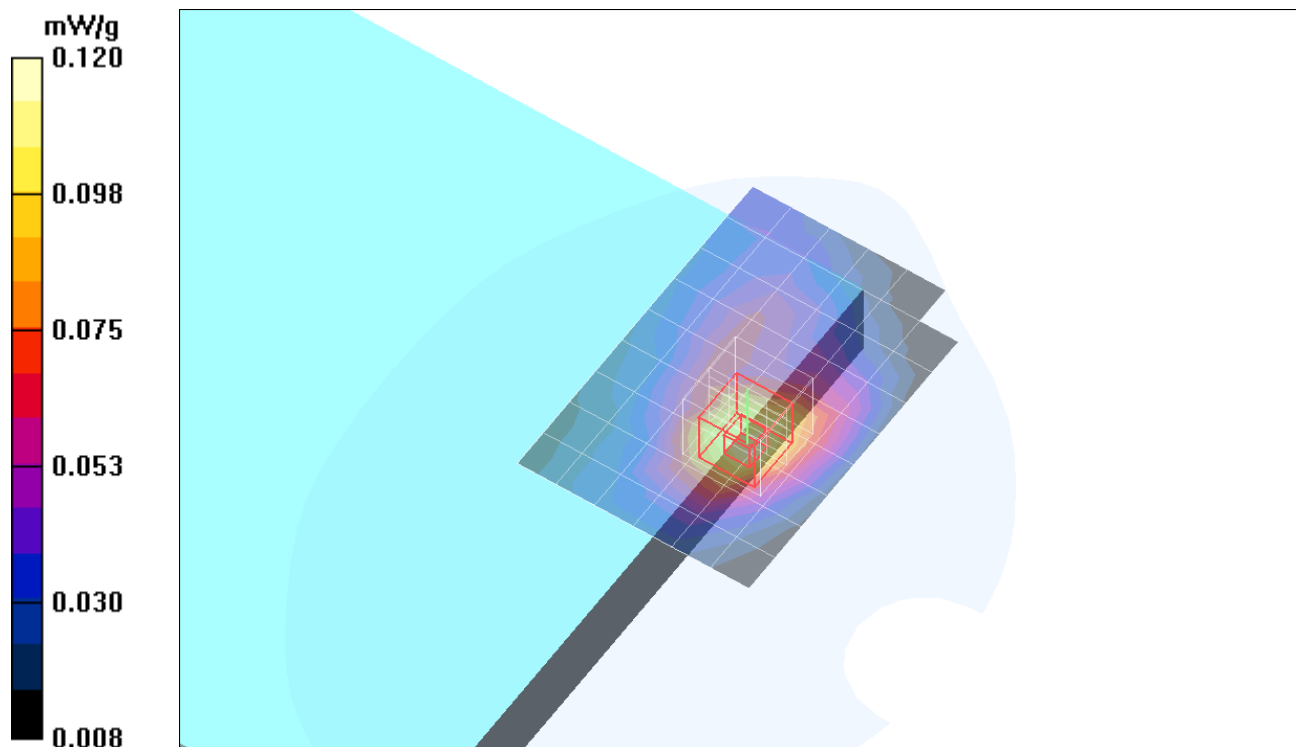

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.116 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 2.4GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.48 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.072 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.120 mW/g

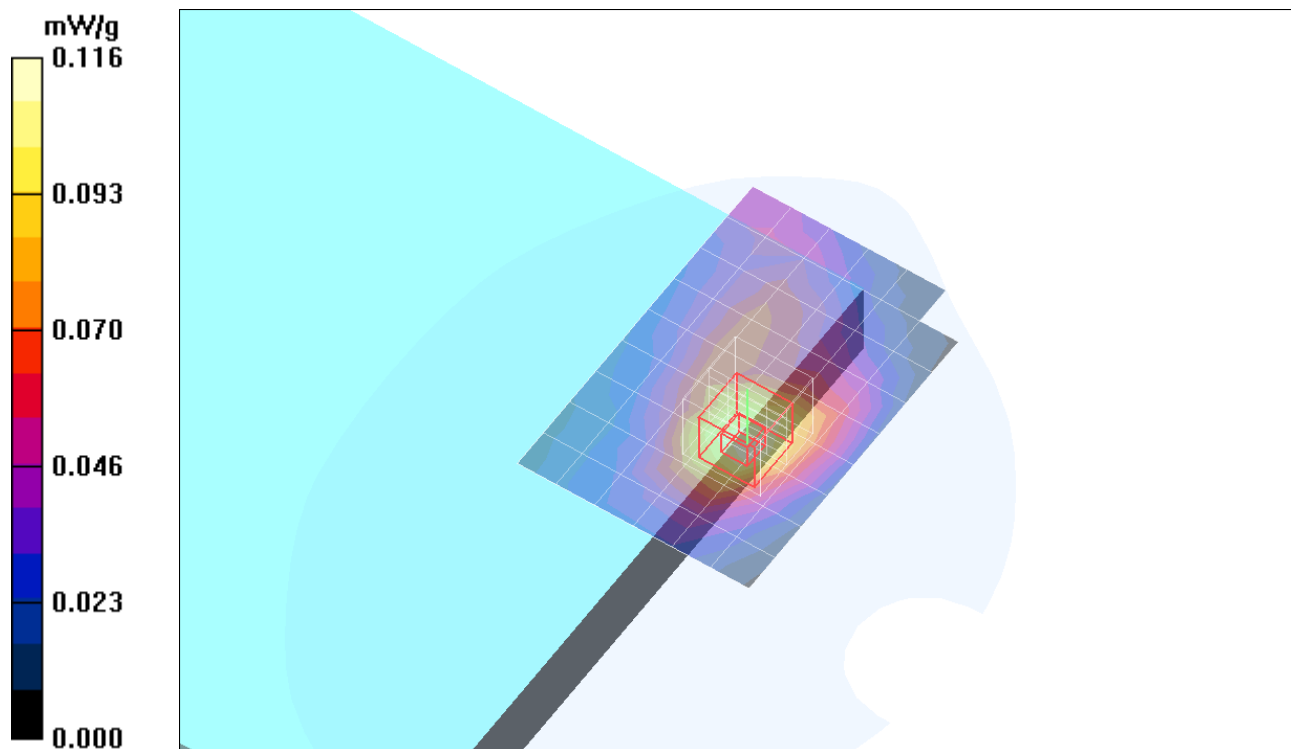

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz a mode M ch/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.134 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz a mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.31 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.084 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.142 mW/g

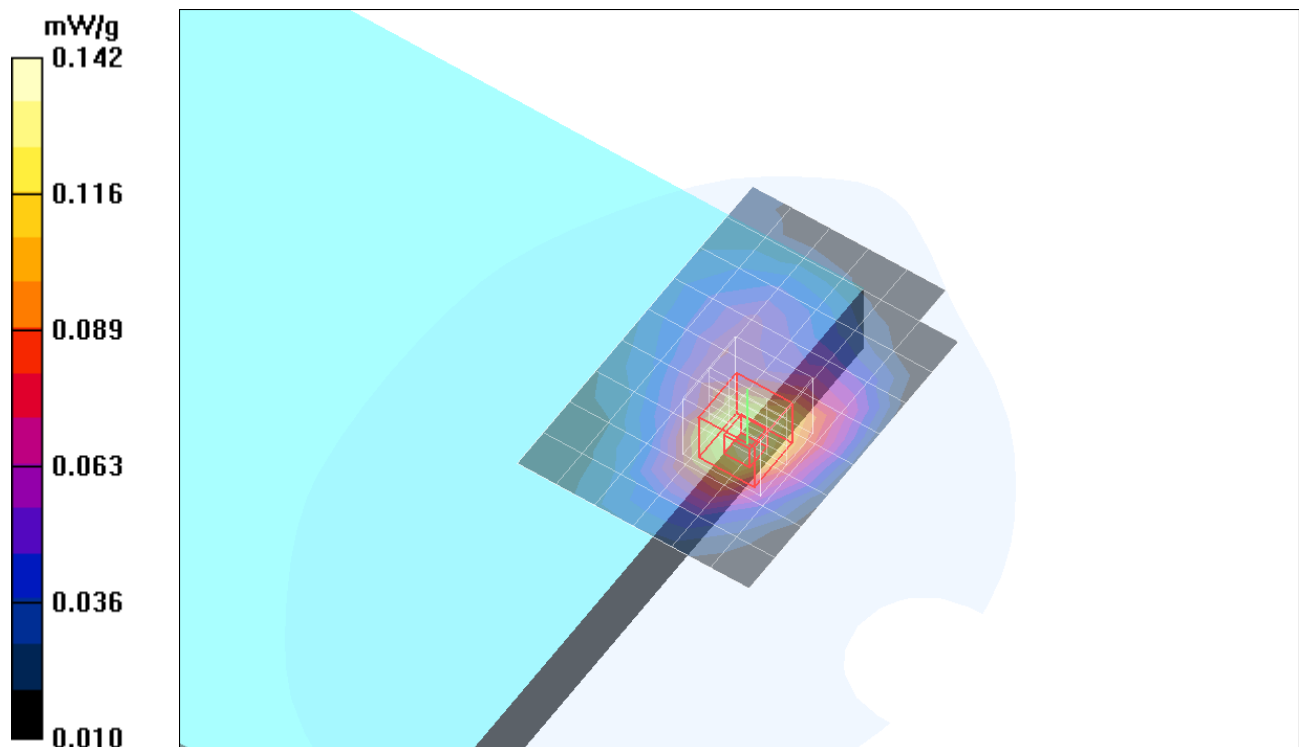

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.134 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.35 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.085 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.142 mW/g

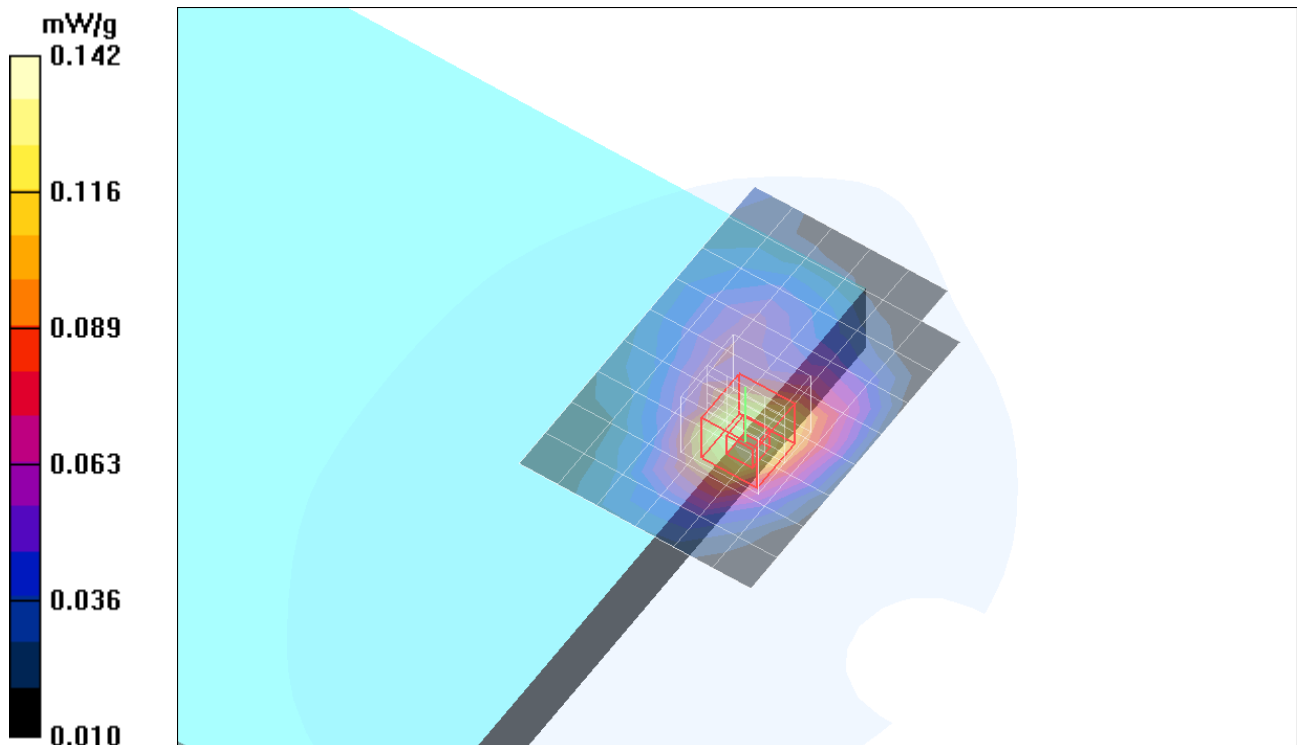

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.138 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.2GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.36 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.086 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.145 mW/g

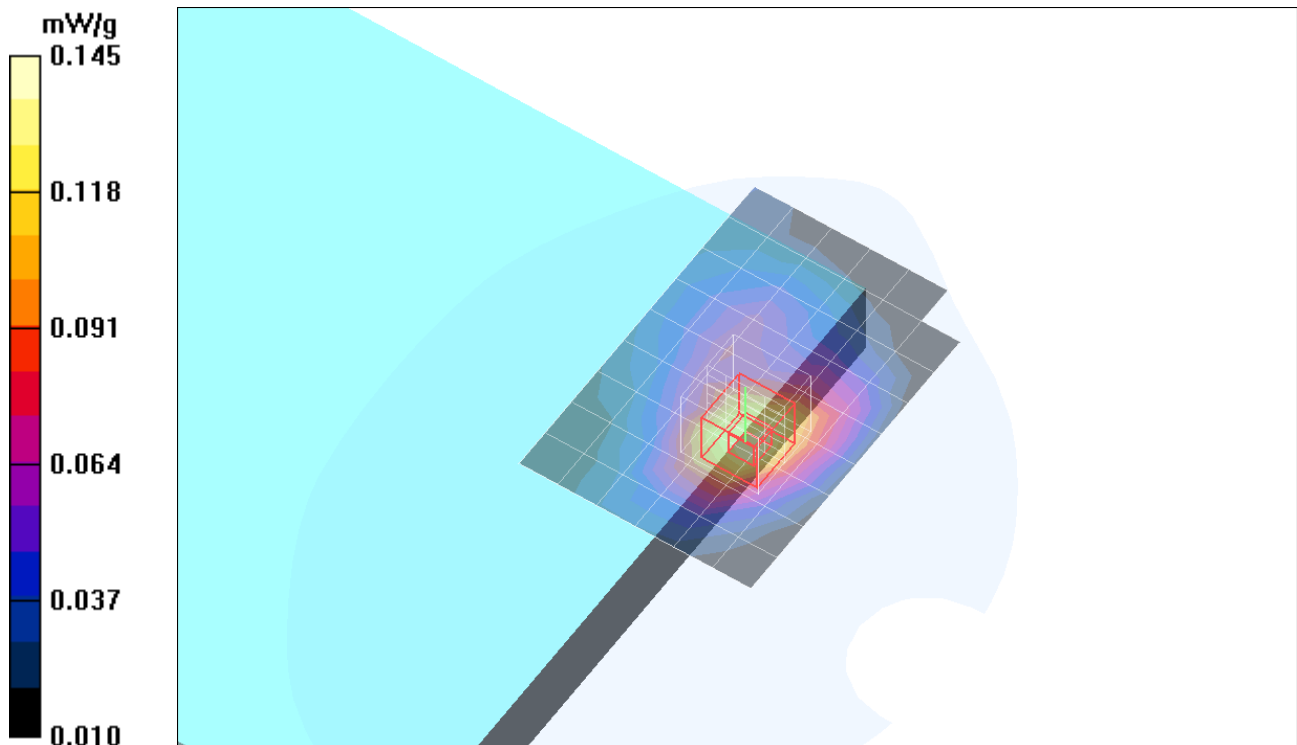

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz a mode M ch/Area Scan

(7x10x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.137 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz a mode M ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.42 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.086 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.144 mW/g

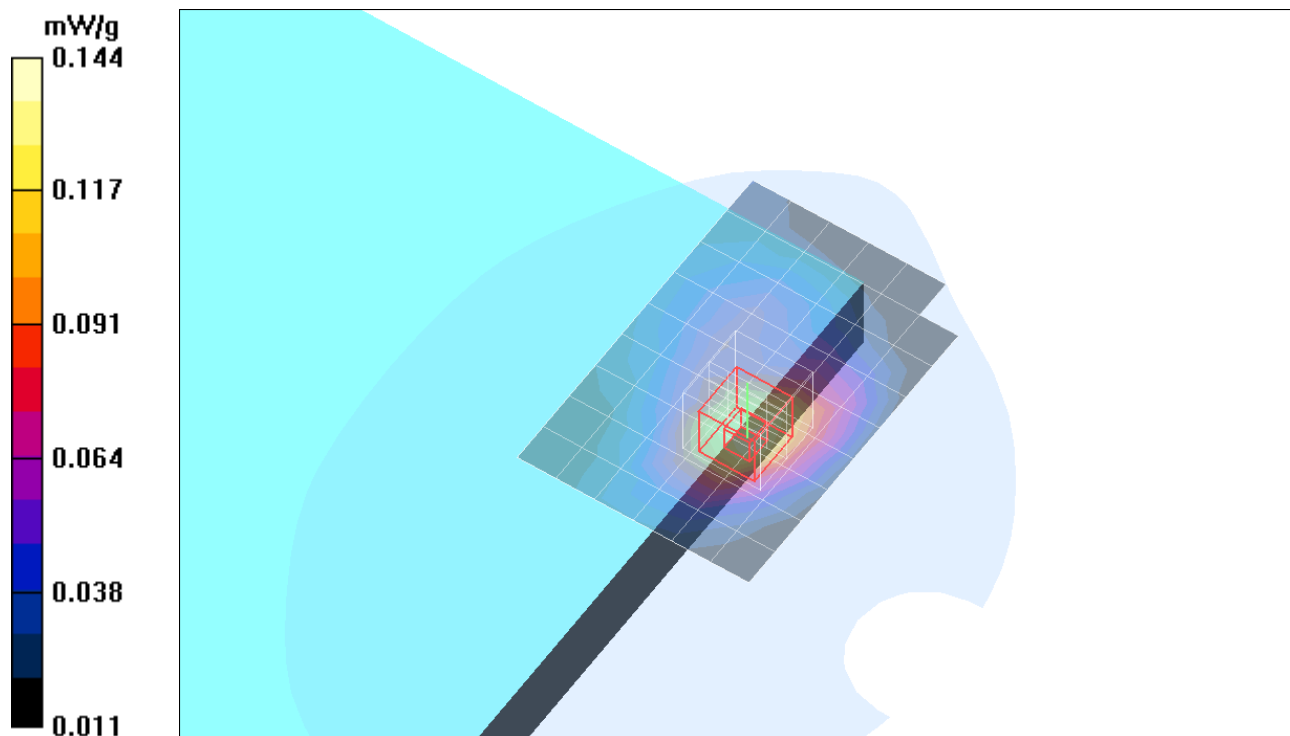

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz HT20 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.138 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz HT20 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.37 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.088 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 mW/g

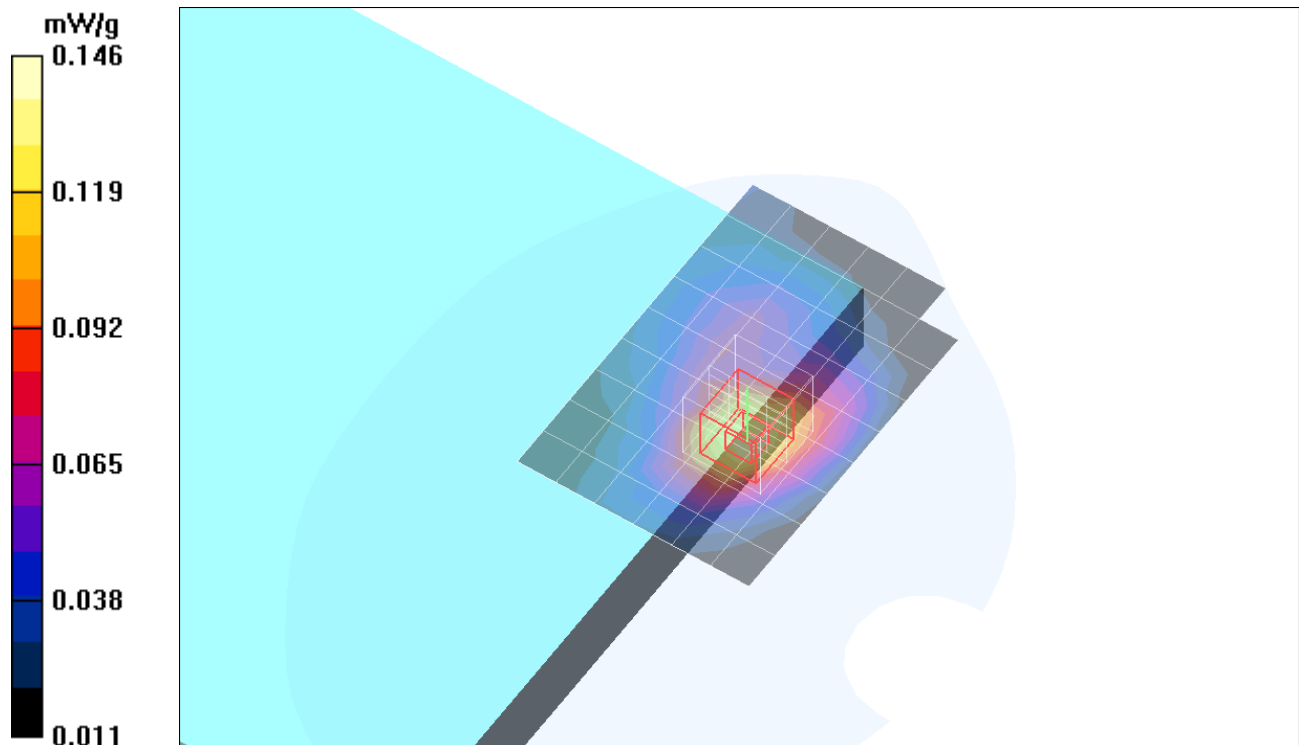

Test Laboratory: Compliance Certification Services

Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.971$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz HT40 mode M ch/Area

Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.156 mW/g

GPRS M ch collocation with Bluetooth and WLAN @ 5.8GHz HT40 mode M ch/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.69 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.099 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.165 mW/g

