

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1_GSM GPRS H-ch (Co-Tx w/ BT and 11b legacy mode)/Area Scan (6x8x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 mW/g


1_GSM GPRS H-ch (Co-Tx w/ BT and 11b legacy mode)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.14 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.068 mW/g

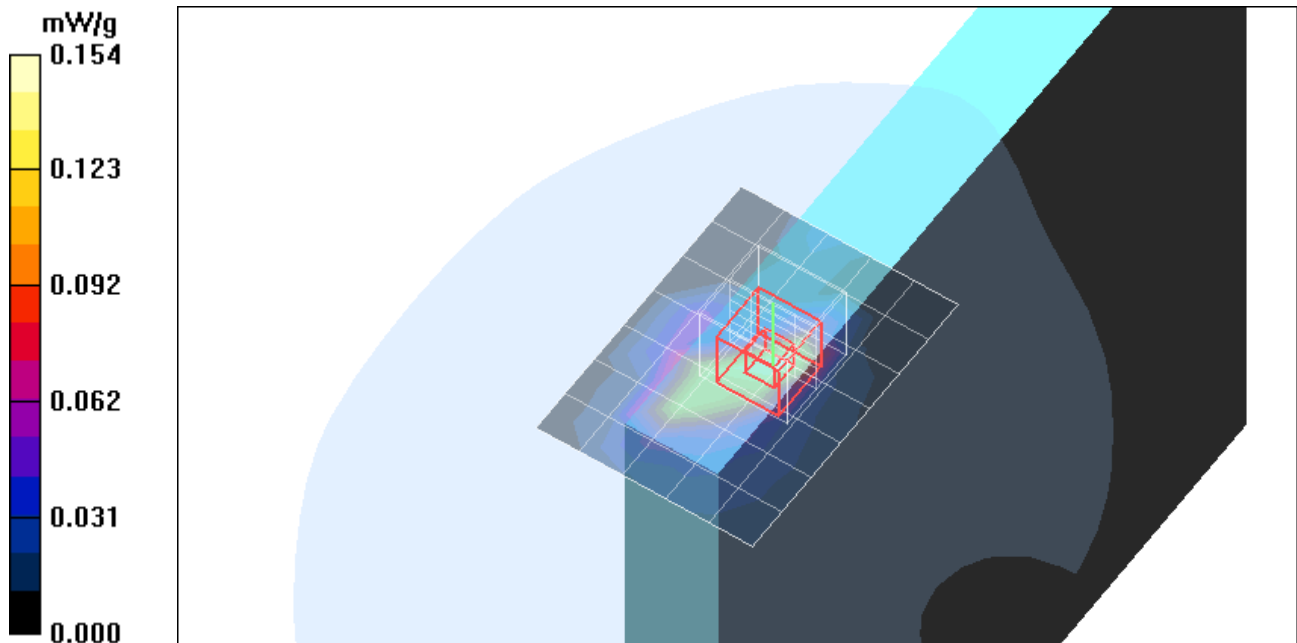

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2_GSM GPRS H-ch (Co-Tx w/ BT and 11g legacy mode)/Area Scan (6x8x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.168 mW/g

2_GSM GPRS H-ch (Co-Tx w/ BT and 11g legacy mode)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.08 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.155 mW/g

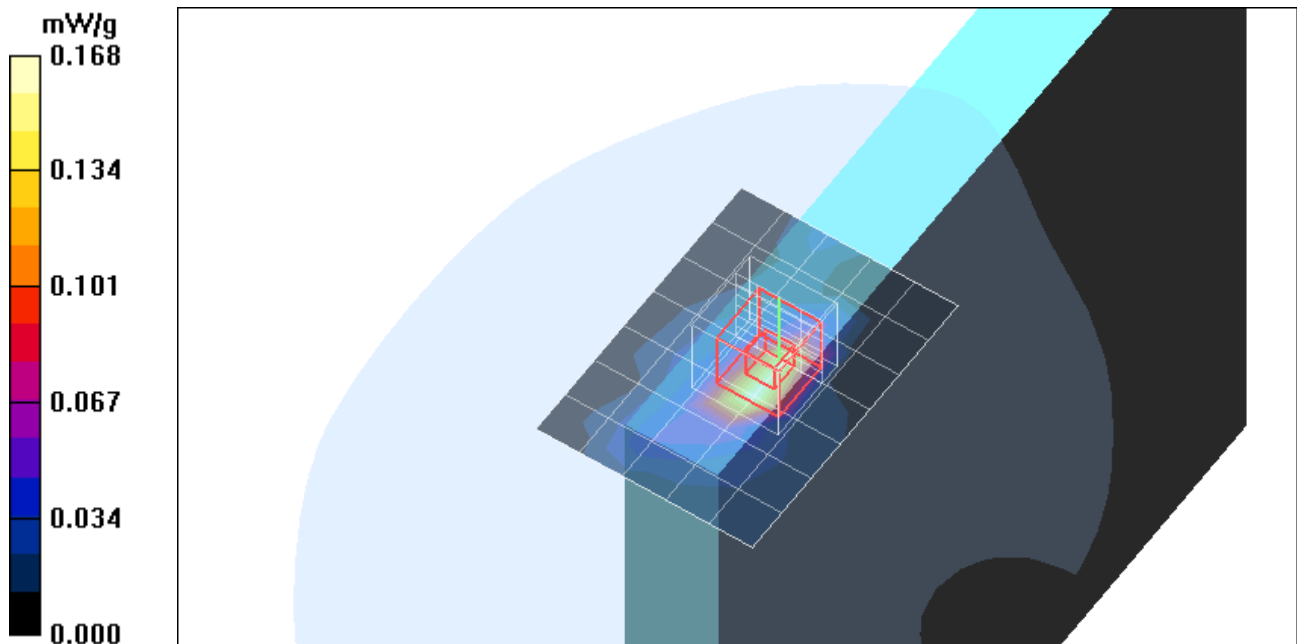

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

3_GSM GPRS H-ch (Co-Tx w/ BT and 11g HT20)/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.143 mW/g

3_GSM GPRS H-ch (Co-Tx w/ BT and 11g HT20)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.02 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

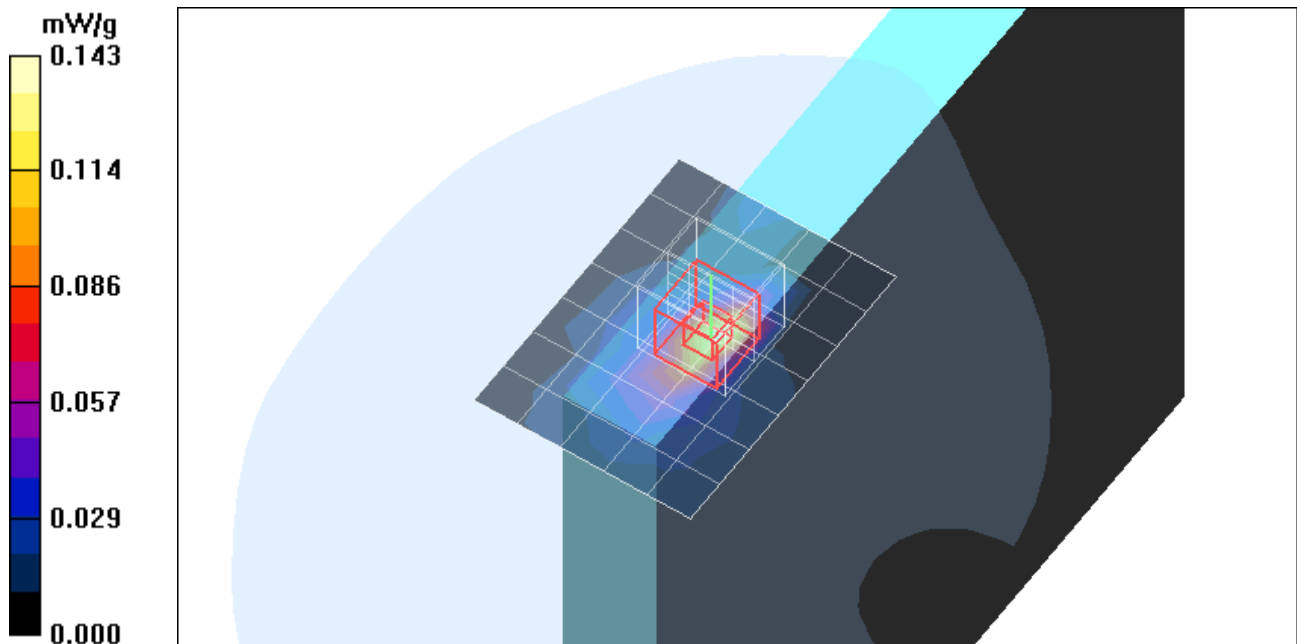

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

4_GSM GPRS H-ch (Co-Tx w/ BT and 11g HT40)/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.144 mW/g

4_GSM GPRS H-ch (Co-Tx w/ BT and 11g HT40)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.06 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

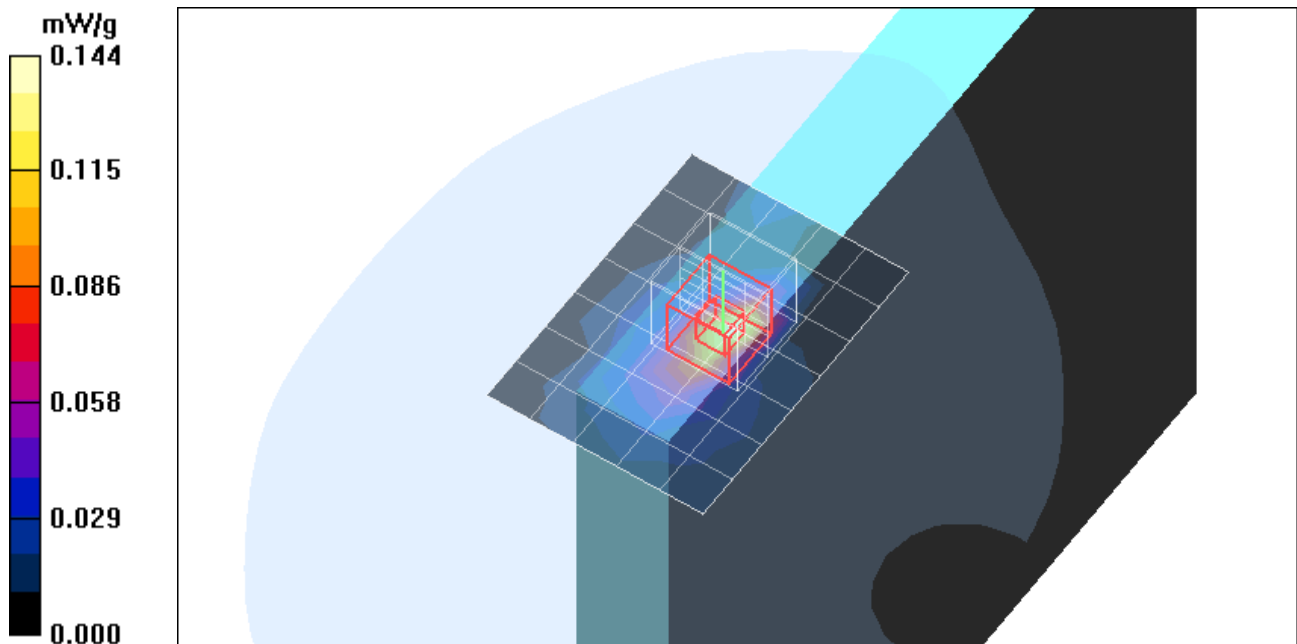

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

5_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G legacy mode)/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.152 mW/g

5_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G legacy mode)/Zoom Scan (5x5x7)/Cube


0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.11 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.180 mW/g

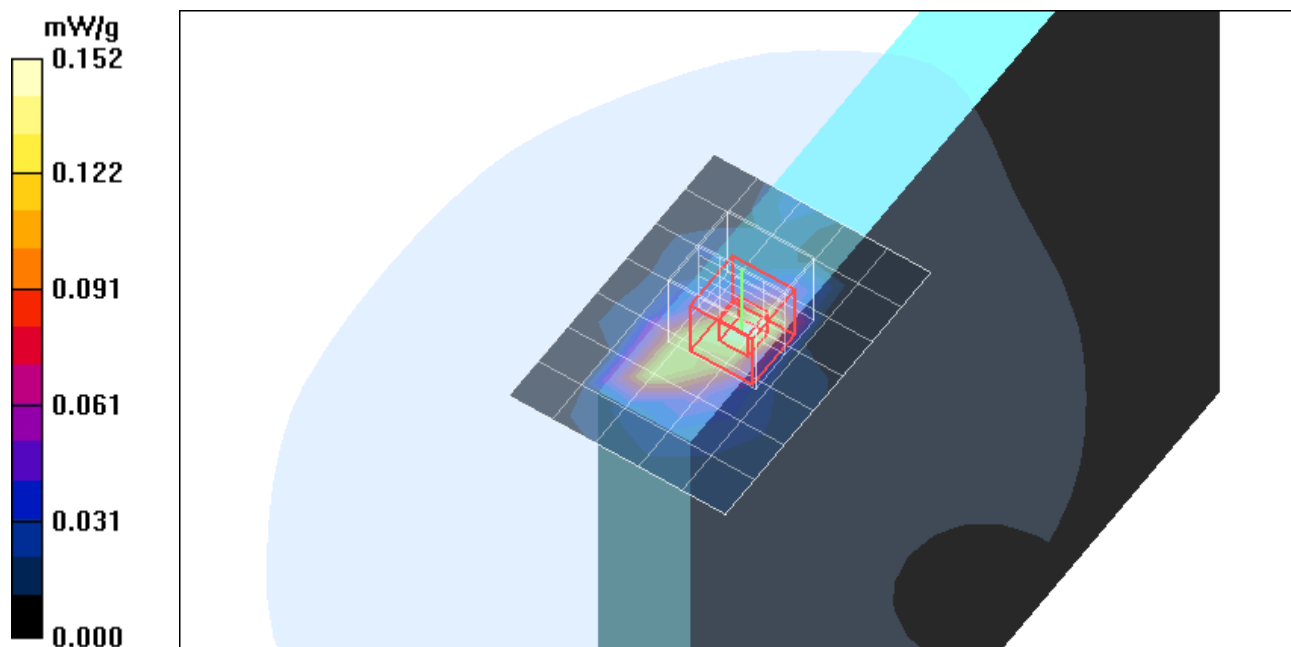

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

6_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G HT20)/Area Scan (6x8x1): Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.161 mW/g

6_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G HT20)/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.15 V/m; Power Drift = 0.134 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.074 mW/g
Maximum value of SAR (measured) = 0.170 mW/g

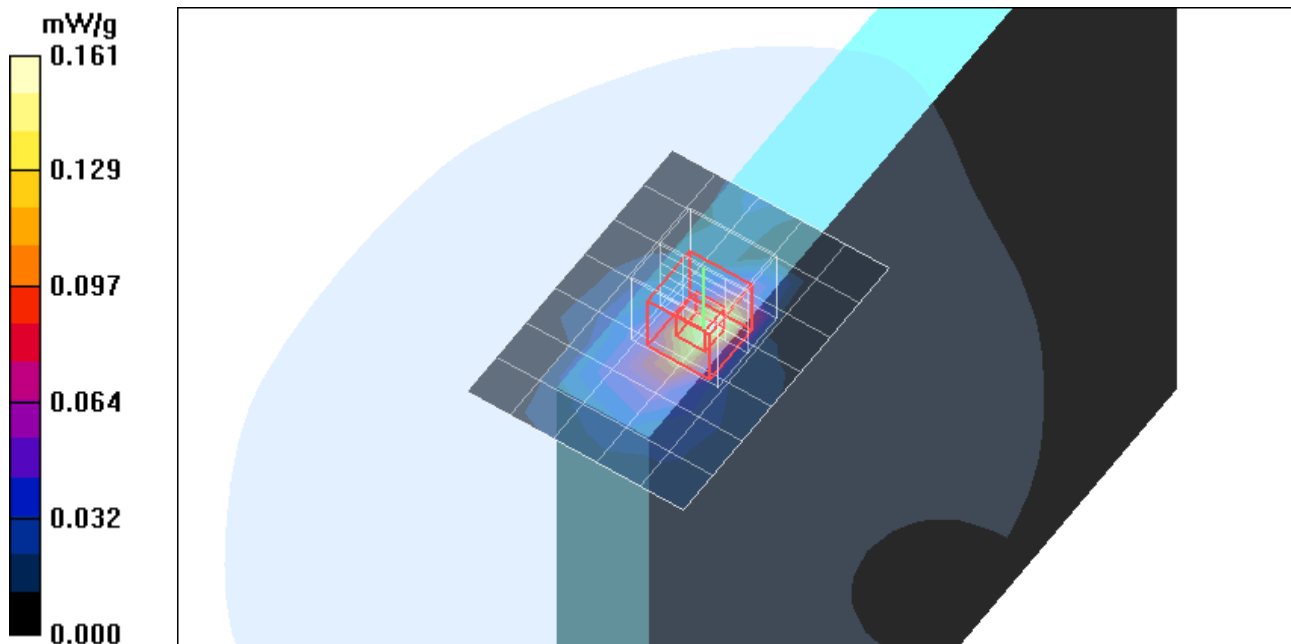

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

7_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G HT40)/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.150 mW/g

7_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.2G HT40)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.18 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.156 mW/g

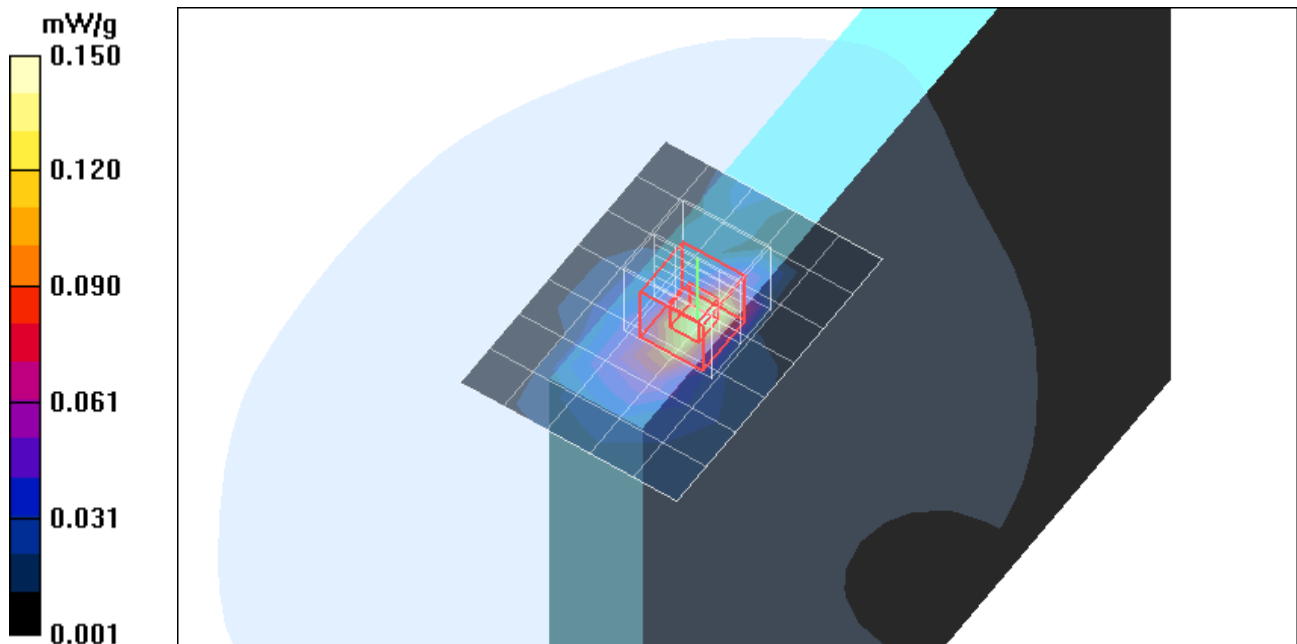

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

8_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G legacy mode)/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.150 mW/g

8_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G legacy mode)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.11 V/m; Power Drift = 0.194 dB
Peak SAR (extrapolated) = 0.237 W/kg
SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.067 mW/g
Maximum value of SAR (measured) = 0.155 mW/g

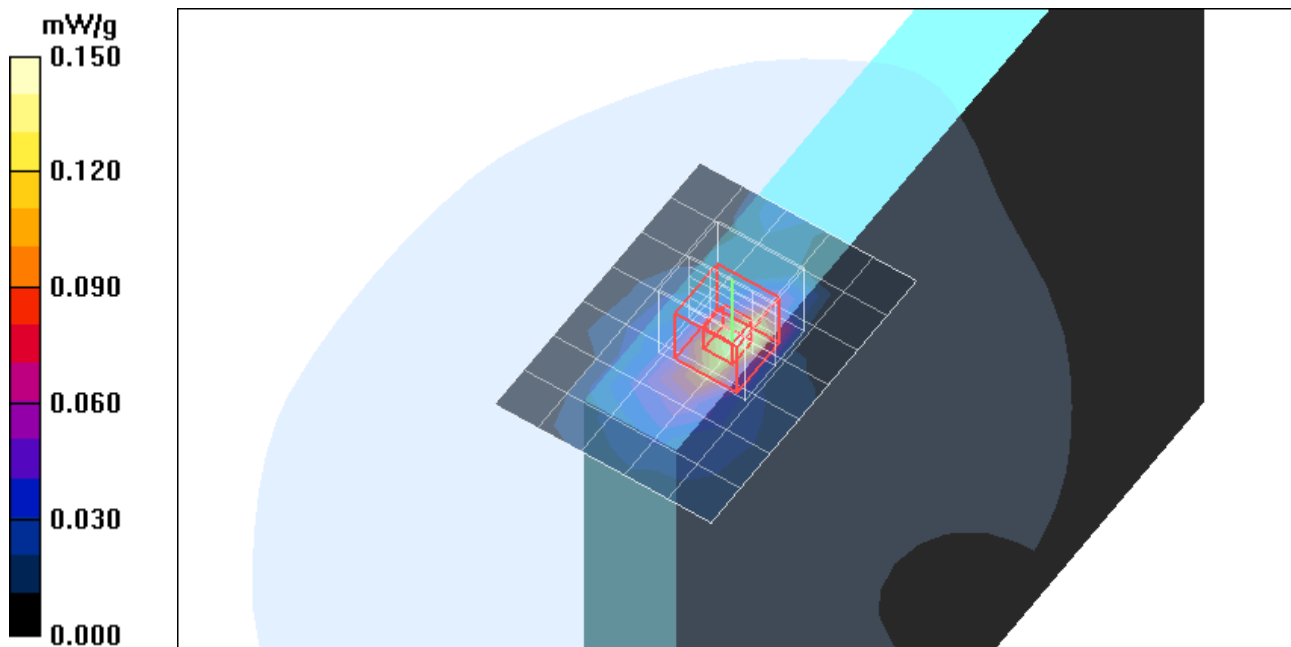

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

9_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G HT20)/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.142 mW/g

9_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G HT20)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.04 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.155 mW/g

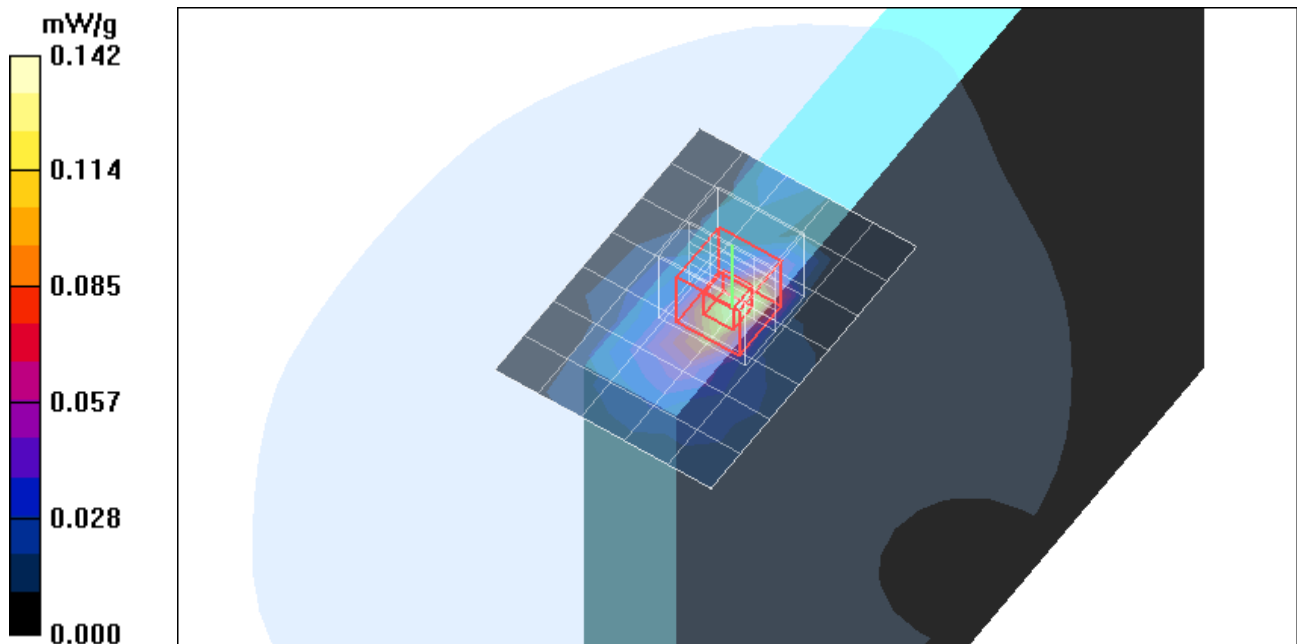

Test Laboratory: Compliance Certification Services

PCS Band - Edge Position (Co-Tx) - Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

10_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G HT40)/Area Scan (6x8x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 mW/g

10_GSM GPRS H-ch (Co-Tx w/ BT and 11a 5.8G HT40)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.07 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.155 mW/g

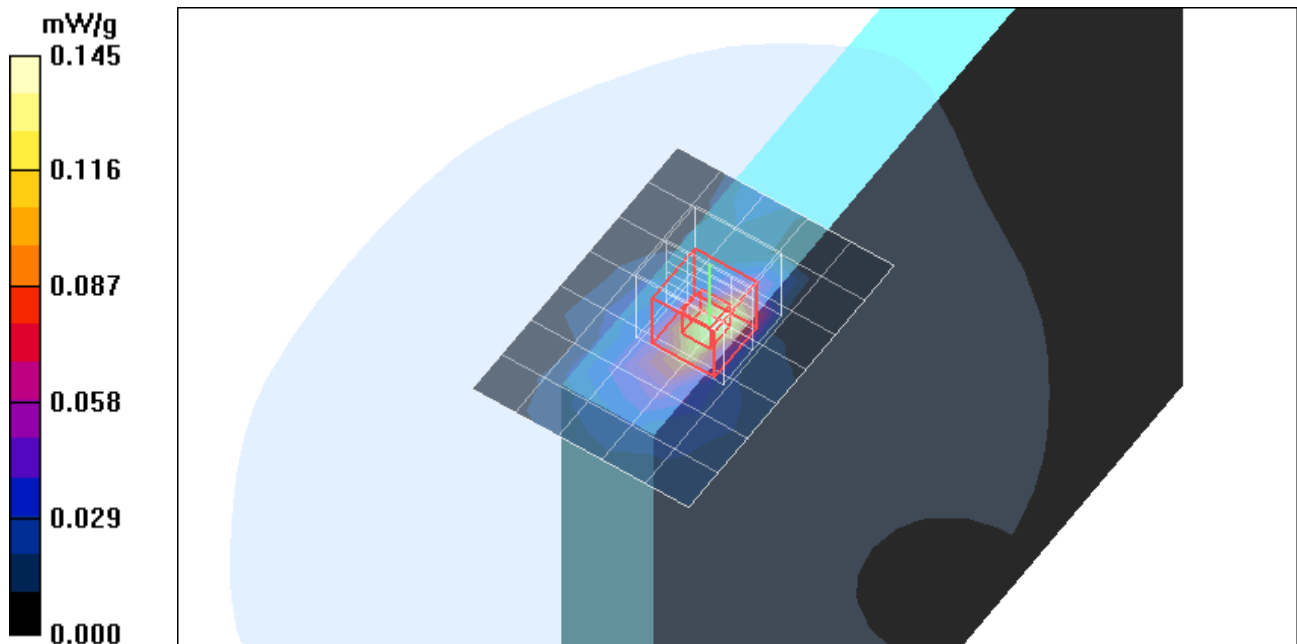

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1_GPRS L-ch_Co-Tx w/ BT and 802.11b legacy mode)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.200 mW/g

1_GPRS L-ch_Co-Tx w/ BT and 802.11b legacy mode)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.53 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.111 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

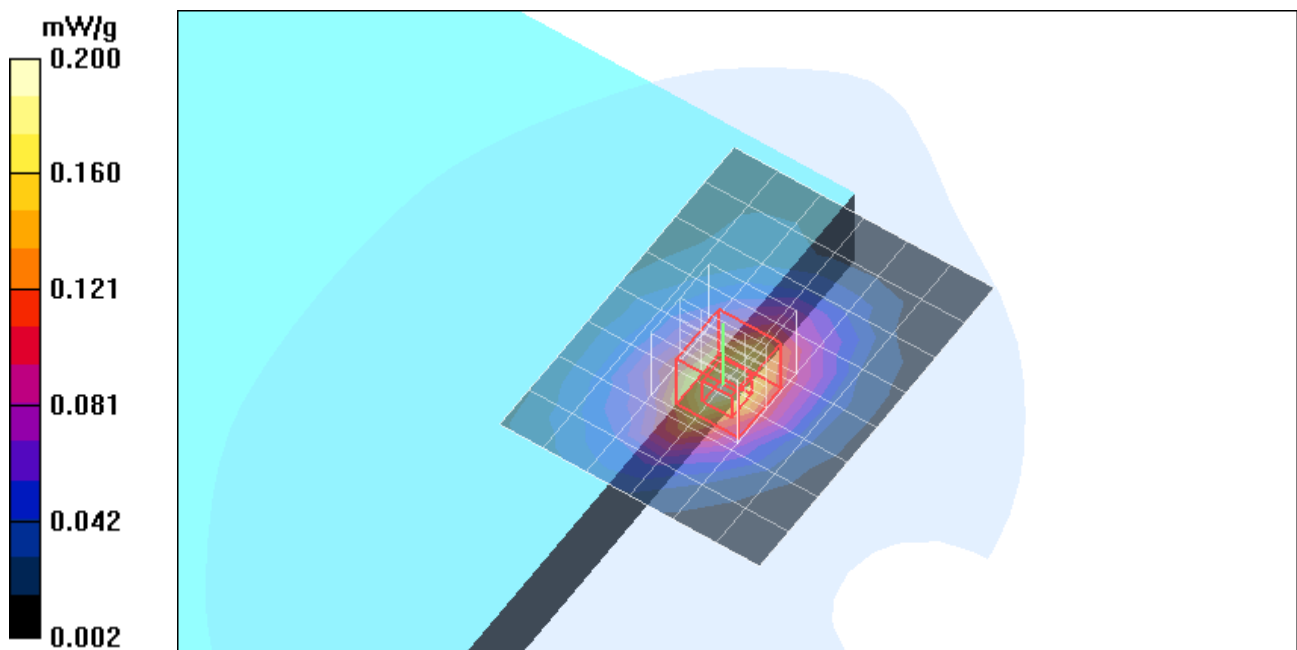

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2_GPRS L-ch_Co-Tx w/ BT and 802.11g legacy mode/Area Scan (7x9x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.196 mW/g

2_GPRS L-ch_Co-Tx w/ BT and 802.11g legacy mode/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.50 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 mW/g

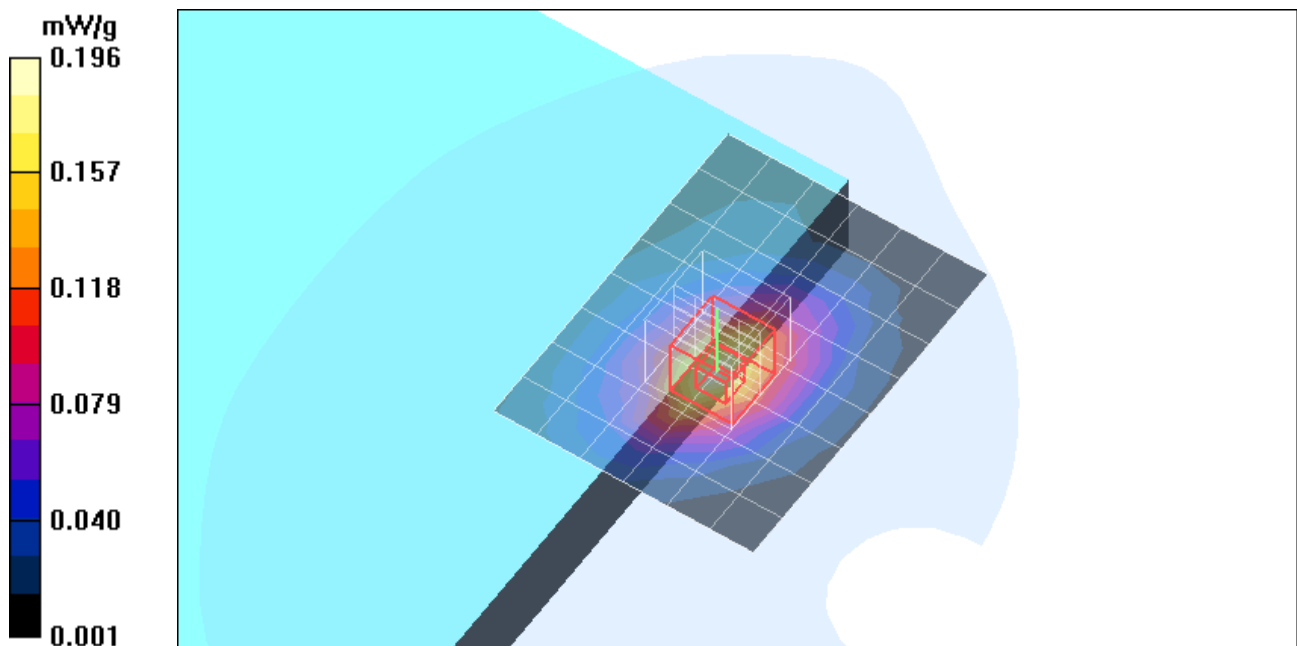

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

3_GPRS L-ch_Co-Tx w/ BT and 802.11g HT20 MIMO mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 mW/g

3_GPRS L-ch_Co-Tx w/ BT and 802.11g HT20 MIMO mode/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.48 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.200 mW/g

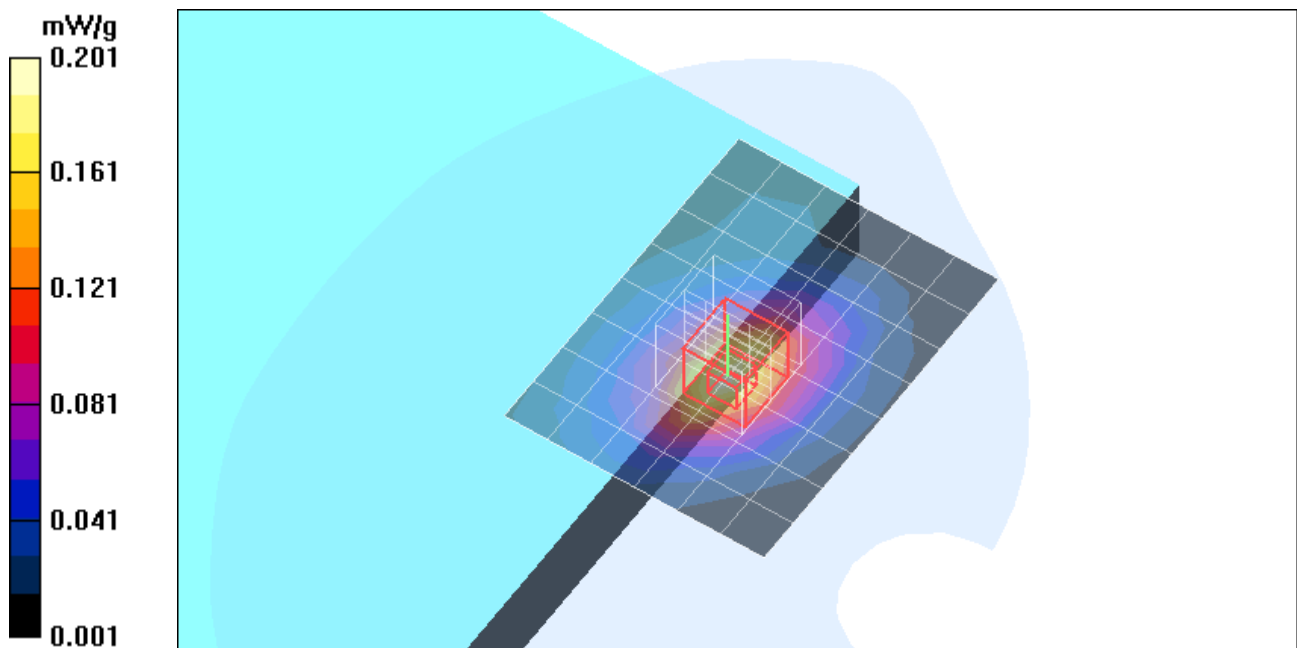

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

4_GPRS L-ch_Co-Tx w/ BT and 802.11g HT40 MIMO mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.202 mW/g

4_GPRS L-ch_Co-Tx w/ BT and 802.11g HT40 MIMO mode/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.59 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

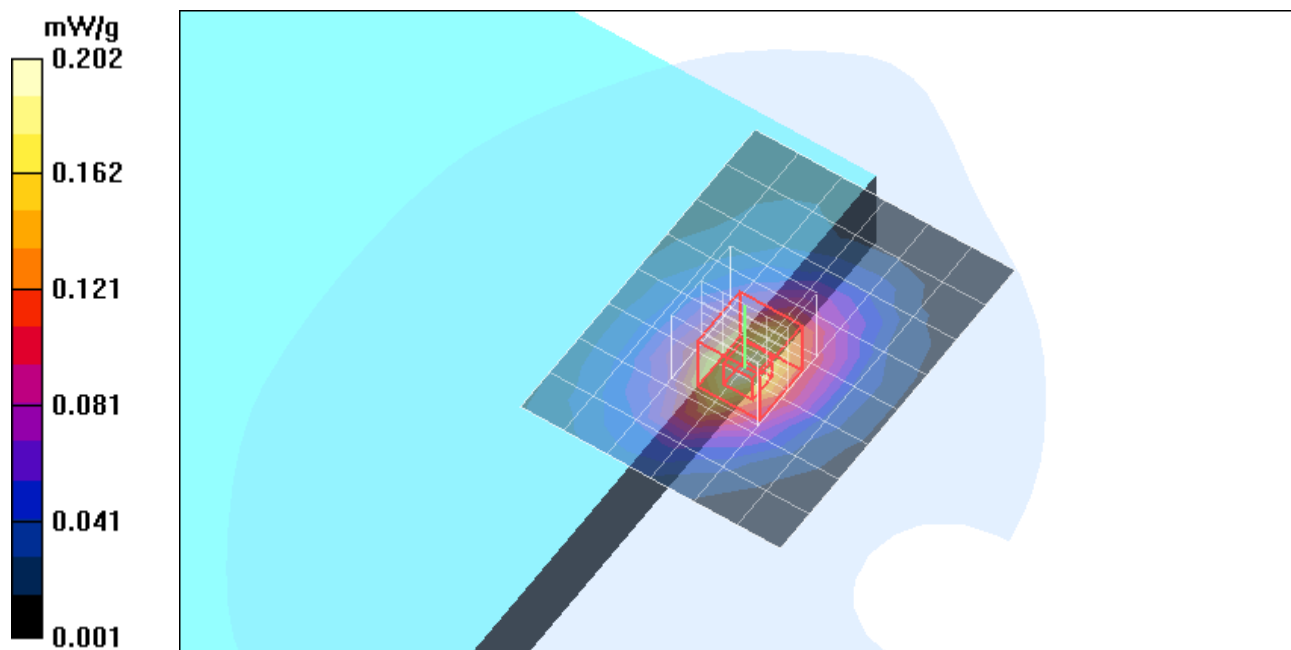

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

5_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G legacy mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.198 mW/g

5_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G legacy mode/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.58 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.202 mW/g

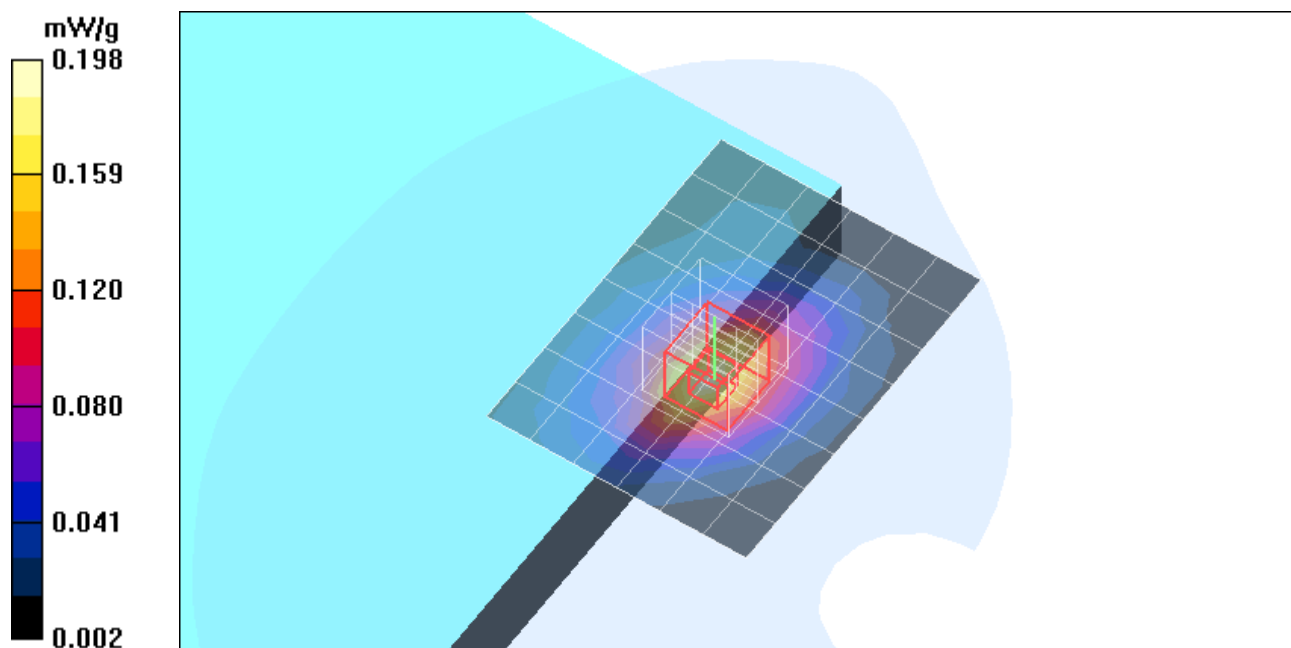

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)


DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:4

5_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G legacy mode/Z Scan (1x1x29): Measurement grid: dx=20mm, dy=20mm, dz=3.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.113 mW/g

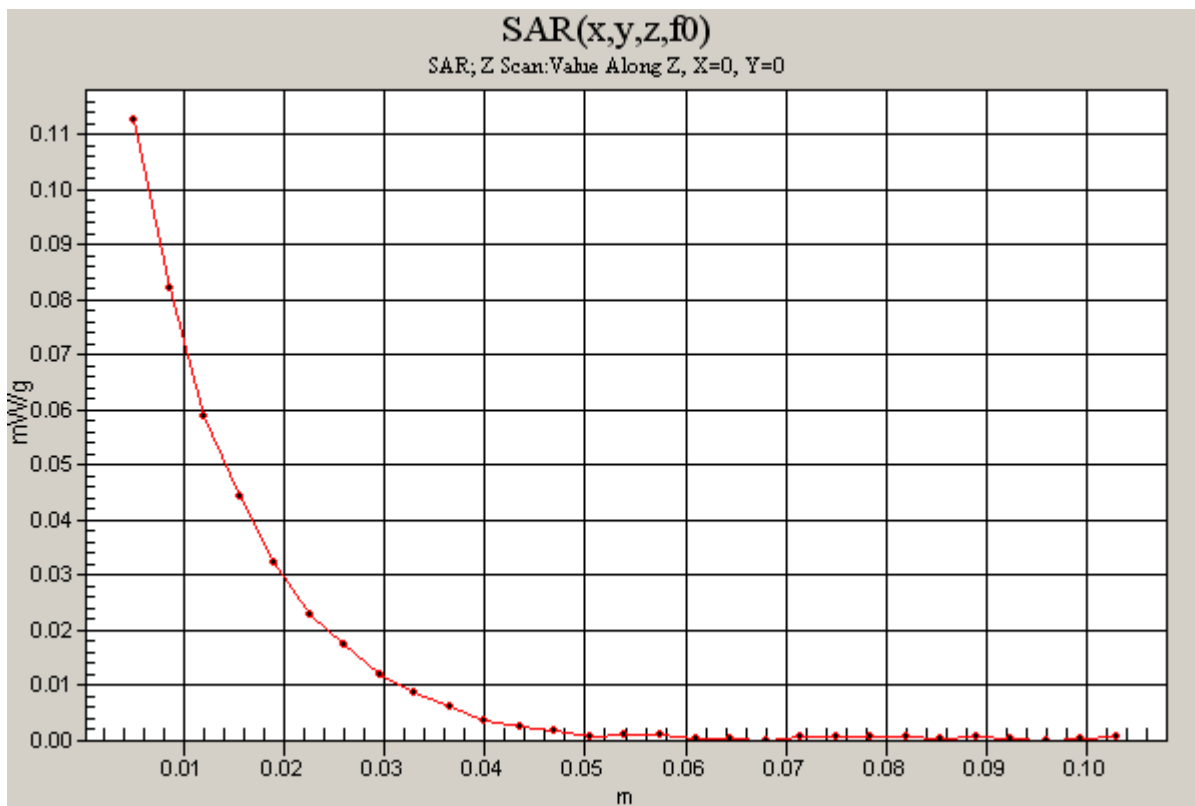

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

6_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G HT20 MIMO mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.199 mW/g

6_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G HT20 MIMO mode/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.59 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.110 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

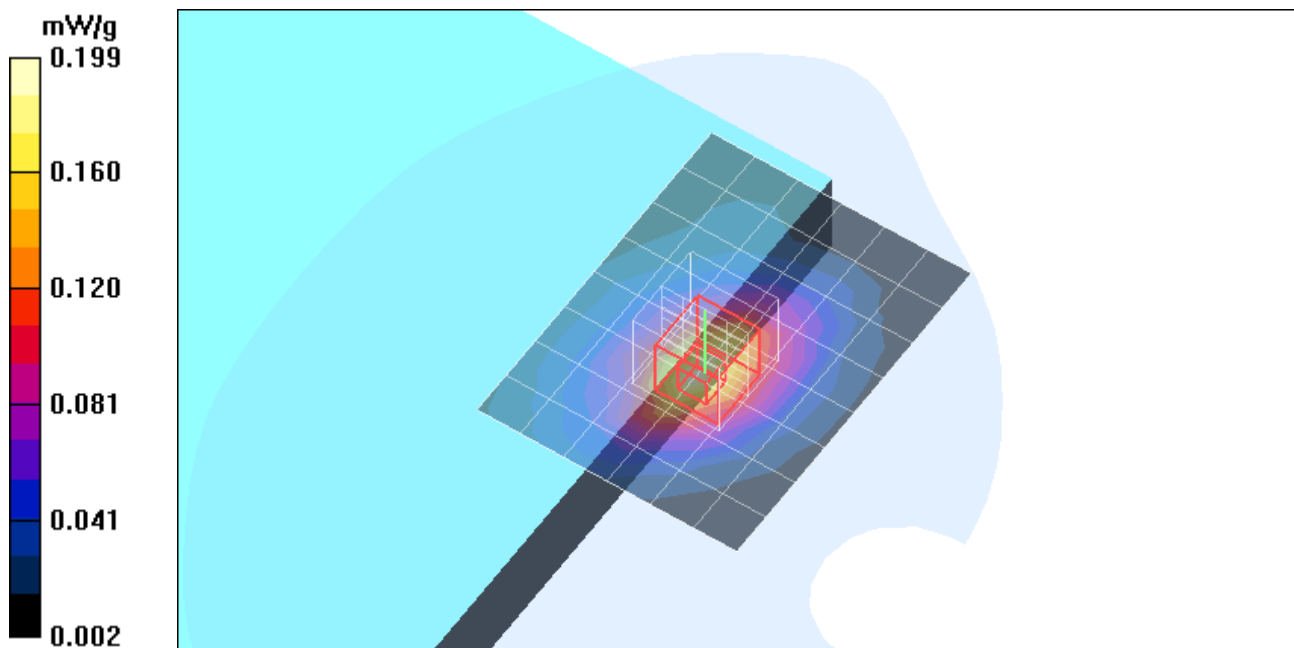

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

7_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G HT40 MIMO mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.196 mW/g

7_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.2G HT40 MIMO mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.51 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.109 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.195 mW/g

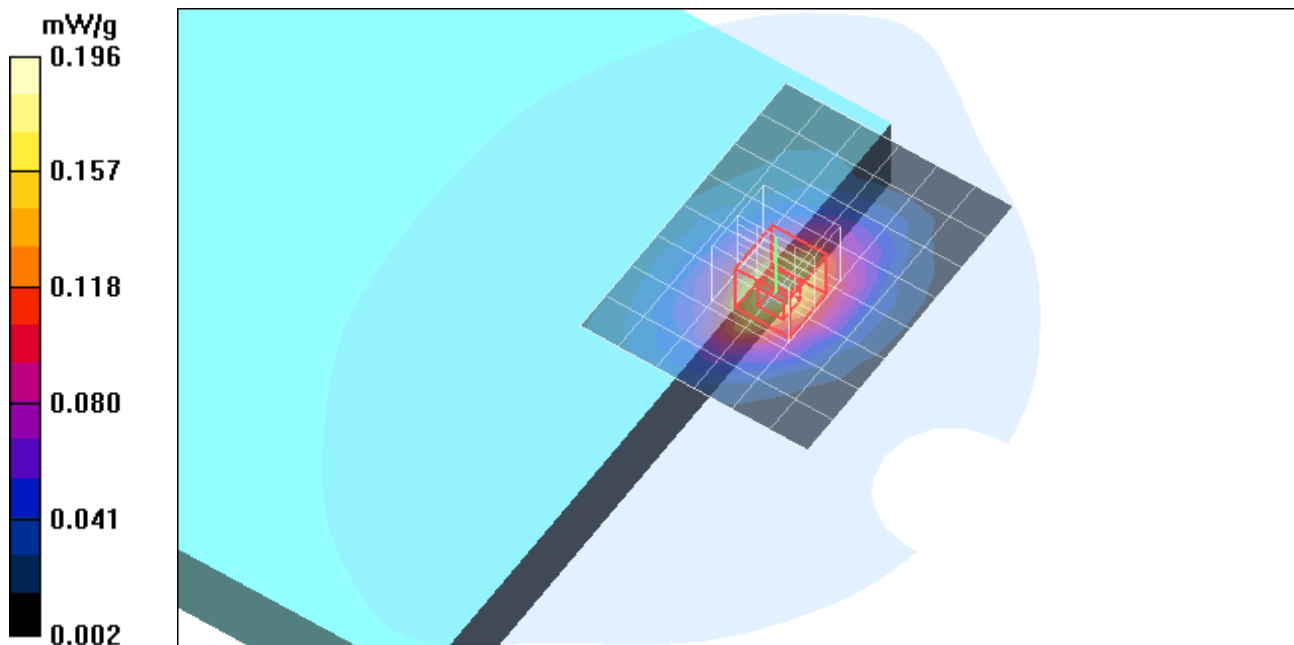

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

8_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G legacy mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.197 mW/g

8_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G legacy mode/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.47 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.109 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.196 mW/g

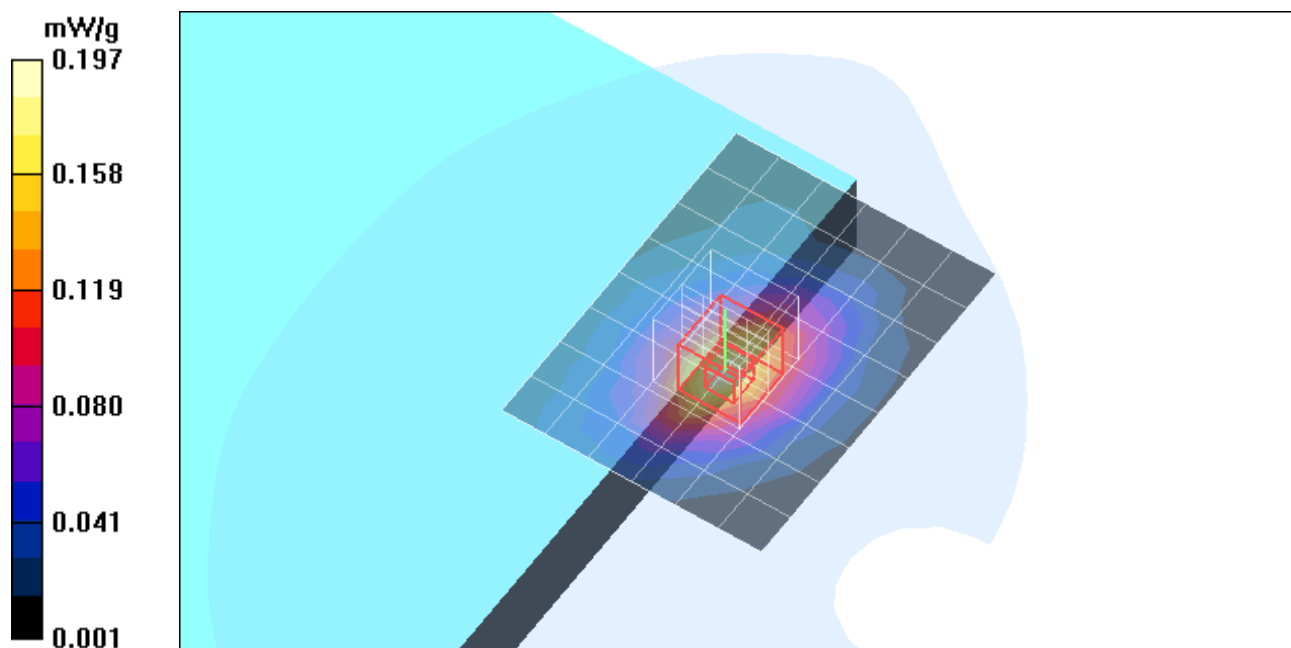

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

9_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G HT20 MIMO mode/Area Scan (7x9x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.196 mW/g

9_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G HT20 MIMO mode/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 6.47 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.110 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.198 mW/g

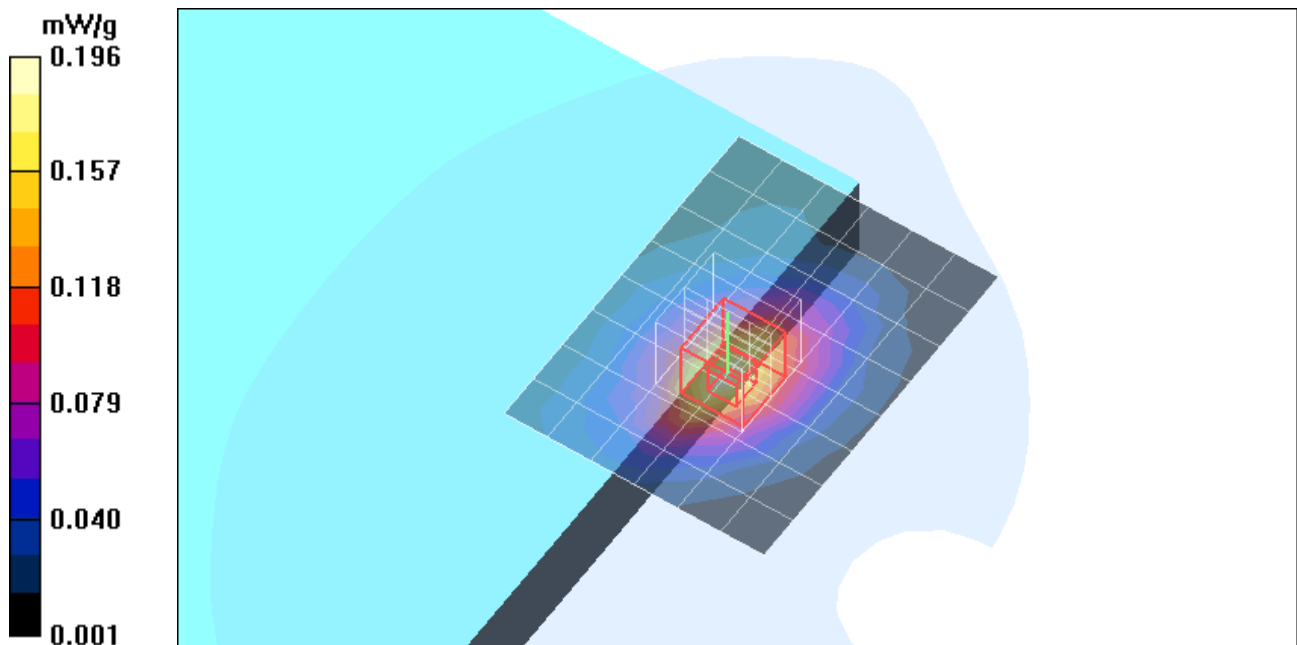

Test Laboratory: Compliance Certification Services

PCS Band - Lap Held Position (Co-Tx)

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 SN558; Calibrated: 1/20/2006
 - Phantom: SAM 2; Type: SAM 2; Serial: 1050
 - Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

10_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G HT40 MIMO mode/Area Scan (7x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 0.197 mW/g

10_GPRS L-ch_Co-Tx w/ BT and 802.11a 5.8G HT40 MIMO mode/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.46 V/m; Power Drift = -0.019 dB
Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.110 mW/g
[Info: Interpolated medium parameters used for SAR evaluation.](#)
Maximum value of SAR (measured) = 0.196 mW/g

