



**FCC CFR47 PART 15 SUBPART B  
ICES-003 ISSUE 4, 2004-02**

**VERIFICATION TEST REPORT  
FOR**

**USB MODEM**

**MODEL NUMBER: USB305**

**REPORT NUMBER: 09U12572-2, Revision B**

**FCC ID: N7NU305**

**ISSUE DATE: JULY 08, 2009**

*Prepared for*  
**SIERRA WIRELESS, INC.  
13811 WIRELESS WAY  
RICHMOND, BC V6V 3A4, CANADA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| --          | 06/02/09          | Initial Issue    | T. Chan           |
| B           | 07/08/09          | Added FCC ID     | A. Zaffar         |



# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SIERRA WIRELESS, INC.  
13811 WIRELESS WAY  
RICHMOND, BC V6V 3A4, CANADA

**EUT DESCRIPTION:** 850/900/1800/1900/2100 USB MODEM

**MODEL:** USB305

**SERIAL NUMBER:** 02305

**DATE TESTED:** MAY 28, 2009

| APPLICABLE STANDARDS      |              |
|---------------------------|--------------|
| STANDARD                  | TEST RESULTS |
| FCC PART 15 SUBPART B     | PASS         |
| ICES-003 ISSUE 4, 2004-02 | PASS         |

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



---

THU CHEN  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

---

THANH NGUYEN  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and ICES-003 ISSUE 4, 2004-02.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 1000 MHz  | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a multi-band wireless modem that operates on the GSM/GPRS/EDGE/UMTS network. The EUT manufactured by Sierra Wireless, Inc.

#### GENERAL INFORMATION

|   |                    |
|---|--------------------|
| CHASSIS MATERIAL  | PLASTIC            |
| ENCLOSURE MATERIAL  | PLASTIC            |
| POWER REQUIREMENTS  | 5VDC from USB port |
| POWERLINE FILTER MANUFACTURER AND MODEL                           | N/A                |
| LIST OF ALL OSCILLATOR FREQUENCIES GREATER THAN OR EQUAL TO 9 kHz | 26MHz, 3.9796GHz   |

### 5.2. WORST CASE CONFIGURATIONS

Based on past experience, the worst-case configuration was determined to be EUT connected via USB cable. Then all tests have done with this configuration, i.e. EUT connected to a laptop via USB cable.

### 5.3. MODE(S) OF OPERATION

| Mode   | Description   |
|--------|---|
| Normal | The EUT was in normal mode, while all the I/O ports active to transfer data between the laptop and other peripherals. |

### 5.4. SOFTWARE AND FIRMWARE

The test software used during the test was EMCTest software.

### 5.5. MODIFICATIONS

No modifications were made during testing.

## 5.6. DETAILS OF TESTED SYSTEM

### SUPPORT EQUIPMENT & PERIPHERALS

| PERIPHERAL SUPPORT EQUIPMENT LIST |               |           |               |        |
|-----------------------------------|---------------|-----------|---------------|--------|
| Description                       | Manufacturer  | Model     | Serial Number | FCC ID |
| Laptop                            | IBM           | LenovoT60 | BC354         | DoC    |
| AC/DC Adapter                     | Lenovo        | 65W/20V   | M2-SIT#Cc215  | DoC    |
| HUB                               | Linksys       | EWHUB     | HDE3035315    | DoC    |
| Printer                           | Microline 186 | D22300A   | AE5A048148A0  | DoC    |
| HUB AC Adapter                    | YNG YUH       | YB-04U    | 2435          | N/A    |


### I/O CABLES

| I/O CABLE LIST |      |                      |                |             |              |         |
|----------------|------|----------------------|----------------|-------------|--------------|---------|
| Cable No.      | Port | # of Identical Ports | Connector Type | Cable Type  | Cable Length | Remarks |
| 1              | AC   | 1                    | US 115V        | Un-shielded | 2m           |         |
| 2              | DC   | 2                    | DC Plug        | Un-shielded | 1.5m         |         |
| 3              | WLAN | 1                    | RJ45           | Un-shielded | 1.5m         |         |
| 4              | USB  | 1                    | USB            | Shielded    | 1m           |         |

### TEST SETUP

The EUT is installed into a laptop via USB cable, and test software exercised the EUT.

**TEST SETUP DIAGRAM**

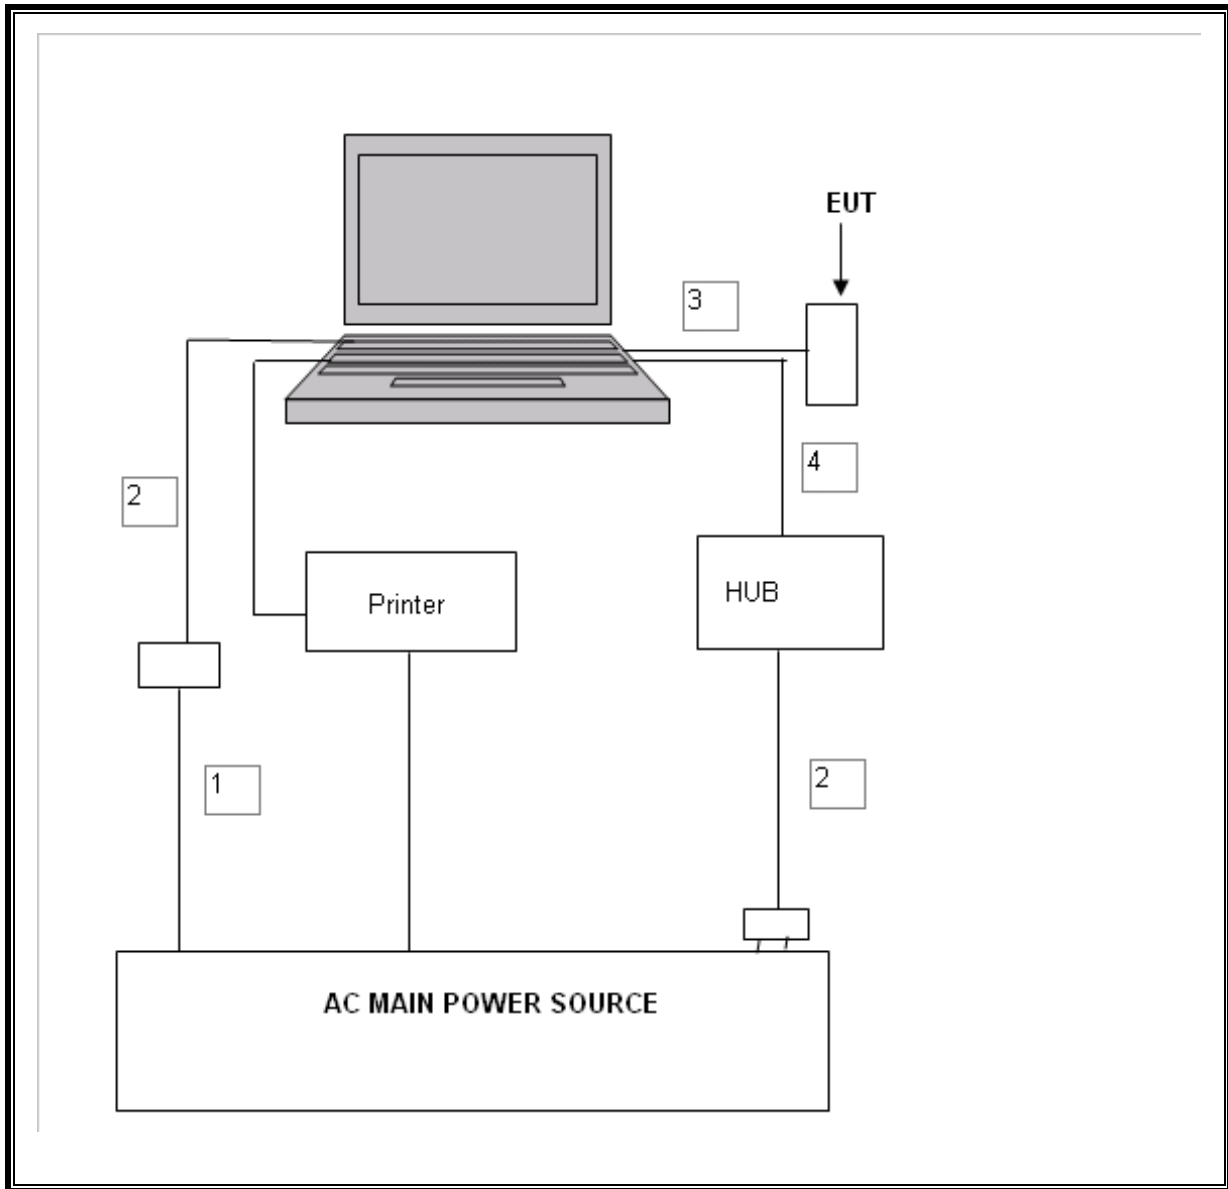



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST       |               |                  |               |          |
|---------------------------|---------------|------------------|---------------|----------|
| Description               | Manufacturer  | Model            | Serial Number | Cal Due  |
| Antenna, Bilog, 2 GHz     | Sund Sciences | JB1              | C01171        | 01/14/10 |
| Preamplifier, 1300 MHz    | Agilent / HP  | 8447D            | C00885        | 03/31/10 |
| PSA                       | Agilent / HP  | E4446A           | C00986        | 05/30/10 |
| LISN, 30 MHz              | FOC           | LISN-50/250-25-2 | N02625        | 10/29/09 |
| LISN, 10 kHz ~ 30 MHz     | Solar         | 8012-50-R-24-BNC | N02481        | 10/29/09 |
| EMI Test Receiver, 30 MHz | R&S           | ESHS 20          | N02396        | 08/06/09 |

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. RADIATED EMISSIONS

#### TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated is 3.9796 GHz in the EUT. Therefore the frequency range was investigated from 30 MHz to 20 GHz.

#### LIMIT


§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Limits for radiated disturbance of Class B ITE at measuring distance of 3 m |                                  |
|---|----------------------------------|
| Frequency range (MHz)   | Quasi-peak limits (dB $\mu$ V/m) |
| 30 to 88  | 40                               |
| 88 to 216   | 43.5                             |
| 216 to 960  | 46                               |
| Above 960 MHz   | 54                               |


Note: The lower limit shall apply at the transition frequency.

#### RESULTS

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)**

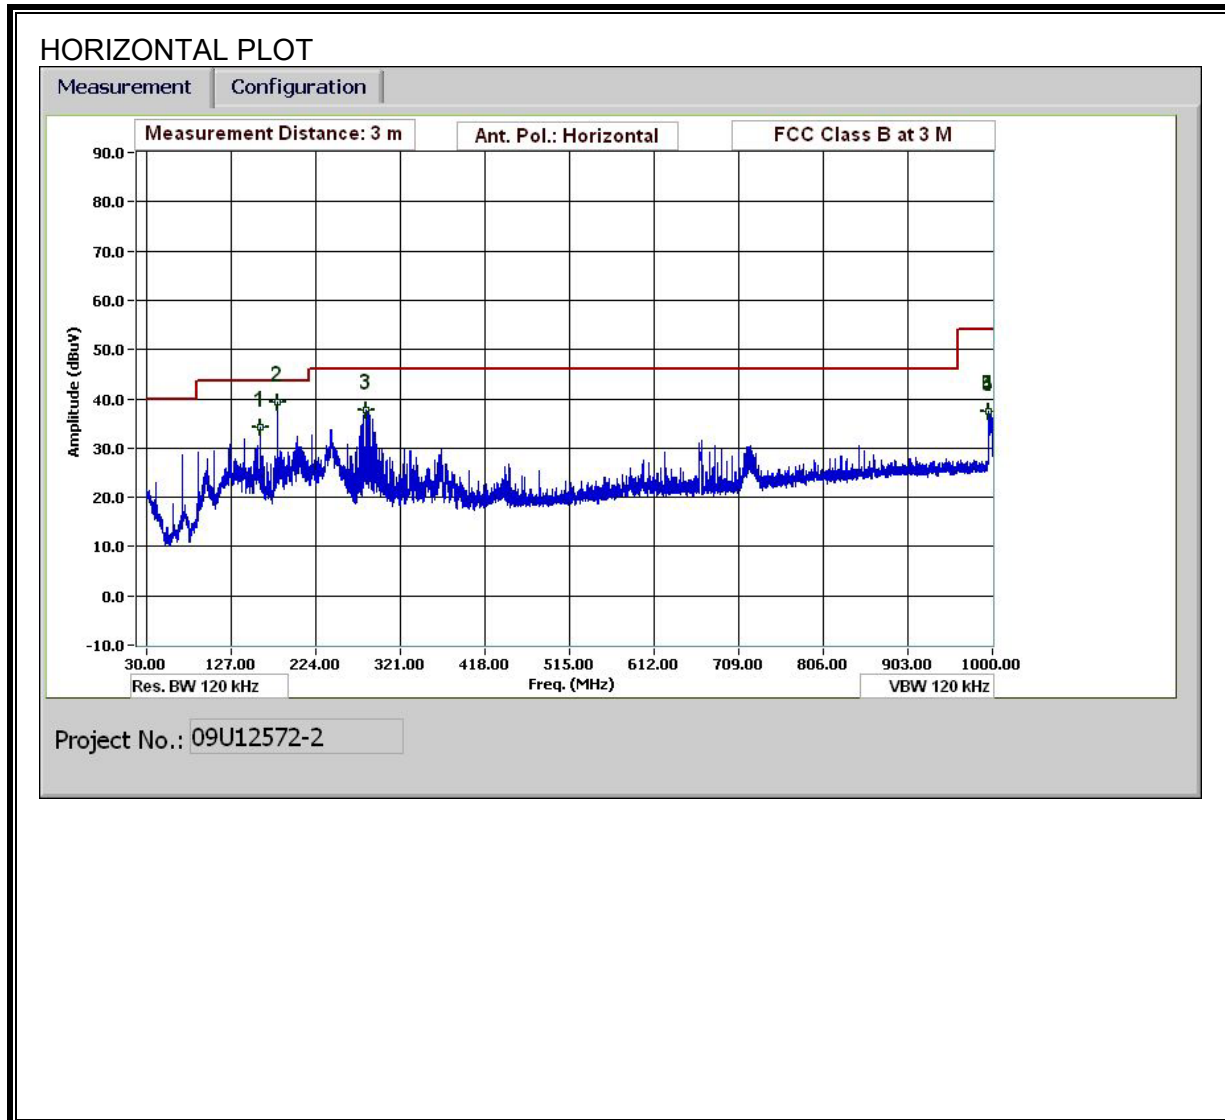

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

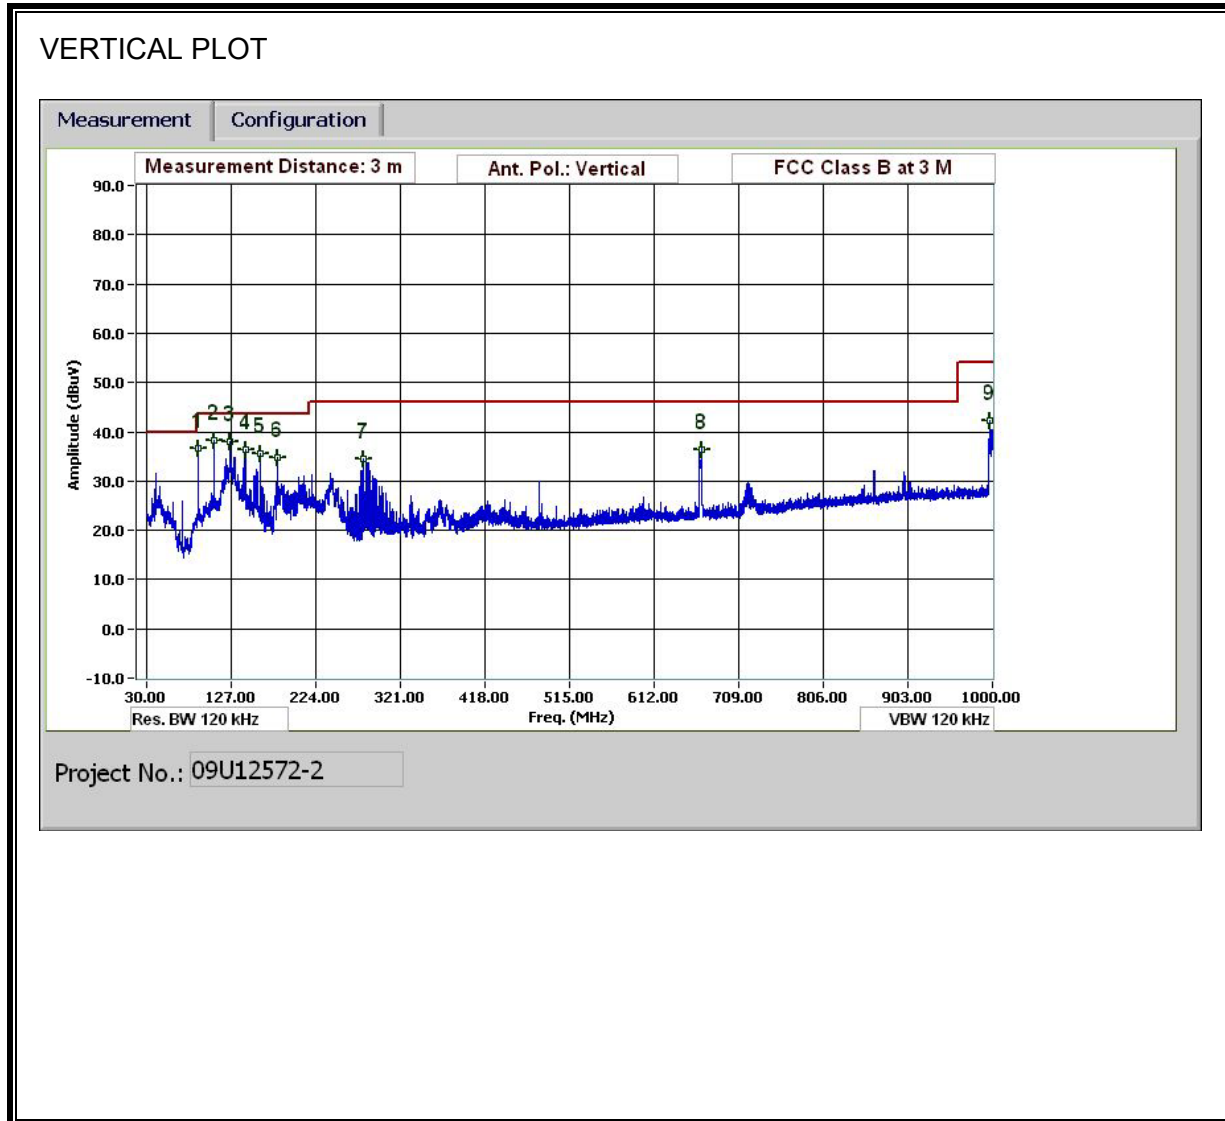

**EMISSIONS DATA**

30-1000MHz Frequency Measurement  
 Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen  
 Date: 05/28/09  
 Project #: 09U12572  
 Company: Sierra Wireless Inc.  
 EUT Description: USB Modem with GSM,GPRS,WCDMA,HSDPA,HSUBA  
 EUT M/N: USB305  
 Test Target: FCC Class B  
 Mode Oper: Normal

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit  
 Dist Distance to Antenna D Corr Distance Correct to 3 meters  
 Read Analyzer Reading Filter Filter Insert Loss  
 AF Antenna Factor Corr. Calculated Field Strength  
 CL Cable Loss Limit Field Strength Limit

| f<br>MHz | Dist<br>(m) | Read<br>dBuV | AF<br>dB/m | CL<br>dB | Amp<br>dB | D Corr<br>dB | Filter<br>dB | Corr.<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Ant. Pol.<br>V/H | Det.<br>P/A/QP | Notes |
|----------|-------------|--------------|------------|----------|-----------|--------------|--------------|-----------------|-----------------|--------------|------------------|----------------|-------|
| 89.522   | 3.0         | 56.6         | 7.4        | 0.8      | 28.3      | 0.0          | 0.0          | 36.5            | 43.5            | -7.0         | V                | P              |       |
| 107.283  | 3.0         | 54.6         | 10.9       | 0.8      | 28.2      | 0.0          | 0.0          | 38.1            | 43.5            | -5.4         | V                | P              |       |
| 125.164  | 3.0         | 50.8         | 14.1       | 0.9      | 28.0      | 0.0          | 0.0          | 37.9            | 43.5            | -5.6         | V                | P              |       |
| 143.045  | 3.0         | 50.4         | 13.0       | 1.0      | 27.9      | 0.0          | 0.0          | 36.5            | 43.5            | -7.0         | V                | P              |       |
| 160.925  | 3.0         | 49.3         | 13.0       | 1.1      | 27.7      | 0.0          | 0.0          | 35.7            | 43.5            | -7.8         | V                | P              |       |
| 180.126  | 3.0         | 50.3         | 10.8       | 1.1      | 27.5      | 0.0          | 0.0          | 34.7            | 43.5            | -8.8         | V                | P              |       |
| 279.010  | 3.0         | 47.7         | 12.8       | 1.4      | 27.4      | 0.0          | 0.0          | 34.4            | 46.0            | -11.6        | V                | P              |       |
| 666.266  | 3.0         | 43.9         | 18.8       | 2.3      | 28.5      | 0.0          | 0.0          | 36.4            | 46.0            | -9.6         | V                | P              |       |
| 997.480  | 3.0         | 44.4         | 22.7       | 2.9      | 27.6      | 0.0          | 0.0          | 42.4            | 54.0            | -11.6        | V                | P              |       |
| 160.565  | 3.0         | 47.9         | 13.1       | 1.1      | 27.7      | 0.0          | 0.0          | 34.3            | 43.5            | -9.2         | H                | P              |       |
| 180.126  | 3.0         | 54.8         | 10.8       | 1.1      | 27.5      | 0.0          | 0.0          | 39.3            | 43.5            | -4.2         | H                | P              |       |
| 996.160  | 3.0         | 39.4         | 22.7       | 2.9      | 27.6      | 0.0          | 0.0          | 37.4            | 54.0            | -16.6        | H                | P              |       |

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

**SPURIOUS EMISSIONS ABOVE 1000 MHz (WORST-CASE CONFIGURATION)**

**High Frequency Measurement**  
 Compliance Certification Services, Fremont 5m Chamber

**Company:** Sierra Wireless Inc.  
**Project #:** 09U12572-2  
**Date:** 05/28/09  
**Test Engineer:** Thanh Nguyen  
**Configuration:** USB Modem with GSM,GPRS,WCDMA,HSDPA,HSUBA  
**Mode:** Digital Configuration.

**Test Equipment:**

|                     |                             |                              |                        |              |
|---------------------|-----------------------------|------------------------------|------------------------|--------------|
| <b>Horn 1-18GHz</b> | <b>Pre-amplifer 1-26GHz</b> | <b>Pre-amplifer 26-40GHz</b> | <b>Horn &gt; 18GHz</b> | <b>Limit</b> |
| T73; S/N: 6717 @3m  | T34 HP 8449B                |                              |                        | FCC 15.109   |

Hi Frequency Cables

|                          |                           |                           |            |                      |  |
|--------------------------|---------------------------|---------------------------|------------|----------------------|--|
| <b>3' cable 22807700</b> | <b>12' cable 22807600</b> | <b>20' cable 22807500</b> | <b>HPF</b> | <b>Reject Filter</b> | <b>Peak Measurements</b><br>RBW=VBW=1MHz           |
| 3' cable 22807700        | 12' cable 22807600        | 20' cable 22807500        |            |                      | <b>Average Measurements</b><br>RBW=1MHz ; VBW=10Hz |

| f<br>GHz | Dist<br>(m) | Read Pk<br>dBuV | Read Avg.<br>dBuV | AF<br>dB/m | CL<br>dB | Amp<br>dB | D Corr<br>dB | Filtr<br>dB | Peak<br>dBuV/m | Avg<br>dBuV/m | Pk Lim<br>dBuV/m | Avg Lim<br>dBuV/m | Pk Mar<br>dB | Avg Mar<br>dB | Notes<br>(V/H) |
|----------|-------------|-----------------|-------------------|------------|----------|-----------|--------------|-------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| 1.000    | 3.0         | 63.3            | 42.1              | 23.9       | 2.4      | -38.3     | 0.0          | 0.0         | 51.2           | 30.1          | 74               | 54                | -22.8        | -23.9         | H              |
| 1.665    | 3.0         | 55.5            | 38.5              | 26.1       | 3.1      | -37.3     | 0.0          | 0.0         | 47.3           | 30.3          | 74               | 54                | -26.7        | -23.7         | H              |
| 1.100    | 3.0         | 61.5            | 41.6              | 24.2       | 2.5      | -38.1     | 0.0          | 0.0         | 50.1           | 30.1          | 74               | 54                | -23.9        | -23.9         | V              |
| 1.666    | 3.0         | 58.5            | 39.7              | 26.1       | 3.1      | -37.3     | 0.0          | 0.0         | 50.4           | 31.6          | 74               | 54                | -23.6        | -22.4         | V              |
| 1.782    | 3.0         | 54.4            | 37.6              | 26.5       | 3.2      | -37.2     | 0.0          | 0.0         | 46.9           | 30.1          | 74               | 54                | -27.1        | -23.9         | V              |
| 3.553    | 3.0         | 49.0            | 32.4              | 31.3       | 4.8      | -35.4     | 0.0          | 0.0         | 49.7           | 33.0          | 74               | 54                | -24.3        | -21.0         | V              |

No other emissions were detected above the system noise floor.

Rev. 11.10.08

|      |                       |        |                                |         |                              |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f    | Measurement Frequency | Amp    | Preamp Gain                    | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna   | D Corr | Distance Correct to 3 meters   | Pk Lim  | Peak Field Strength Limit    |
| Read | Analyzer Reading      | Avg    | Average Field Strength @ 3 m   | Avg Mar | Margin vs. Average Limit     |
| AF   | Antenna Factor        | Peak   | Calculated Peak Field Strength | Pk Mar  | Margin vs. Peak Limit        |
| CL   | Cable Loss            | HPF    | High Pass Filter               |         |                              |

## 7.2. AC MAINS LINE CONDUCTED EMISSIONS

### TEST PROCEDURE

ANSI C63.4

### LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency range<br>(MHz) | Limits (dB $\mu$ V) |          |
|--------------------------|---------------------|----------|
|                          | Quasi-peak          | Average  |
| 0.15 to 0.50             | 66 to 56            | 56 to 46 |
| 0.50 to 5                | 56                  | 46       |
| 5 to 30                  | 60                  | 50       |

Notes:  
1. The lower limit shall apply at the transition frequencies  
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### RESULTS

**6 WORST EMISSIONS**

| CONDUCTED EMISSIONS DATA (115VAC 60Hz) |           |           |           |       |       |       |         |         |         |
|--|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq.                                  | Reading   |           |           | Class | Limit | EN_B  | Margin  |         | Remark  |
| (MHz)                                  | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB)  | QP    | AV    | QP (dB) | AV (dB) | L1 / L2 |
| 0.19                                   | 50.63     | --        | 33.61     | 0.00  | 64.08 | 54.08 | -13.45  | -20.47  | L1      |
| 0.98                                   | 39.54     | --        | 24.89     | 0.00  | 56.00 | 46.00 | -16.46  | -21.11  | L1      |
| 4.65                                   | 45.97     | --        | 29.96     | 0.00  | 56.00 | 46.00 | -10.03  | -16.04  | L1      |
| 0.30                                   | 53.13     | --        | 21.64     | 0.00  | 60.24 | 50.24 | -7.11   | -28.60  | L2      |
| 0.46                                   | 47.65     | --        | 22.74     | 0.00  | 56.67 | 46.67 | -9.02   | -23.93  | L2      |
| 4.65                                   | 45.76     | --        | 30.31     | 0.00  | 56.00 | 46.00 | -10.24  | -15.69  | L2      |
| 6 Worst Data                           |           |           |           |       |       |       |         |         |         |




**LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 21 File#: Digital LC.EMI Date: 05-28-2009 Time: 14:36:59

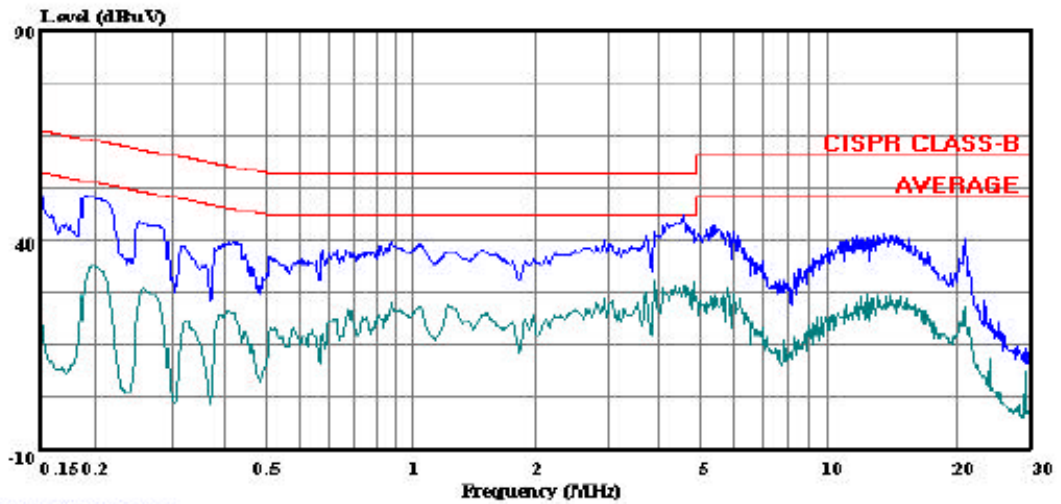

(Line Conduction)

Trace: 19

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator: : Thanh Nguyen  
Project #: : 09U12572  
Company: : Sierra Wireless, Inc.  
EUT Description: : EUT with Support Equipment  
Mode: : Normal  
Target: : FCC Class B  
Voltage: : 115Vac, 60Hz  
: L1 Peak ( Blue ) , Average ( Green )

**LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 14 File#: Digital LC.EMI Date: 05-28-2009 Time: 14:21:46

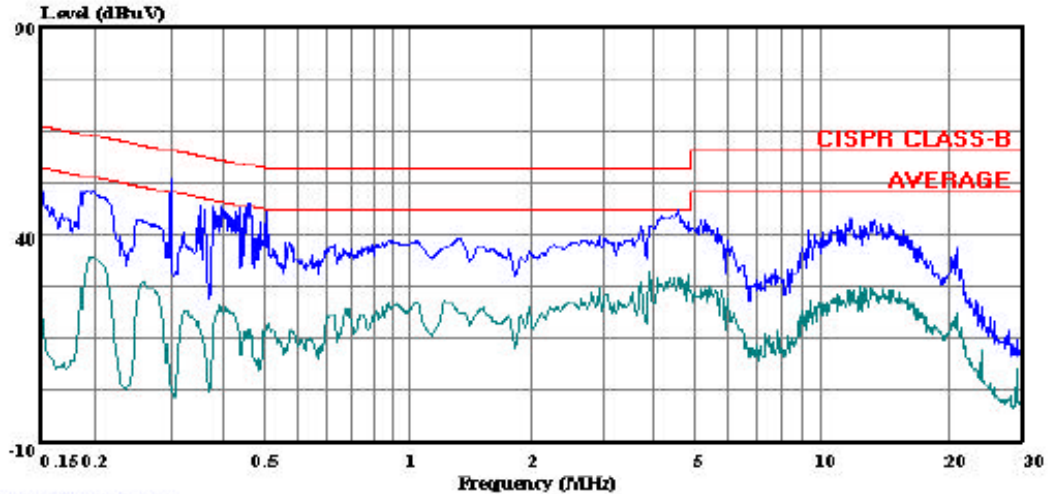

(Line Conduction)

Trace: 12

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator: : Thanh Nguyen  
Project #: : 09U12572  
Company: : Sierra Wireless, Inc.  
EUT Description: : EUT with Support Equipment  
Mode: : Normal  
Target: : FCC Class B  
Voltage: : 115Vac, 60Hz  
: L2: Peak ( Blue ) , Average ( Green )