



LTE_B66_CH132572_20M_QPSK_1RB99

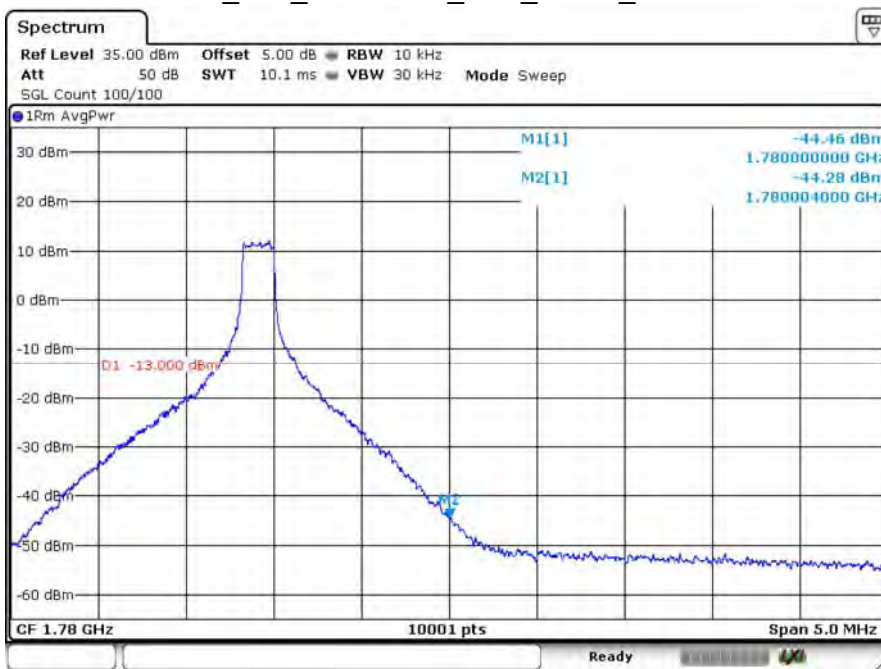


Date: 19 AUG 2019 16:49:12

LTE_B66_CH132572_20M_QPSK_100RB0

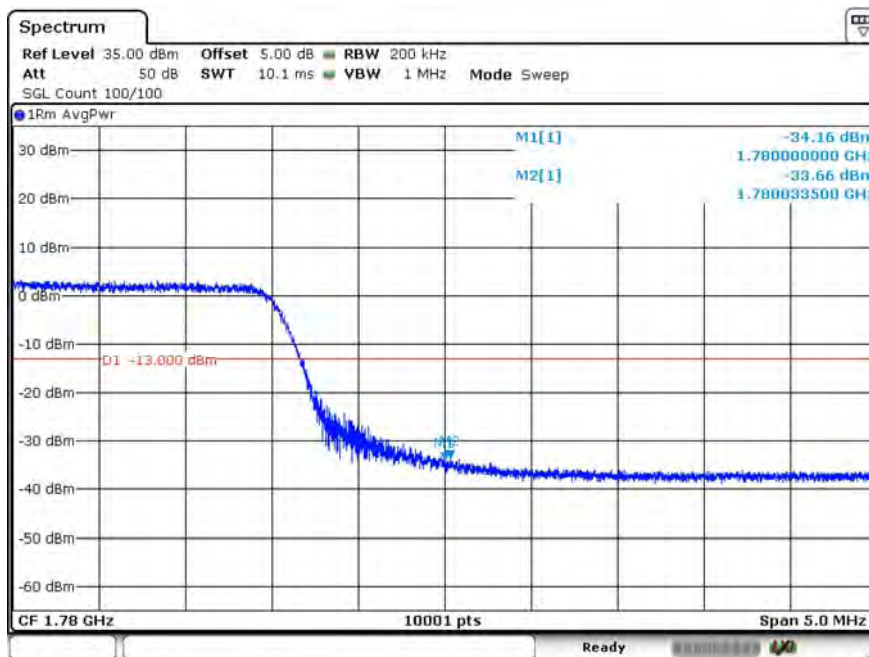


Date: 19 AUG 2019 16:55:42

LTE_B66_CH132572_20M_16-QAM_1RB99

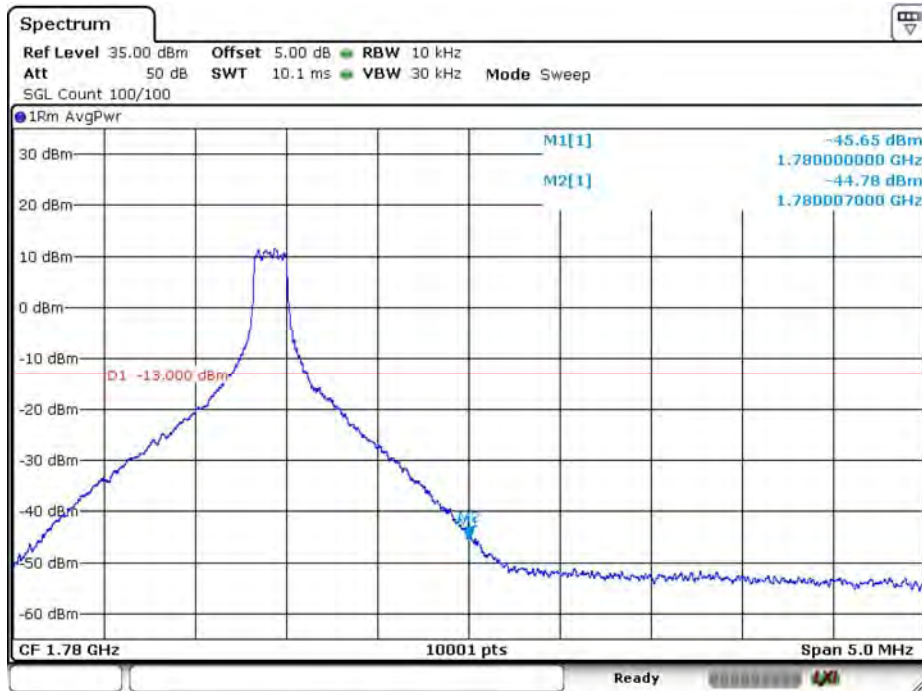

Date: 19.AUG.2019 16:50:16


LTE_B66_CH132572_20M_16-QAM_100RB0

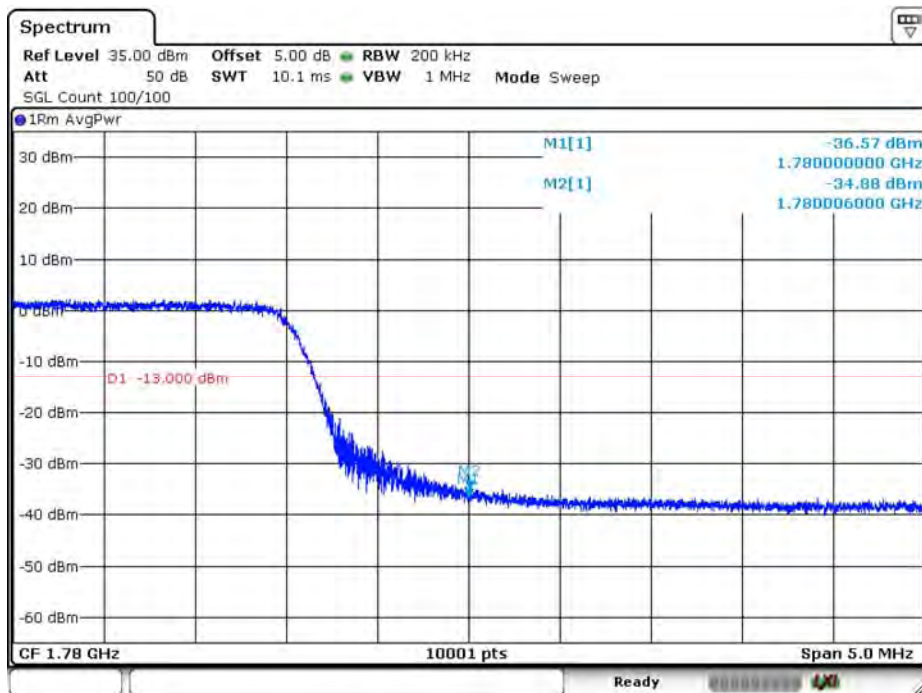

Date: 19.AUG.2019 16:55:18


Product	Module		
Test Item	Spurious Emissions at Antenna Terminals		
Test Mode	Mode 9: LTE Band 71		
Date of Test	2019/08/14	Test Site	SR10-H

LTE_B71_CH133147_5M_QPSK_1RB0

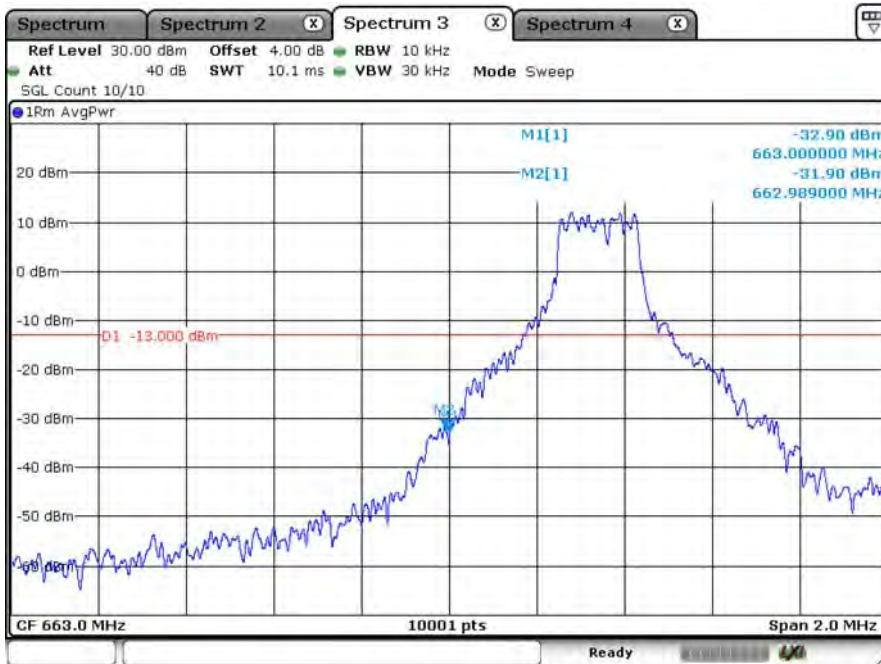


Date: 14 AUG 2019 10:11:34

LTE_B71_CH133147_5M_QPSK_25RB0

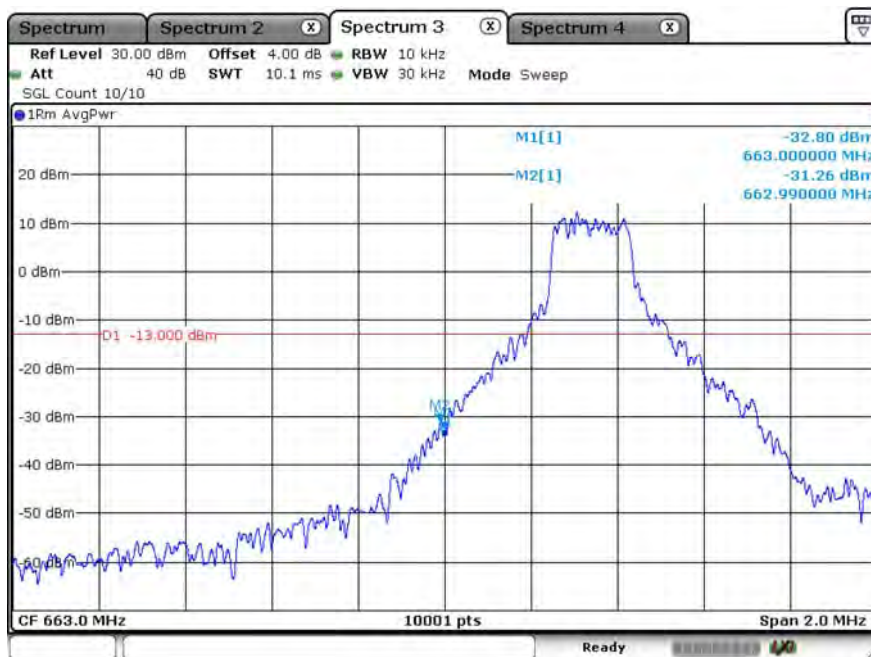


Date: 14 AUG 2019 10:12:03

LTE_B71_CH133147_5M_16-QAM_1RB0

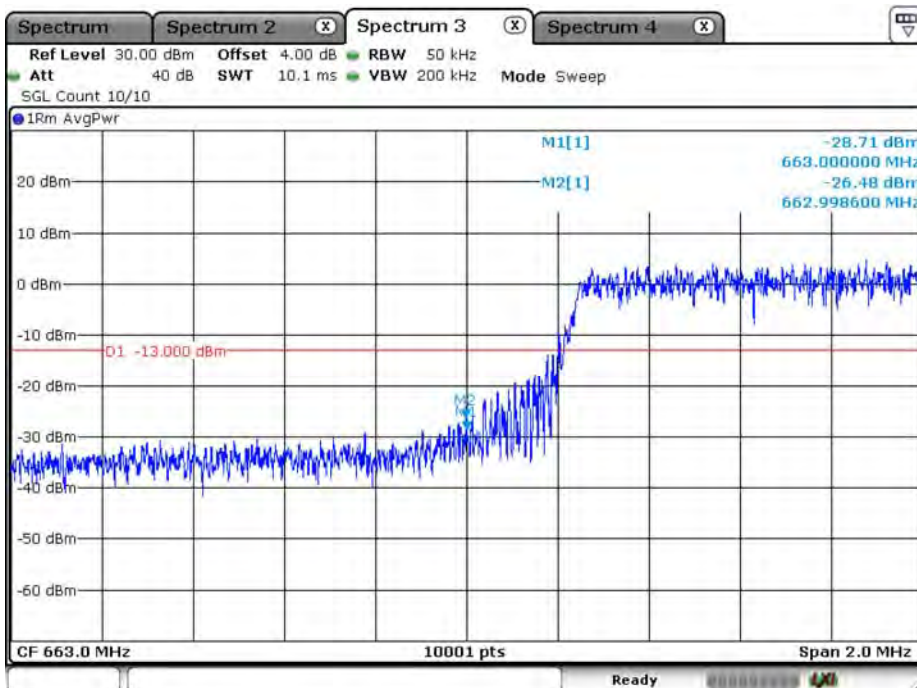


Date: 14 AUG.2019 10:50:52

LTE_B71_CH133147_5M_16-QAM_25RB0

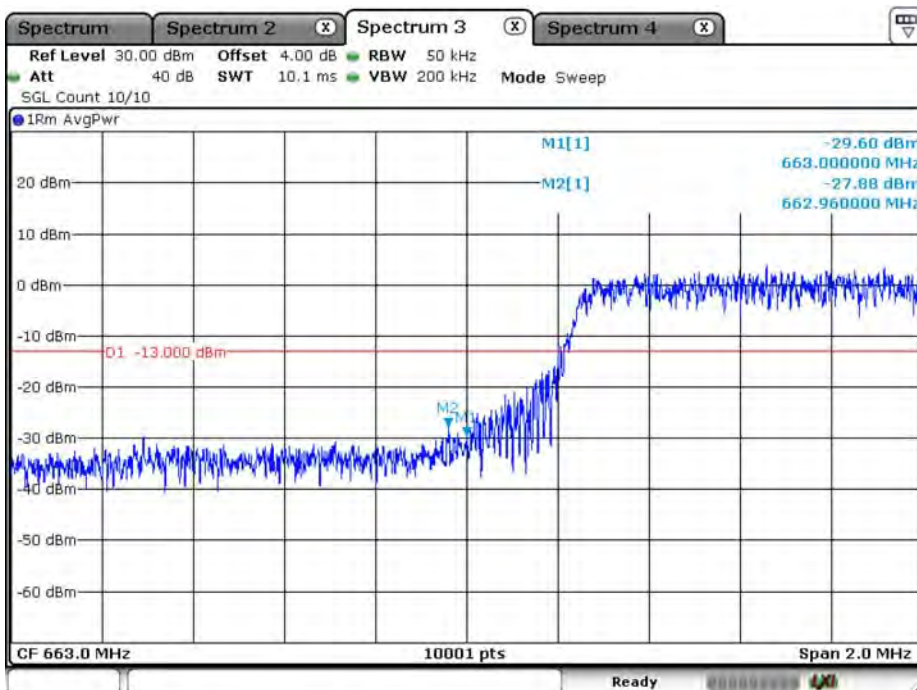


Date: 14 AUG.2019 10:50:26

LTE_B71_CH133447_5M_QPSK_1RB24

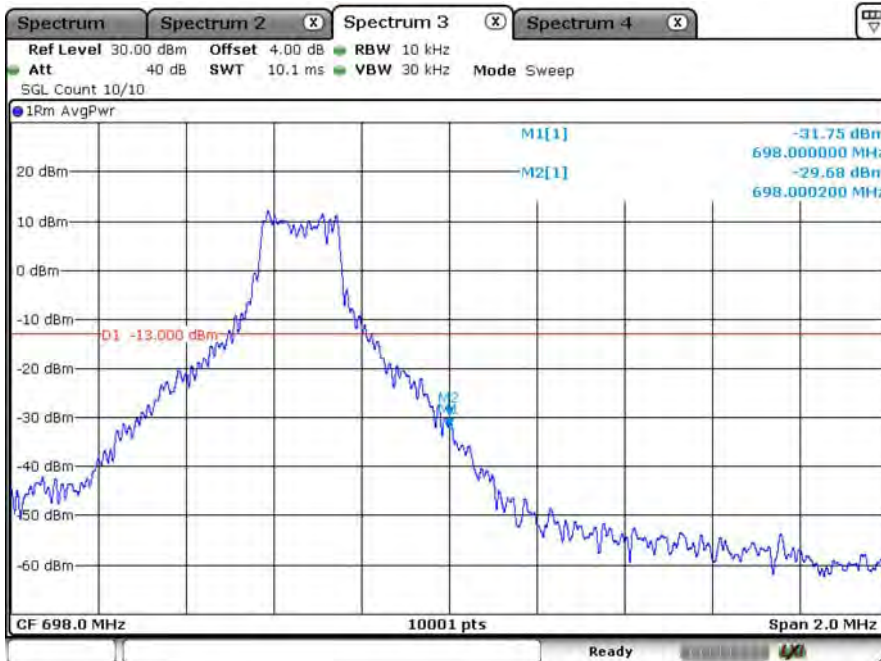


Date: 14 AUG 2019 10:23:55

LTE_B71_CH133447_5M_QPSK_25RB0

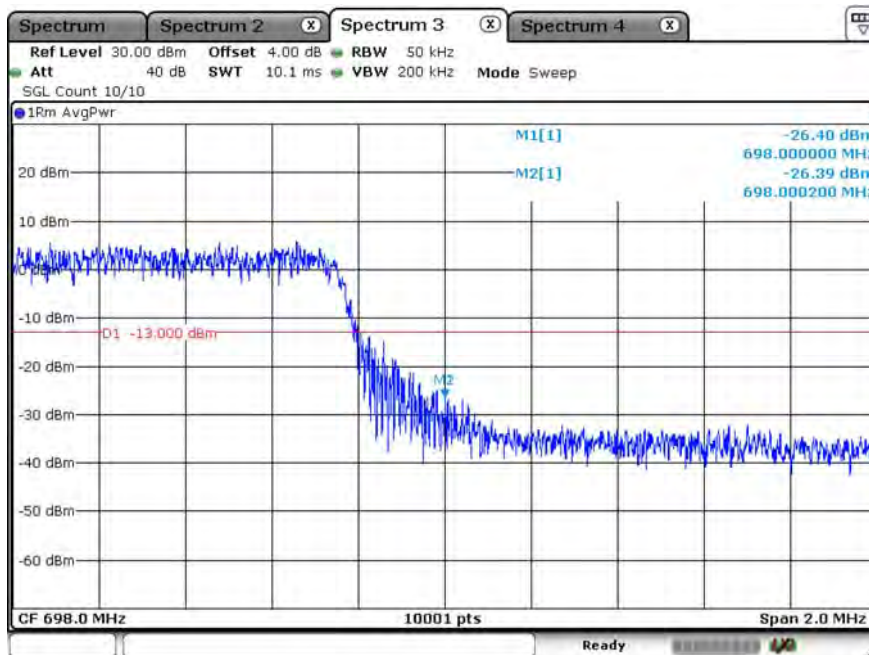


Date: 14 AUG 2019 10:35:17

LTE_B71_CH133447_5M_16-QAM_1RB24

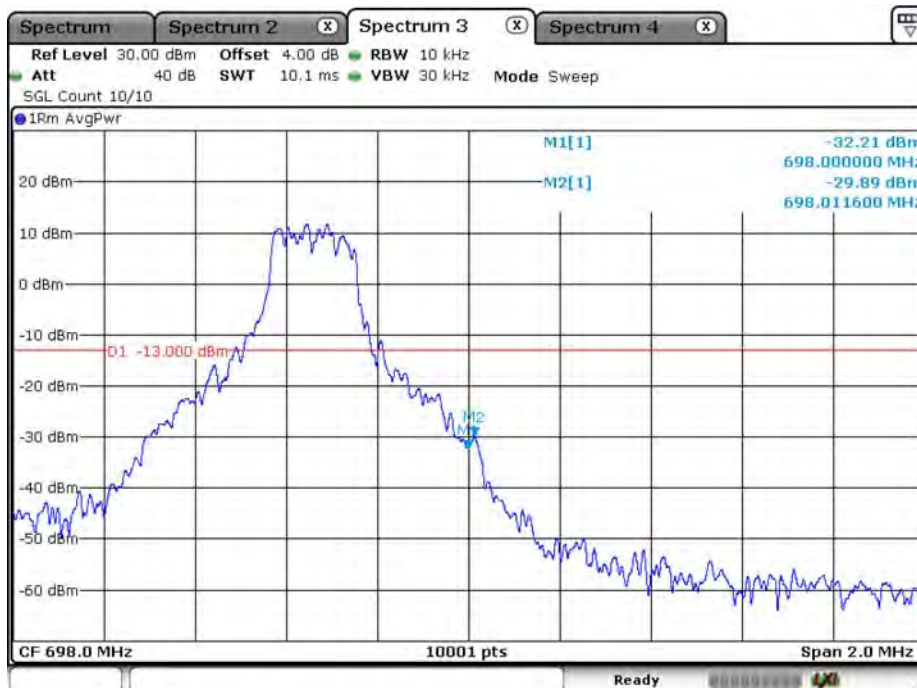


Date: 14 AUG.2019 10:32:06

LTE_B71_CH133447_5M_16-QAM_25RB0

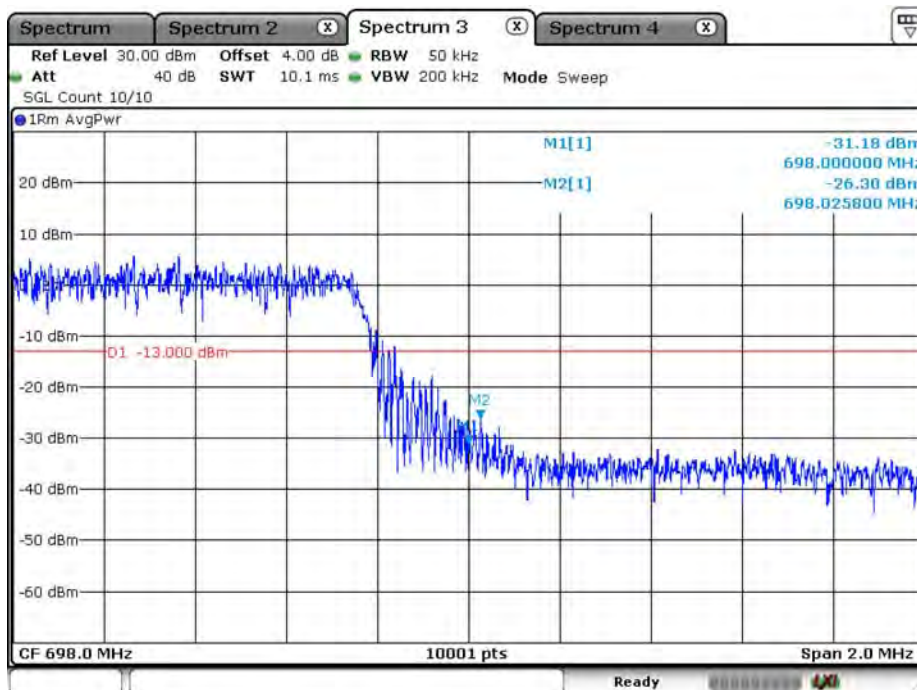


Date: 14 AUG.2019 10:34:53

LTE_B71_CH133172_10M_QPSK_1RB0

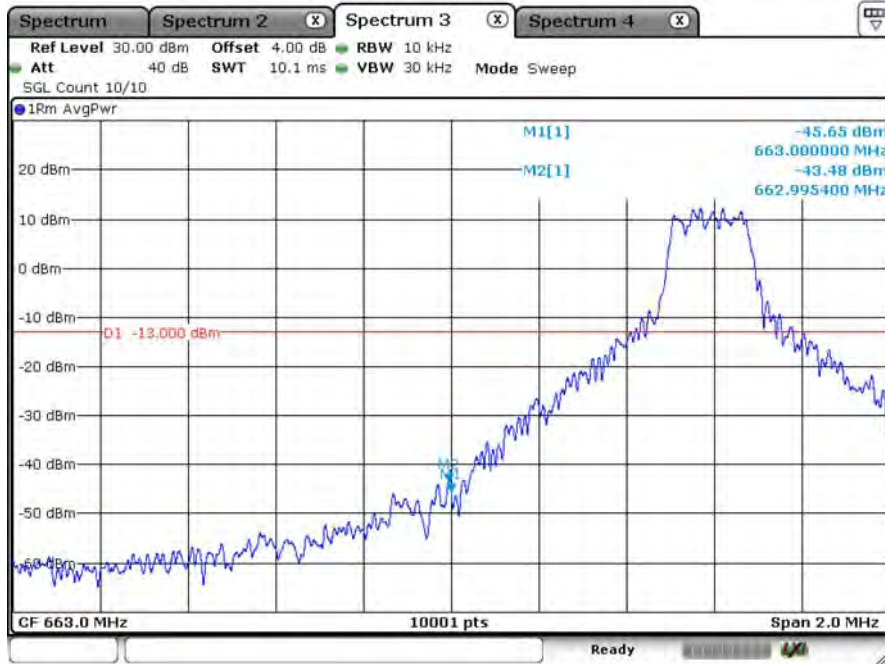

Date: 14 AUG 2019 11:01:12

LTE_B71_CH133172_10M_QPSK_50RB0

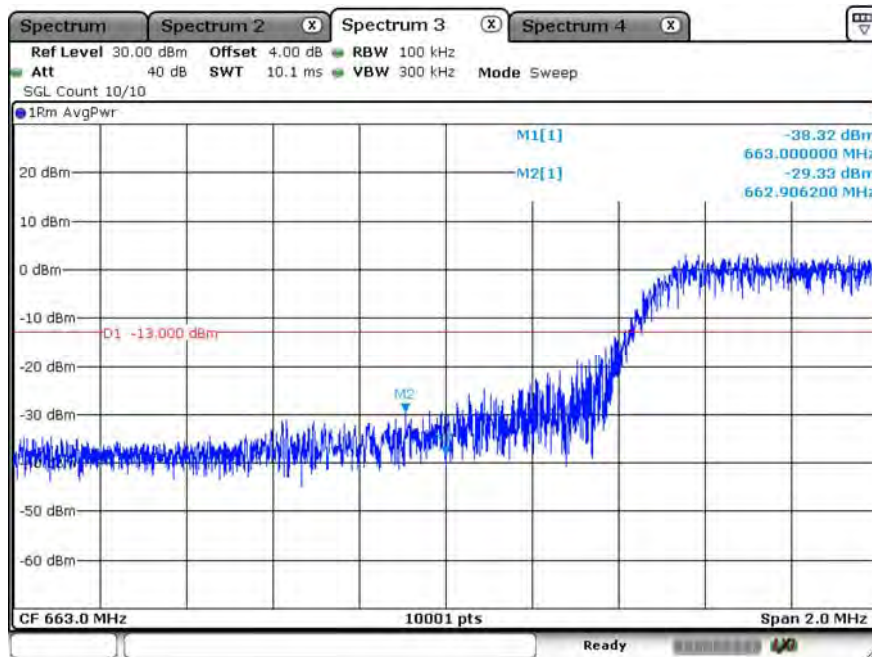


Date: 14 AUG 2019 13:38:25

LTE_B71_CH133172_10M_16-QAM_1RB0




Date: 14 AUG.2019 11:01:35

LTE_B71_CH133172_10M_16-QAM_50RB0

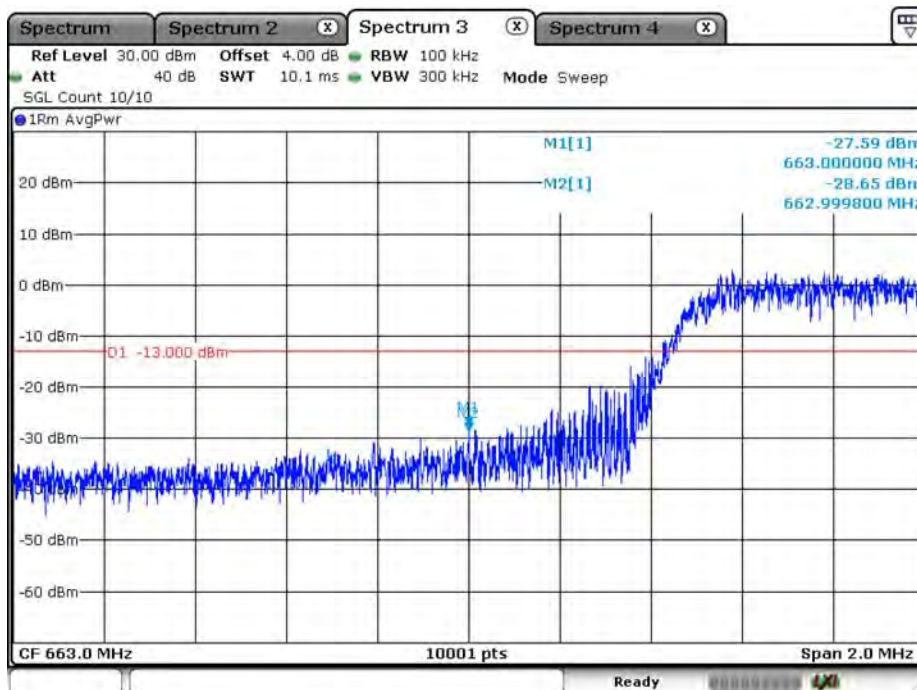


Date: 14 AUG.2019 13:35:40

LTE_B71_CH133421_10M_QPSK_1RB49

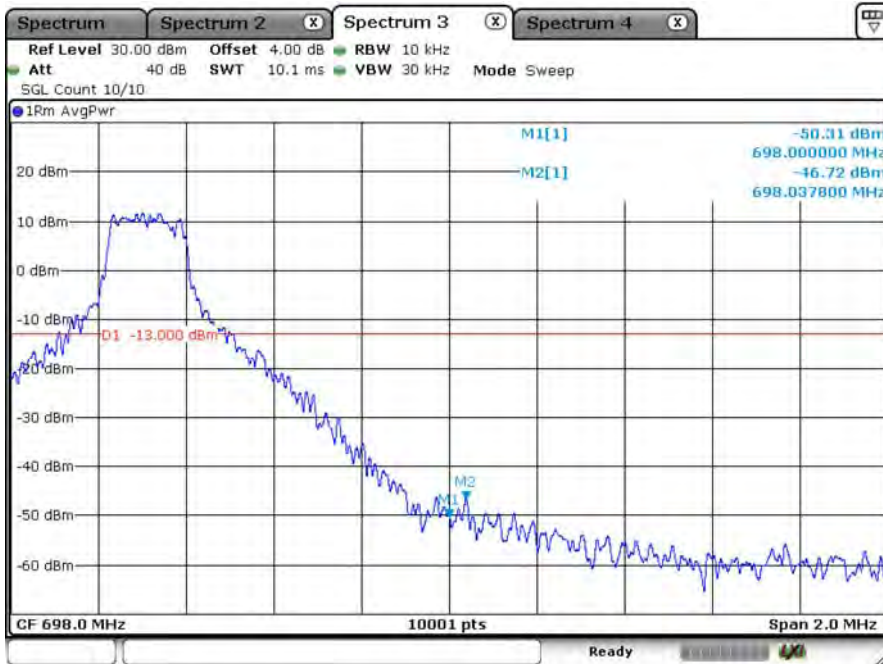


Date: 14 AUG 2019 11:10:07

LTE_B71_CH133421_10M_QPSK_50RB0

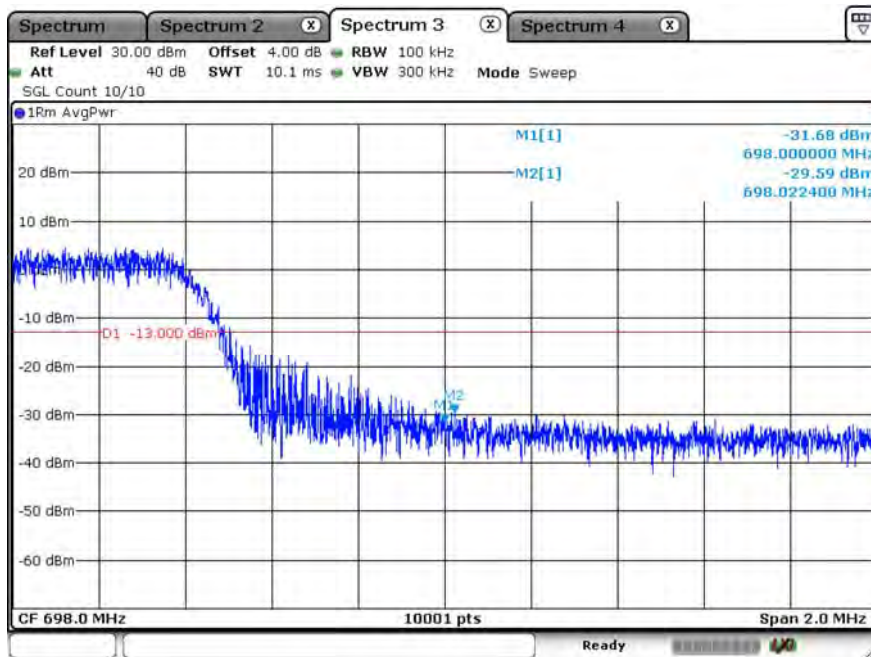


Date: 14 AUG 2019 13:17:54

LTE_B71_CH133421_10M_16-QAM_1RB49

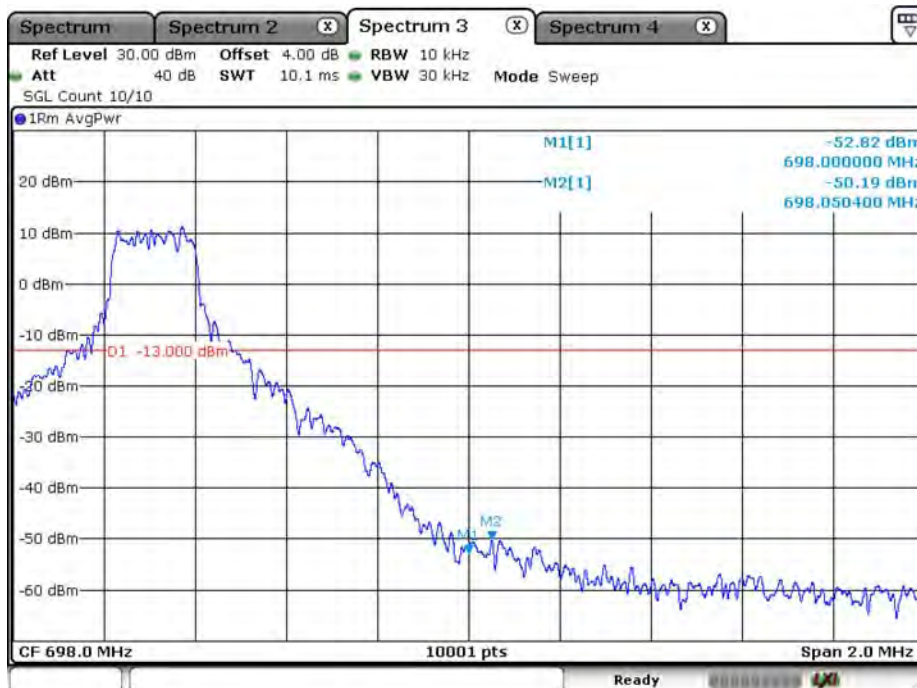


Date: 14 AUG.2019 11:39:08

LTE_B71_CH133421_10M_16-QAM_50RB0

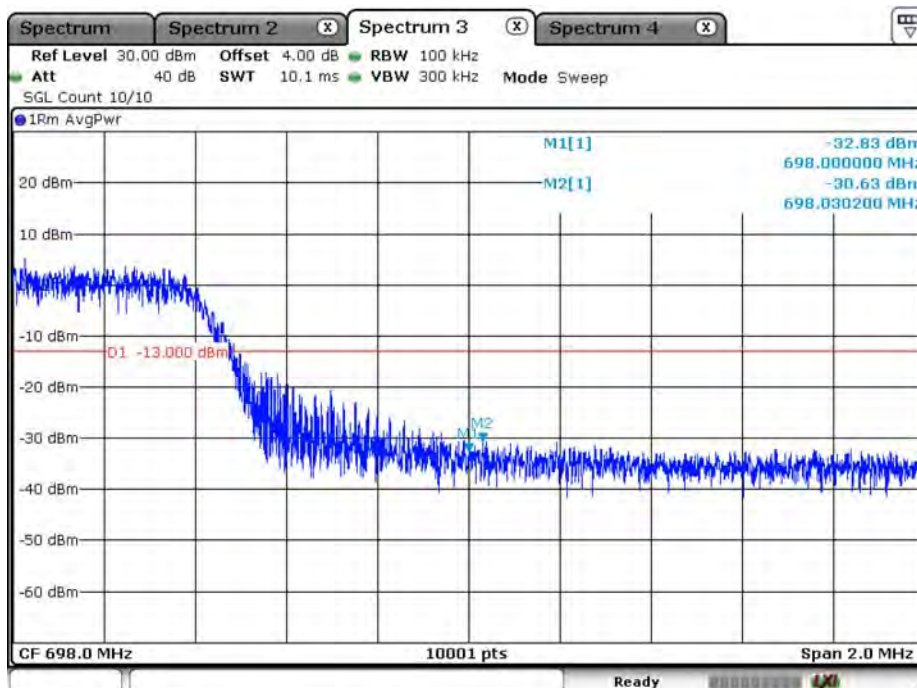


Date: 14 AUG.2019 13:09:20

LTE_B71_CH133197_15M_QPSK_1RB0

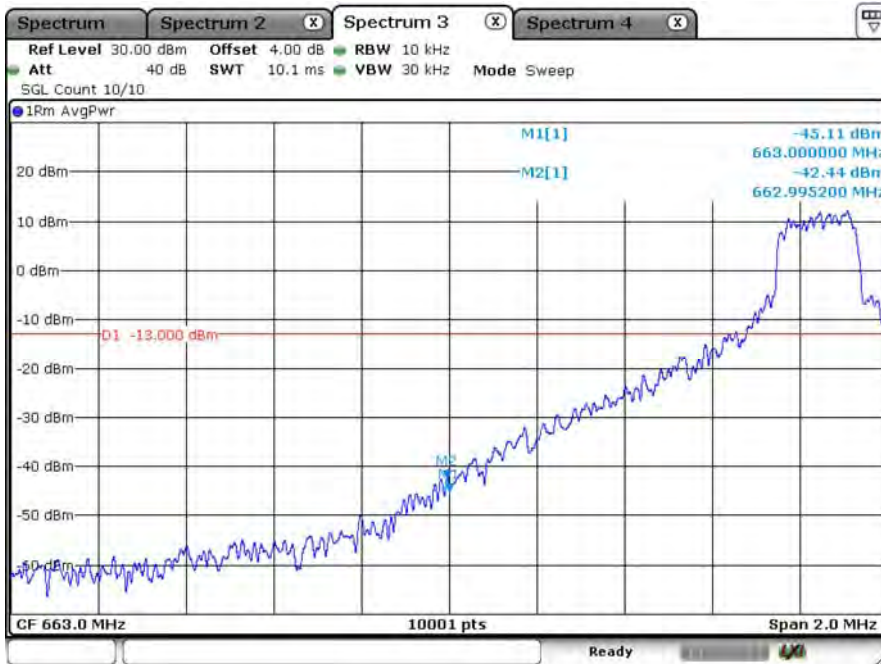


Date: 14 AUG 2019 14:08:14

LTE_B71_CH133197_15M_QPSK_75RB0

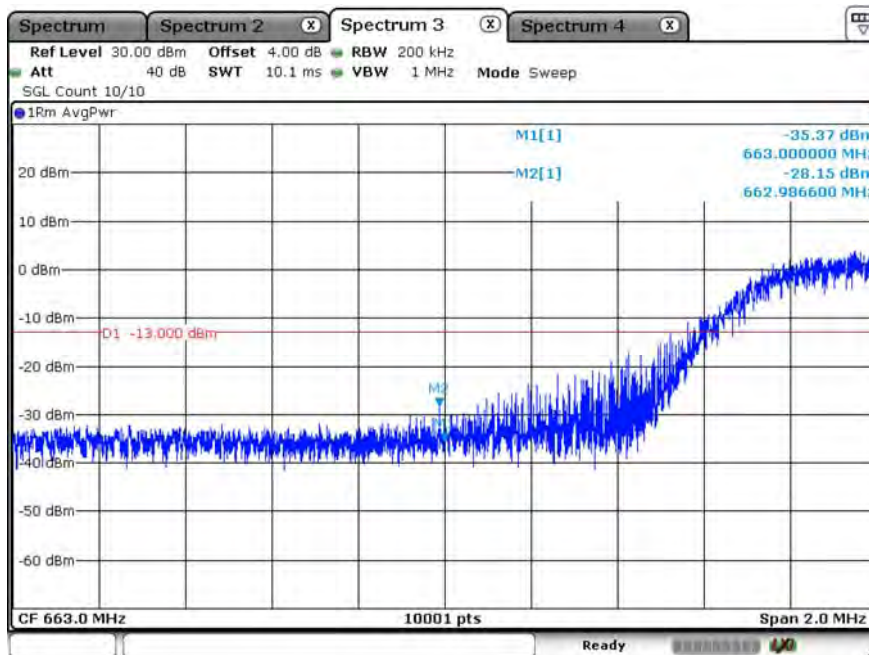


Date: 14 AUG 2019 15:27:29

LTE_B71_CH133197_15M_16-QAM_1RB0

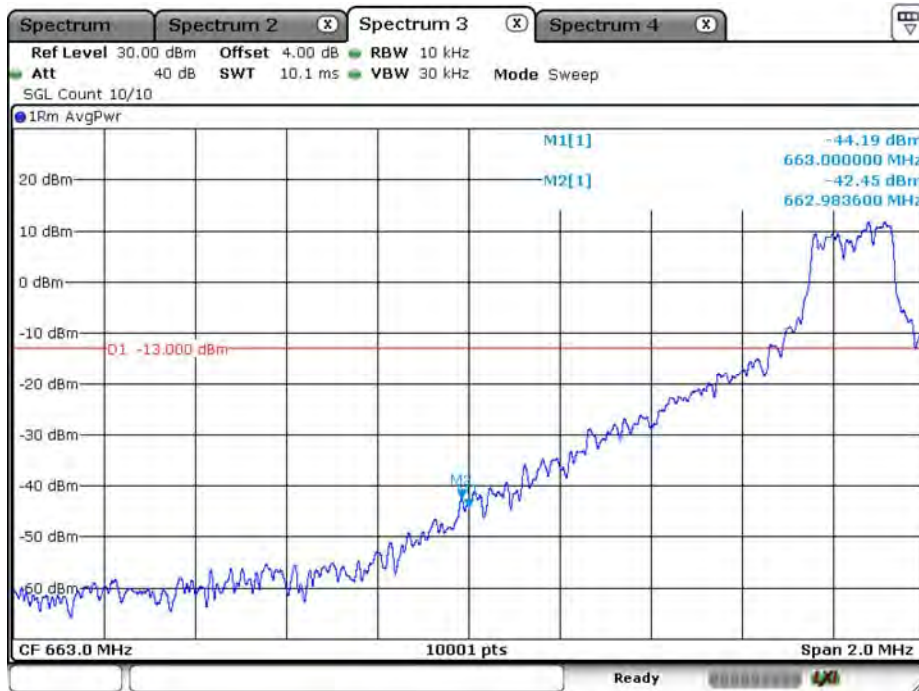


Date: 14 AUG 2019 14:10:30

LTE_B71_CH133197_15M_16-QAM_75RB0

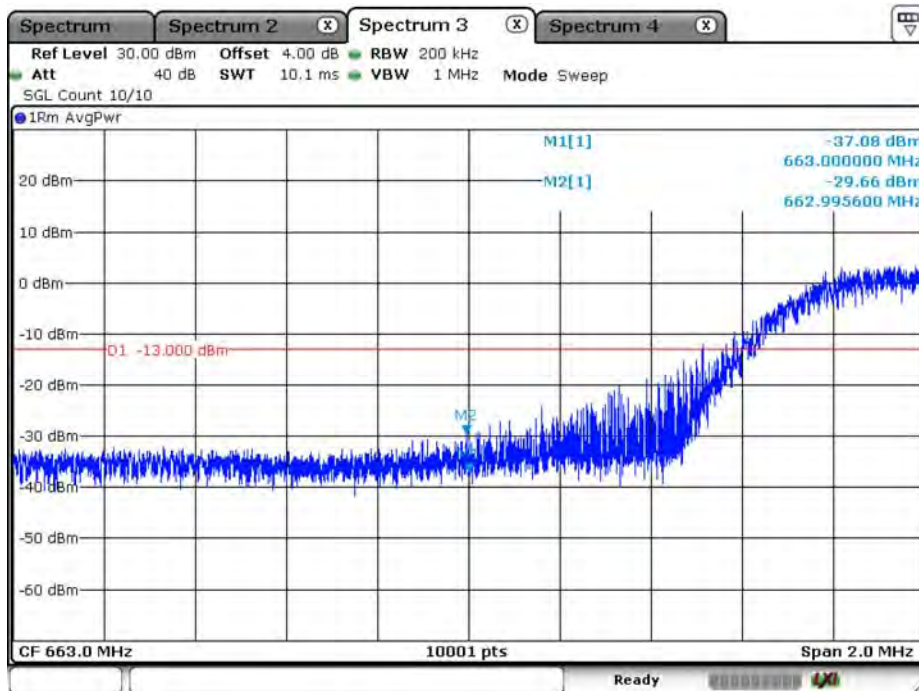


Date: 14 AUG 2019 15:25:28

LTE_B71_CH133397_15M_QPSK_1RB74

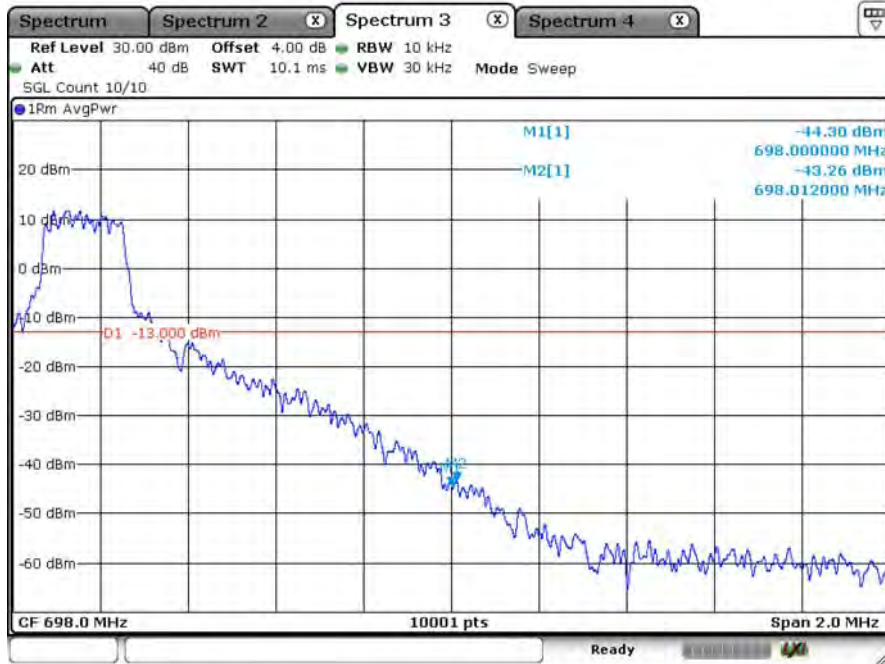


Date: 14 AUG 2019 14:31:03

LTE_B71_CH133397_15M_QPSK_75RB0

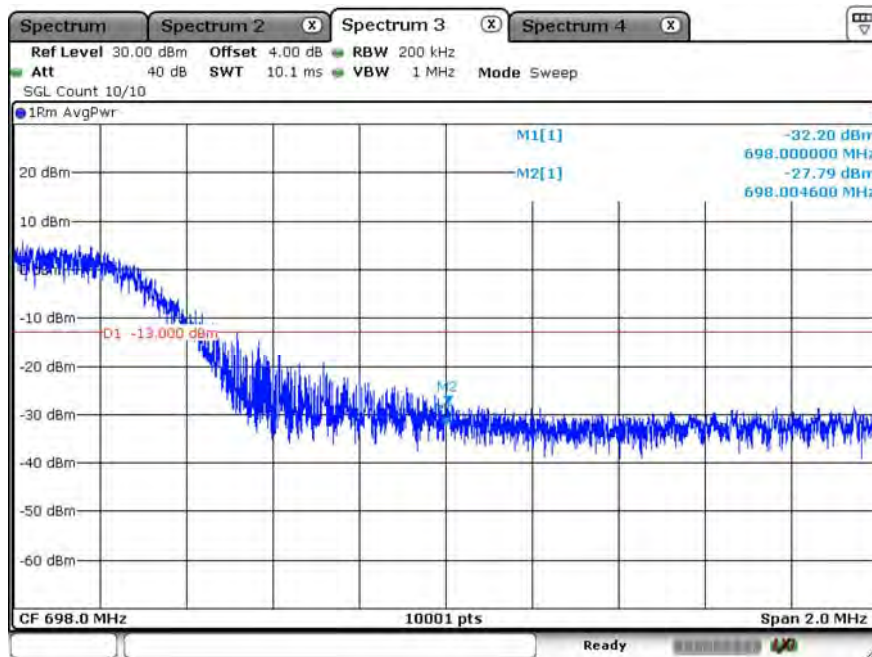


Date: 14 AUG 2019 15:07:17

LTE_B71_CH133397_15M_16-QAM_1RB74

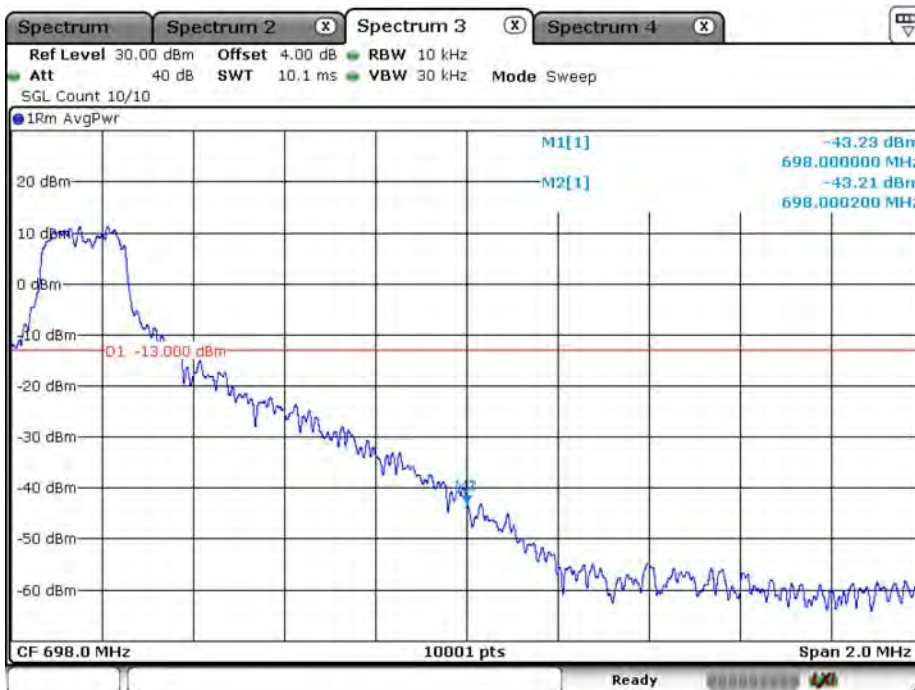


Date: 14 AUG.2019 14:42:53

LTE_B71_CH133397_15M_16-QAM_75RB0

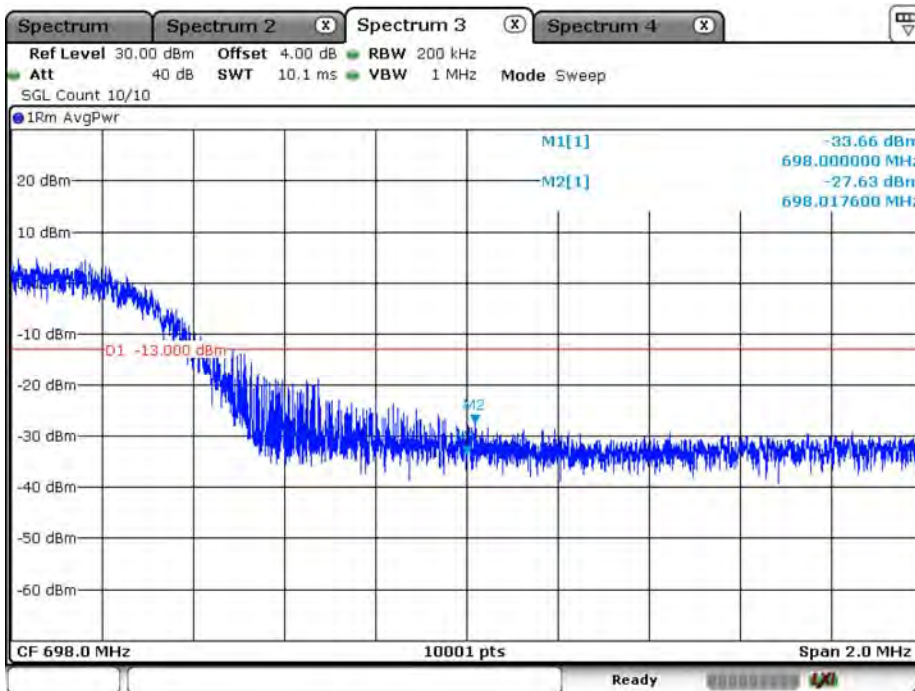


Date: 14 AUG.2019 14:50:58

LTE_B71_CH133222_20M_QPSK_1RB0

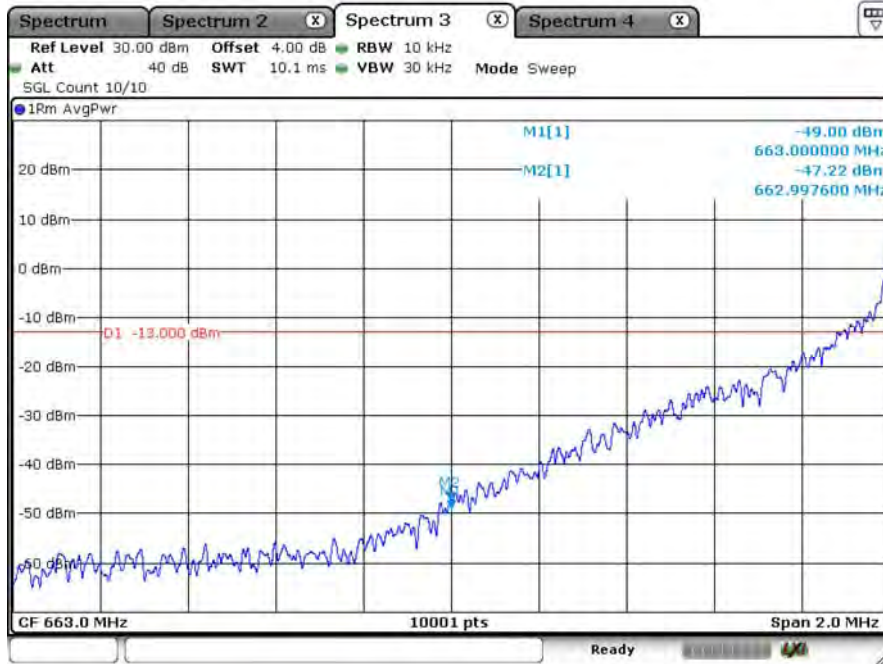


Date: 14 AUG 2019 15:51:08

LTE_B71_CH133222_20M_QPSK_100RB0

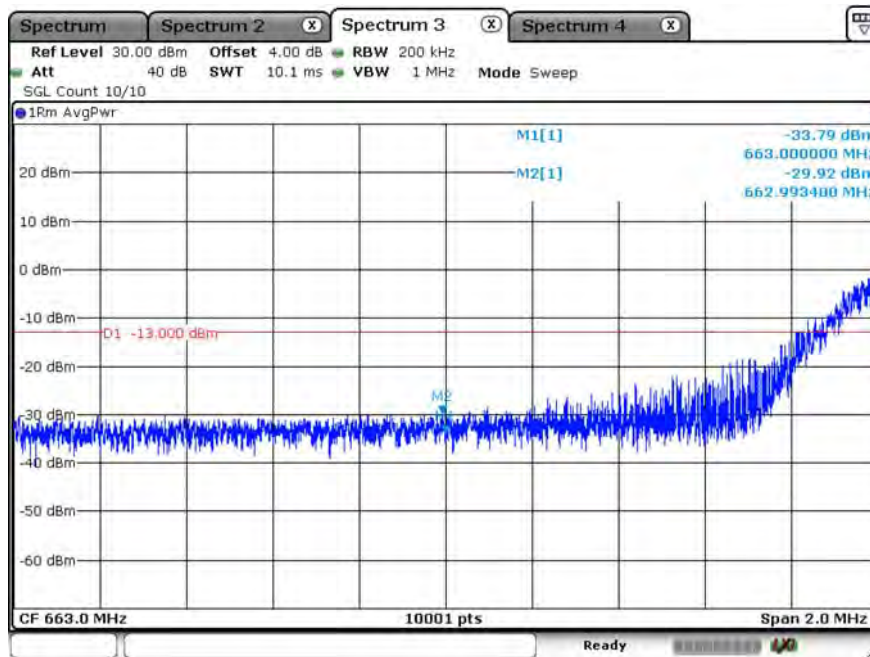


Date: 14 AUG 2019 16:38:59

LTE_B71_CH133222_20M_16-QAM_1RB0

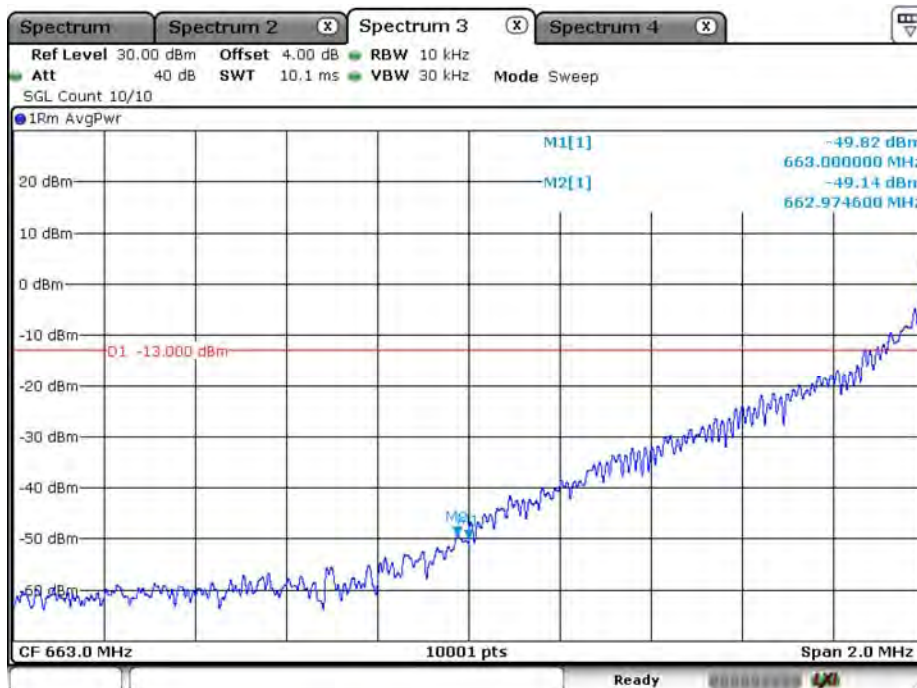


Date: 14 AUG.2019 15:51:46

LTE_B71_CH133222_20M_16-QAM_100RB0

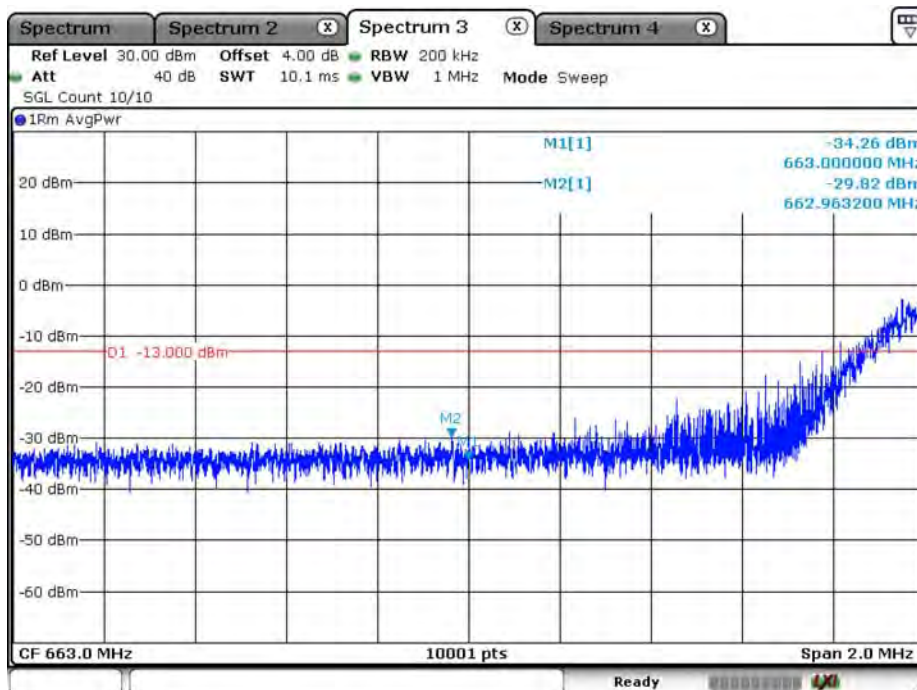


Date: 14 AUG.2019 16:31:47

LTE_B71_CH133371_20M_QPSK_1RB99

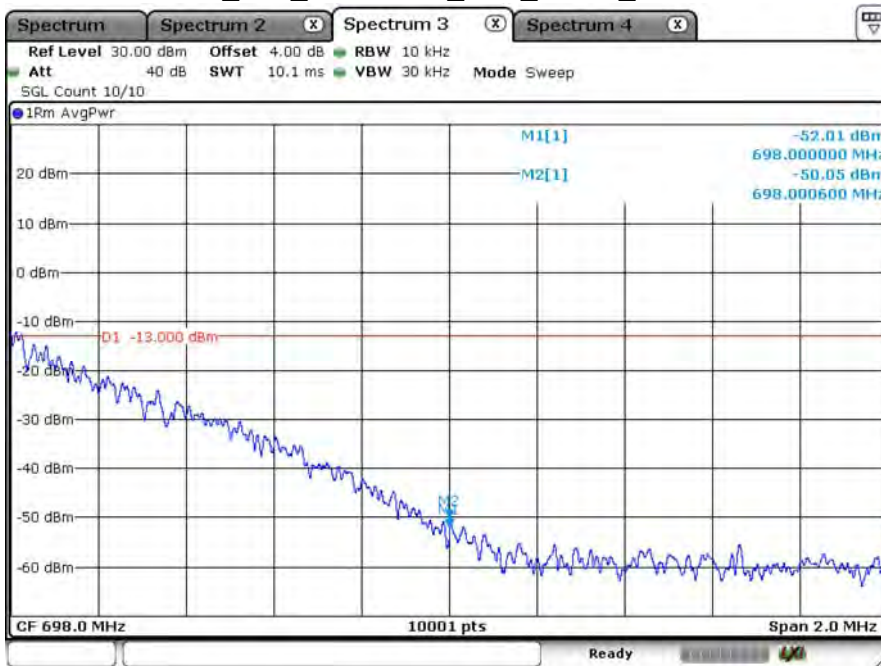


Date: 14 AUG 2019 16:01:12

LTE_B71_CH133371_20M_QPSK_100RB0

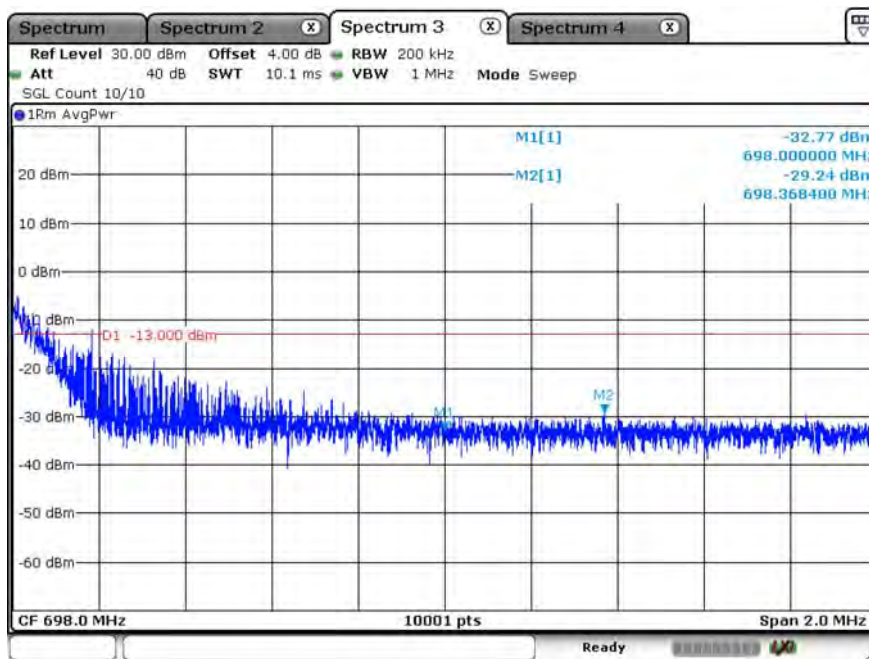


Date: 14 AUG 2019 16:22:52

LTE_B71_CH133371_20M_16-QAM_1RB99

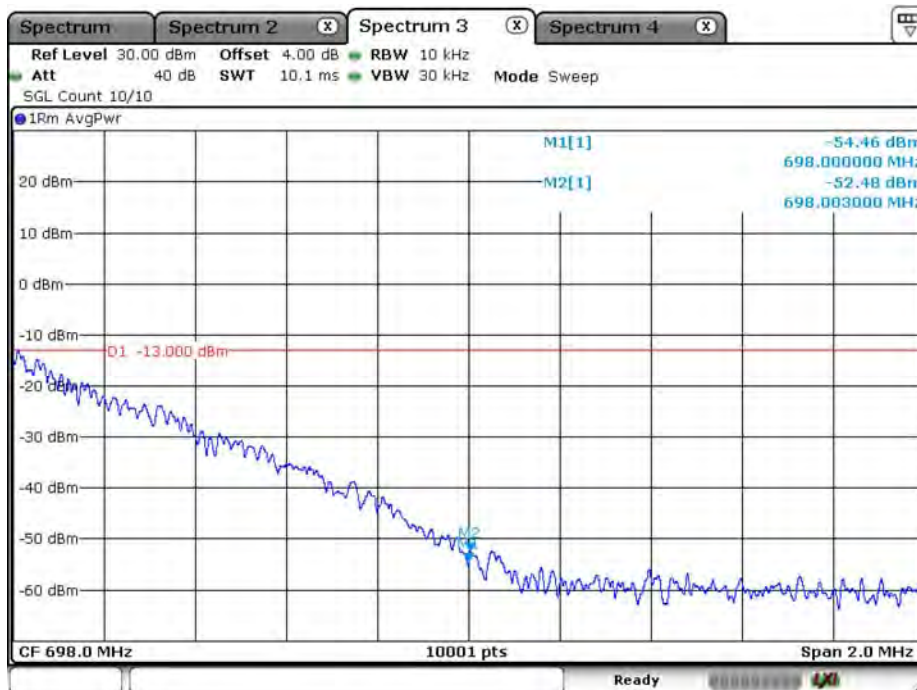

Date: 14 AUG.2019 16:09:47


LTE_B71_CH133371_20M_16-QAM_100RB0

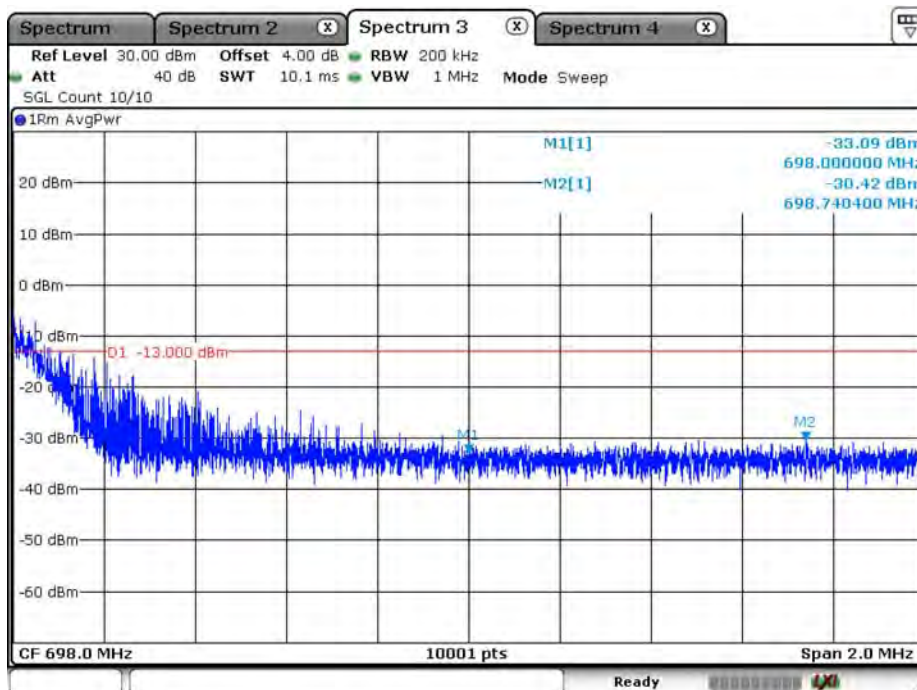

Date: 14 AUG.2019 16:11:35

8. Frequency Stability

8.1. Test Setup

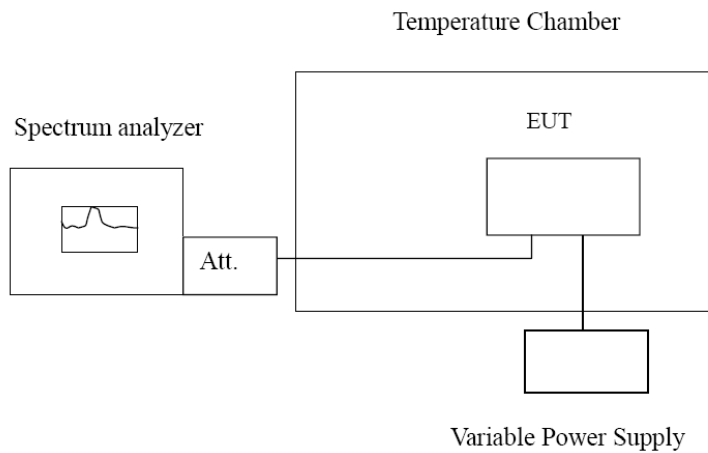

8.2. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

8.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 9
ANSI C63.26: 2015 Sub-clause 5.6

8.4. Test Result

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 1: LTE Band 2		
Date of Test	2019/08/01	Test Site	SR10-H

LTE-Band 2 1860MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	2.25	-0.0012
3.70	2.24	-0.0012
3.18	1.77	-0.0010

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	2.30	-0.0012
-20	2.20	-0.0012
-10	0.63	-0.0003
0	1.30	-0.0007
10	1.79	-0.0010
20	0.76	-0.0004
30	2.86	-0.0015
40	1.83	-0.0010
50	1.83	-0.0010
60	2.45	-0.0013
70	2.22	-0.0012

LTE-Band 2 1880MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.60	-0.0003
3.70	1.10	-0.0006
3.18	0.99	-0.0005

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.36	-0.0002
-20	0.10	-0.0001
-10	0.26	-0.0001
0	1.18	-0.0006
10	1.10	-0.0006
20	0.22	-0.0001
30	1.24	-0.0007
40	0.46	-0.0002
50	-0.03	0.0000
60	1.51	-0.0008
70	0.66	-0.0004

LTE-Band 2 1900MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	2.14	-0.0011
3.70	2.29	-0.0012
3.18	1.26	-0.0007

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.09	-0.0006
-20	1.59	-0.0008
-10	2.22	-0.0012
0	2.60	-0.0014
10	0.84	-0.0004
20	0.72	-0.0004
30	1.60	-0.0008
40	2.16	-0.0011
50	1.44	-0.0008
60	1.21	-0.0006
70	2.75	-0.0014

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 2: LTE Band 4		
Date of Test	2019/08/01	Test Site	SR10-H

LTE-Band 4 1720MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.62	-0.0004
3.70	1.54	-0.0009
3.18	1.85	-0.0011

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.45	-0.0003
-20	1.26	-0.0007
-10	1.14	-0.0007
0	1.11	-0.0006
10	0.26	-0.0002
20	1.25	-0.0007
30	0.67	-0.0004
40	1.13	-0.0007
50	1.14	-0.0007
60	0.10	-0.0001
70	0.85	-0.0005

LTE-Band 4 1732.5MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.69	-0.0004
3.70	1.02	-0.0006
3.18	0.12	-0.0001

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.25	-0.0001
-20	0.77	-0.0004
-10	0.70	-0.0004
0	-0.09	0.0001
10	0.26	-0.0002
20	0.99	-0.0006
30	0.27	-0.0002
40	0.42	-0.0002
50	0.18	-0.0001
60	0.46	-0.0003
70	0.34	-0.0002

LTE-Band 4 1745MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.59	-0.0003
3.70	1.06	-0.0006
3.18	0.76	-0.0004

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.79	-0.0005
-20	1.06	-0.0006
-10	0.94	-0.0005
0	-0.27	0.0002
10	1.20	-0.0007
20	0.16	-0.0001
30	0.27	-0.0002
40	0.28	-0.0002
50	1.09	-0.0006
60	-0.23	0.0001
70	0.79	-0.0005

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 3: LTE Band 5		
Date of Test	2019/08/06	Test Site	SR10-H

LTE-Band 5 829MHz

Voltage

Operator Signed:

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	-15	0.0178
3.70	-26	0.0308
3.15	4	-0.0047

Temperature

Operator Signed:

Max

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	-11	0.0462
-20	17	0.0059
-10	25	-0.0190
0	-28	0.0296
10	-23	-0.0012
20	21	-0.0107
30	-3	0.0261
40	5	0.0083
50	-39	-0.0154
60	8	-0.0097
70	15	-0.0181

LTE-Band 5 836.5MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	5	0.0383
3.70	20	-0.0191
3.15	-6	0.0048

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	-26	0.0036
-20	-22	0.0478
-10	-10	-0.0084
0	-27	-0.0251
10	20	0.0454
20	23	0.0395
30	24	-0.0287
40	-4	0.0418
50	2	0.0179
60	9	-0.0109
70	3	-0.0036

LTE-Band 5 844MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	-36	-0.0277
3.70	-31	0.0265
3.15	10	0.0362

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	22	-0.0290
-20	-1	-0.0290
-10	15	0.0470
0	17	-0.0145
10	-30	-0.0181
20	23	0.0350
30	10	0.0302
40	-20	0.0241
50	22	-0.0048
60	11	-0.0133
70	21	-0.0253

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 4: LTE Band 12		
Date of Test	2019/08/15	Test Site	SR10-H

LTE-Band 12 704MHz

Voltage

Operator Signed:

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1	-0.0013
3.70	1	-0.0018
3.15	0	-0.0001

Temperature

Operator Signed:

Max

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0	-0.0005
-20	1	-0.0020
-10	1	-0.0010
0	0	-0.0001
10	0	-0.0005
20	0	-0.0004
30	1	-0.0007
40	0	-0.0001
50	1	-0.0008
60	2	-0.0022
70	2	-0.0032

LTE-Band 12 707.5MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	-16	0.0222
3.70	-15	0.0208
3.15	18	-0.0259

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	21	-0.0293
-20	-18	0.0247
-10	-21	0.0300
0	13	-0.0184
10	16	-0.0226
20	-15	0.0208
30	16	-0.0226
40	-16	0.0226
50	18	-0.0250
60	11	-0.0156
70	3	-0.0043

LTE-Band 12 711MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	14	-0.0201
3.70	17	-0.0242
3.15	-17	0.0236

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	-15	0.0208
-20	-27	0.0380
-10	16	-0.0219
0	-24	0.0342
10	-15	0.0208
20	17	-0.0242
30	-15	0.0215
40	16	-0.0218
50	-14	0.0203
60	12	-0.0170
70	2	-0.0032

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 5: LTE Band 13		
Date of Test	2019/08/01	Test Site	SR10-H

LTE-Band 13 782MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.70	-0.0009
3.70	1.22	-0.0016
3.18	1.13	-0.0014

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.95	-0.0012
-20	0.57	-0.0007
-10	1.04	-0.0013
0	1.19	-0.0015
10	0.33	-0.0004
20	0.99	-0.0013
30	0.42	-0.0005
40	1.18	-0.0015
50	1.31	-0.0017
60	2.02	-0.0026
70	0.02	0.0000

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 6: LTE Band 25		
Date of Test	2019/08/01	Test Site	SR10-H

LTE-Band 25 1860MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1.18	-0.0006
3.70	2.03	-0.0011
3.18	1.28	-0.0007

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.20	-0.0006
-20	1.34	-0.0007
-10	2.19	-0.0012
0	1.03	-0.0006
10	2.20	-0.0012
20	1.33	-0.0007
30	1.64	-0.0009
40	1.27	-0.0007
50	1.20	-0.0006
60	0.98	-0.0005
70	1.58	-0.0008

LTE-Band 25 1882.5MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1.56	-0.0008
3.70	2.09	-0.0011
3.18	1.41	-0.0007

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.24	-0.0007
-20	1.04	-0.0006
-10	2.31	-0.0012
0	1.22	-0.0006
10	1.47	-0.0008
20	2.37	-0.0013
30	2.75	-0.0015
40	1.17	-0.0006
50	1.37	-0.0007
60	1.76	-0.0009
70	0.81	-0.0004

LTE-Band 25 1905MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.84	-0.0004
3.70	1.42	-0.0007
3.18	0.11	-0.0001

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.17	-0.0006
-20	1.63	-0.0009
-10	1.31	-0.0007
0	0.29	-0.0002
10	0.26	-0.0001
20	1.04	-0.0005
30	0.31	-0.0002
40	0.42	-0.0002
50	0.82	-0.0004
60	0.12	-0.0001
70	1.41	-0.0008

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations (Part 22)		
Test Mode	Mode 7: LTE Band 26		
Date of Test	2019/08/02~2019/08/20	Test Site	SR10-H

LTE-Band 26(Part 22) 831.5MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1.73	-0.0021
3.70	1.69	-0.0020
3.18	0.99	-0.0012

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.26	-0.0015
-20	1.79	-0.0022
-10	2.00	-0.0024
0	1.73	-0.0021
10	0.75	-0.0009
20	1.28	-0.0015
30	0.97	-0.0012
40	1.74	-0.0021
50	1.82	-0.0022
60	0.80	-0.0010
70	1.83	-0.0022

LTE-Band 26(Part 22) 836.5MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.73	-0.0009
3.70	1.70	-0.0020
3.18	1.38	-0.0016

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	2.19	-0.0026
-20	1.70	-0.0020
-10	0.54	-0.0006
0	0.35	-0.0004
10	0.82	-0.0010
20	1.87	-0.0022
30	0.31	-0.0004
40	1.54	-0.0018
50	1.20	-0.0014
60	0.69	-0.0008
70	0.59	-0.0007

LTE-Band 26 (Part 22) 841.5MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	-0.42	0.0005
3.70	0.51	-0.0006
3.18	0.48	-0.0006

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.68	-0.0008
-20	-0.31	0.0004
-10	0.32	-0.0004
0	-0.16	0.0002
10	0.19	-0.0002
20	-0.01	0.0000
30	0.18	-0.0002
40	-0.25	0.0003
50	0.14	-0.0002
60	0.17	-0.0002
70	-0.37	0.0004

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations (Part 90)		
Test Mode	Mode 7: LTE Band 26		
Date of Test	2019/08/01	Test Site	SR10-H

LTE-Band 26(Part 90) 819MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.01	0.0000
3.70	1.79	-0.0022
3.18	1.14	-0.0014

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.54	-0.0019
-20	1.31	-0.0016
-10	1.57	-0.0019
0	1.19	-0.0015
10	1.77	-0.0022
20	1.47	-0.0018
30	1.67	-0.0020
40	1.46	-0.0018
50	0.94	-0.0011
60	1.03	-0.0013
70	1.09	-0.0013

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 8: LTE Band 66		
Date of Test	2019/08/02	Test Site	SR10-H

LTE-Band 66 1720MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1.16	-0.0007
3.70	1.48	-0.0009
3.18	0.81	-0.0005

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1.89	-0.0011
-20	1.17	-0.0007
-10	0.36	-0.0002
0	1.67	-0.0010
10	0.70	-0.0004
20	0.54	-0.0003
30	1.31	-0.0008
40	1.31	-0.0008
50	2.01	-0.0012
60	1.86	-0.0011
70	1.40	-0.0008

LTE-Band 66 1745MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.44	-0.0003
3.70	0.44	-0.0003
3.18	-0.38	0.0002

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	-0.25	0.0001
-20	-0.63	0.0004
-10	0.66	-0.0004
0	0.27	-0.0002
10	0.06	0.0000
20	-0.22	0.0001
30	-0.16	0.0001
40	-0.05	0.0000
50	-0.73	0.0004
60	-0.24	0.0001
70	0.61	-0.0004

LTE-Band 66 1770MHz

Voltage

Voltage (VDC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	0.40	-0.0002
3.70	0.55	-0.0003
3.18	0.37	-0.0002

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	0.10	-0.0001
-20	0.20	-0.0001
-10	-0.48	0.0003
0	0.22	-0.0001
10	0.71	-0.0004
20	-0.88	0.0005
30	0.39	-0.0002
40	-0.16	0.0001
50	0.36	-0.0002
60	0.10	-0.0001
70	0.93	-0.0005

Product	Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 9: LTE Band 71		
Date of Test	2019/08/15	Test Site	SR10-H

LTE-Band 71 665.5MHz

Voltage

Operator Signed:

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1	-0.0008
3.70	2	-0.0031
3.15	1	-0.0017

Temperature

Operator Signed:

Max

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	3	-0.0038
-20	2	-0.0031
-10	1	-0.0010
0	3	-0.0038
10	1	-0.0013
20	2	-0.0024
30	2	-0.0024
40	1	-0.0022
50	2	-0.0026
60	2	-0.0023
70	2	-0.0033

LTE-Band 71 680.5MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	1	-0.0017
3.70	2	-0.0023
3.15	2	-0.0022

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	1	-0.0018
-20	2	-0.0023
-10	1	-0.0021
0	1	-0.0018
10	2	-0.0023
20	1	-0.0014
30	2	-0.0026
40	2	-0.0025
50	1	-0.0012
60	2	-0.0032
70	1	-0.0017

LTE-Band 71 695.5MHz

Voltage	Operator Signed:	Max
Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.26	2	-0.0024
3.70	2	-0.0023
3.15	2	-0.0031

Temperature	Operator Signed:	Max
TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	2	-0.0029
-20	1	-0.0009
-10	2	-0.0022
0	2	-0.0035
10	1	-0.0017
20	3	-0.0036
30	2	-0.0022
40	1	-0.0007
50	2	-0.0026
60	2	-0.0032
70	2	-0.0028