

TEST REPORT For FCC

Test Report No. : CTK-2012-00496
Date of Issue : June 4, 2012
FCC ID : N7SC340T
Model/Type No. : C340T
Kind of Product : NetweeN
Applicant : Center Network Solution
Applicant Address : Suwon industrial, District2, 990-1, Gosaek-dong, Gwonsun-gu,
Suwon-si, Gyeonggi-do, Korea
Manufacturer : Center Network Solution
Manufacturer Address : Suwon industrial, District2, 990-1, Gosaek-dong, Gwonsun-gu,
Suwon-si, Gyeonggi-do, Korea
Contact Person : Song, Jin Seok / Team Manager
Telephone : +82-31-423-1001
Received Date : April 2, 2012
Test period : Start : April 4, 2012 End : May 25, 2012
Test Results : In Compliance Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by



Won-Jae, Hwang
Test Engineer
Date: June 4, 2012

Reviewed by



Young-Joon, Park
Technical Manager
Date: June 4, 2012

REPORT REVISION HISTORY

Date	Revision	Page No
June 4, 2012	Issued (CTK-2012-00496)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency.....	4
1.2 Device Modifications.....	5
1.3 Peripheral Devices	5
1.4 Calibration Details of Equipment Used for Measurement	5
1.5 Test Facility.....	5
1.6 Laboratory Accreditations and Listings.....	6
2 Summary of tests	7
2.1 Technical Characteristic Test	8
2.1.1 6dB Bandwidth	8
2.1.2 Maximum peak Conducted Output Power	22
2.1.3 Power Spectral Density	25
2.1.4 Band - edge	39
2.1.5 Field Strength of Emissions	58
Test Data	59
2.1.6 AC Conducted Emissions.....	63
APPENDIX A – Test Equipment Used For Tests	66

1.0 General Product Description

Equipment model name	C340T
Serial number	Prototype
EUT condition	Pre-production, not damaged
Frequency Range	802.11b/g/n(20 MHz) : 2412 MHz - 2462 MHz 802.11n(40 MHz) : 2422 MHz - 2452 MHz
RF output power	802.11b : 15.67 dBm 802.11g : 14.38 dBm 802.11n Ant0(20 MHz) : 14.14 dBm 802.11n Ant0(40 MHz) : 14.08 dBm 802.11n Ant1(20 MHz) : 15.05 dBm 802.11n Ant1(40 MHz) : 15.39 dBm 802.11n Ant0 + Ant1(20 MHz) : 18.14 dBm 802.11n Ant0 + Ant1(40 MHz) : 17.94 dBm
Number of channels	802.11b/g/n(20 MHz) : 11 802.11n(40 MHz) : 7
Channel Spacing	5 MHz
Transfer Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n : up to 300 Mbps
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Duty cycle TX power	1.0
Power Source	5 Vdc
Antenna Type	1. Dipole antenna Gain : 3 dBi 2. Dipole antenna Gain : 3 dBi

1.1 Tested Frequency

802.11b, 802.11g, 802.11n (20MHz)

	LOW	MID	HIGH
Frequency (MHz)	2412	2437	2462

802.11n (40MHz)

	LOW	MID	HIGH
Frequency (MHz)	2422	2437	2452

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Switching Adapter (for EUT)	Shenzhen Yonghao Technology Co., Ltd.	YHS AFC0502000W1US	-
Note Computer	DELL INC.	Inspiron 6400	-
Switching Adapter2	DDongguang Lite Power 2nd Plant	LA65NS0-00	-





1.4 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.5 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m OATS, 3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	10 m OATS, 3 m & 10 m SAC and Conducted Test Site	 R-948, C-986, T-1843
KOREA	KCC	EMI (10 m OATS, 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	

2 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
				C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.4-2003

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 40 MHz, 50 MHz

VBW = 100 kHz (VBW ≥ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Test mode : 802.11b

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11b	2412	1	11.51	Complies
	2437	6	11.51	Complies
	2462	11	11.51	Complies

Test mode : 802.11g

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11g	2412	1	16.02	Complies
	2437	6	16.13	Complies
	2462	11	15.75	Complies

Test mode : 802.11n (20 MHz, Ant0)

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11n (20 MHz)	2412	1	16.81	Complies
	2437	6	16.20	Complies
	2462	11	16.96	Complies

Test mode : 802.11n (40 MHz, Ant0)

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11n (40 MHz)	2422	3	31.22	Complies
	2437	6	35.13	Complies
	2452	9	34.32	Complies

Test mode : 802.11n (20 MHz, Ant1)

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11n (20 MHz)	2412	1	16.29	Complies
	2437	6	16.96	Complies
	2462	11	15.76	Complies

Test mode : 802.11n (40 MHz, Ant1)



Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11n (40 MHz)	2422	3	34.71	Complies
	2437	6	31.16	Complies
	2452	9	34.32	Complies

Minimum Standard:


6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.



802.11b

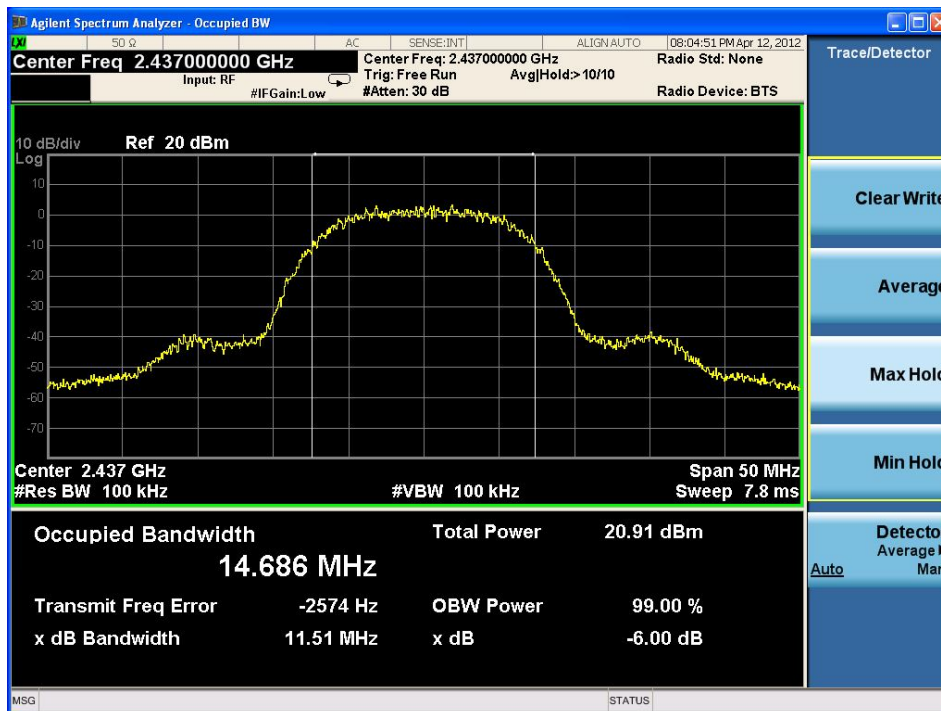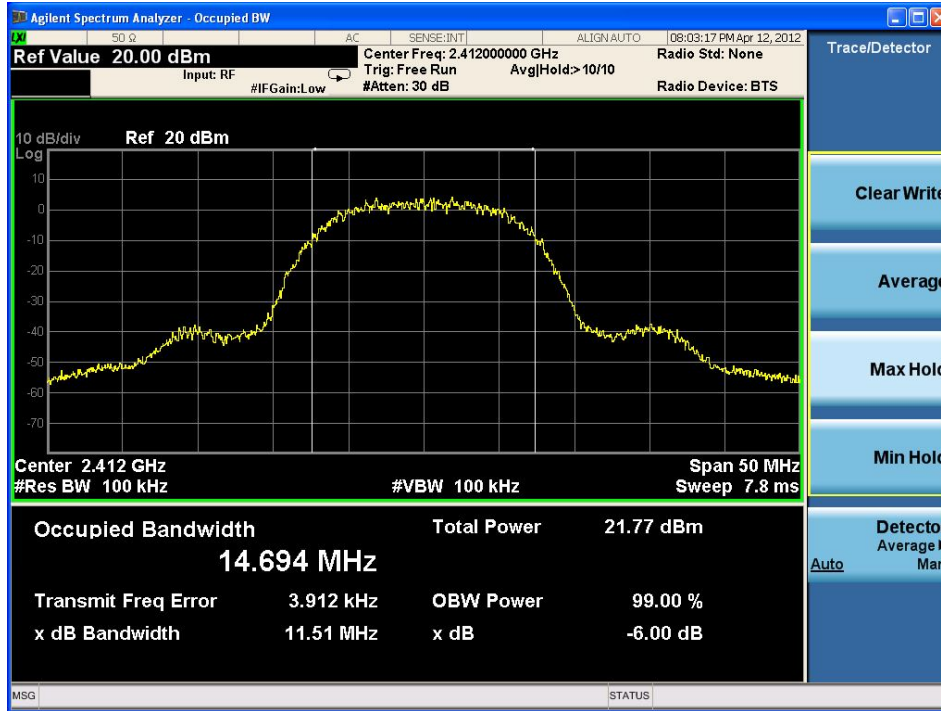


802.11b

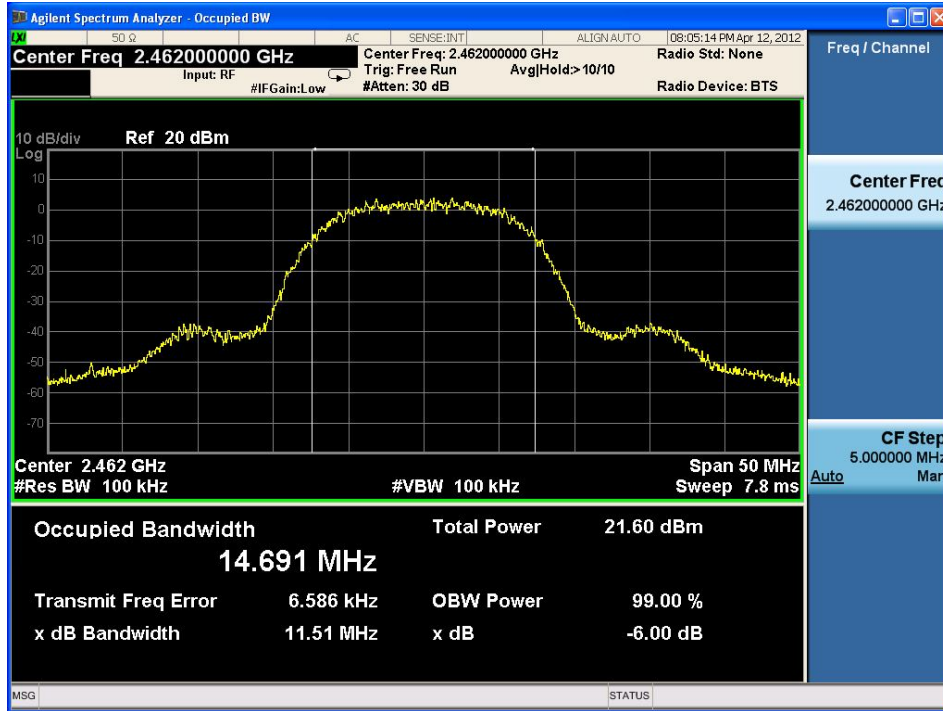



802.11g

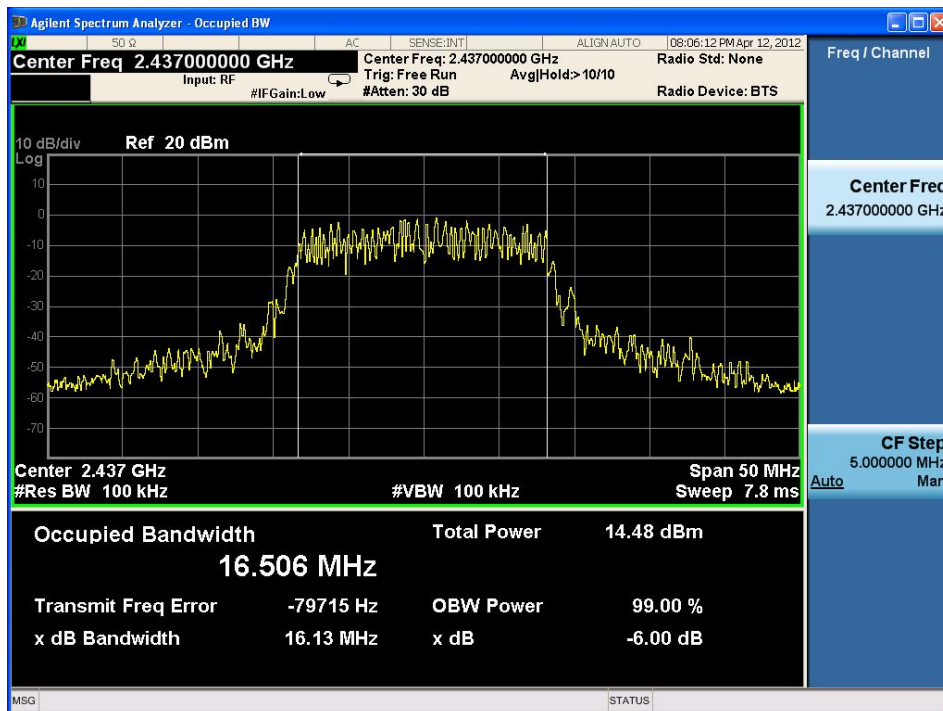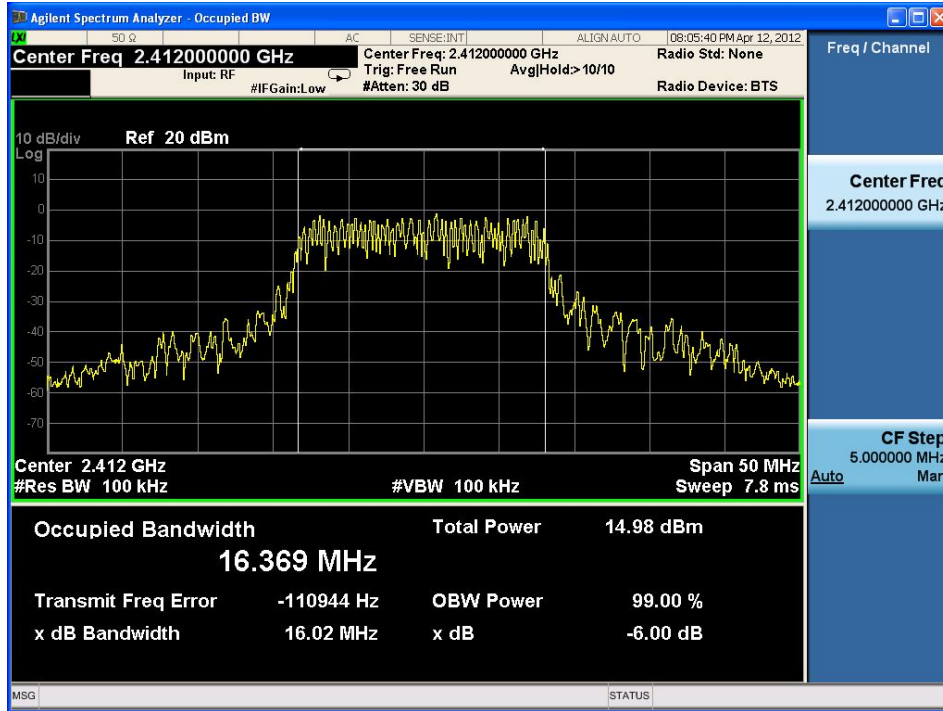


802.11g

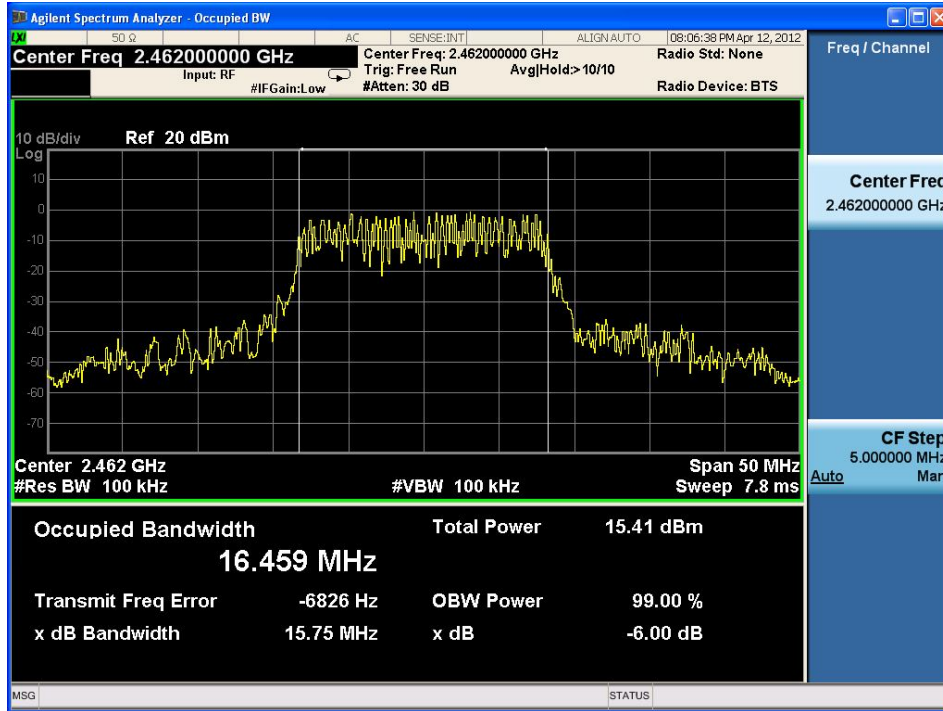



802.11n (20 MHz, Ant0)

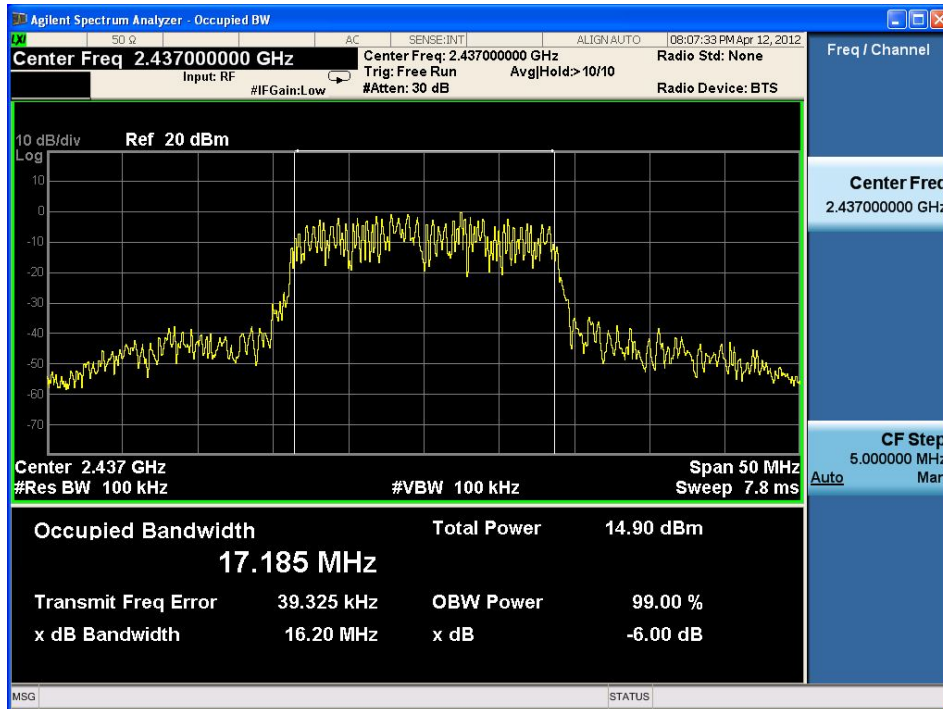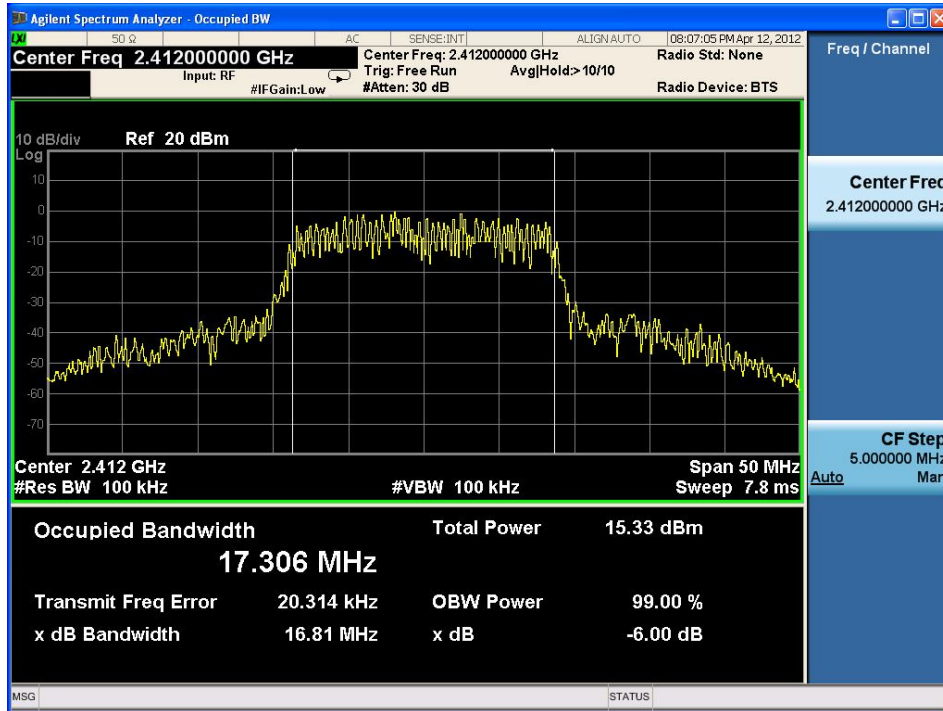


802.11n (20 MHz, Ant0)

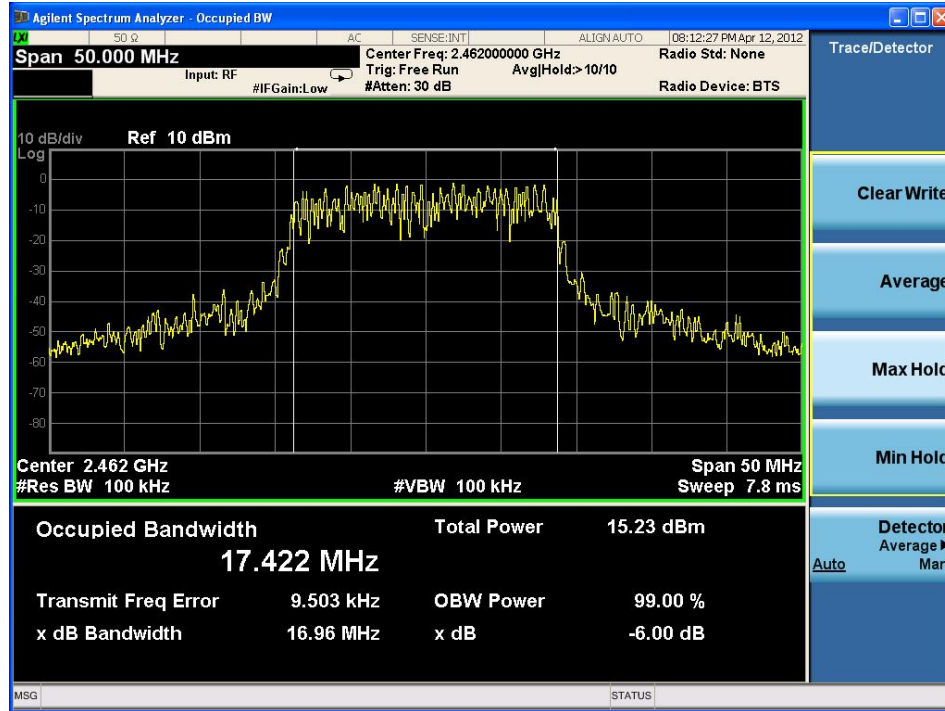



802.11n (40 MHz, Ant0)

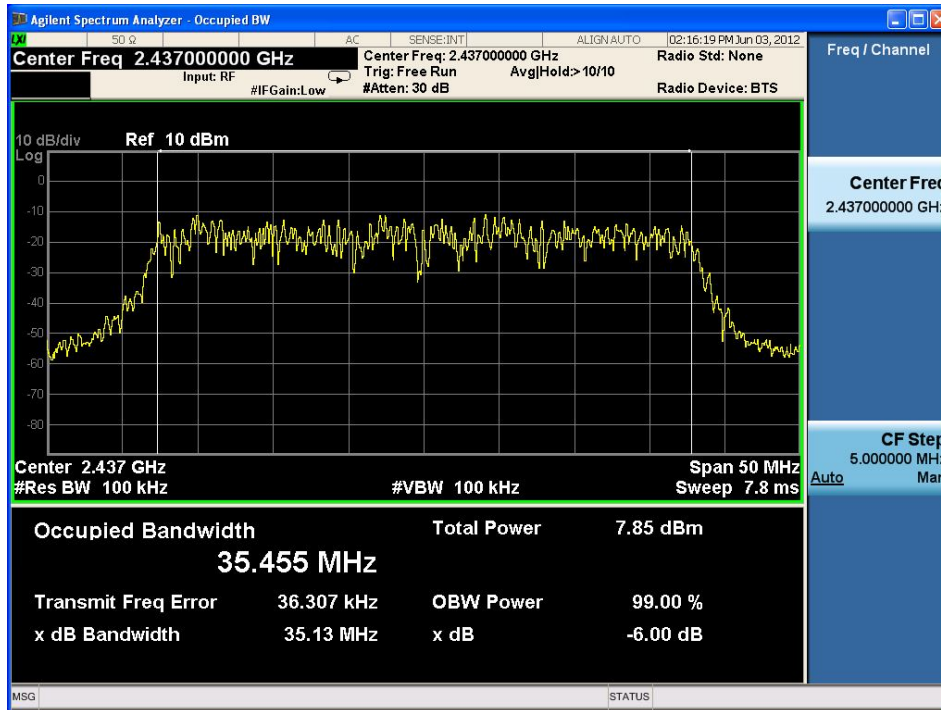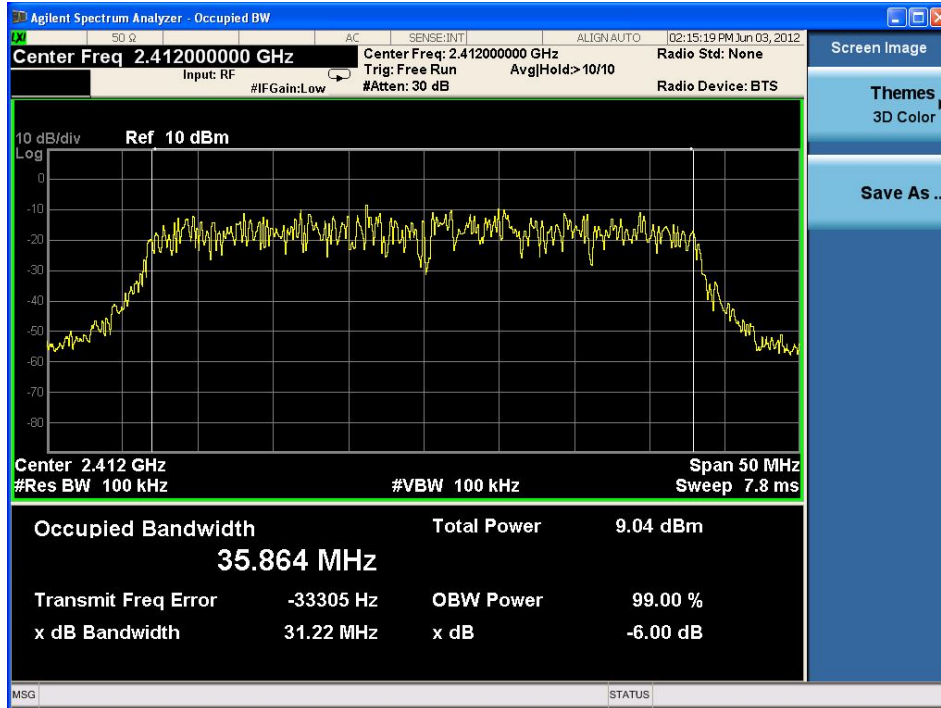


802.11n (40 MHz, Ant0)

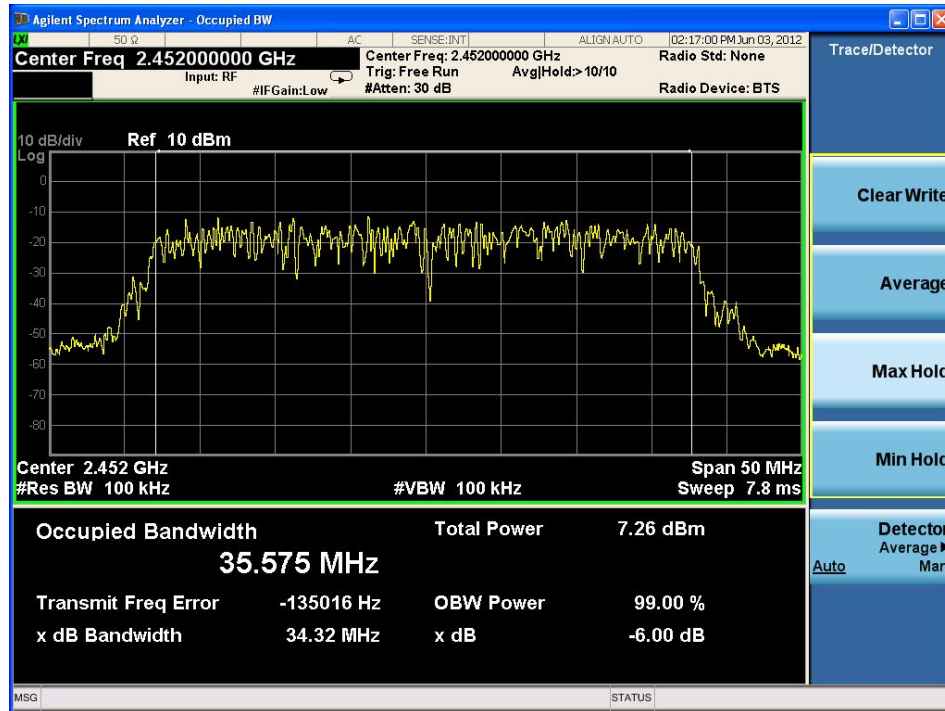



802.11n (20 MHz, Ant1)

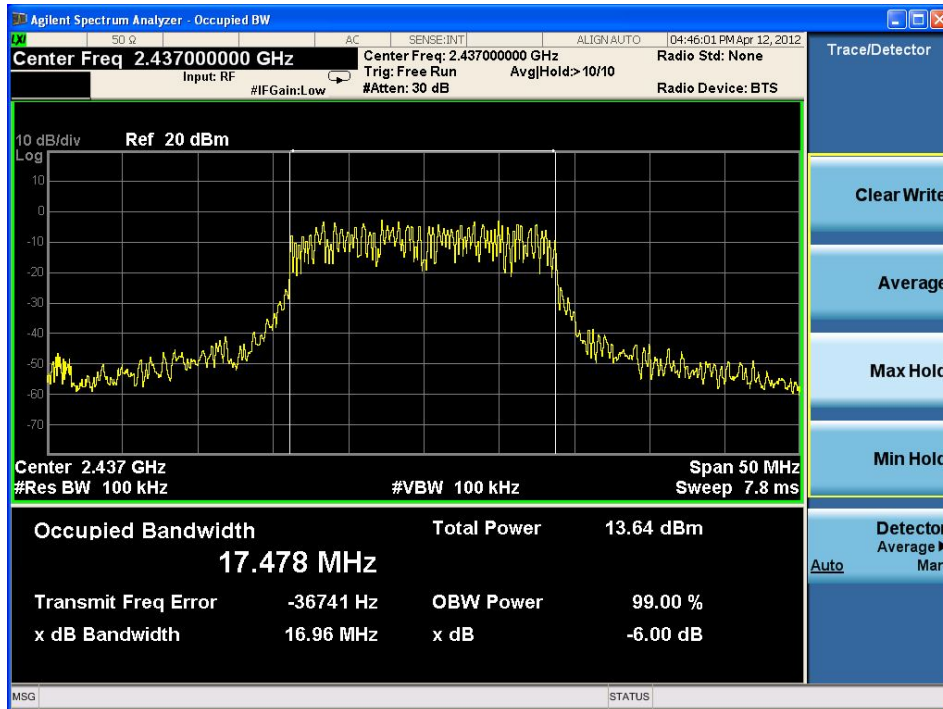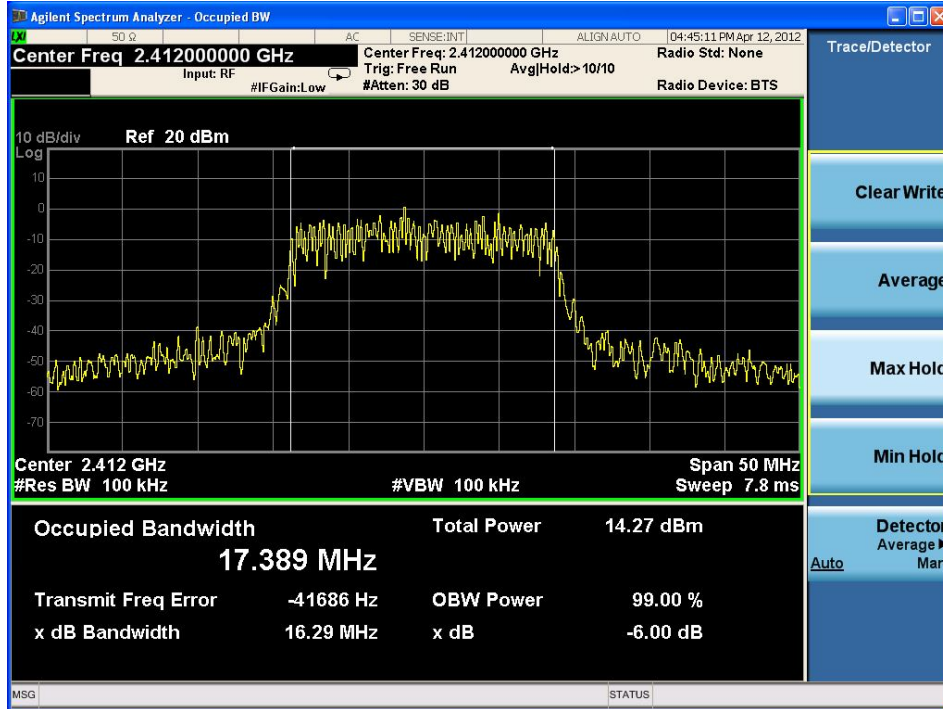


802.11n (20 MHz, Ant1)

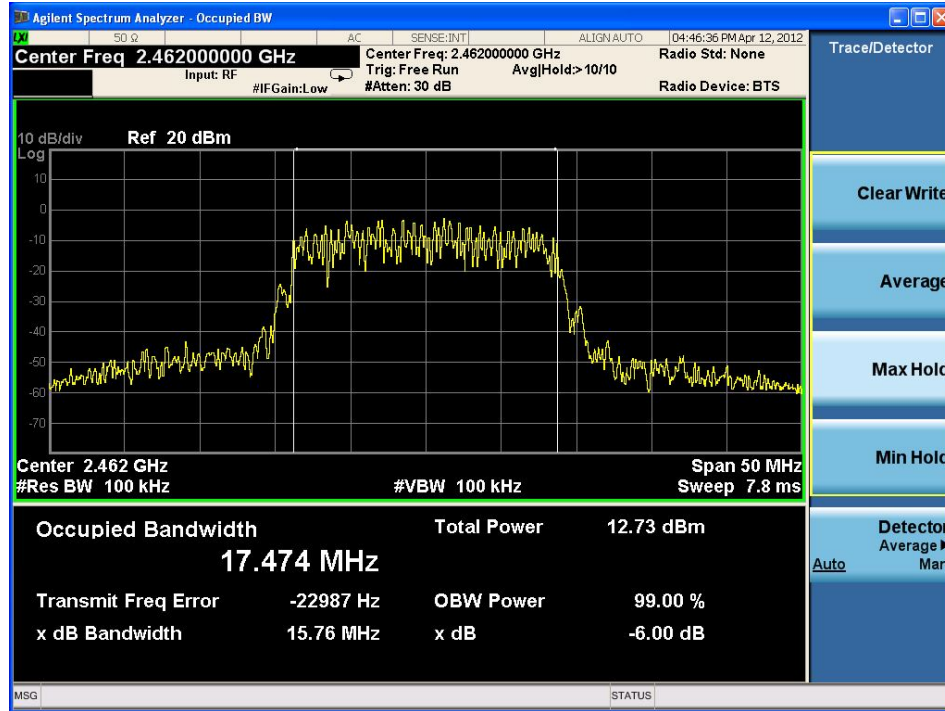

802.11n (40 MHz, Ant1)

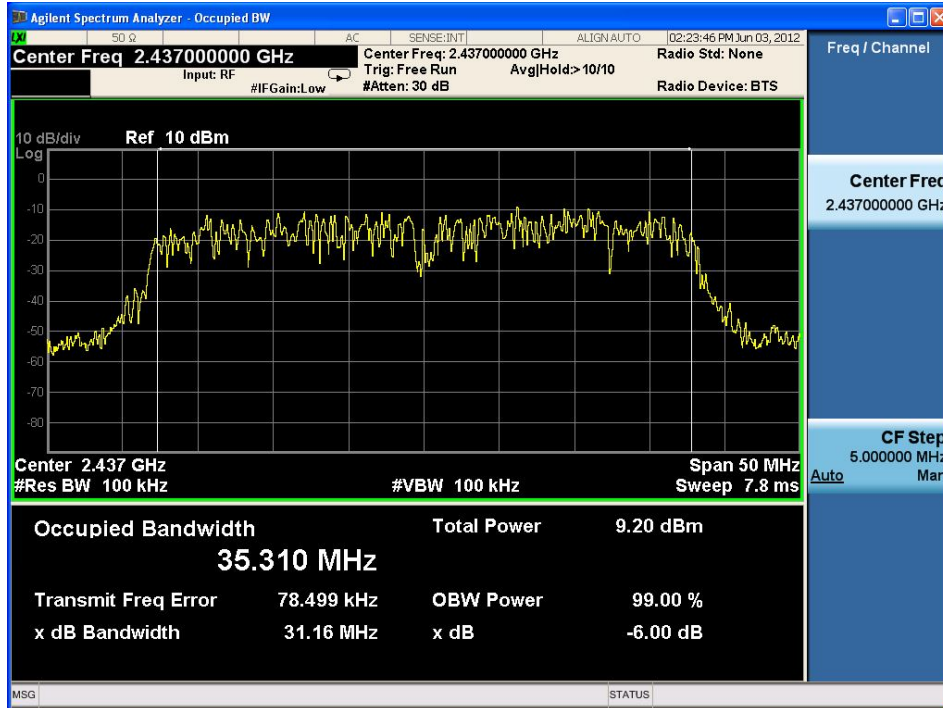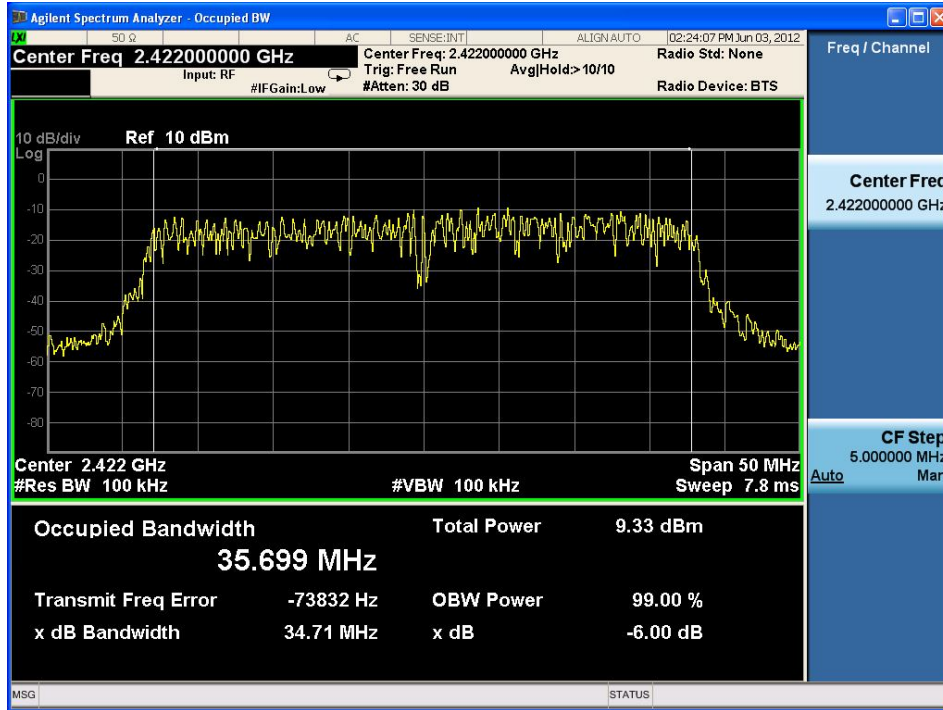

802.11n (40 MHz, Ant1)

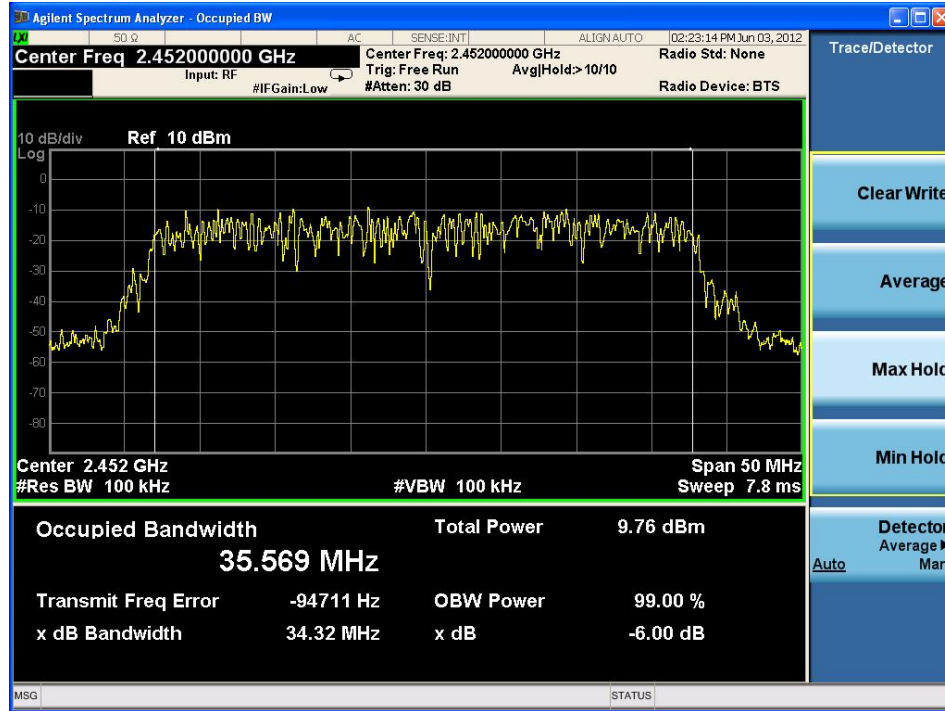


2.1.2 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

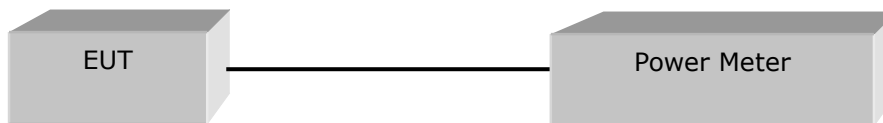

Limit

< 1 W

Test Results

Test mode : 802.11b - 11 Mbps

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	15.67	30dBm	Complies
2437	Middle	14.57	30dBm	Complies
2462	High	14.04	30dBm	Complies

Remark.

The 802.11b data rate were set in 11 Mbps, due to the highest RF output power.

Test mode : 802.11g - 6 Mbps

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	14.38	30dBm	Complies
2437	Middle	13.50	30dBm	Complies
2462	High	12.73	30dBm	Complies

Remark.

The 802.11g data rate were set in 6 Mbps, due to the highest RF output power.

Test mode : 802.11n (20 MHz, Ant0) – MCS0

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	14.14	30dBm	Complies
2437	Middle	13.01	30dBm	Complies
2462	High	12.57	30dBm	Complies

Remark.

The 802.11n(20 MHz) data rate were set in MCS0, due to the highest RF output power.

Test mode : 802.11n (40 MHz, Ant0) – MCS0

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2422	Low	14.08	30dBm	Complies
2437	Middle	13.30	30dBm	Complies
2452	High	12.51	30dBm	Complies

Remark.

The 802.11n(40 MHz) data rate were set in MCS0, due to the highest RF output power.

Test mode : 802.11n (20 MHz, Ant1) – MCS0

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	14.86	30dBm	Complies
2437	Middle	14.60	30dBm	Complies
2462	High	15.05	30dBm	Complies

Remark.

The 802.11n(20 MHz) data rate were set in MCS0, due to the highest RF output power.

Test mode : 802.11n (40 MHz, Ant1) – MCS0

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2422	Low	15.12	30dBm	Complies
2437	Middle	15.39	30dBm	Complies
2452	High	15.09	30dBm	Complies

Remark.

The 802.11n(40 MHz) data rate were set in MCS0, due to the highest RF output power.

Test mode : 802.11n (20 MHz, Ant0 + Ant1) – MCS8

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	17.27	30dBm	Complies
2437	Middle	18.14	30dBm	Complies
2462	High	16.49	30dBm	Complies

Remark.

The 802.11n(20 MHz) data rate were set in MCS8, due to the highest RF output power.

Test mode : 802.11n (40 MHz, Ant0 + Ant1) – MCS8

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2422	Low	17.19	30dBm	Complies
2437	Middle	17.94	30dBm	Complies
2452	High	16.68	30dBm	Complies

Remark.

The 802.11n(40 MHz) data rate were set in MCS8, due to the highest RF output power.

