

Measurement Report

Product : **Cable Modem**
Applicant : **TURBOCOMM TECH. INC.**
FCC ID : **N7ZEC420**
Model : **EC7000**
Report No. : **MLT0510P15002**
Test Date : **Oct 14,2004**

Test By

Max Light Technology Co., Ltd.

*Room 5, 8F, No. 125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.*

Tel: 886-2-2363-2447 Fax: 886-2-2363-2597

The test report consists of 27 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory.

Table of Contents :

<i>I. General</i>	4.
<i>II. Conducted Emissions Requirements</i>	8.
<i>III. Radiated Emissions Requirements</i>	16.
<i>Appendix I (EUT Test Setup)</i>	26.

CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-2003. All test were conducted by *MLT (Max Light Technology Co., Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart B.

EUT : Cable Modem

Applicant : TURBOCOMM TECH. INC.
2F, No., 19-8, San Chong Road, Nan-Kang,
Taipei 115 Taiwan ROC

Manufacturer : TURBOCOMM TECH. INC.
No.369, Sec.3, Chun Cheng East Road, Wu
Chuan Tsun, Ta Yuan Hsiang, Tao Yuan
Hsien, Taiwan, R.O.C.

Model No : EC7000

FCC ID : N7ZEC420

Prepared by : Jesse Tien Approved by : Roger Chen

Jesse Tien Roger Chen

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of TURBOCOMM TECH. INC. In support of a Class B Digital Device certification in accordance with Part 2 Subpart J and Part 15 Subpart A And B of the Commission's and Regulations.

1.2 Description of EUT

EUT : Cable Modem

Applicant : TURBOCOMM TECH. INC.
2F, No., 19-8, San Chong Road, Nan-Kang,
Taipei 115 Taiwan ROC

Manufacturer : TURBOCOMM TECH. INC.
No.369, Sec.3 Chun Cheng East Road,
Wu Chuan Tsun, Ta Yuan Hsiang, Tao Yaun
Hsien, Taiwan, R.O.C.

Model No : EC7000

FCC ID : N7ZEC420

Power Type : Powered by AC Adaptor
Model No.: AD-121AN; I/P: 120V, 60Hz, 20W
O/P: 12VDC, 1Amp

1.3 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-2003, following equipments were used as the support units.

Computer : IBM

Model No. : 16W

Serial No. : BNC345M

FCC ID : FCC(DOC)

Keyboard : IBM

Model No. : KB-9930

Serial No. : 09N5395

FCC ID : FCC(DOC)

Monitor : IBM

Model No. : 10L6145 030

Serial No. : 23-092079

FCC ID : ARSCM569N

Mouse : IBM

Model No. : 0180-05N

Serial No. : 23-092079

FCC ID : JNZ211220

Printer : PANASONIC

Model No. : KX-P1080I

Serial No. : 7CKAKE98933

FCC ID : ACJ5Z6KX-P10801


Modem : Askey (External Fax / Data Modem)

Model No. : WS1414VE

Serial No. : IAH-10811

FCC ID : H8N1414VE

1.4 Configuration of System Under Test

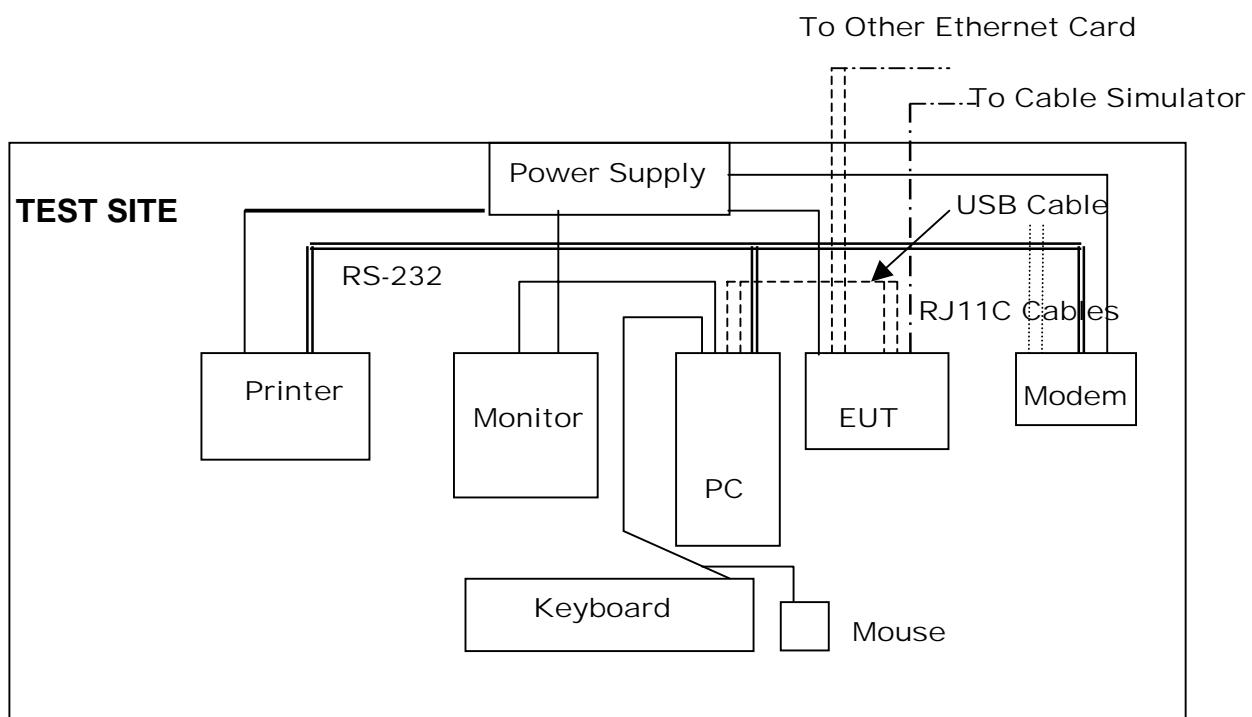

During testing the EUT(Cable Modem)'s LAN Ethernet port connected to the Remote Ethernet and USB port were connected USB port of IBM computer. A mouse was connected to the mouse port of IBM PC. And A keyboard was connected to the mouse port of IBM PC. And a printer was connected to the parallel port. An external modem connected the serial port and the external modem connected with two un-terminated telephone cables on the line and phone jack.

1.5 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-2003 "Measurement of un-Intentional Radiators."

1.7 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated. The system's radiated and conducted emissions were investigated while the computer alternately transferred data to the EUT (1000 bytes). Run "Ping (IP Address -T -L 1000)" comment which sent a continuous stream of 1000 Bytes data to EUT and transferred data to and from the EUT was proven to worst case emissions. The system's physical layout and cabling was randomly arranged to ensure that maximum emission levels were attained.

II. Conducted Emissions Requirements

2.1 General & Setup :

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.


2.2 Test Equipment List:

- A. EMCO 3825/2 LISN (S/N:2654)**
- B. EMCO 3825/2 LISN (S/N:2658)**
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)**
- D. R&S ESH3 Test Receiver (S/N:892108/025)**
- E. Shielded Room (MLT-SR1)**

2.3 Test Configuration:



Front View of The Test Configuration (HORIZONTAL)

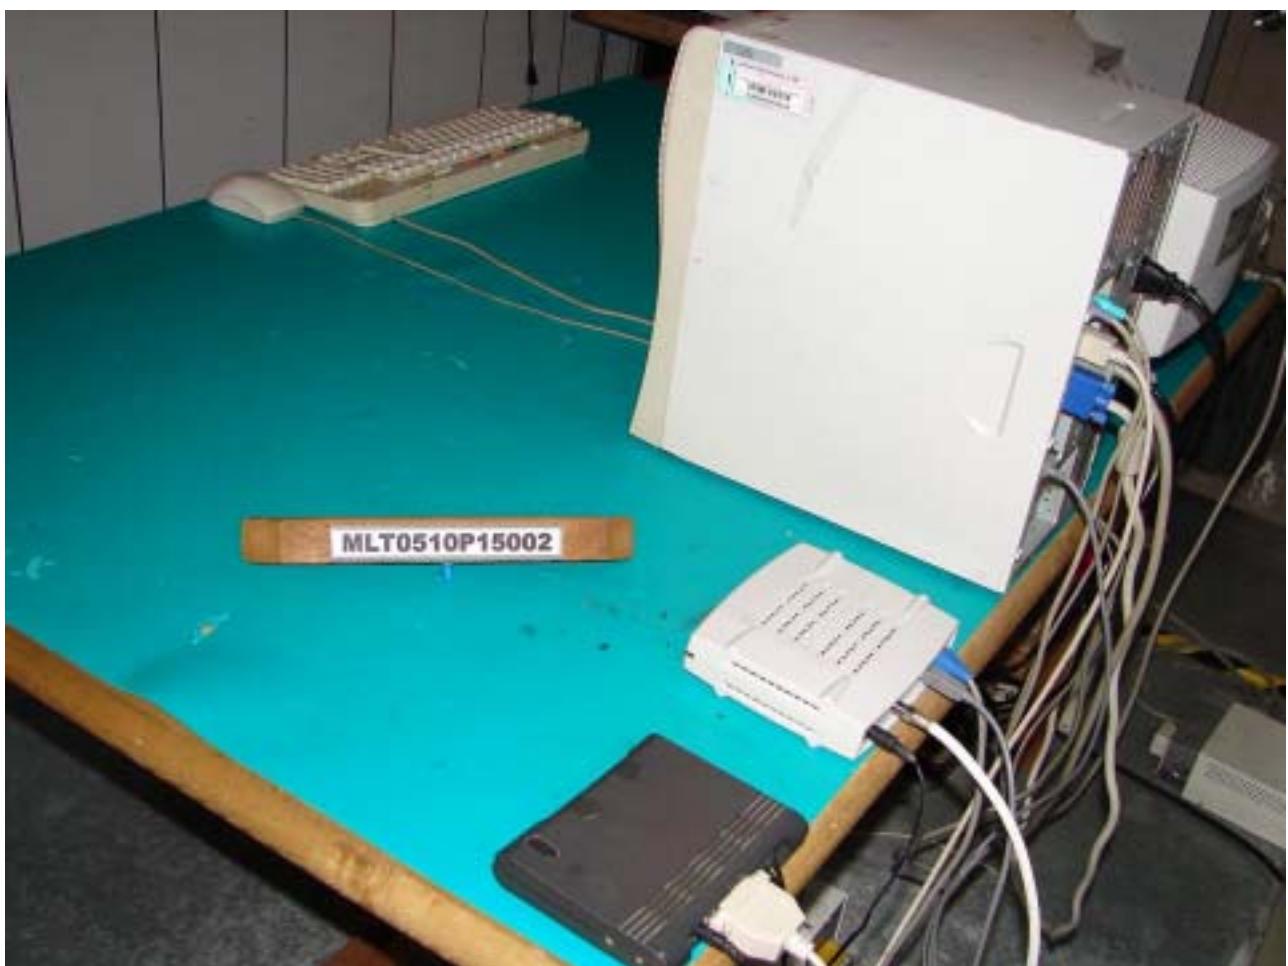

Rear View of The Test Configuration (HORIZONTAL)



Front View of The Test Configuration (VERTICAL)



Rear View of The Test Configuration (VERTICAL)

2.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Limits (dBuV)</i>	
	<i>Quasi-peak</i>	<i>Average</i>
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

2.6 Measurement Data Of Conducted Emissions:

2.6.1 Terminal Voltage (Mains Power)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : TURBOCOMM TECH. INC..
Model No : EC7000
EUT : Cable Modem
Test Mode : Run "Ping" Command (HORIZONTAL)

Power Line Conducted Emissions (Class B)					
Conductor	Frequency (MHz)	Quasi-Peak (dBuV)	Limits	Average (dBuV)	Limits
L1	0.15	58.50	66.00	32.65	56.00
	0.16	57.93	65.03	34.73	55.03
	0.21	56.63	62.88	34.62	52.88
	0.30	55.48	60.19	35.19	50.19
	0.42	53.78	57.33	36.25	47.33
	0.52	49.49	56	34.71	46
	8.78	40.36	60	--	50
L2	0.15	58.32	66.00	33.28	56.00
	0.17	56.95	64.55	34.11	54.55
	0.24	55.35	62.04	33.21	52.04
	0.32	53.95	59.57	33.35	49.57
	0.42	52.69	57.33	32.95	47.33
	0.51	48.98	56	31.58	46
	0.81	40.66	56	--	46

Notes :

- L1: One end & Ground L2: The other end & Ground
- Height of table on which the EUT was placed : 0.8 m.
- The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
- The above test results are obtained under the normal condition.

2.6.2 Terminal Voltage (Mains Power)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : TURBOCOMM TECH. INC.
 Model No : EC7000
 EUT : Cable Modem
 Test Mode : Run "Ping" Command (VERTICAL)

Power SW Conducted Emissions (Class B)					
Conductor	Frequency (MHz)	Quasi-Peak (dBuV)	Limits	Average (dBuV)	Limits
L1	0.15	58.89	66.00	33.56	56.00
	0.25	55.93	61.60	35.62	51.60
	0.34	55.20	59.00	36.95	49.00
	0.42	54.11	57.33	37.52	47.33
	0.53	49.88	56	34.62	46
	8.87	41.00	60	--	50
	12.58	41.04	60	--	50
L2	0.15	58.41	66.00	34.62	56.00
	0.18	56.89	64.20	35.16	54.20
	0.26	54.97	61.38	36.25	51.38
	0.35	53.88	58.74	34.65	48.74
	0.42	52.89	57.33	35.29	47.33
	0.52	48.90	56	33.95	46
	8.78	39.93	60	--	50

Notes : 1.L1: One end & Ground L2: The other end & Ground
 2.Height of table on which the EUT was placed : 0.8 m.
 3.The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
 4.The above test results are obtained under the normal condition.

III. Radiated Emissions Requirements

3.1 General & Setup :

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591EM Spectrum Analyzer, EMCO Biconical Antenna (Model 3142) for 30-1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz, and the analyzer was operated in the quasi-peak detection mode. The highest emission amplitudes relative to the appropriate limit were measured and recorded in paragraph 3.6.

3.2 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)**
- B. HP 8447D Pre Amplifier (S/N:2944A08954)**
- C. EMCO 3142 Biconilog Antenna (S/N:1184)**
- D. R&S ESVP Test Receiver (S/N:881121/01)**

3.3 Test Configuration:



Front View of The Test Configuration



Rear View of The Test Configuration



Front View of The Test Configuration (VERTICAL)



Rear View of The Test Configuration (VERTICAL)

3.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

3.5 Radiated Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Quasi-peak(dBuV/m)</i>
30 to 230	30
230 to 1000	37

3.6 Measurement Data Of Radiated Emissions:

3.6.1 Open Field Radiated Emissions (HORIZONTAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Applicant : TURBOCOMM TECH. INC.
Model No : EC7000
EUT : Cable Modem
Test Mode : Run "Ping" Command (HORIZONTAL)

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
125.02	25.32	2	310	30	-4.68
163.26	23.08	1.5	220	30	-6.92
175.02	23.69	1	190	30	-6.31
193.58	23.11	2.5	210	30	-6.89
225.00	23.38	1.5	290	30	-6.62
375.12	32.27	1	360	37	-4.73
500.01	31.88	1	60	37	-5.12
600.42	31.87	1.5	190	37	-5.13
625.00	33.51	3	900	37	-3.49
672.12	31.60	2.5	170	37	-5.40
875.01	32.35	1.5	310	37	-4.65

Notes : 1.Margin= Amplitude - Limits
 2.Distance of Measurement : 10 Meter (30-1000MHz)
 3.Height of table for EUT placed: 0.8 Meter.
 4.ANT= Antenna height.
 5.Amplitude= Reading Amplitude -Amplifier gain+ Cable loss
 +Antenna factor
 (Auto calculate in spectrum analyzer)

3.6.2 Open Field Radiated Emissions (VERTICAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Applicant : TURBOCOMM TECH. INC.
Model No : EC7000
EUT : Cable Modem
Test Mode : Run "Ping" Command (HORIZONTAL)

Radiated Emissions (VERTICAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
75.01	23.08	2.5	300	30	-6.92
100.01	23.74	1	240	30	-6.26
108.80	23.63	1.5	180	30	-6.37
124.99	25.38	2	230	30	-4.62
148.09	25.13	1.5	240	30	-4.87
175.01	23.79	1.5	360	30	-6.21
199.99	23.26	1	160	30	-6.74
250.00	30.82	1.5	190	37	-6.18
375.00	31.79	3	900	37	-5.21
625.00	31.58	2	170	37	-5.42
932.03	31.44	1.5	250	37	-5.56

Notes : 1.Margin= Amplitude - Limits
 2.Distance of Measurement : 10 Meter (30-1000MHz)
 3.Height of table for EUT placed: 0.8 Meter.
 4.ANT= Antenna height.
 5.Amplitude= Reading Amplitude -Amplifier gain+ Cable loss
 +Antenna factor
 (Auto calculate in spectrum analyzer)

3.6.3 Open Field Radiated Emissions (HORIZONTAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Applicant : TURBOCOMM TECH. INC.
Model No : EC7000
EUT : Cable Modem
Test Mode : Run "Ping" Command (VERTICAL)

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
125.02	26.003	2	310	30	-4.00
168.13	24.72	1.5	260	30	-5.28
175.04	23.08	1	190	30	-6.92
193.57	23.37	2	210	30	-6.63
250.02	32.88	1.5	250	37	-4.12
375.01	32.16	1	360	37	-4.84
500.01	31.79	1.5	160	37	-5.21
576.11	29.73	1.5	150	37	-7.27
625.01	31.22	3	190	37	-5.78
637.30	30.78	2	170	37	-6.22
750.01	30.94	1.5	310	37	-6.06

Notes : 1.Margin= Amplitude - Limits
 2.Distance of Measurement : 10 Meter (30-1000MHz)
 3.Height of table for EUT placed: 0.8 Meter.
 4.ANT= Antenna height.
 5.Amplitude= Reading Amplitude -Amplifier gain+ Cable loss
 +Antenna factor
 (Auto calculate in spectrum analyzer)

3.6.4 Open Field Radiated Emissions (VERTICAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.


Applicant : TURBOCOMM TECH. INC.
Model No : EC7000
EUT : Cable Modem
Test Mode : Run "Ping" Command

Radiated Emissions (VERTICAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
94.05	24.19	1	180	30	-5.81
124.99	25.72	2	300	30	-4.28
132.04	24.10	1.5	210	30	-5.90
137.80	25.16	1	240	30	-4.84
148.10	26.34	2.5	230	30	-3.66
250.01	31.56	1	310	37	-5.44
375.03	33.41	2	150	37	-3.59
500.01	31.91	1.5	210	37	-5.09
577.30	31.75	1	190	37	-5.25
625.01	32.41	1.5	170	37	-4.59
875.01	30.80	2	320	37	-6.20

Notes : 1.Margin= Amplitude - Limits
 2.Distance of Measurement : 10 Meter (30-1000MHz)
 3.Height of table for EUT placed: 0.8 Meter.
 4.ANT= Antenna height.
 5.Amplitude= Reading Amplitude -Amplifier gain+ Cable loss
 +Antenna factor
 (Auto calculate in spectrum analyzer)

Appendix I- EUT Test SETUP

MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE

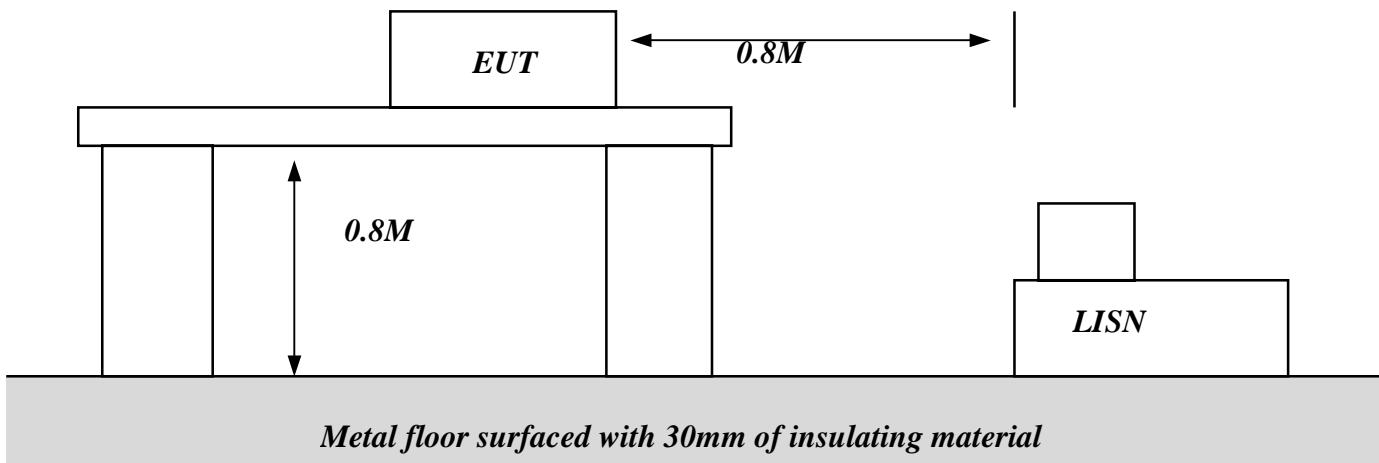

Appendix I- EUT Test SETUP**MEASUREMENT OF RADIATED EMISSION**