

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666 Report No.: SHEM120900130501 Fax: +86 (0) 21 6191 5655 Page: 1 of 77

Fax: +86 (0) 21 6191 5655 Page: 1 of 77 ee.shanghai@sgs.com

TEST REPORT

Application No.: SHEM1209001305RF

Applicant: Kohler Co.

FCC ID: N82-KOHLER009
IC ID: 4554A-KOHLER009

Equipment Under Test (EUT):

Product Name: Numi upgrade Integrated toilet with bidet functionality

Model: K-3901 Brand Name: Kohler

Standards: FCC PART 15 SUBPART C, Section 15.247

RSS-210 Issue 8 (December 2010) RSS-Gen Issue 3 (December 2010)

Date of Receipt: October 23, 2012

Date of Test: October 29, 2012 to February 7, 2013

Date of Issue: February 7, 2013

Test Result : PASS *

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Jim Xar

E&E Section Head SGS-CSTC(Shanghai) Co., Ltd.

E&E EMC Engineer SGS-CSTC(Shanghai) Co., Ltd.

Lenger Zhang

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM120900130501

Page: 2 of 77

2 Test Summary

Test items	FCC REFERANCE	IC REFERANCE	Result
Antenna Requirement	Section 15.203, 15.247(c) (1)(i)		PASS
20dB Bandwidth	Section 15.247 (a)(1)	RSS-210 Issue 8 Annex 8.1(b) RSS-Gen Issue 3 Clause 4.6.3	PASS
Carrier Frequencies Separated	Section 15.247(a)(1)	RSS-210 Issue 8 Annex 8.1(b)	PASS
Hopping Channel Number	Section 15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8.1(d)	PASS
Dwell Time	Section 15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8.1(d)	PASS
Maximum Peak Output Power	Section 15.247(b)(1)	RSS-210 Issue 8 Annex 8.4(2)	PASS
RF Exposure Compliance Requirement	15.247(b)(4)	RSS-Gen Issue 3 Clause 5.6	PASS
Conducted Spurious Emission (30MHz to 25GHz)	15.247(d)	RSS-210 Issue 8 Annex 8.5	PASS
Radiated Spurious Emission (30MHz to 25GHz)	Section 15.209 &15.247(d)	RSS-210 Issue 8 Annex 8.5	PASS
Band Edges Measurement	Section 15.247 (d) &15.205	RSS-Gen Issue 3 Clause 7.2.2	PASS
Power line conducted emission	Section 15.207	RSS-Gen Issue 8 Clause 7.2.4	PASS



Report No.: SHEM120900130501

Page: 3 of 77

3 Contents

		Page
1	1 COVER PAGE	1
2	2 TEST SUMMARY	
3		
4	4 GENERAL INFORMATION	4
	4.1 CLIENT INFORMATION	
	4.2 GENERAL DESCRIPTION OF E.U.T.	
	4.3 DETAILS OF E.U.T	
	4.4 DETAILS OF TEST MODE	
	4.6 TEST LOCATION	
	4.7 TEST FACILITY	
_		
5		
6	6 TEST RESULTS	8
	6.1 E.U.T. TEST CONDITIONS	8
	6.2 Antenna Requirement	9
	6.2.1 Standard requirement	
	6.2.2 EUT Antenna	
	6.3 20DB BANDWIDTH	
	6.4 CARRIER FREQUENCIES SEPARATED	
	6.6 DWELL TIME	
	6.7 MAXIMUM PEAK OUTPUT POWER	
	6.8 RF Exposure Compliance Requirement	
	6.9 CONDUCTED SPURIOUS EMISSIONS	
	6.10 RADIATED SPURIOUS EMISSIONS	
	6.10.1 Radiated Emissions which fall in the restricted bands	
	6.11 BAND EDGES REQUIREMENT	
7	7 TEST SETUP PHOTOGRAPHS	76
8	8 EUT CONSTRUCTIONAL DETAILS	76



Report No.: SHEM120900130501

Page: 4 of 77

4 General Information

4.1 Client Information

Applicant:	Kohler Co.			
Address of Applicant:	444 Highland Drive Kohler, WI 53044			
Manufacturer:	Shanghai KOHLER Electronics., Ltd.			
Address of Manufacturer:	Building E, 18 Jindian Road, Pudong New Area, 201206 Shanghai, China			
Factory:	Shanghai KOHLER Electronics., Ltd.			

4.2 General Description of E.U.T.

Product Name:	Numi upgrade Integrated toilet with bidet functionality
Model No.(EUT):	K-3901
Add Model No.:	N/A
Model Difference:	N/A
Trade Mark:	Kohler
Supported Frequency Bands:	Bluetooth(BT): 2.402GHz to 2.480GHz
Remark:	The EUT (Model No. K-3901) includes the following three wireless modules: a, 2.4 GHz Zigbee communication module; b, 10.525 GHz microwave detection module; c, 2.4 GHz Bluetooth communication module. The report is only covered 2.4 GHz Bluetooth communication module.

4.3 Details of E.U.T.

Technical Specifications:

BT Version:	□2.0 ⊠2.1 □3.0 □Other:
Modulation Type:	⊠GFSK ⊠π/4DQPSK ⊠8DPSK □Other:
Frequency Range / Channel Number:	☑ 2402-2480MHz / 79 Channels
Equipment classification:	□ equipment for fixed use (mobile device)
Antenna Type:	PIFA antenna (as below figure)
Antenna Gain:	3.0 dBi



Report No.: SHEM120900130501

Page: 5 of 77

Power Supply:

Rated Input:	120VAC 60Hz
Power Cable:	2 wires
	1.5m

4.4 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. And select test channel as below:

For Bluetooth:

Channel	Frequency
The lowest channel(CH1)	2402MHz
The middle channel(CH40)	2441MHz
The Highest channel(CH79)	2480MHz

4.5 Standards Applicable for Testing

The standard used were FCC PART 15 SUBPART C, Section 15.247, ANSI C63.10: 2009. RSS-210 Issue 8, RSS-Gen Issue 3.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678



Report No.: SHEM120900130501

Page: 6 of 77

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

FCC – Registration No.: 402683

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

• Industry Canada (IC) - IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

• VCCI (Member No.: 3061)

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.



Report No.: SHEM120900130501

Page: 7 of 77

5 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-03	2013-06-01
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-06-03	2013-06-01
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-06-03	2013-06-01
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-06-03	2013-06-01
5	Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91703 73	2012-03-15	2013-03-14
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-09	2013-10-08
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P		2012-10-15	2013-10-14
8	CLAMP METER	FLUKE	316	86080010	2012-06-03	2013-06-01
9	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-14	2013-10-13
11	High-low temperature cabinet	Shanghai YuanZhen	GW2050		2012-06-17	2013-06-16
12	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT1800.0/ 2000.0-0.2/40- 5SSK	11	2012-06-03	2013-06-01
13	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/880 .0-0.2/40-5SSK	9	2012-06-03	2013-06-01
14	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	2012-06-03	2013-06-01
15	Low nosie amplifier	TESEQ	LNA6900	70133	2012-07-05	2013-07-04
16	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-04	2013-06-03
17	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2012-06-03	2013-06-01



Report No.: SHEM120900130501

Page: 8 of 77

6 Test Results

6.1 E.U.T. test conditions

Power supply: 100-230VAC, 50/60Hz

Requirements: 15.31(e) For intentional radiators, measurements of the variation of the input

power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a

new battery.

Type of antenna: PIFA antenna

Operating Environment:

Temperature: 20.0 -25.0 °C
Humidity: 35-75 % RH
Atmospheric Pressure: 992 -1020 mbar

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or

receivers, other than TV broadcast receivers, shall be performed and. if required. reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in

the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom

Pursuant to Part 15.31(c) For swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

Test frequency is the lowest channel: 0 channel (2402MHz), middle channel: 39 channel (2441MHz) and highest channel: 78 channel (2480MHz) with fixed at channel.



Report No.: SHEM120900130501

Page: 9 of 77

6.2 Antenna Requirement

6.2.1 Standard requirement

15.203 requirement:

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed. point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

6.2.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The gain of the antenna is less than 3.0 dBi.

Test result: The EUT does meet the FCC requirements.



Report No.: SHEM120900130501

Page: 10 of 77

6.3 20dB Bandwidth

Test Requirement: FCC Part 15 C Section 15.247 (a)(1)

RSS-210 Issue 8 Annex 8.1(b)

Test Method: ANSI C63.10:2009 Clause 6.9.1, RSS-Gen Issue 3 Clause 4.6.3

Test Date: February 7, 2013

Test Status: Test in fixing operating frequency at lowest, Middle, highest channel.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

- 2. Set the spectrum analyzer: Span = approximately 2 to 5 times the 20dB bandwidth, centered on the hopping channel;
- 3. Set the spectrum analyzer: RBW = 1% to 5% of the 20dB bandwidth (set 30kHz). VBW >= 3RBW (set 100kHz). Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4. Mark the peak frequency and -20dB points.

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test result: Pass

Test date


Test Channel	Channel Frequency (MHz)	Modulation	Bandwidth(MHz)	
Low	2402	GFSK	0.783	
Middle	2441	GFSK	0.768	
High	2480	GFSK	0.771	
Low	Low 2402	π/4DQPSK	1.203	
Middle	2441	π/4DQPSK	1.200	
High	High 2480		1.191	
Low	2402	8DPSK	1.194	
Middle	2441	8DPSK	1.203	
High 2480		8DPSK	1.194	



Report No.: SHEM120900130501

Page: 11 of 77


Result plot as follows:

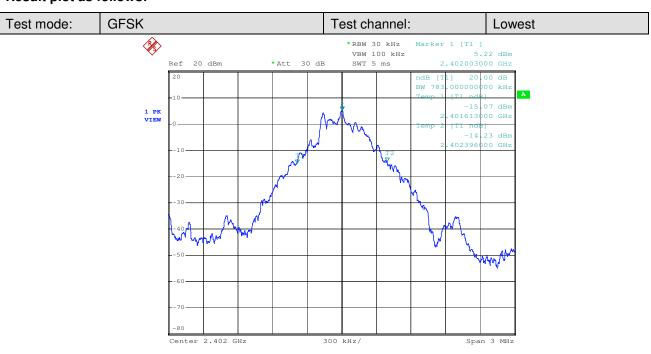



7.FEB.2013 11:30:54

Date:

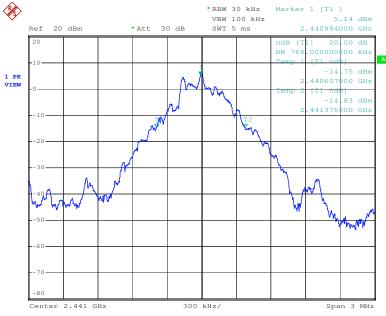



Date: 7.FEB.2013 11:32:22



Report No.: SHEM120900130501

Page: 12 of 77

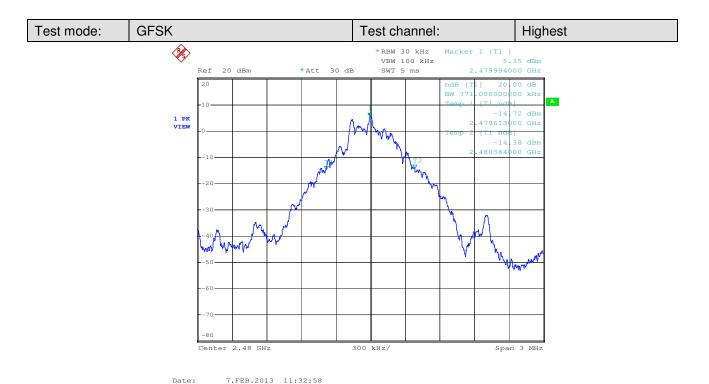

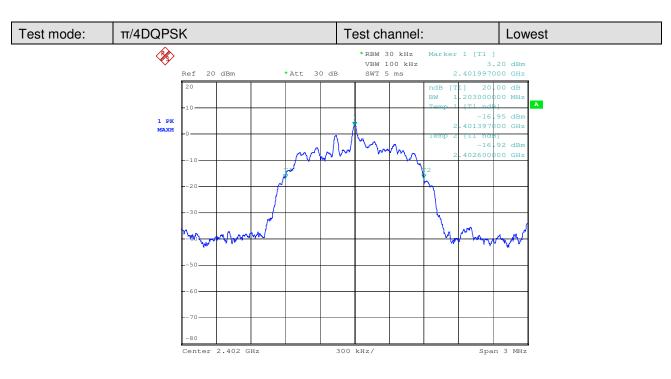


Date: 7.FEB.2013 11:39:45




Report No.: SHEM120900130501

Page: 13 of 77

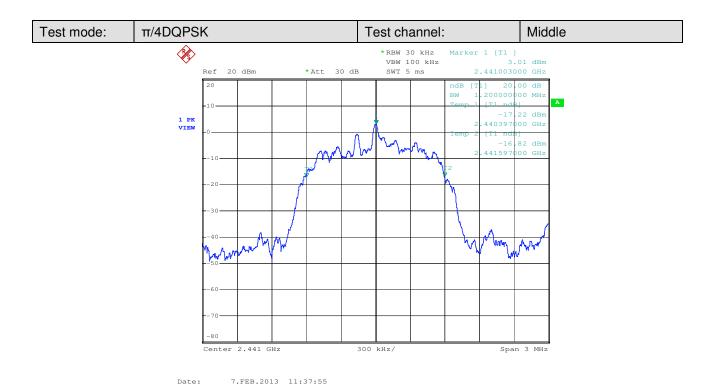



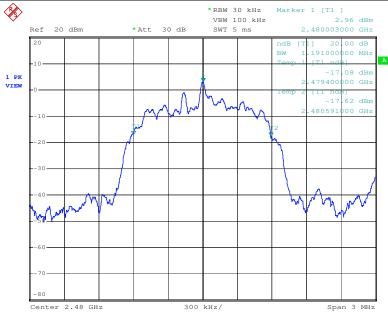



Date: 7.FEB.2013 11:34:39



Report No.: SHEM120900130501

Page: 14 of 77

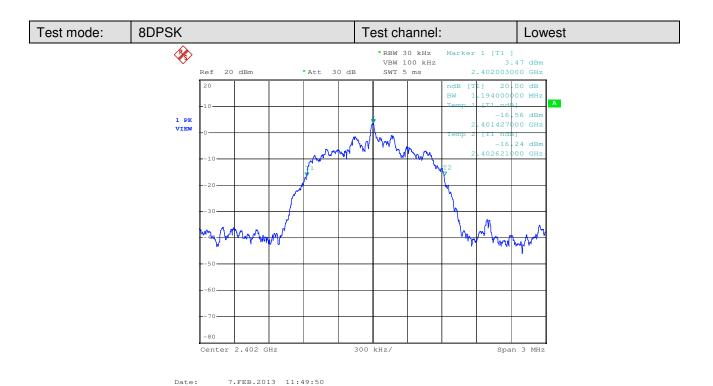


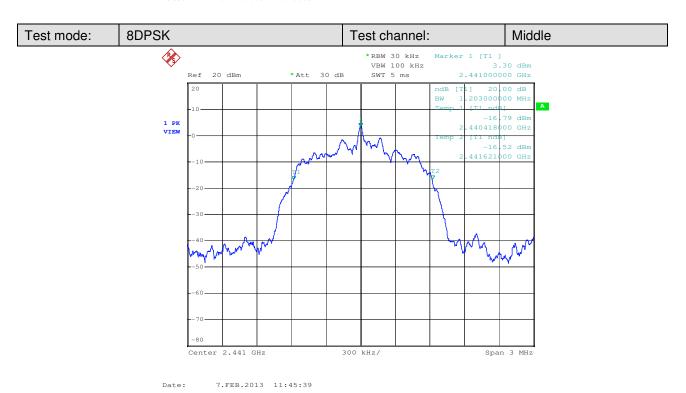



Report No.: SHEM120900130501

Page: 15 of 77

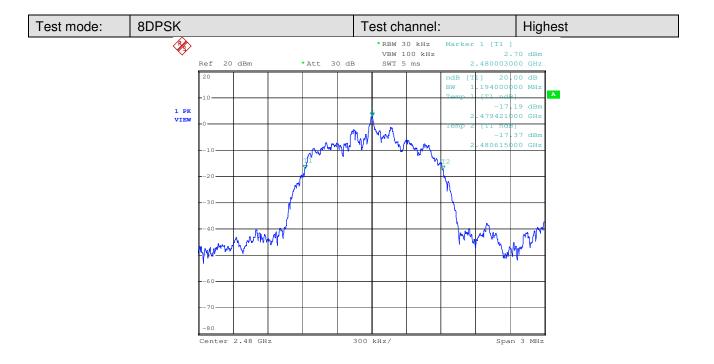

Date:

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

7.FEB.2013 11:50:32



Report No.: SHEM120900130501

Page: 16 of 77

6.4 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C Section 15.247 (a)(1)

RSS-Gen Issue 3 Clause 8.1(b)

Test Method: ANSI C63.10:2009 Clause 7.7.2

Test Date: November 21, 2012

Test requirements: Regulation 15.247(a),(1) Frequency hopping systems shall have hopping

channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater

than 125 mW.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set the spectrum analyzer: RBW >= 1% of the span (set 100 kHz). VBW >= RBW , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max,hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test result: Pass

Test Channel	Modulation	Carrier Frequencies Separated	Limit (25kHz or two- thirds of the 20 dB bandwidth)	PASS/FAIL
Middle Channels (channel 39 and channel 40)	GFSK	990kHz	25kHz/908kHz	PASS
Middle Channels (channel 39 and channel 40)	π/4DQPSK	960kHz	25kHz/908kHz	PASS
Middle Channels (channel 39 and channel 40)	8DPSK	985kHz	25kHz/908kHz	PASS




Report No.: SHEM120900130501

Page: 17 of 77

Result plot as follows:

Middle Channels


Modulation: GFSK

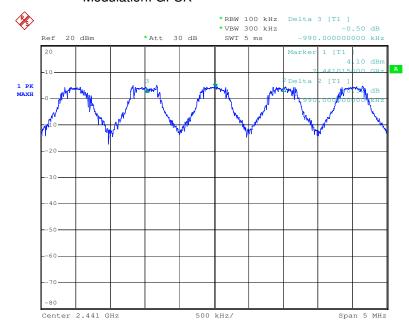

Date: 21.NOV.2012 13:09:19

Middle Channels

Modulation: π/4DQPSK

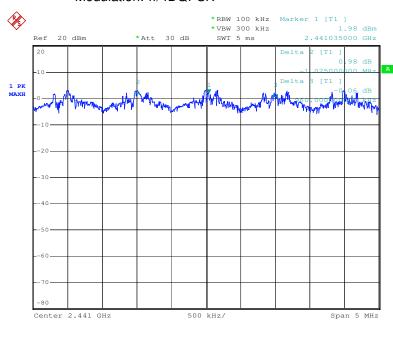


Date: 21.NOV.2012 13:07:17



Report No.: SHEM120900130501

Page: 18 of 77

Middle Channels

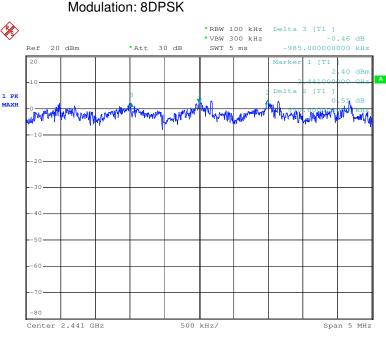

Date: 21.NOV.2012 13:11:39

Test result: The EUT does meet the FCC requirements.



Report No.: SHEM120900130501

Page: 19 of 77

6.5 Hopping Channel Number

Test Requirement: FCC Part15 C Section 15.247(a)(1)(iii)

RSS-210 Issue 8 Annex 8.1(d)

Test Method: ANSI C63.10:2009 Clause 7.7.3

Test Date: November 21, 2012

Requirements: Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-

2483.5 MHz band shall use at least 15 channels.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


 Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.

4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels. The EUT does meet the FCC requirements.

GFSK

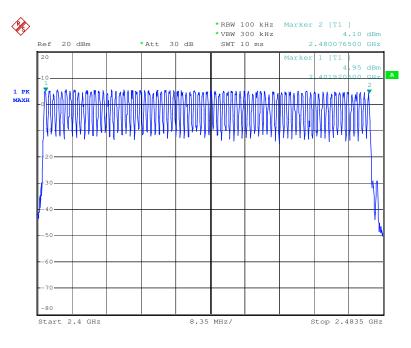


Date: 21.NOV.2012 12:53:38



Report No.: SHEM120900130501


Page: 20 of 77

π/4DQPSK

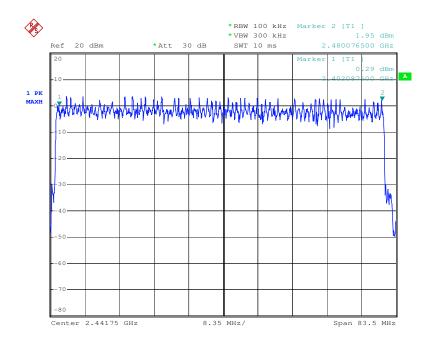

Date: 21.NOV.2012 12:55:38

8DPSK

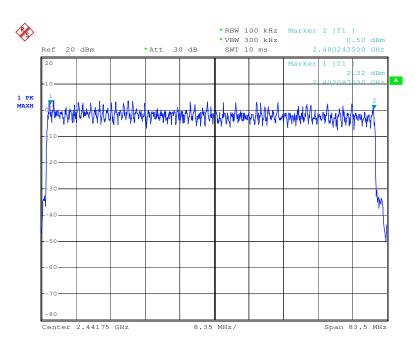

Date: 21.NOV.2012 12:57:32



Report No.: SHEM120900130501

Page: 21 of 77

6.6 Dwell Time

Test Requirement: FCC Part 15 C Section 15.247(a)(1)(iii)

RSS-210 Issue 8 Annex 8.1(d)

Test Method: ANSI C63.10:2009 Clause 7.7.3

Test Date: November 21, 2012

Test requirements: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the

2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are

used.

Test Status: Hopping transmitting with all kind of modulation.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set spectrum analyzer span = 0. centered on a hopping channel;

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

3. Use Emission width / No. of Hopping Channels in 31.6s to determine the dwell time.

Frequency (MHz)	Modulation	Packet	Emission Width (ms)	Number of Hopping Channel in 31.6s	Average Time of Occupancy(s)	Limit(s)	Result
		DH1	0.38	201	0.076	0.4	Pass
2441	GFSK	DH3	1.66	125	0.208	0.4	Pass
		DH5	2.92	90	0.263	0.4	Pass
		2DH1	0.40	211	0.084	0.4	Pass
2441	2441 π/4DQPSK	2DH3	1.66	140	0.232	0.4	Pass
		2DH5	2.92	88	0.257	0.4	Pass
		3DH1	0.40	164	0.066	0.4	Pass
2441	8DPSK	3DH3	1.64	123	0.202	0.4	Pass
		3DH5	2.92	102	0.298	0.4	Pass





Report No.: SHEM120900130501

Page: 22 of 77

Refer testing graph as below:



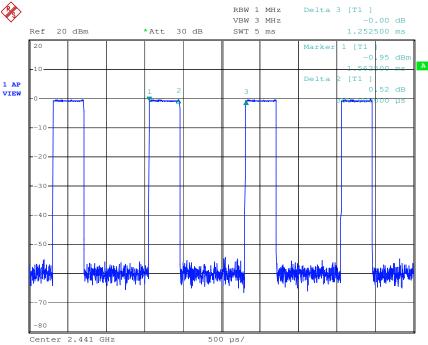

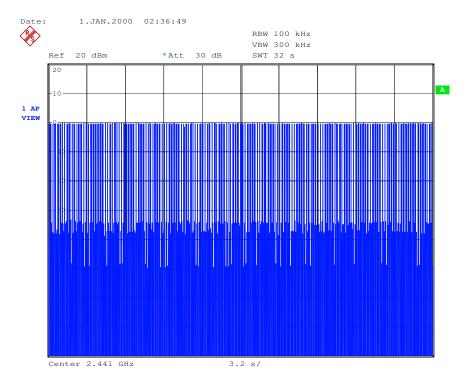

Date: 1.JAN.2000 04:28:57





Report No.: SHEM120900130501

Page: 23 of 77

Frequency 2441MHz:

Modulation: GFSK- DH3

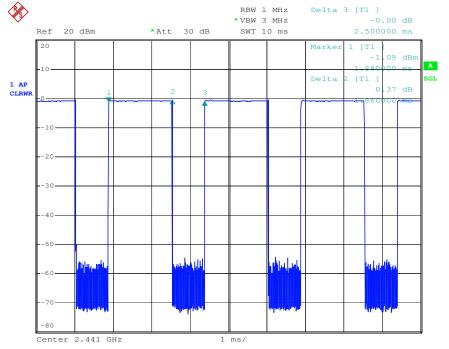

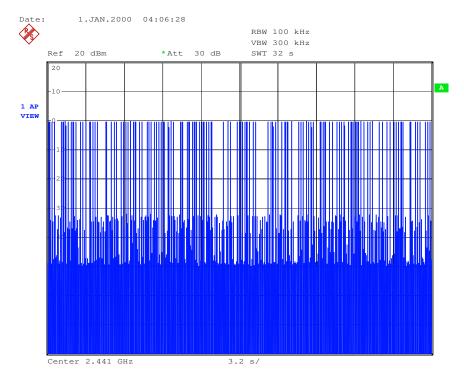


Date: 1.JAN.2000 04:32:40




Report No.: SHEM120900130501

Page: 24 of 77

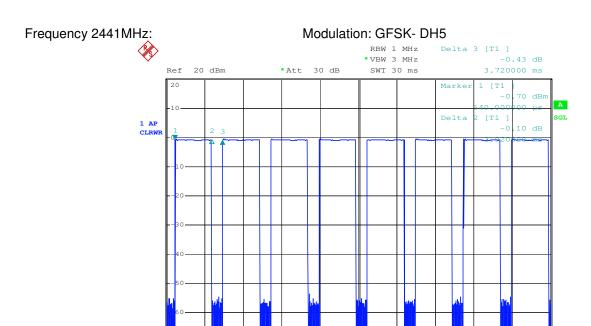



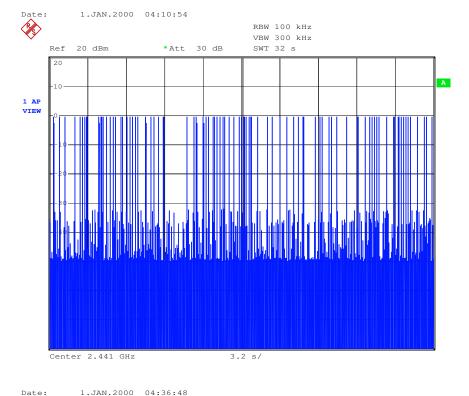

Date: 1.JAN.2000 04:36:48





Report No.: SHEM120900130501

Page: 25 of 77

Frequency 2441MHz:

Modulation: π/4DQPSK-2DH1

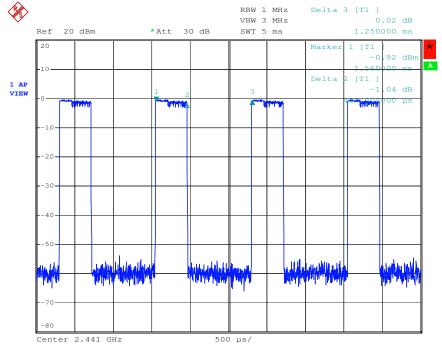

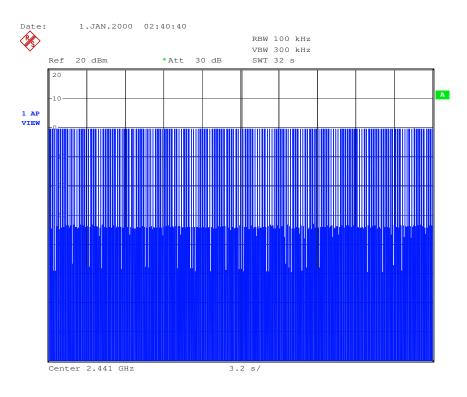

Date: 1.JAN.2000 04:42:31





Report No.: SHEM120900130501

Page: 26 of 77

Frequency 2441MHz:

Modulation: π/4DQPSK-2DH3

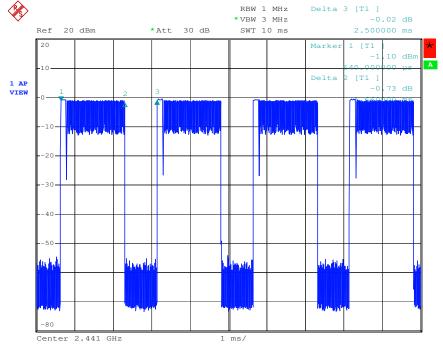

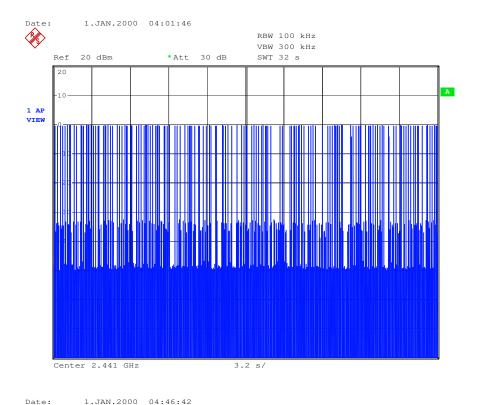



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM120900130501

Page: 27 of 77

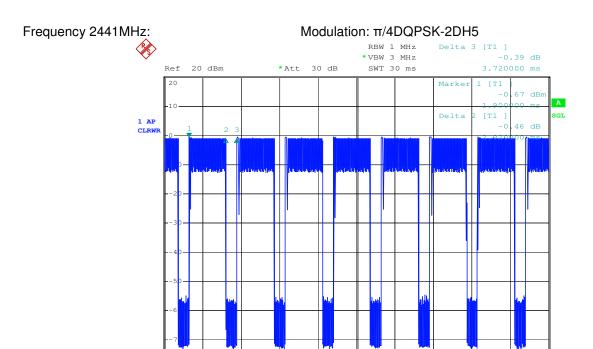

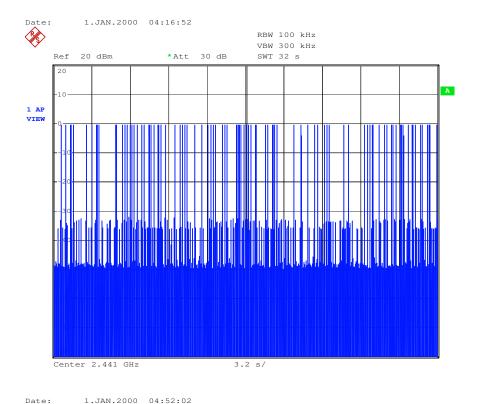

3 ms/

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document-htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test





Report No.: SHEM120900130501

Page: 28 of 77

Frequency 2441MHz:



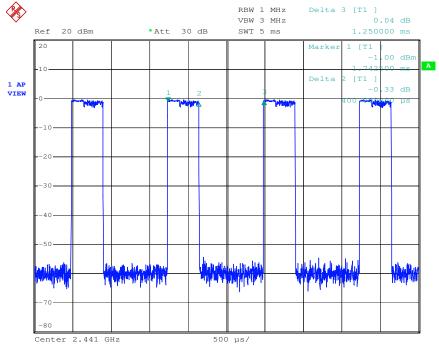

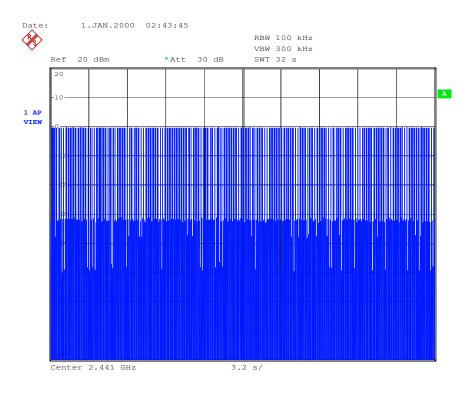


Date: 1.JAN.2000 05:33:30





Report No.: SHEM120900130501

Page: 29 of 77



Modulation: 8DPSK-3DH3

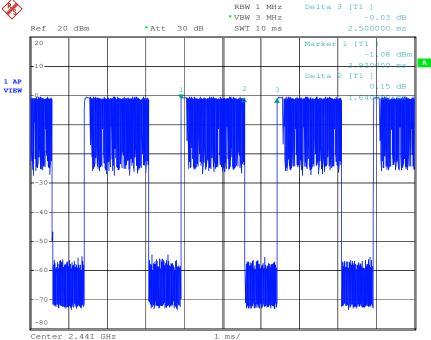

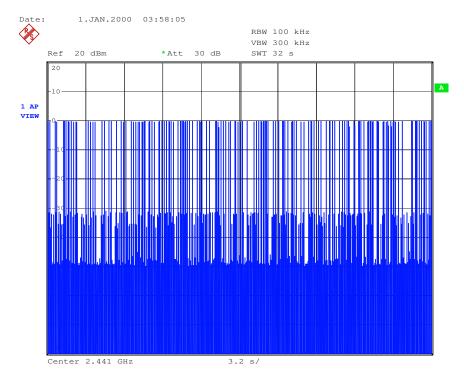


Date: 1.JAN.2000 05:37:01




Report No.: SHEM120900130501

Page: 30 of 77

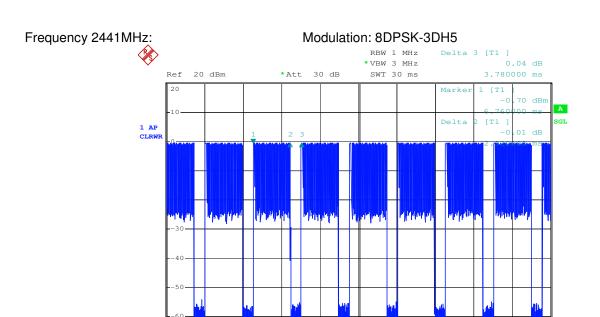



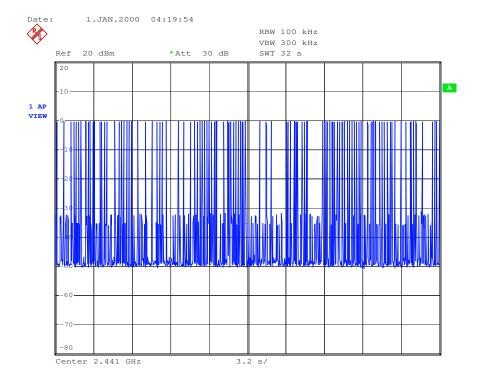

Date: 1.JAN.2000 06:02:02



Report No.: SHEM120900130501

Page: 31 of 77

6.7 Maximum Peak Output Power

Test Requirement: FCC Part 15.247 Section 15.247(b)(1)

RSS-210 Issue 8 Annex 8.4(2)

Test Method: ANSI C64.10:2009 Clause 6.10.1

Test Date: November 21, 2012

Test Limit: Regulation 15.247 (b)(1)For frequency hopping systems operating in

the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in


the 2400-2483.5 MHz band: 0.125 watts.

Refer to the result "Hopping channel number" of this document. The

0.125 watt (20.0dBm) limit applies.

Test mode: Test in fixing frequency transmitting mode.

Test Configuration:



Test Procedure:

- Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

Test Results record:

Test Channel	Modulation	Frequency Pow	Reading	Cable Loss (dB)	Output Power		Limit	Margin
			Power (dBm)		(dBm)	(mW)	(dBm)	(dB)
Lowest	GFSK	2402	6.24	0.5	6.74	4.72	30	23.26
Middle	GFSK	2441	5.48	0.5	5.98	3.96	30	24.02
Highest	GFSK	2480	5.09	0.5	5.59	3.62	30	24.41
Lowest	π/4DQPSK	2402	5.66	0.5	6.16	4.13	30	23.84
Middle	π/4DQPSK	2441	4.68	0.5	5.18	3.30	30	24.82



Report No.: SHEM120900130501


Page: 32 of 77

Highest	π/4DQPSK	2480	4.76	0.5	5.26	3.36	30	24.74
Lowest	8DPSK	2402	5.29	0.5	5.79	3.79	30	24.21
Middle	8DPSK	2441	4.83	0.5	5.33	3.41	30	24.67
Highest	8DPSK	2480	3.68	0.5	4.18	2.62	30	25.82

Test result plot as follows:

Low Channel

Modulation: GFSK

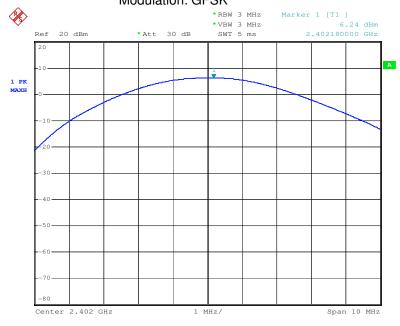

Date: 21.NOV.2012 09:30:37




Report No.: SHEM120900130501

Page: 33 of 77

Middle Channel




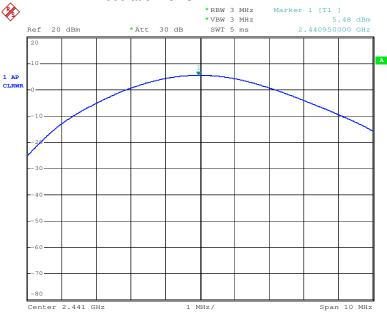

Date: 21.NOV.2012 09:44:54

High Channel

Modulation: GFSK

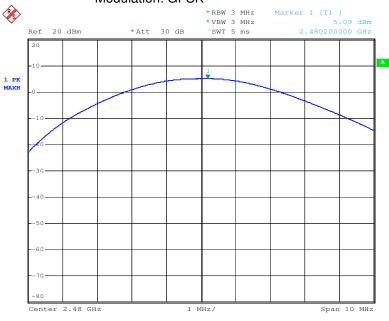


Date: 21.NOV.2012 09:52:22



Report No.: SHEM120900130501

Page: 34 of 77

Low Channel

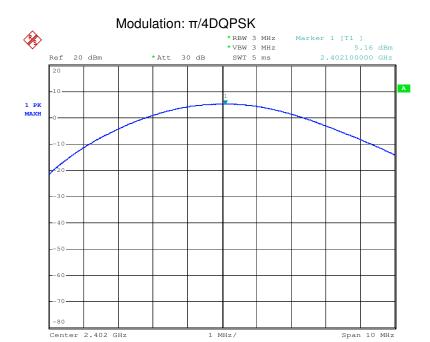

Date: 21.NOV.2012 09:32:52

Middle Channel

Date: 21.NOV.2012 09:42:12




Report No.: SHEM120900130501

Page: 35 of 77

Span 10 MHz

High Channel

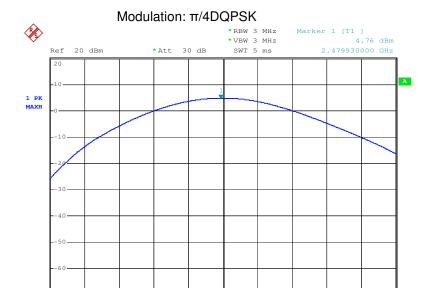

Date: 21.NOV.2012 09:46:52

Low Channel

#RBW 3 MHz | Marker 1 [T1] | *VBW 3 MHz | *VBW 3 MHz | 5.29 dBm | *Att 30 dB | SWT 5 ms | 2.402010000 GHz | *AMAKER | *AMAKER


Date: 21.NOV.2012 09:34:11



Report No.: SHEM120900130501

Page: 36 of 77

Middle Channel

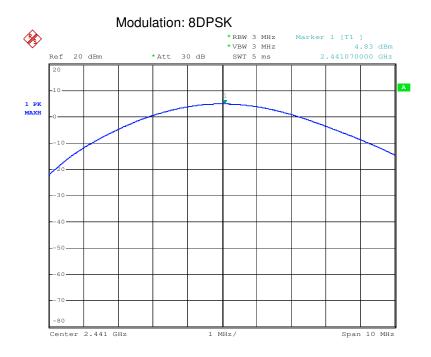

Date: 21.NOV.2012 09:41:18

High Channel

Date: 21.NOV.2012 09:50:48



Report No.: SHEM120900130501

Page: 37 of 77

6.8 RF Exposure Compliance Requirement

Please refer to the separate RF Exposure Evaluation Report SHEM120900130504.



Report No.: SHEM120900130501

Page: 38 of 77

6.9 Conducted Spurious Emissions

Test Requirement: FCC Part 15 Section 15.207 &15.247(d)

RSS-210 Issue 8 Annex 8.5

Test Method: ANSI C63.10:2009 Clause 7.7.10

Test Date: November 21, 2012

Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the

spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. based on either an RF

conducted or a radiated measurement. provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Status: Test the lowest. Middle, highest channel.

Remark: GFSK Modulation mode is the worst case (base on the 6.1 section

Effective Isotrapically Radiated Power test result in this report, GFSK

modulation is the worst case).

Test Configuration:



Test Procedure: 1. Remove the antenna from the EUT and then connect a low RF cable from

the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 100KHz. VBW >= 3RBW (set 300KHz).

Sweep = auto; Detector Function = Peak (Max. hold).


Test result The EUT does meet the FCC requirements.




Report No.: SHEM120900130501

Page: 39 of 77

Test plot as follows:

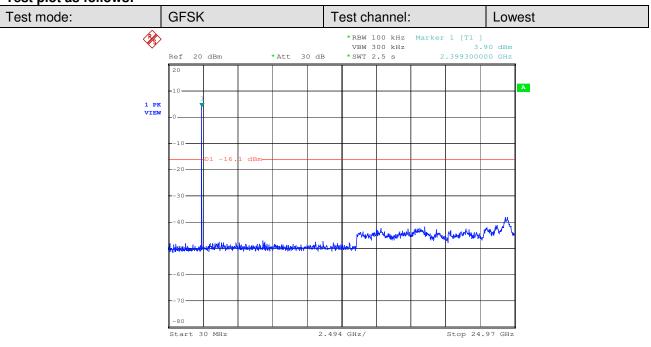

Date: 7.FEB.2013 12:07:21

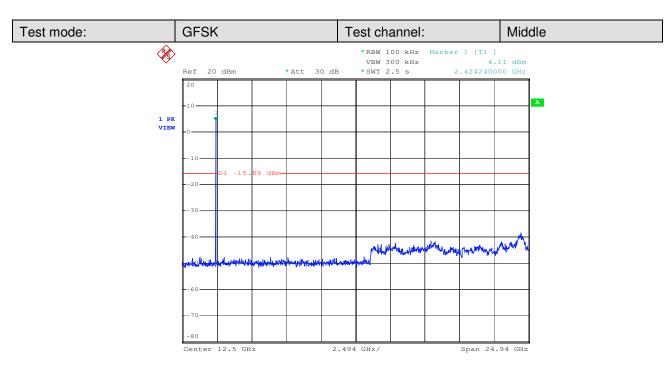


Date: 7.FEB.2013 12:09:35




Report No.: SHEM120900130501

Page: 40 of 77

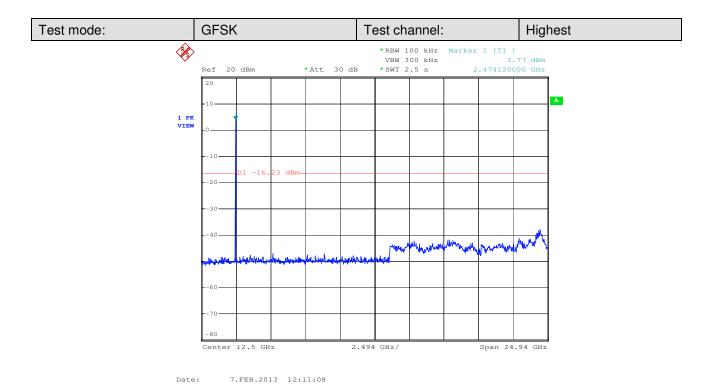



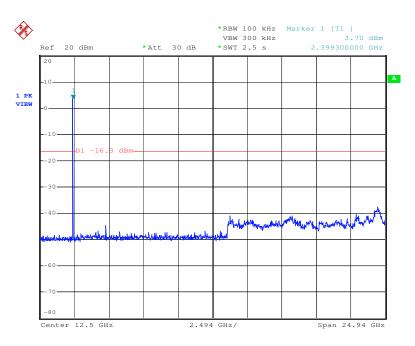



Date: 7.FEB.2013 12:44:55



Report No.: SHEM120900130501

Page: 41 of 77

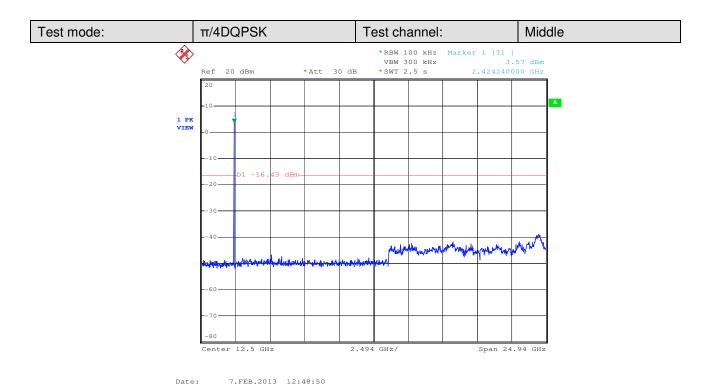

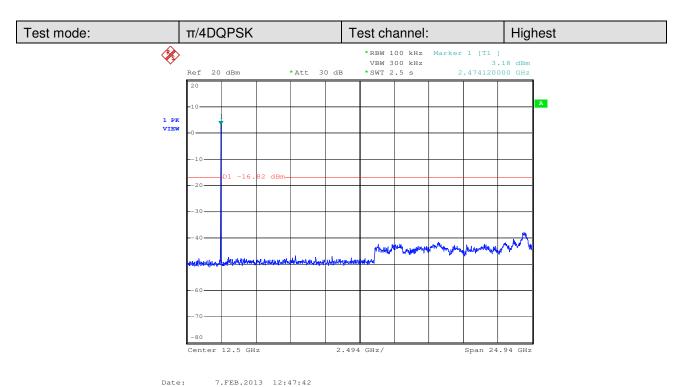


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM120900130501

Page: 42 of 77

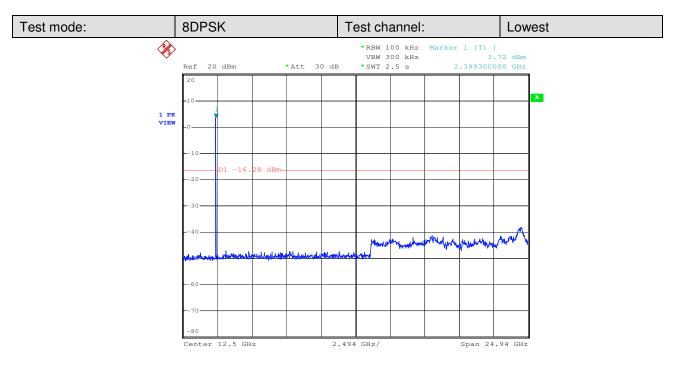



report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

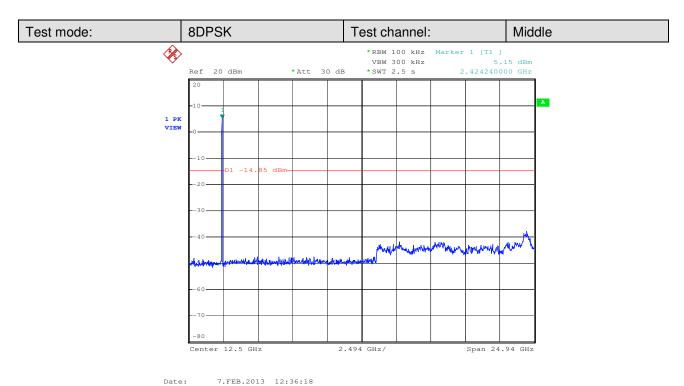


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM120900130501

Page: 43 of 77

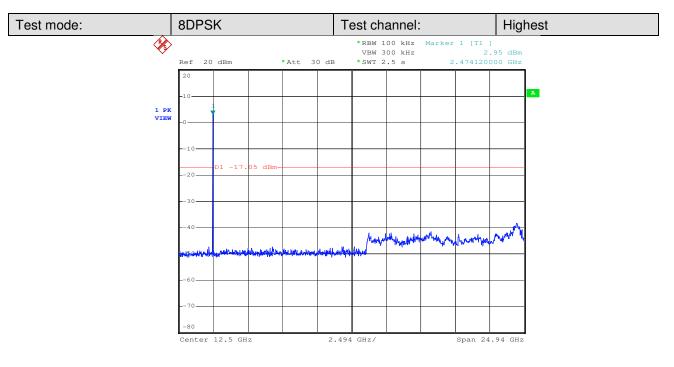



Report No.: SHEM120900130501

Page: 44 of 77

6.10 Radiated Spurious Emissions

Test Requirement: FCC Part 15 Section 15.209 &15.247(d)

RSS-210 Issue 8 Annex 8.5

Test Method: ANSI C63.10:2009 Clause 6.12

Test Date: December 25,2012

Test Status: Test the lowest. Middle, highest channel with charger or only battery.

Remark: GFSK Modulation mode is the worst case (base on the 6.1 section

Effective Isotrapically Radiated Power test result in this report, GFSK

modulation is the worst case).

Test site/setup: Measurement Distance: 3m (Semi-Anechoic Chamber)

Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector

applies (30 MHz - 1000 MHz).

For PK value:

RBW = 1 MHz for $f \ge 1$ GHz VBW \ge RBW; Sweep = auto Detector function = peak

Trace = max hold For AV value:

RBW = 1 MHz for $f \ge 1$ GHz VBW =10Hz; Sweep = auto Detector function = peak

Trace = max hold

Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal

15.209 Limit: 40.0 dB μ V/m between 30MHz & 88MHz

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

 $43.5 \text{ dB}\mu\text{V/m}$ between 88MHz & 216MHz

46.0 dBµV/m between 216MHz & 960MHz

54.0 dBµV/m above 960MHz

15.247(d) limit: (d) In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with

the peak conducted power limits.



Report No.: SHEM120900130501

Page: 45 of 77

Test Configuration:

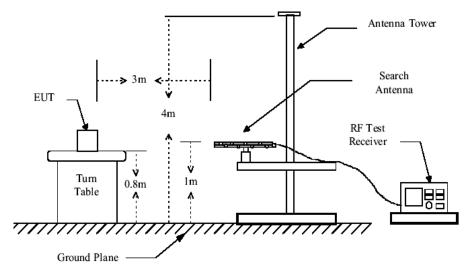


Figure 1. 30MHz to 1GHz radiated emissions test configuration

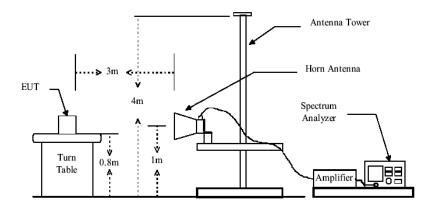


Figure 2. Above 1GHz radiated emissions test configuration

Test Procedure:

The procedure used was ANSI Standard C63.10:2009. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Low nosie amplifier was used below 1GHz, High pass Filter was used above 3GHz. Between 1G and 3GHz, we did not use any amplifier or filter.

Pre-test was performed on GFSK and EDR mode, Compliance test was performed on worse case (GFSK mode).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM120900130501

Page: 46 of 77

1) For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test Results:


The EUT does meet the FCC requirements.

GFSK mode test data as follows:

30MHz~1GHz Spurious Emission, Quasi-Peak Measurement

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Horizontal

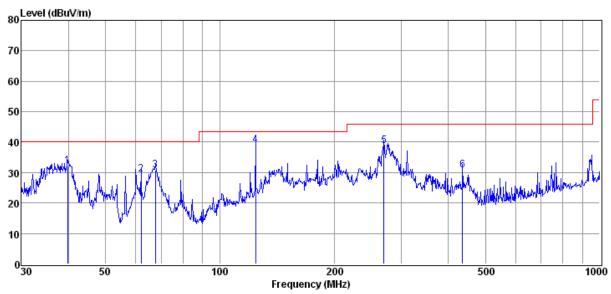

Freq	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
39.72	43.07	13.25	24.70	0.56	32.18	40.00	-7.82	QP	HORIZONTAL
62.00	41.44	11.92	24.70	0.74	29.40	40.00	-10.60	QP	HORIZONTAL
67.68	43.45	11.13	24.70	0.78	30.66	40.00	-9.34	QP	HORIZONTAL
124.13	51.14	11.37	24.70	1.16	38.97	43.50	-4.53	QP	HORIZONTAL
270.38	49.91	11.48	24.50	1.82	38.71	46.00	-7.29	QP	HORIZONTAL
435.59	37.09	15.74	24.40	2.40	30.83	46.00	-15.17	QP	HORIZONTAL




Report No.: SHEM120900130501

Page: 47 of 77



Vertical

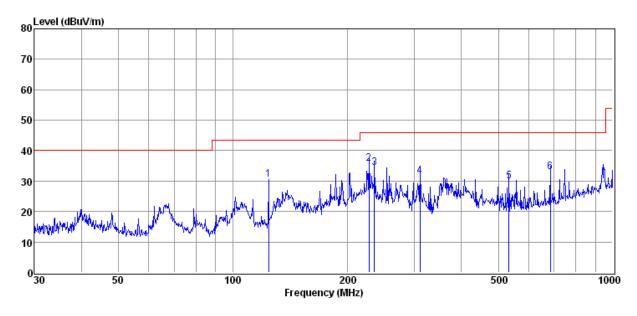

Freq	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
124.13	43.66	10.37	24.70	1.16	30.49	43.50	-13.01	QP	VERTICAL
228.49	49.49	9.27	24.60	1.63	35.79	46.00	-10.21	QP	VERTICAL
235.82	47.26	9.94	24.54	1.67	34.33	46.00	-11.67	QP	VERTICAL
311.09	41.33	12.71	24.50	1.99	31.53	46.00	-14.47	QP	VERTICAL
533.83	34.28	17.38	24.30	2.71	30.07	46.00	-15.93	QP	VERTICAL
684.75	33.76	20.22	24.10	3.09	32.97	46.00	-13.03	QP	VERTICAL



Report No.: SHEM120900130501

Page: 48 of 77

1~25 GHz Harmonics & Spurious Emissions, , Peak & Average Measurement

Test in Channel Low in transmitting status- Vertical polarization

Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4803.75	30.8	1.2	0.5	43.4	65.43	54.53	74.0
7207.50	36.0	1.7	0.8	43.1	59.32	54.72	74.0
9609.31	37.8	2.2	0.9	43.9	54.73	51.73	74.0

Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4803.75	30.8	1.2	0.5	43.4	55.57	44.67	54.0
7207.50	36.0	1.7	0.8	43.1	46.65	42.05	54.0
9609.31	37.8	2.2	0.9	43.9	42.36	39.36	54.0

Remark: No other radiation has been found.

Test in Channel Low in transmitting status- Horizontal polarization

Peak Measurement

i can meast	31 01110110						
Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)
4803.75	30.8	1.2	0.5	43.4	61.79	50.89	74.0
7207.50	36.0	1.7	0.8	43.1	59.37	54.77	74.0
9609.31	37.8	2.2	0.9	43.9	54.07	51.07	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(d B)	Filter (dB)	Preamp (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4803.75	30.8	1.2	0.5	43.4	50.95	40.05	54.0
7207.50	36.0	1.7	0.8	43.1	47.20	42.60	54.0
9609.31	37.8	2.2	0.9	43.9	42.76	39.76	54.0

Remark: No other radiation has been found.



Report No.: SHEM120900130501

Page: 49 of 77

Test in Channel Middle in transmitting status- Vertical polarization

Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)
4882.50	30.8	1.2	0.5	43.4	58.51	47.61	74.0
7323.75	36.0	1.7	0.8	43.1	55.26	50.66	74.0
9765.38	37.8	2.2	0.9	43.9	51.29	48.29	74.0

Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4882.50	30.8	1.2	0.5	43.4	47.27	36.37	54.0
7323.75	36.0	1.7	0.8	43.1	47.15	42.55	54.0
9765.38	37.8	2.2	0.9	43.9	35.46	32.46	54.0

Remark: No other radiation has been found.

Test in Channel Middle in transmitting status- Horizontal polarization

Peak Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dΒμV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4882.50	30.8	1.2	0.5	43.4	65.67	54.77	74.0
7323.75	36.0	1.7	0.8	43.1	63.33	58.73	74.0
9765.38	37.8	2.2	0.9	43.9	55.10	52.10	74.0

Average Measurement

Frequency (MHz)	Antenna factors(dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)
4882.50	30.8	1.2	0.5	43.4	54.24	43.34	54.0
7323.75	36.0	1.7	0.8	43.1	54.28	49.68	54.0
9765.38	37.8	2.2	0.9	43.9	43.13	40.13	54.0

Remark: No other radiation has been found.



Report No.: SHEM120900130501

Page: 50 of 77

Test in Channel High in transmitting status- Vertical polarization

Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dΒμV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4957.50	30.8	1.2	0.5	43.4	58.46	47.56	74.0
7440.00	36.0	1.7	0.8	43.1	65.24	60.64	74.0
9918.74	37.8	2.2	0.9	43.9	54.47	51.47	74.0

Average Measurement.

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)
4957.50	30.8	1.2	0.5	43.4	47.19	36.29	54.0
7440.00	36.0	1.7	0.8	43.1	56.82	52.22	54.0
9918.74	37.8	2.2	0.9	43.9	41.62	38.62	54.0

Remark: No other radiation has been found.

Test in Channel High in transmitting status- Horizontal polarization

Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)
4957.50	30.8	1.2	0.5	43.4	62.27	51.37	74.0
7440.00	36.0	1.7	0.8	43.1	64.68	60.08	74.0
9918.74	37.8	2.2	0.9	43.9	54.69	51.69	74.0

Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Filter (dB)	Preamp factor(dB)	Emission Reading (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)
4957.50	30.8	1.2	0.5	43.4	51.19	40.29	54.0
7440.00	36.0	1.7	0.8	43.1	57.32	52.72	54.0
9918.74	37.8	2.2	0.9	43.9	41.83	38.83	54.0

Remark: No other radiation has been found.



Report No.: SHEM120900130501

Page: 51 of 77

Test Level =Receiver Reading + Antenna Factor + Cable Factor+ Filter -Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.



Test Requirement:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM120900130501

Page: 52 of 77

6.10.1 Radiated Emissions which fall in the restricted bands

Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section

15.205(c)).

Test Method: ANSI 63.10:2009 Clause 6.12

Test Date: December 13, 2012

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dB μ V/m between 30MHz & 88MHz;

43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz;

54.0 dBµV/m above 960MHz.

Detector: For PK value:

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

RBW = 1 MHz for $f \ge 1$ GHz VBW \ge RBW; Sweep = auto Detector function = peak

Trace = max hold For AV value:

RBW = 1 MHz for f ≥ 1 GHz VBW =10Hz; Sweep = auto Detector function = peak

Trace = max hold

According to section,15.35(b) for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Test Result: The EUT does meet the FCC requirements.




Report No.: SHEM120900130501

Page: 53 of 77

Measurement Result:
CH Low 2412MHz Radiated Bandedge

Modulation: GFSK

Horizontal, Peak Detector:

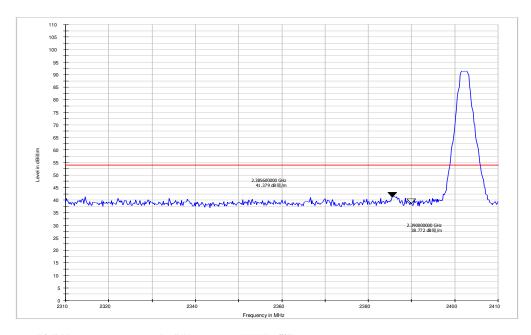


F	requency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
	2385.60	51.78	27.28	42.50	4.82	41.38	54.00	12.62



Report No.: SHEM120900130501

Page: 54 of 77

Vertical, Peak Detector:

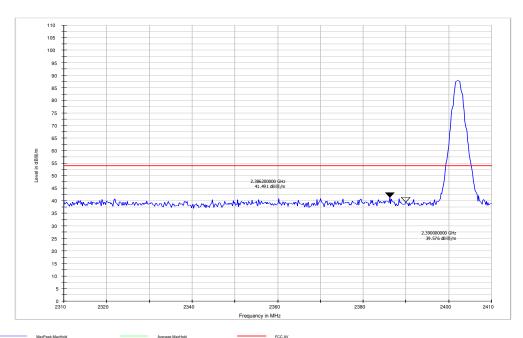

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2386.2	51.89	27.28	42.5	4.82	41.49	54	12.51




Report No.: SHEM120900130501

Page: 55 of 77

CH Low 2480MHz Radiated Bandedge Horizontal, Peak Detector:



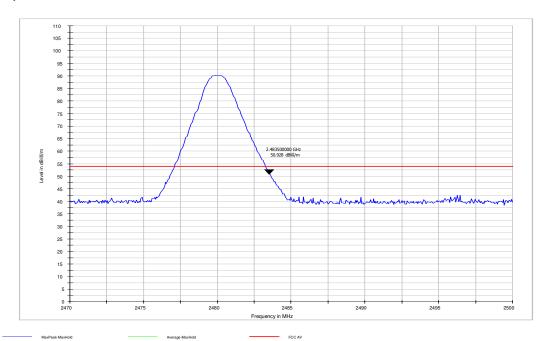


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.50	61.17	27.48	42.54	4.82	50.93	54	3.07



Report No.: SHEM120900130501

Page: 56 of 77

Vertical, Peak Detector:

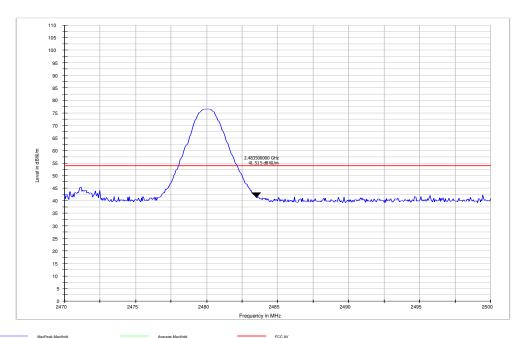


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.50	51.76	27.48	42.54	4.82	41.52	54	12.48



Report No.: SHEM120900130501

Page: 57 of 77

CH Low 2412MHz Radiated Bandedge Horizontal, Peak Detector:

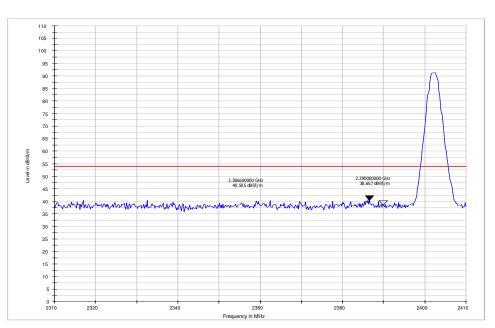

Modulation: π/4DQPSK


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2386.60	50.91	27.28	42.5	4.82	40.51	54	13.49



Report No.: SHEM120900130501

Page: 58 of 77

Vertical, Peak Detector:

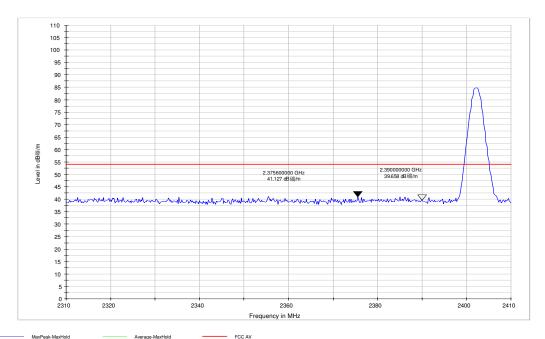


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2390.0	51.53	27.28	42.5	4.82	41.13	54	12.87



Report No.: SHEM120900130501

Page: 59 of 77

CH Low 2480MHz Radiated Bandedge Horizontal, Peak Detector:

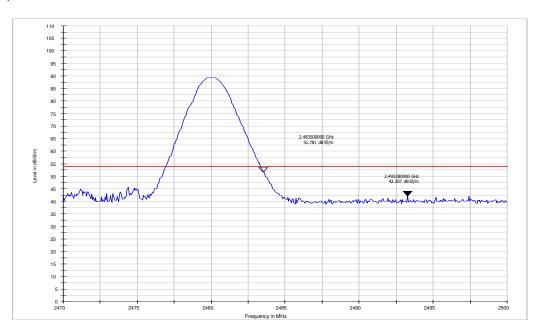

Modulation: π/4DQPSK


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.50	62.02	27.48	42.54	4.82	51.78	54	2.22



Report No.: SHEM120900130501

Page: 60 of 77

Vertical, Peak Detector:

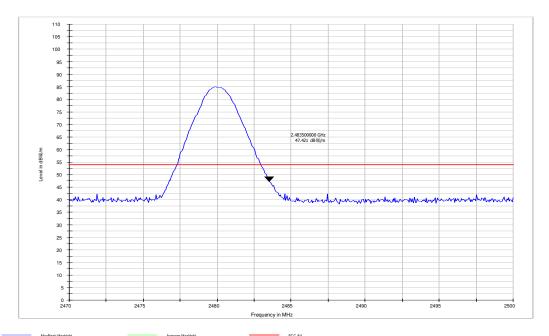

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.50	57.66	27.48	42.54	4.82	47.42	54	6.58




Report No.: SHEM120900130501

Page: 61 of 77

CH Low 2412MHz Radiated Bandedge Horizontal, Peak Detector:



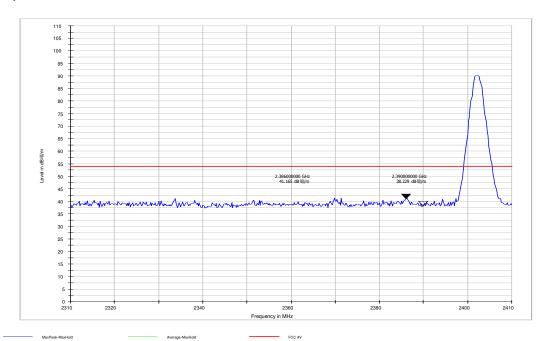


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2390.0	51.57	27.28	42.5	4.82	41.17	54	12.83



Report No.: SHEM120900130501

Page: 62 of 77

Vertical, Peak Detector:

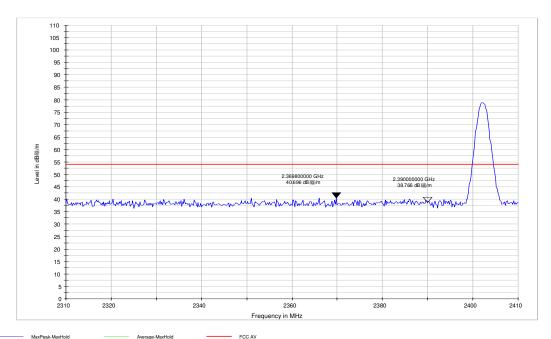

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2390	49.17	27.28	42.5	4.82	38.77	54	15.23




Report No.: SHEM120900130501

Page: 63 of 77

CH Low 2480MHz Radiated Bandedge Horizontal, Peak Detector:



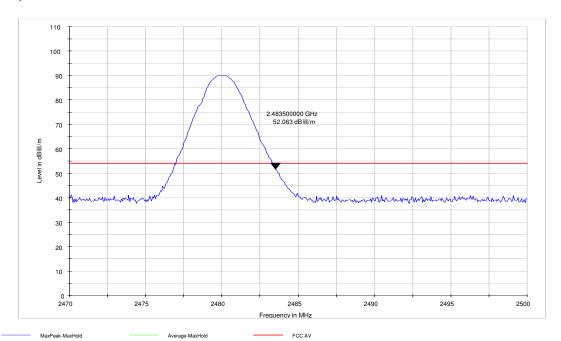


Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.5	62.3	27.48	42.54	4.82	52.06	54	1.94



Report No.: SHEM120900130501

Page: 64 of 77

Vertical, Peak Detector:

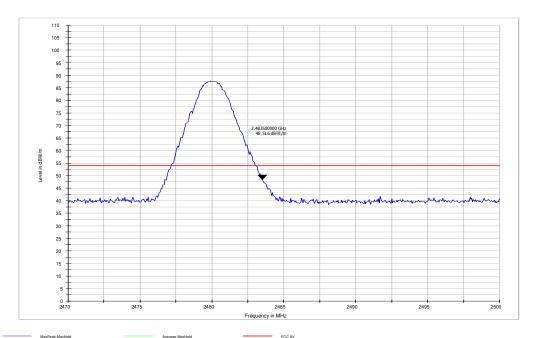

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.5	58.76	27.48	42.54	4.82	48.52	54	5.48

Remark: No any other emission which fall in restricted bands can be detected and be reported.

Test Level = Receiver Reading + Antenna Factor + Cable Factor- Preamplifier Factor

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.



Report No.: SHEM120900130501

Page: 65 of 77

Except as shown in paragraph of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		



Report No.: SHEM120900130501

Page: 66 of 77

6.11 Band Edges Requirement

Test Requirement: FCC Part 15 C Section 15.247 (d) & 15.205

RSS-Gen Issue 3 Clause 7.2.2

Test Method: Based on ANSI 63.10 Clause 6.9

Operation within the band 2400M – 2483.5 MHz

Test Date: November 21,2012

Requirements: Section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in

which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified

in Section 15.209(a) (see Section 15.205(c)).

Method of Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 kHz bandwidth from band

edge. The band edges was measured and recorded.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Result: The EUT does meet the FCC requirements.

The graph as below. Represents the emissions take for this device.

Test results: The EUT does meet the FCC requirements.




Report No.: SHEM120900130501

Page: 67 of 77

Low Channel


Test Status: GFSK- Static

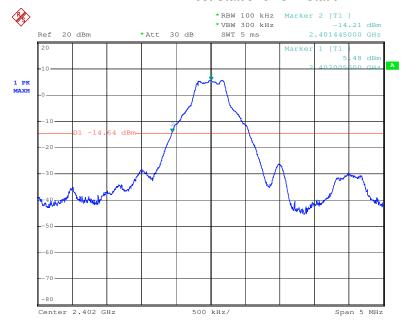

Date: 21.NOV.2012 14:46:08

High Channel

Test Status: GFSK- Static

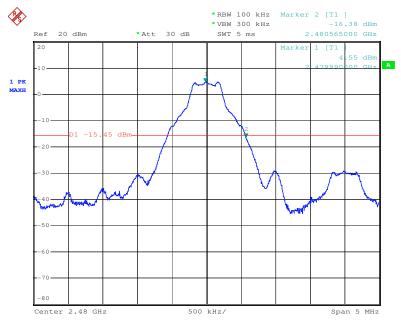

Date: 21.NOV.2012 14:47:23




Report No.: SHEM120900130501

Page: 68 of 77

Low Channel

Test Status: GFSK- Hopping

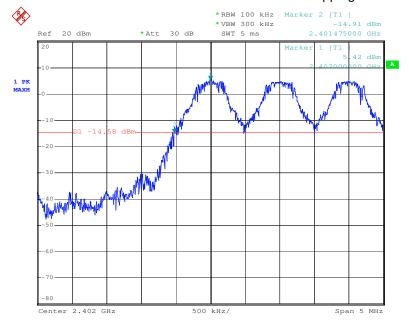

Date: 21.NOV.2012 14:50:42

High Channel

Test Status: GFSK- Hopping



Date: 21.NOV.2012 14:49:08




Report No.: SHEM120900130501

Page: 69 of 77

Low Channel


Test Status: π/4DQPSK - Static

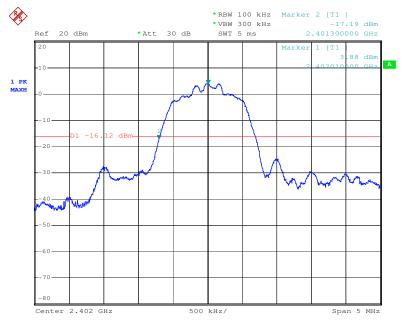

Date: 21.NOV.2012 14:39:05

High Channel

Test Status: π/4DQPSK - Static

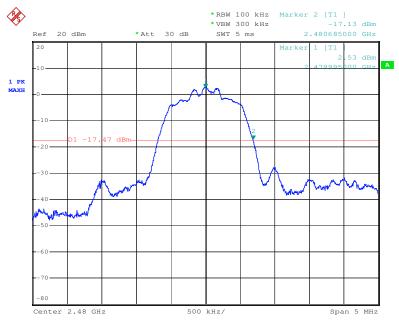

Date: 21.NOV.2012 14:40:07




Report No.: SHEM120900130501

Page: 70 of 77

Low Channel


Test Status: π/4DQPSK - Hopping

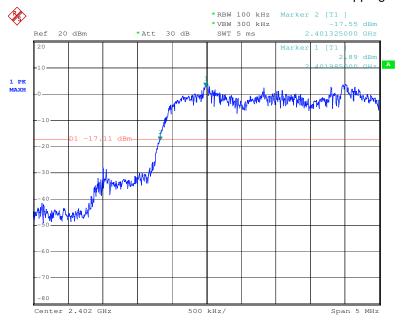

Date: 21.NOV.2012 14:44:21

High Channel

Test Status: π/4DQPSK - Hopping

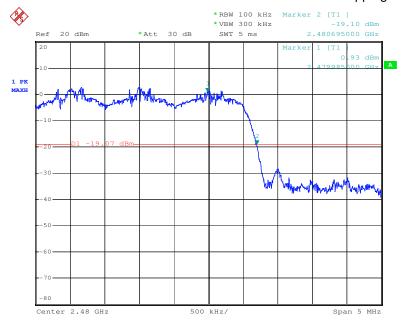

Date: 21.NOV.2012 14:36:46



Report No.: SHEM120900130501

Page: 71 of 77

Low Channel


Test Status: 8DPSK - Static



Date: 21.NOV.2012 14:22:59

High Channel

Test Status: 8DPSK - Static

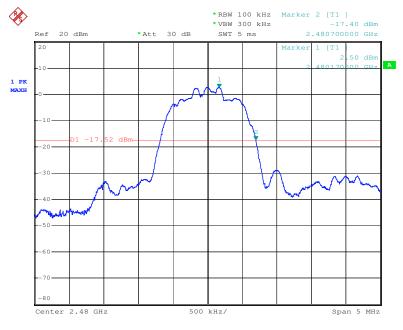

Date: 21.NOV.2012 14:30:29



Report No.: SHEM120900130501

Page: 72 of 77

Low Channel


Test Status: 8DPSK - Hopping



Date: 21.NOV.2012 14:28:16

High Channel

Test Status: 8DPSK - Hopping

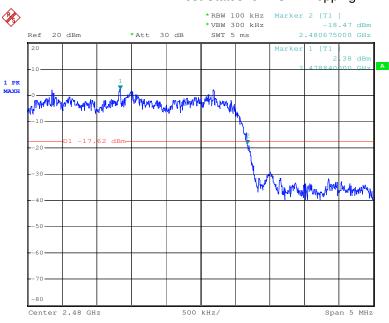

Date: 21.NOV.2012 14:32:21



Report No.: SHEM120900130501

Page: 73 of 77

6.12 Conducted Emission Test

Test Requirement: FCC Part15 15.207 **Test date:** October. 30, 2012

Standard Applicable According to section 15.207, frequency 150KHz to 30MHz shall not

not exceed the limit table as blew.

Frequency of Emission (MHz)	Conducted Limit (dBuV)			
	Quasi-peak	Average		
0.15-0.5	66 to 56 *	56 to 46 *		
0.5-5	56	46		
5-30	60	50		

EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10-2009.
- 2. EUT is charged with PC. The AC Power adaptor of PC was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The LISN was connected with 120V AC/60Hz power source.

Measurement Result

Operation mode: Transmitter conducted to Receiver by BT

wireless mode.


Note: All test modes have been tested, below show the worst plots.



Report No.: SHEM120900130501

Page: 74 of 77

L line:

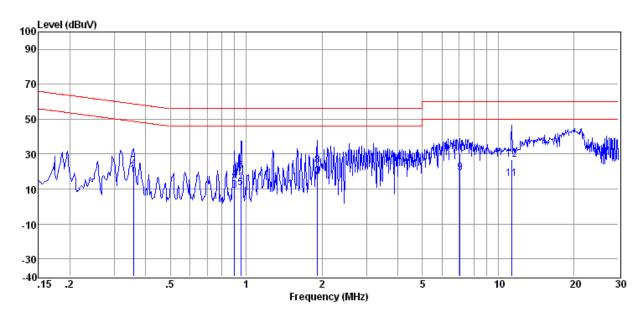


Freq	Read	LISN	Cabl	Level	Limit	Over	Detector	Phase
	Level	Factor	е		Line	Limit		
			Loss					
(MHz)	(dBµV)	(dB)	(dB)	(dBµV)	(dBμV)	(dB)		
0.358	17.83	0.15	0.10	18.08	48.78	-30.70	Average	LINE
0.358	22.64	0.15	0.10	22.89	58.78	-35.89	QP	LINE
0.899	8.61	0.20	0.10	8.91	46.00	-37.09	Average	LINE
0.899	14.89	0.20	0.10	15.19	56.00	-40.81	QP	LINE
0.953	10.22	0.20	0.10	10.52	46.00	-35.48	Average	LINE
0.953	19.81	0.20	0.10	20.11	56.00	-35.89	QP	LINE
1.918	16.26	0.29	0.10	16.65	46.00	-29.35	Average	LINE
1.918	23.33	0.29	0.10	23.72	56.00	-32.28	QP	LINE
7.062	18.67	0.31	0.20	19.18	50.00	-30.82	Average	LINE
7.062	29.82	0.31	0.20	30.33	60.00	-29.67	QP	LINE
11.317	14.88	0.60	0.10	15.58	50.00	-34.42	Average	LINE
11.317	26.23	0.60	0.10	26.93	60.00	-33.07	QP	LINE



Report No.: SHEM120900130501

Page: 75 of 77

N Line:

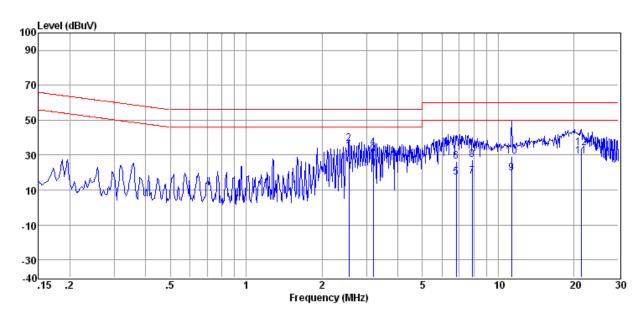

Freq	Read	LISN	Cabl	Level	Limit	Over	Detector	Phase
	Level	Factor	е		Line	Limit		
			Loss					
(MHz)	(dBµV)	(dB)	(dB)	(dBµV)	(dBμV)	(dB)		
2.554	31.75	0.30	0.12	32.17	46.00	-13.83	Average	NEUTRAL
2.554	36.20	0.30	0.12	36.62	56.00	-19.38	QP	NEUTRAL
3.190	29.76	0.30	0.14	30.20	46.00	-15.80	Average	NEUTRAL
3.190	33.55	0.30	0.14	33.99	56.00	-22.01	QP	NEUTRAL
6.805	16.82	0.30	0.20	17.32	50.00	-32.68	Average	NEUTRAL
6.805	26.01	0.30	0.20	26.51	60.00	-33.49	QP	NEUTRAL
7.893	17.09	0.39	0.17	17.65	50.00	-32.35	Average	NEUTRAL
7.893	26.71	0.39	0.17	27.27	60.00	-32.73	QP	NEUTRAL
11.317	18.81	0.60	0.10	19.51	50.00	-30.49	Average	NEUTRAL
11.317	28.72	0.60	0.10	29.42	60.00	-30.58	QP	NEUTRAL
21.372	28.37	0.65	0.20	29.22	50.00	-20.78	Average	NEUTRAL
21.372	33.15	0.65	0.20	34.00	60.00	-26.00	QP	NEUTRAL



Report No.: SHEM120900130501

Page: 76 of 77

7 Test Setup Photographs

Refer to the Appendix < Test Photos >.

8 EUT Constructional Details

Refer to the Appendix < External Photos > & < Internal Photos >.

End of Report