


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	57%
Test Engineer	Lucke Hsieh	Configurations	2.4G + 5G

Horizontal

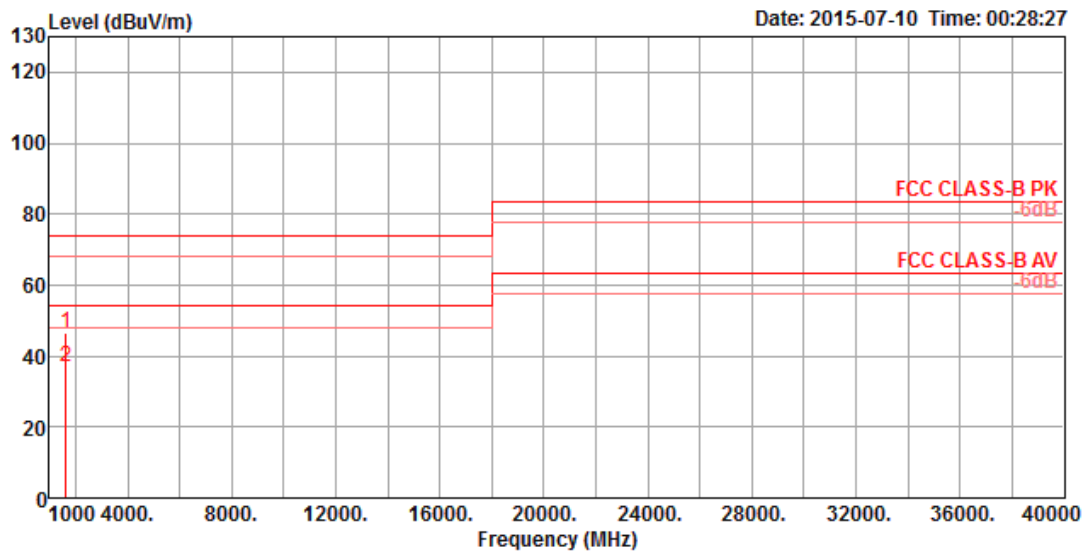

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	1619.90	46.31	74.00	-27.69	52.65	4.00	35.83	25.49	HORIZONTAL	293	100	Peak
2	1620.99	37.15	54.00	-16.85	43.49	4.00	35.83	25.49	HORIZONTAL	293	100	Average

Vertical

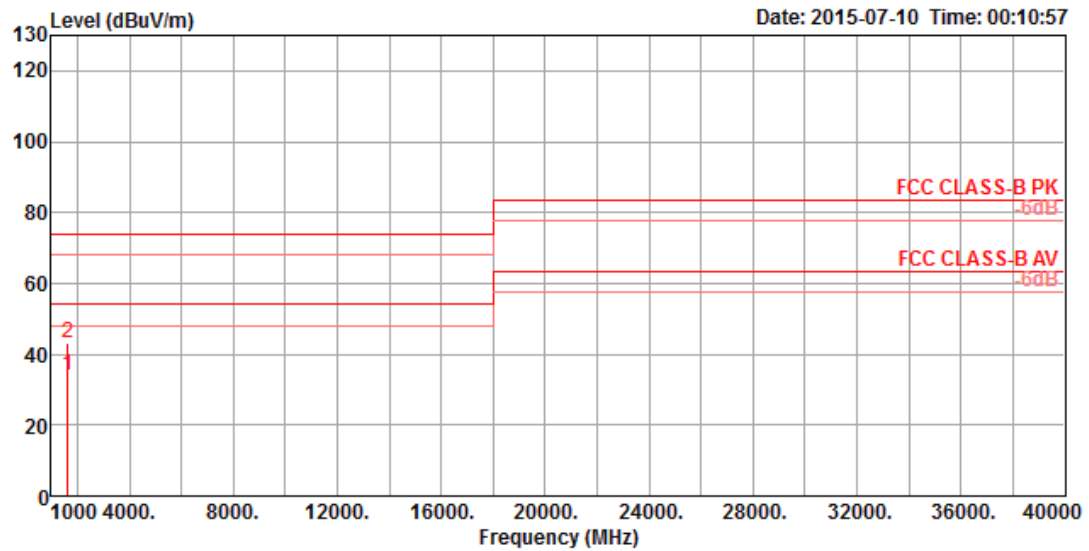

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	1619.97	34.16	54.00	-19.84	40.50	4.00	35.83	25.49	VERTICAL	80	100	Average
2	1620.10	43.24	74.00	-30.76	49.58	4.00	35.83	25.49	VERTICAL	80	100	Peak