



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	CyberTAN Technology, Inc.
Applicant Address	No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan
FCC ID	N89-ISB7105W
Manufacturer's company	CyberTAN Technology, Inc.
Manufacturer Address	No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan

Product Name	Internet Protocol Set Top Box Basic SD/HD with WiFi
Brand Name	Cisco
Model No.	ISB7105W
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	5725 ~ 5850MHz
Received Date	Sep. 11, 2013
Final Test Date	Nov. 27, 2013
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Multiple List.....	7
3.8. Table for Supporting Units	7
3.9. Table for Parameters of Test Software Setting	8
3.10. EUT Operation during Test	8
3.11. Duty Cycle	9
3.12. Test Configurations	11
4. TEST RESULT	13
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	19
4.3. Power Spectral Density Measurement	22
4.4. 6dB Spectrum Bandwidth Measurement	30
4.5. Radiated Emissions Measurement	35
4.6. Emissions Measurement	54
4.7. Antenna Requirements	67
5. LIST OF MEASURING EQUIPMENTS	68
6. TEST LOCATION.....	70
7. MEASUREMENT UNCERTAINTY.....	71
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O0812-01AA	Rev. 01	Initial issue of report	Dec. 25, 2013

1. CERTIFICATE OF COMPLIANCE

Product Name : Internet Protocol Set Top Box Basic SD/HD with WIFI
Brand Name : Cisco
Model No. : ISB7105W
Applicant : CyberTAN Technology, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 11, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

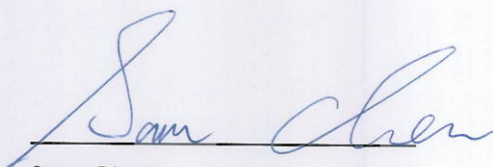

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.11 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	5.26 dB
4.3	15.247(e)	Power Spectral Density	Complies	7.98 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.13 dB
4.6	15.247(d)	Band Edge Emissions	Complies	-
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5725 ~ 5850MHz
Channel Number	5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	Test Mode: Mode 1. EUT 1 MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.48 MHz Test Mode: Mode 2. EUT 2 MCS0 (20MHz): 16.88 MHz ; MCS0 (40MHz): 36.64 MHz
Maximum Conducted Output Power	Test Mode: Mode 1. EUT 1 MCS0 (20MHz): 24.56 dBm ; MCS0 (40MHz): 24.15 dBm Test Mode: Mode 2. EUT 2 MCS0 (20MHz): 24.74 dBm ; MCS0 (40MHz): 24.48 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model No.	Rating
Adapter	LITEON	PB-1240-6SA1	Input: 100-120Vac, 0.6A, 50/60Hz Output: 12Vdc, 2.0A, 24W


3.3. Table for Filed Antenna

For EUT 1

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB Antenna	I-PEX	3.6
2	-	-	PCB Antenna	I-PEX	3.9
3	-	-	PCB Antenna	I-PEX	4.5
4	-	-	PCB Antenna	I-PEX	3.7

Note: The EUT has four antennas.

Ant. 1 and Ant. 2 could transmit simultaneously, but Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could receive simultaneously.

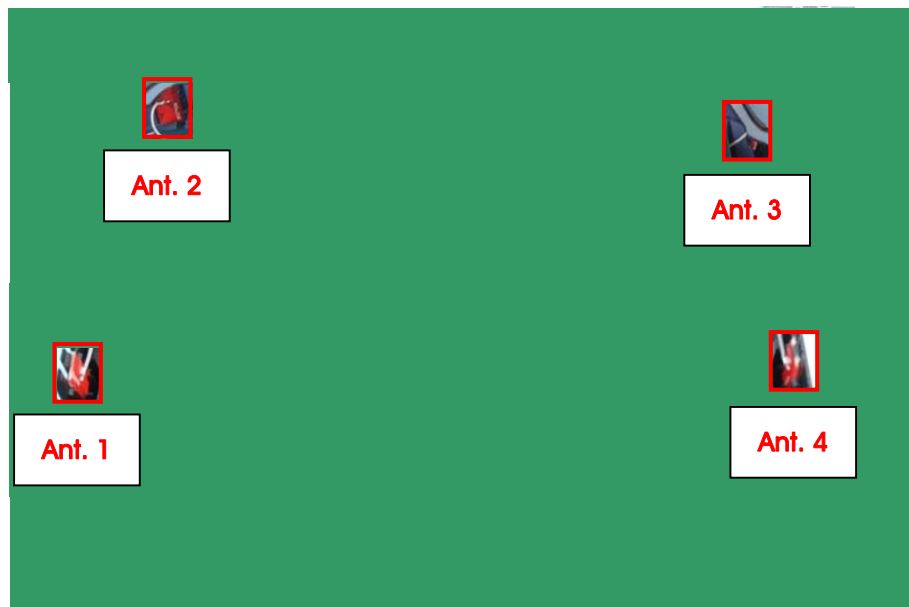


For EUT 2

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)
1	-	-	PIFA Antenna	Murata	3.45
2	-	-	PIFA Antenna	I-PEX	4.80
3	-	-	PIFA Antenna	I-PEX	4.01
4	-	-	PIFA Antenna	I-PEX	3.83

Note: The EUT has four antennas.

Ant. 1 and Ant. 3 could transmit simultaneously, but Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could receive simultaneously.

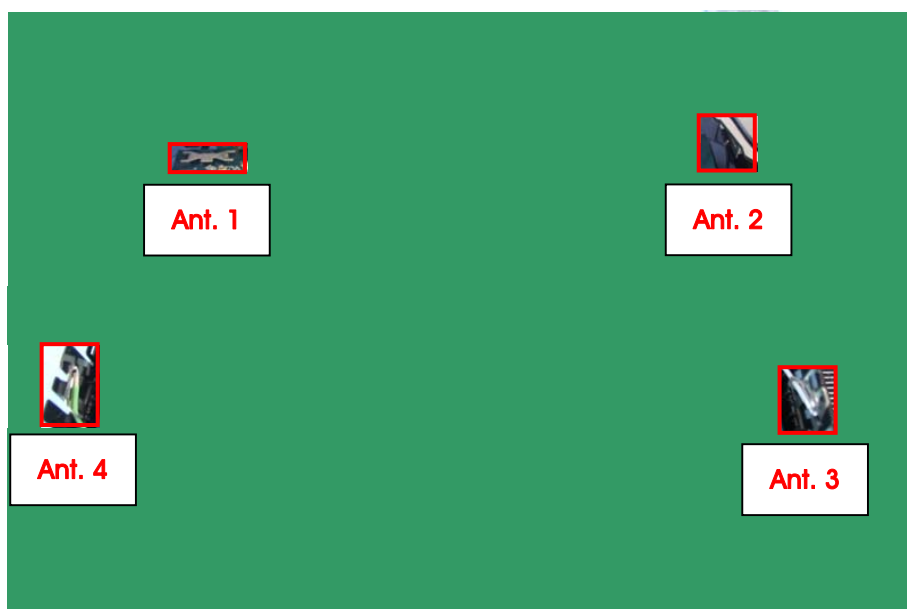

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Mode: Mode 1. EUT 1

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	1+2
	11n 40MHz	MCS0	151/159	1+2
Power Spectral Density	11n 20MHz	MCS0	149/157/165	1+2
	11n 40MHz	MCS0	151/159	1+2
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	1+2
	11n 40MHz	MCS0	151/159	1+2
Radiated Emissions Below 1GHz	CTX	-	-	1+2
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	1+2
	11n 40MHz	MCS0	151/159	1+2
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	1+2
	11n 40MHz	MCS0	151/159	1+2

Test Mode: Mode 2. EUT 2

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	149/157/165	1+3
	11n 40MHz	MCS0	151/159	1+3
Power Spectral Density	11n 20MHz	MCS0	149/157/165	1+3
	11n 40MHz	MCS0	151/159	1+3
6dB Spectrum Bandwidth	11n 20MHz	MCS0	149/157/165	1+3
	11n 40MHz	MCS0	151/159	1+3
Radiated Emissions Below 1GHz	CTX	-	-	1+3
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	149/157/165	1+3
	11n 40MHz	MCS0	151/159	1+3
Band Edge Emissions	11n 20MHz	MCS0	149/157/165	1+3
	11n 40MHz	MCS0	151/159	1+3

The following test modes were performed for all tests:

Mode 1. EUT 1

Mode 2. EUT 2

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO02-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC). Please refer section 6 for Test Site Address.

3.7. Table for Multiple List

There are two antenna types of EUT which are identical to each other in all aspects except for the following table:

Model No.	Antenna Type	Remark
ISB7105W	PCB Antenna	EUT 1
	PIFA Antenna	EUT 2

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Flash Disk	Sandisk	SDCZ50-032G	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Mode: Mode 1. EUT 1

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	22	22	22

Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	DOS	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	22	22

Test Mode: Mode 2. EUT 2

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	DOS		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0 20MHz	22	22	22

Power Parameters of IEEE 802.11n MCS0 40MHz


Test Software Version	DOS	
Frequency	5755 MHz	5795 MHz
MCS0 40MHz	22	22

3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.11. Duty Cycle

IEEE 802.11n MCS0 20MHz / Test Mode: Mode 1. EUT 1

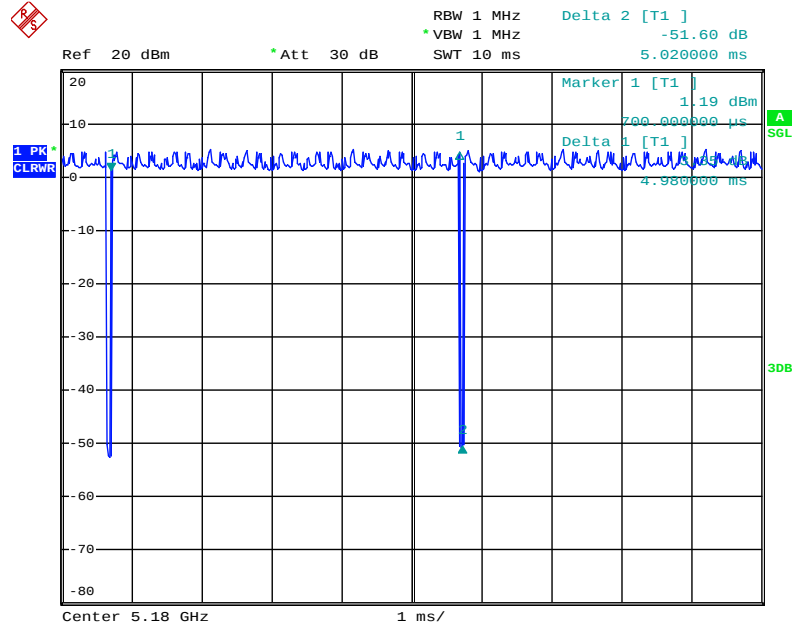


Date: 29.OCT.2013 07:35:17

IEEE 802.11n MCS0 40MHz / Test Mode: Mode 1. EUT 1

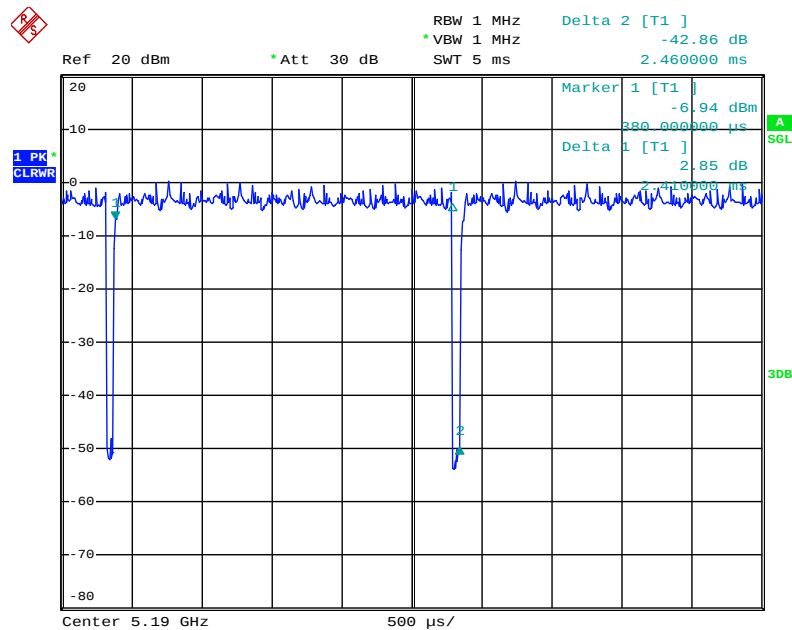


Date: 29.OCT.2013 07:36:28

IEEE 802.11n MCS0 20MHz / Test Mode: Mode 2. EUT 2

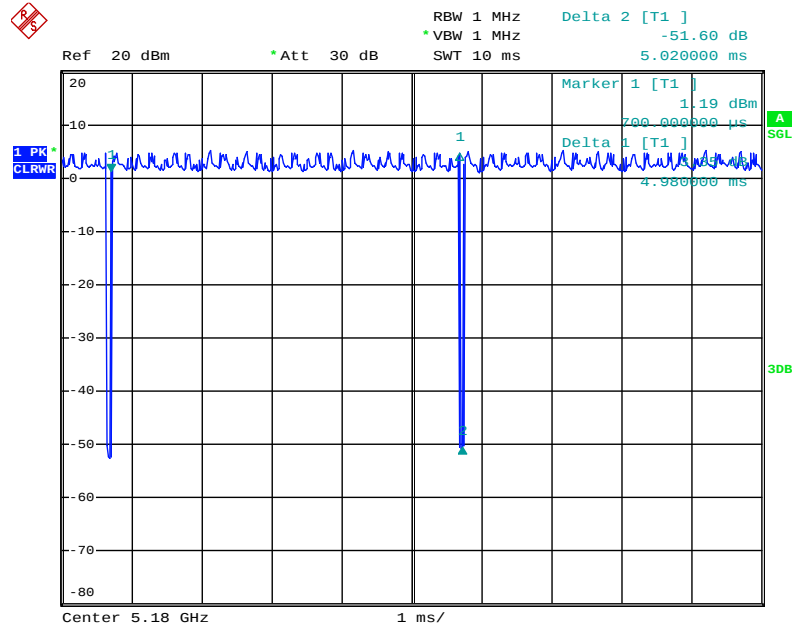

Date: 29.OCT.2013 07:35:17


IEEE 802.11n MCS0 40MHz / Test Mode: Mode 2. EUT 2

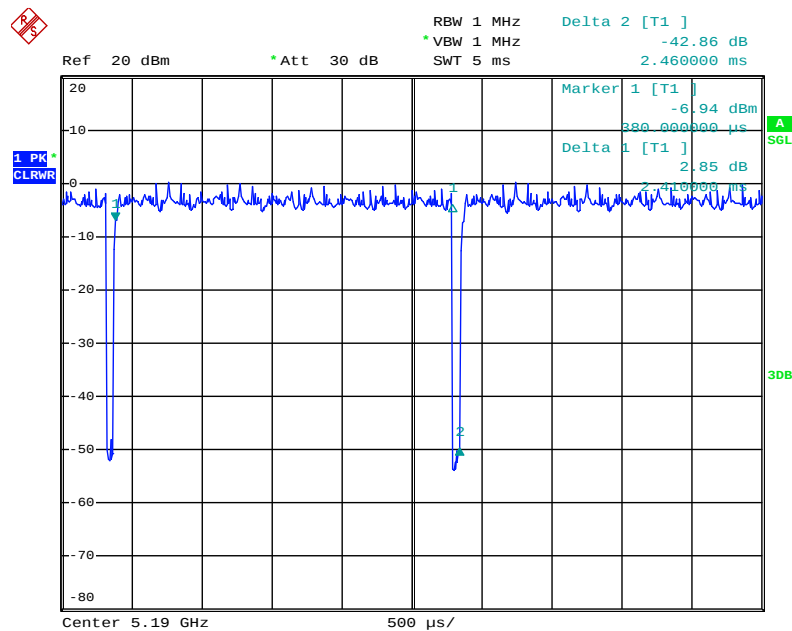

Date: 29.OCT.2013 07:36:28


3.12. Test Configurations

3.12.1.AC Power Line Conduction Emissions Test Configuration

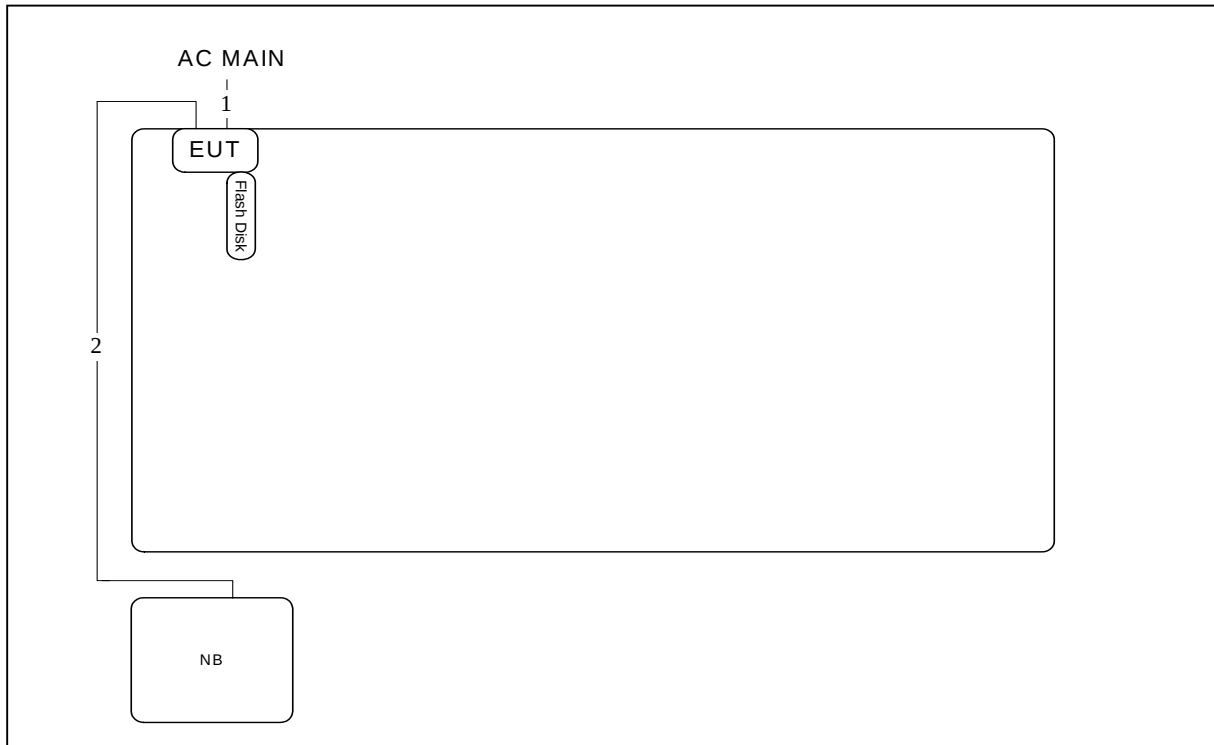

Item	Connection	Shielded	Length
1	Power cable	No	2m
2	RJ-45 cable	No	10m

3.12.2. Radiation Emissions Test Configuration

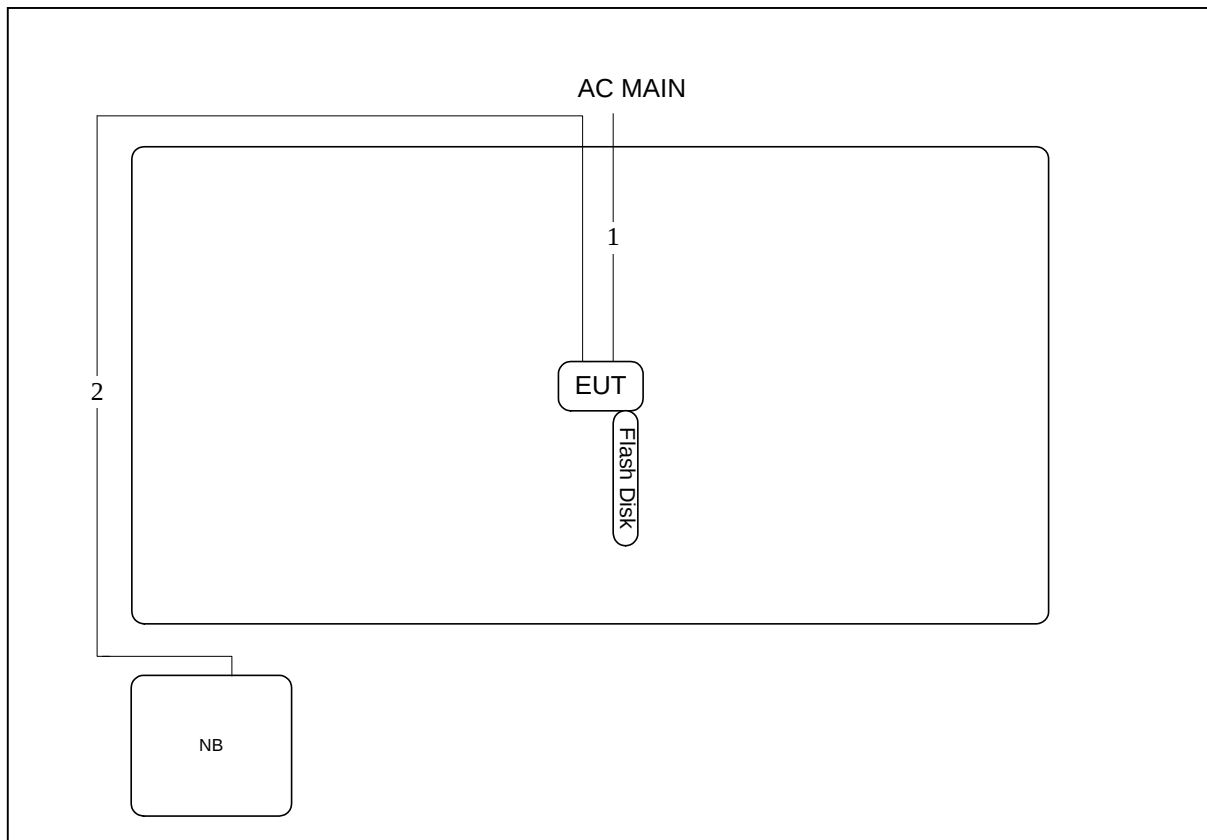

Item	Connection	Shielded	Length
1	Power cable	No	2m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

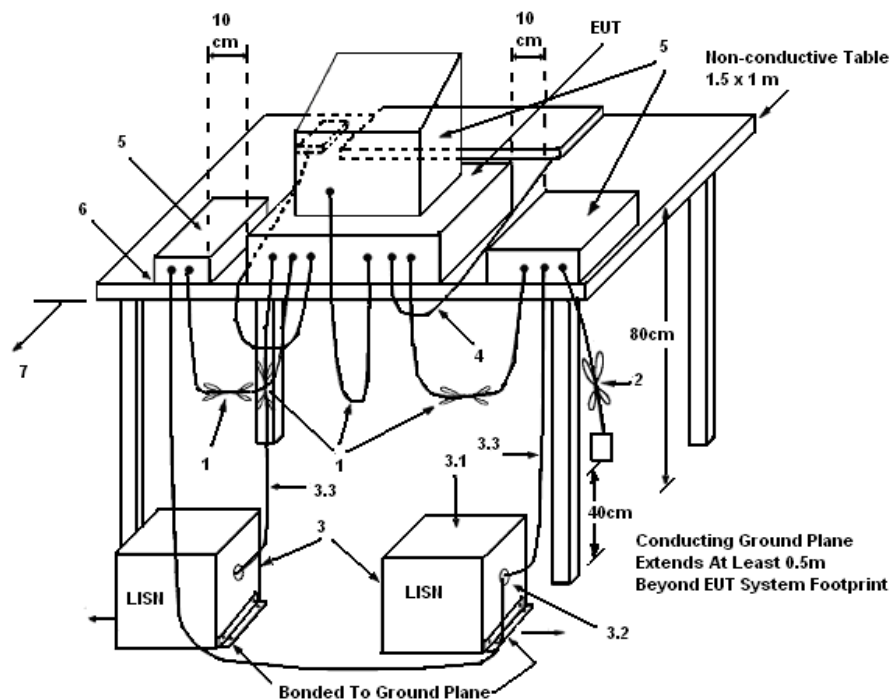

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	26°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Line
Configuration	CTX	Test Mode	Mode 1. EUT 1

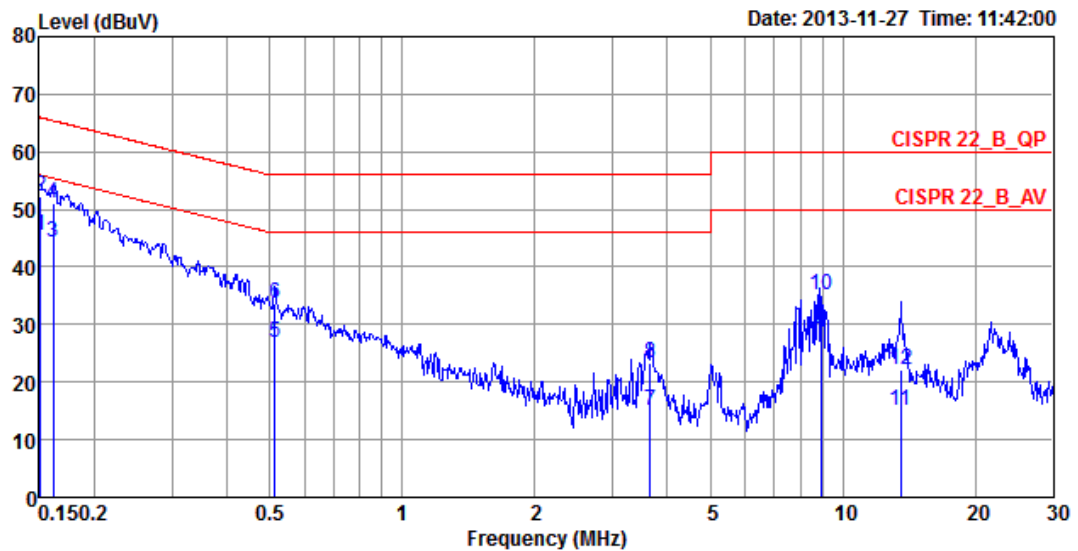

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	a	0.1508	45.41	-10.55	55.96	45.14	0.22	0.05	Average	LINE
2	q	0.1508	52.26	-13.70	65.96	51.99	0.22	0.05	QP	LINE
3		0.1616	44.38	-11.00	55.38	44.11	0.22	0.05	Average	LINE
4		0.1616	51.01	-14.37	65.38	50.74	0.22	0.05	QP	LINE
5		0.5128	26.86	-19.14	46.00	26.59	0.22	0.05	Average	LINE
6		0.5128	33.65	-22.35	56.00	33.38	0.22	0.05	QP	LINE
7		3.6611	15.04	-30.96	46.00	14.64	0.28	0.12	Average	LINE
8		3.6611	23.45	-32.55	56.00	23.05	0.28	0.12	QP	LINE
9		8.9123	29.26	-20.74	50.00	28.68	0.41	0.17	Average	LINE
10		8.9123	35.25	-24.75	60.00	34.67	0.41	0.17	QP	LINE
11		13.5509	15.03	-34.97	50.00	14.34	0.56	0.13	Average	LINE
12		13.5509	22.02	-37.98	60.00	21.33	0.56	0.13	QP	LINE

Temperature	26°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1. EUT 1

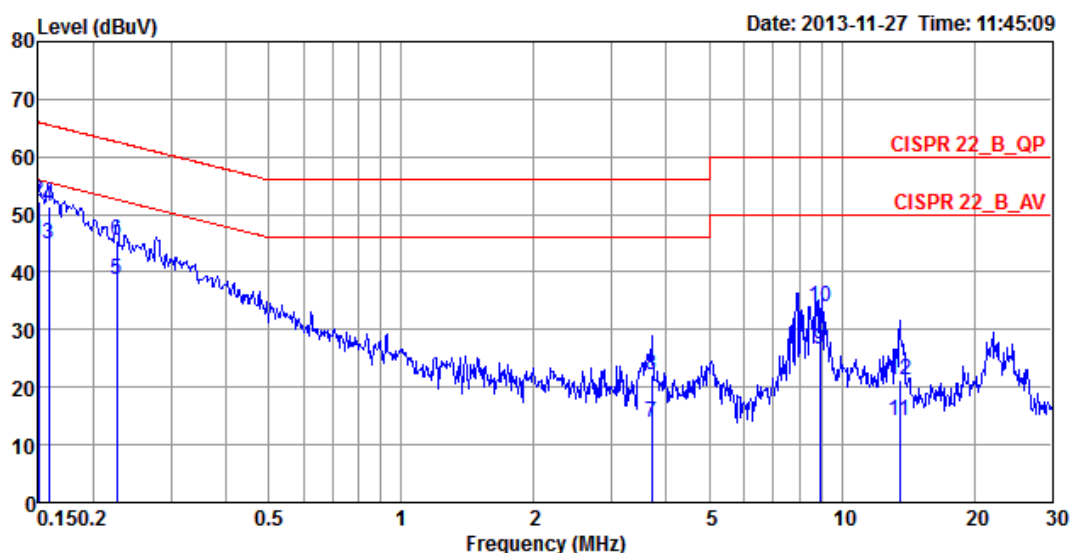


		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	a	0.1500	45.40	-10.60	56.00	45.26	0.09	0.05	Average	NEUTRAL
2	q	0.1500	52.21	-13.79	66.00	52.07	0.09	0.05	QP	NEUTRAL
3		0.1582	44.78	-10.78	55.56	44.64	0.09	0.05	Average	NEUTRAL
4		0.1582	51.42	-14.14	65.56	51.28	0.09	0.05	QP	NEUTRAL
5		0.2256	38.77	-13.84	52.61	38.63	0.07	0.07	Average	NEUTRAL
6		0.2256	45.56	-17.05	62.61	45.42	0.07	0.07	QP	NEUTRAL
7		3.7001	13.90	-32.10	46.00	13.63	0.15	0.12	Average	NEUTRAL
8		3.7001	22.06	-33.94	56.00	21.79	0.15	0.12	QP	NEUTRAL
9		8.9142	26.46	-23.54	50.00	26.02	0.27	0.17	Average	NEUTRAL
10		8.9142	34.00	-26.00	60.00	33.56	0.27	0.17	QP	NEUTRAL
11		13.5509	14.12	-35.88	50.00	13.61	0.38	0.13	Average	NEUTRAL
12		13.5509	21.32	-38.68	60.00	20.81	0.38	0.13	QP	NEUTRAL

Note:


Level = Read Level + LISN Factor + Cable Loss

Temperature	26°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Line
Configuration	CTX	Test Mode	Mode 2. EUT 2

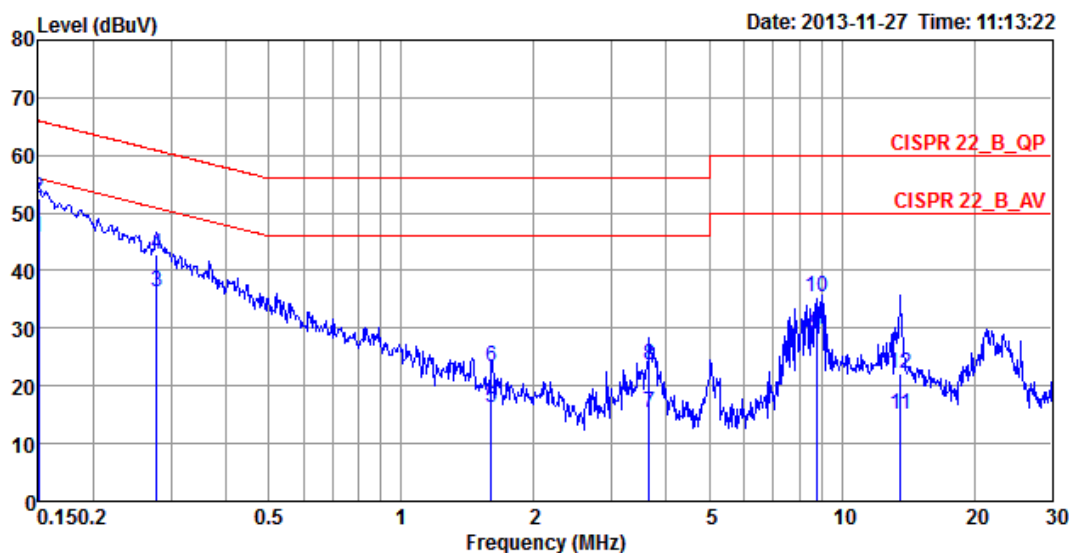

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	a	0.1500	45.61	-10.39	56.00	45.34	0.22	0.05	Average	LINE
2	q	0.1500	52.46	-13.54	66.00	52.19	0.22	0.05	QP	LINE
3		0.2788	36.24	-14.61	50.85	35.97	0.21	0.06	Average	LINE
4		0.2788	42.84	-18.01	60.85	42.57	0.21	0.06	QP	LINE
5		1.6020	16.17	-29.83	46.00	15.85	0.24	0.08	Average	LINE
6		1.6020	23.28	-32.72	56.00	22.96	0.24	0.08	QP	LINE
7		3.6611	15.49	-30.51	46.00	15.09	0.28	0.12	Average	LINE
8		3.6611	23.70	-32.30	56.00	23.30	0.28	0.12	QP	LINE
9		8.7413	28.84	-21.16	50.00	28.26	0.41	0.17	Average	LINE
10		8.7413	35.47	-24.53	60.00	34.89	0.41	0.17	QP	LINE
11		13.6228	15.02	-34.98	50.00	14.33	0.56	0.13	Average	LINE
12		13.6228	22.04	-37.96	60.00	21.35	0.56	0.13	QP	LINE

Temperature	26°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	CTX	Test Mode	Mode 2. EUT 2

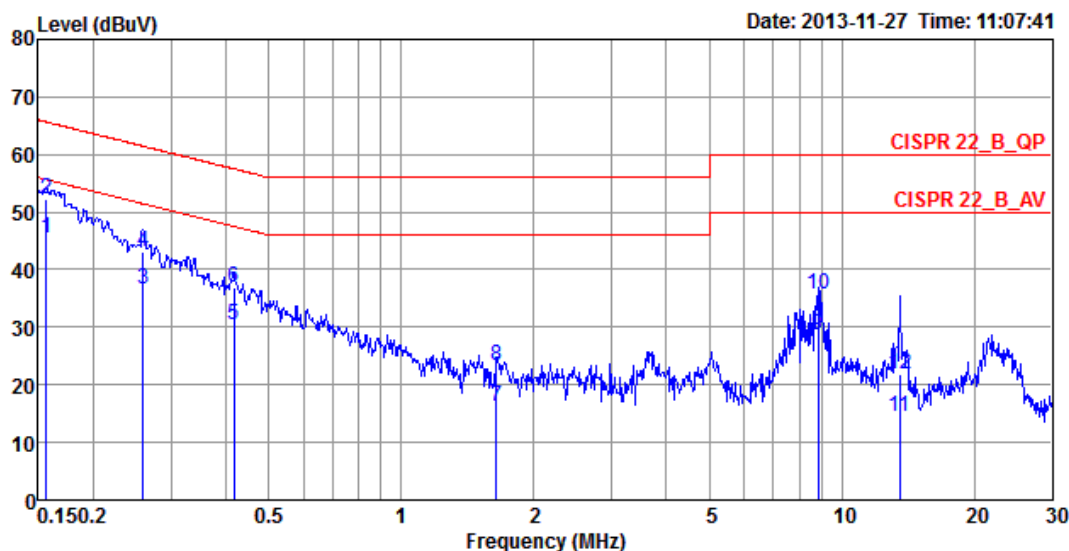

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	a	0.1565	45.54	-10.11	55.65	45.40	0.09	0.05	Average	NEUTRAL
2	q	0.1565	52.15	-13.50	65.65	52.01	0.09	0.05	QP	NEUTRAL
3		0.2589	36.73	-14.74	51.47	36.60	0.07	0.06	Average	NEUTRAL
4		0.2589	43.12	-18.35	61.47	42.99	0.07	0.06	QP	NEUTRAL
5		0.4171	30.54	-16.97	47.51	30.41	0.08	0.05	Average	NEUTRAL
6		0.4171	37.04	-20.47	57.51	36.91	0.08	0.05	QP	NEUTRAL
7		1.6450	16.13	-29.87	46.00	15.94	0.11	0.08	Average	NEUTRAL
8		1.6450	23.28	-32.72	56.00	23.09	0.11	0.08	QP	NEUTRAL
9		8.8223	28.78	-21.22	50.00	28.34	0.27	0.17	Average	NEUTRAL
10		8.8223	35.62	-24.38	60.00	35.18	0.27	0.17	QP	NEUTRAL
11		13.5509	14.47	-35.53	50.00	13.96	0.38	0.13	Average	NEUTRAL
12		13.5509	21.98	-38.02	60.00	21.47	0.38	0.13	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

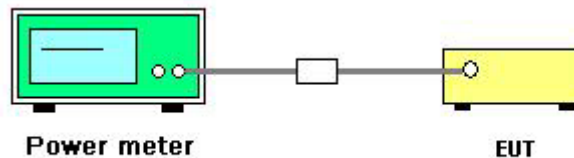

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	60%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n
Test Date	Oct. 29, 2013	Test Mode	Mode 1. EUT 1

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
149	5745 MHz	21.55	21.41	24.49	30.00	Complies
157	5785 MHz	21.45	21.27	24.37	30.00	Complies
165	5825 MHz	21.64	21.45	24.56	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
151	5755 MHz	21.14	21.09	24.13	30.00	Complies
159	5795 MHz	21.11	21.16	24.15	30.00	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	Oct. 29, 2013	Test Mode	Mode 2. EUT 2

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 3	Total		
149	5745 MHz	21.85	21.56	24.72	30.00	Complies
157	5785 MHz	21.64	21.63	24.65	30.00	Complies
165	5825 MHz	21.76	21.69	24.74	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 3	Total		
151	5755 MHz	21.53	21.13	24.34	30.00	Complies
159	5795 MHz	21.45	21.48	24.48	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

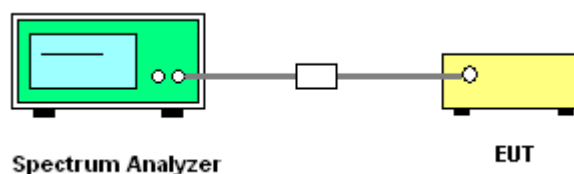

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	60%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n
Test Mode	Mode 1. EUT 1		

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
149	5745 MHz	-4.10	-2.41	-0.16	8.00	Complies
157	5785 MHz	-4.85	-2.69	-0.63	8.00	Complies
165	5825 MHz	-6.17	-1.39	-0.14	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
151	5755 MHz	-5.21	-2.52	-0.65	8.00	Complies
159	5795 MHz	-5.92	-1.97	-0.50	8.00	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Mode	Mode 2. EUT 2		

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 3	Total		
149	5745 MHz	-1.33	-5.70	0.02	8.00	Complies
157	5785 MHz	-1.42	-6.43	-0.23	8.00	Complies
165	5825 MHz	-1.73	-5.15	-0.10	8.00	Complies


Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 3	Total		
151	5755 MHz	-3.25	-7.83	-1.95	8.00	Complies
159	5795 MHz	-3.53	-7.83	-2.16	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Ant. 1 / Test Mode: Mode 1. EUT 1

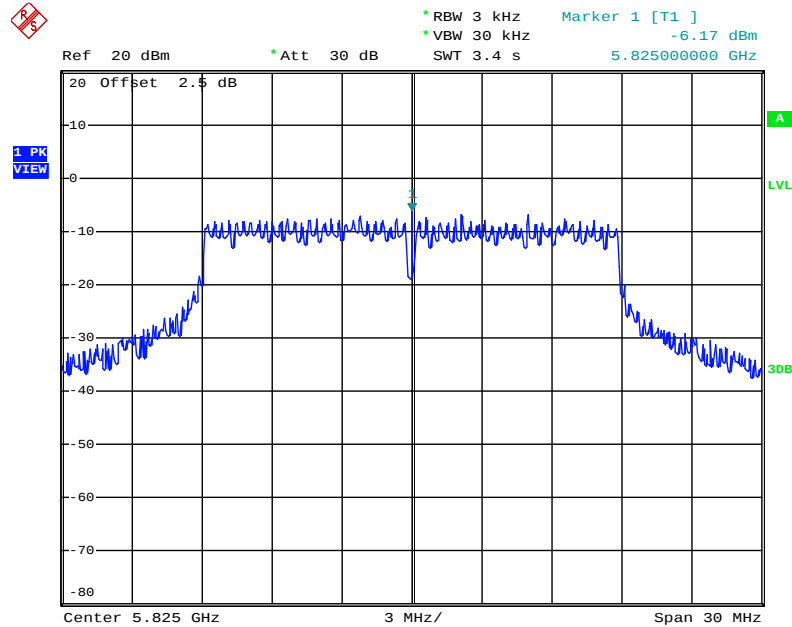


Date: 29.OCT.2013 14:09:40

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Ant. 2 / Test Mode: Mode 1. EUT 1

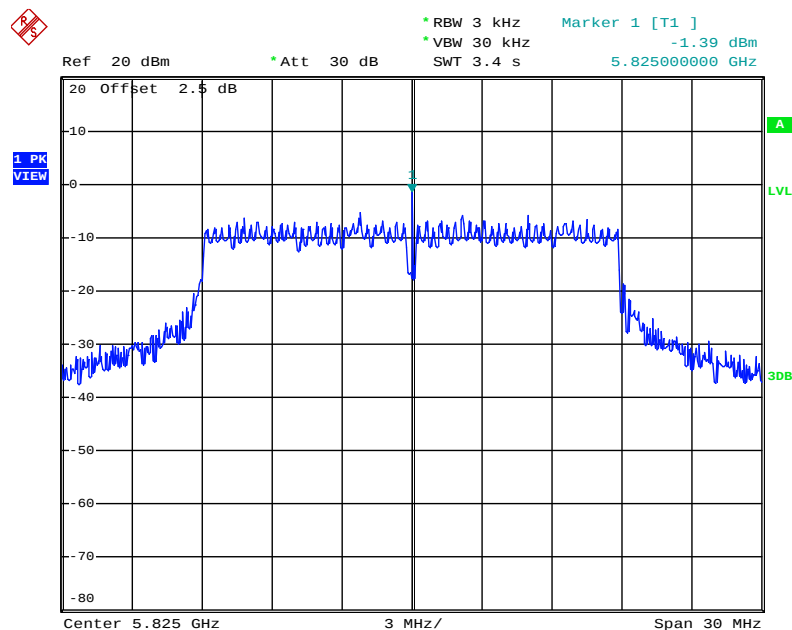


Date: 29.OCT.2013 14:08:59

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Ant. 1 / Test Mode: Mode 1. EUT 1

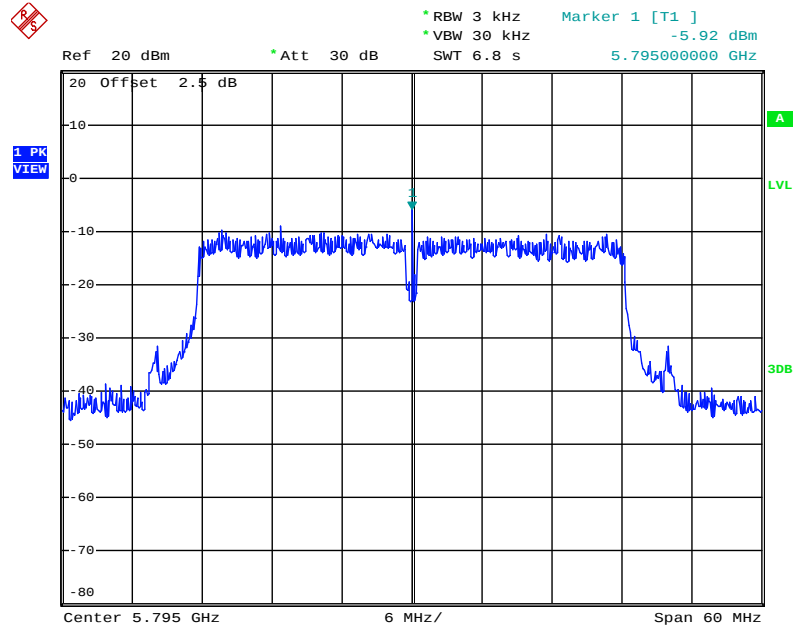


Date: 29.OCT.2013 14:12:37

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795 MHz / Ant. 2 / Test Mode: Mode 1. EUT 1

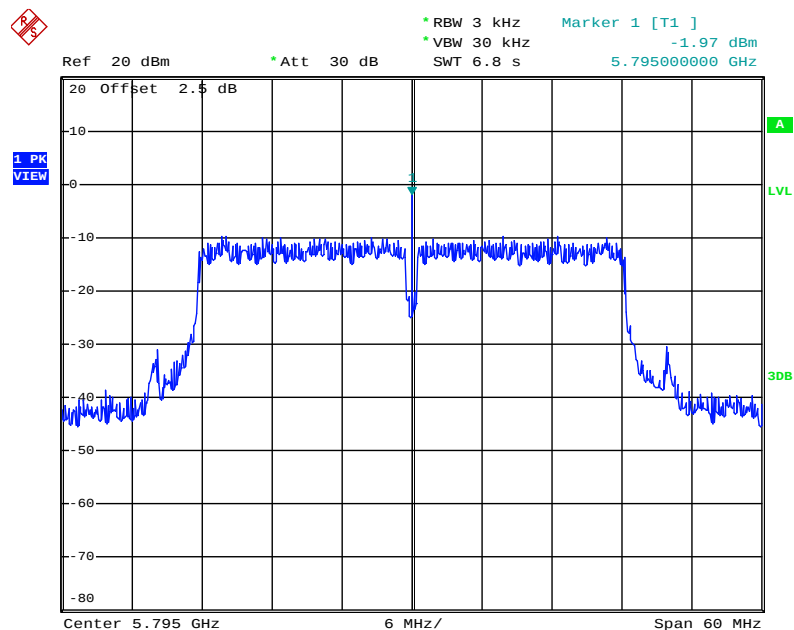


Date: 29.OCT.2013 14:11:56

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5745 MHz / Ant. 1 / Test Mode: Mode 2. EUT 2

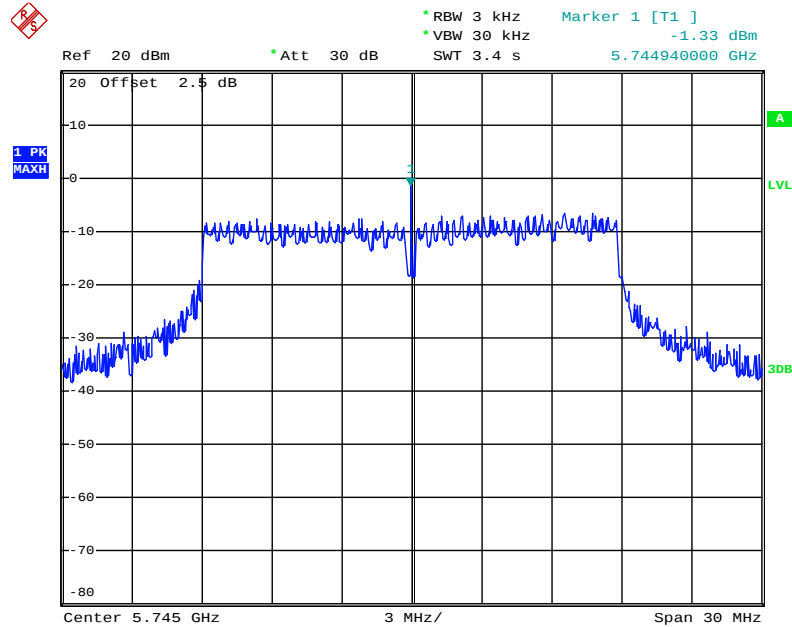


Date: 29.OCT.2013 11:08:40

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 5745 MHz / Ant. 3 / Test Mode: Mode 2. EUT 2

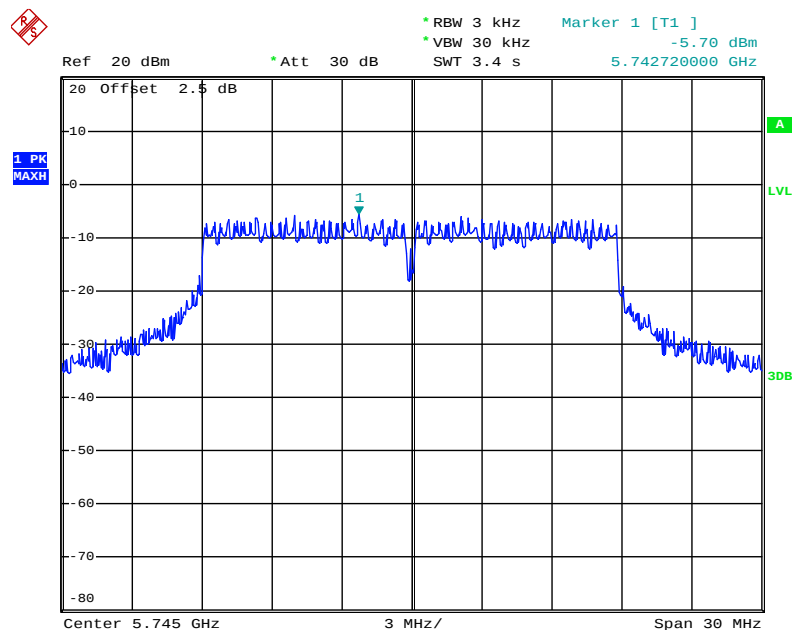


Date: 29.OCT.2013 11:10:58

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5755 MHz / Ant. 1 / Test Mode: Mode 2. EUT 2

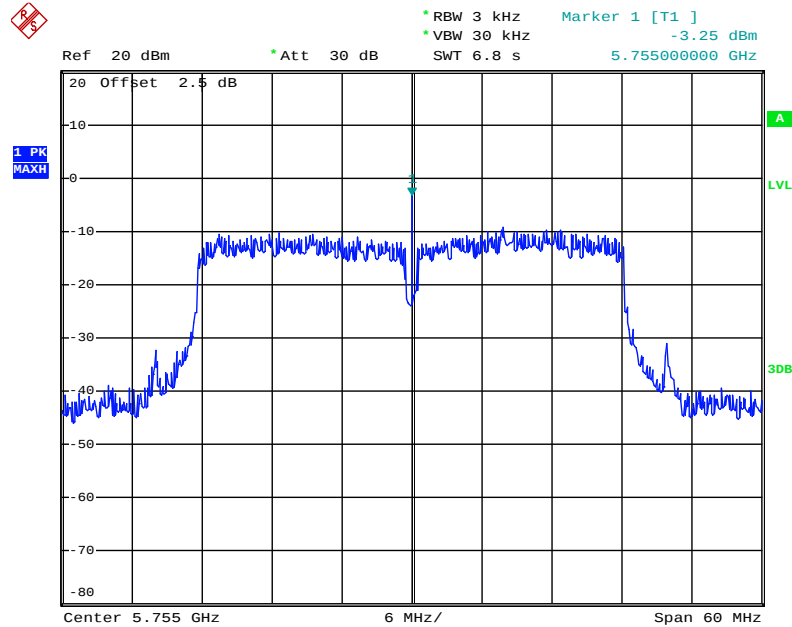

Date: 29.OCT.2013 11:16:44

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 5755 MHz / Ant. 3 / Test Mode: Mode 2. EUT 2

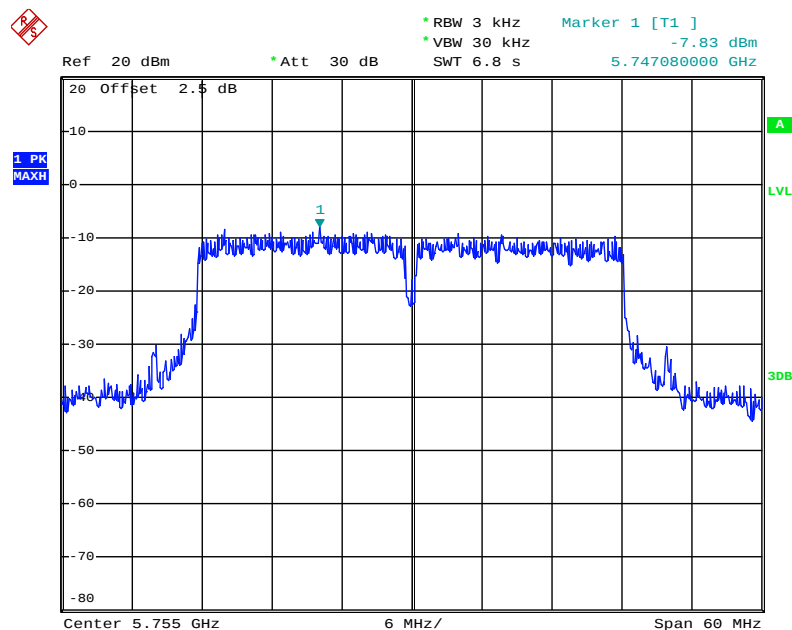

Date: 29.OCT.2013 11:17:34

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26°C	Humidity	60%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11n
Test Mode	Mode 1. EUT 1		

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	9.68	17.12	500	Complies
157	5785 MHz	10.48	17.44	500	Complies
165	5825 MHz	10.24	17.60	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.48	36.48	500	Complies
159	5795 MHz	35.84	36.32	500	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Mode	Mode 2. EUT 2		

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	11.36	16.40	500	Complies
157	5785 MHz	13.84	16.88	500	Complies
165	5825 MHz	10.08	16.80	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.64	500	Complies
159	5795 MHz	35.68	36.48	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5745 MHz / Ant. 1 + Ant. 2 /


Test Mode: Mode 1. EUT 1

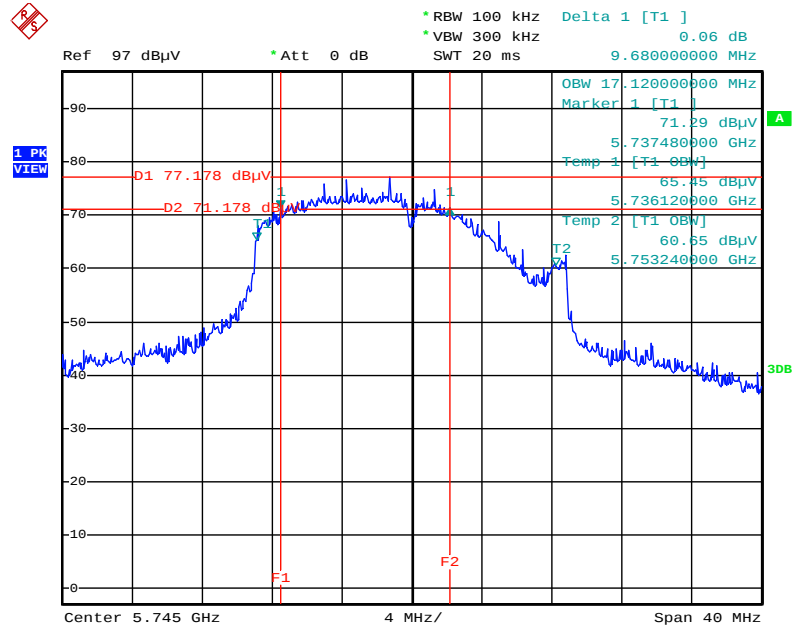

Date: 15.NOV.2013 15:53:58

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795MHz / Ant. 1 + Ant. 2 /


Test Mode: Mode 1. EUT 1

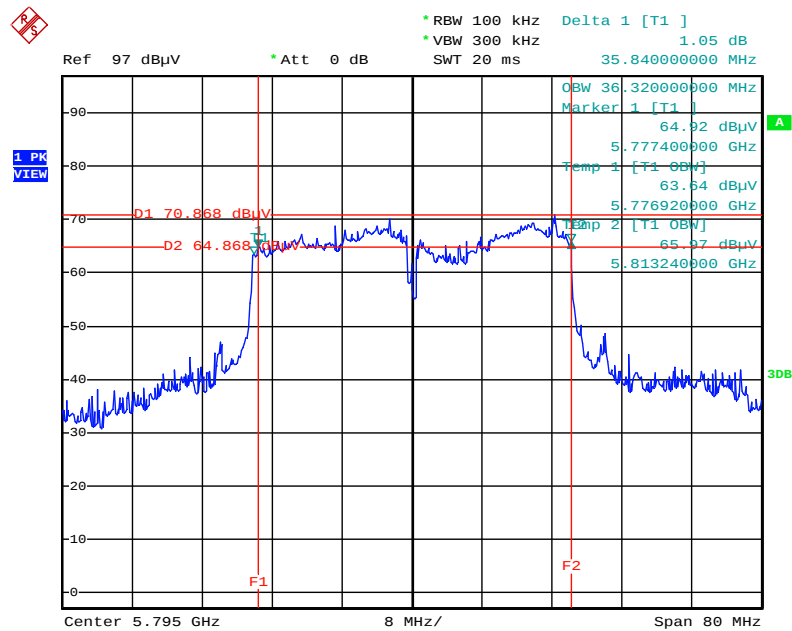

Date: 15.NOV.2013 15:55:32

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 5825 MHz / Ant. 1 + Ant. 3 /


Test Mode: Mode 2. EUT 2

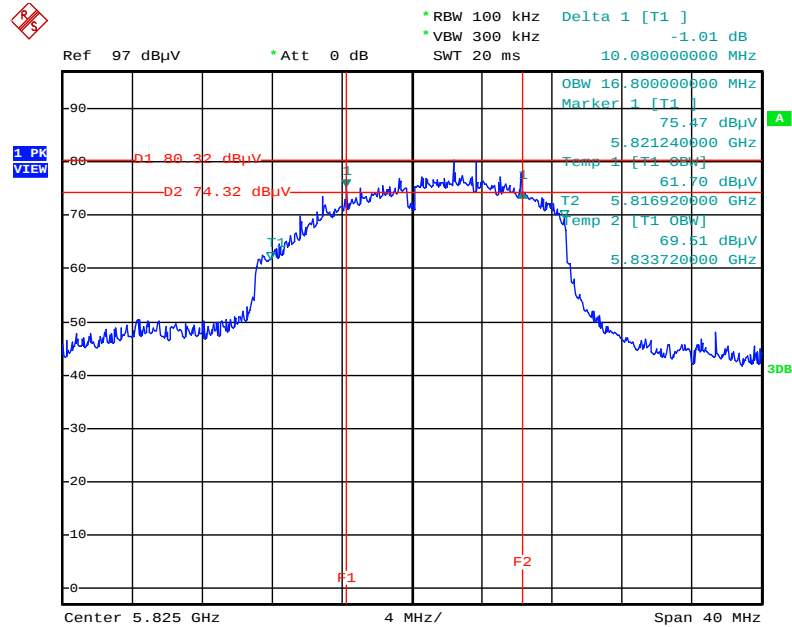

Date: 15.NOV.2013 15:44:47

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 5795MHz / Ant. 1 + Ant. 3 /

Test Mode: Mode 2. EUT 2

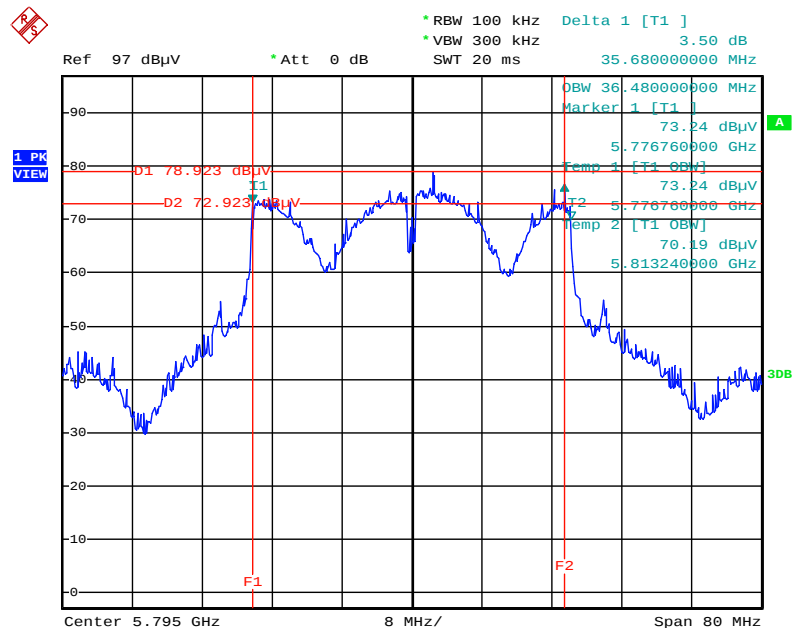

Date: 15.NOV.2013 15:45:46

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

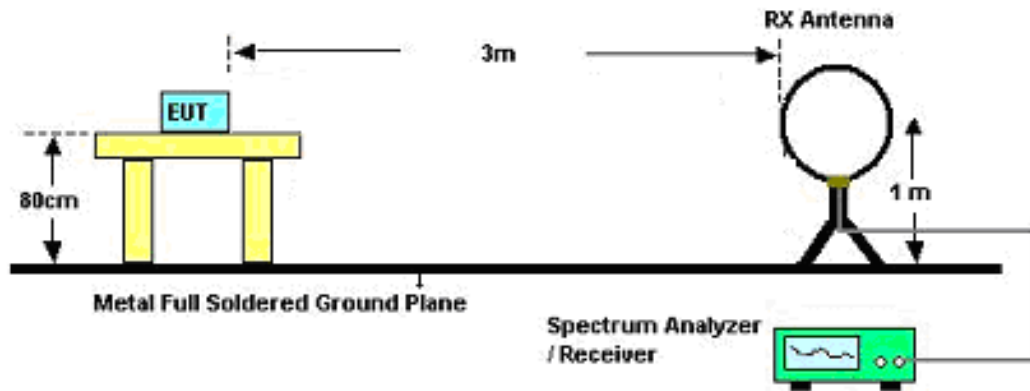

For Radiated Emissions: 30MHz~1GHz

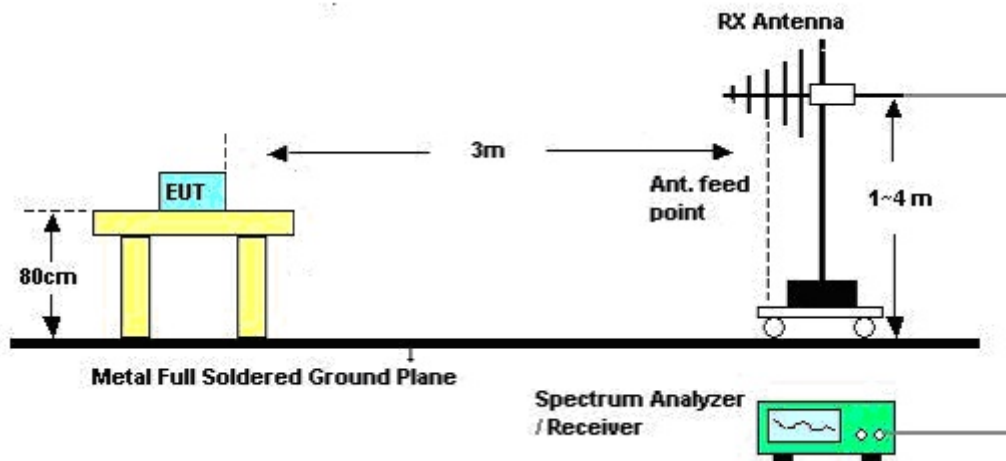

For Radiated Emissions: Above 1GHz

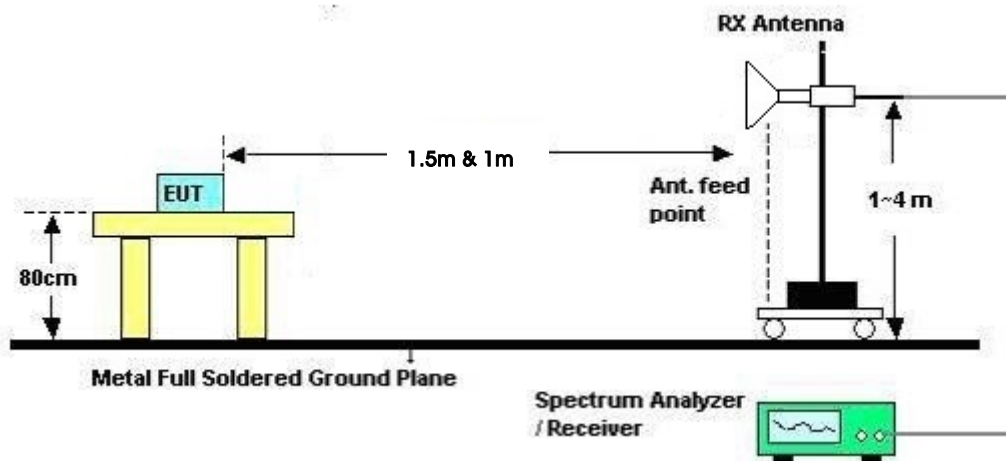

Note :

1. Above 1 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6.02 dB].

2. Above 1 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	CTX
Test Date	Oct. 31, 2013	Test Mode	Mode 1. EUT 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	CTX
Test Date	Nov. 14, 2013	Test Mode	Mode 2. EUT 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	CTX
Test Mode	Mode 1. EUT 1		

Horizontal

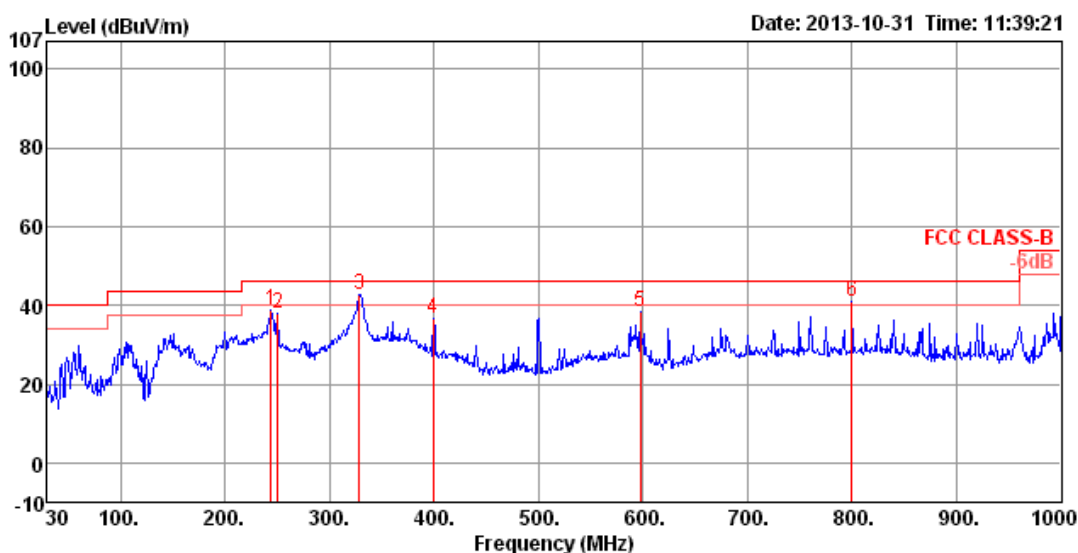

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	244.37	38.76	46.00	-7.24	57.05	1.88	11.29	31.46	125	229	HORIZONTAL	Peak
2	250.19	38.01	46.00	-7.99	55.69	1.90	11.91	31.49	125	108	HORIZONTAL	Peak
3	328.76	42.51	46.00	-3.49	57.95	2.24	13.74	31.42	100	193	HORIZONTAL	Peak
4	399.57	36.76	46.00	-9.24	49.87	2.49	15.86	31.46	100	143	HORIZONTAL	Peak
5	597.45	38.37	46.00	-7.63	48.08	3.11	18.41	31.23	150	358	HORIZONTAL	Peak
6	800.18	40.92	46.00	-5.08	48.76	3.67	19.76	31.27	100	148	HORIZONTAL	Peak

Vertical

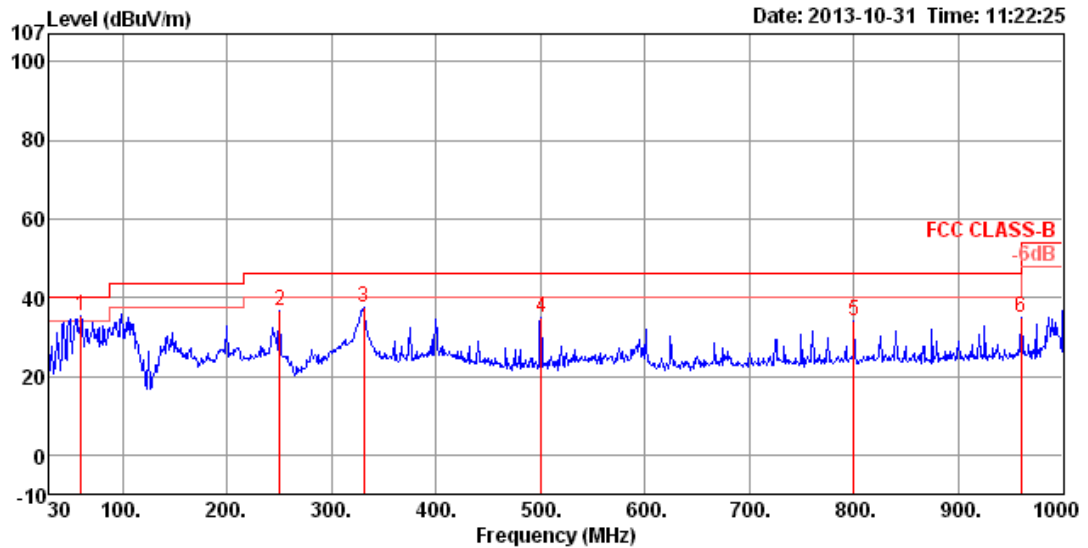

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	60.07	35.19	40.00	-4.81	61.16	0.89	4.92	31.78	125	354	VERTICAL Peak
2	250.19	36.66	46.00	-9.34	54.34	1.90	11.91	31.49	150	176	VERTICAL Peak
3	330.70	37.43	46.00	-8.57	52.82	2.25	13.78	31.42	125	141	VERTICAL Peak
4	500.45	35.00	46.00	-11.00	46.67	2.82	16.92	31.41	100	152	VERTICAL Peak
5	800.18	33.93	46.00	-12.07	41.77	3.67	19.76	31.27	150	317	VERTICAL Peak
6	960.23	34.72	54.00	-19.28	40.66	4.10	21.05	31.09	150	268	VERTICAL Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	CTX
Test Mode	Mode 2. EUT 2		

Horizontal

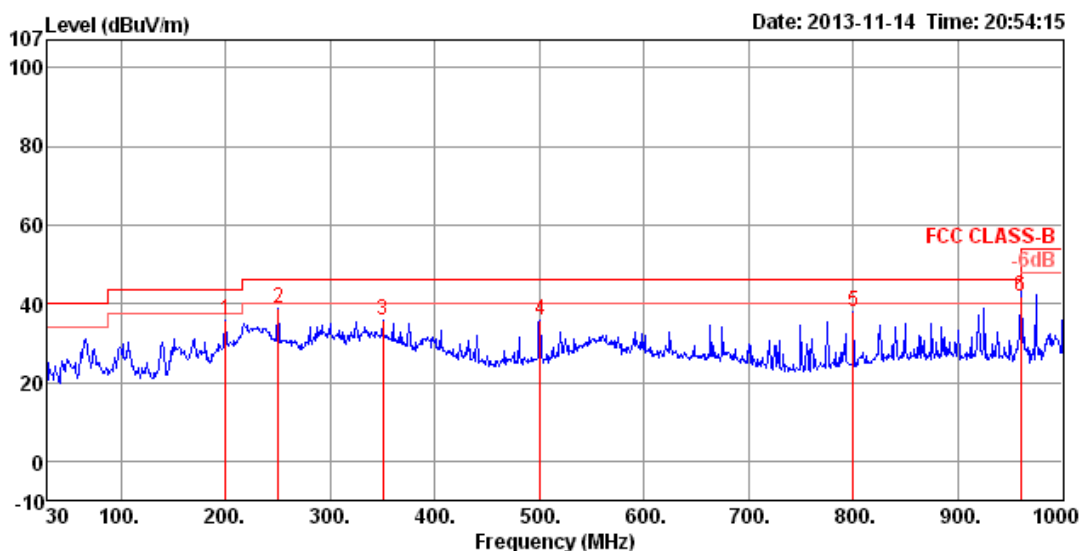

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	199.75	35.72	43.50	-7.78	56.78	1.70	8.75	31.51	125	284	HORIZONTAL	Peak
2	250.19	38.72	46.00	-7.28	56.40	1.90	11.91	31.49	125	237	HORIZONTAL	Peak
3	350.10	35.67	46.00	-10.33	50.37	2.31	14.33	31.34	100	175	HORIZONTAL	Peak
4	500.45	35.62	46.00	-10.38	47.29	2.82	16.92	31.41	125	146	HORIZONTAL	Peak
5	800.18	37.82	46.00	-8.18	45.66	3.67	19.76	31.27	150	266	HORIZONTAL	Peak
6	959.98	41.95	46.00	-4.05	47.89	4.10	21.05	31.09	112	286	HORIZONTAL	QP

Vertical

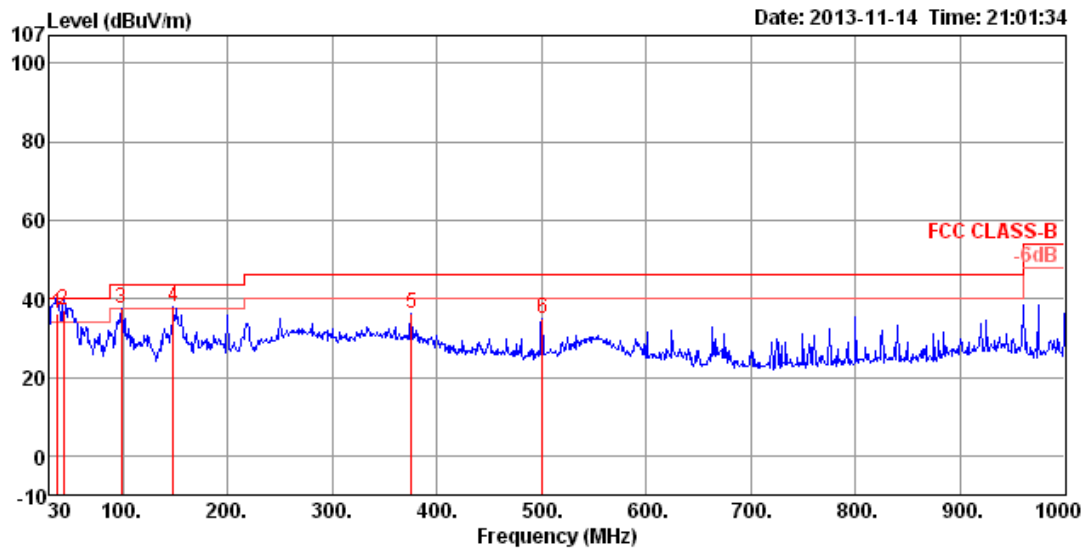

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	37.76	36.40	40.00	-3.60	53.78	0.72	13.78	31.88	100	84 VERTICAL	QP
2	43.58	36.87	40.00	-3.13	57.68	0.78	10.25	31.84	100	340 VERTICAL	QP
3	98.87	37.42	43.50	-6.08	57.68	1.17	10.17	31.60	125	196 VERTICAL	Peak
4	148.34	37.86	43.50	-5.64	57.81	1.46	10.14	31.55	100	264 VERTICAL	Peak
5	375.32	36.00	46.00	-10.00	50.06	2.44	14.93	31.43	125	187 VERTICAL	Peak
6	500.45	34.70	46.00	-11.30	46.37	2.82	16.92	31.41	100	176 VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Ant. 1 + Ant. 2
Test Date	Sep. 21, 2013	Test Mode	Mode 1. EUT 1

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11486.88	45.48	60.00	-14.52	36.87	5.11	38.78	35.28	Average	100	183	HORIZONTAL
2	11488.16	60.25	80.00	-19.75	51.64	5.11	38.78	35.28	Peak	100	183	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11495.64	68.39	80.00	-11.61	59.77	5.12	38.78	35.28	Peak	100	139	VERTICAL
2	11496.56	54.64	60.00	-5.36	46.02	5.12	38.78	35.28	Average	100	139	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Ant. 1 + Ant. 2
Test Date	Sep. 21, 2013	Test Mode	Mode 1. EUT 1

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11571.52	46.41	60.00	-13.59	37.74	5.14	38.83	35.30	Average	100	305	HORIZONTAL
2	11572.80	60.82	80.00	-19.18	52.15	5.14	38.83	35.30	Peak	100	305	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11569.88	53.25	60.00	-6.75	44.58	5.14	38.83	35.30	Average	100	347	VERTICAL
2	11572.64	67.23	80.00	-12.77	58.56	5.14	38.83	35.30	Peak	100	347	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Ant. 1 + Ant. 2
Test Date	Sep. 21, 2013	Test Mode	Mode 1. EUT 1

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11642.24	59.91	80.00	-20.09	51.19	5.16	38.86	35.30	Peak	100	104	HORIZONTAL
2	11644.88	46.10	60.00	-13.90	37.38	5.16	38.86	35.30	Average	100	104	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11648.12	67.73	80.00	-12.27	59.01	5.16	38.86	35.30	Peak	100	95	VERTICAL
2	11649.92	53.07	60.00	-6.93	44.35	5.16	38.86	35.30	Average	100	95	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Ant. 1 + Ant. 2
Test Date	Sep. 21, 2013	Test Mode	Mode 1. EUT 1

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11509.80	44.39	60.00	-15.61	35.76	5.12	38.79	35.28	Average	100	179	HORIZONTAL
2	11511.28	56.85	80.00	-23.15	48.22	5.12	38.79	35.28	Peak	100	179	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11509.84	63.53	80.00	-16.47	54.90	5.12	38.79	35.28	Peak	100	347	VERTICAL
2	11510.12	52.63	60.00	-7.37	44.00	5.12	38.79	35.28	Average	100	347	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Ant. 1 + Ant. 2
Test Date	Sep. 21, 2013	Test Mode	Mode 1. EUT 1

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11590.00	45.17	60.00	-14.83	36.50	5.14	38.83	35.30	Average	100	100	HORIZONTAL
2	11590.44	57.35	80.00	-22.65	48.68	5.14	38.83	35.30	Peak	100	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11590.20	51.07	60.00	-8.93	42.40	5.14	38.83	35.30	Average	100	358	VERTICAL
2	11590.68	62.50	80.00	-17.50	53.83	5.14	38.83	35.30	Peak	100	358	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 149 / Ant. 1 + Ant. 3
Test Date	Sep. 20, 2013	Test Mode	Mode 2. EUT 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11488.08	59.64	80.00	-20.36	51.03	5.11	38.78	35.28	100	272	HORIZONTAL
2	11490.00	45.57	60.00	-14.43	36.96	5.11	38.78	35.28	100	272	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11489.68	55.87	60.00	-4.13	47.26	5.11	38.78	35.28	100	237	VERTICAL
2	11492.72	69.29	80.00	-10.71	60.68	5.11	38.78	35.28	100	237	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 157 / Ant. 1 + Ant. 3
Test Date	Sep. 20, 2013	Test Mode	Mode 2. EUT 2

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11568.00	61.72	80.00	-18.28	53.06	5.13	38.83	35.30	100	273	HORIZONTAL
2	11569.76	47.64	60.00	-12.36	38.97	5.14	38.83	35.30	100	273	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11569.84	55.62	60.00	-4.38	46.95	5.14	38.83	35.30	100	237	VERTICAL
2	11571.84	68.93	80.00	-11.07	60.26	5.14	38.83	35.30	100	237	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz CH 165 / Ant. 1 + Ant. 3
Test Date	Sep. 20, 2013	Test Mode	Mode 2. EUT 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11648.16	60.80	80.00	-19.20	52.08	5.16	38.86	35.30	Peak	100	233	HORIZONTAL
2	11649.60	46.13	60.00	-13.87	37.41	5.16	38.86	35.30	Average	100	233	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	11648.00	68.08	80.00	-11.92	59.36	5.16	38.86	35.30	Peak	100	216	VERTICAL
2	11649.76	54.53	60.00	-5.47	45.81	5.16	38.86	35.30	Average	100	216	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 151 / Ant. 1 + Ant. 3
Test Date	Sep. 20, 2013	Test Mode	Mode 2. EUT 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11510.08	44.04	60.00	-15.96	35.41	5.12	38.79	35.28	Average	100	270	HORIZONTAL
2	11511.28	56.02	80.00	-23.98	47.39	5.12	38.79	35.28	Peak	100	270	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11509.28	65.01	80.00	-14.99	56.38	5.12	38.79	35.28	Peak	100	240	VERTICAL
2	11509.76	53.43	60.00	-6.57	44.80	5.12	38.79	35.28	Average	100	240	VERTICAL

Temperature	23°C	Humidity	55%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz CH 159 / Ant. 1 + Ant. 3
Test Date	Sep. 20, 2013	Test Mode	Mode 2. EUT 2

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11589.84	45.90	60.00	-14.10	37.23	5.14	38.83	35.30	Average	100	273	HORIZONTAL
2	11590.64	57.42	80.00	-22.58	48.75	5.14	38.83	35.30	Peak	100	273	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11590.00	53.25	60.00	-6.75	44.58	5.14	38.83	35.30	Average	100	236	VERTICAL
2	11591.12	65.43	80.00	-14.57	56.76	5.14	38.83	35.30	Peak	100	236	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

- Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
- The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.


4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Fundamental Emissions

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Test Mode: Mode 1. EUT 1

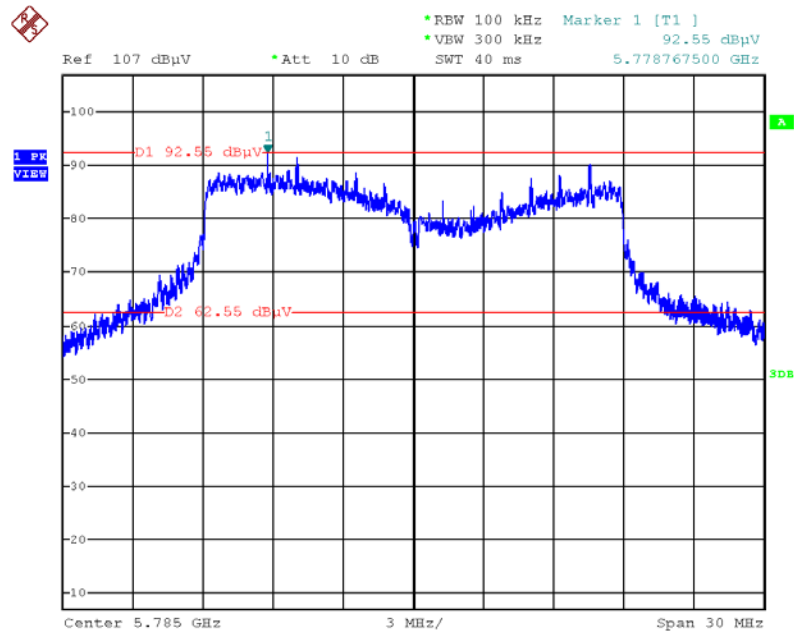

Date: 21.SEP.2013 03:44:22


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc) /

Test Mode: Mode 1. EUT 1

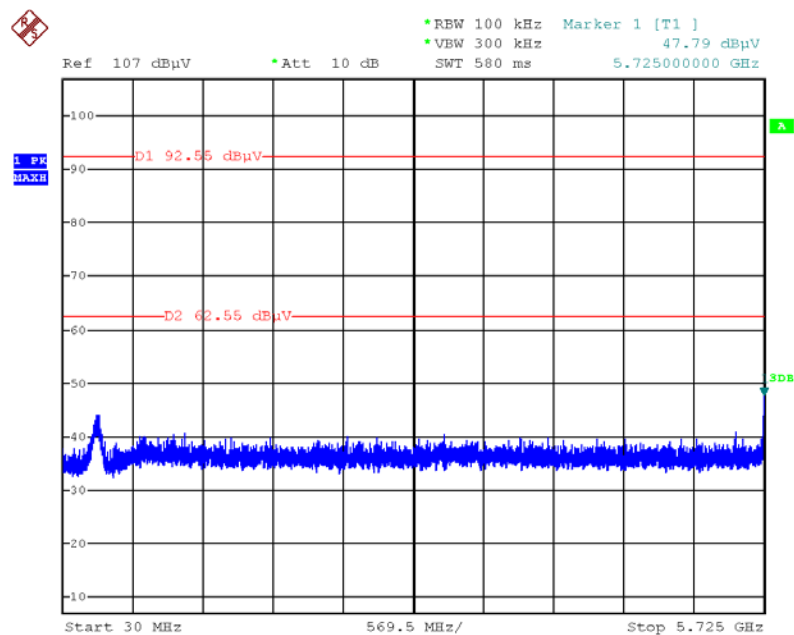


Date: 21.SEP.2013 03:45:12

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc) / Test Mode: Mode 1. EUT 1

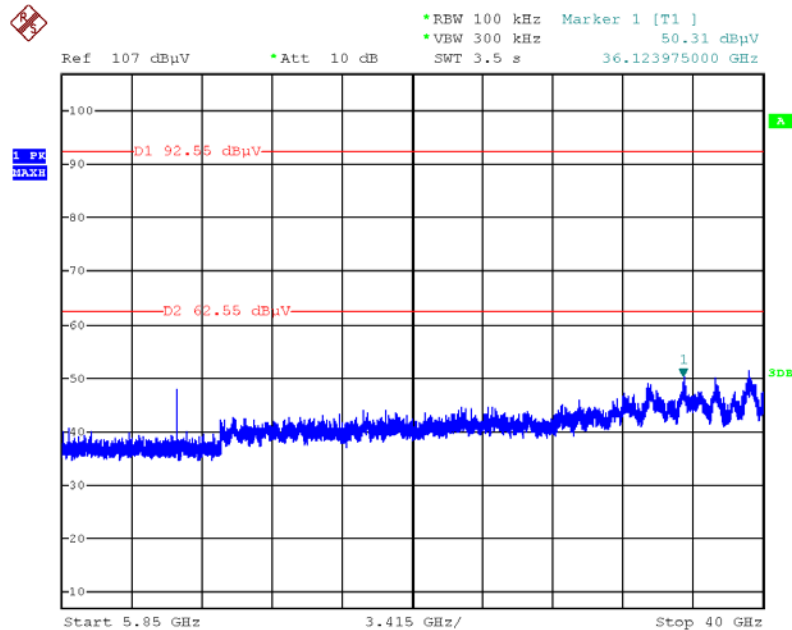


Date: 21.SEP.2013 03:46:01

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 1. EUT 1

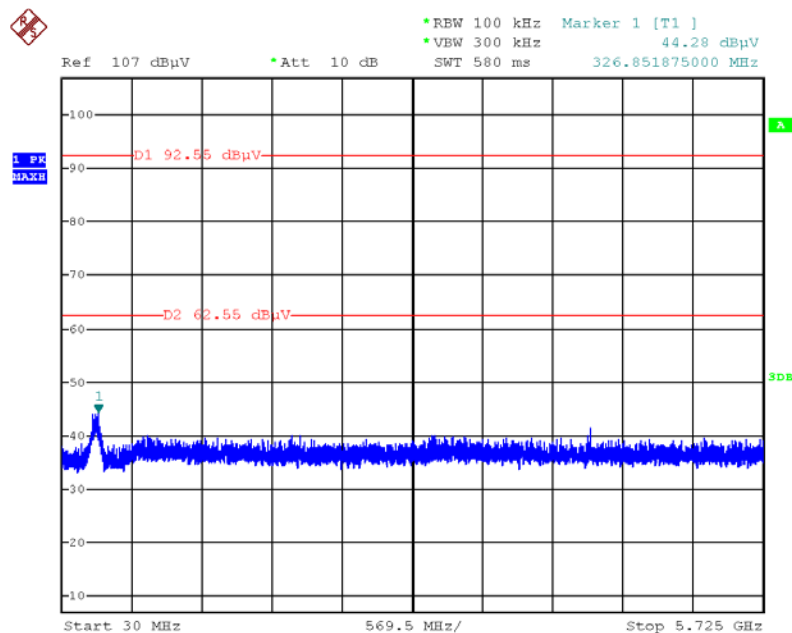


Date: 21.SEP.2013 03:47:05

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc) / Test
Mode: Mode 1. EUT 1

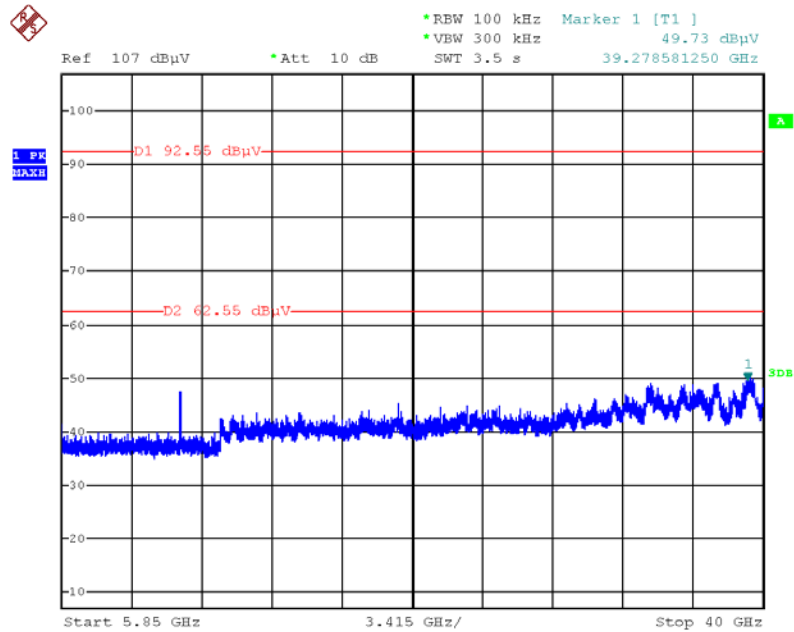


Date: 21.SEP.2013 03:47:46

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Test Mode: Mode 1. EUT 1

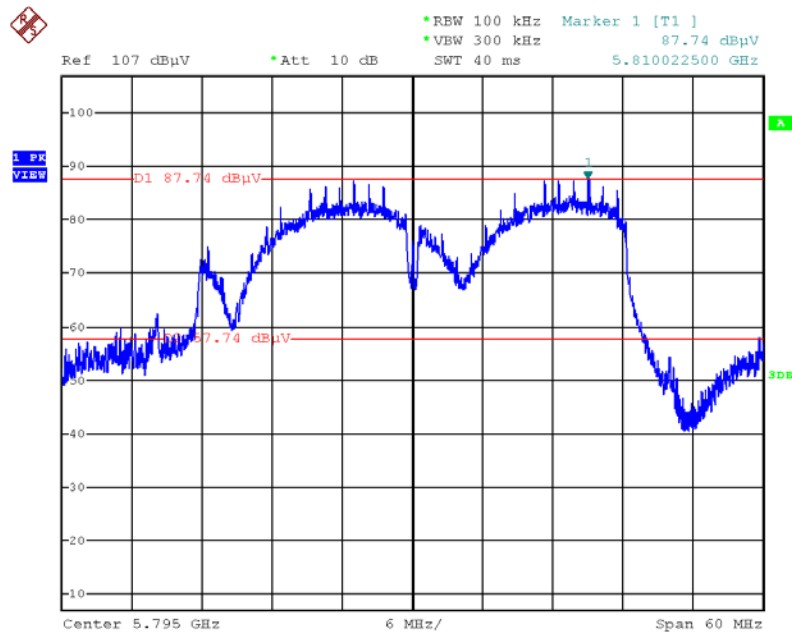

Date: 21.SEP.2013 03:52:04


Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 1. EUT 1

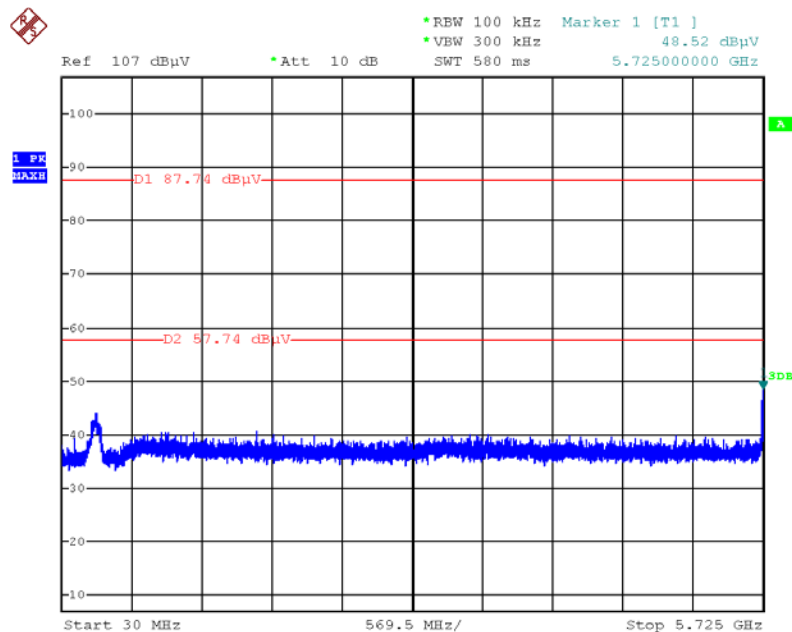

Date: 21.SEP.2013 03:53:35

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc) /


Test Mode: Mode 1. EUT 1

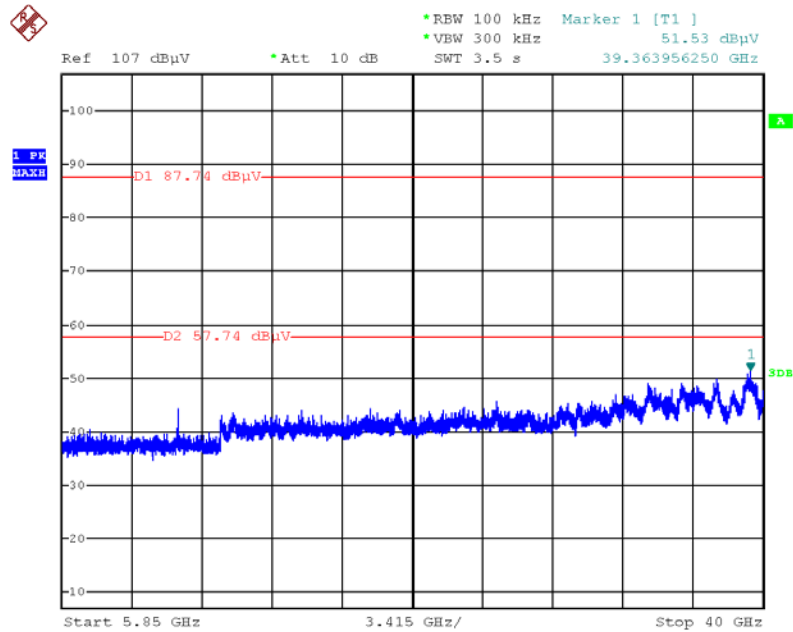

Date: 21.SEP.2013 03:54:29

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc) /


Test Mode: Mode 1. EUT 1

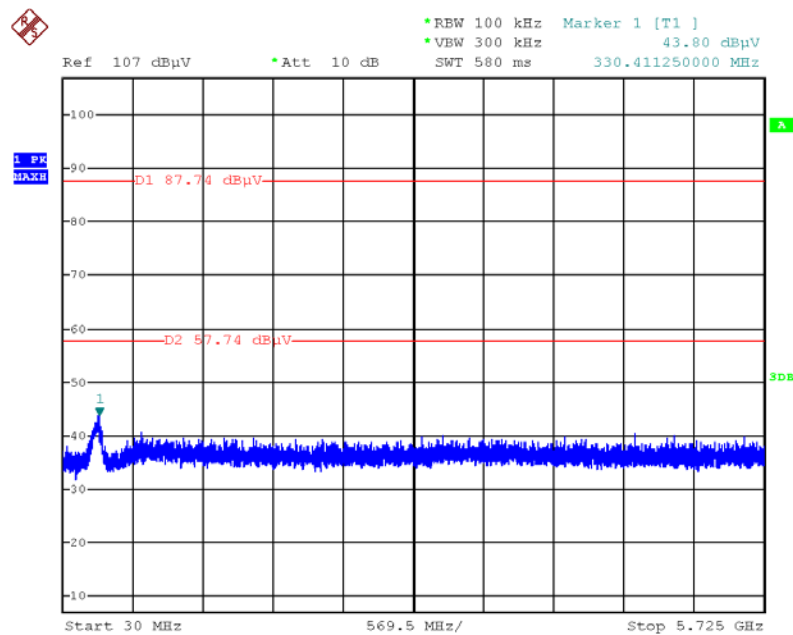

Date: 21.SEP.2013 03:55:48


Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc) /

Test Mode: Mode 1. EUT 1

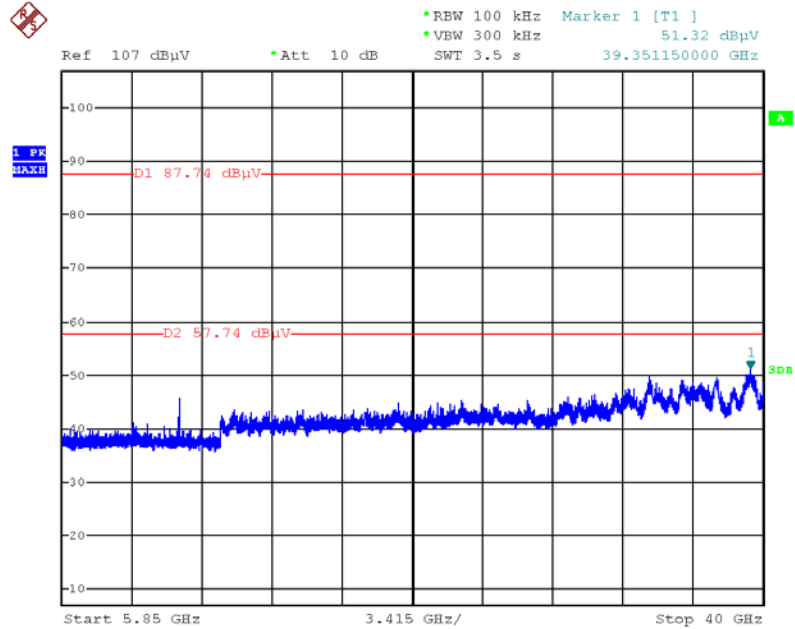


Date: 21.SEP.2013 03:56:58

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Test Mode: Mode 2. EUT 2

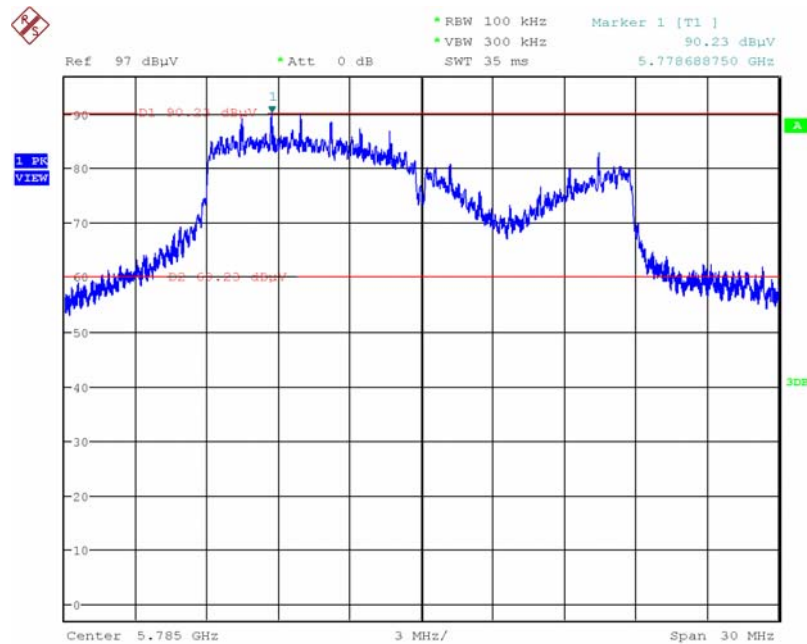


Date: 20.SEP.2013 21:28:26

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2. EUT 2

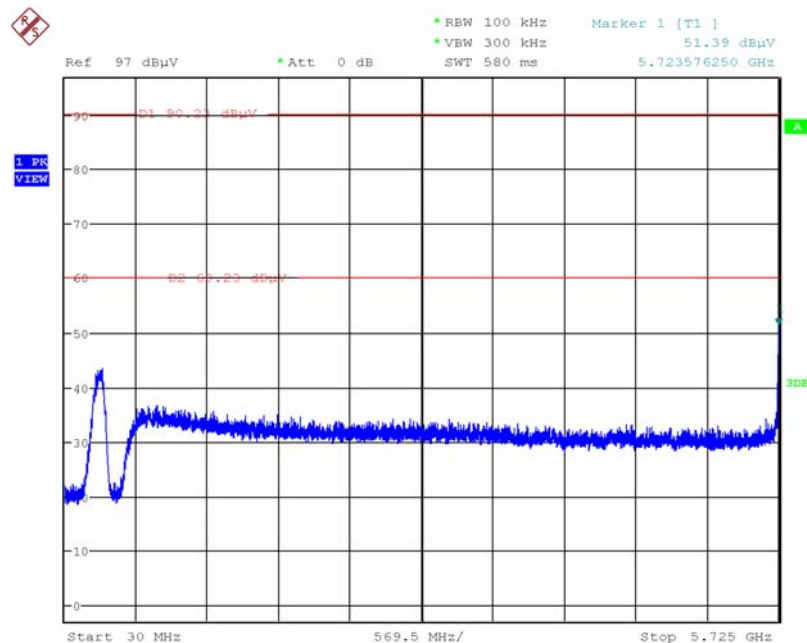


Date: 20.SEP.2013 21:30:16

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc) / Test Mode: Mode 2. EUT 2

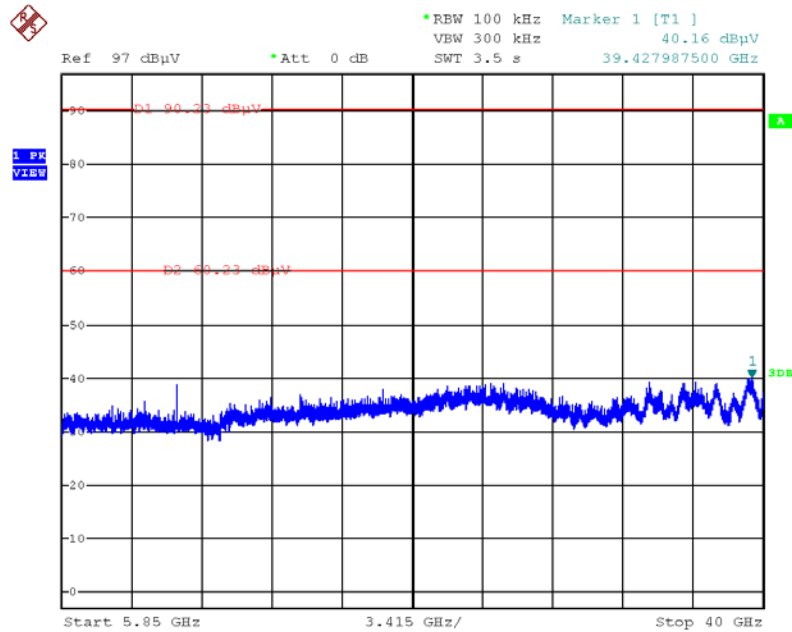


Date: 20.SEP.2013 22:48:39

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2. EUT 2

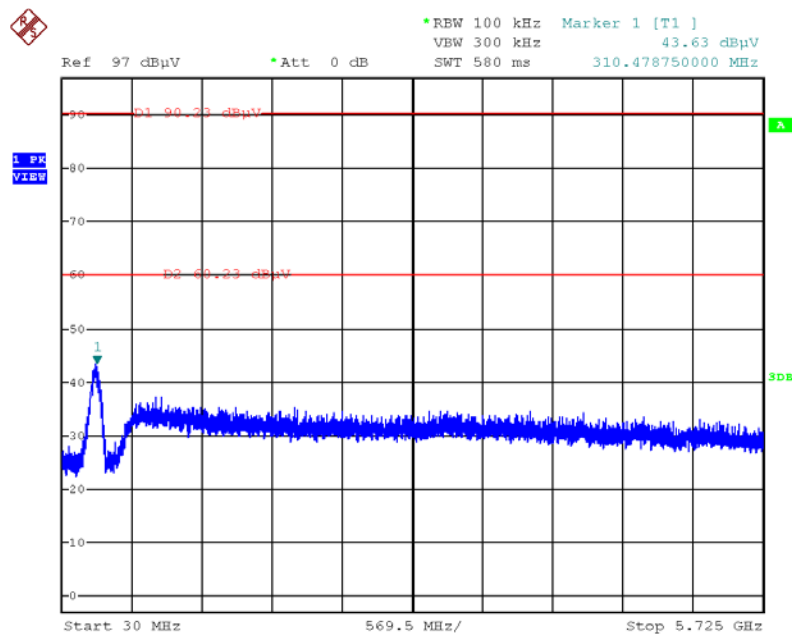


Date: 20.SEP.2013 22:53:38

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc) / Test
Mode: Mode 2. EUT 2

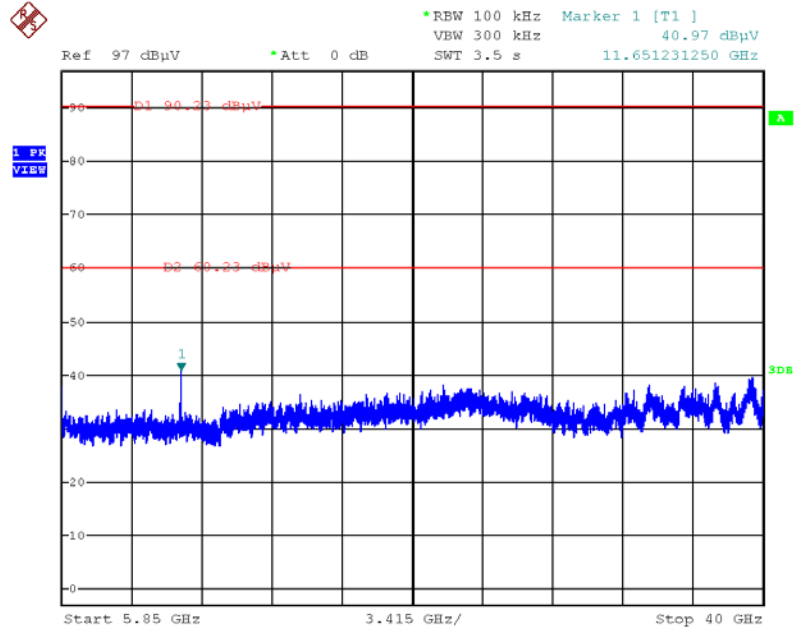


Date: 20.SEP.2013 22:54:42

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Test Mode: Mode 2. EUT 2

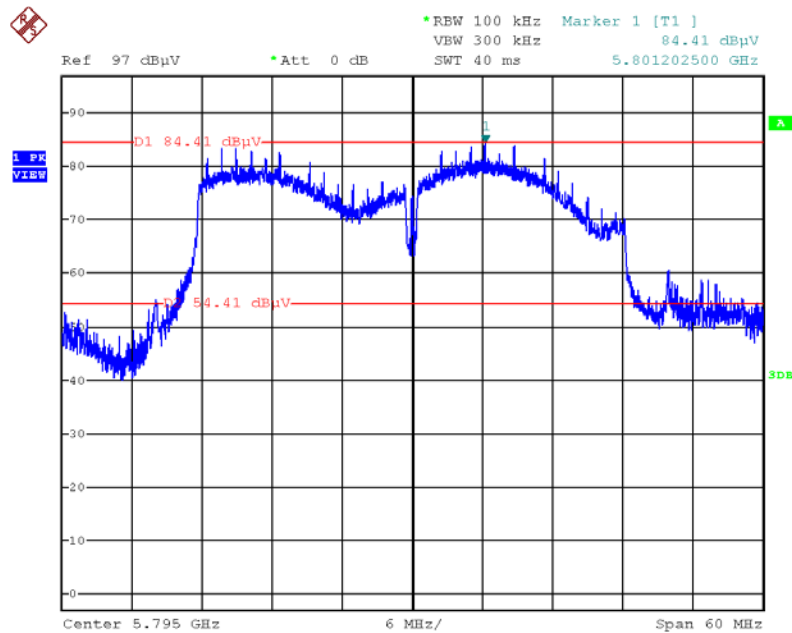

Date: 20.SEP.2013 22:58:47


Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2. EUT 2

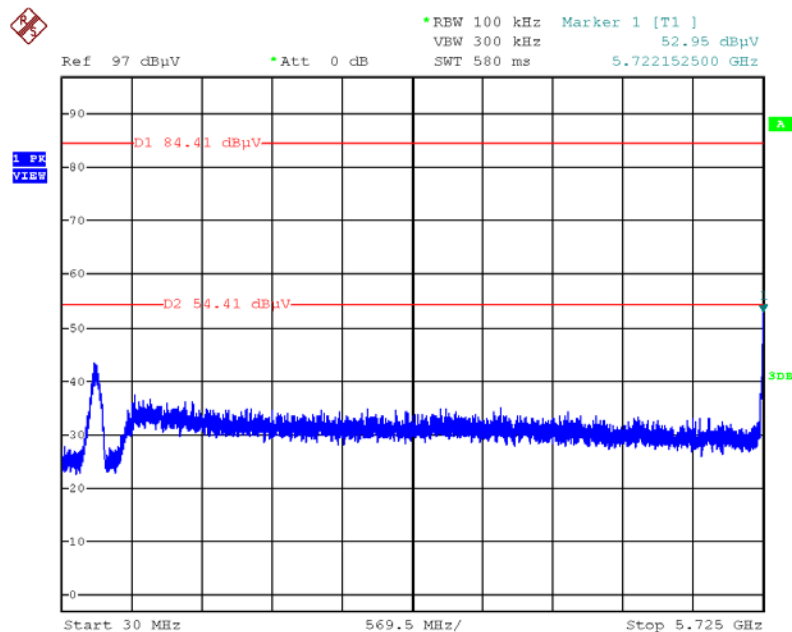

Date: 20.SEP.2013 23:01:36

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc) /


Test Mode: Mode 2. EUT 2

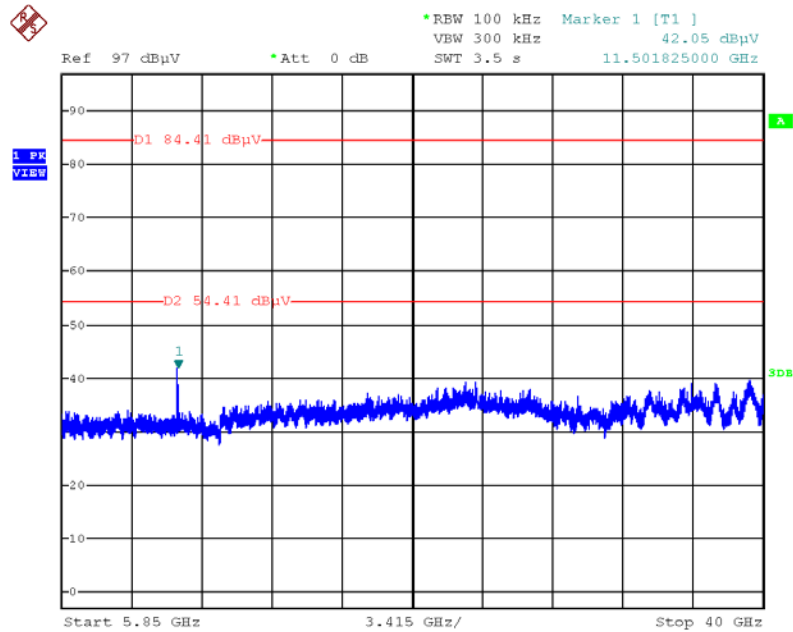

Date: 20.SEP.2013 23:02:19

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc) /


Test Mode: Mode 2. EUT 2

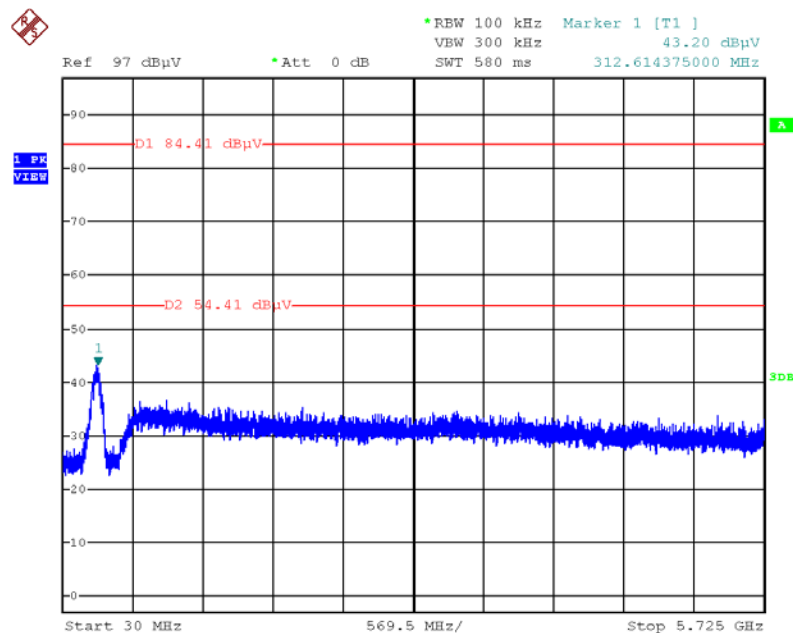

Date: 20.SEP.2013 23:03:14

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc) /

Test Mode: Mode 2. EUT 2

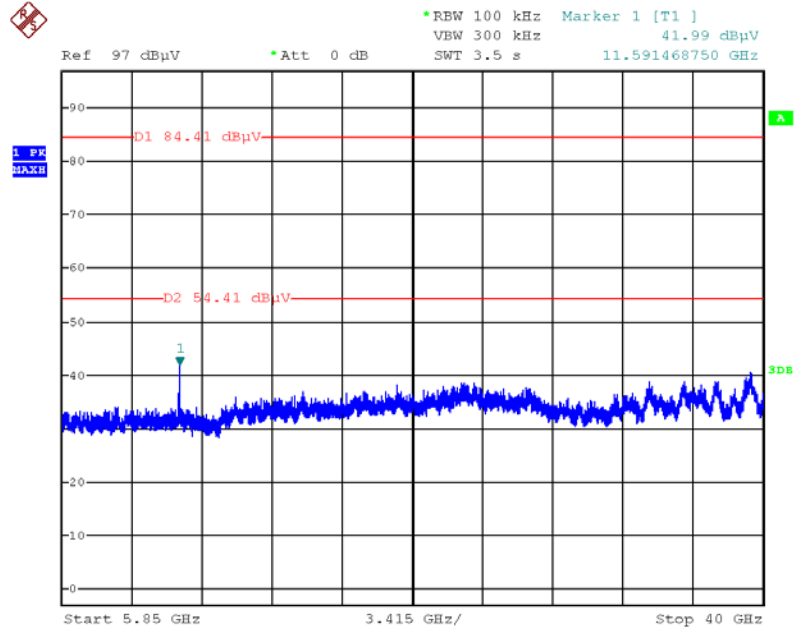

Date: 20.SEP.2013 23:04:06

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO02-CB)
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 30MHz	Dec.25, 2012	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO02-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Oct. 24, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Nov. 26, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	Agilent	N9010A	MY52220519	10Hz~44GHz	Nov. 20, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihsu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.191	dB	K=1	0.095
Cable loss	± 0.169	dB	K=2	0.084
Antenna gain	± 0.191	dB	K=2	0.096
Site imperfection	± 0.582	dB	Triangular	0.291
Pre-amplifier gain	± 0.304	dB	K=2	0.152
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.186	dB	K=1	0.093
Cable loss	± 0.167	dB	K=2	0.083
Antenna gain	± 0.190	dB	K=2	0.095
Site imperfection	± 0.488	dB	Triangular	0.244
Pre-amplifier gain	± 0.269	dB	K=2	0.134
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726