



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	CyberTAN Technology, Inc.
Applicant Address	No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan
FCC ID	N89-KCD01
Manufacturer's company	CyberTAN Technology, Inc.
Manufacturer Address	No. 99, Park Avenue III, Science-based Industrial Park, Hsinchu, 308 Taiwan

Product Name	Assurelink Gateway
Brand Name	Sears
Model No.	221.20000410
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Aug. 04, 2014
Final Test Date	Aug. 20, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.15.4 ZigBee of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	6
3.8. Test Configurations	7
4. TEST RESULT	9
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. Field Strength of Fundamental Emissions Measurement	13
4.3. 20dB Spectrum Bandwidth Measurement	16
4.4. Radiated Emissions Measurement	21
4.5. Band Edge Emissions Measurement	29
4.6. Antenna Requirements	31
5. LIST OF MEASURING EQUIPMENTS	32
6. MEASUREMENT UNCERTAINTY.....	33
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR480456AC	Rev. 01	Initial issue of report	Sep. 02, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : Assurelink Gateway
Brand Name : Sears
Model Name : 221.20000410
Applicant : CyberTAN Technology, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 04, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style with a horizontal line underneath the name.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.58 dB
4.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	17.42 dB
4.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.249(a)/(d)	Radiated Emissions	Complies	0.46 dB
4.5	15.249(d)	Band Edge Emissions	Complies	5.04 dB
4.6	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From power adapter
Modulation	O-QPSK
Data Rate	250kbps
Frequency Range	2400 ~ 2483.5MHz
Operation Frequency Range	2405 ~ 2480MHz
Channel Number	16
Channel Band Width (99%)	4.80 MHz
Max. Field Strength	76.58 dBuV/m at 3m (Average)
Carrier Frequencies	Please refer to section 3.3
Antenna	Please refer to section 3.3


3.2. Accessories

Power	Brand	Model	Rating
Adapter	HK	HK-AO-120A100-US	Input: 100-240Vac, 50/60Hz, 0.35A Output: 12Vdc, 1.0A

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	P/N	Antenna Type	Connector	Gain (dBi)
0	Hong Lin	ZE300-A-SR	290-70085	PCB Antenna	N/A	3.37

Note: The EUT has one antenna of Zigbee function.

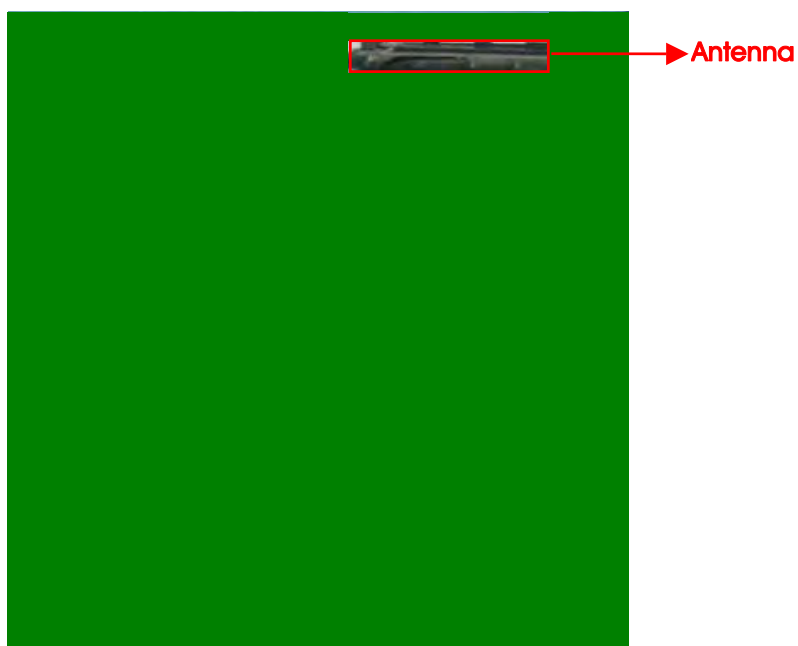

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400 ~ 2483.5MHz	1	2405 MHz
	2	2410 MHz
	:	:
	7	2435 MHz
	8	2440 MHz
	9	2445 MHz
	:	:
	15	2475 MHz
	16	2480 MHz

3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1/8/16	0
Radiated Emissions 30MHz ~ 1GHz	Normal Link	-	-
Radiated Emissions 1GHz~10 th Harmonic	CTX	1/8/16	0
Band Edge Emissions	CTX	1/8/16	0

For Co-location MPE and Radiated Emission Co-location tests:

The EUT could be applied with 2.4GHz WLAN function, LPW function and Zigbee function; therefore Co-location Maximum Permissible Exposure (please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit among 2.4GHz WLAN function, LPW function and Zigbee function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6430	DoC
Wireless AP	Planex	GW-AP54SGX	KA220030603014-1

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For Test Site No: 03CH01-CB (below 1 GHz)


Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	D420	DoC
Wireless AP	greenWAVE	UBW1J1-1A01-GR	N/A

For Test Site No: 03CH01-CB (above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC


3.8. Test Configurations

3.8.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1 GHz Test Configuration

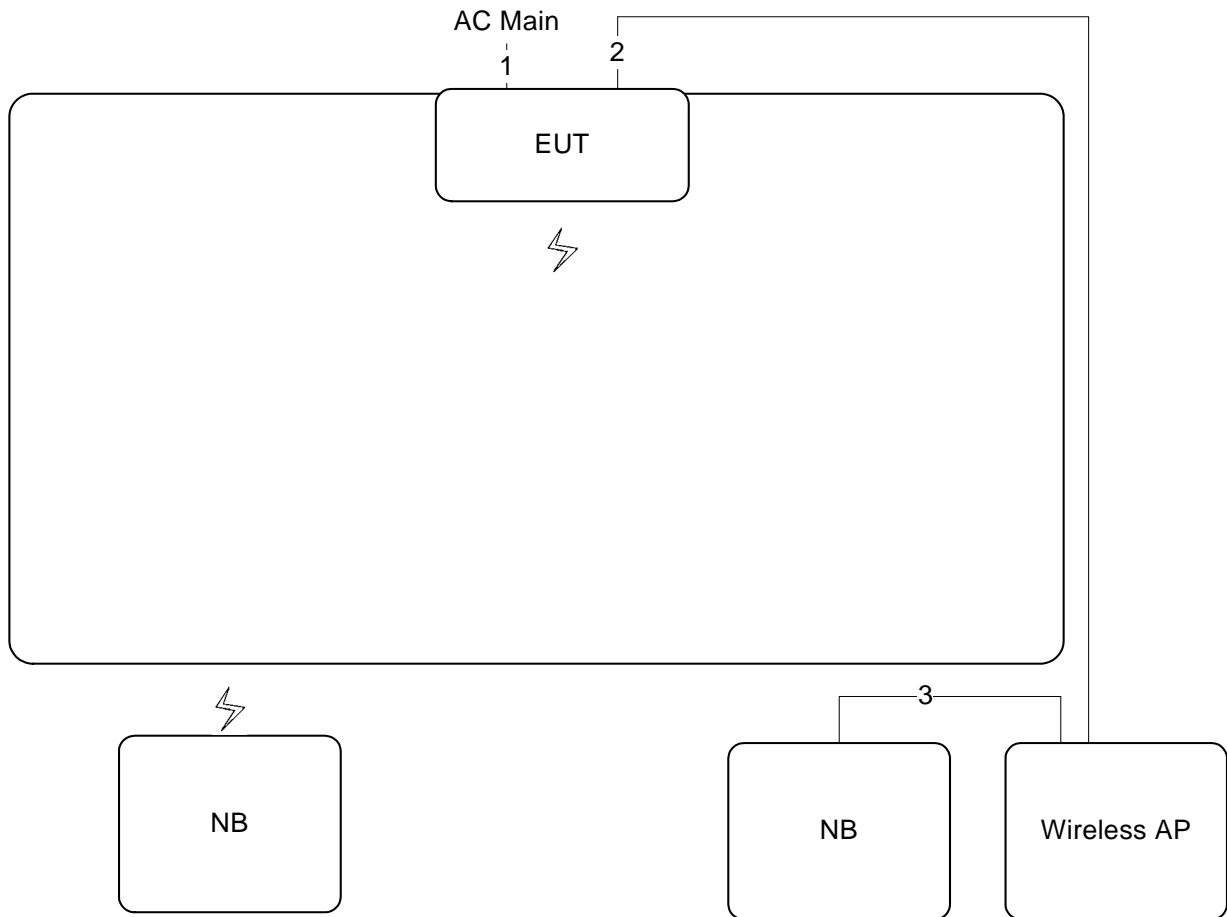

Item	Connection	Shielded	Length
1	Power Cable	No	1.6m
2	RJ-45 Cable	No	10m
3	RJ-45 Cable	No	1m

3.8.2. Radiation Emissions Above 1GHz Test Configuration

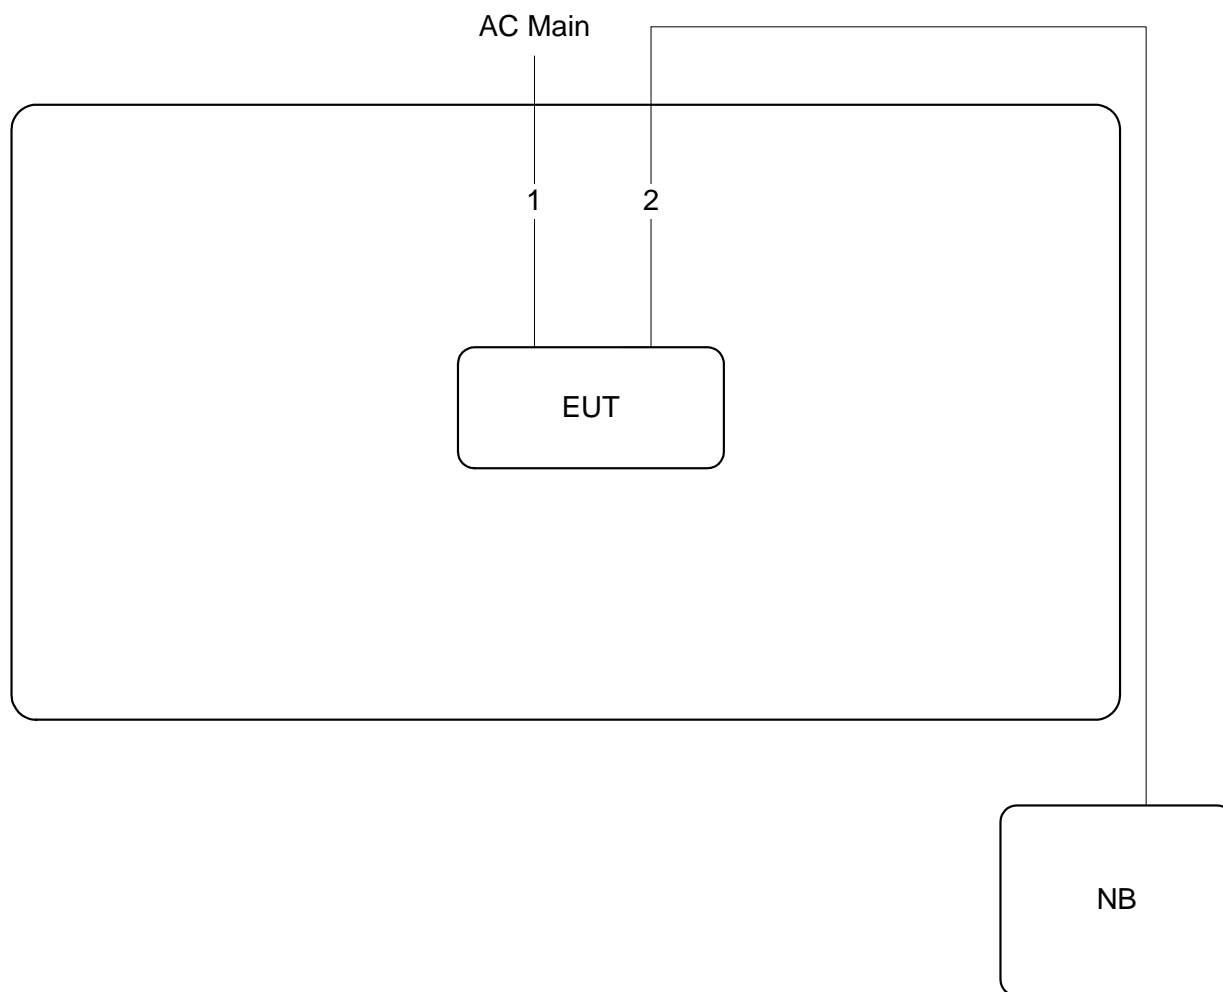

Item	Connection	Shielded	Length
1	Power Cable	No	1.6m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

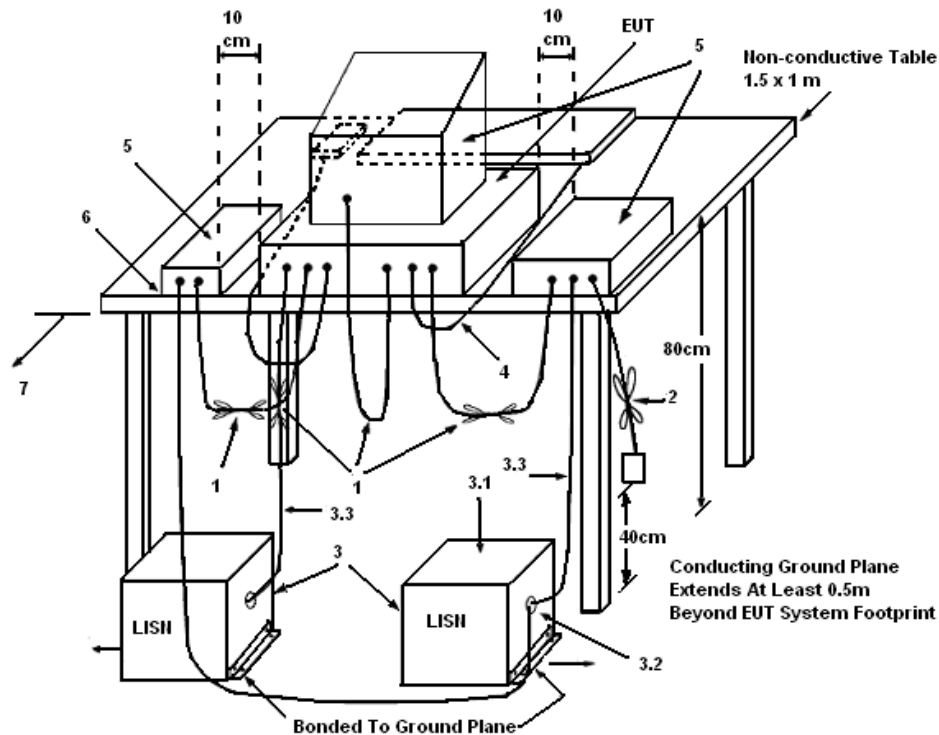

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

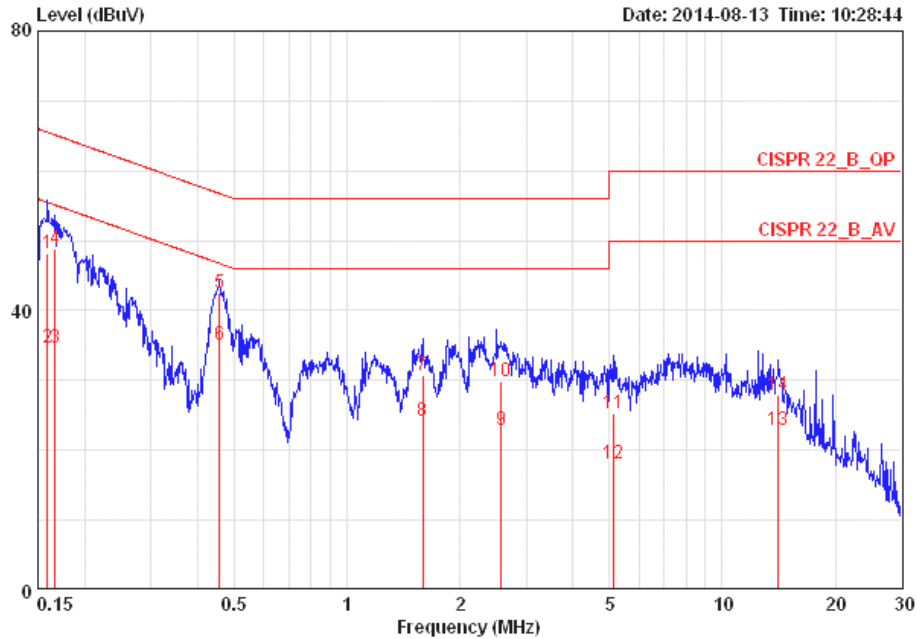

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15900	48.20	-17.32	65.52	0.10	47.94	0.16	LINE	QP
2	0.15900	34.72	-20.80	55.52	0.10	34.46	0.16	LINE	AVERAGE
3	0.16677	34.63	-20.49	55.12	0.10	34.37	0.16	LINE	AVERAGE
4	0.16677	48.92	-16.20	65.12	0.10	48.66	0.16	LINE	QP
5	0.45636	42.53	-14.23	56.76	0.10	42.24	0.18	LINE	QP
6	0.45636	35.18	-11.58	46.76	0.10	34.89	0.18	LINE	AVERAGE
7	1.593	30.74	-25.26	56.00	0.15	30.36	0.23	LINE	QP
8	1.593	24.27	-21.73	46.00	0.15	23.89	0.23	LINE	AVERAGE
9	2.581	22.97	-23.03	46.00	0.18	22.52	0.27	LINE	AVERAGE
10	2.581	29.89	-26.11	56.00	0.18	29.44	0.27	LINE	QP
11	5.112	25.24	-34.76	60.00	0.24	24.67	0.32	LINE	QP
12	5.112	18.18	-31.82	50.00	0.24	17.61	0.32	LINE	AVERAGE
13	14.138	22.85	-27.15	50.00	0.41	22.01	0.44	LINE	AVERAGE
14	14.138	27.90	-32.10	60.00	0.41	27.06	0.44	LINE	QP

Temperature	24°C	Humidity	55%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

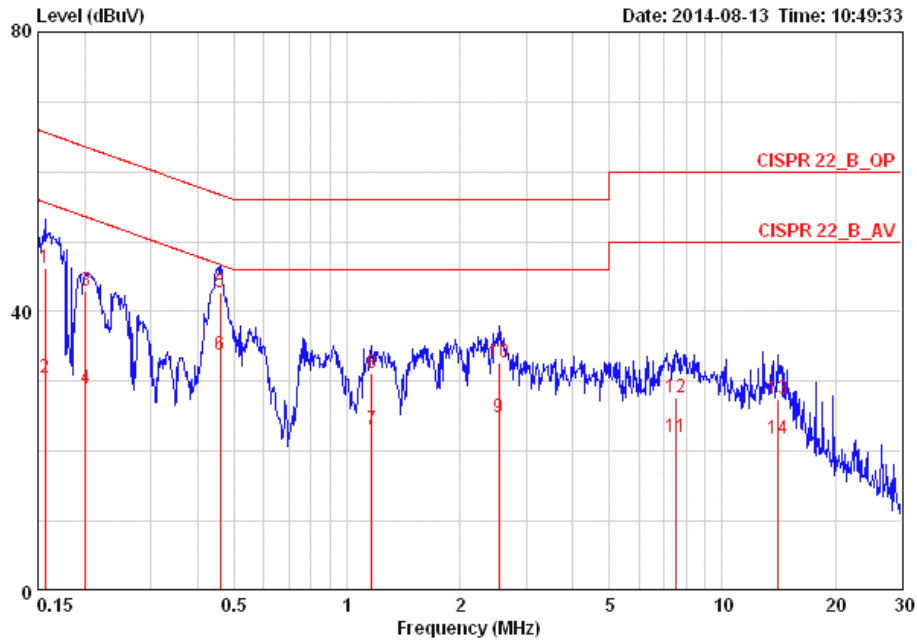

	Freq	Level	Over Limit	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15650	46.17	-19.48	65.65	0.09	45.92	0.16	NEUTRAL	QP
2	0.15650	30.44	-25.21	55.65	0.09	30.19	0.16	NEUTRAL	AVERAGE
3	0.20075	42.84	-20.74	63.58	0.09	42.58	0.17	NEUTRAL	QP
4	0.20075	28.95	-24.63	53.58	0.09	28.69	0.17	NEUTRAL	AVERAGE
5	0.45878	42.76	-13.96	56.71	0.09	42.48	0.18	NEUTRAL	QP
6	0.45878	33.82	-12.90	46.71	0.09	33.54	0.18	NEUTRAL	AVERAGE
7	1.166	23.12	-22.88	46.00	0.12	22.78	0.21	NEUTRAL	AVERAGE
8	1.166	31.25	-24.75	56.00	0.12	30.91	0.21	NEUTRAL	QP
9	2.540	24.83	-21.17	46.00	0.16	24.41	0.27	NEUTRAL	AVERAGE
10	2.540	32.64	-23.36	56.00	0.16	32.22	0.27	NEUTRAL	QP
11	7.526	21.94	-28.06	50.00	0.28	21.30	0.36	NEUTRAL	AVERAGE
12	7.526	27.78	-32.22	60.00	0.28	27.14	0.36	NEUTRAL	QP
13	14.138	27.47	-32.53	60.00	0.38	26.66	0.44	NEUTRAL	QP
14	14.138	21.76	-28.24	50.00	0.38	20.95	0.44	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Field Strength of Fundamental Emissions Measurement

4.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94 (Average)
	114 (Peak)

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RBW	1 MHz Peak / 3MHz Peak
VBW	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

4.2.4. Test Deviation

There is no deviation with the original standard.

4.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.6. Test Result of Field Strength of Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Channel 1/8/16
Test Date	Aug. 15, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2405.02	76.58	114.00	-37.42	80.46	2.92	27.84	34.64	Peak	204	100	HORIZONTAL
2	2405.02	76.58	94.00	-17.42	80.46	2.92	27.84	34.64	Average	204	100	HORIZONTAL

Channel 8

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2440.00	77.00	114.00	-37.00	80.92	2.94	27.78	34.64	Peak	194	100	HORIZONTAL
2	2440.02	76.58	94.00	-17.42	80.50	2.94	27.78	34.64	Average	194	100	HORIZONTAL

Channel 16

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2480.02	65.57	114.00	-48.43	69.52	2.96	27.73	34.64	Peak	148	123	HORIZONTAL
2	2480.02	65.57	94.00	-28.43	69.52	2.96	27.73	34.64	Average	148	123	HORIZONTAL

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.3. 20dB Spectrum Bandwidth Measurement

4.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

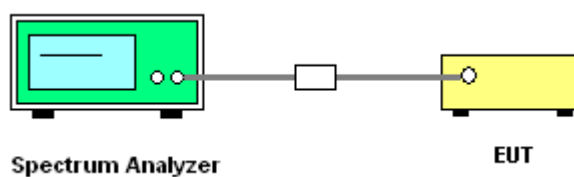

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	25°C	Humidity	64%
Test Engineer	Magic Lai	Configurations	Channel 1/8/16

Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2405 MHz	0.47	0.48	2404.7700	-	Complies
2440 MHz	0.44	0.43	-	-	Complies
2480 MHz	0.35	0.44	-	2480.1800	Complies

20 dB/99% Bandwidth Plot on 2405 MHz

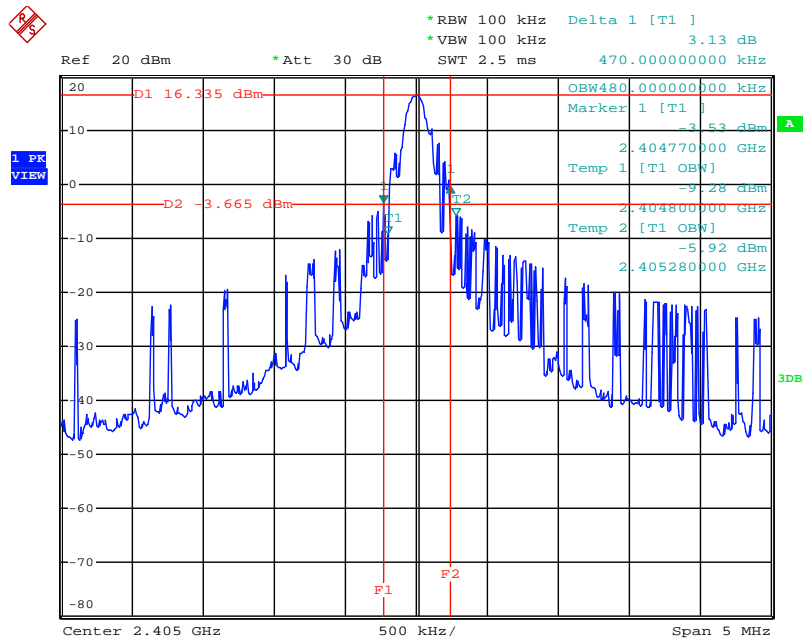


Date: 20.AUG.2014 08:56:10

20 dB/99% Bandwidth Plot on 2440 MHz



Date: 20.AUG.2014 08:58:12

20 dB/99% Bandwidth Plot on 2480 MHz

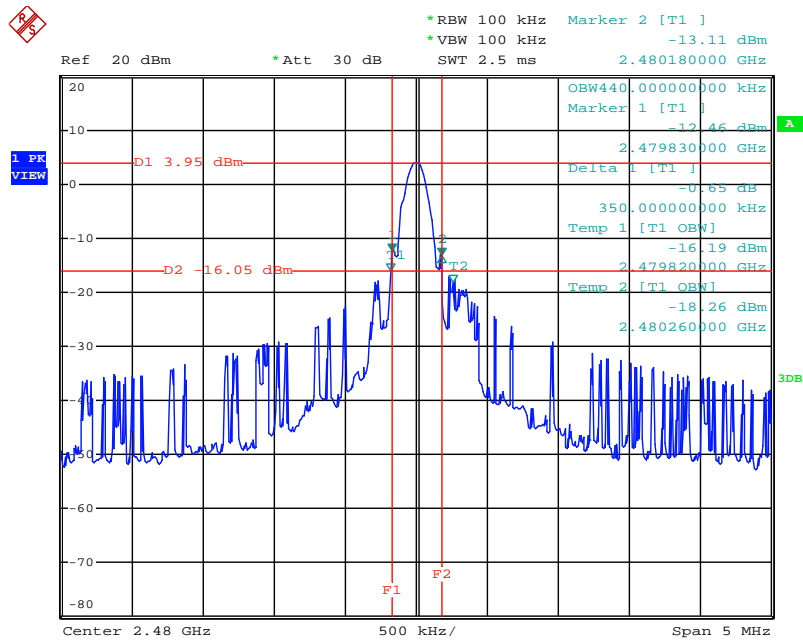

Date: 20.AUG.2014 09:00:30

4.4. Radiated Emissions Measurement

4.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.4.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.4.4. Test Deviation

There is no deviation with the original standard.

4.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Aug. 14, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.4.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Normal Link

Horizontal

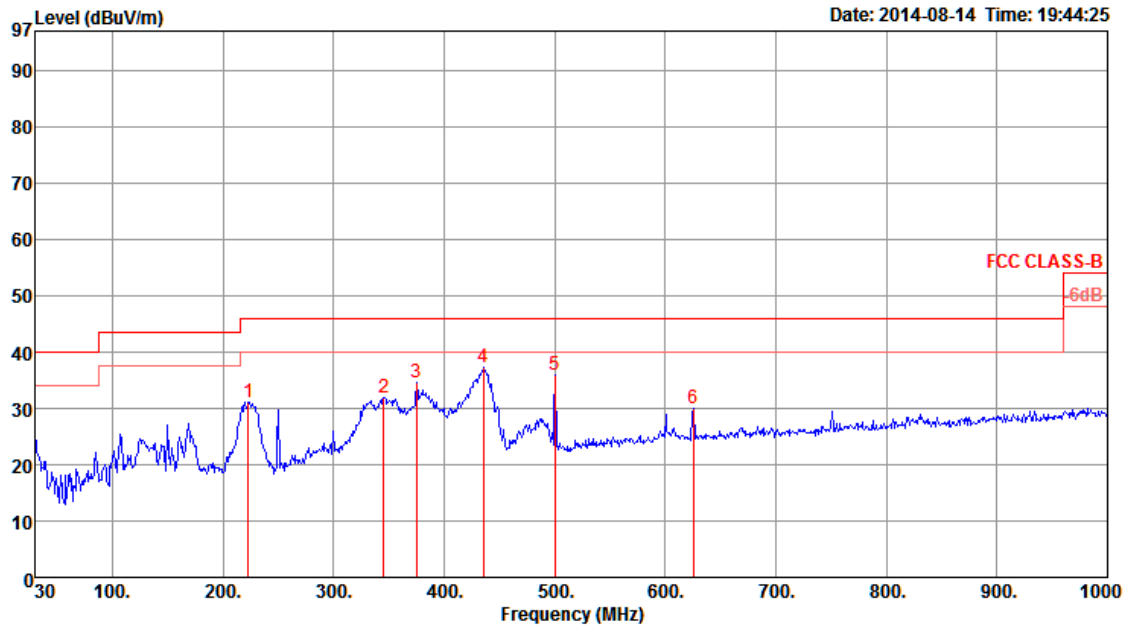

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	223.03	31.02	46.00	-14.98	45.61	1.33	11.17	27.09	Peak	0	100	HORIZONTAL
2	345.25	31.98	46.00	-14.02	41.87	1.71	15.44	27.04	Peak	0	100	HORIZONTAL
3	375.32	34.55	46.00	-11.45	43.96	1.79	16.06	27.26	Peak	0	100	HORIZONTAL
4	435.46	37.16	46.00	-8.84	46.01	1.94	16.93	27.72	Peak	0	100	HORIZONTAL
5	500.45	35.88	46.00	-10.12	43.91	2.10	17.80	27.93	Peak	0	100	HORIZONTAL
6	625.58	30.05	46.00	-15.95	35.41	2.42	19.80	27.58	Peak	0	100	HORIZONTAL

Vertical

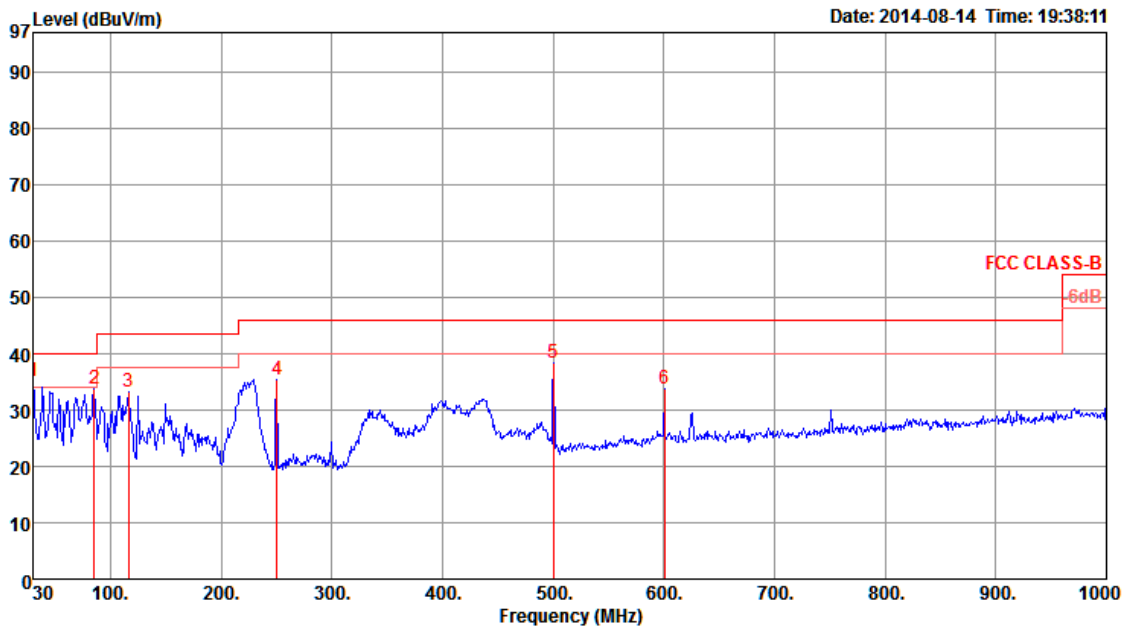

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	30.00	35.25	40.00	-4.75	42.92	0.40	19.90	27.97	Peak	0	400	VERTICAL
2	85.29	33.69	40.00	-6.31	52.31	0.77	8.50	27.89	Peak	0	400	VERTICAL
3	116.33	33.22	43.50	-10.28	47.40	0.92	12.60	27.70	Peak	0	400	VERTICAL
4	250.19	35.47	46.00	-10.53	47.82	1.40	13.20	26.95	Peak	0	400	VERTICAL
5	500.45	38.29	46.00	-7.71	46.32	2.10	17.80	27.93	Peak	0	400	VERTICAL
6	600.36	33.71	46.00	-12.29	39.35	2.36	19.60	27.60	Peak	0	400	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.4.8. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Channel 1
Test Date	Aug. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4809.98	51.82	54.00	-2.18	47.81	5.85	33.36	35.20	Average	270	44	HORIZONTAL
2	4810.02	54.30	74.00	-19.70	50.29	5.85	33.36	35.20	Peak	270	44	HORIZONTAL
3	7214.87	54.20	74.00	-19.80	46.16	7.08	36.35	35.39	Peak	242	270	HORIZONTAL
4	7214.99	49.31	54.00	-4.69	41.27	7.08	36.35	35.39	Average	242	270	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4810.01	50.29	54.00	-3.71	46.28	5.85	33.36	35.20	Average	101	344	VERTICAL
2	4810.07	55.28	74.00	-18.72	51.27	5.85	33.36	35.20	Peak	101	344	VERTICAL
3	7184.99	53.50	54.00	-0.50	45.53	7.06	36.29	35.38	Average	112	73	VERTICAL
4	7214.99	56.77	74.00	-17.23	48.73	7.08	36.35	35.39	Peak	112	73	VERTICAL



Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Channel 8
Test Date	Aug. 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4879.95	52.92	74.00	-21.08	48.72	5.92	33.48	35.20	Peak	100	297	HORIZONTAL
2	4880.01	49.18	54.00	-4.82	44.98	5.92	33.48	35.20	Average	100	297	HORIZONTAL
3	7319.99	45.99	54.00	-8.01	37.77	7.14	36.51	35.43	Average	100	292	HORIZONTAL
4	7320.01	52.78	74.00	-21.22	44.56	7.14	36.51	35.43	Peak	100	292	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4879.97	53.54	54.00	-0.46	49.34	5.92	33.48	35.20	Average	137	223	VERTICAL
2	4880.03	56.23	74.00	-17.77	52.03	5.92	33.48	35.20	Peak	137	223	VERTICAL
3	7319.85	56.19	74.00	-17.81	47.97	7.14	36.51	35.43	Peak	104	63	VERTICAL
4	7320.00	52.28	54.00	-1.72	44.06	7.14	36.51	35.43	Average	104	63	VERTICAL



Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Channel 16
Test Date	Aug. 14, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4960.03	34.17	54.00	-19.83	31.88	3.37	33.83	34.91	Average	100	7	HORIZONTAL
2	4960.08	45.23	74.00	-28.77	42.94	3.37	33.83	34.91	Peak	100	7	HORIZONTAL
3	7439.23	35.35	54.00	-18.65	29.52	4.07	36.98	35.22	Average	100	33	HORIZONTAL
4	7440.64	48.12	74.00	-25.88	42.29	4.07	36.98	35.22	Peak	100	33	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.69	45.33	74.00	-28.67	43.04	3.37	33.83	34.91	Peak	100	301	VERTICAL
2	4959.99	35.68	54.00	-18.32	33.39	3.37	33.83	34.91	Average	100	301	VERTICAL
3	7439.02	35.25	54.00	-18.75	29.42	4.07	36.98	35.22	Average	100	217	VERTICAL
4	7440.61	47.70	74.00	-26.30	41.87	4.07	36.98	35.22	Peak	100	217	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5. Band Edge Emissions Measurement

4.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak

4.5.3. Test Procedures

1. The test procedure is the same as section 4.4.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.5.4. Test Deviation

There is no deviation with the original standard.

4.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.6. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	YC Chen	Configurations	Channel 1, 8, 16
Test Date	Aug. 14, 2014 / Aug. 15, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.28	68.96	74.00	-5.04	36.82	4.09	28.05	0.00	Peak	100	105	HORIZONTAL
2	2390.00	47.66	54.00	-6.34	15.52	4.09	28.05	0.00	Average	100	105	HORIZONTAL
3	2405.00	107.87			75.67	4.11	28.09	0.00	Average	100	105	HORIZONTAL
4	2405.00	108.34			76.14	4.11	28.09	0.00	Peak	100	105	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2405 MHz.

Channel 8

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.40	61.51	74.00	-12.49	29.37	4.09	28.05	0.00	Peak	122	114	HORIZONTAL
2	2390.00	47.65	54.00	-6.35	15.51	4.09	28.05	0.00	Average	122	114	HORIZONTAL
3	2440.00	107.32			75.01	4.13	28.18	0.00	Average	122	114	HORIZONTAL
4	2440.00	107.77			75.46	4.13	28.18	0.00	Peak	122	114	HORIZONTAL
5	2483.50	48.14	54.00	-5.86	15.72	4.16	28.26	0.00	Average	122	114	HORIZONTAL
6	2483.82	59.07	74.00	-14.93	26.65	4.16	28.26	0.00	Peak	122	114	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2440 MHz.

Channel 16

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	94.04			63.11	2.26	28.67	0.00	Average	115	54	HORIZONTAL
2	2480.00	94.73			63.80	2.26	28.67	0.00	Peak	115	54	HORIZONTAL
3	2483.50	44.68	54.00	-9.32	13.75	2.26	28.67	0.00	Average	115	54	HORIZONTAL
4	2485.90	57.29	74.00	-16.71	26.36	2.26	28.67	0.00	Peak	115	54	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Antenna Requirements

4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.6.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%