


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	Kenneth Huang	Configurations	Bluetooth + 5GHz

Horizontal

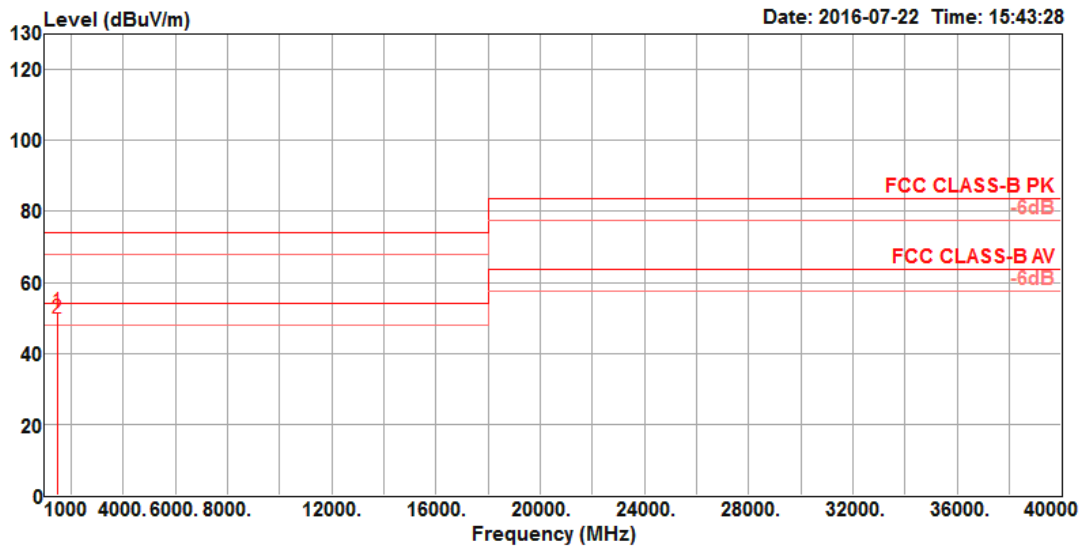

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1499.94	51.65	74.00	-22.35	56.74	3.82	25.30	34.21	100	232 Peak	HORIZONTAL
2	1500.00	49.75	54.00	-4.25	54.84	3.82	25.30	34.21	100	232 Average	HORIZONTAL

Vertical

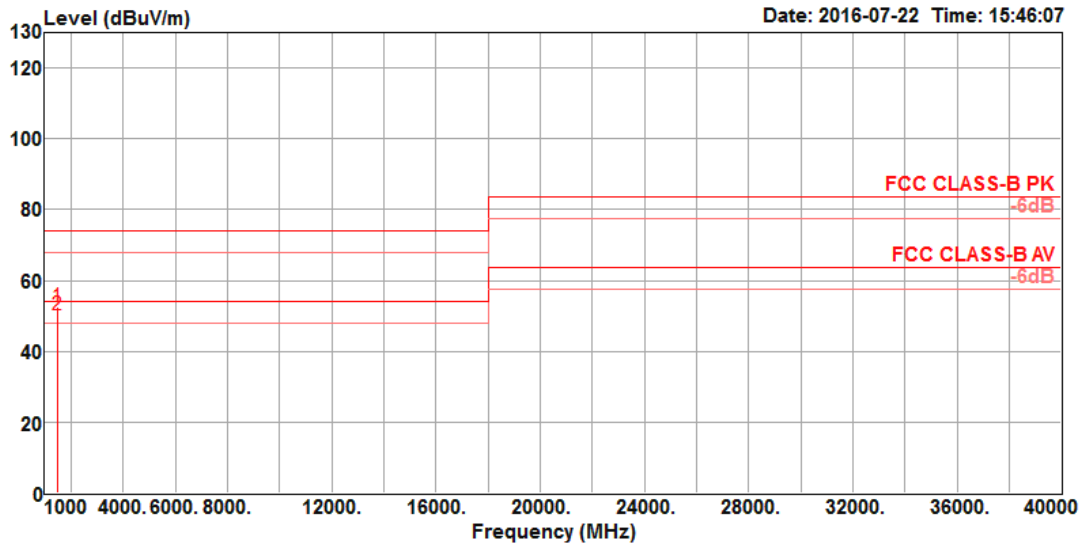

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1499.94	52.71	74.00	-21.29	57.80	3.82	25.30	34.21	100	270 Peak	VERTICAL
2	1500.00	50.13	54.00	-3.87	55.22	3.82	25.30	34.21	100	270 Average	VERTICAL