

FCC Part 15B




Measurement and Test Report

For

Cross Point b.v.

Waanderweg 12, Emmen, 7812 HZ, Netherlands

FCC ID: N9G-CP301FORRX

FCC Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Electronic Article Surveillance(EAS) Pedestal</u>
Tested Model:	<u>FORTUS AM40 Receiver</u>
Report No.:	<u>STR18108286I</u>
Sample Receipt Date:	<u>2018-10-30</u>
Tested Date:	<u>2018-10-31 to 2018-11-07</u>
Issued Date:	<u>2018-11-07</u>
Tested By:	<u>Long Tang / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.



TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY4

1.4 TEST FACILITY4

1.5 EUT SETUP AND OPERATION MODE5

1.6 MEASUREMENT UNCERTAINTY5

1.7 TEST EQUIPMENT LIST AND DETAILS6

2. SUMMARY OF TEST RESULTS7

3. ANTENNA REQUIREMENT8

3.1 STANDARD APPLICABLE.....8

3.2 TEST RESULT.....8

4. RADIATED EMISSION9

4.1 STANDARD APPLICABLE.....9

4.2 TEST PROCEDURE.....9

4.3 TEST RECEIVER SETUP9

4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....10

4.5 ENVIRONMENTAL CONDITIONS10

4.6 SUMMARY OF TEST RESULTS/PLOTS10

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Cross Point b.v.
Address of applicant: Waanderweg 12, Emmen, 7812 HZ, Netherlands

Manufacturer: Cross Point b.v.
Address of manufacturer: Waanderweg 12, Emmen, 7812 HZ, Netherlands

General Description of EUT	
Product Name:	Electronic Article Surveillance(EAS) Pedestal
Trade Name:	/
Model No.:	FORTUS AM40 Receiver
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC32.5V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	Input: 230VAC 50-60Hz 500mA/ 115VAC 50-60Hz 1A Output: 32.5VDC 1.6A + synchronization signal
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B: Unintentional Radiators

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Working	32.5V DC	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21



2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203 Antenna Requirement	Compliant
§15.107 (a) Conducted Emission	N/A
§15.109(a) Radiated Emission	Compliant

N/A: not applicable

*Remark: The AC Line Conducted Emissions testing is exempted because it is powered by the transmitter via Manufacturer's protocol.



3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has two integral antennas, fulfill the requirement of this section.

4. RADIATED EMISSION

4.1 Standard Applicable

According to 15.109(a) Radiated emission limits; general requirements.


Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

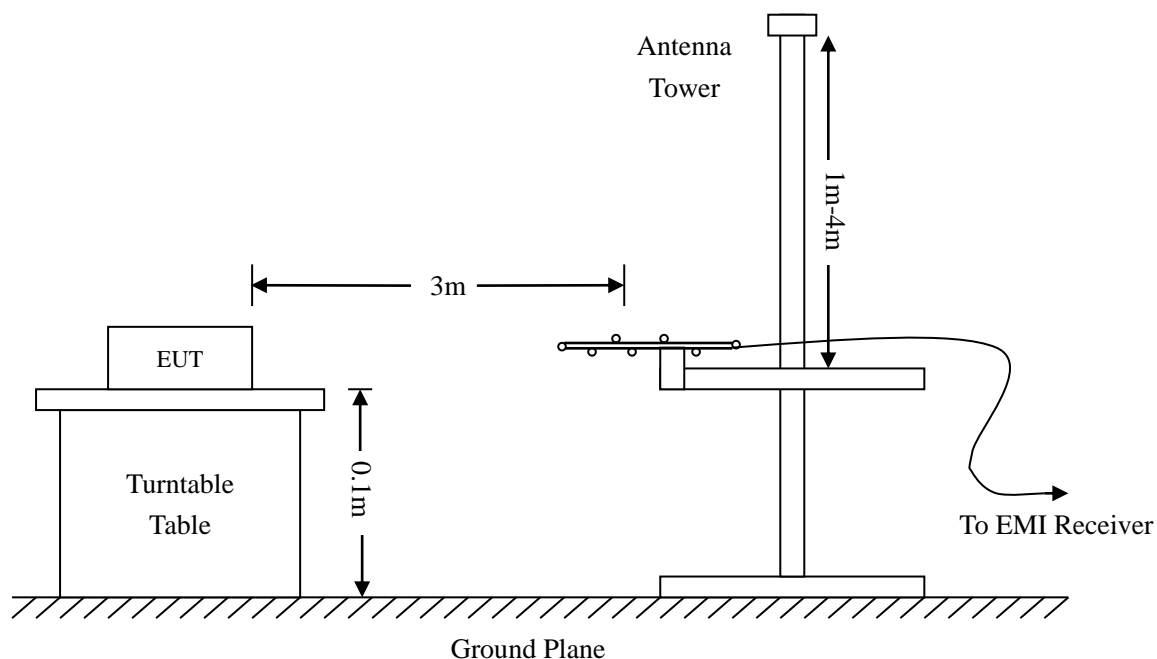

4.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz,

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$


4.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results/Plots


➤ 30MHz to 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

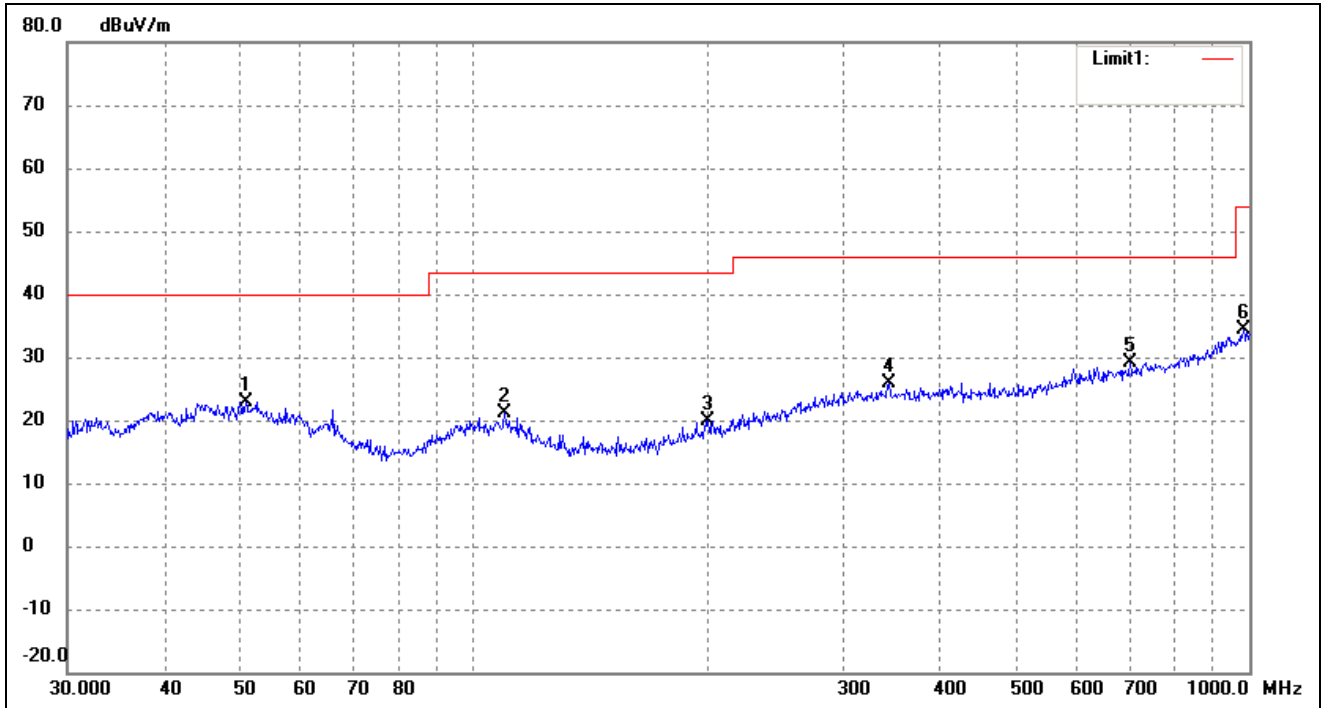

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.9420	35.79	-12.87	22.92	40.00	-17.08	359	100	QP
2	109.7960	34.94	-13.92	21.02	43.50	-22.48	93	100	QP
3	200.6881	32.00	-12.13	19.87	43.50	-23.63	185	100	QP
4	343.1800	32.47	-6.51	25.96	46.00	-20.04	115	100	QP
5	701.7610	31.77	-2.59	29.18	46.00	-16.82	178	100	QP
6	982.6200	30.57	3.77	34.34	54.00	-19.66	256	100	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

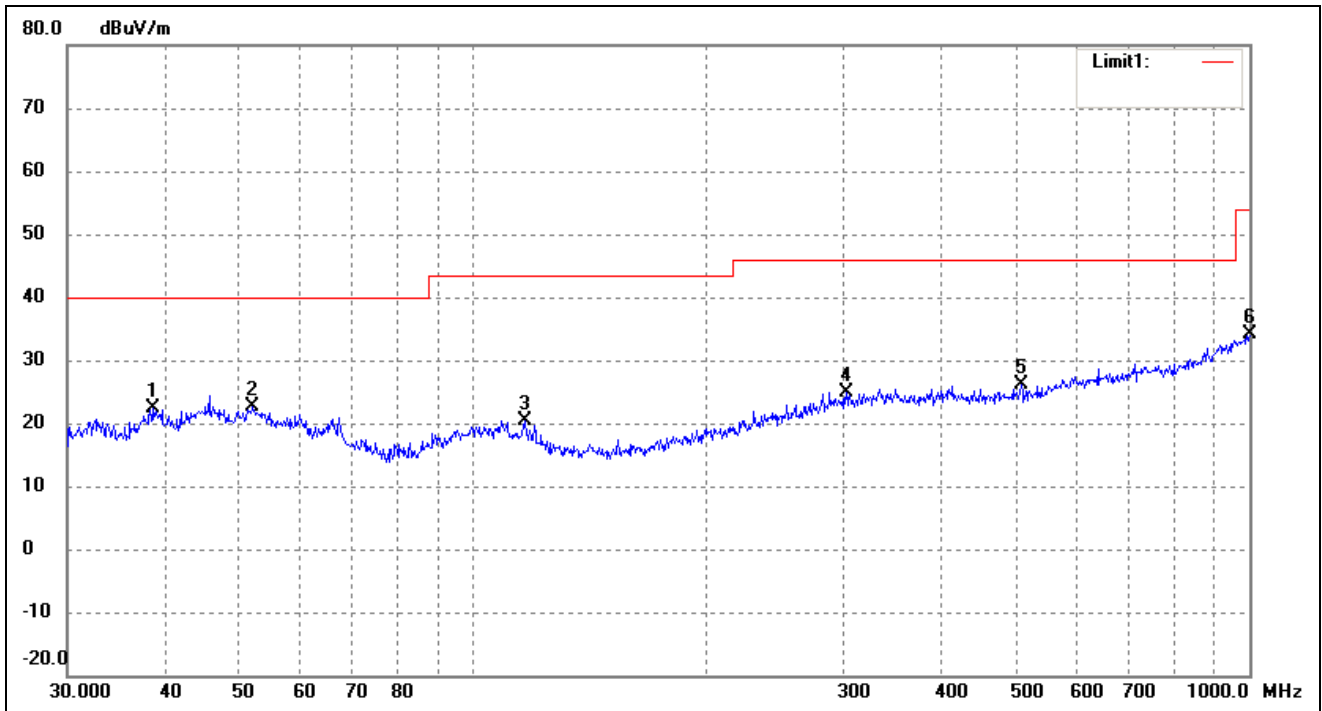

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.6160	36.61	-14.33	22.28	40.00	-17.72	92	100	QP
2	52.0251	35.35	-12.80	22.55	40.00	-17.45	124	100	QP
3	116.5401	35.49	-15.00	20.49	43.50	-23.01	60	100	QP
4	302.4812	32.35	-7.37	24.98	46.00	-21.02	329	100	QP
5	508.2582	32.05	-5.97	26.08	46.00	-19.92	119	100	QP
6	1000.0000	30.09	4.04	34.13	54.00	-19.87	245	100	QP

***** END OF REPORT *****