

FCC Part 15C Measurement and Test Report

For

Smart Technologies & Investment Ltd.

21/F., Fun Tower, No. 35 Hung To Road, Kwun Tong, Kowloon, Hong Kong

FCC ID: N9KSMARTSD2737

FCC Rule(s):	<u>FCC Part 15.231e</u>	
Product Description:	<u>Pet Immune Motion Sensor</u>	
Tested Model:	<u>WS103PS</u>	
Report No.:	<u>STR15118151I</u>	
Tested Date:	<u>2015-11-10 to 2015-11-23</u>	
Issued Date:	<u>2015-11-23</u>	
Tested By:	<u>Jason Su / Engineer</u>	<i>Jason Su</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u>	<i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>	<i>Jandyso</i>
Prepared By:		

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 TEST EQUIPMENT LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
3. ANTENNA REQUIREMENT	7
3.1 STANDARD APPLICABLE	7
3.2 TEST RESULT	7
4. RADIATED EMISSIONS	8
4.1 MEASUREMENT UNCERTAINTY	8
4.2 STANDARD APPLICABLE	8
4.3 TEST PROCEDURE	9
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	10
4.5 ENVIRONMENTAL CONDITIONS	10
4.6 SUMMARY OF TEST RESULTS/PLOTS	10
5. 20DB BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST PROCEDURE	13
5.3 ENVIRONMENTAL CONDITIONS	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. TRANSMISSION TIME	15
6.1 STANDARD APPLICABLE	15
6.2 TEST PROCEDURE	15
6.3 ENVIRONMENTAL CONDITIONS	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. DUTY CYCLE	17
7.1 STANDARD APPLICABLE	17
7.2 TEST PROCEDURE	17
7.3 ENVIRONMENTAL CONDITIONS	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Smart Technologies & Investment Ltd.
Address of applicant: 21/F., Fun Tower, No. 35 Hung To Road, Kwun Tong, Kowloon, Hong Kong
Manufacturer: Smart Electronic Industrial (Dong Guan) Co., Ltd.
Address of manufacturer: Qing Long Road, Long Jian Tian-Cun, Huang Jiang-Zhen, Dong Guan, Guang Dong, China

General Description of EUT	
Product Name:	Pet Immune Motion Sensor
Trade Name:	/
Model No.:	WS103PS
Adding Model(s):	/
Rated Voltage:	Battery DC 3V
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	433.92 MHz
Max. Field Strength:	83.24 dBuV/m (at 3m distance)
Modulation:	FSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	32.768KHz
Device Category:	Fixed Device

1.2 Test Standards

The following report is prepared on behalf of the Smart Technologies & Investment Ltd in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	With modulation

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(e)	Deactivation Testing	Compliant
§15.231(e)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to §15.231(e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emission (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

** linear interpolations



The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.231(e) and FCC Part 15.209 Limit.

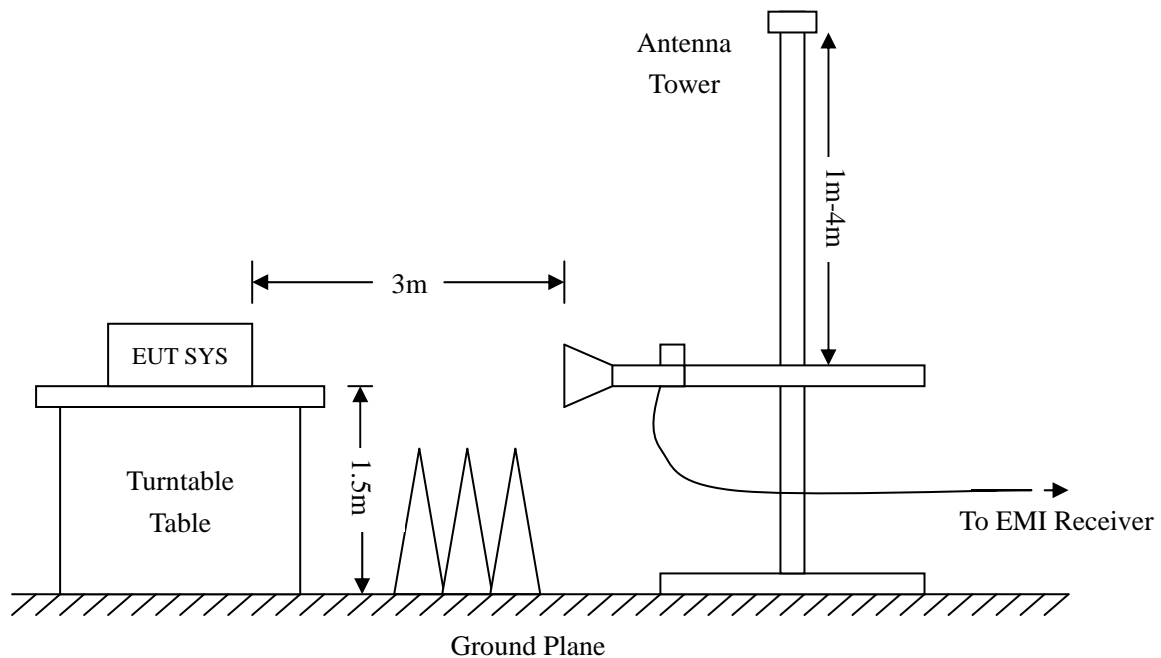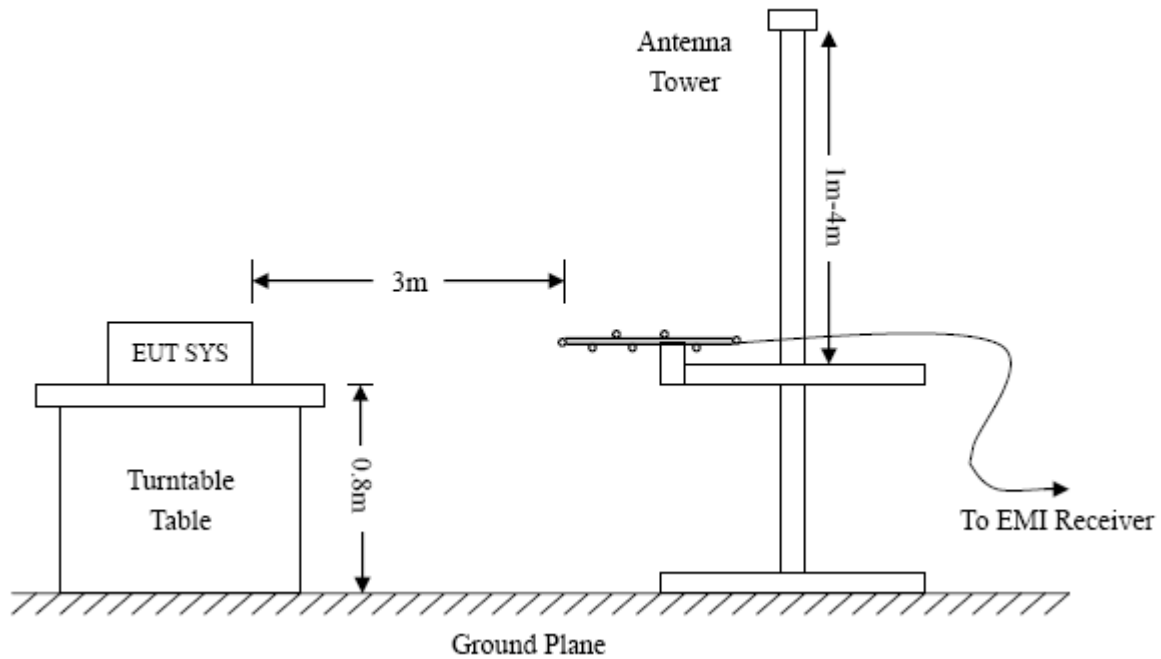

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.5 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

4.6 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

-5.81 dB at 258.3264MHz in the Horizontal polarization, Peak Detector, 9 kHz to 5 GHz, 3 Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data

EUT: *Pet Immune Motion Sensor*
 Tested Model: *WS103PS*
 Operating Condition: *Transmitting*
 Comment: *Battery DC3V*
 Test Specification: *Horizontal*

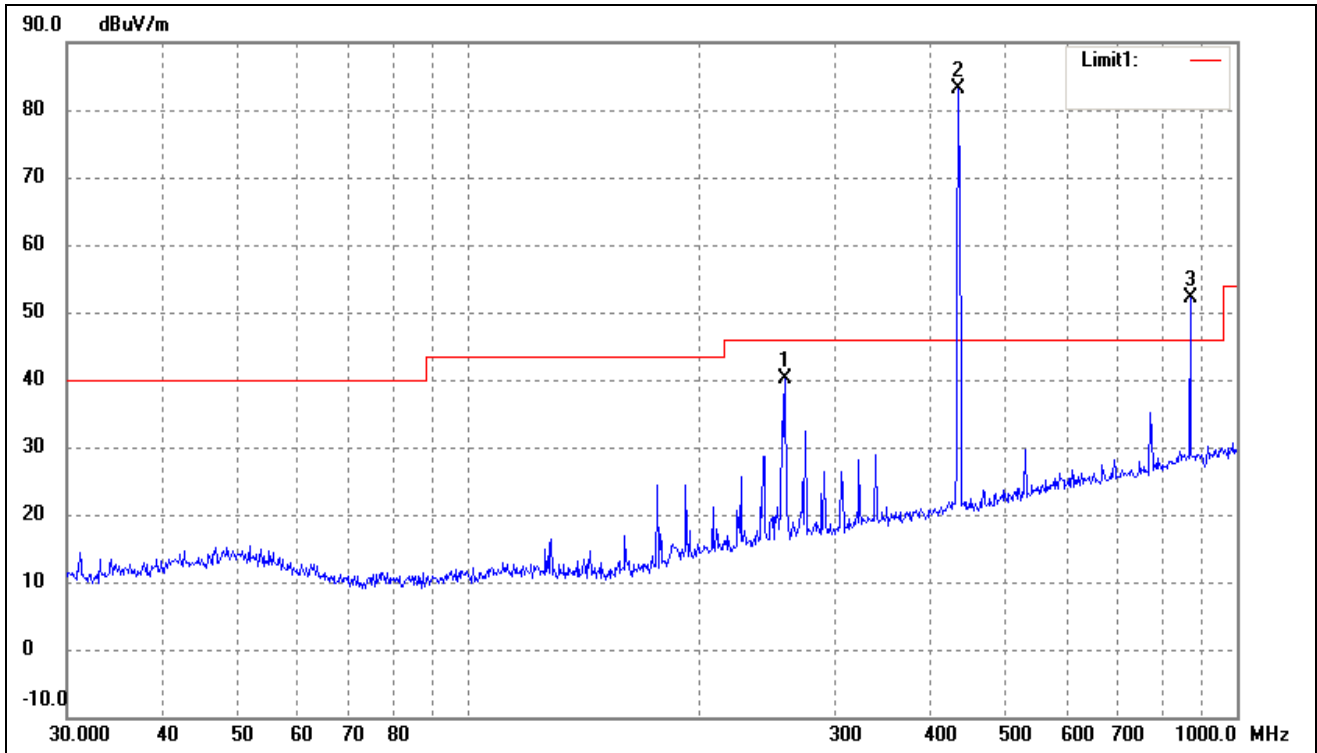


No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	258.3264	46.68	-6.49	N/A	40.19	46.00	-5.81	49	100	peak
2	433.9200	85.43	-2.19	N/A	83.24	92.87	-9.63	154	100	peak
	433.9200	/	/	-19.84	63.40	72.87	-9.47	54	100	Ave
3	867.8400	47.19	-2.19	N/A	52.14	72.87	-20.73	125	100	peak
	867.8400	/	/	-19.84	32.30	52.87	-20.57	98	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	27.31	26.95	N/A	54.26	74.00	-19.74	45	100	Peak
2	1735.680	27.64	27.77	N/A	55.41	74.00	-18.59	102	100	Peak
	1301.760	/	/	-19.84	34.42	54.00	-19.58	65	100	Ave
	1735.680	/	/	-19.84	35.57	54.00	-18.43	98	100	Ave

Test Specification: Vertical

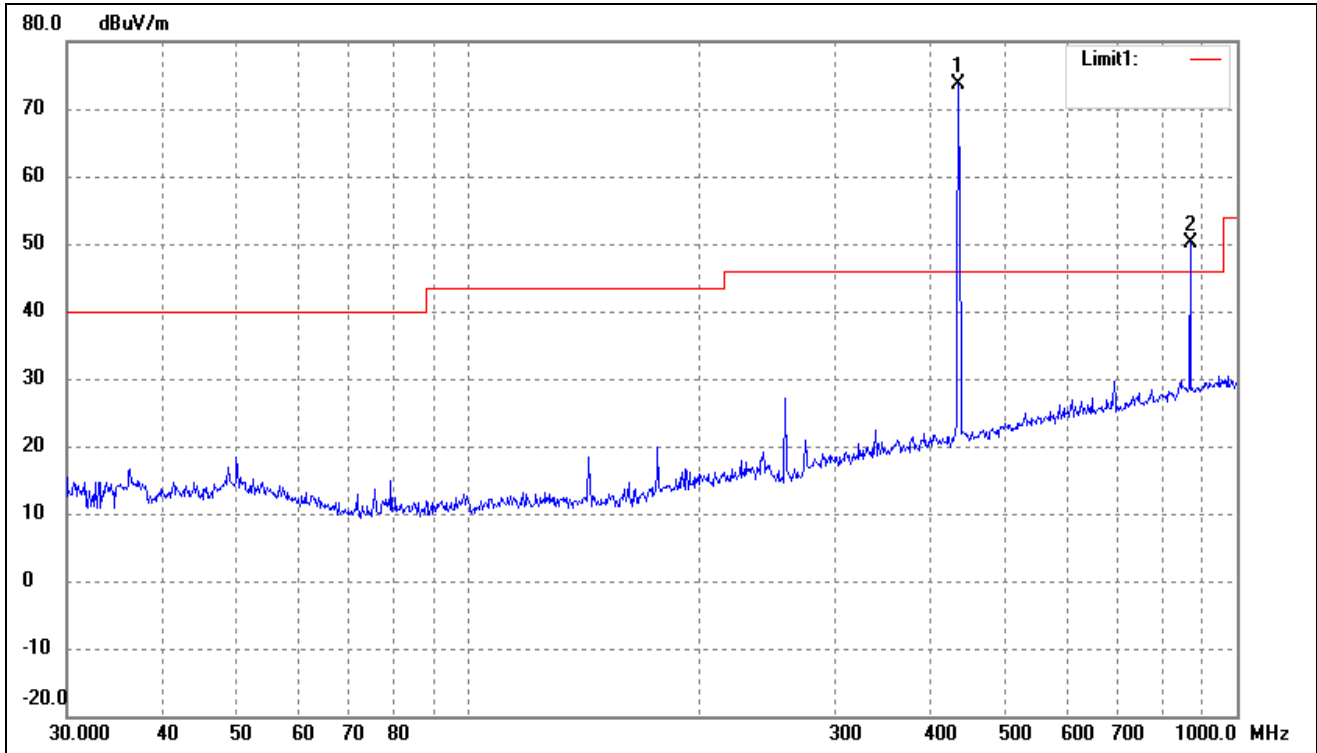

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	433.9200	75.93	-2.19	N/A	73.74	92.87	-12.21	156	100	peak
	433.9200	/	/	-19.84	53.90	72.87	-18.97	98	100	Ave
2	867.8400	45.40	4.63	N/A	50.03	72.87	-16.83	165	100	peak
	867.8400	/	/	-19.84	30.19	52.87	-22.68	201		Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.760	27.31	26.95	N/A	47.39	74.00	-19.74	265	100	Peak
2	1735.680	27.64	27.77	N/A	50.96	74.00	-18.59	15	100	Peak
	1301.760	/	/	-19.84	27.55	54.00	-26.45	98	100	Ave
	1735.680	/	/	-19.84	31.12	54.00	-22.88	125	100	Ave

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.

5. 20dB Bandwidth

5.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.2 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

5.3 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


5.4 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.92	1049	1084	Pass

Limit = Fundamental Frequency X 0.25% = 433.92 MHz X 0.25% = 1084 kHz

Please refer to the attached plots.

20dB Bandwidth Test Plot

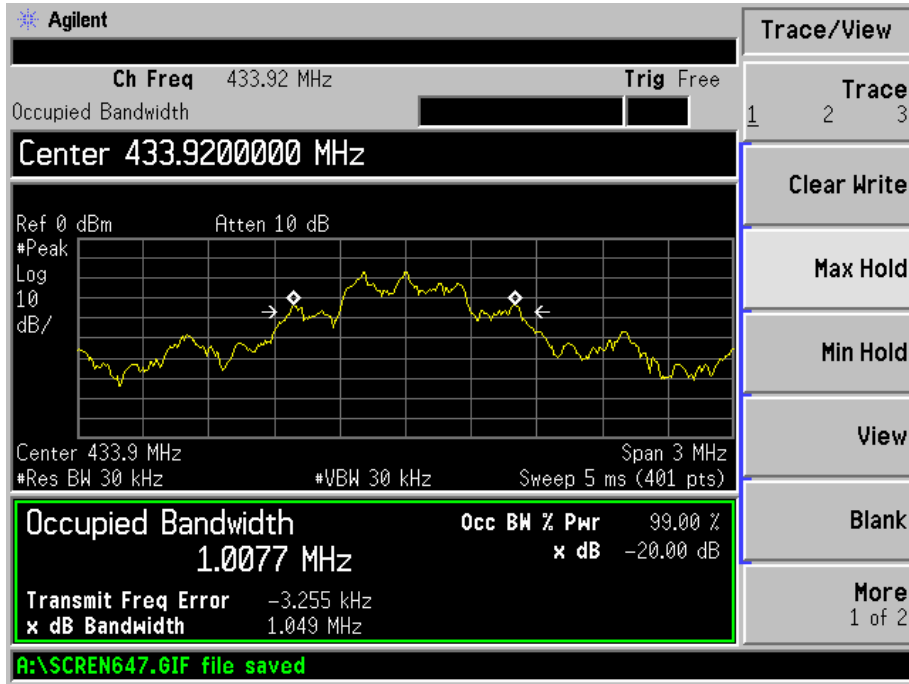

6. Transmission Time

6.1 Standard Applicable

According to FCC 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.3 Environmental Conditions


Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

6.4 Summary of Test Results/Plots


Item	Measured Value	Limit	Result
Transmission Time	0.225s	<1s	Pass
Silent Time	12.3s	>10s	Pass
Silent Time/Transmission Time	54.6	>30	Pass

Please refer to the attached plots.

Silent Time

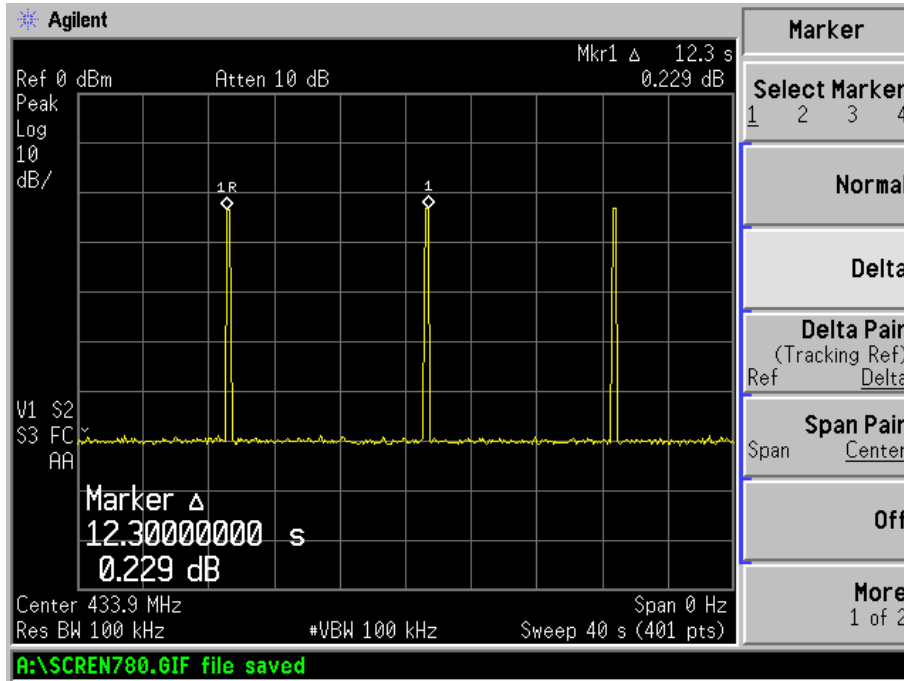

Transmission Time

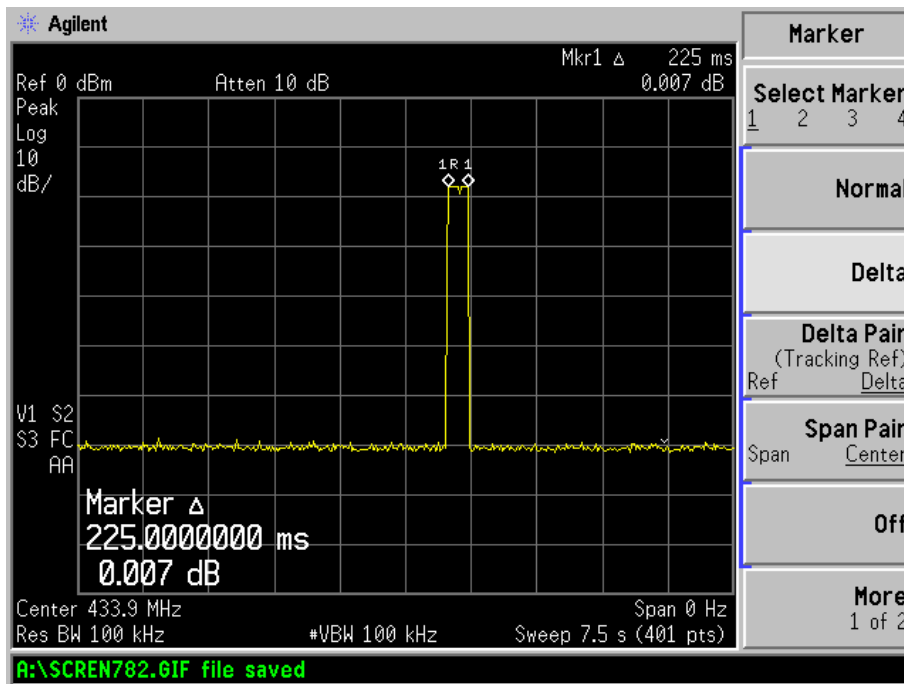

7. Duty Cycle

7.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

7.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar



7.4 Summary of Test Results/Plots

Type of Pulse	Width of Pulse ms	Quantity of Pulse	Transmission Time ms	Total Time (T _{on}) ms
Pulse 1	0.450	6	2.7	2.7

Test Period (T _p) ms	Total Time (T _{on}) ms	Duty Cycle %	Duty Cycle Factor dB
26.5	2.7	10.19	-19.84

Please refer to the attached test plots

Width of Pulse

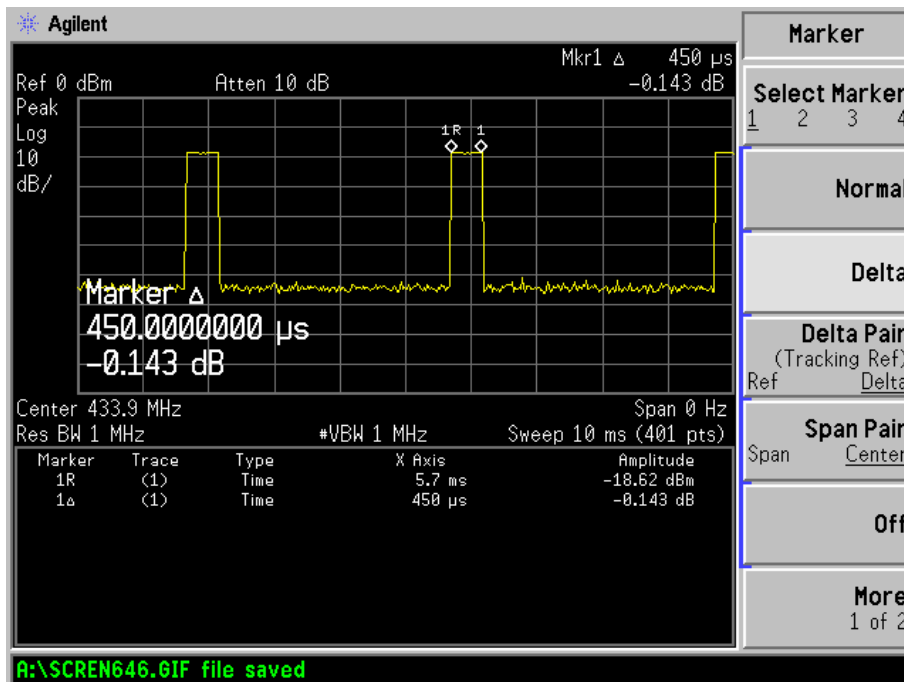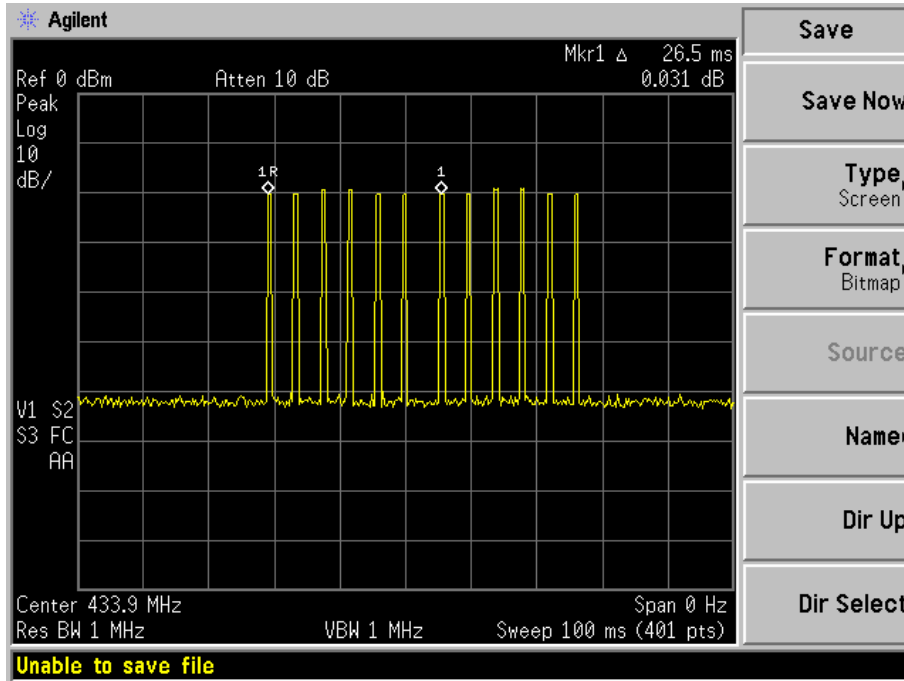

***** END OF REPORT *****