
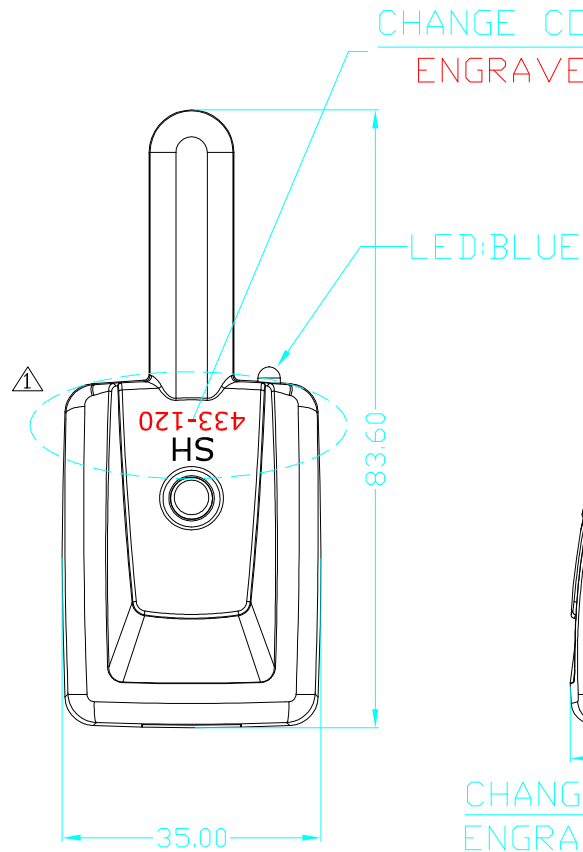


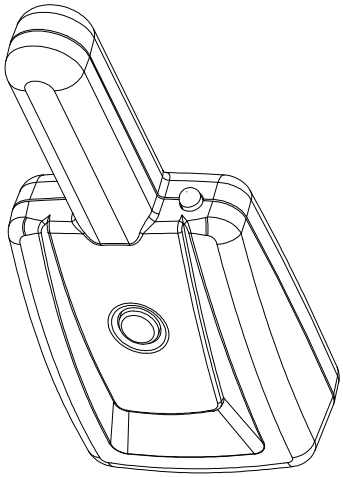


FCC ID: NAHSRM4

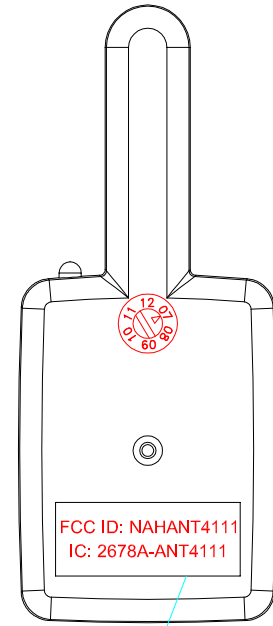

CHANGE CORE(CAVE=0.2,FLASH)
ENGRAVED(RAISED=0.2,MT-11010)


P/N: IASFB0A1
KEY P/N: IKSFB000

*Tolerance please refer specification of tolerance limits "c"
INJECT TOLERANCE SPEC.

GRADE	A	B	C
DIMENSION	±	±	±
UNDER 6	0.08	0.16	0.30
6~30	0.10	0.20	0.40
30~120	0.20	0.40	0.80
120~300	0.40	0.80	2.00

BODY MATERIAL : HIGH HEAT ABS + UV

1. Texture is same as MT-11010
2. Radius will be 0.2 if not specified.
3. Body color : BLACK
4. Screw : MTP02010*1
5. Foam Tape : NTABA0A0
6. Foam Double Sticker : NTABA0B0



REVISIONS				
REV.	ACC.	DESCRIPTION	DRN.	DATE
1		ADD ENGRAVING	SRZ	3/28/07

SCALE: 1:1	UNIT: M/M	DRN BY SRZ	DATE 3/13/07	NUTEK CORPORATION			
MATERIAL	CHK BY VICTOR		TITLE		SH 433-120 IVU		
FINISH	APPD BY YGF		SIZE		DEPT	DRAWING NO	REV
CODE	SHEET OF		A4			9610070	1