
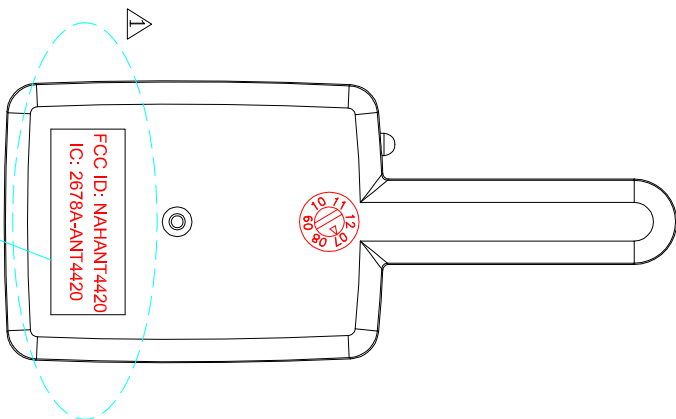
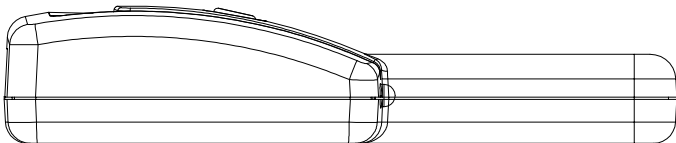
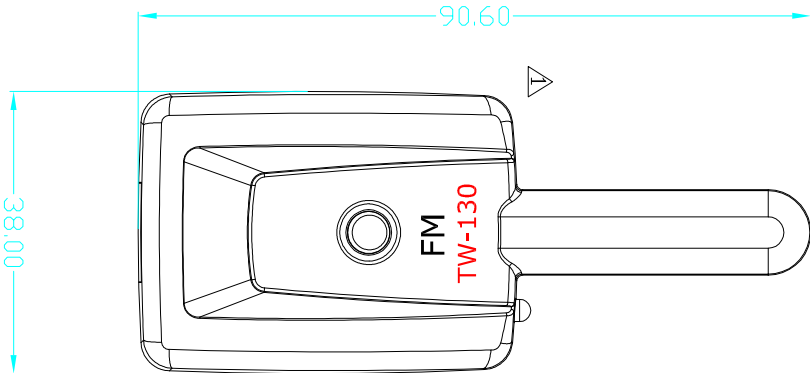
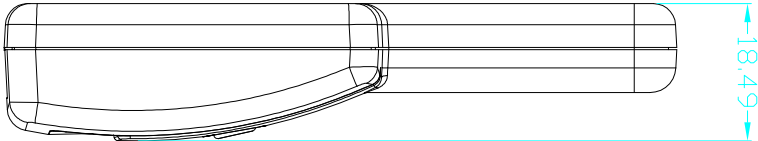


REVISIONS			
REV.	DESCRIPTION	DRN.	DATE
A	ADD ENGRAVING	SRZ	3/28/07



CHANGE CORE(CAVE=0.2,FLASH)
ENGRAVED(RAISED=0.2,MT-11010)

P/N:IASFC0A1
KEY P/N:IKSFB001


GRADE	A	B	C
DIMENSION	±	±	±
UNDER 6	0.08	0.16	0.30
6~30	0.10	0.20	0.40
30~120	0.20	0.40	0.80
120~300	0.40	0.80	2.00

*Tolerance please refer specification
of tolerance limits "C".

INJECT TOLERANCE SPEC.

BODY MATERIAL : HIGH HEAT ABS + UV

1. Texture is same as MT-11010
2. Radious will be 0.2 if not specified.
3. Body color : BLACK
4. Screw : MTP02010*1
5. Foam Tape : NTABA0A0
6. Foam Double Sticker : NTABA0B0



SCALE: 1:1	UNIT: M/M	DRN BY SRZ	DATE 3/20/07	NUTEK CORPORATION			
MATERIAL		CHK BY VICTOR		TITLE FM TW-130 IVU			
FINISH		APPD BY YGF		SIZE A4	DEPT	DRAWING NO 9510090	REV 1
CODE		SHEET OF					