



# **CERTIFICATION TEST REPORT**

**Report Number. :** 12016445-E4V1

**Applicant :** BENDIX COMMERCIAL VEHICLE SYSTEMS LLC  
#2110 – 6900 GRAYBAR ROAD  
RICHMOND, B. C. V6W 0A5 CANADA

**FCC ID :** NATRXK055636  
**IC :** 3323A-K055636

**Model Number :** K055636

**EUT Description :** 433.92 MHz RECEIVER

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART B  
INDUSTRY OF CANADA ICES-003 ISSUE 6

**Date Of Issue:**

March 26, 2018

**Prepared by:**

UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	3/26/2018	Initial Issue	--

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY .....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT.....	8
5.2. TEST CONFIGURATIONS .....	8
5.3. MODE(S) OF OPERATION.....	8
5.4. SOFTWARE AND FIRMWARE .....	8
5.5. DETAILS OF TESTED SYSTEM.....	9
<b>7. MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>8. RADIATED EMISSIONS LIMITS AND TEST RESULTS.....</b>	<b>12</b>
8.1. SMART ANTENNA.....	13
8.1.1. RADIATED EMISSIONS 30 – 1000 MHz.....	13
8.1.2. RADIATED EMISSIONS 1 to 18 GHz.....	15
<b>9. SETUP PHOTOS .....</b>	<b>17</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BENDIX CVS CANADA INC.  
13151 VANIER PLACE #150  
RICHMOND, BRITISH COLUMBIA V6V 2J1 CANADA

**EUT DESCRIPTION:** 433.92 MHz RECEIVER

**MODEL NUMBER:** K055636

**SERIAL NUMBER:** 56A

**DATE TESTED:** NOVEMBER 16 to DECEMBER 09, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART B	Complies
ICES-003 ISSUE 6	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Reviewed By:



---

Bobby Bayani  
Lead Project Engineer  
UL Verification Service Inc.

Prepared By:



---

Jason Qian  
Test Engineer  
UL Verification Services Inc.

Approved & Released For  
UL Verification Services Inc By:



---

Thu Chan  
Operations Leader  
UL Verification Service Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2014, ICES-003 Issue 6.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a 433.92 MHz receiver used for Tire Pressure Monitoring Systems.

Note: Label on EUT tested was Model K135292. MFR notified the lab that the incorrect label was affixed on the EUT tested. The correct Model no. is K055636.

#### GENERAL INFORMATION

Highest frequency generated or used by the EUT	433.92 MHz
--	------------

### 5.2. TEST CONFIGURATIONS

The following configuration was tested:

EUT Configuration	Description
Power On	The EUT was installed in a typical configuration

### 5.3. MODE(S) OF OPERATION

Mode	Description
Normal mode	The EUT was exercised during testing.

### 5.4. SOFTWARE AND FIRMWARE

The software used in the EUT during testing was CANRXTOOL Test Ver. 9.6.0.2.  
The firmware installed in the EUT during testing was version 1.12 (Application) and 0.7 (Bootloader).



## 5.5. DETAILS OF TESTED SYSTEM

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop PC	LENOVO	T410	2921940145
AC Adapter	LENOVO	ADLX66NCT2A	11S36200293ZZ100392366
DC Power Supply	SORENSEN	XT 15-4	1319A02780
USB-Link	NEXIQ	-	73726


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Unshielded	1.0m	N/A
2	SERIAL	1	SERIAL	Unshielded	1.5m	N/A
3	USB	1	USB	Unshielded	1.0m	N/A
4	SERIAL	1	SERIAL	Shielded	0.3m	N/A
5	DC	1	DC	Unshielded	1.2m	N/A
6	AC	1	AC	Unshielded	1.2m	N/A
7	AC	1	AC	Unshielded	1.2m	N/A

### TEST SETUP

The EUT was connected to a host Laptop via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM FOR SMART ANTENNA**

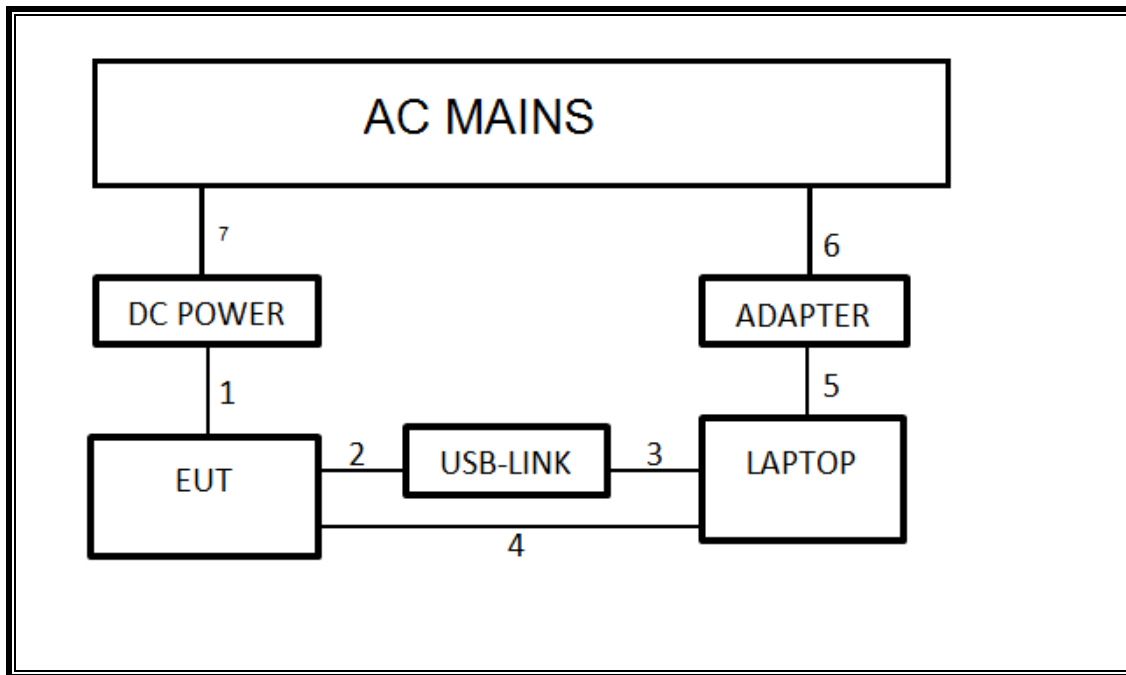

## 7. MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	ID No.	Cal Date	Cal Due
Spectrum Analyzer	Agilent	N9030A	T908	04/28/17	04/28/18
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	T130	10/16/17	10/16/18
Antenna, Horn, 1-18GHz	ETS Lindgren	3117	T862	06/09/17	06/09/18
RF Preamplifier, 10kHz - 1GHz	Sonoma	310N	T15	02/15/17	02/15/18
RF Preamplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T492	07/23/17	07/23/18

Test Software List			
Description	Manufacturer	Model	Version
Antenna Port Software	UL	UL RF	Ver 6.2, March 10, 2017
Radiated Software	UL	UL EMC	Ver 9.5 Apr 26, 2016

## 8. RADIATED EMISSIONS LIMITS AND TEST RESULTS

### LIMIT

§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dBµV/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54
Note: The lower limit shall apply at the transition frequency.	

### TEST PROCEDURE

ANSI C63.4: 2014

The highest frequency generated or used in the EUT is 5.8 GHz therefore the frequency range was investigated from 30 MHz to 40 GHz.


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### RESULTS


## 8.1. SMART ANTENNA

### 8.1.1. RADIATED EMISSIONS 30 – 1000 MHz

#### HORIZONTAL PLOT

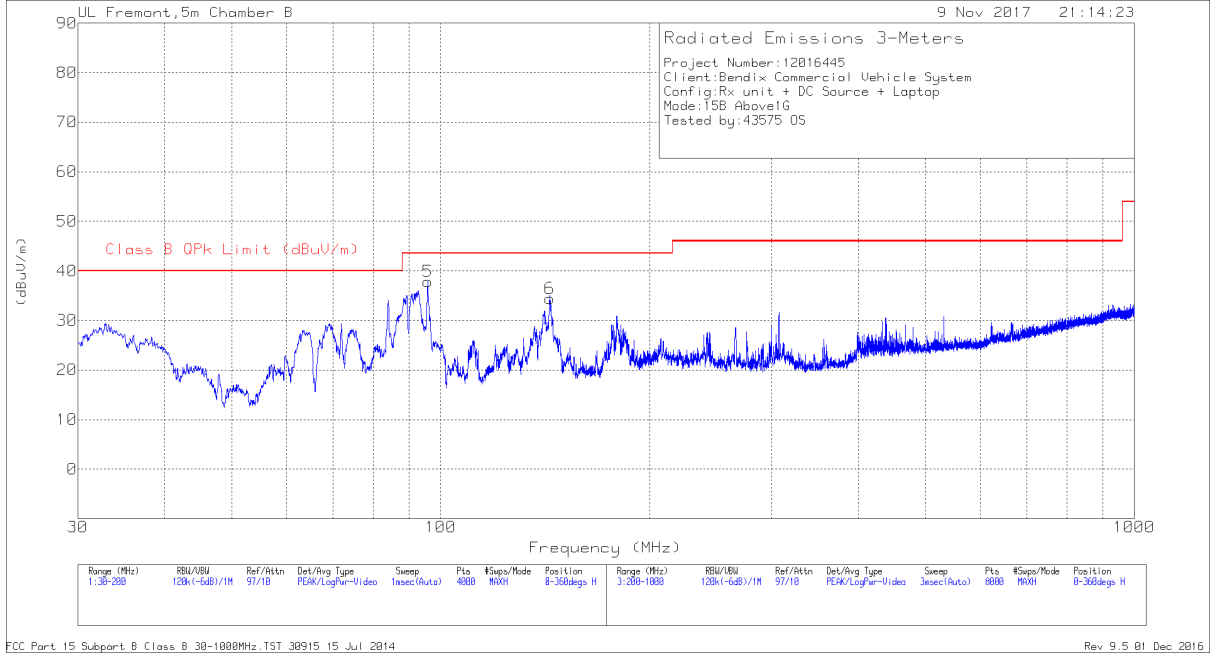

#### VERTICAL PLOT

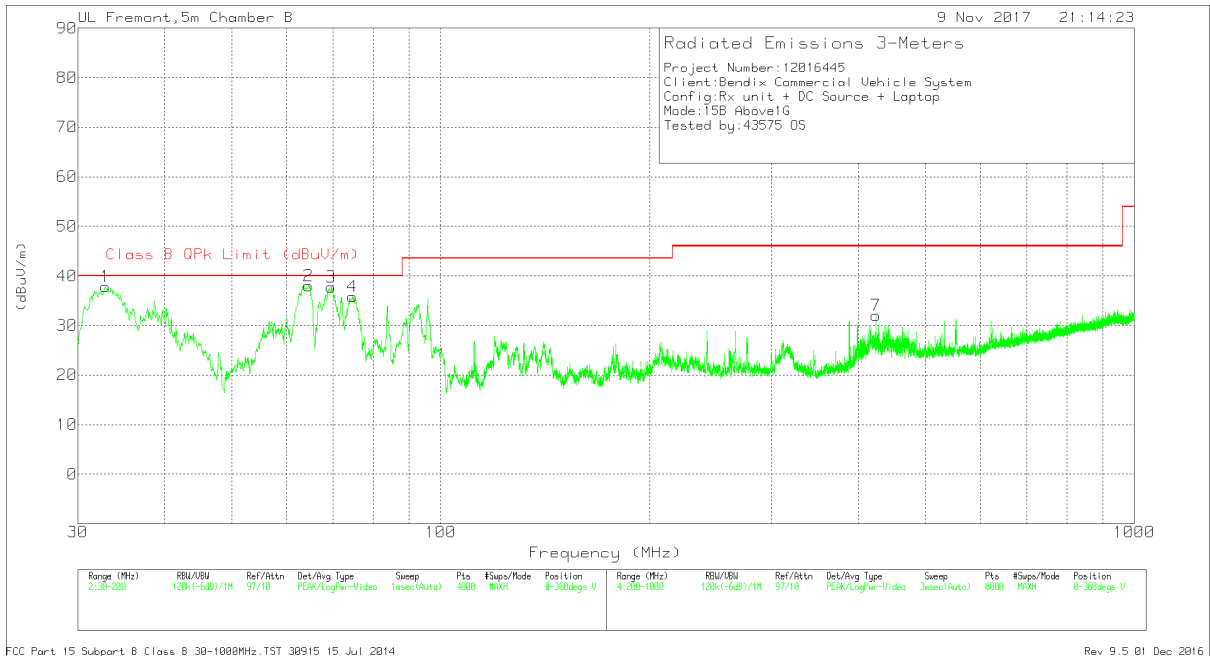

## DATA



### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T899 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.8482	43.13	Pk	23.5	-28.8	37.83	40	-2.17	0-360	100	V
	32.8108	41.53	Qp	23.5	-28.8	36.23	40	-3.77	186	100	V
2	64.4339	54.23	Pk	12.1	-28.3	38.03	40	-1.97	0-360	100	V
	64.491	52.9	Qp	12.1	-28.3	36.7	40	-3.3	143	101	V
3	69.5777	53.93	Pk	12.1	-28.3	37.73	40	-2.27	0-360	100	V
	69.4951	51.58	Qp	12.1	-28.3	35.38	40	-4.62	121	129	V
4	74.6366	52.3	Pk	11.7	-28.2	35.8	40	-4.2	0-360	100	V
	74.6524	50.37	Qp	11.7	-28.2	33.87	40	-6.13	122	105	V
5	95.8495	52.74	Pk	13.1	-28	37.84	43.52	-5.68	0-360	200	H
	95.7132	46.39	Qp	13	-28	31.39	43.52	-12.13	215	334	H
6	143.7594	44.98	Pk	16.9	-27.4	34.48	43.52	-9.04	0-360	400	H
7	423.8291	37.53	Pk	20.4	-25.9	32.03	46.02	-13.99	0-360	100	V

Pk - Peak detector

Qp - Quasi-Peak detector

## 8.1.2. RADIATED EMISSIONS 1 to 18 GHz

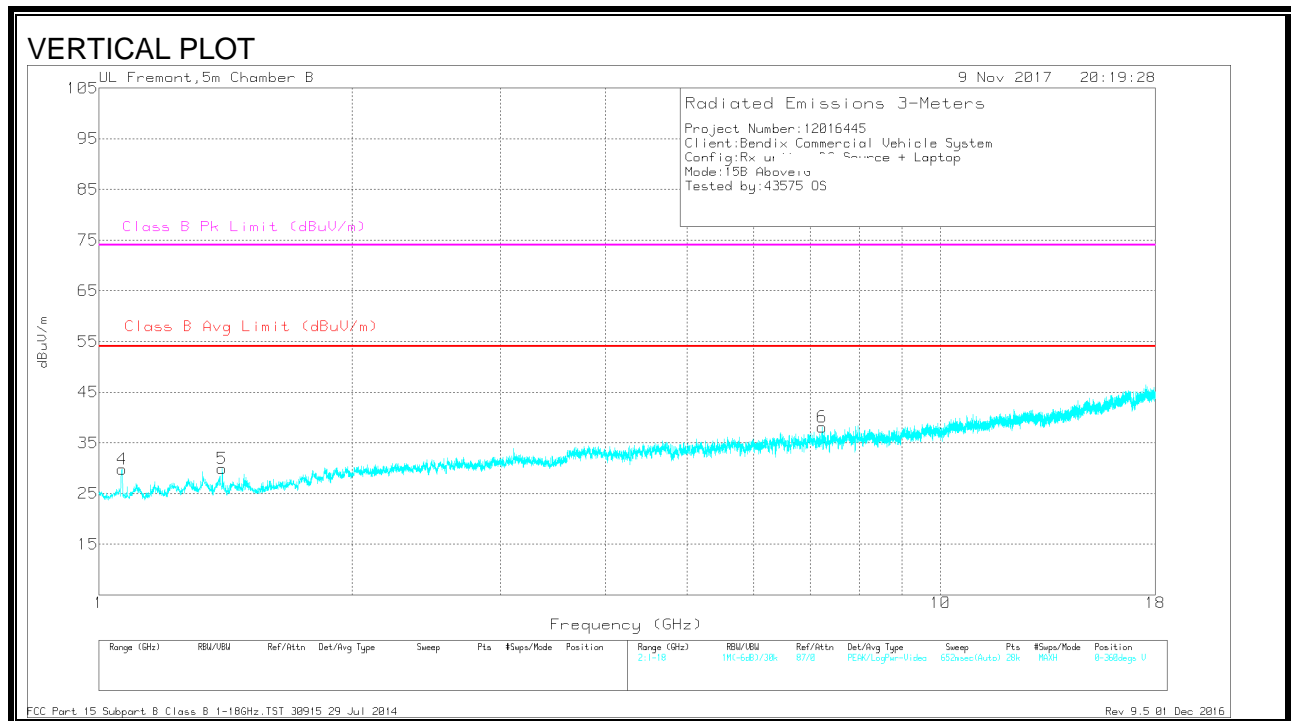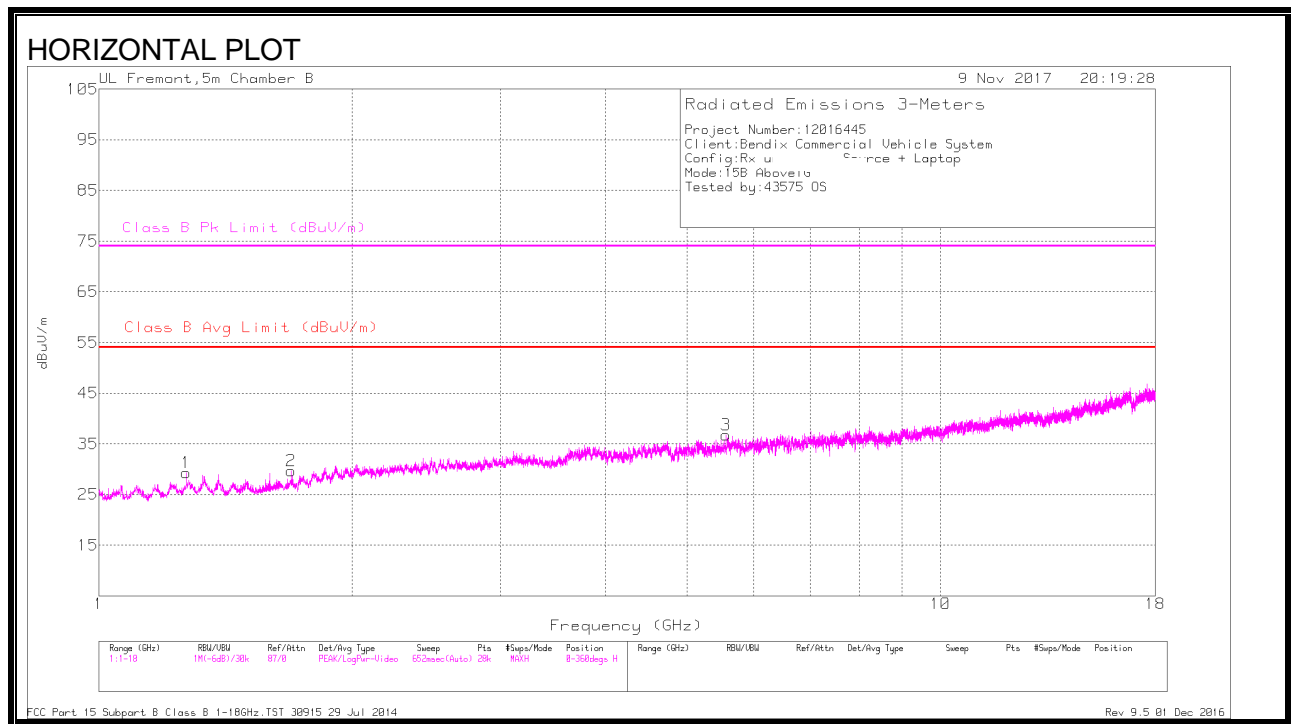

## HORIZONTAL AND VERTICAL DATA

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Av(CISPR)Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.065	36.84	Avg	27.2	-34.3	29.74	-	-	-	-	0-360	202	V
1	1.27	34.59	Avg	28.8	-34.1	29.29	-	-	-	-	0-360	302	H
5	1.401	35.48	Avg	28.2	-33.8	29.88	-	-	-	-	0-360	202	V
2	1.693	33.96	Avg	29	-33.3	29.66	-	-	-	-	0-360	202	H
3	5.557	31.11	Avg	35.4	-29.8	36.71	-	-	-	-	0-360	302	H
6	7.24	29.58	Avg	35.8	-27.3	38.08	-	-	-	-	0-360	202	V

Avg - Video bandwidth < Resolution bandwidth

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Av(CISPR)Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.066	54.01	Pk	27.2	-34.3	46.91	-	-	74	-27.09	351	195	V
1.066	29.14	Av	27.2	-34.3	22.04	54	-31.96	-	-	351	195	V
1.271	40.97	Pk	28.8	-34.1	35.67	-	-	74	-38.33	317	182	H
1.271	28.07	Av	28.8	-34.1	22.77	54	-31.23	-	-	317	182	H
1.403	44.92	Pk	28.2	-33.8	39.32	-	-	74	-34.68	274	125	V
1.403	27.78	Av	28.2	-33.8	22.18	54	-31.82	-	-	274	125	V
1.694	45.16	Pk	29	-33.3	40.86	-	-	74	-33.14	13	322	H
1.694	27.56	Av	29	-33.3	23.26	54	-30.74	-	-	13	322	H
5.557	37.39	Pk	35.4	-29.8	42.99	-	-	74	-31.01	166	154	H
5.557	24.98	Av	35.4	-29.8	30.58	54	-23.42	-	-	166	154	H
7.24	36.18	Pk	35.8	-27.2	44.78	-	-	74	-29.22	342	193	V
7.24	23.67	Av	35.8	-27.2	32.27	54	-21.73	-	-	342	193	V

Pk - Peak detector

Av - Average detection