

TEST REPORT # EMCC-G942404BAF, 2000-07-21

EQUIPMENT UNDER TEST:

Trade Name: HELLA
Model: 5FA 008 399-30 and 5FA 008 410-30
Serial No: None
Equipment Category: Transmitter
Manufacturer: Hella KG Hueck & Co.
Address: Rixbecker Strasse 75
59997 Lippstadt
Germany
Phone: +49-2941-38-8392
Fax: +49-2941-38-8074
E-mail: heinz-theo.holle@hella.de

RELEVANT STANDARD: 47 CFR Part 15C - Intentional Radiators

MEASUREMENT PROCEDURE USED:

ANSI C63.4-1992 FCC/OET MP-4 (1987) Other

TEST REPORT PREPARED BY:

Wolfgang Döring
EMCC DR. RAŠEK
Moggast 72-74
91320 Ebermannstadt
Germany
Phone: +49 9194 9016
Fax: +49 9194 8125
E-mail: w.doering@emcc.de

TEST PERSONNEL:

Klaus Pfister
Wolfgang Döring

SIGNATURE OF THE COMPANY OFFICIAL:



Dr. Werner G. Rašek
- President-

EMCC DR. RAŠEK
Moggast 72-74
91320 Ebermannstadt
Germany

FCC Registration # 90566

942404BAF.doc

RADIO LABORATORIES
EMC LABORATORIES


Deutscher
Akkreditierungs
Rat

TTI-P-G 094/94
TTI-P-G 074/95

Telephone: +49-9194-9016
Telefax: +49-9194-8125
e-mail: emc.cons@emcc.de
web site: http://www.emcc.de

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

CONTENTS	Page
1 GENERAL INFORMATION	3
1.1 Purpose	3
1.2 Limits and Reservations	3
1.3 Test Location	3
1.4 Manufacturer	3
1.5 Dates	3
2 PRODUCT DESCRIPTION	4
2.1 Equipment Under Test (EUT)	4
2.2 EUT Peripherals	4
2.3 Mode of Operation During Testing	4
2.4 Modifications Required for Compliance	4
3 TEST RESULTS SUMMARY	5
4 ANTENNA REQUIREMENT	6
4.1 Regulation	6
4.2 Result	6
5 RADIATED EMISSIONS	7
5.1 Regulation	7
5.2 Test Equipment	8
5.3 Test Procedures	8
5.4 Calculation of Field Strength Limits	9
5.5 Calculation of Average Correction Factor	9
5.6 Field Strength Calculation	9
5.7 Test Results	11
5.7.1 Model 5FA 008 399-30 (3 rd Generation, 4 Buttons)	11
5.7.2 Model 5FA 008 410-30 (2 nd Generation, 4 Buttons)	12
6 CONDUCTED EMISSIONS TESTS	13
6.1 Regulation	13
6.2 Test Equipment	13
6.3 Test Procedures	13
6.4 Test Results	13
7 PERIODIC OPERATION CHARACTERISTICS	14
7.1 Periodic Operation	14
7.1.1 Regulation	14
7.1.2 Result	14
7.2 Manually Operated Transmitter Deactivation	14
7.2.1 Regulation	14
7.2.2 Result	14
7.3 Automatically Operated Transmitter Deactivation	15
7.3.1 Regulation	15
7.3.2 Result	15
7.4 Prohibition of Periodic Transmission	15
7.4.1 Regulation	15
7.4.2 Result	15
7.5 Continuous Transmission During an Alarm Condition	15
7.5.1 Regulation	15
7.5.2 Result	15
8 BANDWIDTH	16
8.1 Regulation	16
8.2 Calculation of 20 dB Bandwidth Limit	16
8.3 Test Equipment	16
8.4 Test Procedure	16
8.5 Test Result	16
8.5.1 Model 5FA 008 399-30 (3 rd Generation, 4 Buttons)	16
8.5.2 Model 5FA 008 410-30 (2 nd Generation, 4 Buttons)	17
9 PHOTOGRAPHS OF THE TEST SETUP	18
9.1 Radiated Emissions Tests	18
9.2 Conducted Emissions Tests	19
10 PHOTOGRAPHS OF THE EQUIPMENT UNDER TEST	20
11 MISCELLANEOUS COMMENTS AND NOTES	26

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

1 GENERAL INFORMATION

1.1 Purpose

The purpose of this report is to show compliance to the FCC regulations for unlicensed devices operating under section 15.231 of the Code of Federal Regulations title 47.

1.2 Limits and Reservations

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in this report.

This test report shall not be reproduced except in full without the written permission of EMCC DR. RAŠEK.

1.3 Test Location

Company Name: EMCC DR. RAŠEK
Street: Moggast 72-74
City: 91320 Ebermannstadt
Country: Germany
Laboratory: Test Laboratory of EMCC DR. RAŠEK
FCC Registration Number: 90566
This site has been fully described in a report submitted to the FCC, and accepted in the letter dated February 09, 2000 Registration Number 90566.

Phone: +49-9194-9016
Fax: +49-9194-8125
E-Mail: emc.cons@emcc.de
Web: www.emcc.de

1.4 Manufacturer

Company Name: Hella KG Hueck & Co.
Street: Rixbecker Strasse 75
City: 59997 Lippstadt
Country: Germany

Name for contact purposes: Heinz-Theo Holle
Phone: +49-2941-38-8392
Fax: +49-2941-38-8074
E-mail: heinz-theo.holle@hella.de

1.5 Dates

Date of receipt of EUT: CW 27/2000
Test date: CW 28 + 29/2000

2 PRODUCT DESCRIPTION

2.1 Equipment Under Test (EUT)

Device: Remote Control (RF) Transmitter for Car Locking / Unlocking
Model: 5FA 008 399-30 and 5FA 008 410-30 (both with 4 buttons)
Serial Number: None
FCC ID: NBG 735868 T
Power: Battery, 3V Lithium
Transmit Frequency: 315 MHz
Variants: - Model 5FA 008 399-30: two variants: 5FA 008 430-40 (2 buttons) and 5FA 008 399-20 (3 buttons)
- Model 5FA 008 410-30: one variant: 5FA 008 410-20 (3 buttons)
only most complex versions (4 buttons) tested; all variants less complex

Difference between the two tested models: only different software versions resulting in different modulation schemes:

- software 2nd generation: modulation signal frequency approx. 666 Hz, puls width modulation,
- software 3rd generation: modulation signal frequency approx. 1 kHz, manchester coding.

2.2 EUT Peripherals

The EUT were tested as stand-alone devices.

2.3 Mode of Operation During Testing

The transmitter were tested in a typical fashion. During preliminary emission tests all 4 transmitter codes activated by the 4 different buttons ("Lock", "Release", "Tailgate remote release" and "Panic") were investigated for worst case emission mode. Pressing the "Lock" button was found to be the worst case emission mode. Therefore, final qualification testing was completed with transmitters activated with the "Lock" button.

2.4 Modifications Required for Compliance

None.

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

3 TEST RESULTS SUMMARY

Summary of Test Results

Transmitter, model 5FA 008 399-30 and model 5FA 008 410-30

Requirement	CFR Section	Report Section	Test Result
Antenna Requirement	15.203	4	Pass
Radiated Spurious Emissions	15.209, 15.205(b)	5	Pass
Conducted Emissions	15.207	6	*
Periodic Operation Characteristics	15.231(a)	7	Pass
Field Strength Limits (Fundamental)	15.231(b)	5	Pass
20 dB Bandwidth	15.231(c)	9	Pass

* Not required, the EUT is battery powered.

The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units, and meet the requirements of the specifications referenced herein.

Consistent with Industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) are factored into the "Correction Factor" documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known Industry Standards and Regulations.

The measurements contained in this report were made in accordance with the procedure ANSI C63.4 - 1992 and all applicable Public Notices received prior to the date of testing. All emissions from the device were found to be within the limits outlined in this report.

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in this report.

Test Personnel: Klaus Pfister
Wolfgang Döring
Issuance Date: 2000-07-21

4 ANTENNA REQUIREMENT

Test Requirement: FCC CFR47, Part 15C

4.1 Regulation

15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

Antenna is a trace on the PCB.

The EUT meets the requirements of this section.

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

5 RADIATED EMISSIONS

Test Requirement: FCC CFR47, Part 15C

Test Procedure: ANSI C63.4:1992

5.1 Regulation

15.231(b) In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

** Linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

- (1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.
- (2) Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in Section 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of Section 15.205 shall be demonstrated using the measurement instrumentation specified in that section.
- (3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength

Section 15.33 Frequency range of radiated measurements:

- (a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:
 - (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

5.2 Test Equipment

Type	Manufacturer/ Model No.	Serial No.	Last Calibration	Next Calibration
Receiver (30 MHz - 1 GHz)	Rohde & Schwarz ESS	825132/015	March 2000	March 2001
Antenna (30 MHz - 1 GHz)	EMCO 3143	9608-1316	Feb. 2000	Feb. 2001
Receiver (1 GHz - 4 GHz)	Rohde & Schwarz ESAI-D ESMI-RF ESMI-B1	833771/008 833827/002 832504/005	June 2000	Dec. 2001
Antenna (1 GHz - 4 GHz)	Schwarzbeck BBHA 9120 D	137	Oct. 1999	Oct. 2001

5.3 Test Procedures

For tabletop equipment, the EUT is placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that sits on a flush mounted metal turntable. Floor standing equipment is placed directly on the flush mounted metal turntable [*Remark: Not applicable*]. The EUT is connected to its associated peripherals with any excess I/O cabling bundled to approximately 1 meter [*Remark: Not applicable*].

Preview tests are performed to determine the "worst case" mode of operation. With the EUT operating in "worst case" mode, emissions from the unit are maximized by adjusting the polarization and height of the receive antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions [*Remark: Not applicable*]. All tests performed with the EUT placed in two polarizations on the nonconductive table: horizontal and vertical. Refer to the photographs' section.

Radiated Emissions Test Characteristics	
Frequency range	30 MHz - 4,000 MHz
Test distance	3 m*
Test instrumentation resolution bandwidth	120 kHz (30 MHz - 1,000 MHz) 1 MHz (1000 MHz - 4,000 MHz)
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/Horizontal

* According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. (...) When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

5.4 Calculation of Field Strength Limits

Fundamental field strength limits for the band 260 – 470 MHz:

$$\mu\text{V/m at 3 meters} = 41.6667(\text{F[MHz]}) - 7083.3333 = 41.6667 \cdot 315 - 7083.3333 = 6,041.68$$

6,041.68 $\mu\text{V/m}$ corresponds with 75.6 dB $\mu\text{V/m}$.

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level, i.e. 55.6 dB $\mu\text{V/m}$.

5.5 Calculation of Average Correction Factor

The average correction factor is computed by analyzing the "worst case" on time in any 100 mSec time period and using the formula:

$$\text{Corrections Factor (dB)} + 20 \cdot \log(\text{worst case on time}/100 \text{ mSec})$$

Analysis of the remote transmitter worst case on time in any 100 mSec time period is an on time of 50 mSec, therefor the correction factor is $20 \cdot \log(50/100) = -6 \text{ dB}$.

The maximum correction factor to be applied is 20 dB per section 15.35 of the FCC rules.

The relationship between average and peak mode reading has been confirmed also by direct measurement using the receiver's average and peak detectors.

All emission measurements performed using the test receiver's average detector and the max. hold facility; i.e. the average value measured directly without the necessity of additional correction factor.

5.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} + \text{CF}$$

where

FS = Field Strength in dB $\mu\text{V/m}$

RA = Receiver Amplitude in dB μV

AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB

Assume a receiver reading of 23.5 dB μV is obtained. The Antenna Factor of 7.4 dB(1/m) and a Cable Factor of 1.1 dB are added, giving a field strength of 32 dB $\mu\text{V/m}$. The 32 dB $\mu\text{V/m}$ value can be mathematically converted to its corresponding level in $\mu\text{V/m}$.

$$\text{FS} = 23.5 + 7.4 + 1.1 = 32 \text{ [dB}\mu\text{V/m]}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm}(32/20) = 39.8$$

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f)(1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements). The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF + DF$$

where

FS = Field Strength in dB μ V/m

RA = Receiver Amplitude in dB μ V

AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB

DF = Distance Extrapolation Factor in dB,

where $DF = 20 \log(D_{test}/D_{spec})$ where D_{test} = Test Distance and D_{spec} = Specified Distance

Assume the tests performed at a reduced Test Distance of 1.5 m instead of the Specified Distance of 3 m giving a Distance Extrapolation Factor of $DF = 20 \log(1.5m/3m) = -6$ dB.

Assuming a receiver reading of 23.5 dB μ V is obtained. The Antenna Factor of 7.4 dB(1/m), the Cable Factor of 1.1 dB and the Distance Factor of -6 dB are added, giving a field strength of 26 dB μ V/m. The 26 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 23.5 + 7.4 + 1.1 - 6 = 26 \text{ [dB}\mu\text{V/m]}$$

Level in μ V/m = Common Antilogarithm (26/20) = 20

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

5.7 Test Results

 5.7.1 Model 5FA 008 399-30 (3rd Generation, 4 Buttons)

PRODUCT EMISSIONS AVERAGE DATA 15.231 BANDS											
No	Emission Frequency [MHz]	Receiver Mode and Bandwidth [kHz]	Test Distance [m]	Receiver Reading RA [dB μ V]	Correction Factor AF+CF [dB(1/m)]	Distance Extrapolation Factor DF [dB]	Result = Corrected Reading FS [dB μ V/m]	Spec Limit [dB μ V/m]	Antenna Height [m]	Polarization Eut/Ant	Margin [dB]
1	315	120, AV	3	54.7	17.4	0	72.1	75.6	1.00	h / h	3.5
2	630	120, AV	3	12.3	23.9	0	36.2	55.6	1.45	h / h	19.4
3	945	120, AV	3	5.4	27.6	0	33	55.6	1.00	h / h	22.6
4	1260	1000, AV	1.5	6.4	25.2	-6	25.6	55.6	1.00	h / h	30
5	1890	1000, AV	1.5	9.9	25.7	-6	29.6	55.6	1.00	h / h	26
6	2520	1000, AV	1.5	6.9	28	-6	28.6	55.6	1.00	v / h	27
7	3150	1000, AV	1.5	5.5	28.8	-6	28.3	55.6	1.00	h / h	27.3

PRODUCT EMISSIONS AVERAGE DATA 15.205 BANDS											
No	Emission Frequency [MHz]	Receiver Mode and Bandwidth [kHz]	Test Distance [m]	Receiver Reading RA [dB μ V]	Correction Factor AF+CF [dB(1/m)]	Distance Extrapolation Factor DF [dB]	Result = Corrected Reading FS [dB μ V/m]	Spec Limit [dB μ V/m]	Antenna Height [m]	Polarization Eut/Ant	Margin [dB]
1	1575	1000, AV	1.5	6.8	25.2	-6	26	54	1.00	h / h	28
	1575	1000, AV	3	6.7*	25.2	0	31.9*	54	1.00	h,v/h,v	22.1*
2	2205	1000, AV	1.5	5.6	28	-6	27.6	54	1.00	v / h	26.4
3	2835	1000, AV	1.5	8.2	28.5	-6	30.7	54	1.00	v / v	23.3
	2835	1000, AV	3	5.9*	28.5	0	34.4*	54	1.00	h / v	19.6*

Remark: * noise floor

The EUT meets the requirements of this section.

 Test Personnel: Klaus Pfister (performed measurements up to 1 GHz)
 Wolfgang Döring (performed measurements above 1 GHz)

Test Date: 2000-07-15 and 2000-07-17

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

 5.7.2 Model 5FA 008 410-30 (2nd Generation, 4 Buttons)

PRODUCT EMISSIONS AVERAGE DATA 15.231 BANDS											
No	Emission Frequency [MHz]	Receiver Mode and Bandwidth [kHz]	Test Distance [m]	Receiver Reading RA [dB μ V]	Correction Factor AF+CF [dB(1/m)]	Distance Extrapolation Factor DF [dB]	Result = Corrected Reading FS [dB μ V/m]	Spec Limit [dB μ V/m]	Antenna Height [m]	Polarization Eut/Ant	Margin [dB]
1	315	120, AV	3	54	17.4	0	71.4	75.6	1.00	h / h	4.2
2	630	120, AV	3	12.3	23.9	0	36.2	55.6	1.52	h / h	19.4
3	945	120, AV	3	5.2	27.6	0	32.8	55.6	1.00	h / h	22.8
4	1260	1000, AV	1.5	5.8	25.2	-6	25	55.6	1.00	h / h,v	30.6
5	1890	1000, AV	1.5	9.6	25.7	-6	29.3	55.6	1.00	v / h,v	26.3
6	2520	1000, AV	1.5	6.4	28	-6	28.4	55.6	1.00	v / h	27.2
7	3150	1000, AV	1.5	5.5*	28.8	-6	28.3*	55.6	1.00	h,v/ h,v	27.3*

Remark: * noise floor

PRODUCT EMISSIONS AVERAGE DATA 15.205 BANDS											
No	Emission Frequency [MHz]	Receiver Mode and Bandwidth [kHz]	Test Distance [m]	Receiver Reading RA [dB μ V]	Correction Factor AF+CF [dB(1/m)]	Distance Extrapolation Factor DF [dB]	Result = Corrected Reading FS [dB μ V/m]	Spec Limit [dB μ V/m]	Antenna Height [m]	Polarization Eut/Ant	Margin [dB]
1	1575	1000, AV	1.5	6.8*	25.2	-6	26*	54	1.00	h,v/h,v	28*
	1575	1000, AV	3	6.7*	25.2	0	31.9*	54	1.00	h,v/h,v	22.1*
2	2205	1000, AV	1.5	5.8	28	-6	27.8	54	1.00	h,v/h	26.2
3	2835	1000, AV	1.5	6.6	28.5	-6	29.1	54	1.00	h / h	24.9
	2835	1000, AV	3	5.3*	28.5	0	33.8*	54	1.00	v / v	20.2*

Remark: * noise floor

The EUT meets the requirements of this section.

 Test Personnel: Klaus Pfister (performed measurements up to 1 GHz)
 Wolfgang Döring (performed measurements above 1 GHz)

Test Date: 2000-07-15 and 2000-07-17

6 CONDUCTED EMISSIONS TESTS

Test Requirement: FCC CFR47, Part 15C

Test Procedure: ANSI C63.4:1992

6.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

Section 15.207 (d) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

6.2 Test Equipment

Not applicable.

6.3 Test Procedures

Not applicable.

6.4 Test Results

Device: Remote Control (RF) for Car Locking / Unlocking

Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

The EUT is battery powered only. Therefore - according to Section 15.207 (d) - conducted emissions measurements to demonstrate compliance with the conducted limits are not required.

7 PERIODIC OPERATION CHARACTERISTICS

Test Requirement: FCC CFR47, Part 15C

7.1 Periodic Operation

7.1.1 Regulation

15.231(a) The provisions of this Section are restricted to periodic operation within the band 40.66 - 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

7.1.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

The EUT meets the requirements of this section.

7.2 Manually Operated Transmitter Deactivation

7.2.1 Regulation

15.231(a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

7.2.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

Transmitter ceases immediately after being released. The EUT meets the requirements of this section.

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

7.3 Automatically Operated Transmitter Deactivation

7.3.1 Regulation

15.231(a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

7.3.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

The EUT does not have automatic transmission.

7.4 Prohibition of Periodic Transmission

7.4.1 Regulation

15.231(a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

7.4.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

The EUT does not employ periodic transmission.

7.5 Continuous Transmission During an Alarm Condition

7.5.1 Regulation

15.231(a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

7.5.2 Result

Device: Remote Control (RF) for Car Locking / Unlocking
Transmitter Model: 5FA 008 399-30 and 5FA 008 410-30

This section is not applicable to the EUT.

8 BANDWIDTH

Test Requirement: FCC CFR47, Part 15C

Test Procedure: ANSI C63.4:1992 Section 13.1.7

8.1 Regulation

15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

8.2 Calculation of 20 dB Bandwidth Limit

The 20 dB bandwidth limit = $0.0025 * 315 \text{ MHz} = 0.7875 \text{ MHz} = 787.5 \text{ kHz}$

8.3 Test Equipment

Type	Manufacturer/ Model No.	Serial No.	Last Calibration	Next Calibration
Antenna	EMCO 3143	9608-1316	Feb. 2000	Feb. 2001
Analyzer	Rohde & Schwarz ESAI-D ESMI-RF ESMI-B1	833771/008 833827/002 832504/005	June 2000	Dec. 2001

8.4 Test Procedure

ANSI C63.4-1992 Section 13.1.7 Occupied Bandwidth Measurements.

(...) The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce worst-case (i.e., the widest) bandwidth. (...) In order to measure the modulated signal properly, a resolution bandwidth that is small compared to the bandwidth required by the procuring or regulatory agency shall be used on the measuring instrument. However, the 6 dB resolution bandwidth of the measuring instrument shall be set to a value greater than 5% of the bandwidth requirements. (...)

8.5 Test Result

8.5.1 Model 5FA 008 399-30 (3rd Generation, 4 Buttons)

Bandwidth setting of the analyzer:30 kHz [3 dB] corresponds with 46 kHz [6 dB]

The measured 20 dB bandwidth is:**227.8 kHz**

The EUT meets the requirements of this section.

Test Personnel: Wolfgang Döring

Test Date: 2000-07-17

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

8.5.2 Model 5FA 008 410-30 (2nd Generation, 4 Buttons)

Bandwidth setting of the analyzer:30 kHz [3 dB] corresponds with 46 kHz [6 dB]

The measured 20 dB bandwidth is:**288.9 kHz**

The EUT meets the requirements of this section.

Test Personnel: Wolfgang Döring

Test Date: 2000-07-17

9 PHOTOGRAPHS OF THE TEST SETUP

9.1 Radiated Emissions Tests

Photograph 9.1.2: EUT in horizontal polarization on the turntable



Photograph 9.1.2: EUT in vertical polarization on the turntable



TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

9.2 Conducted Emissions Tests

not applicable

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

10 PHOTOGRAPHS OF THE EQUIPMENT UNDER TEST

The following photographs are attached:

- Photograph 10.1: Model 5FA 008 399-30 (3rd Generation, 4 Buttons): Front external view
- Photograph 10.2: Model 5FA 008 399-30: Rear external view
- Photograph 10.3: Model 5FA 008 399-30: Internal view
- Photograph 10.4: Model 5FA 008 399-30: Internal view, PCB side 1
- Photograph 10.5: Model 5FA 008 399-30: Internal view, PCB side 2
- Photograph 10.6: Model 5FA 008 410-30 (2nd Generation, 4 Buttons): Front external view
- Photograph 10.7: Model 5FA 008 410-30: Rear external view
- Photograph 10.8: Model 5FA 008 410-30: Internal view
- Photograph 10.9: Model 5FA 008 410-30 Internal view, PCB side 1
- Photograph 10.10: Model 5FA 008 410-30: Internal view, PCB side 2

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

Photograph 10.1: Model 5FA 008 399-30 (3rd Generation, 4 Buttons): Front external view



5FA 008399-30


Photograph 10.2: Model 5FA 008 399-30: Rear external view



5FA 008399-30

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

Photograph 10.3: Model 5FA 008 399-30: Internal view

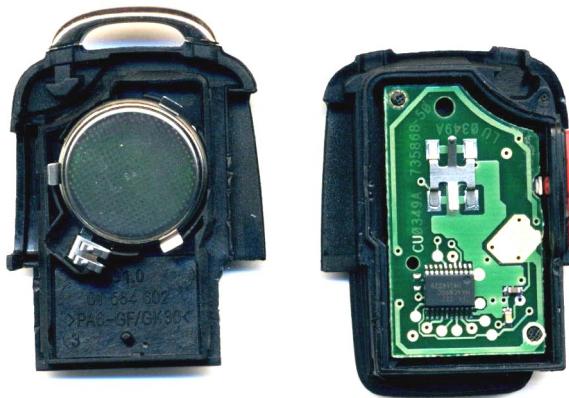

1J0 959 753 AM / 5FA 008399-30


12
M



015961955900 >PE<


5FA 008399-30

Photograph 10.4: Model 5FA 008 399-30: Internal view, PCB side 1

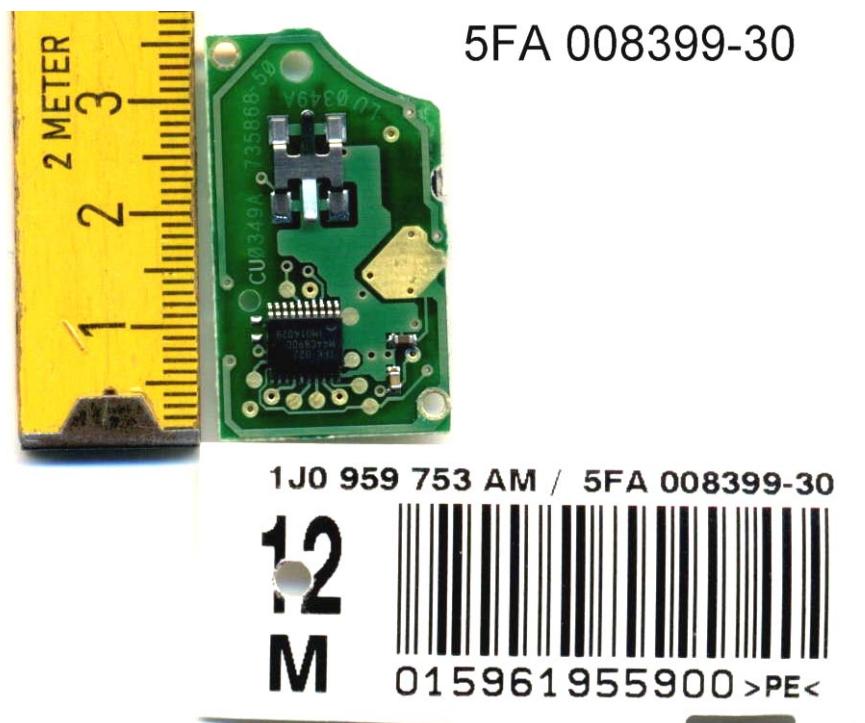

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

Photograph 10.5: Model 5FA 008 399-30: Internal view, PCB side 2

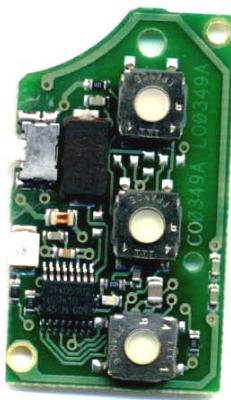

1J0 959 753 AM / 5FA 008399-30

12
M



015961955900 >PE<

5FA 008399-30

Photograph 10.6: Model 5FA 008 410-30 (2nd Generation, 4 Buttons): Front external view



5FA 008410-30

TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

Photograph 10.7: Model 5FA 008 410-30: Rear external view




Photograph 10.8: Model 5FA 008 410-30: Internal view



TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

Photograph 10.9: Model 5FA 008 410-30: Internal view, PCB side 1

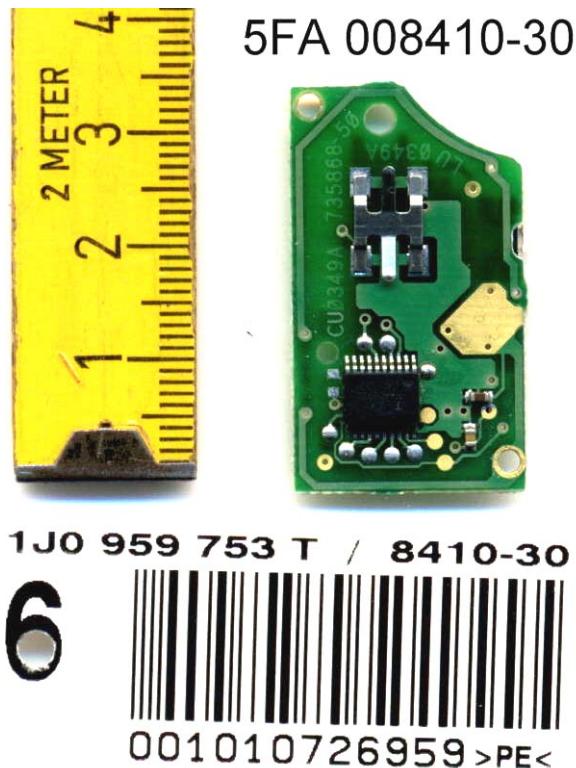

Photograph 10.10: Model 5FA 008 410-30: Internal view, PCB side 2



TEST OF HELLA MODEL 5FA 008 399-30 AND 5FA 008 410-30 TO 47 CFR PART 15C - INTENTIONAL RADIATORS

11 MISCELLANEOUS COMMENTS AND NOTES

None.