

FCC Test Report

Product Name	PLL radio remote control transmitter
Model No.	FS12P
FCC ID.	NBGFS12P

Applicant	Hella KGaA Hueck & Co
Address	Rixbecker Str. 75, 59552 Lippstadt, Germany

Date of Receipt	Aug. 31, 2015
Issued Date	Sep. 16, 2015
Report No.	1590113R-RFUSP14V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date : Sep. 16, 2015

Report No. : 1590112R-RFUSP14V00



Product Name	PLL radio remote control transmitter
Applicant	Hella KGaA Hueck & Co
Address	Rixbecker Str. 75, 59552 Lippstadt, Germany
Manufacturer	1. Hella KGaA Hueck & Co 2. Hella Shanghai Electronics Co. Ltd (HSE)
Model No.	FS12P
FCC ID.	NBGFS12P
EUT Rated Voltage	DC 3V (Power by Battery)
EUT Test Voltage	DC 3V (Power by Battery)
Trade Name	Hella
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By : 
 (Senior Adm. Specialist / Genie Chang)

Tested By : 
 (Assistant Engineer / Ken Chen)

Approved By : 
 (Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. General Information	4
1.1. EUT Description.....	4
1.2. Operation Description	5
1.3. Tested System Details.....	6
1.4. Configuration of tested System	6
1.5. EUT Exercise Software	6
1.6. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Test Specification	9
2.6. Uncertainty	9
2.7. Test Result	10
3. Radiated Emission.....	11
3.1. Test Equipment.....	11
3.2. Test Setup	12
3.3. Limits	13
3.4. Test Procedure	14
3.5. Test Specification	14
3.6. Uncertainty	14
3.7. Test Result	15
4. Transmit time.....	21
4.1. Test Equipment.....	21
4.2. Test Setup	21
4.3. Limits	21
4.4. Test Specification	21
4.5. Uncertainty	21
4.6. Test Result	22
5. Occupied Bandwidth.....	23
5.1. Test Equipment.....	23
5.2. Test Setup	23
5.3. Limits	23
5.4. Test Specification	23
5.5. Uncertainty	23
5.6. Test Result	24

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. General Information

1.1. EUT Description

Product Name	PLL radio remote control transmitter
Trade Name	Hella
Model No.	FS12P
FCC ID.	NBGFS12P
Frequency Range	434.42MHz
Number of Channels	1
Type of Modulation	OOK

Frequency of Each Channel:

Channel	Frequency
Channel 1:	434.42MHz

Note:

1. The EUT is a PLL radio remote control transmitter with a built-in 434.42 MHz transmitter.
2. The antenna of EUT is conform to FCC 15.203
3. These tests are conducted on a sample for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.231.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
			N/A		

Signal Cable Type	Signal cable Description
	N/A

1.4. Configuration of tested System

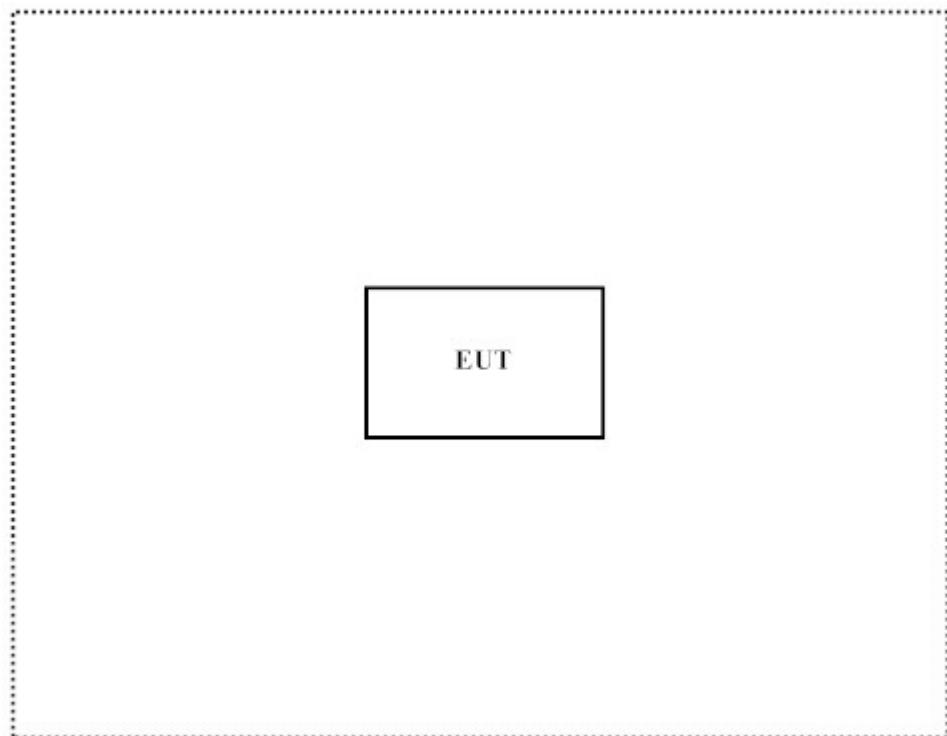

1.5. EUT Exercise Software

1	Setup the EUT as shown in section 1.4.
2	Press and hold the button.
3	Start transmits continually.
4	Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site:
<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

2.2. Test Setup

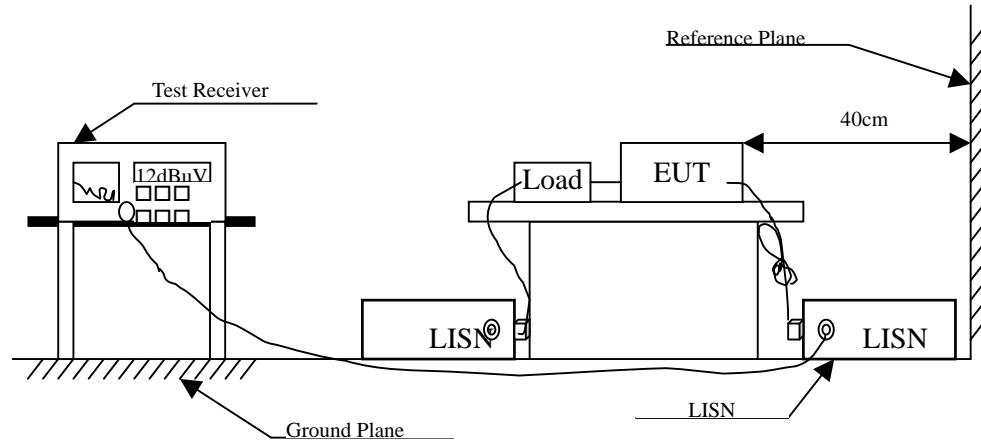

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV)		
Frequency MHz	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231

2.6. Uncertainty

± 2.26 dB

2.7. Test Result

Owing to the DC operation of EUT, this test item is not performed.

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	X Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2015
	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2015
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2015
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2015
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2015
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2015
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar., 2015
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2015
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2015
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2015
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


Note: 1. All instruments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

Radiated Emission Below 1GHz

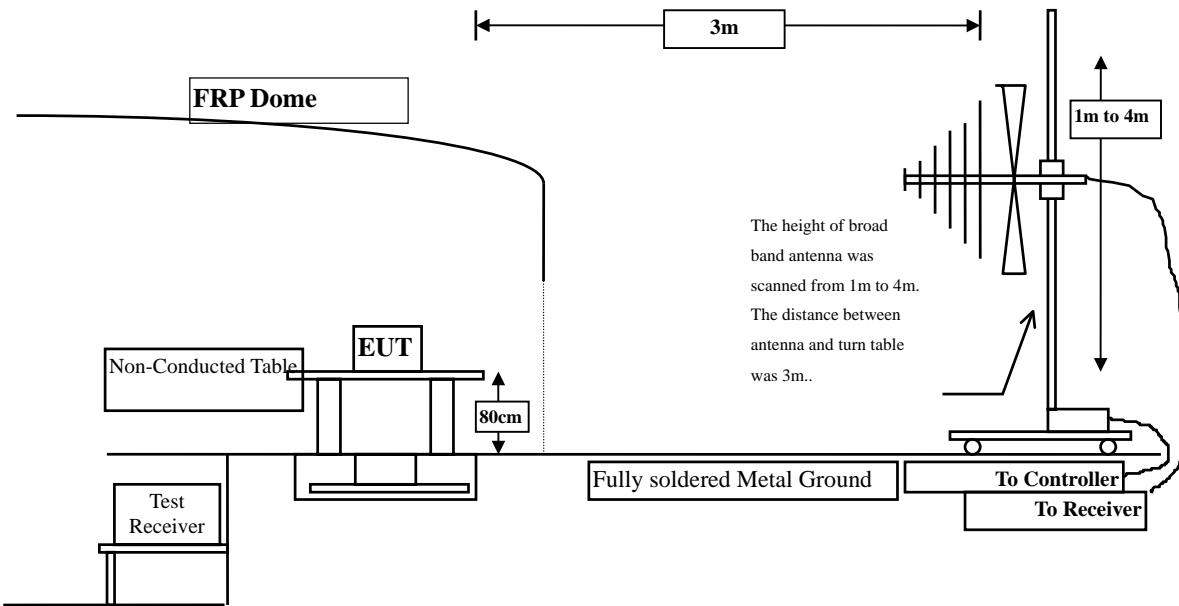

Radiated Emission Above 1GHz

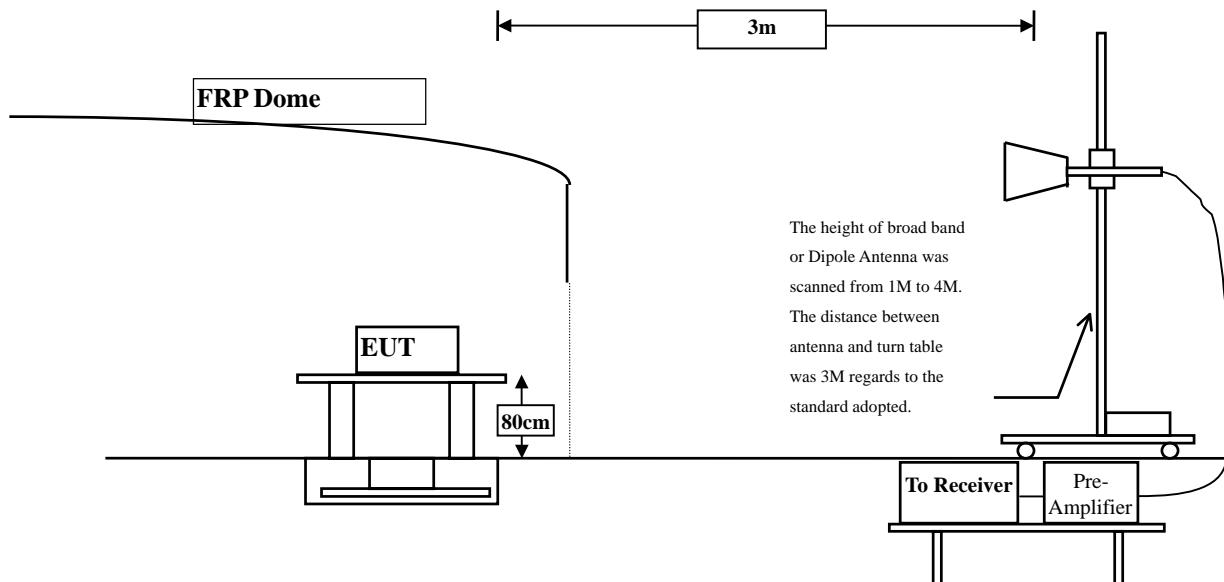

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

Fundamental Frequency MHz	Field Strength of Fundamental	Field Strength of Spurious Emission
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
above 470	12500	1250

Remarks : 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

➤ Spurious electric field strength limits

FCC Part 15 Subpart C Paragraph 15.209 Limits			
Frequency MHz	uV/m	dBuV/m	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	See Remark ¹	300
0.490-1.705	24000/F(kHz)	See Remark ¹	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remarks : 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10, 2013 on radiated measurement.

On the field strength of fundamental and harmonics, the limits shown are based on measuring equipment employing a average detector function. As an alternative, compliance with the limits may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

On the field strength of spurious electric, on any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function.

When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

3.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231

3.6. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

3.7. Test Result

Product	PLL radio remote control transmitter				
Test Item	Fundamental Radiated Emission				
Test Mode	Mode 1: Transmit				
Date of Test	2015/09/13	Test Site		No.3 OATS	

Fundamental Power (X-Line)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

434.420	-1.933	89.709	87.776	-13.064	100.840
---------	--------	--------	--------	---------	---------

Vertical

434.420	-8.913	80.308	71.395	-29.445	100.840
---------	--------	--------	--------	---------	---------

Average Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

434.420	-1.933	50.601	48.668	-32.172	80.840
---------	--------	--------	--------	---------	--------

Vertical

434.420	-8.913	50.440	41.527	-39.313	80.840
---------	--------	--------	--------	---------	--------

Note:

1. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Gain
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. Limit=20dB+(20log(41.667(434.42)-7083.333))

Product	PLL radio remote control transmitter				
Test Item	Fundamental Radiated Emission				
Test Mode	Mode 1: Transmit				
Date of Test	2015/09/13	Test Site		No.3 OATS	

Fundamental Power (Y-Line)

Peak Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

434.420	-1.933	82.724	80.791	-20.049	100.840
---------	--------	--------	--------	---------	---------

Vertical

434.420	-8.913	85.750	76.837	-24.003	100.840
---------	--------	--------	--------	---------	---------

Average Detector:

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

434.420	-1.933	47.743	45.810	-35.030	80.840
---------	--------	--------	--------	---------	--------

Vertical

434.420	-8.913	52.471	43.558	-37.282	80.840
---------	--------	--------	--------	---------	--------

Note:

1. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Gain
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. Limit=20dB+(20log(41.667(434.42)-7083.333))

Product	PLL radio remote control transmitter				
Test Item	Fundamental Radiated Emission				
Test Mode	Mode 1: Transmit				
Date of Test	2015/09/13	Test Site		No.3 OATS	

Fundamental Power (Z-Line)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

434.420	-1.933	82.615	80.682	-20.158	100.840
---------	--------	--------	--------	---------	---------

Vertical

434.420	-8.913	80.947	72.034	-28.806	100.840
---------	--------	--------	--------	---------	---------

Average Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

434.420	-1.933	47.686	45.753	-35.087	80.840
---------	--------	--------	--------	---------	--------

Vertical

434.420	-8.913	50.484	41.571	-39.269	80.840
---------	--------	--------	--------	---------	--------

Note:

1. Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Gain
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. Limit=20dB+(20log(41.667(434.42)-7083.333))

Product	PLL radio remote control transmitter					
Test Item	Harmonic Radiated Emission					
Test Mode	Mode 1: Transmit					
Date of Test	2015/09/12			Test Site	No.3 OATS	

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Peak Limit	Average Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Harmonic Radiated Emission

Horizontal

Peak

1303.260	-4.794	46.850	42.056	-31.944	74.000	54.000
1737.680	-3.976	47.830	43.854	-30.146	74.000	54.000
2172.100	-2.389	39.050	36.661	-37.339	74.000	54.000
2606.520	-1.039	41.260	40.221	-33.779	74.000	54.000
3040.940	-1.439	41.180	39.741	-34.259	74.000	54.000
3475.360	-0.946	37.910	36.964	-37.036	74.000	54.000
3909.780	0.463	43.150	43.613	-30.387	74.000	54.000
4344.200	1.638	37.080	38.717	-35.283	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product	PLL radio remote control transmitter					
Test Item	Harmonic Radiated Emission					
Test Mode	Mode 1: Transmit					
Date of Test	2015/09/12			Test Site	No.3 OATS	

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Peak Limit	Average Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m	dBuV/m

Harmonic Radiated Emission

Vertical

Peak

1303.260	-4.142	40.080	35.937	-38.063	74.000	54.000
1737.680	-2.068	41.790	39.723	-34.277	74.000	54.000
2172.100	-2.090	38.140	36.049	-37.951	74.000	54.000
2606.520	-1.299	38.280	36.981	-37.019	74.000	54.000
3040.940	-1.353	37.640	36.287	-37.713	74.000	54.000
3475.360	-0.297	39.600	39.302	-34.698	74.000	54.000
3909.780	1.579	42.390	43.969	-30.031	74.000	54.000
4344.200	3.429	40.590	44.018	-29.982	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product	PLL radio remote control transmitter		
Test Item	General Radiated Emission		
Test Mode	Mode 1: Transmit		
Date of Test	2015/09/12	Test Site	No.3 OATS

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Quasi-Peak					
286.490	-18.315	32.491	14.176	-31.824	46.000
384.423	-12.929	31.459	18.530	-27.470	46.000
466.811	-11.481	30.562	19.081	-26.919	46.000
563.189	-8.388	32.074	23.686	-22.314	46.000
631.587	-7.261	32.205	24.944	-21.056	46.000
868.840	-7.038	47.950	40.912	-5.088	46.000
 Vertical					
Quasi-Peak					
396.859	-12.821	31.375	18.554	-27.446	46.000
541.426	-11.592	30.890	19.297	-26.703	46.000
650.240	-10.175	30.518	20.343	-25.657	46.000
765.272	-9.293	29.724	20.432	-25.568	46.000
839.888	-7.520	31.301	23.780	-22.220	46.000
868.840	-6.822	45.920	39.097	-6.903	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Transmit time


4.1. Test Equipment

The following test equipment are used during the test:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

4.2. Test Setup

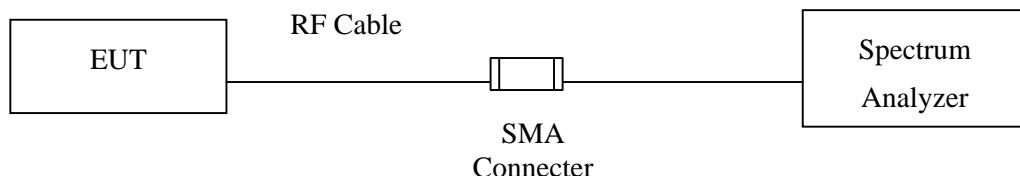

4.3. Limits

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

4.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231


4.5. Uncertainty

± 25ms

4.6. Test Result

Product	PLL radio remote control transmitter		
Test Item	Transmit time		
Test Mode	Mode 1: Transmit		
Date of Test	2015/09/04	Test Site	No.3 OATS

Channel No.	Frequency (MHz)	Measurement Value (Sec)	Limit (Sec)	Result
1	434.42	0.570	< 5	Pass

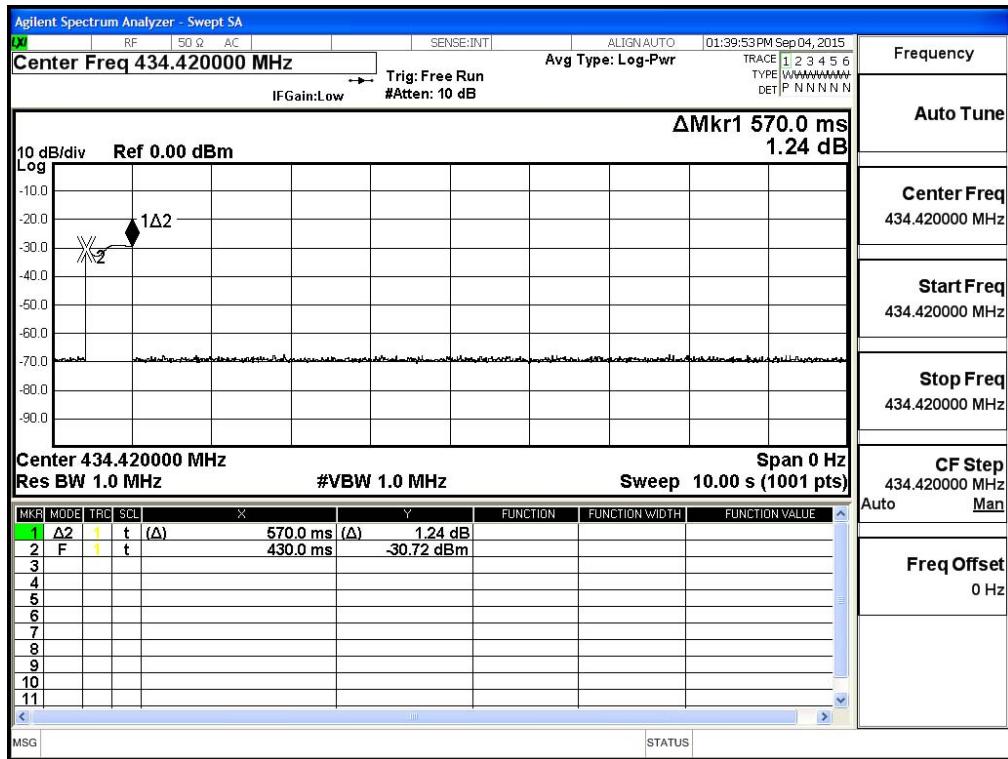

5. Occupied Bandwidth


5.1. Test Equipment

The following test equipment are used during the test:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

5.2. Test Setup

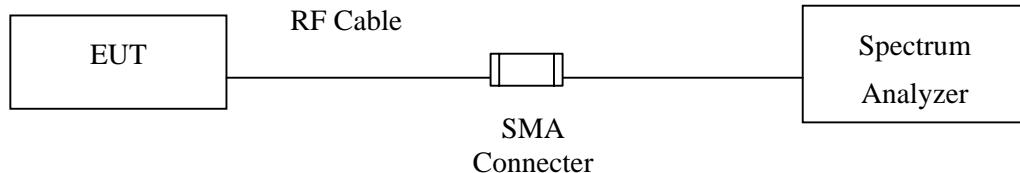

5.3. Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier

5.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.231

5.5. Uncertainty

± 150Hz


5.6. Test Result

Product	PLL radio remote control transmitter		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit		
Date of Test	2015/09/04	Test Site	No.3 OATS

Channel No.	Frequency (MHz)	Measurement Value (MHz)	Limit (MHz)	Result
1	434.42	0.046	1.08605	Pass

Note: Limit = 434.42MHz * 0.25% = 1.08605MHz

Figure Channel 1:

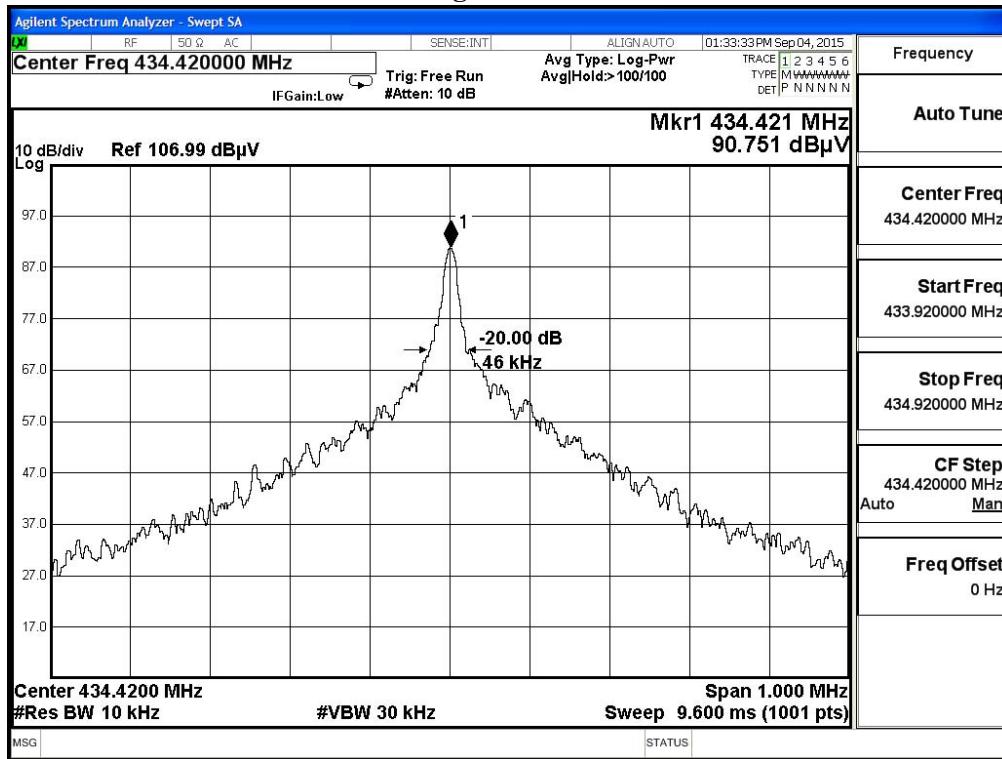

Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs