

FCC Test Report

Product Name	Radio Identification device
Model No.	FS12P01M
FCC ID.	NBGFS12P01M

Applicant	HELLA GmbH & Co. KGaA
Address	Rixbecker Strasse 75, 59552 Lippstadt, Germany

Date of Receipt	Jan. 16, 2018
Issued Date	Jan. 25, 2018
Report No.	1810215R-RFUSP14V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Jan. 25, 2018

Report No.: 1810215R-RFUSP14V00



Product Name	Radio Identification device
Applicant	HELLA GmbH & Co. KGaA
Address	Rixbecker Strasse 75, 59552 Lippstadt, Germany
Manufacturer	HELLA GmbH & Co. KGaA
Factory	1.HELLA GmbH & Co. KGaA 2.Hella Shanghai Electronics Co. Ltd (HSE)
Address	1.Rixbecker Strasse 75, 59552 Lippstadt, Germany 2.No. 411 Jianye Road, Pudong, Shanghai 201201, China
Model No.	FS12P01M
FCC ID.	NBGFS12P01M
EUT Rated Voltage	DC 3V (Power by Battery)
EUT Test Voltage	DC 3V (Power by Battery)
Trade Name	HELLA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By : Jinn Chen
(Senior Adm. Specialist / Jinn Chen)

Tested By : Nova chu
(Engineer / Nova Chu)

Approved By : 
(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. General Information	4
1.1. EUT Description.....	4
1.2. Operation Description	5
1.3. Tested System Details.....	6
1.4. Configuration of tested System	6
1.5. EUT Exercise Software	6
1.6. Test Facility	7
1.7. List of Test Equipment	8
2. Conducted Emission.....	9
2.1. Test Setup	9
2.2. Limits	9
2.3. Test Procedure	9
2.4. Uncertainty	9
2.5. Test Result	10
3. Radiated Emission	11
3.1. Test Setup	11
3.2. Limits	12
3.3. Test Procedure	13
3.4. Uncertainty	13
3.5. Test Result	14
4. Transmit time.....	20
4.1. Test Setup	20
4.2. Limits	20
4.3. Uncertainty	20
4.4. Test Result	21
5. Occupied Bandwidth	22
5.1. Test Setup	22
5.2. Limits	22
5.3. Uncertainty	22
5.4. Test Result	23

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. General Information

1.1. EUT Description

Product Name	Radio Identification device
Trade Name	HELLA
Model No.	FS12P01M
FCC ID	NBGFS12P01M
Frequency Range	315 MHz
Number of Channels	1
Type of Modulation	OOK
Antenna Type	PCB loop antenna

Frequency of Each Channel:

Channel	Frequency
Channel 1:	315 MHz

Note:

1. The EUT is a Remote key for vehicle access with a built-in 315 MHz transmitter.
2. The antenna of EUT is conform to FCC 15.203
3. These tests are conducted on a sample for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.231.
4. This product has different enclosure(Metal / Plastic). DEKRA has initially checked both enclosure variants regarding the power value and found that the metal enclosure is the worst case. The test report considered the worst case variant (metal enclosure) to make sure the remaining test items.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
N/A					

Signal Cable Type	Signal cable Description
N/A	

1.4. Configuration of tested System

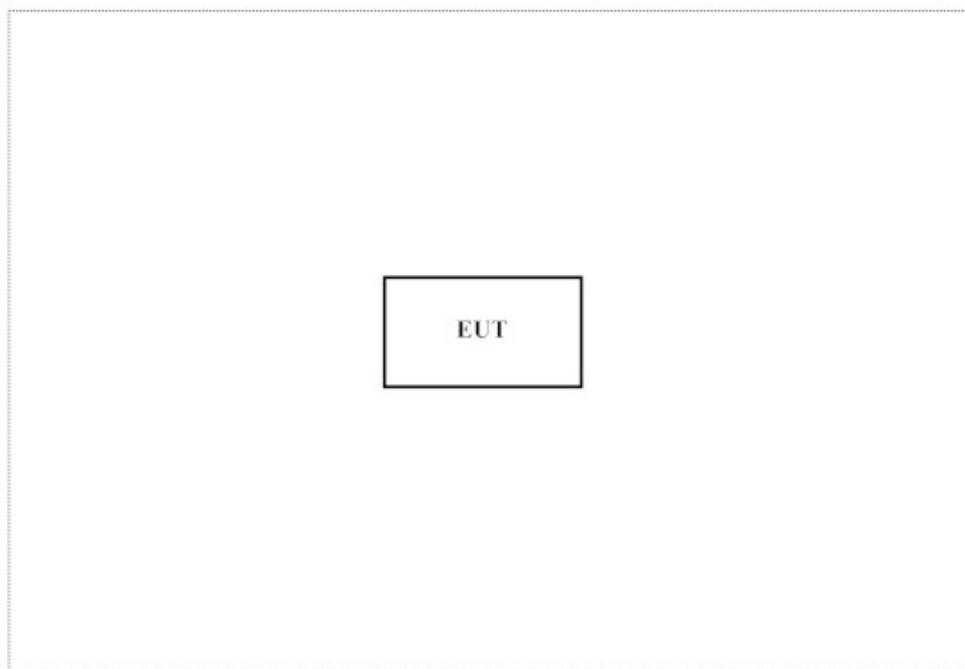

1.5. EUT Exercise Software

1	Setup the EUT as shown in section 1.4.
2	Push the button, start transmit continually.
3	Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Corporation's Web Site: <http://www.dekra.com.tw/chinese/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Corporation's laboratories can be founded in our Web site: <http://www.dekra.com.tw>

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW0023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
	EMI Test Receiver	R&S	ESR7	101602	2017.12.11	2018.12.10
	Two-Line V-Network	R&S	ENV216	101306	2017.02.16	2018.02.15
	Two-Line V-Network	R&S	ENV216	101307	2017.03.17	2018.03.16
	Coaxial Cable	Quietek	RG400_BNC	RF001	2017.05.24	2018.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2017.12.19	2018.12.18
	Power Meter	Anritsu	ML2496A	1548003	2017.12.11	2018.12.10
	Power Sensor	Anritsu	MA2411B	1531024	2017.12.11	2018.12.10
	Power Sensor	Anritsu	MA2411B	1531025	2017.12.11	2018.12.10

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	TESEQ	HLA6121	37133	2016.03.18	2018.03.17
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2017.02.13	2018.02.12
X	Horn Antenna	ETS-Lindgren	3117	00203800	2017.11.10	2018.11.09
	Horn Antenna	Com-Power	AH-840	101087	2017.05.24	2018.05.23
X	Pre-Amplifier	EMCI	EMC001330	980316	2017.05.16	2018.05.15
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2017.05.17	2018.05.16
	Pre-Amplifier	EMCI	EMC05820SE	980310	2017.05.17	2018.05.16
	Pre-Amplifier	EMCI	EMC184045SE	980314	2017.05.17	2018.05.16
	Filter	MICRO TRONICS	BRM50702	G251	2017.08.30	2018.08.29
	Filter	MICRO TRONICS	BRM50716	G188	2017.08.30	2018.08.29
X	EMI Test Receiver	R&S	ESR7	101602	2017.12.11	2018.12.10
X	Spectrum Analyzer	R&S	FSV40	101148	2017.01.24	2018.01.23
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2017.05.25	2018.05.24
	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2017.08.11	2018.08.10

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

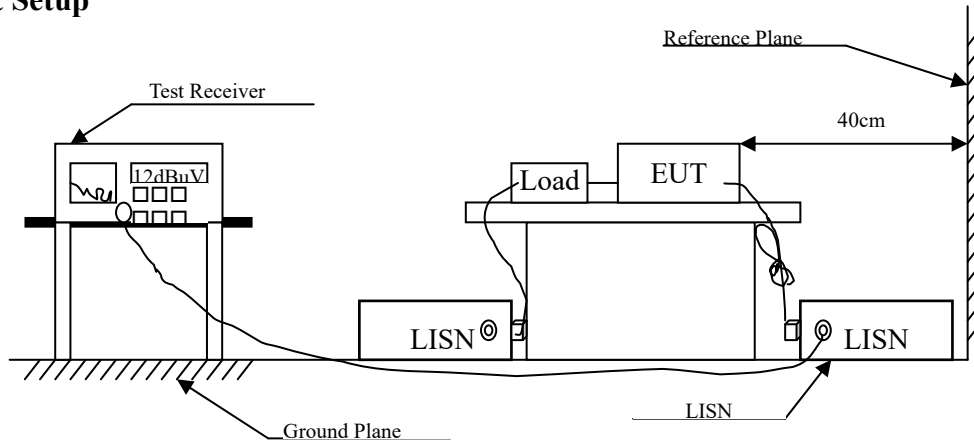

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV)		
Frequency MHz	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Uncertainty

±2.35dB


2.5. Test Result

Owing to the DC operation of EUT, this test item is not performed.


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30MHz

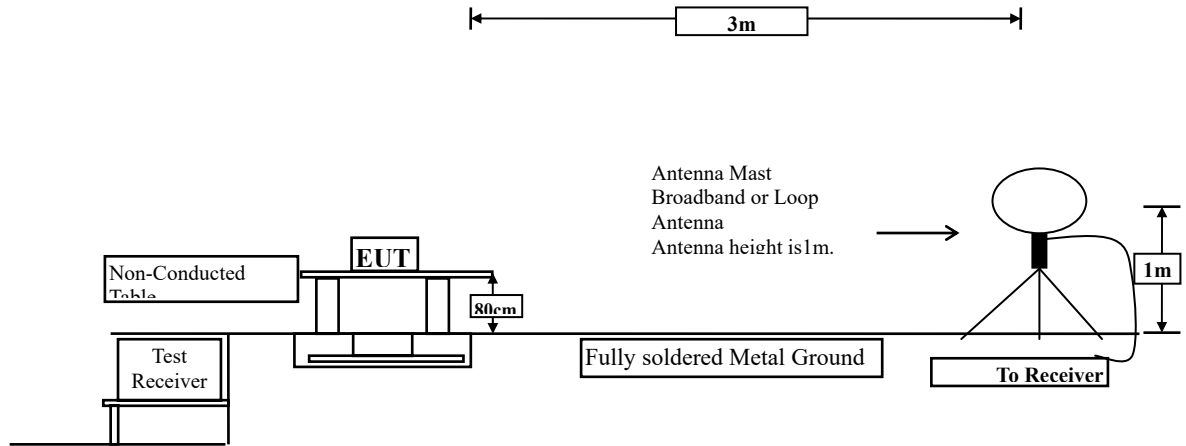

Radiated Emission Below 1GHz

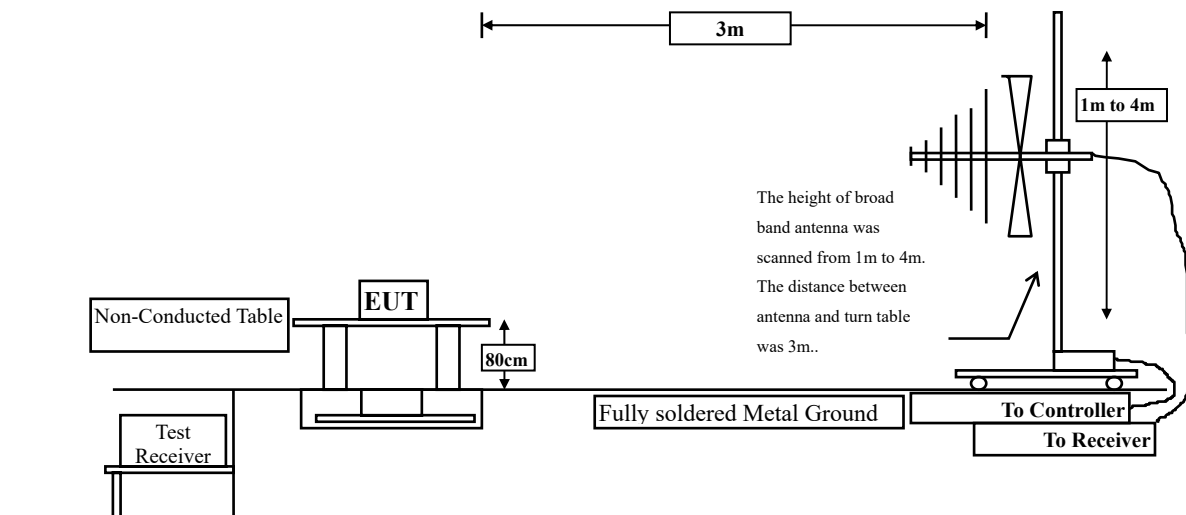

Radiated Emission Above 1GHz

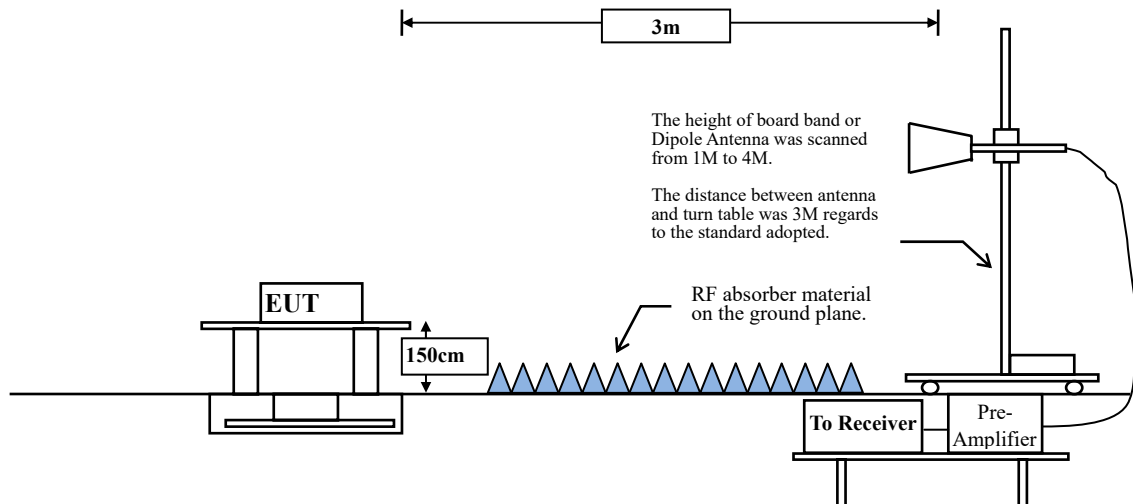

3.2. Limits

➤ Fundamental and Harmonics Emission Limits

Fundamental Frequency MHz	Field Strength of Fundamental	Field Strength of Spurious Emission
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
above 470	12500	1250

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

➤ Spurious electric field strength limits

FCC Part 15 Subpart C Paragraph 15.209 Limits			
Frequency MHz	uV/m	dBuV/m	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	See Remark ¹	300
0.490-1.705	24000/F(kHz)	See Remark ¹	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10, 2013 on radiated measurement.

On the field strength of fundamental and harmonics, the limits shown are based on measuring equipment employing an average detector function. As an alternative, compliance with the limits may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

On the field strength of spurious electric, on any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function.

When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

3.4. Uncertainty

Horizontal polarization :

30-300MHz: ± 4.08 dB ; 300M-1GHz: ± 3.86 dB ; 1-18GHz: ± 3.77 dB ; 18-40GHz: ± 3.98 dB

Vertical polarization :

30-300MHz: ± 4.81 dB ; 300M-1GHz: ± 3.87 dB ; 1-18GHz: ± 3.83 dB ; 18-40GHz: ± 3.98 dB

3.5. Test Result

Product	Remote key for vehicle access
Test Item	Fundamental Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/24

Fundamental Power (X-Line)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	92.600	83.037	-12.583	95.620
---------	--------	--------	--------	---------	--------

Vertical

315.000	-9.563	67.700	58.137	-37.483	95.620
---------	--------	--------	--------	---------	--------

Average Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	83.300	73.737	-1.883	75.620
---------	--------	--------	--------	--------	--------

Vertical

315.000	-9.563	58.700	49.137	-26.483	75.620
---------	--------	--------	--------	---------	--------

Note:

1. Measurement Level = Reading Level + Correct Factor
2. Average Limit=20log(6041.6772)=75.623 dBuV 、 Peak Limit=95.623 dBuV

Product	Remote key for vehicle access
Test Item	Fundamental Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/24

Fundamental Power (Y-Line)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	82.700	73.137	-22.483	95.623
---------	--------	--------	--------	---------	--------

Vertical

315.000	-9.563	81.500	71.937	-23.683	95.623
---------	--------	--------	--------	---------	--------

Average Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	73.800	64.237	-11.383	75.623
---------	--------	--------	--------	---------	--------

Vertical

315.000	-9.563	72.600	63.037	-12.583	75.623
---------	--------	--------	--------	---------	--------

Note:

1. Measurement Level = Reading Level + Correct Factor
2. Average Limit=20log(6041.6772)=75.623 dBuV 、 Peak Limit=95.623 dBuV

Product	Remote key for vehicle access
Test Item	Fundamental Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/24

Fundamental Power (Z-Line)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	80.700	71.137	-4.483	95.623
---------	--------	--------	--------	--------	--------

Vertical

315.000	-9.563	80.100	70.537	-25.083	95.623
---------	--------	--------	--------	---------	--------

Average Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

315.000	-9.563	71.700	62.137	-13.483	75.623
---------	--------	--------	--------	---------	--------

Vertical

315.000	-9.563	71.100	61.537	-14.083	75.623
---------	--------	--------	--------	---------	--------

Note:

1. Measurement Level = Reading Level + Correct Factor
2. Average Limit=20log(6041.6772)=75.623 dBuV 、 Peak Limit=95.623 dBuV

Product	Remote key for vehicle access
Test Item	Harmonic Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/23

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak					
1260.000	-11.127	48.530	37.403	-36.597	74.000
1575.000	-10.168	46.700	36.531	-37.469	74.000
1890.000	-7.721	50.170	42.449	-31.551	74.000
2205.000	-6.422	46.180	39.758	-34.242	74.000
2520.000	-5.751	46.820	41.069	-32.931	74.000
2835.000	-5.260	53.740	48.479	-25.521	74.000
3150.000	-4.953	46.220	41.268	-32.732	74.000
Average					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product	Remote key for vehicle access
Test Item	Harmonic Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/23

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak					
1260.000	-11.127	46.770	35.643	-38.357	74.000
1575.000	-10.168	46.630	36.461	-37.539	74.000
1890.000	-7.721	49.050	41.329	-32.671	74.000
2205.000	-6.422	46.200	39.778	-34.222	74.000
2520.000	-5.751	46.060	40.309	-33.691	74.000
2835.000	-5.260	46.110	40.849	-33.151	74.000
3150.000	-4.953	46.120	41.168	-32.832	74.000
Average					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product	Remote key for vehicle access
Test Item	General Radiated Emission
Test Mode	Mode 1: Transmit (315 MHz)
Date of Test	2018/01/23


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Quasi-Peak					
312.565	-9.618	32.018	22.399	-23.601	46.000
630.000	-2.805	28.869	26.064	-19.936	46.000
818.652	-0.094	30.122	30.028	-15.972	46.000
945.000	1.386	28.502	29.887	-16.113	46.000
950.797	1.444	29.755	31.199	-14.801	46.000
992.971	2.106	29.475	31.580	-22.420	54.000
Vertical					
Quasi-Peak					
505.159	-5.192	30.868	25.675	-20.325	46.000
600.754	-3.062	30.854	27.792	-18.208	46.000
630.000	-2.805	28.618	25.813	-20.187	46.000
749.768	-0.883	29.463	28.580	-17.420	46.000
888.942	0.798	33.945	34.742	-11.258	46.000
945.000	1.386	28.037	29.422	-16.578	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Transmit time

4.1. Test Setup

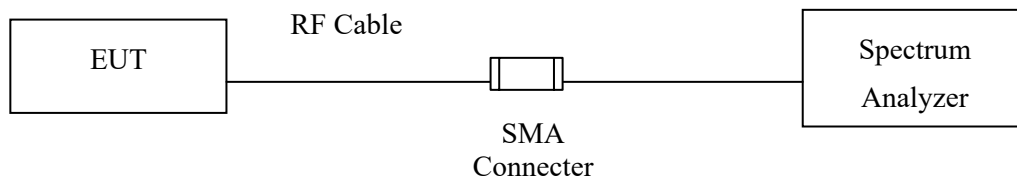

4.2. Limits

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.


4.3. Uncertainty

$\pm 2.31\text{ms}$

4.4. Test Result

Product Remote key for vehicle access
 Test Item Transmit time
 Test Mode Mode 1: Transmit (315 MHz)


Channel No.	Frequency (MHz)	Measurement Value (Sec)	Limit (Sec)	Result
1	315	0.5942	< 5	Pass

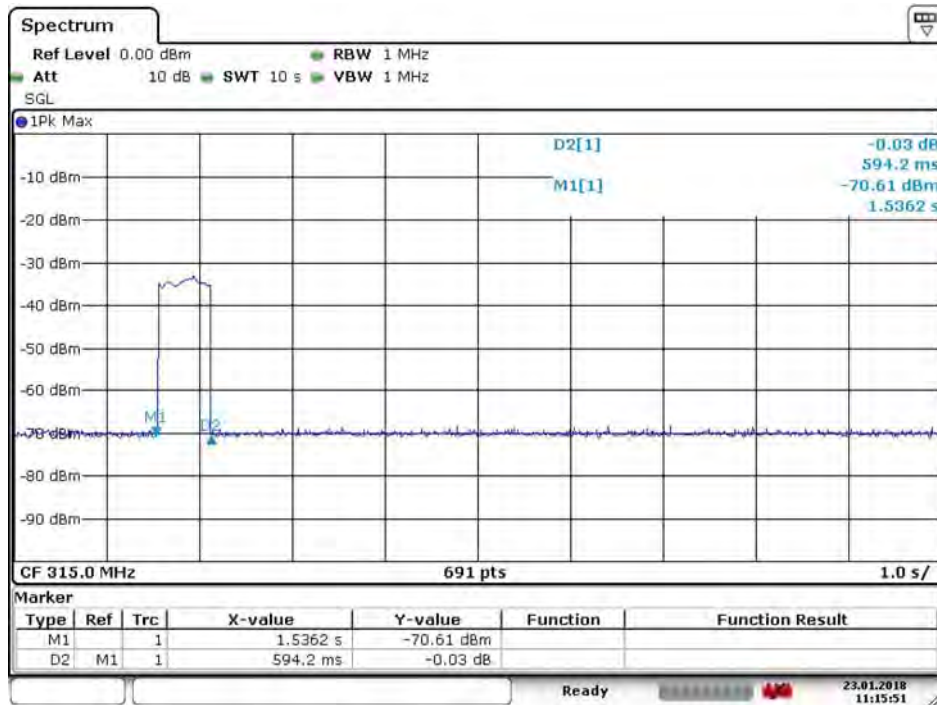

Date: 23 JAN 2018 11:15:52

5. Occupied Bandwidth

5.1. Test Setup

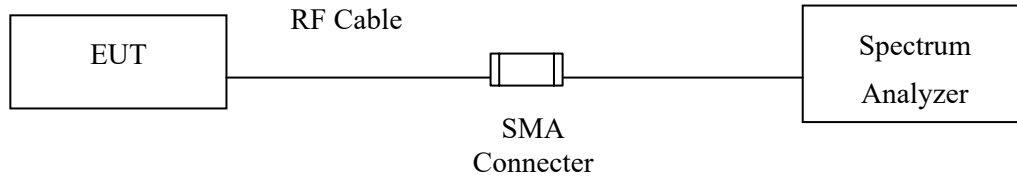

5.2. Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier

5.3. Uncertainty

$\pm 279.2\text{Hz}$


5.4. Test Result

Product Remote key for vehicle access
 Test Item Occupied Bandwidth
 Test Mode Mode 1: Transmit (315 MHz)

Channel No.	Frequency (MHz)	Measurement Value (MHz)	Limit (MHz)	Result
1	315	0.10564	0.7875	Pass

Note: Limit = 315 MHz * 0.25% = 0.7875MHz

Figure Channel 1:

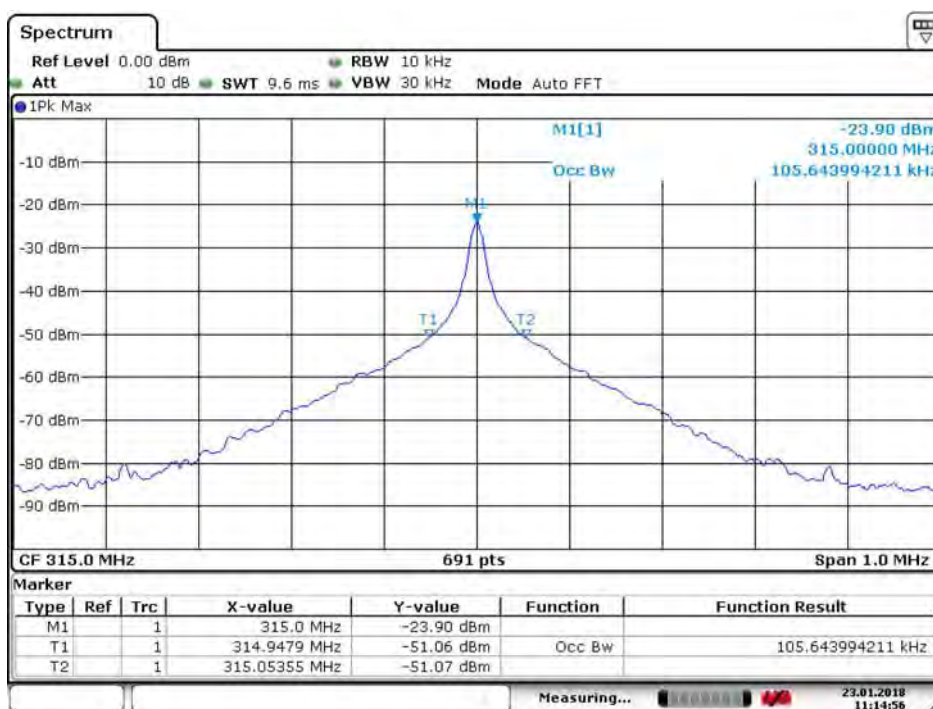

Date: 23.JAN.2018 11:14:56