


Annex no. 11

Periodic Operation Characteristics



RSS-210 Section A1.1.1 (1) / FCC Section 15.231 (a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.



For all buttons the same

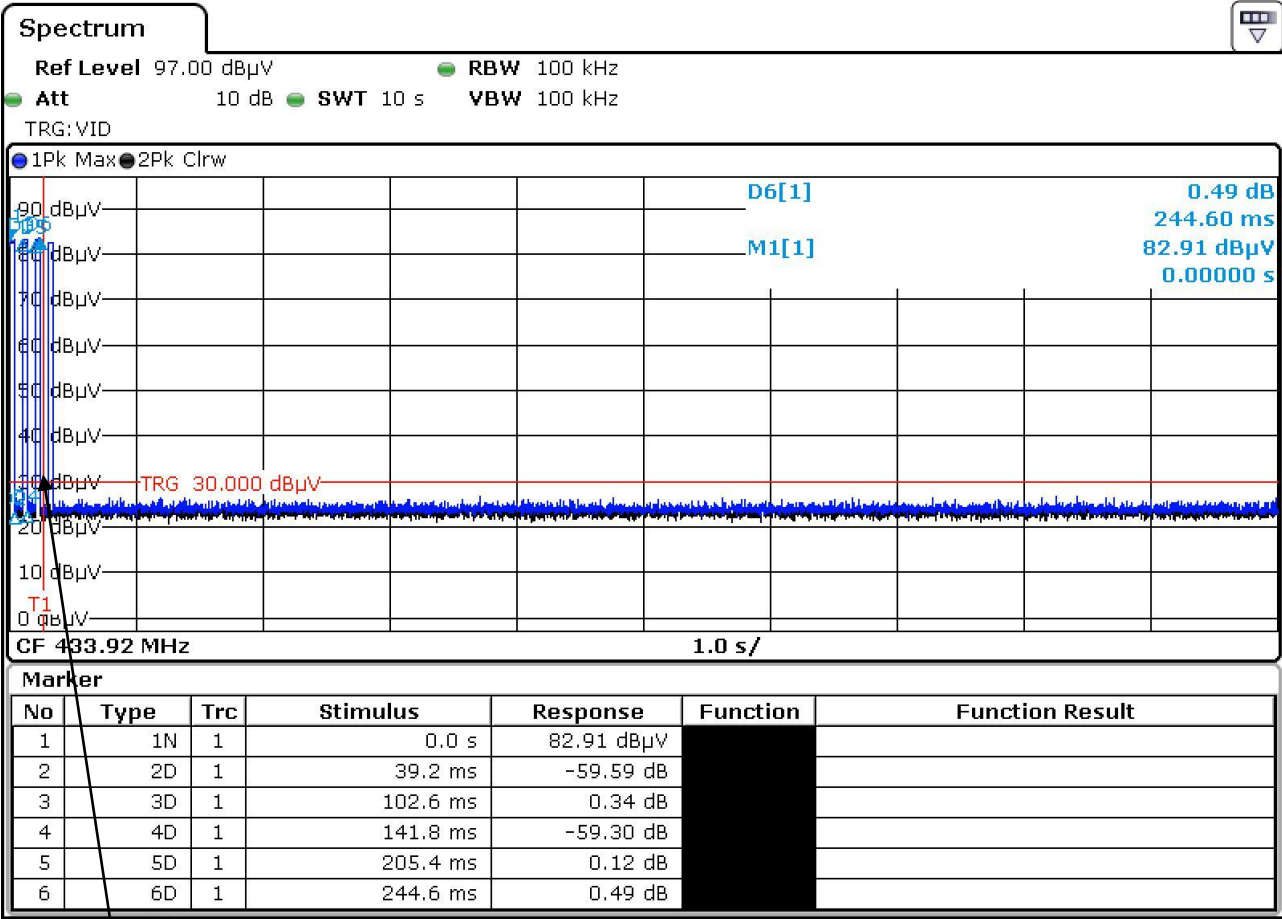

release point

Transmission times (worst case)

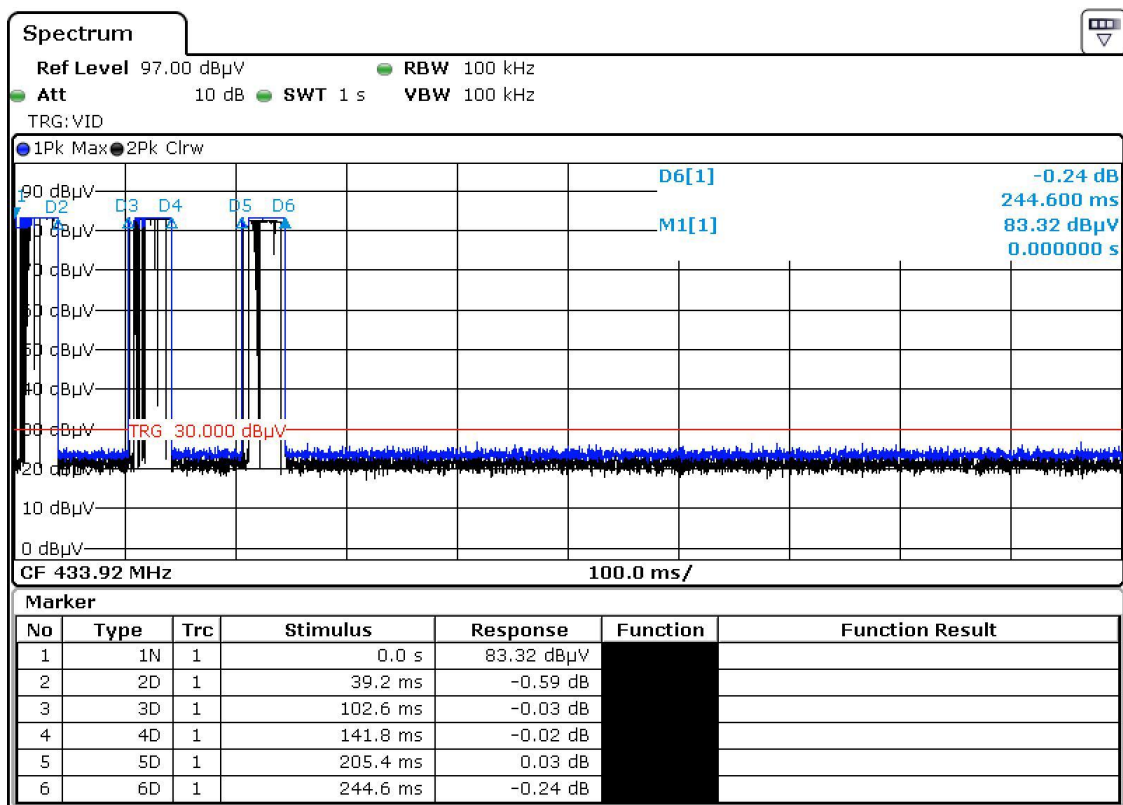
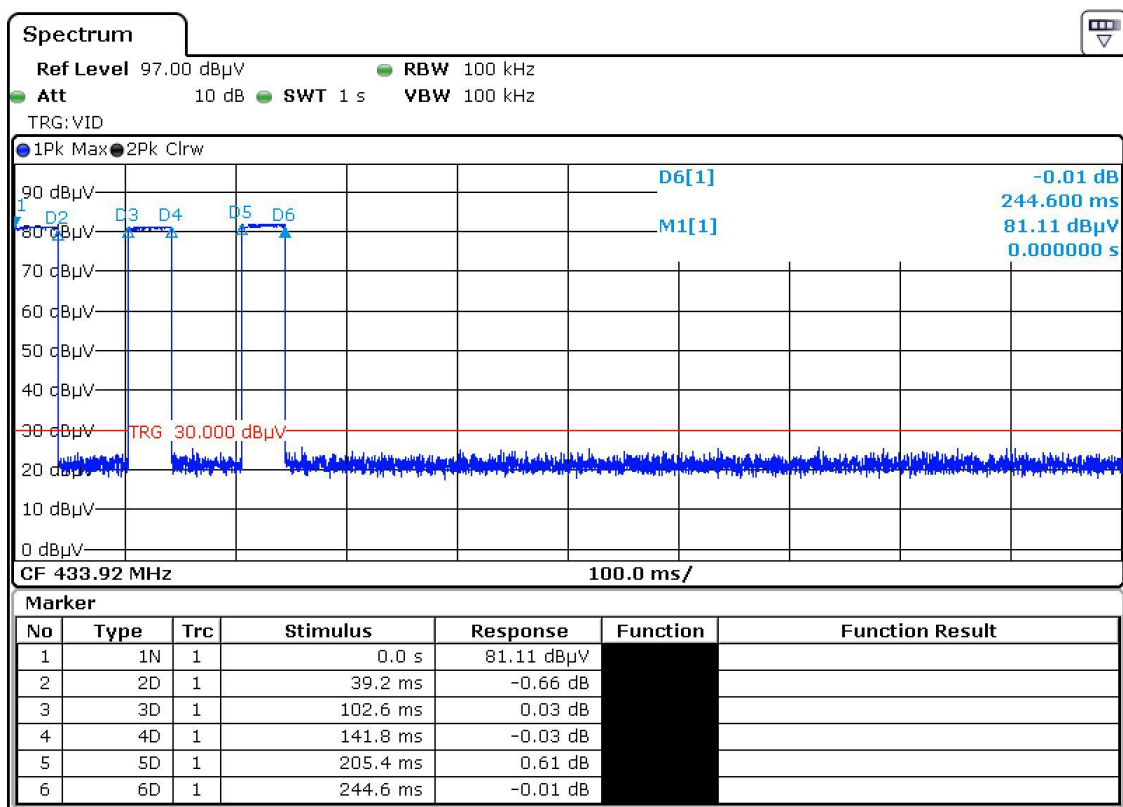


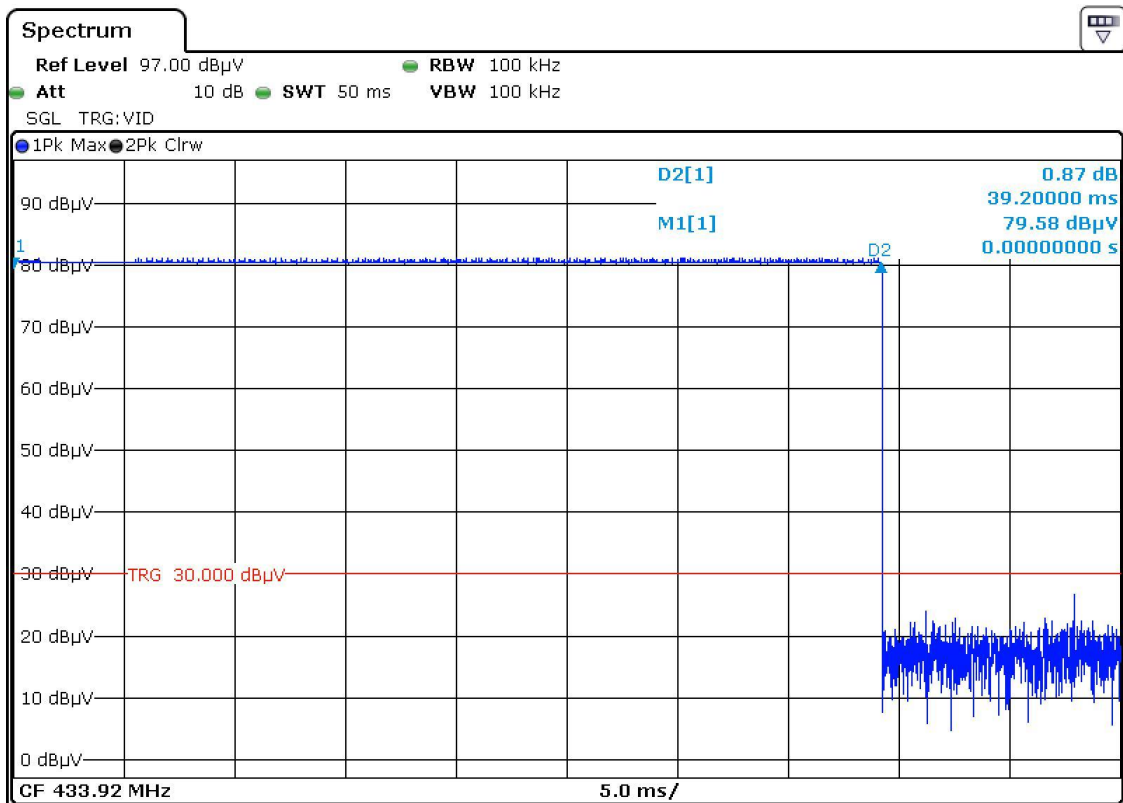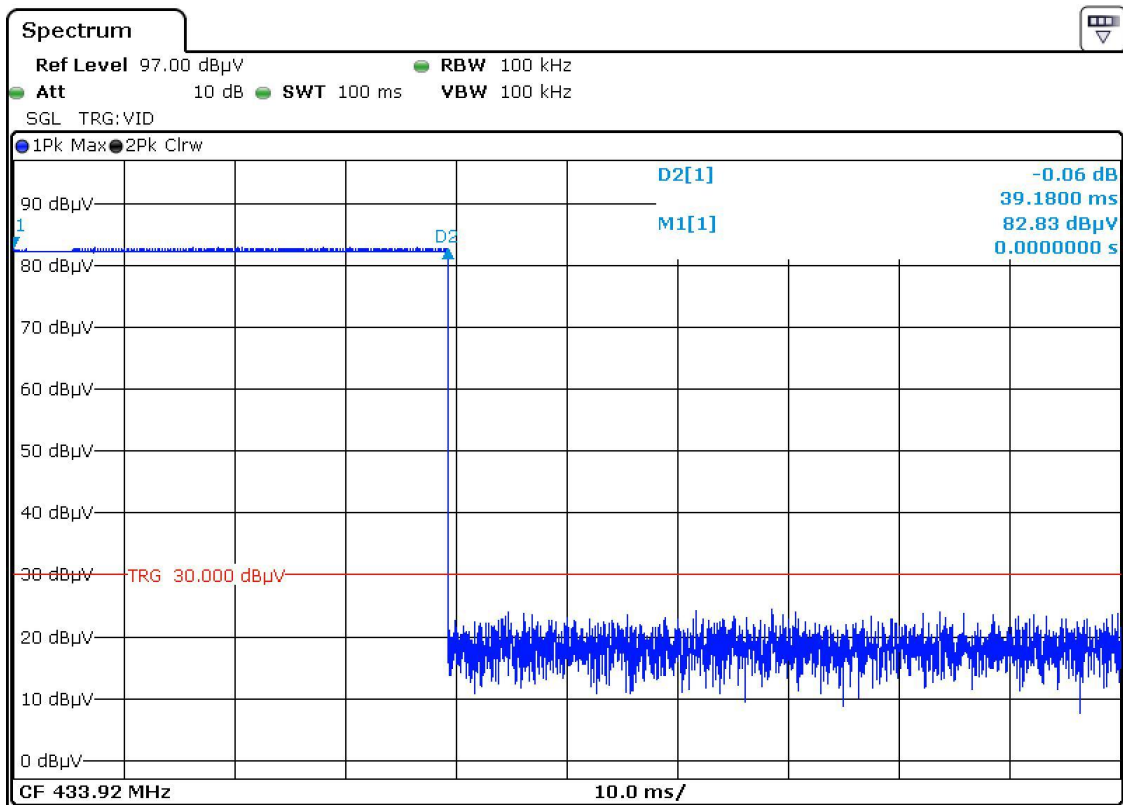

Averaging correction factor:

$$20\log(TX_{on}/100ms) =$$

$$20\log(39.2ms/100ms) = -8.1 \text{ dB}$$

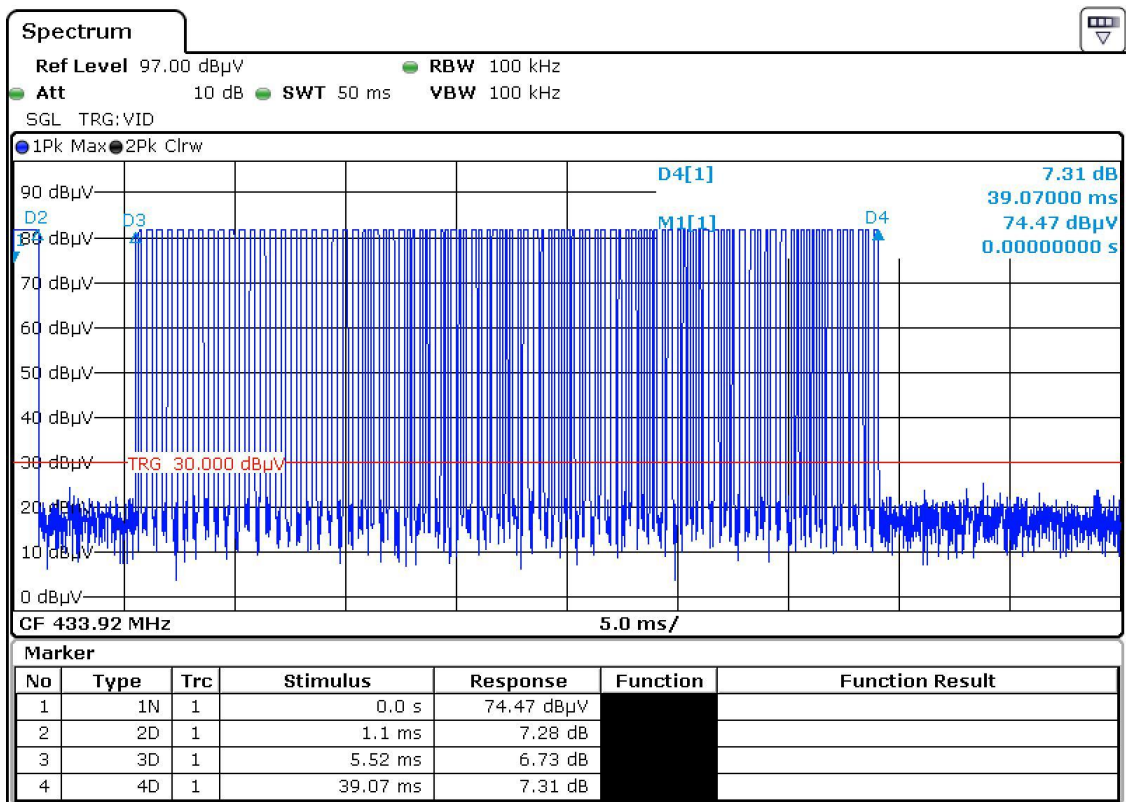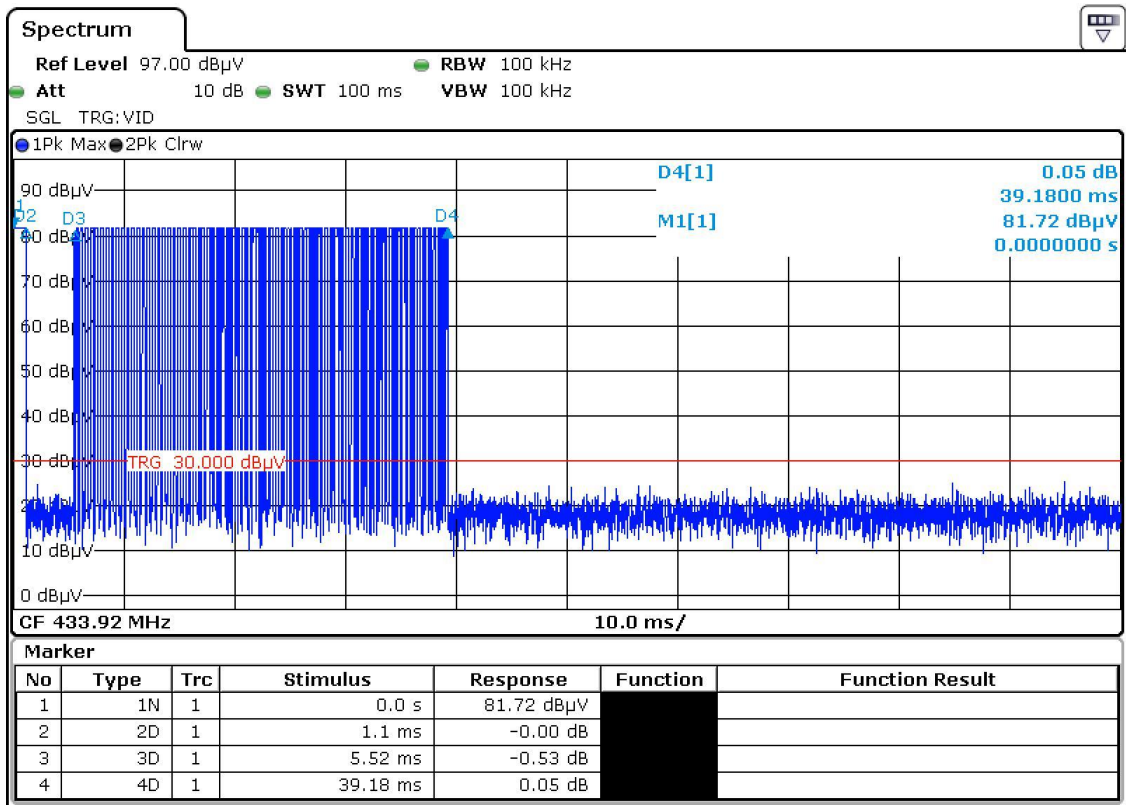

Averaging correction factor:

$$20\log(TX_{on}/100ms) =$$

$$20\log(34.65ms/100ms) = -9.2 \text{ dB}$$