

Exhibit 2

Wireless CDPD Modem

Minstrel III

FCC ID: NBZNRM-6832

RF Power Output Measurements (ERP) Report (With test Set-up Photographs)



Assessment of Compliance

for

Measurement of Effective Radiated Power (ERP) in
accordance with the FCC Rules & Regulations Part 2.1046

Wireless CDPD Modem Minstrel III

Novatel Wireless Technologies Ltd.



February 2000

NVWB-MINSTREL III - 3377

51 Spectrum Way Nepean ON K2R 1E6
Tel: (613) 820-2730 Fax: (613) 820-4161
email: info@aprel.com

Engineering Report

Subject: Measurement of Effective Radiated Power (ERP) in accordance with the FCC Rules & Regulations Part 2.1046

FCC ID: NBZNRM-6832

Equipment: Wireless CDPD Modem Minstrel III

Model: Minstrel III

Client: Novatel Wireless Technologies Ltd.
Suite 200
6715-8th Street, N.E.
Calgary, Alberta
Canada, T2E 7H7

Project #: NVWB-MINSTREL III-3377

Prepared By: APREL Laboratories,
Regulatory Compliance Division

Approved by:  **Date:** March 6, 2000

Jay Sarkar
Director, Standards & Certification

Released by:  **Date:** March 6, 2000

Dr. Jack J. Wojcik, P.Eng.



"SOLUTIONS FOR THE WIRELESS FUTURE"

FCC ID: NBZNRM-6832
Applicant: Novatel Wireless Technologies Ltd.
Equipment: Wireless CDPD Modem
Model: Minstrel III
Standard: FCC Rules and Regulations Part 2.1046

ENGINEERING SUMMARY

This report contains the results of the effective radiated power (ERP) measurement performed on a Novatel Wireless Technologies Ltd. Wireless CDPD Modem, Minstrel III. The measurements were carried out in accordance with the FCC Rules and Regulations Part 2.1046. The product was evaluated for ERP when it was set at the maximum power level.

The DUI was tested for ERP at high, middle, and low frequencies with the maximum ERP obtained at channels (Nos. 991 and 799) with the frequencies being 824.00 MHz and 849.00 MHz respectively. The test data is presented in this report under the section :Test Results.

Summary of the Results

Test Description	Page No.	Test Set-up Figure No.	Results Summary
RF Power Output as Radiated Ref. Paragraph 2.1046	8	1	Passed

INTRODUCTION

General

This report describes the results of the effective radiated power (ERP) measurement conducted on an Novatel Wireless Technologies Ltd. Wireless CDPD Modem, model Minstrel III.

Test Facility

The tests were performed for Novatel Wireless Technologies Ltd. by APREL Laboratories at APREL's EMI facility located in Nepean, Ontario, Canada. The laboratory operates an (3m and 10m) Open Area Test Site (OATS). The measurement facility is calibrated in accordance with ANSI C63.4-1992.

A description of the measurement facility in accordance with the radiated and AC line conducted test site criteria per ANSI C63.4-1992 is on file with the Federal Communications Commission and is in compliance with the requirements of Section 2.948 of the Commissions rules and regulations.

APREL's registration number is 31040/SIT (1300F2)

APREL is accredited by Standard Council of Canada, under PALCAN program (ISO Guide 25). APREL is also accredited by Industry Canada (formerly DOC) and recognised by the Federal Communications Commissions (FCC).

Standard

The evaluation and analysis were conducted in accordance with FCC Rules and Regulations Parts 2.1046 and the appropriate limits.

Test Equipment

The test equipment used during the evaluation is listed in Appendix A with calibration due dates.

Environmental Conditions

Measurements were conducted in open area test site.

- Temperature: 10 °C ± 2
- Relative Humidity: 30 - 50 %
- Air Pressure: 101 kPa ± 3

FCC SUBMISSION INFORMATION

FCC ID: NBZNRM-6832

Equipment: Wireless CDPD Modem

Model: Minstrel III

For: Certification

Applicant: Novatel Wireless Technologies Ltd.
Suite 200
6715-8th Street, N.E.
Calgary, Alberta
Canada, T2E 7H7

Manufacturer: Novatel Wireless Technologies Ltd.
Suite 200
6715-8th Street, N.E.
Calgary, Alberta
Canada, T2E 7H7

Evaluated by: APREL Laboratories
51 Spectrum Way
Nepean, Ontario
Canada K2R 1E6

MANUFACTURER'S DATA

FCC ID No: NBZNRM-6832

Equipment Type: Wireless CDPD Modem

Model: Minstrel III

Reference: FCC Rules and Regulations Parts 2 and Part 22

Manufacturer: Novatel Wireless Technologies Ltd.

Power Source: DC Battery

Development Stage of Unit: Production

GENERAL SPECIFICATIONS

1. Frequency Range: 824 to 849 MHz (Transmitter)
2. Rated Transmitted Output Power: 600 mW
3. Frequency Tolerance: 2.5 ppm
4. Type of Modulation: GMSK
5. Emission Designators(See 47 CFR § 2.201 and §2.202) 28K8FXW
6. Antenna Impedance: 50 Ohms

CHANNELS TESTED

Channel	991 (Lo)	824.000 MHz
Channel	383 (M)	836.490 MHz
Channel	799 (M)	849.000 MHz

TEST RESULTS

FOR

Effective Radiated Power (ERP)
of
Wireless CDPD Modem

Minstrel III

Novatel Wireless Technologies Ltd.

Test: RF Power Output as Radiated (ERP)

Ref.: FCC Part 2 paragraph 2.1046

Criteria: N/A

Set-up: See Figure No. 1.

Equipment: See Appendix A.

Procedure : RF Power Measurement by Radiated Method (ERP):

Test site: The radiated RF power measurement was taken at APREL Laboratory's open area test site (OATS). This open area test site is calibrated to ANSI C63.4 document and a description of the measurement facility is on file with the Federal Communications Commission and is in compliance with the requirement of Section 2.948 of the Commissions rules and regulations.(FCC File No.: 31040/SIT)

The test was set-up as illustrated in Fig.1. The Wireless CDPD Modem Minstrel III was configured to operate at maximum power with carrier **unmodulated**. The equipment under test was placed on a turntable positioned 3 m away from the calibrated receiving antenna, which in turn was connected to the spectrum analyzer.

For each transmitter frequency, the received signal was **maximised** by rotating the turntable and adjusting the height of the receiving antenna. To obtain the actual ERP, the Wireless CDPD Modem Minstrel III was replaced by a vertically polarised half-wave dipole antenna fed by an RF power amplifier and signal generator. The center of the dipole antenna was placed in the same location as the Wireless CDPD Modem Minstrel III. The signal generator level was adjusted until the reading on the spectrum analyzer was identical to that obtained when the Wireless CDPD Modem Minstrel III was on the turntable. The output of power amplifier was disconnected from the substitute dipole and connected to an RF power meter. **The effective radiated power was read directly form the power meter.**

The process was repeated for two more channels.

Results: See Table 1

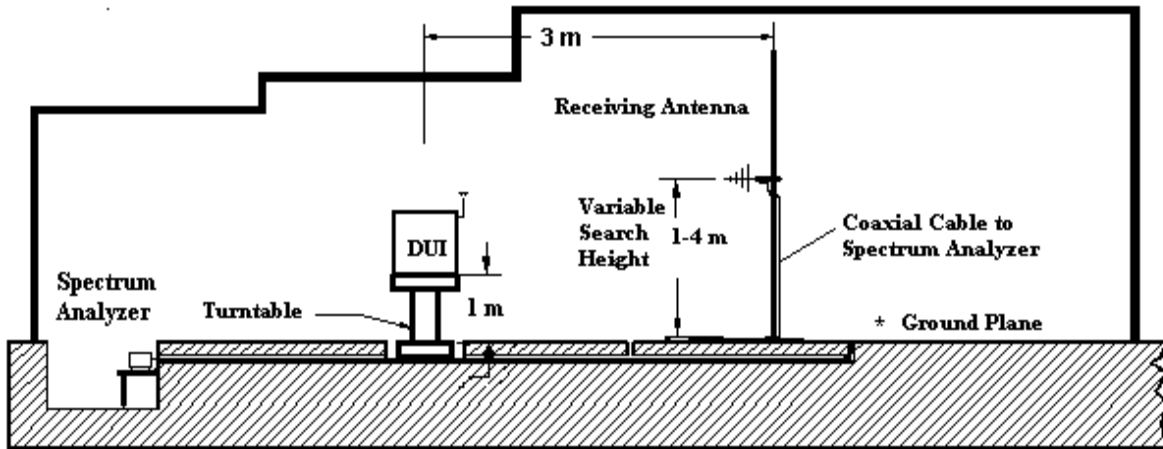


Figure 1.a Test set up for the Radiated Power (ERP) Measurement in OATS (not to scale)



Fig. 1.b APREL's OATS (Open Area Test Site)

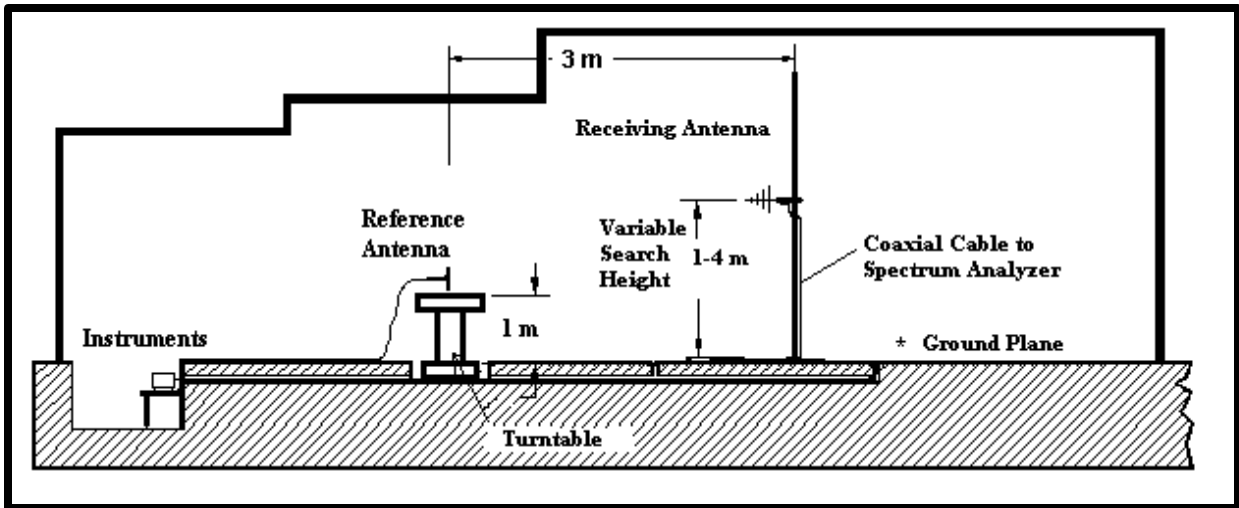


Figure 1.c Test set up for the Radiated Power (ERP) Measurement in OATS (not to scale)
The Handheld wireless modem is replaced by Reference Dipole Antenna.

Table 1.
RF Output Power Measurement
ERP
Power Level : 0

Channel No.	Nominal Transmit Frequency	Manufacturer's Rated Output Power	Measured Output Power (ERP) (power level: 0)	(ERP) (power level: 0)
	(MHz)	(W)	(dBm)	(W)
991	824.000	0.6	28.2	0.661
383	836.490	0.6	27.5	0.562
799	849.000	0.6	28.2	0.661

APPENDIX A

List of Test Equipment

List of Equipment


Description	Manufacturer	Model #	Asset #	Cal . Due Data
Spectrum Analyzer	Anritsu	MS2661C	301330	Dec 10, 2000
20 dB Attenuator	Narda	4779-20	301370	May 18, 2000
Signal Generator	Hewlett-Packard	HP 8662A	100456	Nov 1, 2000
RF Power Amplifier	Amplifier Research	25W100M	100735	Sep 16, 2000
Substitute Reference Dipole	APREL Inc.	D-8355	N/A	June 16, 2000
Log-Periodic Antenna	APREL Inc.	ALP-1	100761	July 21, 2000
Turntable with Controller	EMCO	1060-1.241	100506	CNR
Computer Controlled Antenna Position Mast	EMCO	1051-12	100507	CNR
OATS	APREL Inc.	3m & 10m	N/A	N/A

APPENDIX B

Photographs



Novatel Minstrel III

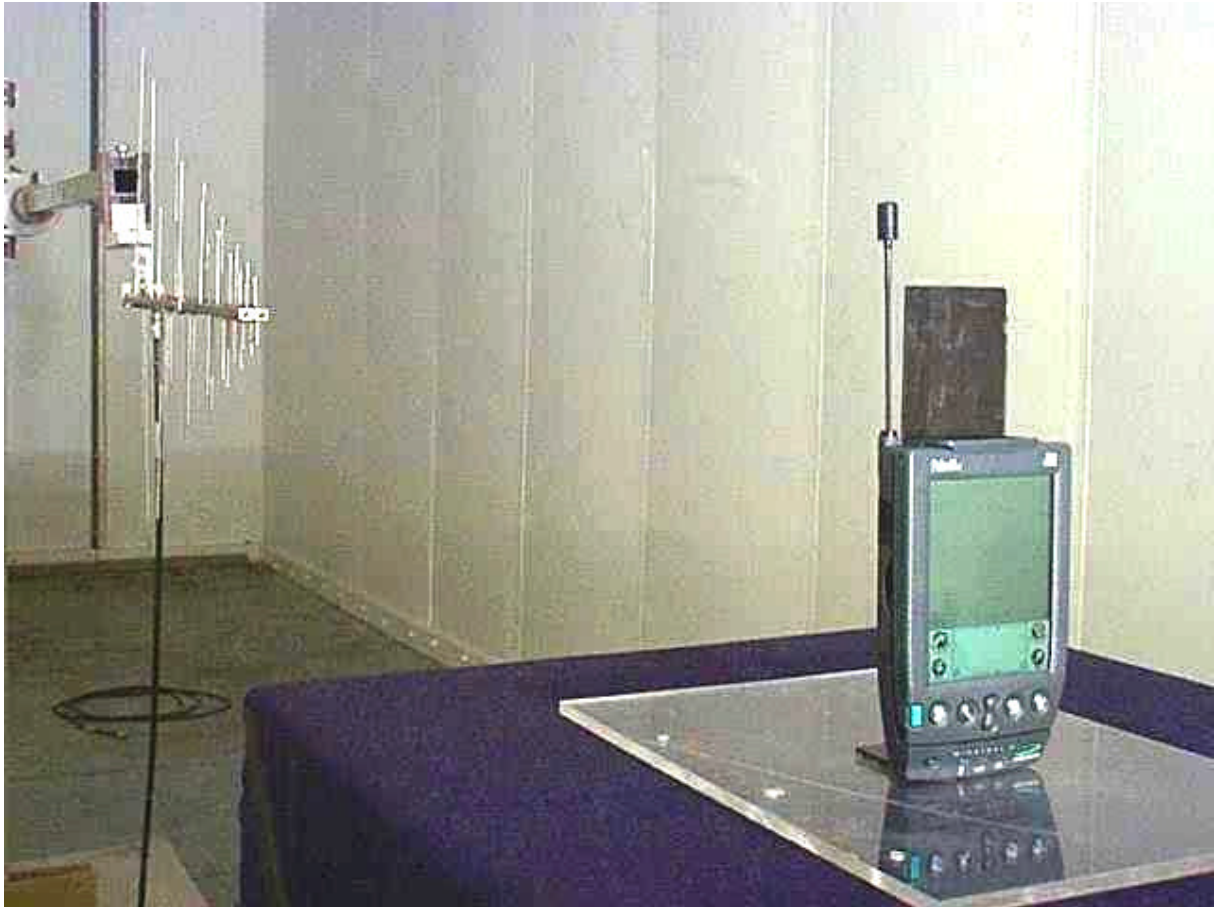

ERP measurement in OATS



Substitute Reference Dipole Antenna Used for ERP Measurement