



# RF EXPOSURE LAB, LLC

2867 Progress Place, Suite 4D • Escondido, CA 92029 • U.S.A.

TEL (760) 737-3131 • FAX (760) 737-9131

<http://www.rfexposurelab.com>

## CERTIFICATE OF COMPLIANCE SAR EVALUATION

Novatel Wireless  
6715 8<sup>th</sup> Street N.E.  
Calgary, Alberta, Canada T2E 7H7

Dates of Test: July 27-August 4, 2007  
Test Report Number: SAR.20070802  
Revision C

FCC ID:	NBZNRM-EU860D
IC Certificate:	3229A-EU860D
Model(s):	EU860D in Dell Latitude XT Tablet/PC
Broadcom WLAN Modules:	Model: BCM94311MCAG, FCC ID: QDS-BRCM1019; Model: BCM94311MCG, FCC ID: QDS-BRCM1020; Model: BCM94321MC; FCC ID: QDS-BRCM1022
Test Sample:	Production
Serial No.:	5B280EA7
Equipment Type:	Wireless Modem
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	824.07 – 848.31 MHz, 1851.25 – 1908.75 MHz, 2412 – 2462 MHz, 5180 – 5250 MHz, 5250 – 5320 MHz, 5745 – 5825 MHz
Frequency Tolerance:	± 25 ppm
Maximum RF Output: (average rms)	850 MHz (GSM) – 23.9 dBm, 850 MHz (GPRS) – 27.5 dBm, 850 MHz (WCDMA) – 24.5 dBm, 1900 MHz (GSM) – 19.8 dBm, 1900 MHz (GPRS) – 25.4 dBm, 1900 MHz (WCDMA) – 24.1 dBm, 2450 MHz – 19.7 dBm, 5200 MHz – 10.3 dBm, 5300 MHz – 14.6 dBm, 5800 MHz – 18.0 dBm Conducted
Maximum RF Output: (Peak Power)	850 MHz (GSM) – 32.9 dBm, 850 MHz (GPRS) – 33.5 dBm, 850 MHz (WCDMA) – 27.2 dBm, 1900 MHz (GSM) – 28.8 dBm, 1900 MHz (GPRS) – 25.4 dBm, 1900 MHz (WCDMA) – 27.8 dBm Conducted
Signal Modulation:	DSSS, OFDM, GMSK, 8-PSK, WCDMA
Antenna Type (Length):	WWAN – External Whip(72mm x 4mm); WLAN – Internal Antenna Locate at Top of LCD
Battery:	Laptop Supplied
Application Type:	Class II
FCC Rule Parts:	Part 22 & 24
Industry Canada:	RSS-102

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2003, OET Bulletin 65 Supp. C, RSS-102 and Safety Code 6 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

Jay M. Moulton  
Vice President



Certificate # 2387.01



## Table of Contents

1. Introduction	3
SAR Definition [5].....	3
2. SAR Measurement Setup	4
Robotic System.....	4
System Hardware .....	4
System Description .....	4
E-Field Probe .....	5
3. Robot Specifications	7
4. Probe and Dipole Calibration .....	8
5. Phantom & Simulating Tissue Specifications.....	9
SAM Phantom.....	9
Brain & Muscle Simulating Mixture Characterization .....	9
Device Holder .....	9
6. Definition of Reference Points.....	10
Ear Reference Point.....	10
Device Reference Points .....	10
7. Test Configuration Positions .....	11
Positioning for Cheek/Touch [5] .....	11
Positioning for Ear / 15° Tilt [5].....	12
Body Worn Configurations .....	13
8. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2].....	14
Uncontrolled Environment.....	14
Controlled Environment .....	14
9. Measurement Uncertainty	15
10. System Validation	16
Tissue Verification.....	16
Test System Verification .....	16
11. SAR Test Data Summary	17
Procedures Used To Establish Test Signal.....	17
Device Test Condition .....	17
12. FCC 3G Measurement Procedures – June 2006.....	18
12.1 Procedures Used to Establish RF Signal for SAR.....	18
12.2 SAR Measurement Conditions for UMTS.....	18
SAR Data Summary – 835 MHz Body GPRS .....	23
SAR Data Summary – 850 MHz Body WCDMA/HSDPA Inactive .....	24
SAR Data Summary – 1900 MHz Body GPRS .....	25
SAR Data Summary – 1900 MHz Body WCDMA/HSDPA Inactive .....	26
SAR Data Summary – BCM94311MCAG Module (1019).....	27
SAR Data Summary – BCM94311MCG Module (1020).....	28
SAR Data Summary – BCM94321MC Module (1022).....	29
13. Test Equipment List	30
14. Conclusion	31
15. References	32
Appendix A – System Validation Plots and Data .....	33
Appendix B – SAR Test Data Plots.....	51
Appendix C – SAR Test Setup Photos .....	111
Appendix D – Probe Calibration Data Sheets.....	115
Appendix E – Dipole Calibration Data Sheets .....	166
Appendix F – Phantom Calibration Data Sheets .....	211



## 1. Introduction

This measurement report shows compliance of the Novatel Wireless Model EU860D FCC ID: NBZNRM-EU860D with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 3229A-EU860D with RSS102 & Safety Code 6. The FCC have adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], FCC OET Bulletin 65 Supp. C – 2001 [4], IEEE Std.1528 – 2003 Recommended Practice [5], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

## SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = rms electric field strength (V/m)



## 2. SAR Measurement Setup

### Robotic System

The measurements are conducted utilizing the ALSAS-10-U automated dosimetric assessment system. The ALSAS-10-U is designed and manufactured by April Laboratories in Nepean, Ontario, Canada. The system utilizes a Robcomm 3 robot manufactured by ThermoCRS located in Michigan USA.

### System Hardware

The system consists of a six axis articulated arm, controller for precise probe positioning (0.05 mm repeatability), a power supply, a teach pendant for teaching area scans, near field probe, an IBM Pentium 4™ 2.66 GHz PC with Windows XP Pro™, and custom software developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturer's site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

### System Description


The ALSAS-10-U has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$



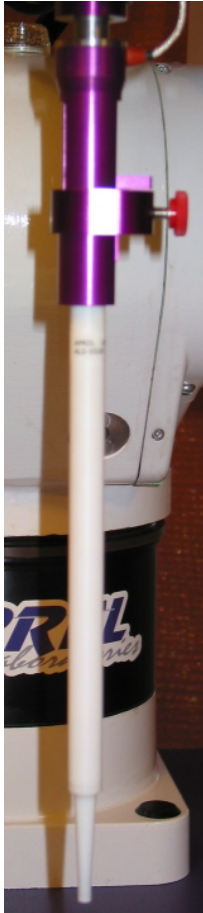

The April E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.

Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then assess the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).

The overall uncertainty for the methodology and algorithms the ALSAS-10-U used during the SAR calculation was evaluated using the data from IEEE 1528 f3 algorithm:


$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left( e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.


## E-Field Probe

The E-field probe used by RF Exposure Lab, LLC, has been fully calibrated and assessed for isotropic, and boundary effect. The probe utilizes a triangular sensor arrangement as detailed in the diagram below right.





**Δ-BEAM**



The SAR is assessed with the probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (Z height). The diagram above right shows how the center of the sensor is defined with the location of the diode placed at the center of the dipole. The 5mm default in the Z axis is the optimum height for assessing SAR where the boundary effect is at its least, with the probe located closest to the phantom surface (boundary).



### 3. Robot Specifications

#### Specifications

Positioner:	ThermoCRS, Robot Model: Robocomm 3
Repeatability:	0.05 mm
No. of axis:	6

#### Data Acquisition Card (DAC) System

##### Cell Controller

Processor:	Pentium 4™
Clock Speed:	2.66 GHz
Operating System:	Windows XP Pro™

##### Data Converter

Features:	Signal Amplifier, End Effector, DAC
Software:	ALSAS 10-U Software

##### E-Field Probe

Model:	Various See Probe Calibration Sheet
Serial Number:	Various See Probe Calibration Sheet
Construction:	Triangular Core Touch Detection System
Frequency:	10MHz to 6GHz

##### Phantom

Phantom:	Uniphantom, Right Phantom, Left Phantom
----------	---





## **4. Probe and Dipole Calibration**

**See Appendix D and E.**



## 5. Phantom & Simulating Tissue Specifications

### SAM Phantom



The Aprel system utilizes three separate phantoms. Each phantom for SAR assessment testing is a low loss dielectric shell, with shape and dimensions derived from the anthropomorphic data of the 90<sup>th</sup> percentile adult male head dimensions as tabulated by the US Army. The SAM phantom shell is bisected along the mid sagittal plane into right and left halves. The perimeter sidewalls of each phantom half is extended to allow filling with liquid to a depth of 15 cm that is sufficient to minimize reflections from the upper surface [5]. See photos in Appendix C.

### Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a glycol based chemical and saline solution. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following tables. Other head and body tissue parameters that have not been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 5.1 Typical Composition of Ingredients for Tissue**

Ingredients		Simulating Tissue				
		835 MHz Muscle	1900 MHz Muscle	2450 MHz Muscle	5200 MHz Muscle	5800 MHz Muscle
Mixing Percentage						
Water		52.40	69.91	73.20	58.85	59.00
Sugar		0.00	29.96	0.00	41.00	40.60
Salt		45.00	0.00	0.04	0.00	0.00
HEC		1.40	0.13	0.00	0.10	0.30
Bactericide		0.10	0.00	0.00	0.05	0.10
DGBE		1.00	0.00	26.70	0.00	0.00
Dielectric Constant	Target	55.20	53.30	52.70	48.96	48.25
Conductivity (S/m)	Target	0.97	1.52	1.95	5.35	5.96

### Device Holder




In combination with the SAM phantom, the mounting device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can easily, accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, and uni-phantom).



## 6. Definition of Reference Points

### Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 6.1 Close-up side view of ERP's**



**Figure 6.2 Front, back and side view of SAM**

### Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” is then located at the same level as the center of the ear reference point. The test device is positioned so that the “vertical centerline” is bisecting the front surface of the device at it's top and bottom edges, positioning the “ear reference point” on the outer surface of both the left and right head phantoms on the ear reference point [5].

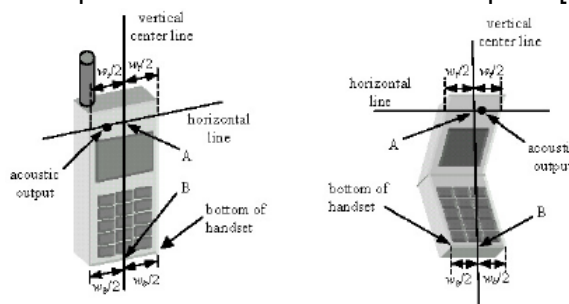


**Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points**



## 7. Test Configuration Positions


### Positioning for Cheek/Touch [5]

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom.

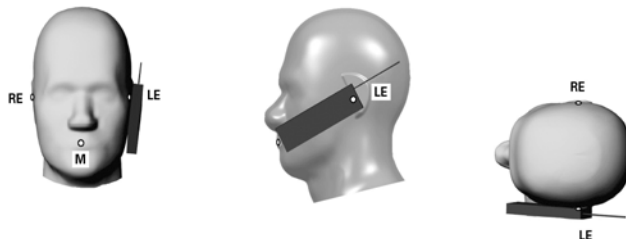

**Figure 7.1 Front, Side and Top View of Cheek/Touch Position**

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure 7.2.




**Figure 7.2 Side view w/ relevant markings**



## Positioning for Ear / 15° Tilt [5]

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure 7.3).

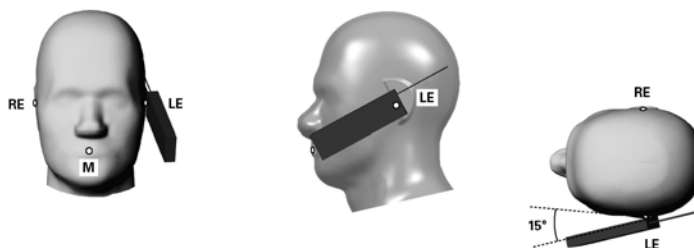

**Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position**



## Body Worn Configurations

Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.



## 8. ANSI/IEEE C95.1 – 1999 RF Exposure Limits [2]

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Brain	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



## 9. Measurement Uncertainty

### Exposure Assessment Measurement Uncertainty

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	$c_i^1$ (1-g)	$c_i^1$ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	•3	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	•3	•cp	•cp	4.4	4.4
Boundary Effect	1.0	rectangular	•3	1	1	0.6	0.6
Linearity	4.7	rectangular	•3	1	1	2.7	2.7
Detection Limit	1.0	rectangular	•3	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	•3	1	1	0.5	0.5
Integration Time	1.7	rectangular	•3	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	•3	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	•3	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	•3	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	•3	1	1	2.1	2.1
Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	4.2	rectangular	•3	1	1	2.4	2.4
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	•3	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	•3	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	0.5	normal	1	0.7	0.5	0.4	0.3
Liquid Permittivity(target)	5.0	rectangular	•3	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	1.0	normal	1	0.6	0.5	0.6	0.5
Combined Uncertainty		RSS				9.6	9.4
Combined Uncertainty (coverage factor=2)		Normal (k=2)				19.1	18.8



## 10. System Validation

### Tissue Verification

**Table 10.1 Measured Tissue Parameters**

		835 MHz Body		1900 MHz Body		2450 MHz Body	
Date(s)		Jul. 27, 2007		Jul. 30, 2007		Aug. 3, 2007	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		55.20	55.21	53.30	52.58	52.70	51.76
Conductivity: $\sigma$		0.970	0.96	1.52	1.48	1.95	1.97
		5250 MHz Body		5800 MHz Body			
Date(s)		Jul. 26, 2007		Jul. 30, 2007			
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured		
Dielectric Constant: $\epsilon$		48.95	48.62	48.22	48.04		
Conductivity: $\sigma$		5.36	5.26	5.98	6.08		

See Appendix A for data printout.


### Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at the test frequency by using the system kit. Power is extrapolated to 1 watt. (Graphic Plots Attached)

**Table 10.2 System Dipole Validation Target & Measured**

	Test Frequency	Targeted SAR <sub>1g</sub> (W/kg)	Measure SAR <sub>1g</sub> (W/kg)	Deviation (%)
27-Jul-2007	835 MHz	9.5	9.49	+ 0.11
30-Jul-2007	1900 MHz	39.7	39.38	- 0.81
03-Aug-2007	2450 MHz	52.4	52.88	-0.92
03-Aug-2007	5250 MHz	62.9	63.47	+ 0.91
04-Aug-2007	5800 MHz	60.3	56.80	- 5.80

See Appendix A for data plots.

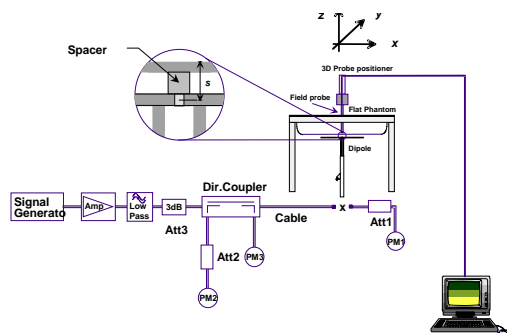

**Figure 10.1 Dipole Validation Test Setup**



## **11. SAR Test Data Summary**

### **See Measurement Result Data Pages**

See Appendix B for SAR Test Data Plots.  
See Appendix C for SAR Test Setup Photos.

### **Procedures Used To Establish Test Signal**

The device was placed into simulated transmit mode using the manufacturer's test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. When test modes are not available or inappropriate for testing a device, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

### **Device Test Condition**

The device is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated.



## **12. FCC 3G Measurement Procedures – June 2006**

Power measurements were performed using a base station simulator under average power.

### **12.1 Procedures Used to Establish RF Signal for SAR**

The handset was placed into a simulated call using a base station simulator in a screen room. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

### **12.2 SAR Measurement Conditions for UMTS**

#### **12.2.1 Output Power Verification**

Maximum output power is verified on the High, Middle, and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes) should be tabulated in the test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.

#### **12.2.2 Body SAR Measurements**

SAR for body exposure configurations are measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”.

#### **12.2.3 Devices with HSDPA**

Body SAR is not required for devices with HSDPA capabilities, when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured in 12.2 kbps RMC without HSDPA. Otherwise, SAR for HSDPA is measured using FRC (fixed reference channel) in the body exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.



		HSDPA Inactive		HSDPA Active	
	Channel	12.2 kbps RMC [dBm]	12.2 kbps AMR [dBm]	12.2 kbps RMC [dBm]	12.2 kbps AMR [dBm]
Cell	4132	24.43	24.32	24.36	24.30
	4183	24.24	24.19	24.21	24.16
	4233	24.52	24.35	24.42	24.31
PCS	9262	23.62	23.45	23.51	23.39
	9400	24.01	23.91	23.97	23.84
	9538	24.12	24.01	24.09	23.97

### WCDMA Conducted Power Measurements

		GSM	GPRS
	Channel		
850	128	23.43	27.41
	190	23.68	27.39
	251	23.91	27.46
1900	512	19.78	25.38
	661	19.80	25.31
	810	19.73	25.42

### Conduct Average Power Measurement for GSM & GPRS



802.11b					802.11a 5.2 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
2412	1	1	Main	18.92	5.26	52	6	Main	14.59
2437	6	1	Main	19.19	5.28	56	6	Main	14.62
2462	11	1	Main	19.07	5.30	60	6	Main	14.63
2412	1	1	Aux	19.12	5.32	64	6	Main	14.56
2437	6	1	Aux	18.87	5.26	52	6	Aux	14.48
2462	11	1	Aux	18.12	5.28	56	6	Aux	14.50
2437	6	2	Main	18.97	5.30	60	6	Aux	14.43
2437	6	5.5	Main	18.92	5.32	64	6	Aux	14.39
2437	6	11	Main	19.01	5.30	60	9	Main	14.52
					5.30	60	12	Main	14.49
					5.30	60	18	Main	14.57
					5.30	60	24	Main	14.59
					5.30	60	36	Main	14.61
					5.30	60	48	Main	14.53
					5.30	60	54	Main	14.49
802.11g					802.11a 5.8 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
2412	1	6	Main	18.98	5.745	149	6	Main	17.01
2437	6	6	Main	19.16	5.765	153	6	Main	17.07
2462	11	6	Main	19.03	5.785	157	6	Main	16.92
2412	1	6	Aux	19.00	5.805	161	6	Main	16.98
2437	6	6	Aux	18.94	5.825	165	6	Main	16.89
2462	11	6	Aux	18.43	5.745	149	6	Aux	16.93
2437	6	9	Main	19.04	5.765	153	6	Aux	16.99
2437	6	12	Main	19.12	5.785	157	6	Aux	17.04
2437	6	18	Main	18.95	5.805	161	6	Aux	17.02
2437	6	24	Main	18.89	5.825	165	6	Aux	16.94
2437	6	36	Main	18.97	5.765	153	9	Main	16.87
2437	6	48	Main	19.02	5.765	153	12	Main	16.82
2437	6	54	Main	19.10	5.765	153	18	Main	16.94
					5.765	153	24	Main	16.98
					5.765	153	36	Main	16.86
					5.765	153	48	Main	16.90
					5.765	153	54	Main	16.96
802.11a 5.2 GHz									
Freq	Channel	Data Rate	Antenna	Power					
5.18	36	6	Main	10.29					
5.20	40	6	Main	10.31					
5.22	44	6	Main	10.26					
5.24	48	6	Main	10.30					
5.18	36	6	Aux	10.18					
5.20	40	6	Aux	10.21					
5.22	44	6	Aux	10.23					
5.24	48	6	Aux	10.16					
5.22	40	9	Main	10.26					
5.22	40	12	Main	10.19					
5.22	40	18	Main	10.28					
5.22	40	24	Main	10.30					
5.22	40	36	Main	10.25					
5.22	40	48	Main	10.16					
5.22	40	54	Main	10.20					

**Model BCM94311MCAG Conduct Power Measurements**



802.11g						802.11b				
Freq	Channel	Data Rate	Antenna	Power		Freq	Channel	Data Rate	Antenna	Power
2412	1	6	Main	19.12		2412	1	6	Main	19.19
2437	6	6	Main	19.02		2437	6	6	Main	19.12
2462	11	6	Main	18.97		2462	11	6	Main	19.01
2412	1	6	Aux	19.06		2412	1	6	Aux	19.07
2437	6	6	Aux	18.92		2437	6	6	Aux	19.02
2462	11	6	Aux	19.01		2462	11	6	Aux	18.98
2412	1	9	Main	19.00		2412	1	2	Main	19.14
2412	1	12	Main	18.94		2412	1	5.5	Main	19.01
2412	1	18	Main	19.97		2412	1	11	Main	18.97
2412	1	24	Main	19.03						
2412	1	36	Main	<b>18.87</b>						
2412	1	48	Main	<b>18.89</b>						
2412	1	54	Main	19.01						

### Model BCM94311MCG Conduct Power Measurements



802.11b					802.11a 5.8 GHz				
Freq	Channel	Data Rate	Antenna	Power	Freq	Channel	Data Rate	Antenna	Power
2412	1	1	Main	19.71	5745	149	6	Main	17.96
2437	6	1	Main	19.62	5765	153	6	Main	17.89
2462	11	1	Main	19.67	5785	157	6	Main	18.01
2412	1	1	Aux	19.52	5805	161	6	Main	17.94
2437	6	1	Aux	19.49	5825	165	6	Main	17.98
2462	11	1	Aux	19.63	5745	149	6	Aux	17.90
2412	1	2	Main	19.43	5765	153	6	Aux	17.82
2412	1	5.5	Main	19.56	5785	157	6	Aux	17.93
2412	1	11	Main	19.61	5805	161	6	Aux	17.84
					5825	165	6	Aux	17.79
802.11g					5785	157	9	Aux	17.92
Freq	Channel	Data Rate	Antenna	Power	5785	157	12	Main	17.96
2412	1	6	Main	19.43	5785	157	18	Main	17.89
2437	6	6	Main	19.39	5785	157	24	Main	17.83
2462	11	6	Main	19.27	5785	157	36	Main	17.98
2412	1	6	Aux	19.32	5785	157	48	Main	17.84
2437	6	6	Aux	19.36	5785	157	54	Main	17.99
2462	11	6	Aux	19.40					
2412	1	9	Main	19.42	802.11a 5.8 GHz MIMO				
2412	1	12	Main	19.38	Freq	Channel	Bandwidth	0	1
2412	1	18	Main	19.27	5745	149	20 MHz	15.42	15.39
2412	1	24	Main	19.21	5765	153	20 MHz	15.39	15.40
2412	1	36	Main	19.32	5785	157	20 MHz	15.40	15.38
2412	1	48	Main	19.37	5805	161	20 MHz	15.44	15.42
2412	1	54	Main	19.29	5825	165	20 MHz	15.41	15.37
					5785	157	40 MHz	15.37	15.35
802.11g MIMO									
Freq	Channel	Bandwidth	0	1					
2412	1	20 MHz	14.41	14.38					
2417	2	20 MHz	16.49	16.40					
2422	3	20 MHz	16.38	16.42					
2437	6	20 MHz	16.52	16.64					
2457	10	20 MHz	16.29	16.33					
2462	11	20 MHz	14.09	14.00					
2437	6	40 MHz	14.72	14.81					

## Model BCM94321MC Conduct Power Measurements



## SAR Data Summary – 835 MHz Body GPRS

MEASUREMENT RESULTS									
Position	Co-Location		Frequency		Modulation	Begin / End Power		SAR (W/kg)	
	Module	Band	MHz	Ch.		(dBm)	Battery		
Touch	N/A	N/A	836.6	190	GMSK	27.44	27.38	N/A	0.516
	1019	2.4	836.6	190	GMSK	27.44	27.38	N/A	0.657
		5.2	836.6	190	GMSK	27.44	27.38	N/A	0.678
		5.3	836.6	190	GMSK	27.44	27.38	N/A	0.688
		5.8	836.6	190	GMSK	27.44	27.38	N/A	0.673
	1020	2.4	836.6	190	GMSK	27.44	27.38	N/A	0.651
	1022	2.4	836.6	190	GMSK	27.44	27.38	N/A	0.652
		5.8	836.6	190	GMSK	27.44	27.38	N/A	0.681
		2.4 mimo	836.6	190	GMSK	27.44	27.38	N/A	0.752
		5.8 mimo	836.6	190	GMSK	27.44	27.38	N/A	0.713
					Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Uniphantom

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip

☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## SAR Data Summary – 850 MHz Body WCDMA/HSDPA Inactive

### MEASUREMENT RESULTS

Position	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
	Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	N/A	N/A	824.07	4132	WCDMA	24.49	24.43	N/A	0.866
	N/A	N/A	836.52	4183	WCDMA	24.50	24.46	N/A	0.909
	N/A	N/A	848.31	4233	WCDMA	24.46	24.40	N/A	0.876
	1019	2.4	836.52	4183	WCDMA	24.50	24.46	N/A	1.050
		5.2	836.52	4183	WCDMA	24.50	24.46	N/A	1.071
		5.3	836.52	4183	WCDMA	24.50	24.46	N/A	1.081
		5.8	836.52	4183	WCDMA	24.50	24.46	N/A	1.066
	1020	2.4	836.52	4183	WCDMA	24.50	24.46	N/A	1.044
	1022	2.4	836.52	4183	WCDMA	24.50	24.46	N/A	1.045
		5.8	836.52	4183	WCDMA	24.50	24.46	N/A	1.074
		2.4 mimo	836.52	4183	WCDMA	24.50	24.46	N/A	1.145
		5.8 mimo	836.52	4183	WCDMA	24.50	24.46	N/A	1.106
						Muscle 1.6 W/kg (mW/g) averaged over 1 gram			

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Uniphantom

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## SAR Data Summary – 1900 MHz Body GPRS

### MEASUREMENT RESULTS

Position	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
	Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	N/A	N/A	1880	661	GMSK	25.41	25.36	N/A	0.277
	1019	2.4	1880	661	GMSK	25.41	25.36	N/A	0.418
		5.2	1880	661	GMSK	25.41	25.36	N/A	0.439
		5.3	1880	661	GMSK	25.41	25.36	N/A	0.449
		5.8	1880	661	GMSK	25.41	25.36	N/A	0.434
	1020	2.4	1880	661	GMSK	25.41	25.36	N/A	0.412
	1022	2.4	1880	661	GMSK	25.41	25.36	N/A	0.413
		5.8	1880	661	GMSK	25.41	25.36	N/A	0.442
		2.4 mimo	1880	661	GMSK	25.41	25.36	N/A	0.513
		5.8 mimo	1880	661	GMSK	25.41	25.36	N/A	0.474
						Muscle 1.6 W/kg (mW/g) averaged over 1 gram			

- Battery is fully charged for all tests.  
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement  
Phantom Configuration ☐ Left Head ☒ Uniphantom ☐ Right Head  
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## SAR Data Summary – 1900 MHz Body WCDMA/HSDPA Inactive

MEASUREMENT RESULTS									
Position	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
	Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	N/A	N/A	1851.25	9262	WCDMA	24.10	24.00	N/A	1.219
	N/A	N/A	1800.00	9400	WCDMA	24.09	24.03	N/A	0.918
	N/A	N/A	1908.75	9538	WCDMA	24.04	23.98	N/A	0.969
	1019	2.4	1851.25	9262	WCDMA	24.10	24.00	N/A	1.360
		5.2	1851.25	9262	WCDMA	24.10	24.00	N/A	1.381
		5.3	1851.25	9262	WCDMA	24.10	24.00	N/A	1.391
		5.8	1851.25	9262	WCDMA	24.10	24.00	N/A	1.376
	1020	2.4	1851.25	9262	WCDMA	24.10	24.00	N/A	1.354
	1022	2.4	1851.25	9262	WCDMA	24.10	24.00	N/A	1.355
		5.8	1851.25	9262	WCDMA	24.10	24.00	N/A	1.384
		2.4 mimo	1851.25	9262	WCDMA	24.10	24.00	N/A	1.455
		5.8 mimo	1851.25	9262	WCDMA	24.10	24.00	N/A	1.416
					Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

- Battery is fully charged for all tests.  
 Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement  
 Phantom Configuration ☐ Left Head ☒ Uniphantom ☐ Right Head  
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## SAR Data Summary – BCM94311MCAG Module (1019)

### MEASUREMENT RESULTS

Position	Antenna	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
		Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	Main	N/A	N/A	2437	6	DSSS	19.18	19.12	N/A	0.141
	Aux	N/A	N/A	2412	1	DSSS	19.15	19.04	N/A	0.123
	Main	N/A	N/A	5200	40	OFDM	10.28	10.23	N/A	0.162
	Aux	N/A	N/A	5220	44	OFDM	10.19	10.10	N/A	0.158
	Main	N/A	N/A	5300	60	OFDM	14.59	14.50	N/A	0.172
	Aux	N/A	N/A	5280	56	OFDM	14.46	14.42	N/A	0.177
	Main	N/A	N/A	5765	153	OFDM	17.00	16.95	N/A	0.157
	Aux	N/A	N/A	5785	157	OFDM	16.99	16.91	N/A	0.155
	Main/Aux	WWAN	835	2437	6	DSSS	19.18	19.12	N/A	0.657
			835H	2437	6	DSSS	19.18	19.12	N/A	1.050
			1900	2437	6	DSSS	19.18	19.12	N/A	0.414
			1900H	2437	6	DSSS	19.18	19.12	N/A	1.360
			835	5200	40	OFDM	10.28	10.23	N/A	0.678
			835H	5200	40	OFDM	10.28	10.23	N/A	1.071
			1900	5200	40	OFDM	10.28	10.23	N/A	0.439
			1900H	5200	40	OFDM	10.28	10.23	N/A	1.381
			835	5280	56	OFDM	14.46	14.42	N/A	0.693
			835H	5280	56	OFDM	14.46	14.42	N/A	1.086
			1900	5280	56	OFDM	14.46	14.42	N/A	0.454
			1900H	5280	56	OFDM	14.46	14.42	N/A	1.396
			835	5765	153	OFDM	17.00	16.95	N/A	0.673
			835H	5765	153	OFDM	17.00	16.95	N/A	1.066
			1900	5765	153	OFDM	17.00	16.95	N/A	0.434
			1900H	5765	153	OFDM	17.00	16.95	N/A	1.376

**Muscle**  
**1.6 W/kg (mW/g)**  
 averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Unipantom

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
 Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## SAR Data Summary – BCM94311MCG Module (1020)

MEASUREMENT RESULTS										
Position	Antenna	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
		Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	Main	N/A	N/A	2412	1	DSSS	19.17	19.10	N/A	0.135
	Aux	N/A	N/A	2412	1	DSSS	19.01	18.95	N/A	0.117
	Main/Aux	WWAN	835	2412	1	DSSS	19.17	19.10	N/A	0.651
			835H	2412	1	DSSS	19.17	19.10	N/A	1.044
			1900	2412	1	DSSS	19.17	19.10	N/A	0.412
			1900H	2412	1	DSSS	19.17	19.10	N/A	1.354
						Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

- Battery is fully charged for all tests.  
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement  
Phantom Configuration ☐ Left Head ☒ Uniphantom ☐ Right Head  
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



**SAR Data Summary – BCM94321MC Module (1022)**
**MEASUREMENT RESULTS**

Position	Antenna	Co-Location		Frequency		Modulation	Begin / End Power			SAR (W/kg)
		Module	Band	MHz	Ch.		(dBm)		Battery	
Touch	Main	N/A	N/A	2437	6	DSSS	19.65	19.60	N/A	0.136
	Aux	N/A	N/A	2412	1	DSSS	19.34	19.27	N/A	0.121
	Main	N/A	MIMO	2437	6	OFDM	16.48	16.42	N/A	0.134
	Aux	N/A	20 MHz	2437	6	OFDM	16.52	16.41	N/A	0.102
	Main	N/A	N/A	5785	157	OFDM	18.00	17.92	N/A	0.165
	Aux	N/A	N/A	5785	157	OFDM	17.90	17.84	N/A	0.165
	Main	N/A	MIMO	5805	161	OFDM	15.41	15.35	N/A	0.098
	Aux	N/A	20 MHz	5805	161	OFDM	15.38	15.31	N/A	0.099
	Main/Aux	WWAN	835	2437	6	DSSS	19.65	19.60	N/A	0.652
			835H	2437	6	DSSS	19.65	19.60	N/A	1.045
			1900	2437	6	DSSS	19.65	19.60	N/A	0.413
			1900H	2437	6	DSSS	19.65	19.60	N/A	1.355
			835	2437M	6	OFDM	16.48	16.42	N/A	0.752
			835H	2437M	6	OFDM	16.48	16.42	N/A	1.145
			1900	2437M	6	OFDM	16.48	16.42	N/A	0.513
			1900H	2437M	6	OFDM	16.48	16.42	N/A	1.455
			835	5785	157	OFDM	18.00	17.92	N/A	0.681
			835H	5785	157	OFDM	18.00	17.92	N/A	1.074
			1900	5785	157	OFDM	18.00	17.92	N/A	0.442
			1900H	5785	157	OFDM	18.00	17.92	N/A	1.384
			835	5765M	153	OFDM	15.41	15.35	N/A	0.713
			835H	5765M	153	OFDM	15.41	15.35	N/A	1.106
			1900	5765M	153	OFDM	15.41	15.35	N/A	0.474
			1900H	5765M	153	OFDM	15.41	15.35	N/A	1.416

**Muscle**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Unipantom

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A



Jay M. Moulton  
Vice President

Note: When the mid channel is 3 dB or more below the limit the low and high channel are not required to be tested. The SAR value for the co-location measurements are the addition of the highest two individual SAR values noted.



## 13. Test Equipment List

**Table 12.1 Equipment Specifications**

Type	Calibration Due Date	Serial Number
ThermoCRS Robot	N/A	RAF0338198
ThermoCRS Controller	N/A	RCF0338224
ThermoCRS Teach Pendant (Joystick)	N/A	STP0334405
IBM Computer, 2.66 MHz P4	N/A	8189D8U KCPR08N
Apriel E-Field Probe ALS-E020	02/14/2008	RFE-215
Apriel E-Field Probe ALS-E030	04/09/2008	AL-E3P1
Apriel Dummy Probe	N/A	023
Apriel Left Phantom	N/A	RFE-267
Apriel Right Phantom	N/A	RFE-268
Apriel UniPhantom	N/A	RFE-273
Apriel Validation Dipole ALS-D-450-S-2	04/30/2009	RFE-362
Apriel Validation Dipole ALS-D-835-S-2	02/16/2008	RFE-274
Apriel Validation Dipole ALS-D-1900-S-2	02/15/2008	RFE-277
Apriel Validation Dipole ALS-D-2450-S-2	02/17/2008	RFE-278
Apriel Validation Dipole ALS-D-BB-S-2	05/23/2009	5258-235-00801
Agilent (HP) 437B Power Meter	12/04/2007	3125U08837
Agilent (HP) 8481B Power Sensor	12/04/2007	3318A05384
Advantest R3261A Spectrum Analyzer	12/04/2007	31720068
Agilent (HP) 8350B Signal Generator	01/30/2008	2749A10226
Agilent (HP) 83525A RF Plug-In	01/30/2008	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	01/30/2008	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	01/30/2008	2904A00595
Agilent (HP) E55125C Base Station Sim.	06/13/2009	GB46311309
Apriel Dielectric Probe Assembly	N/A	0011
Microwave Power Devices 510-10E Amplifier	03/09/2008	6063-001
Microwave Power Devices 1020-9E Amplifier	03/09/2008	5618-1
Brain Equivalent Matter (450 MHz)	N/A	N/A
Brain Equivalent Matter (835 MHz)	N/A	N/A
Brain Equivalent Matter (1900 MHz)	N/A	N/A
Brain Equivalent Matter (2450 MHz)	N/A	N/A
Muscle Equivalent Matter (450 MHz)	N/A	N/A
Muscle Equivalent Matter (835 MHz)	N/A	N/A
Muscle Equivalent Matter (1900 MHz)	N/A	N/A
Muscle Equivalent Matter (2450 MHz)	N/A	N/A
Muscle Equivalent Matter (5200 MHz)	N/A	N/A
Muscle Equivalent Matter (5800 MHz)	N/A	N/A



## 14. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



## 15. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1999, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, July 2001.
- [5] IEEE Standard 1528 – 2003, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, October 2003.
- [6] Industry Canada, RSS – 102e, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), November 2005.
- [7] Industry Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 1999.



## Appendix A – System Validation Plots and Data

```
*****
Test Result for UIM Dielectric Parameter
Fri 27/Jul/2007 08:52:18
Freq  Frequency(GHz)
FCC_eH      FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH      FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB      FCC Limits for Body Epsilon
FCC_sB      FCC Limits for Body Sigma
Test_e      Epsilon of UIM
Test_s      Sigma of UIM
*****
```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	55.34	0.94
0.8150	55.28	0.97	55.29	0.95
0.8250	55.24	0.97	55.25	0.95
0.8350	55.20	0.97	55.21	0.96
0.8450	55.17	0.98	55.17	0.97
0.8550	55.14	0.99	55.13	0.99
0.8650	55.11	1.01	55.09	1.00

```
*****
Test Result for UIM Dielectric Parameter
Mon 30/Jul/2007 07:43:24
Freq  Frequency(GHz)
FCC_eH      FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH      FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB      FCC Limits for Body Epsilon
FCC_sB      FCC Limits for Body Sigma
Test_e      Epsilon of UIM
Test_s      Sigma of UIM
*****
```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8700	53.30	1.52	52.62	1.45
1.8800	53.30	1.52	52.61	1.45
1.8900	53.30	1.52	52.60	1.46
1.9000	53.30	1.52	52.58	1.48
1.9100	53.30	1.52	52.55	1.49
1.9200	53.30	1.52	52.53	1.50
1.9300	53.30	1.52	52.52	1.51



\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Thu 02/Aug/2007 16:14:26

Freq Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.4200	52.74	1.92	51.82	1.93
2.4300	52.73	1.93	51.81	1.95
2.4400	52.71	1.94	51.79	1.96
2.4500	52.70	1.95	51.76	1.97
2.4600	52.69	1.96	51.74	1.99
2.4700	52.67	1.98	51.71	2.01
2.4800	52.66	1.99	51.69	2.02

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 03/Aug/2007 07:30:31

Freq Frequency(GHz)

FCC\_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon

FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.2200	48.99	5.32	48.68	5.15
5.2300	48.97	5.33	48.65	5.19
5.2400	48.96	5.35	48.63	5.21
5.2500	48.95	5.36	48.62	5.26
5.2600	48.93	5.37	48.60	5.30
5.2700	48.92	5.38	48.59	5.32
5.2800	48.91	5.39	48.57	5.36



```
*****
Test Result for UIM Dielectric Parameter
Sat 04/Aug/2007 08:19:22
Freq  Frequency(GHz)
FCC_eH      FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH      FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB      FCC Limits for Body Epsilon
FCC_sB      FCC Limits for Body Sigma
Test_e      Epsilon of UIM
Test_s      Sigma of UIM
*****
```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
5.7550	48.26	5.95	48.11	6.03
5.7650	48.25	5.96	48.09	6.04
5.7750	48.23	5.97	48.06	6.05
5.7850	48.22	5.98	48.04	6.08
5.7950	48.21	5.99	48.03	6.10
5.8050	48.19	6.01	48.02	6.11
5.8150	48.18	6.02	48.00	6.13



## SAR Test Report

By Operator : Jay  
Measurement Date : 27-Jul-2007  
Starting Time : 27-Jul-2007 09:26:39 AM  
End Time : 27-Jul-2007 09:39:33 AM  
Scanning Time : 774 secs

### Product Data

Device Name : Validation  
Serial No. : 835  
Type : Dipole  
Model : ALS-D-835-S-2  
Frequency : 835.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 161 mm  
Width : 3.6 mm  
Depth : 89.8 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 1.011 W/kg  
Power Drift-Finish: 1.048 W/kg  
Power Drift (%) : 3.657

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 835  
Frequency : 835.00 MHz  
Last Calib. Date : 27-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 55.21 F/m  
Sigma : 0.96 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 835.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 6.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 25.00 °C  
 Set-up Date : 27-Jul-2007  
 Set-up Time : 9:21:48 AM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

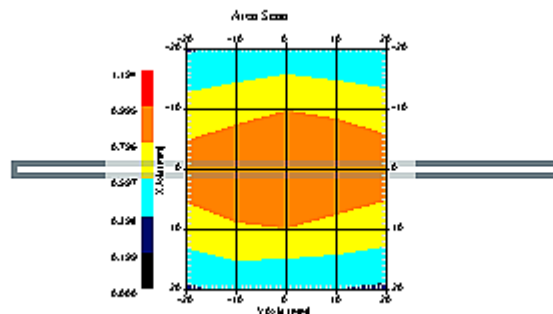


1 gram SAR value : 0.949 W/kg  
 10 gram SAR value : 0.629 W/kg  
 Area Scan Peak SAR : 0.997 W/kg  
 Zoom Scan Peak SAR : 1.371 W/kg



### SAR-Z Axis

at Hotspot x:0.25 y:1.87

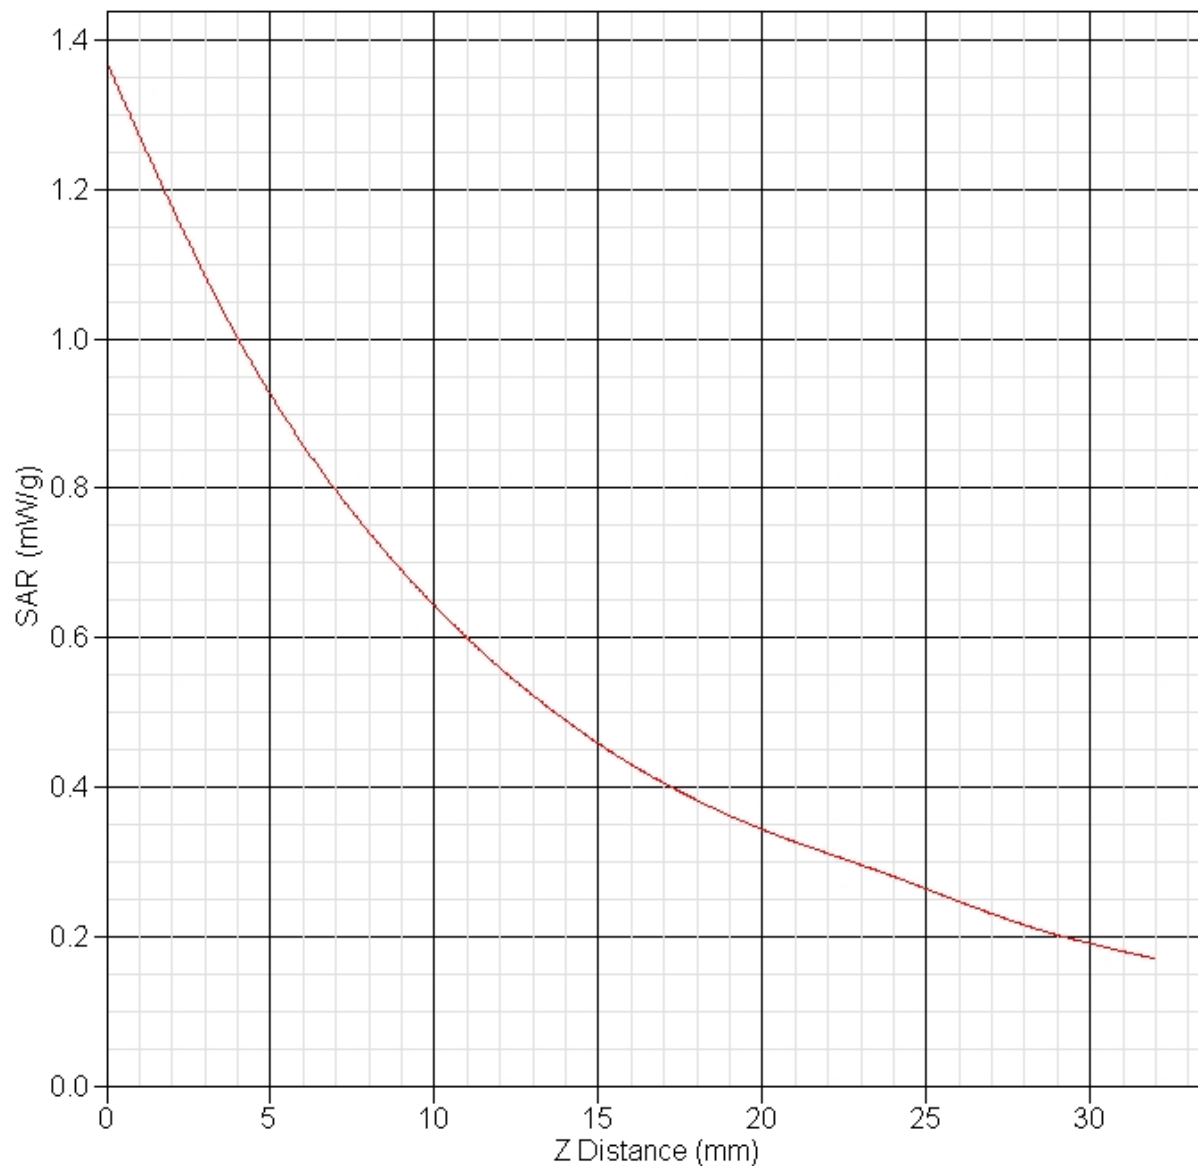



## SAR Test Report

By Operator : Jay  
Measurement Date : 30-Jul-2007  
Starting Time : 30-Jul-2007 08:07:15 AM  
End Time : 30-Jul-2007 08:20:20 AM  
Scanning Time : 785 secs

### Product Data

Device Name : Validation  
Serial No. : 1900  
Type : Dipole  
Model : ALS-D-1900-S-2  
Frequency : 1900.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 68 mm  
Width : 3.6 mm  
Depth : 39.5 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 4.556 W/kg  
Power Drift-Finish: 4.603 W/kg  
Power Drift (%) : 1.039

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 1900  
Frequency : 1900.00 MHz  
Last Calib. Date : 30-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 52.58 F/m  
Sigma : 1.48 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 1900.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 30-Jul-2007  
 Set-up Time : 8:39:41 AM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Mid

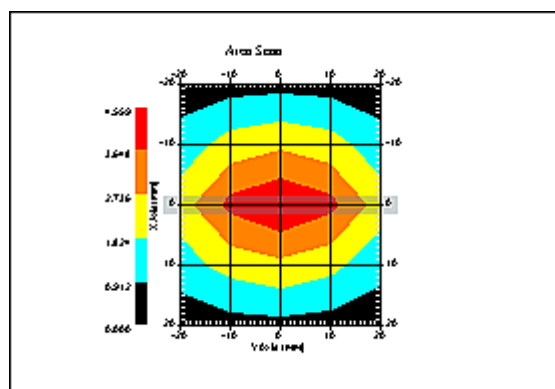

1 gram SAR value : 3.938 W/kg  
 10 gram SAR value : 2.069 W/kg  
 Area Scan Peak SAR : 4.559 W/kg  
 Zoom Scan Peak SAR : 7.086 W/kg



**SAR-Z Axis**  
at Hotspot x:0.25 y:-0.15

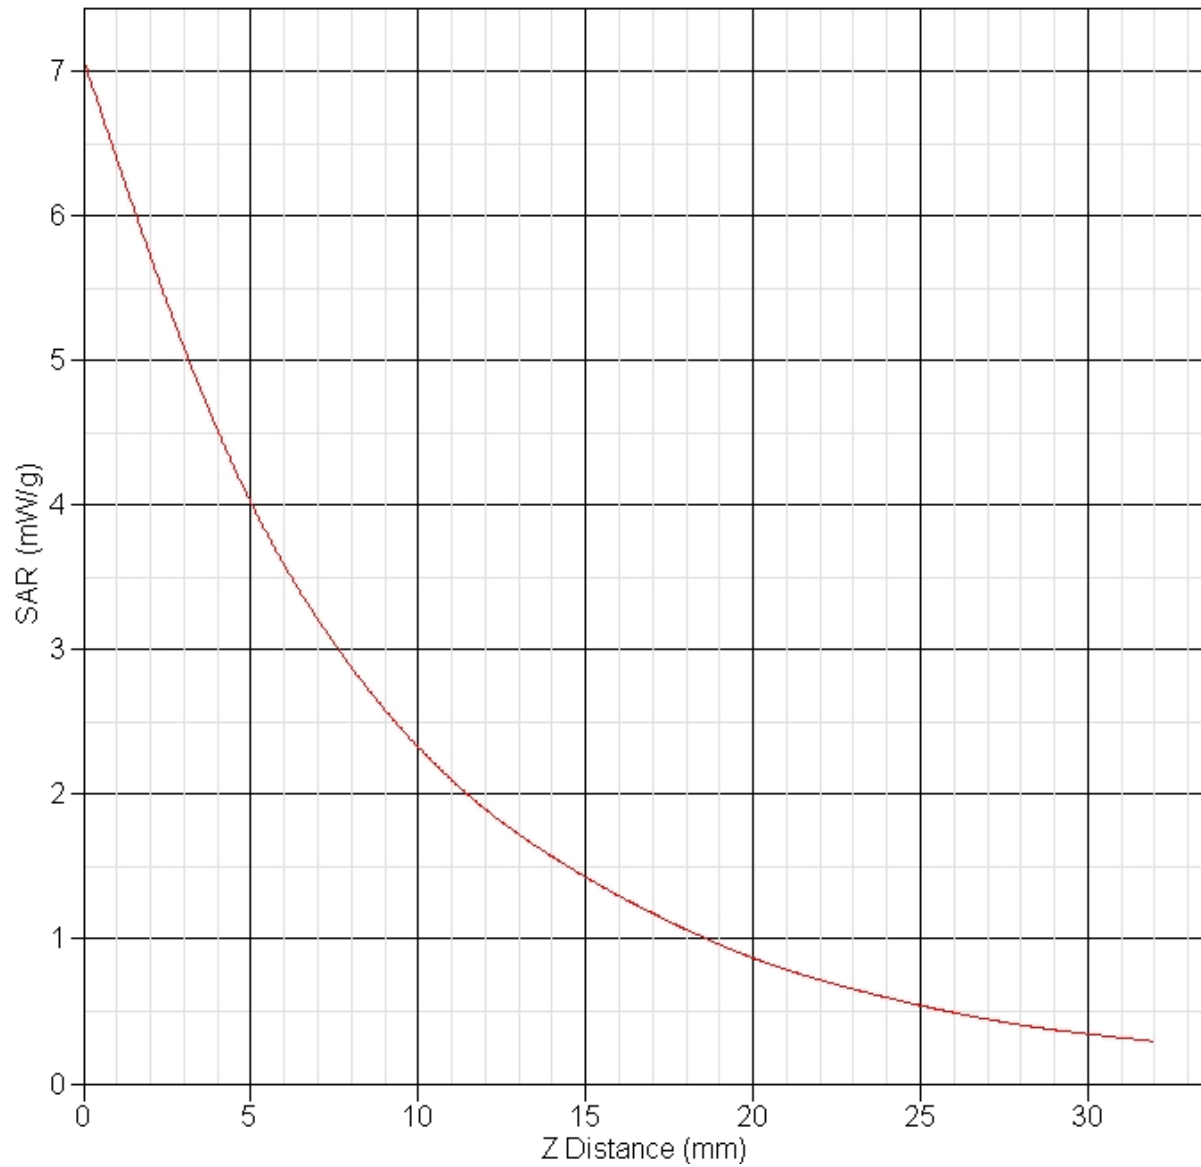



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 07:15:48 AM  
End Time : 03-Aug-2007 07:28:42 AM  
Scanning Time : 774 secs

### Product Data

Device Name : Validation  
Serial No. : 2450  
Type : Dipole  
Model : ALS-D-2450-S-2  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 51.5 mm  
Width : 3.6 mm  
Depth : 30.4 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 6.189 W/kg  
Power Drift-Finish: 6.026 W/kg  
Power Drift (%) : -2.625

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 7:40:13 AM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm


**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

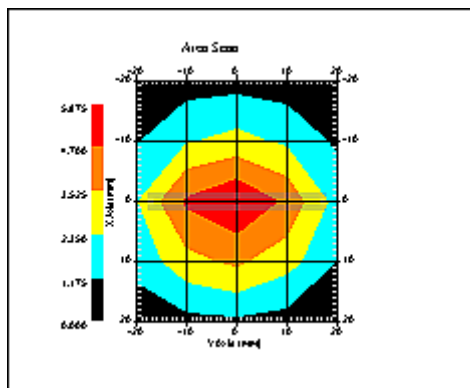

1 gram SAR value : 5.288 W/kg  
 10 gram SAR value : 2.473 W/kg  
 Area Scan Peak SAR : 5.875 W/kg  
 Zoom Scan Peak SAR : 10.590 W/kg



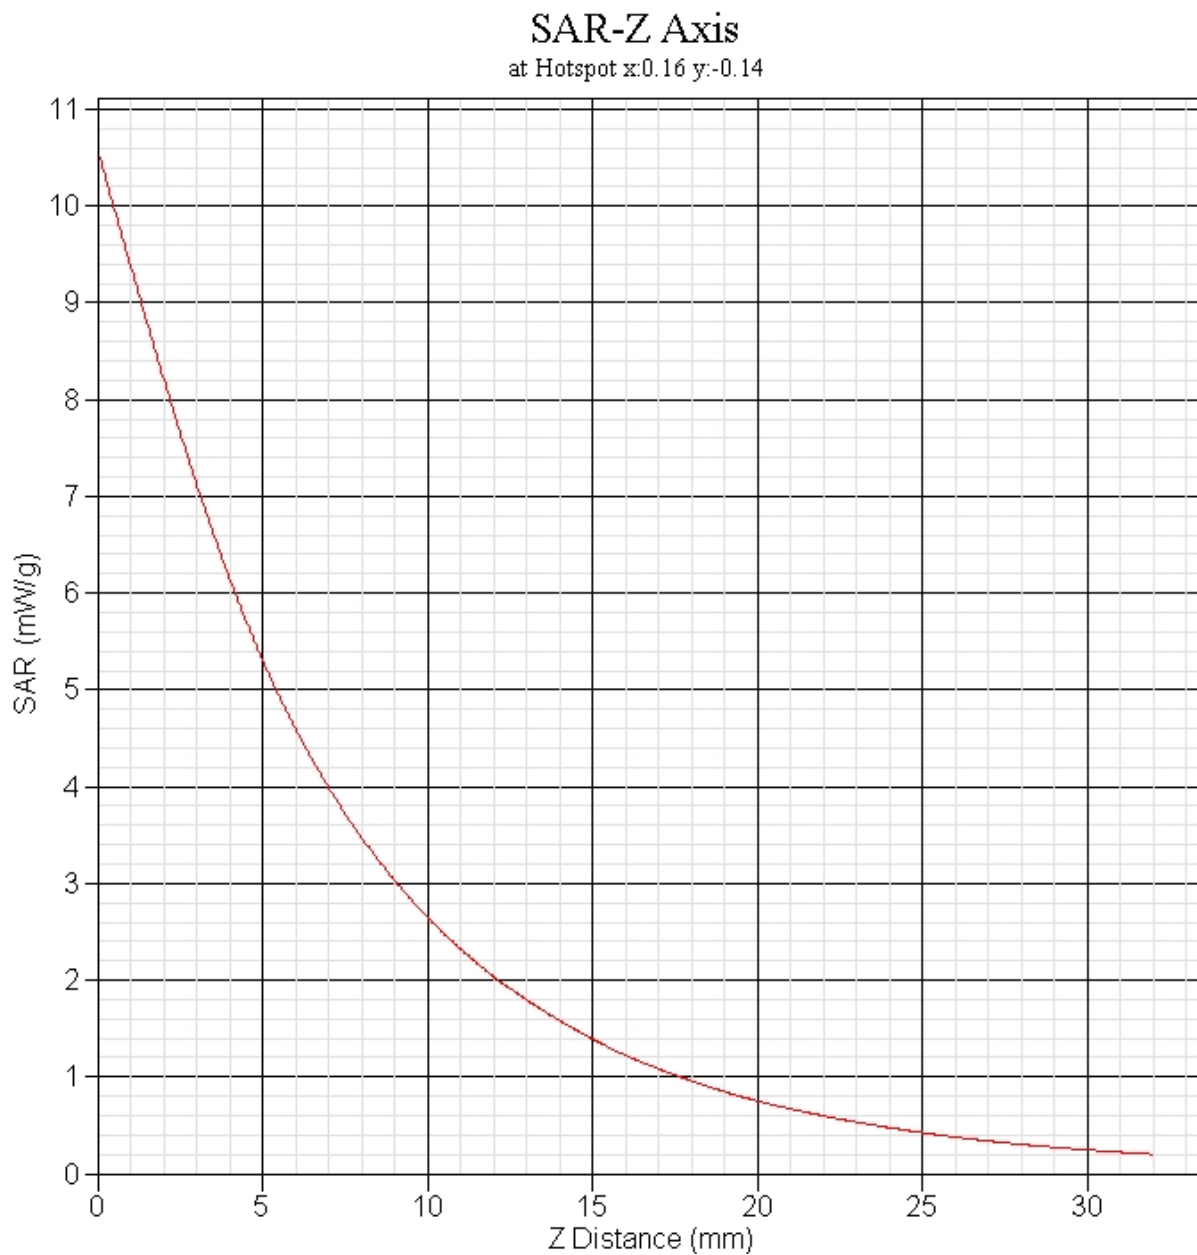



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 07:41:17 AM  
End Time : 03-Aug-2007 07:54:35 AM  
Scanning Time : 798 secs

### Product Data

Device Name : Validation  
Serial No. : 5200  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.542 W/kg  
Power Drift-Finish: 0.525 W/kg  
Power Drift (%) : -3.137

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5200  
Frequency : 5200.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.62 F/m  
Sigma : 5.26 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 13  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 9:00:47 AM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

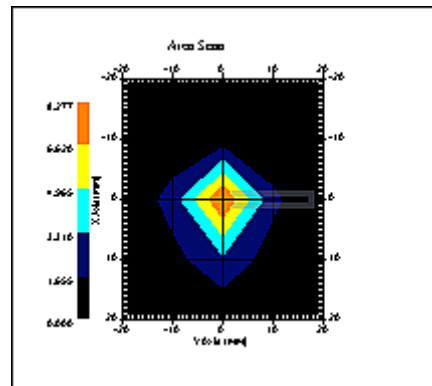


1 gram SAR value : 6.347 W/kg  
 10 gram SAR value : 1.731 W/kg  
 Area Scan Peak SAR : 8.277 W/kg  
 Zoom Scan Peak SAR : 23.018 W/kg



### SAR-Z Axis

at Hotspot x:0.19 y:-0.12

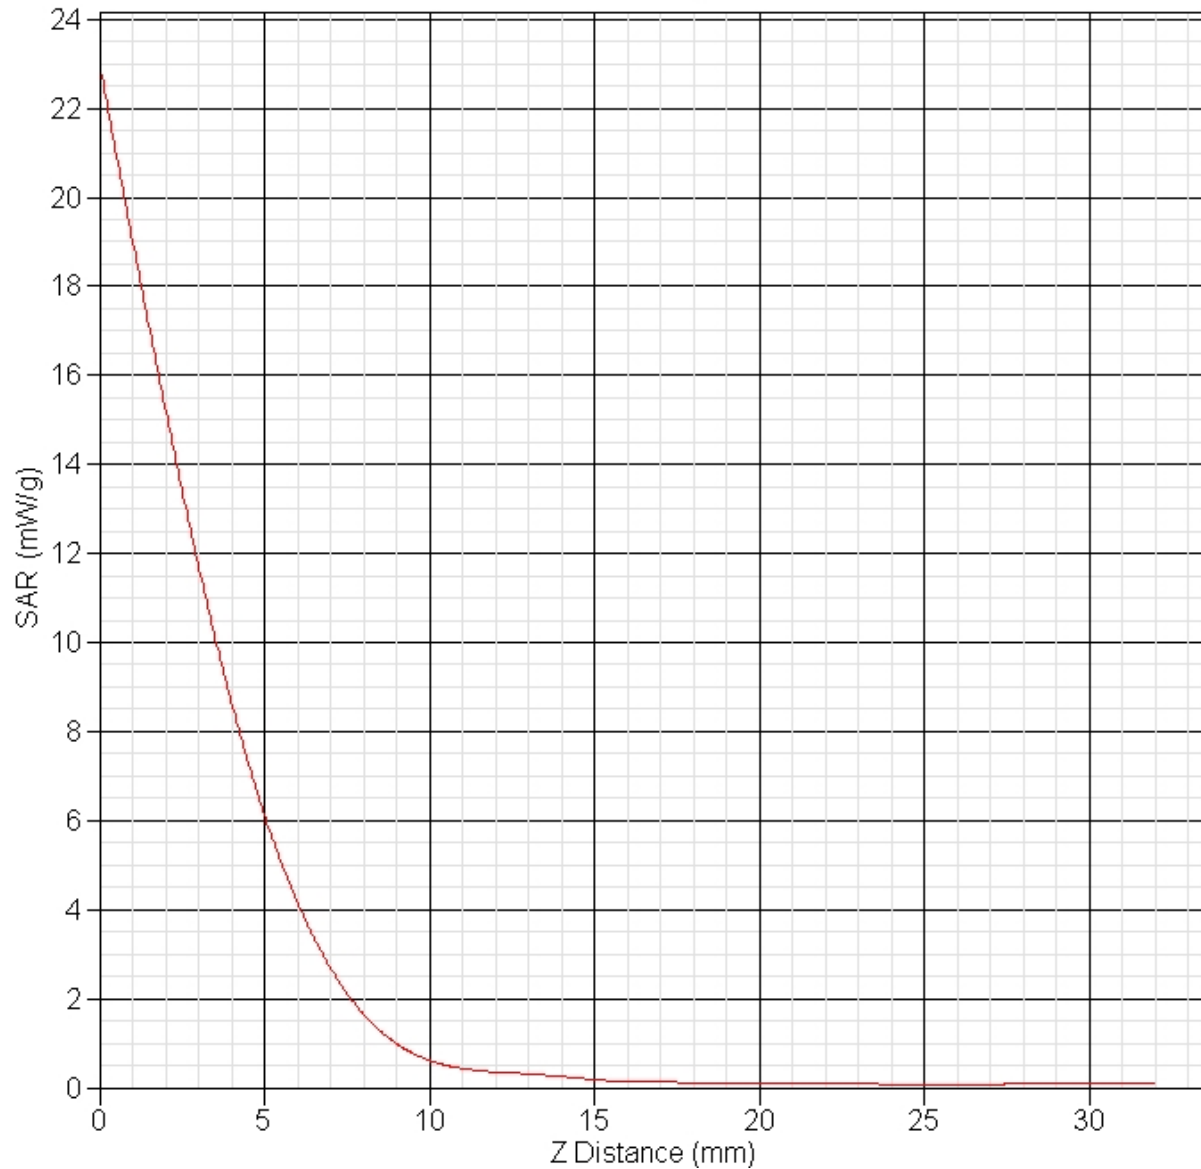



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 09:40:25 AM  
End Time : 04-Aug-2007 09:53:28 AM  
Scanning Time : 783 secs

### Product Data

Device Name : Validation  
Serial No. : 5800  
Type : Dipole  
Model : ALS-D-BB-S-2  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.1 W  
Drift Time : 0 min(s)  
Length : 23.1 mm  
Width : 3.6 mm  
Depth : 20.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 2.101 W/kg  
Power Drift-Finish: 2.042 W/kg  
Power Drift (%) : -2.822

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5785.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 4:10:18 PM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

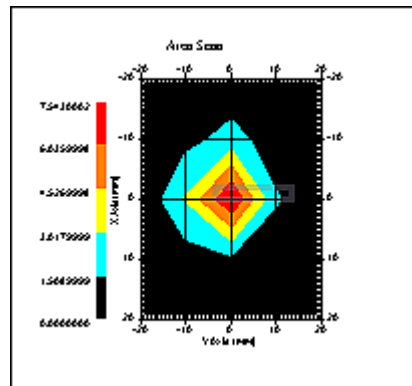


1 gram SAR value : 5.680 W/kg  
 10 gram SAR value : 1.623 W/kg  
 Area Scan Peak SAR : 7.543 W/kg  
 Zoom Scan Peak SAR : 20.116 W/kg



### SAR-Z Axis

at Hotspot x:0.23 y:-0.18

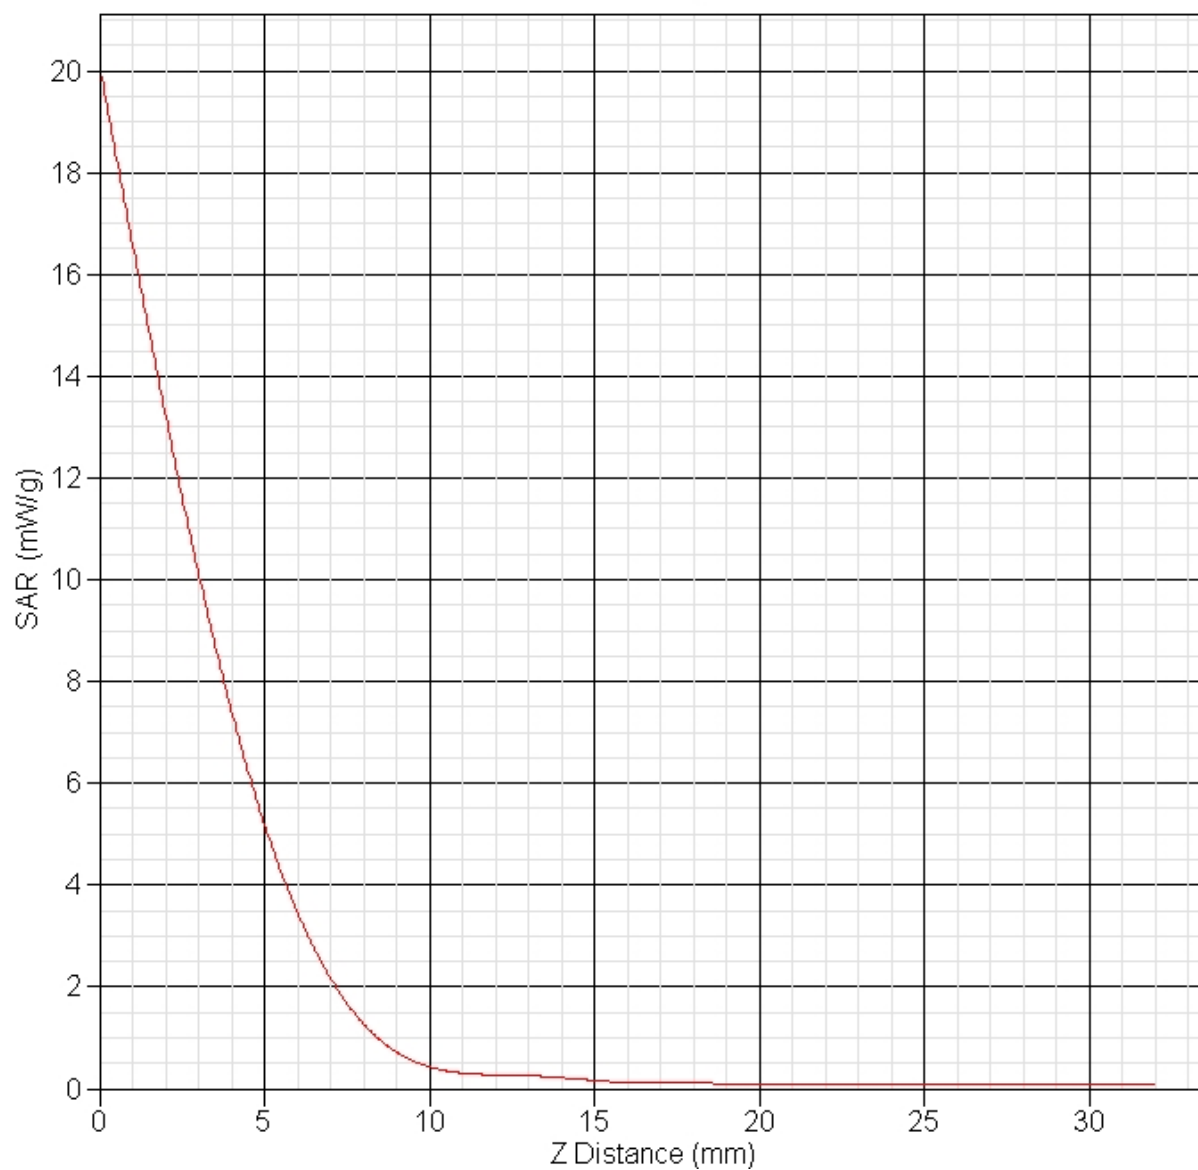



## Appendix B – SAR Test Data Plots



**SAR Test Report**

By Operator : Jay  
Measurement Date : 27-Jul-2007  
Starting Time : 27-Jul-2007 10:19:05 AM  
End Time : 27-Jul-2007 10:38:17 AM  
Scanning Time : 1152 secs

**Product Data**

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 835.00 MHz  
Max. Transmit Pwr : 2 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.533 W/kg  
Power Drift-Finish: 0.537 W/kg  
Power Drift (%) : 0.822

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

**Tissue Data**

Type : BODY  
Serial No. : 835  
Frequency : 835.00 MHz  
Last Calib. Date : 27-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 55.21 F/m  
Sigma : 0.96 S/m  
Density : 1000.00 kg/cu. m

**Probe Data**

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 835.00 MHz  
Duty Cycle Factor: 0.25  
Conversion Factor: 6.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 0.25  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 27-Jul-2007  
 Set-up Time : 12:31:29 PM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Mid

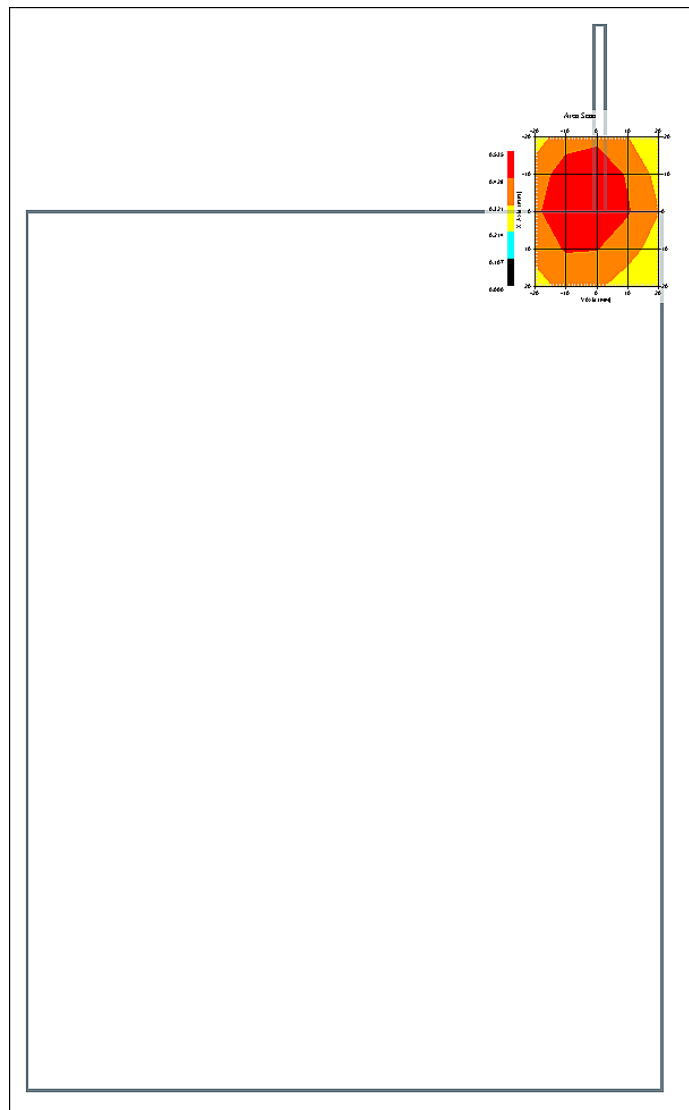

1 gram SAR value : 0.516 W/kg  
 10 gram SAR value : 0.334 W/kg  
 Area Scan Peak SAR : 0.535 W/kg  
 Zoom Scan Peak SAR : 0.790 W/kg



**SAR-Z Axis**  
at Hotspot x:-7.73 y:-0.18

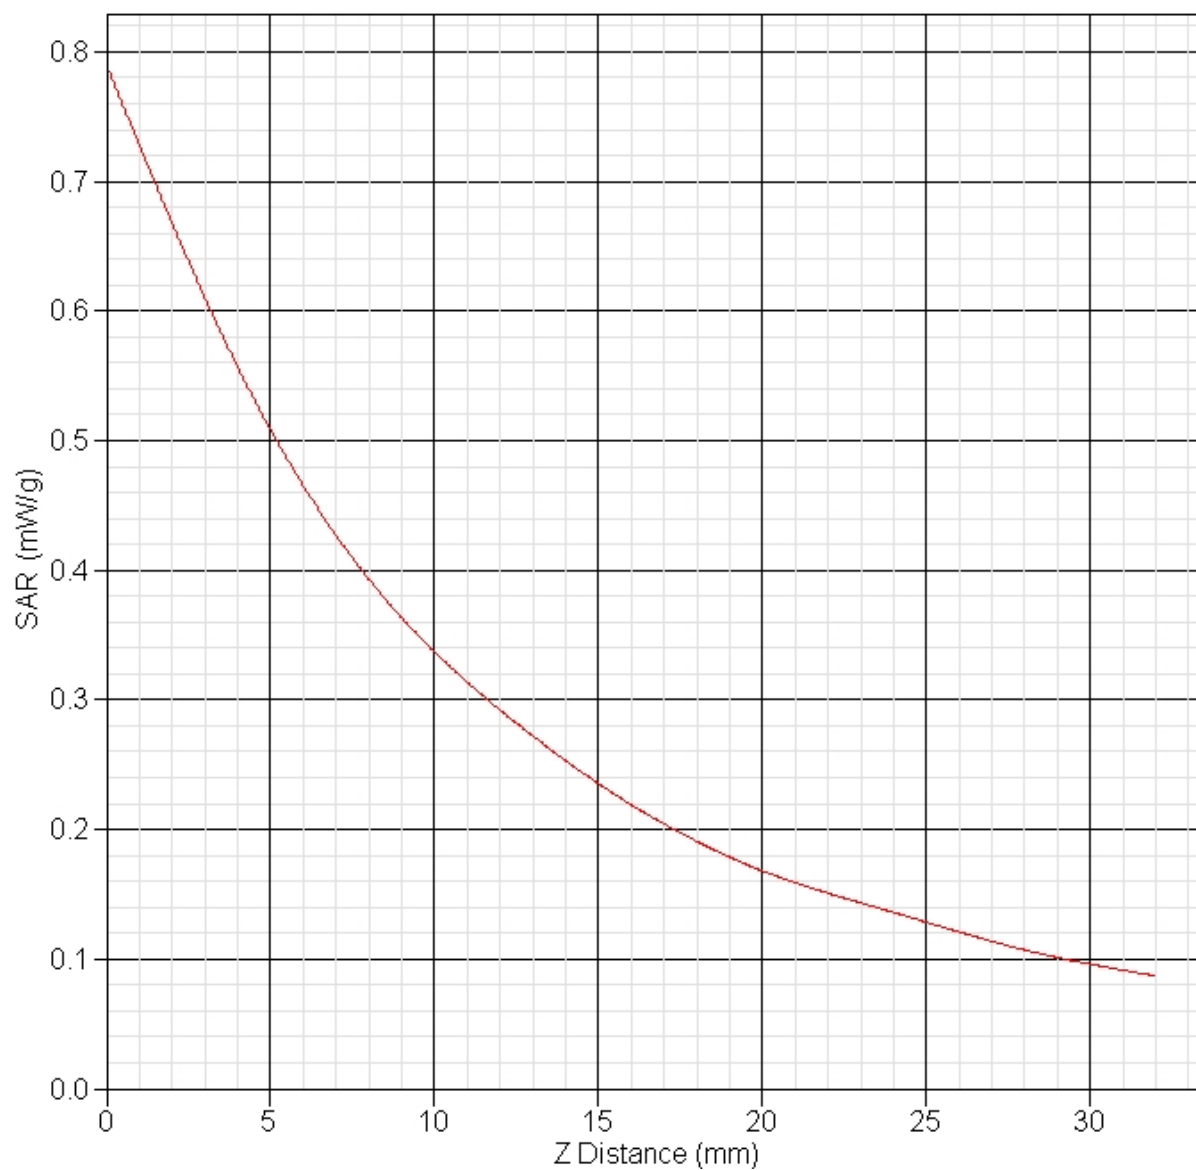



## SAR Test Report

By Operator : Jay  
Measurement Date : 27-Jul-2007  
Starting Time : 27-Jul-2007 02:47:51 PM  
End Time : 27-Jul-2007 03:01:03 PM  
Scanning Time : 792 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 835.00 MHz  
Max. Transmit Pwr : 0.29 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.941 W/kg  
Power Drift-Finish: 0.949 W/kg  
Power Drift (%) : 0.863

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 835  
Frequency : 835.00 MHz  
Last Calib. Date : 27-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 55.21 F/m  
Sigma : 0.96 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 835.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 6.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 27-Jul-2007  
 Set-up Time : 2:25:30 PM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Low

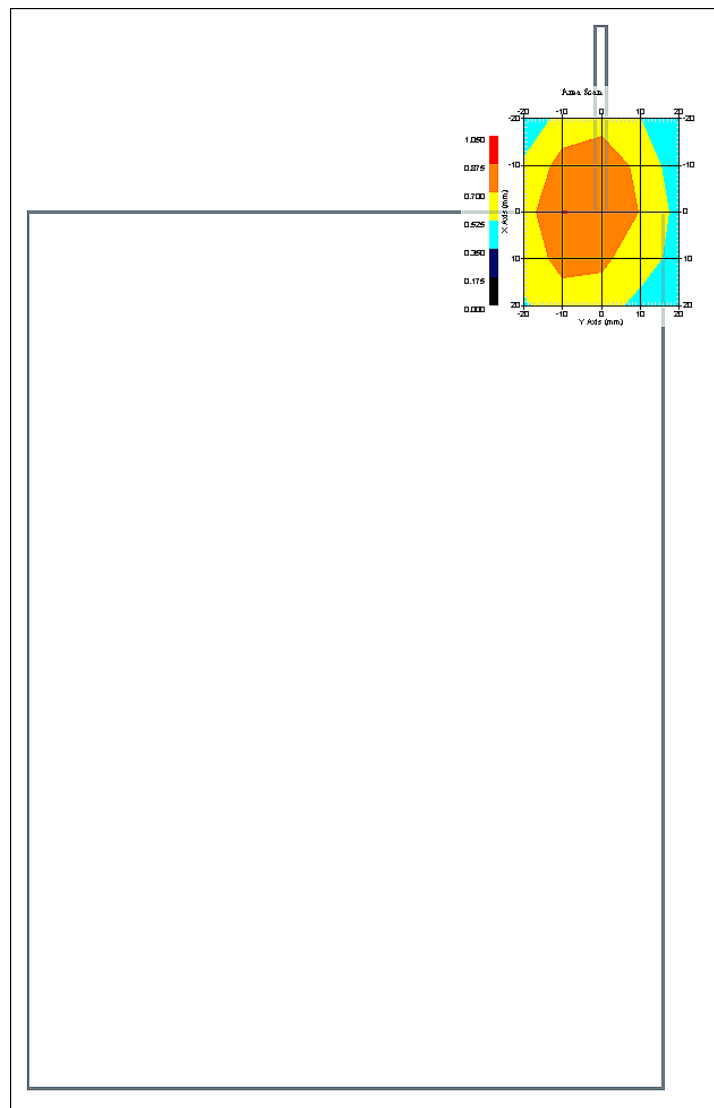

1 gram SAR value : 0.866 W/kg  
 10 gram SAR value : 0.550 W/kg  
 Area Scan Peak SAR : 0.877 W/kg  
 Zoom Scan Peak SAR : 1.381 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 27-Jul-2007  
Starting Time : 27-Jul-2007 02:25:36 PM  
End Time : 27-Jul-2007 02:39:04 PM  
Scanning Time : 808 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 835.00 MHz  
Max. Transmit Pwr : 0.29 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.946 W/kg  
Power Drift-Finish: 0.976 W/kg  
Power Drift (%) : 3.133

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 835  
Frequency : 835.00 MHz  
Last Calib. Date : 27-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 55.21 F/m  
Sigma : 0.96 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 835.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 6.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 27-Jul-2007  
 Set-up Time : 2:25:30 PM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Mid

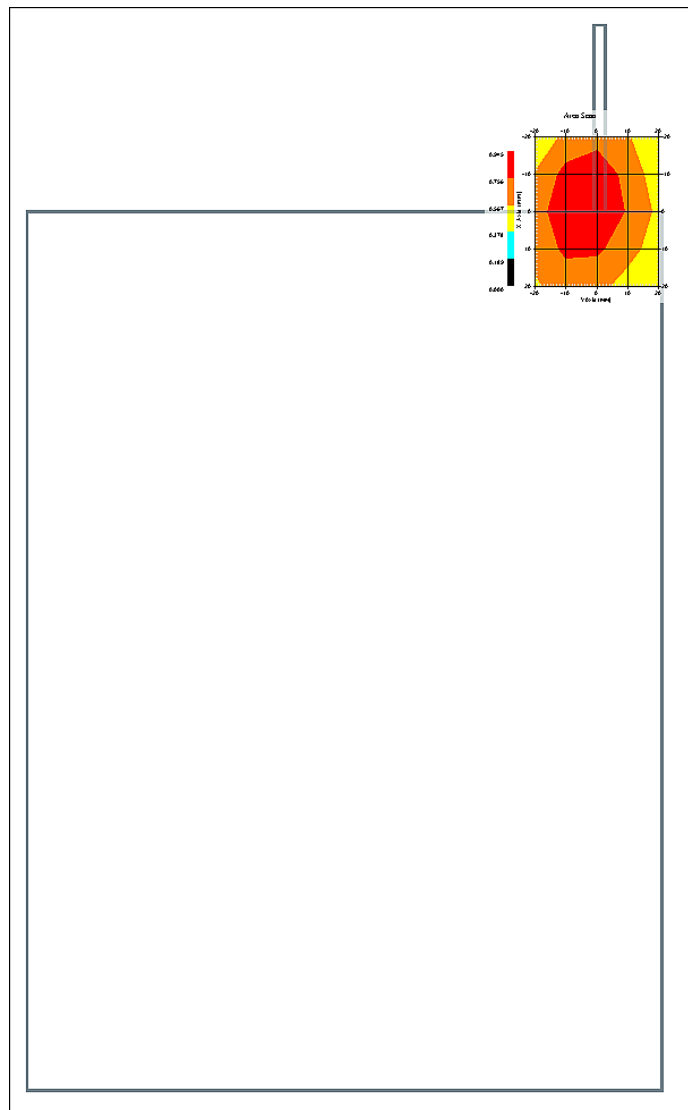

1 gram SAR value : 0.909 W/kg  
 10 gram SAR value : 0.582 W/kg  
 Area Scan Peak SAR : 0.945 W/kg  
 Zoom Scan Peak SAR : 1.421 W/kg



**SAR-Z Axis**  
at Hotspot x:0.32 y:-8.19

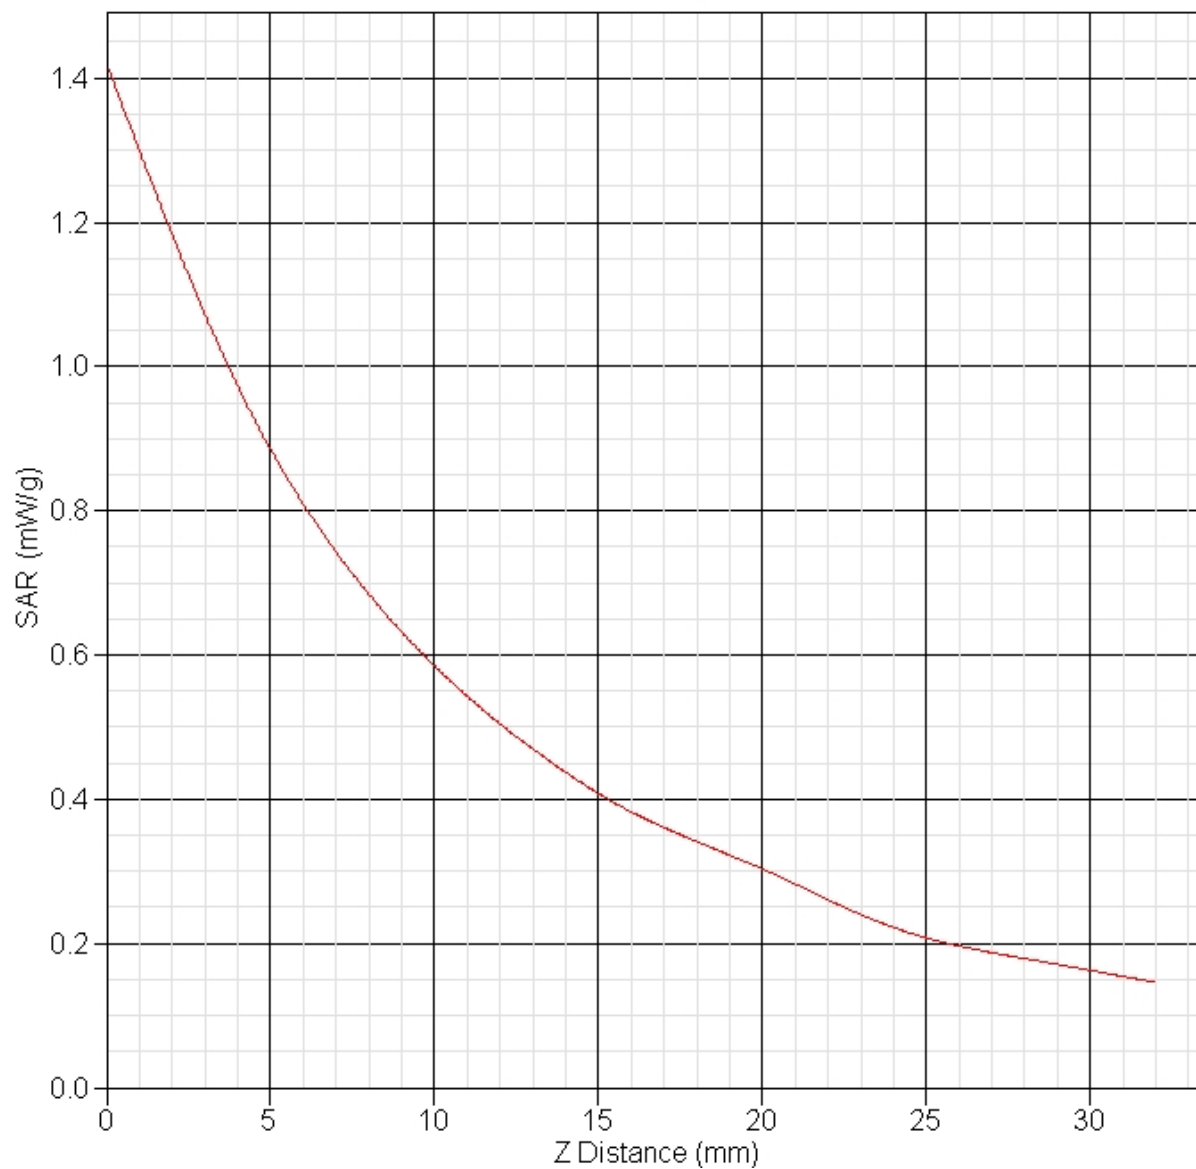



## SAR Test Report

By Operator : Jay  
Measurement Date : 31-Jul-2007  
Starting Time : 31-Jul-2007 03:02:29 PM  
End Time : 31-Jul-2007 03:15:35 PM  
Scanning Time : 786 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 835.00 MHz  
Max. Transmit Pwr : 0.29 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.955 W/kg  
Power Drift-Finish: 0.935 W/kg  
Power Drift (%) : -2.176

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 835  
Frequency : 835.00 MHz  
Last Calib. Date : 27-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 55.21 F/m  
Sigma : 0.96 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 835.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 6.3  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 31-Jul-2007  
 Set-up Time : 2:25:30 PM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : High

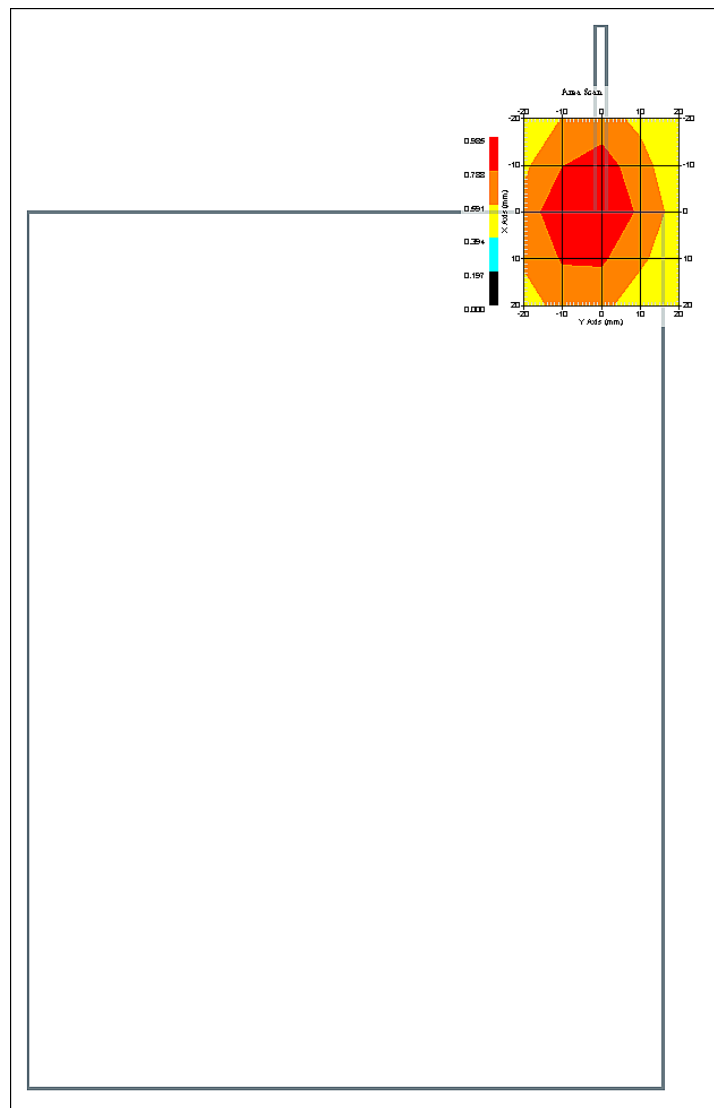

1 gram SAR value : 0.876 W/kg  
 10 gram SAR value : 0.548 W/kg  
 Area Scan Peak SAR : 0.985 W/kg  
 Zoom Scan Peak SAR : 1.371 W/kg



**SAR Test Report**

By Operator : Jay  
Measurement Date : 30-Jul-2007  
Starting Time : 30-Jul-2007 10:09:40 AM  
End Time : 30-Jul-2007 10:30:39 AM  
Scanning Time : 1259 secs

**Product Data**

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 1900.00 MHz  
Max. Transmit Pwr : 1 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.278 W/kg  
Power Drift-Finish: 0.265 W/kg  
Power Drift (%) : -4.676

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

**Tissue Data**

Type : BODY  
Serial No. : 1900  
Frequency : 1900.00 MHz  
Last Calib. Date : 30-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 52.58 F/m  
Sigma : 1.48 S/m  
Density : 1000.00 kg/cu. m

**Probe Data**

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 1900.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 30-Jul-2007  
 Set-up Time : 8:25:25 AM  
 Area Scan : 5x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

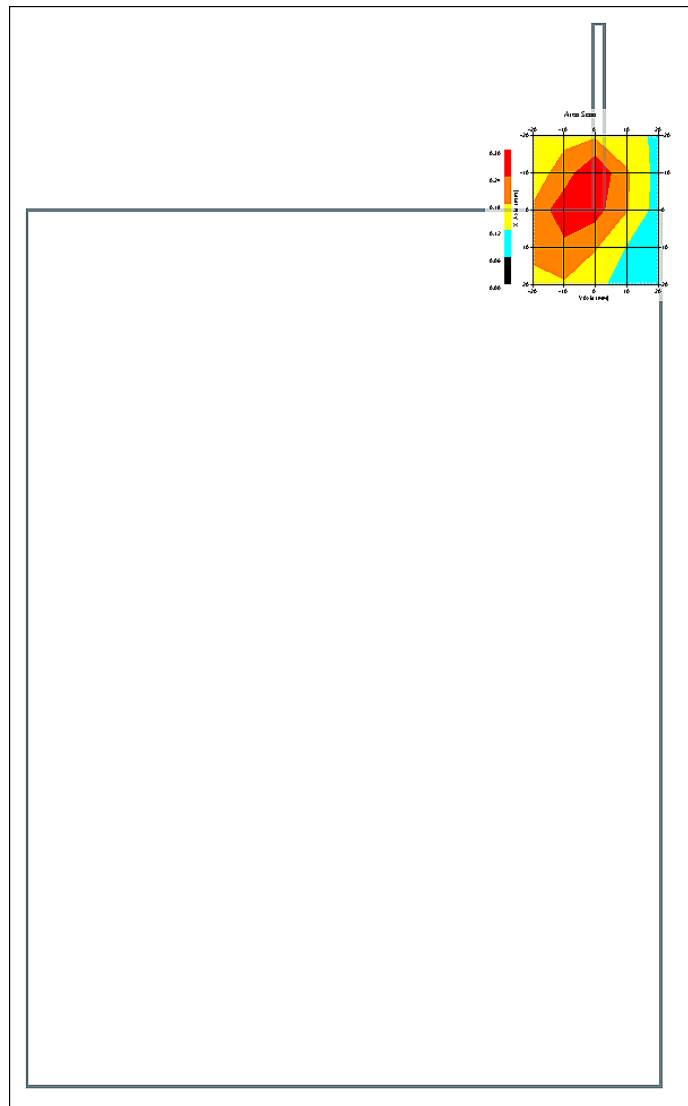


1 gram SAR value : 0.277 W/kg  
 10 gram SAR value : 0.159 W/kg  
 Area Scan Peak SAR : 0.298 W/kg  
 Zoom Scan Peak SAR : 0.520 W/kg



# SAR-Z Axis

at Hotspot x:-9.64 y:-0.32

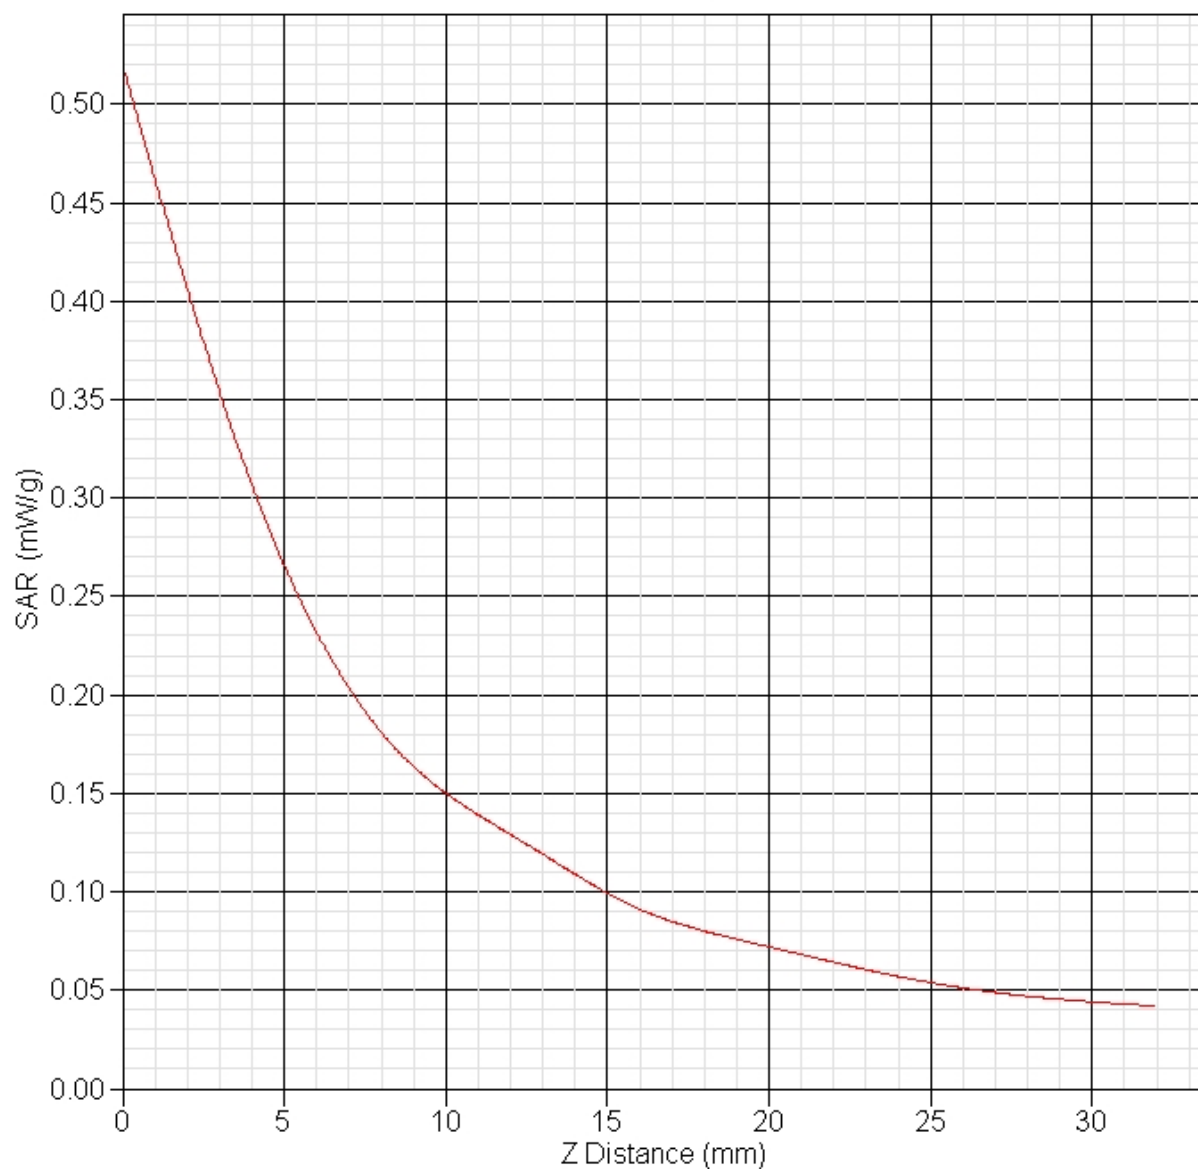



## SAR Test Report

By Operator : Jay  
Measurement Date : 30-Jul-2007  
Starting Time : 30-Jul-2007 04:49:31 PM  
End Time : 30-Jul-2007 05:12:43 PM  
Scanning Time : 1392 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 1900.00 MHz  
Max. Transmit Pwr : 0.26 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 1.210 W/kg  
Power Drift-Finish: 1.243 W/kg  
Power Drift (%) : 2.769

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 1900  
Frequency : 1900.00 MHz  
Last Calib. Date : 30-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 52.58 F/m  
Sigma : 1.48 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 1900.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 30-Jul-2007  
 Set-up Time : 8:25:25 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Low

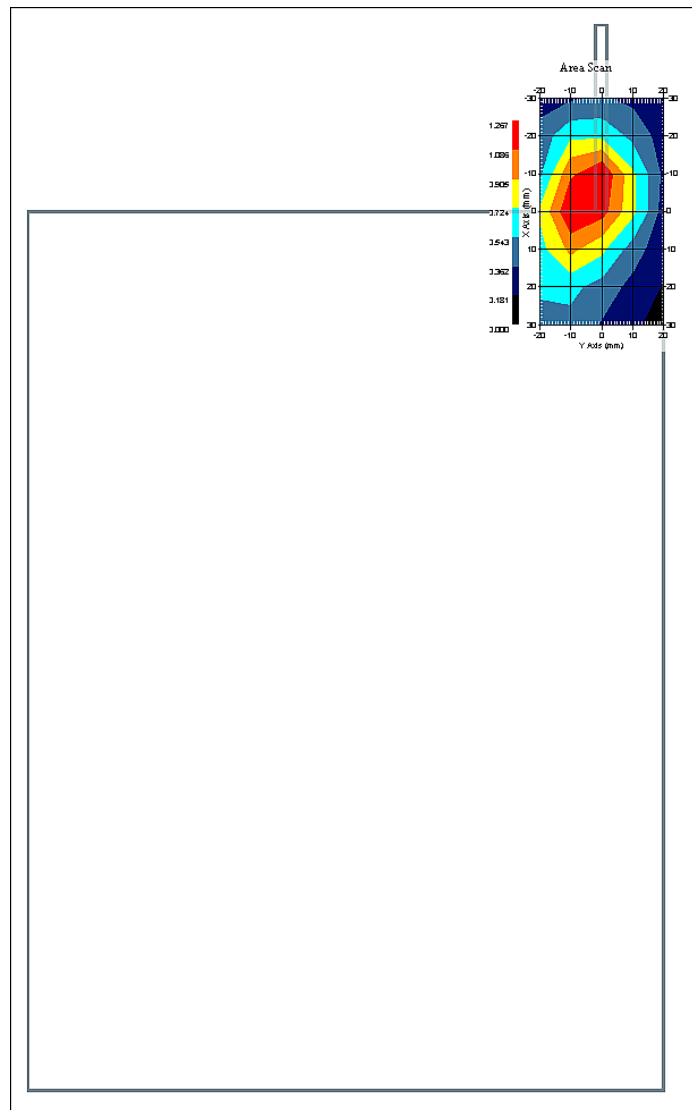

1 gram SAR value : 1.219 W/kg  
 10 gram SAR value : 0.648 W/kg  
 Area Scan Peak SAR : 1.267 W/kg  
 Zoom Scan Peak SAR : 2.241 W/kg



**SAR-Z Axis**  
at Hotspot x:-7.72 y:-2.30

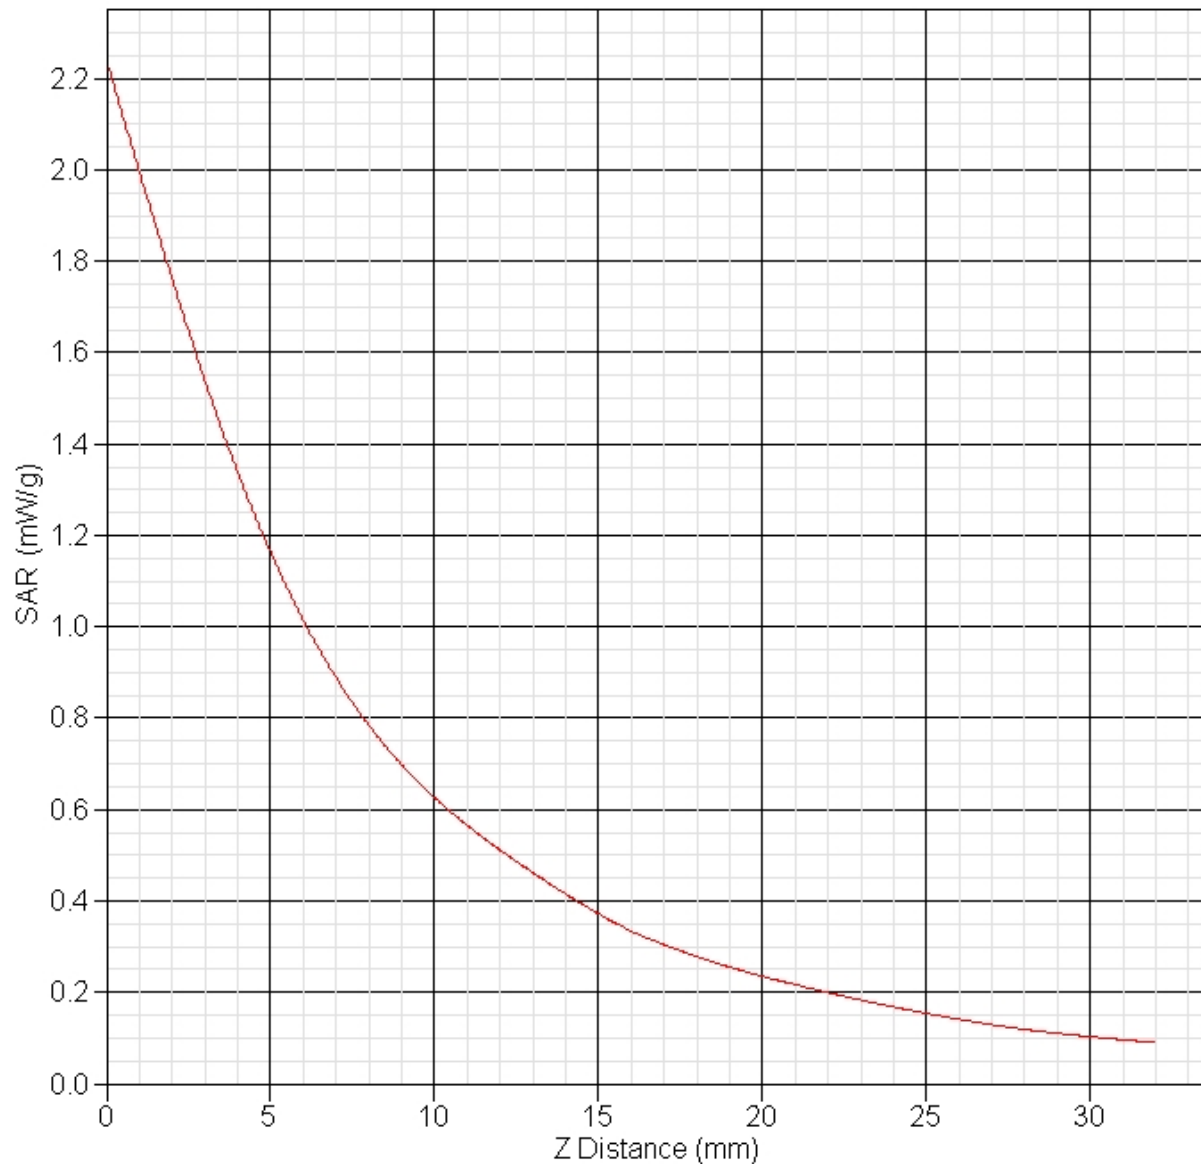



## SAR Test Report

By Operator : Jay  
Measurement Date : 30-Jul-2007  
Starting Time : 30-Jul-2007 04:25:09 PM  
End Time : 30-Jul-2007 04:40:17 PM  
Scanning Time : 908 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 1900.00 MHz  
Max. Transmit Pwr : 0.26 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.953 W/kg  
Power Drift-Finish: 0.920 W/kg  
Power Drift (%) : -3.463

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 1900  
Frequency : 1900.00 MHz  
Last Calib. Date : 30-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 52.58 F/m  
Sigma : 1.48 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 1900.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 30-Jul-2007  
 Set-up Time : 8:25:25 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

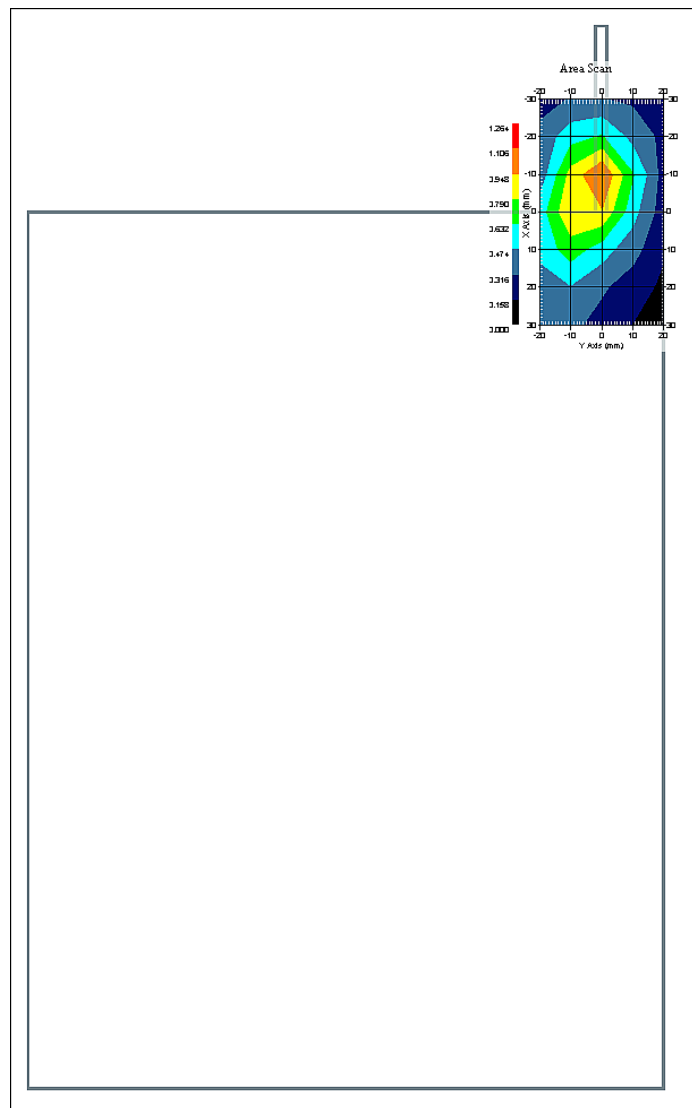

1 gram SAR value : 0.918 W/kg  
 10 gram SAR value : 0.496 W/kg  
 Area Scan Peak SAR : 1.109 W/kg  
 Zoom Scan Peak SAR : 1.731 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 30-Jul-2007  
Starting Time : 30-Jul-2007 05:13:42 PM  
End Time : 30-Jul-2007 05:36:52 PM  
Scanning Time : 1390 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 1900.00 MHz  
Max. Transmit Pwr : 0.26 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Whip  
Orientation : Touch  
Power Drift-Start : 0.832 W/kg  
Power Drift-Finish: 0.801 W/kg  
Power Drift (%) : -3.726

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 1900  
Frequency : 1900.00 MHz  
Last Calib. Date : 30-Jul-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 49.00 RH%  
Epsilon : 52.58 F/m  
Sigma : 1.48 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 1900.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 30-Jul-2007  
 Set-up Time : 8:25:25 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : High

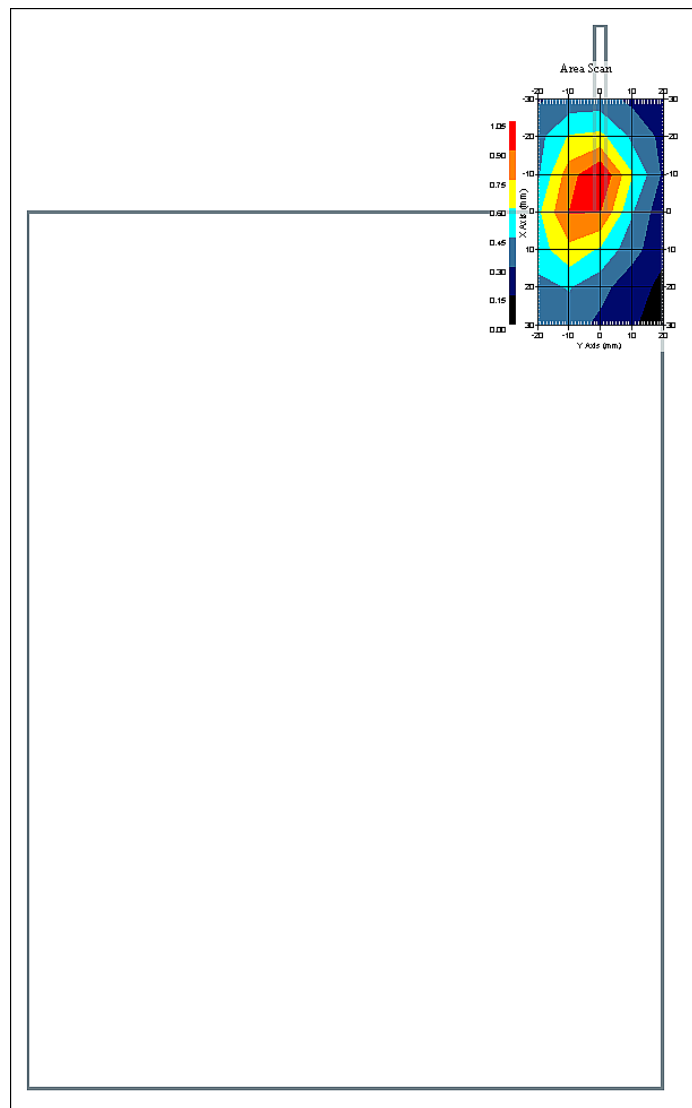

1 gram SAR value : 0.969 W/kg  
 10 gram SAR value : 0.505 W/kg  
 Area Scan Peak SAR : 1.049 W/kg  
 Zoom Scan Peak SAR : 1.891 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 12:40:21 PM  
End Time : 03-Aug-2007 01:03:18 PM  
Scanning Time : 1377 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.160 W/kg  
Power Drift-Finish: 0.156 W/kg  
Power Drift (%) : -2.554

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Mid



1 gram SAR value : 0.141 W/kg  
10 gram SAR value : 0.098 W/kg  
Area Scan Peak SAR : 0.131 W/kg  
Zoom Scan Peak SAR : 0.210 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 02:20:02 PM  
End Time : 03-Aug-2007 02:42:41 PM  
Scanning Time : 1359 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.109 W/kg  
Power Drift-Finish: 0.106 W/kg  
Power Drift (%) : -2.881

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Low



1 gram SAR value : 0.123 W/kg  
10 gram SAR value : 0.076 W/kg  
Area Scan Peak SAR : 0.148 W/kg  
Zoom Scan Peak SAR : 0.220 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 05:30:49 PM  
End Time : 03-Aug-2007 05:45:53 PM  
Scanning Time : 904 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 0.01 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.153 W/kg  
Power Drift-Finish: 0.157 W/kg  
Power Drift (%) : 2.614

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5200  
Frequency : 5200.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.32 F/m  
Sigma : 5.26 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 13  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 3:58:27 PM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Mid

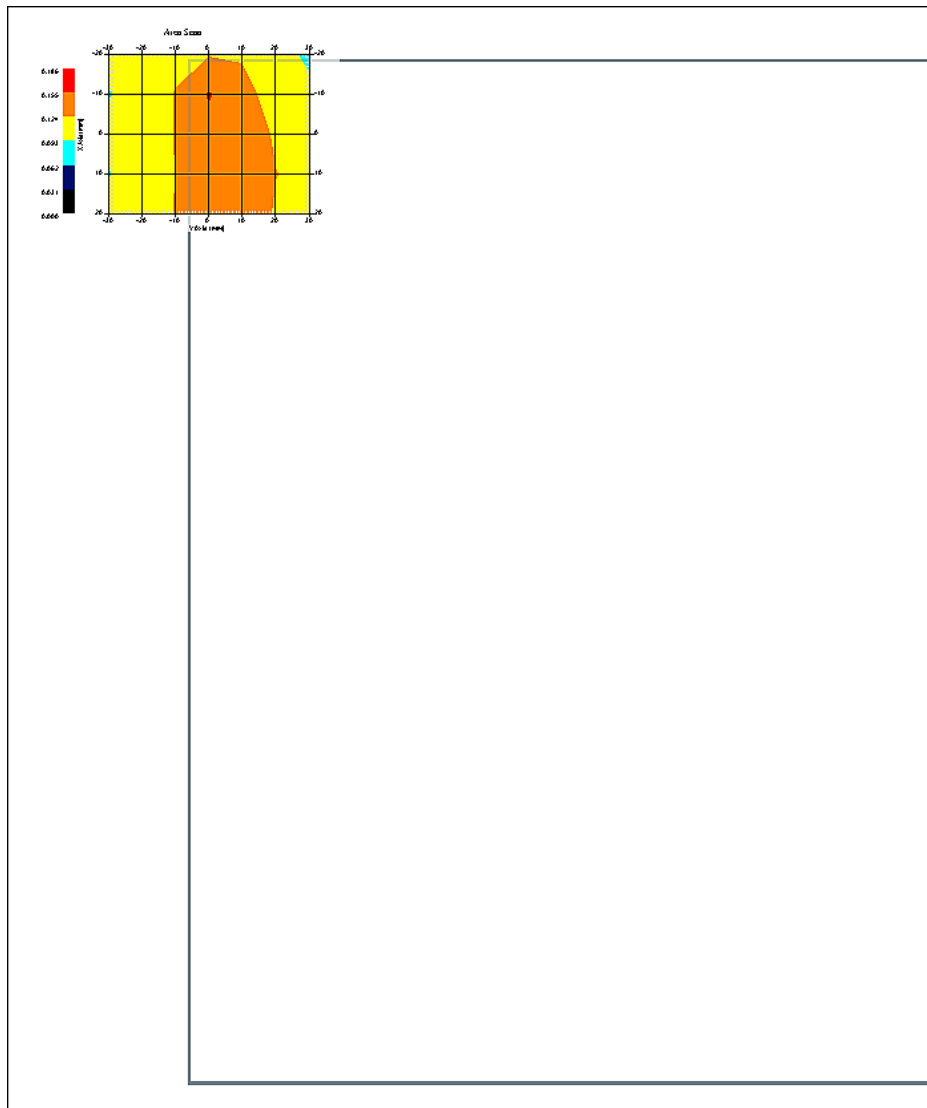

1 gram SAR value : 0.162 W/kg  
10 gram SAR value : 0.120 W/kg  
Area Scan Peak SAR : 0.157 W/kg  
Zoom Scan Peak SAR : 0.240 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 06:05:33 PM  
End Time : 03-Aug-2007 06:28:39 PM  
Scanning Time : 1386 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 0.01 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.159 W/kg  
Power Drift-Finish: 0.162 W/kg  
Power Drift (%) : 1.916

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5200  
Frequency : 5200.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.32 F/m  
Sigma : 5.26 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 13  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 6:05:28 PM  
 Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid



1 gram SAR value : 0.158 W/kg  
 10 gram SAR value : 0.119 W/kg  
 Area Scan Peak SAR : 0.166 W/kg  
 Zoom Scan Peak SAR : 0.230 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 06:51:34 PM  
End Time : 03-Aug-2007 07:06:37 PM  
Scanning Time : 903 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5300.00 MHz  
Max. Transmit Pwr : 0.03 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.166 W/kg  
Power Drift-Finish: 0.158 W/kg  
Power Drift (%) : -4.395

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5200  
Frequency : 5200.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.32 F/m  
Sigma : 5.26 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 13  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 8:18:17 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

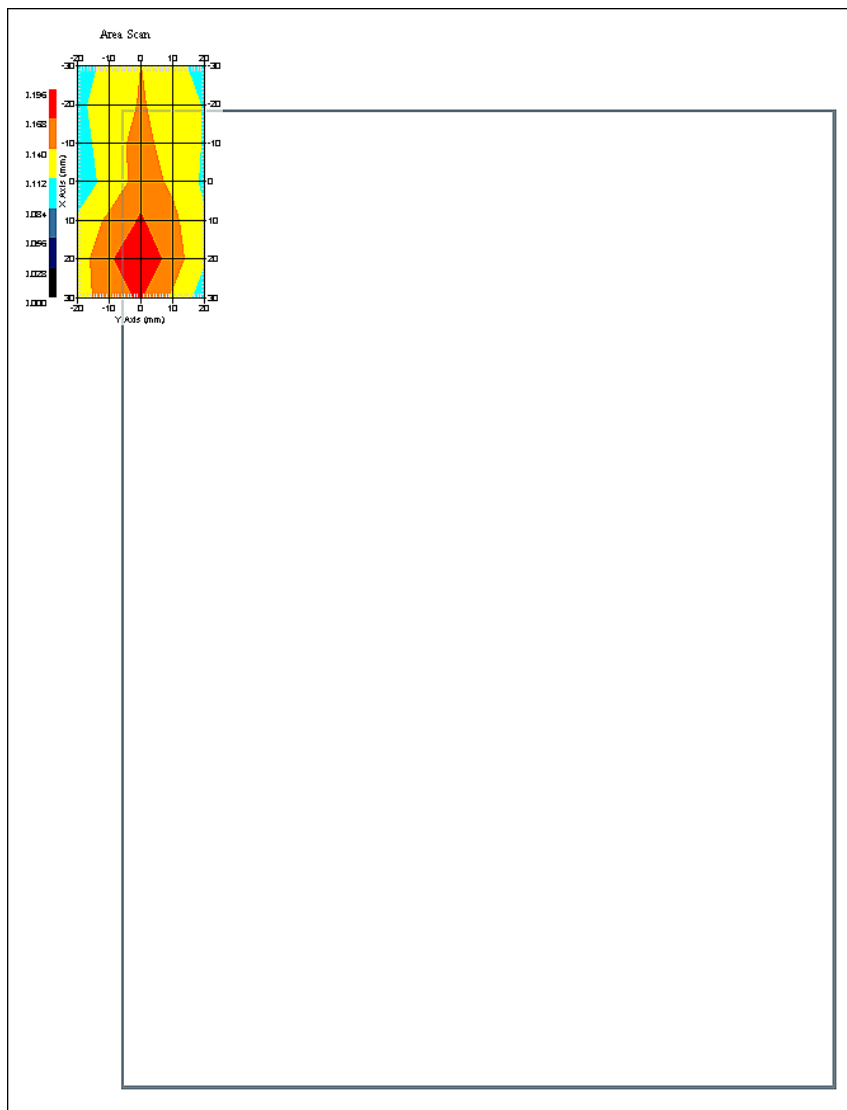

1 gram SAR value : 0.172 W/kg  
 10 gram SAR value : 0.121 W/kg  
 Area Scan Peak SAR : 0.193 W/kg  
 Zoom Scan Peak SAR : 0.270 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 07:09:04 PM  
End Time : 03-Aug-2007 07:23:52 PM  
Scanning Time : 888 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5300.00 MHz  
Max. Transmit Pwr : 0.03 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.168 W/kg  
Power Drift-Finish: 0.172 W/kg  
Power Drift (%) : 2.381

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5200  
Frequency : 5200.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.32 F/m  
Sigma : 5.26 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5200.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 13  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 8:18:17 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Mid

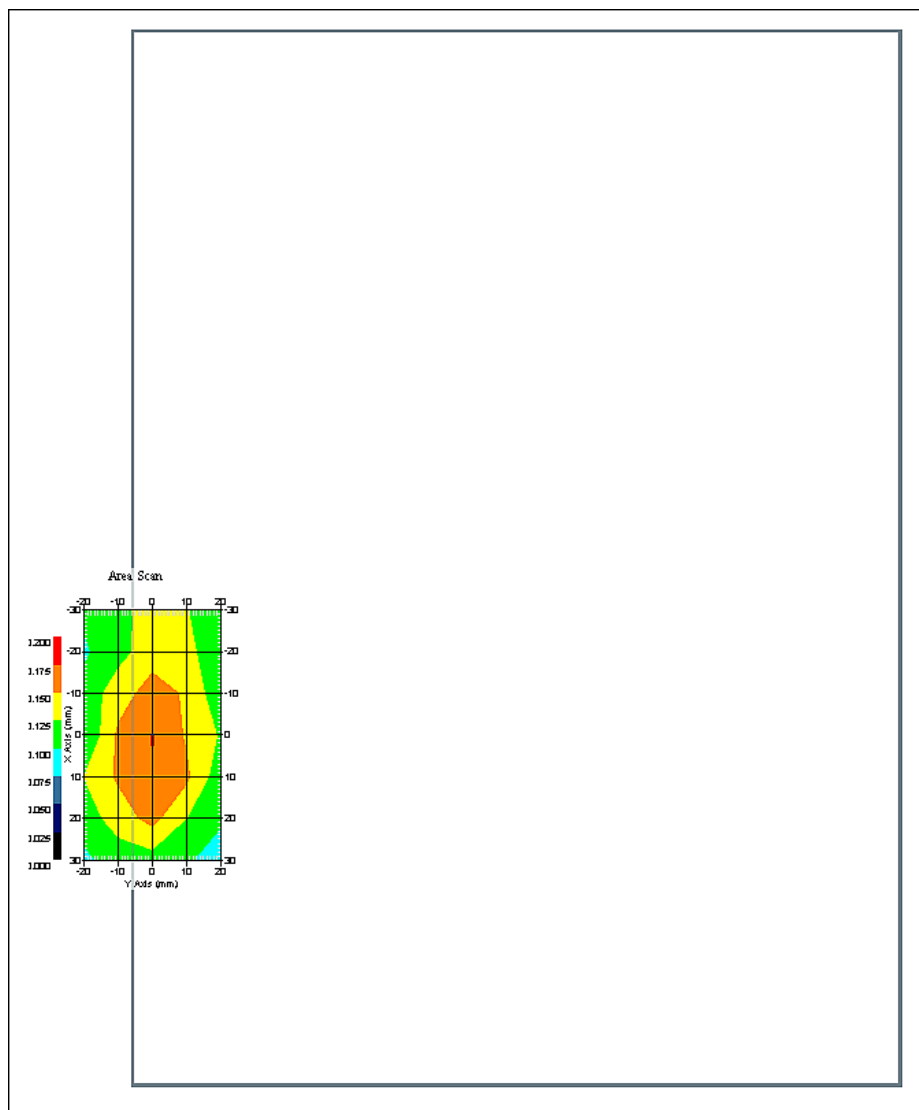

1 gram SAR value : 0.177 W/kg  
 10 gram SAR value : 0.126 W/kg  
 Area Scan Peak SAR : 0.176 W/kg  
 Zoom Scan Peak SAR : 0.290 W/kg



**SAR-Z Axis**  
at Hotspot x:8.24 y:-0.13

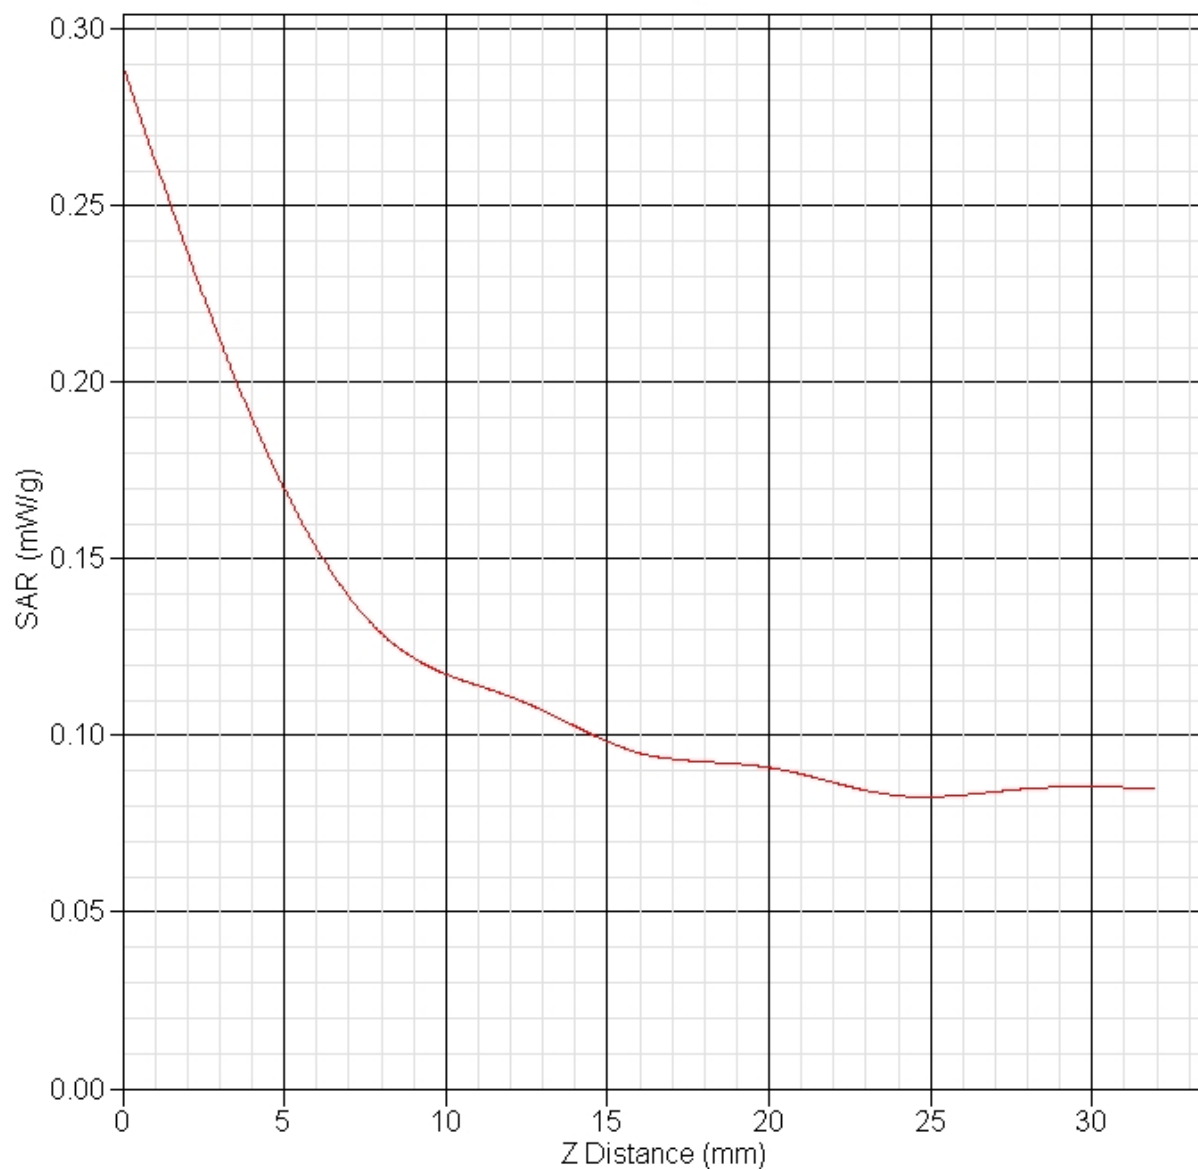



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 12:57:07 PM  
End Time : 04-Aug-2007 01:11:58 PM  
Scanning Time : 891 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.135 W/kg  
Power Drift-Finish: 0.137 W/kg  
Power Drift (%) : 1.479

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 9:27:37 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

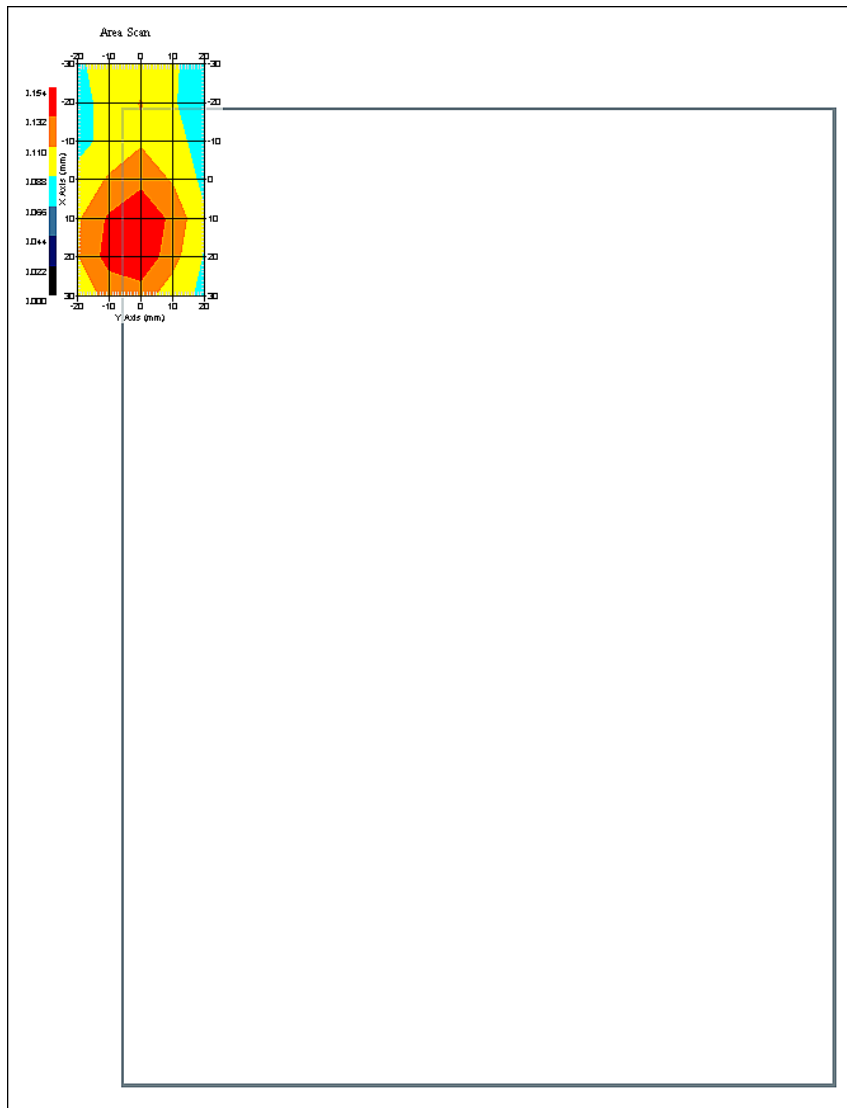

1 gram SAR value : 0.157 W/kg  
 10 gram SAR value : 0.108 W/kg  
 Area Scan Peak SAR : 0.153 W/kg  
 Zoom Scan Peak SAR : 0.240 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 01:23:15 PM  
End Time : 04-Aug-2007 01:37:50 PM  
Scanning Time : 875 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.149 W/kg  
Power Drift-Finish: 0.154 W/kg  
Power Drift (%) : 3.431

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 9:27:37 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

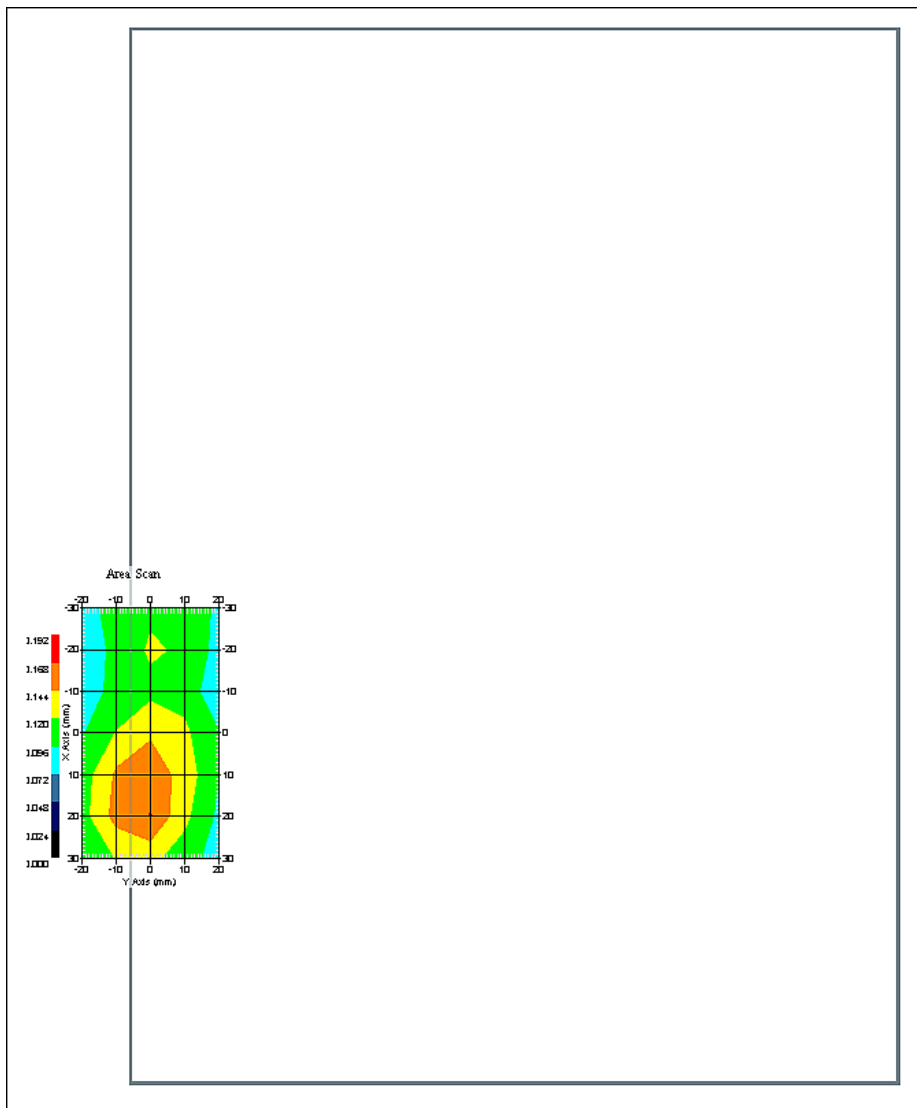

1 gram SAR value : 0.155 W/kg  
 10 gram SAR value : 0.111 W/kg  
 Area Scan Peak SAR : 0.169 W/kg  
 Zoom Scan Peak SAR : 0.240 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 10:57:38 AM  
End Time : 03-Aug-2007 11:12:44 AM  
Scanning Time : 906 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.143 W/kg  
Power Drift-Finish: 0.150 W/kg  
Power Drift (%) : 4.808

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Low




1 gram SAR value : 0.135 W/kg  
10 gram SAR value : 0.089 W/kg  
Area Scan Peak SAR : 0.158 W/kg  
Zoom Scan Peak SAR : 0.230 W/kg



### SAR-Z Axis

at Hotspot x:0.23 y:-8.17

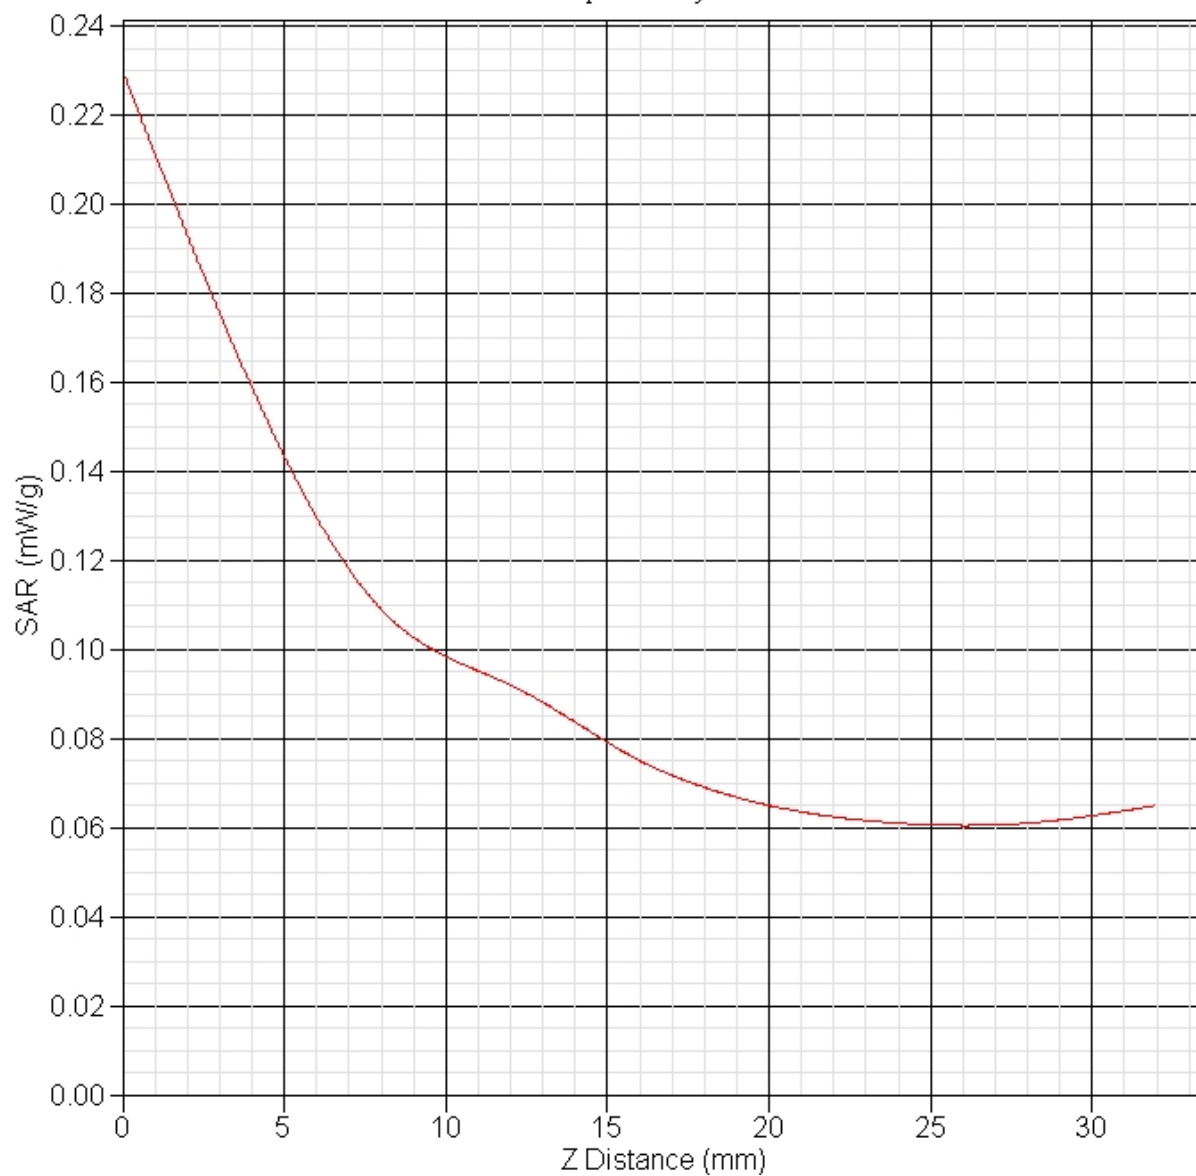



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 01:56:19 PM  
End Time : 03-Aug-2007 02:19:19 PM  
Scanning Time : 1380 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.099 W/kg  
Power Drift-Finish: 0.094 W/kg  
Power Drift (%) : -4.655

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Low



1 gram SAR value : 0.117 W/kg  
10 gram SAR value : 0.076 W/kg  
Area Scan Peak SAR : 0.151 W/kg  
Zoom Scan Peak SAR : 0.210 W/kg



**SAR Test Report**

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 10:27:58 AM  
End Time : 03-Aug-2007 10:51:05 AM  
Scanning Time : 1387 secs

**Product Data**

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.141 W/kg  
Power Drift-Finish: 0.146 W/kg  
Power Drift (%) : 3.425

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

**Tissue Data**

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

**Probe Data**

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 8:43:07 AM  
 Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Low

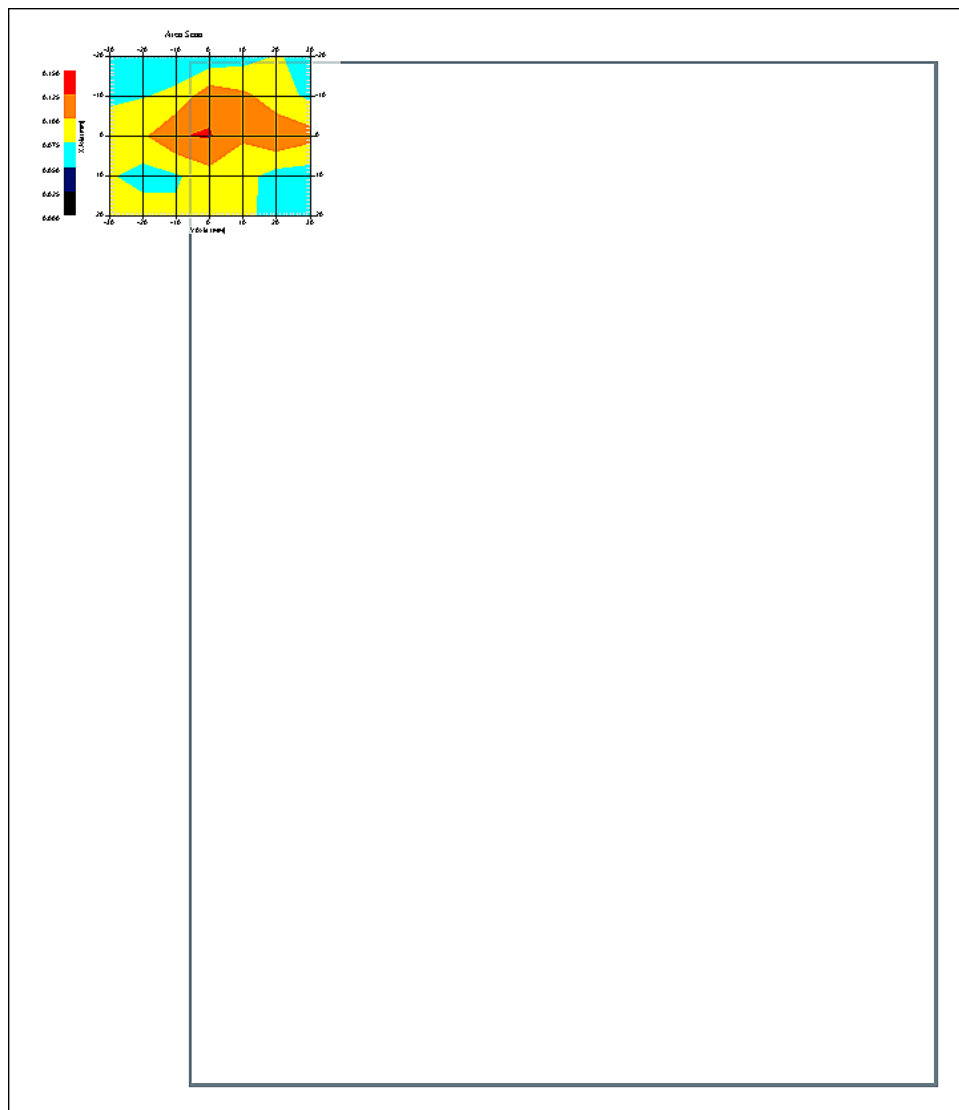

1 gram SAR value : 0.136 W/kg  
 10 gram SAR value : 0.093 W/kg  
 Area Scan Peak SAR : 0.127 W/kg  
 Zoom Scan Peak SAR : 0.220 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 01:31:28 PM  
End Time : 03-Aug-2007 01:54:01 PM  
Scanning Time : 1353 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.082 W/kg  
Power Drift-Finish: 0.084 W/kg  
Power Drift (%) : 2.439

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : High



1 gram SAR value : 0.121 W/kg  
10 gram SAR value : 0.076 W/kg  
Area Scan Peak SAR : 0.139 W/kg  
Zoom Scan Peak SAR : 0.220 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 03:22:24 PM  
End Time : 03-Aug-2007 03:45:24 PM  
Scanning Time : 1380 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.117 W/kg  
Power Drift-Finish: 0.118 W/kg  
Power Drift (%) : 0.668

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 03-Aug-2007  
Set-up Time : 8:43:07 AM  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data

DUT Position : Touch  
Separation : 0  
Channel : Mid



1 gram SAR value : 0.134 W/kg  
10 gram SAR value : 0.090 W/kg  
Area Scan Peak SAR : 0.126 W/kg  
Zoom Scan Peak SAR : 0.230 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 03-Aug-2007  
Starting Time : 03-Aug-2007 02:48:52 PM  
End Time : 03-Aug-2007 03:12:16 PM  
Scanning Time : 1404 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 0.09 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.115 W/kg  
Power Drift-Finish: 0.111 W/kg  
Power Drift (%) : -3.478

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 2450  
Frequency : 2450.00 MHz  
Last Calib. Date : 03-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 45.00 RH%  
Epsilon : 51.76 F/m  
Sigma : 1.97 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe 215 - RFEL  
Model : E020  
Type : E-Field Triangle  
Serial No. : 215  
Last Calib. Date : 14-Feb-2007  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 4.5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 03-Aug-2007  
 Set-up Time : 8:43:07 AM  
 Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid



1 gram SAR value : 0.102 W/kg  
 10 gram SAR value : 0.078 W/kg  
 Area Scan Peak SAR : 0.126 W/kg  
 Zoom Scan Peak SAR : 0.160 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 01:58:58 PM  
End Time : 04-Aug-2007 02:13:30 PM  
Scanning Time : 872 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.152 W/kg  
Power Drift-Finish: 0.149 W/kg  
Power Drift (%) : -2.060

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 9:27:37 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**


DUT Position : Touch  
 Separation : 0  
 Channel : Mid

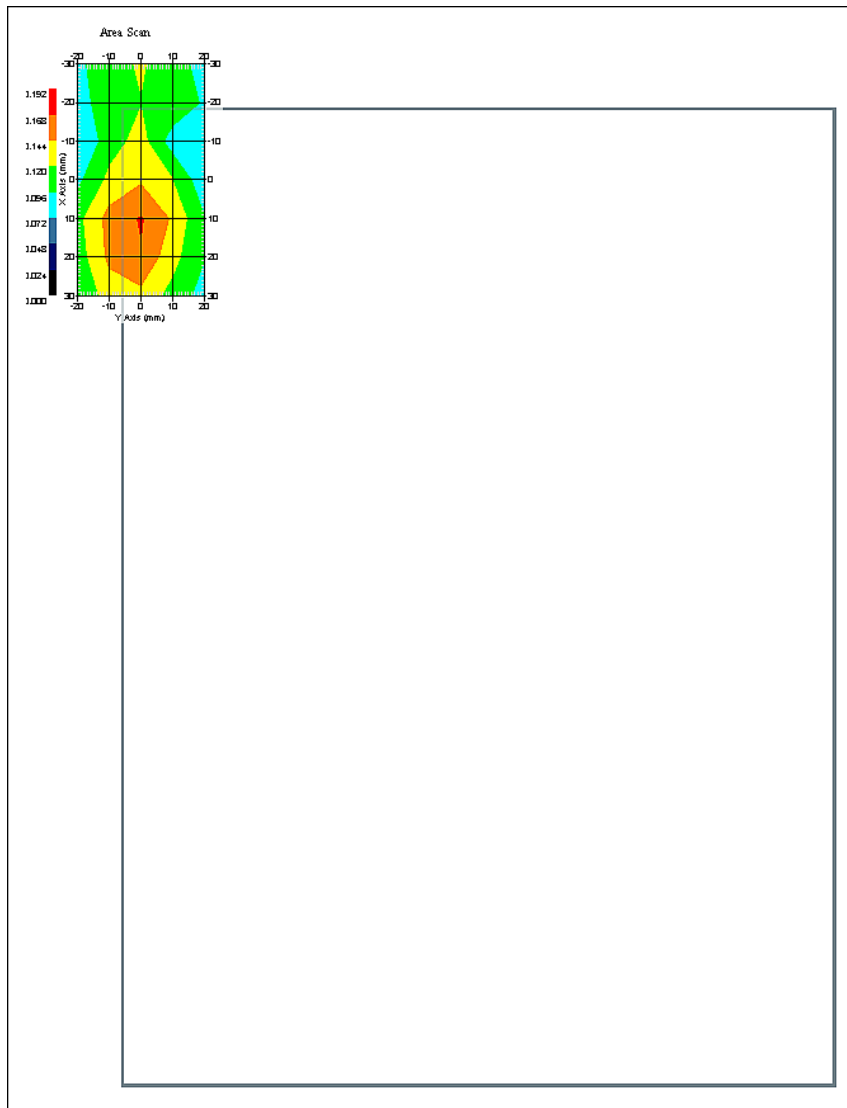

1 gram SAR value : 0.165 W/kg  
 10 gram SAR value : 0.109 W/kg  
 Area Scan Peak SAR : 0.170 W/kg  
 Zoom Scan Peak SAR : 0.280 W/kg



# SAR-Z Axis at Hotspot x:18.28 y:-0.15

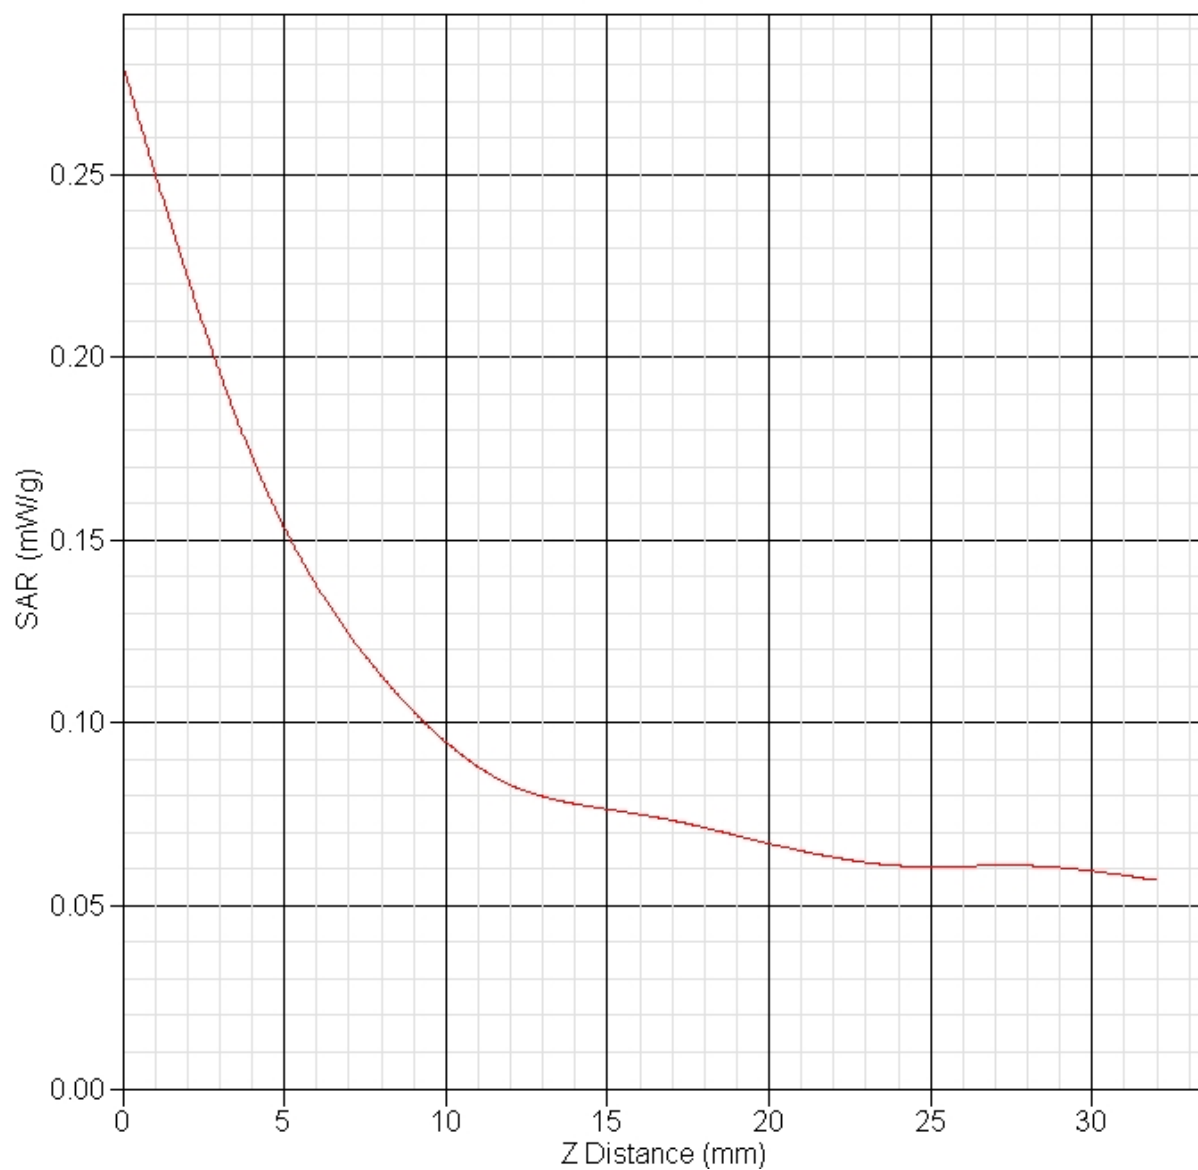



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 01:39:22 PM  
End Time : 04-Aug-2007 01:53:49 PM  
Scanning Time : 867 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.149 W/kg  
Power Drift-Finish: 0.153 W/kg  
Power Drift (%) : 2.732

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 9:27:37 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

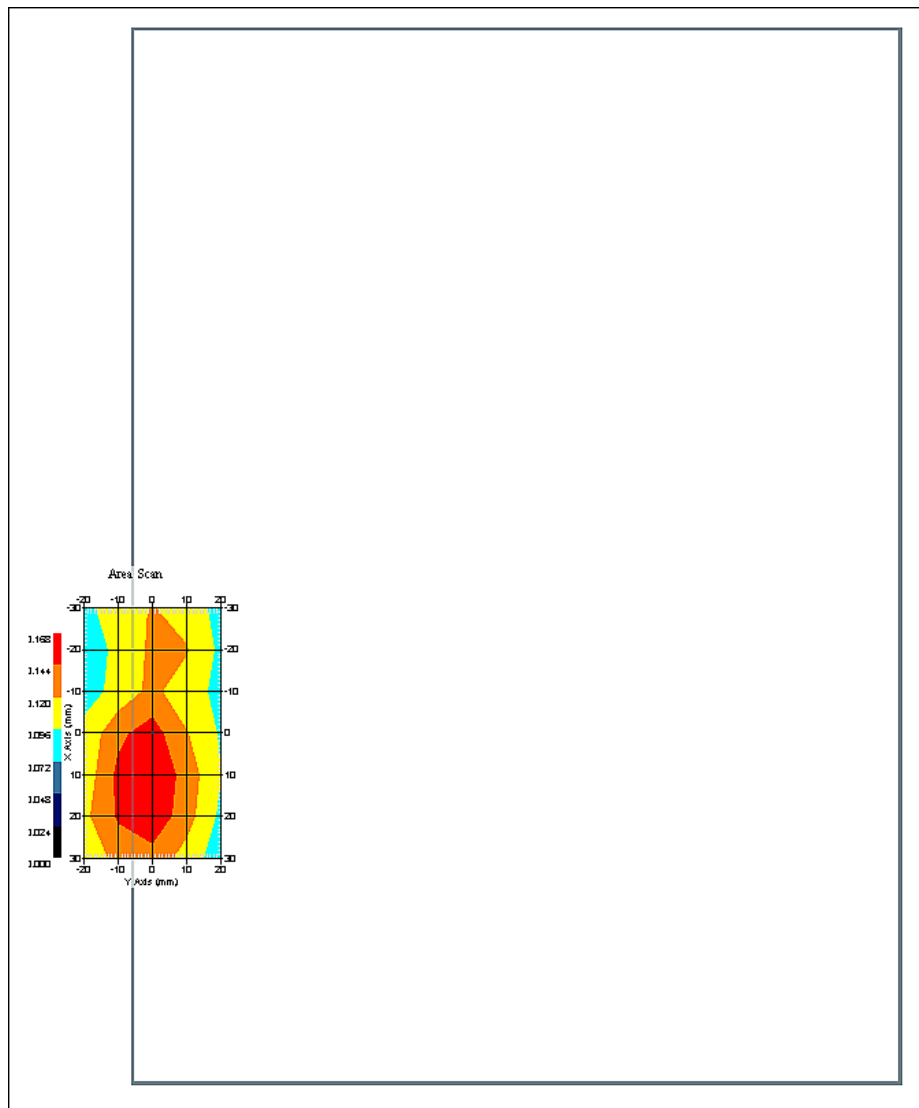

1 gram SAR value : 0.165 W/kg  
 10 gram SAR value : 0.109 W/kg  
 Area Scan Peak SAR : 0.166 W/kg  
 Zoom Scan Peak SAR : 0.260 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 02:40:02 PM  
End Time : 04-Aug-2007 02:54:36 PM  
Scanning Time : 874 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.082 W/kg  
Power Drift-Finish: 0.085 W/kg  
Power Drift (%) : 3.824

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




**Measurement Data**

Crest Factor : 1  
 Scan Type : Complete  
 Tissue Temp. : 20.00 °C  
 Ambient Temp. : 23.00 °C  
 Set-up Date : 04-Aug-2007  
 Set-up Time : 9:27:37 AM  
 Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

**Other Data**

DUT Position : Touch  
 Separation : 0  
 Channel : Mid

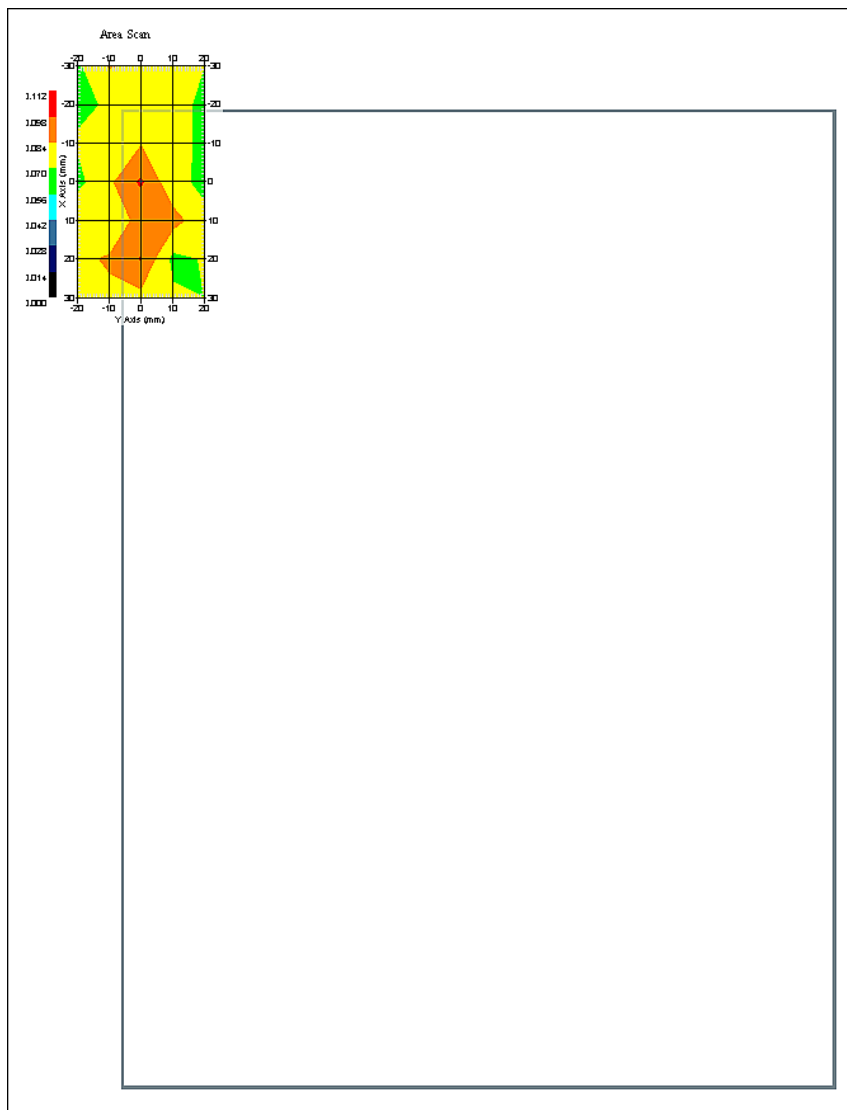

1 gram SAR value : 0.098 W/kg  
 10 gram SAR value : 0.077 W/kg  
 Area Scan Peak SAR : 0.100 W/kg  
 Zoom Scan Peak SAR : 0.130 W/kg



## SAR Test Report

By Operator : Jay  
Measurement Date : 04-Aug-2007  
Starting Time : 04-Aug-2007 02:58:31 PM  
End Time : 04-Aug-2007 03:13:05 PM  
Scanning Time : 874 secs

### Product Data

Device Name : Novatel Wireless  
Serial No. : 5B280EA7  
Type : Other  
Model : EU870D  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 0.06 W  
Drift Time : 0 min(s)  
Length : 297 mm  
Width : 218 mm  
Depth : 27 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 0.093 W/kg  
Power Drift-Finish: 0.096 W/kg  
Power Drift (%) : 3.362

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Uni-Phantom

### Tissue Data

Type : BODY  
Serial No. : 5800  
Frequency : 5800.00 MHz  
Last Calib. Date : 04-Aug-2007  
Temperature : 20.00 °C  
Ambient Temp. : 23.00 °C  
Humidity : 50.00 RH%  
Epsilon : 48.04 F/m  
Sigma : 6.08 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : Probe AL-E3P1 - AL  
Model : E-030  
Type : E-Field Triangle  
Serial No. : AL-E3P1  
Last Calib. Date : 30-Apr-2007  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 14  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point: 95.00 mV  
Offset : 0.56 mm




## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 23.00 °C  
Set-up Date : 04-Aug-2007  
Set-up Time : 9:27:37 AM  
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

## Other Data


DUT Position : Touch  
Separation : 0  
Channel : Mid

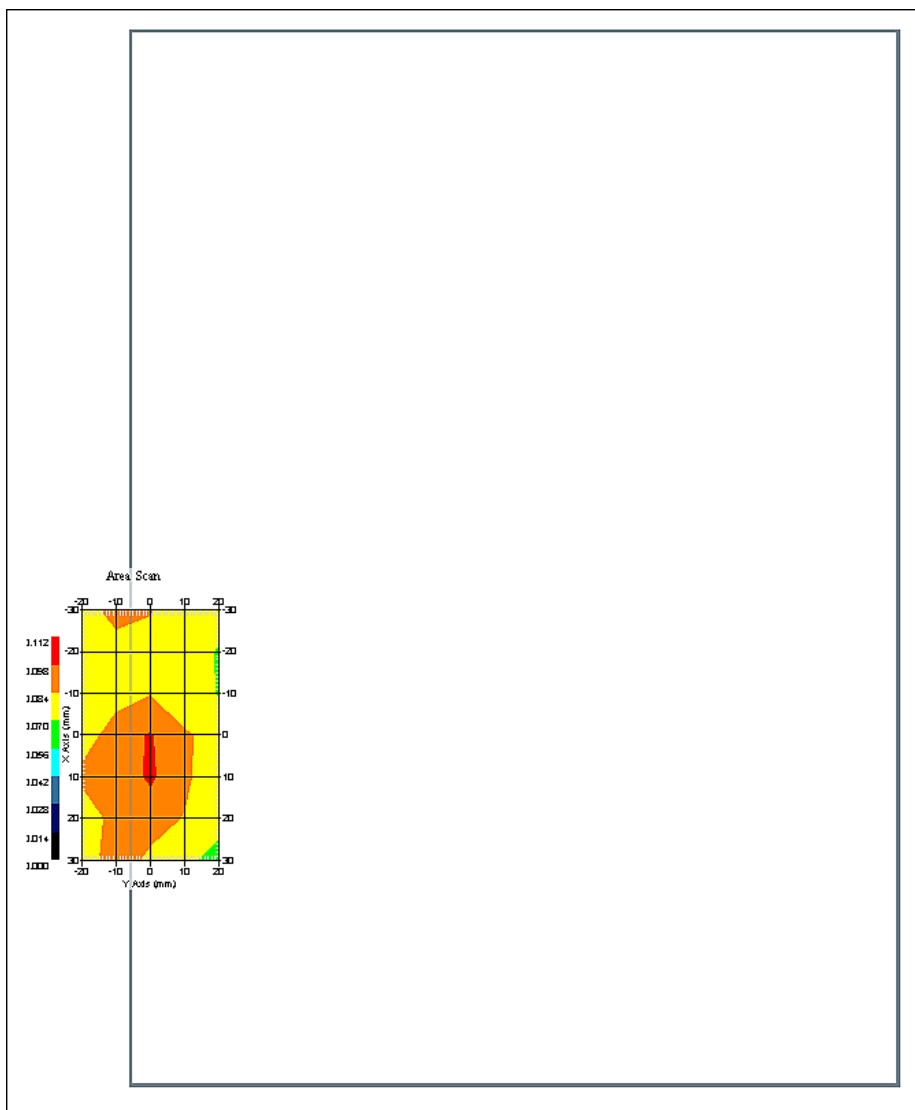


1 gram SAR value : 0.099 W/kg  
10 gram SAR value : 0.079 W/kg  
Area Scan Peak SAR : 0.100 W/kg  
Zoom Scan Peak SAR : 0.140 W/kg



## Appendix C – SAR Test Setup Photos

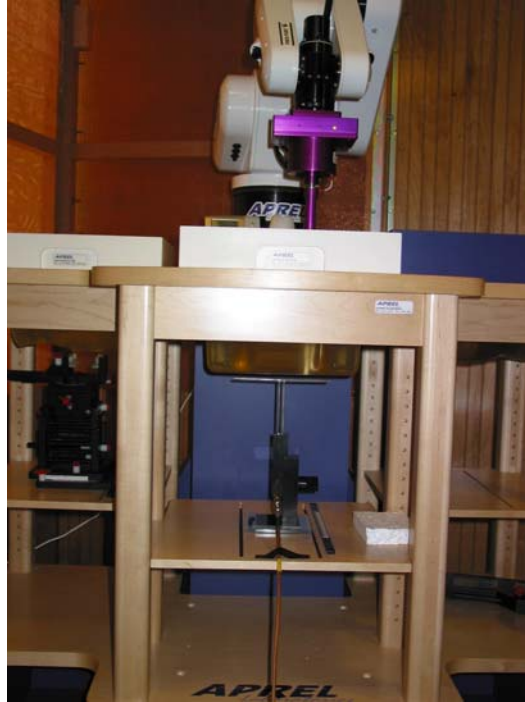

**System Body Configuration**

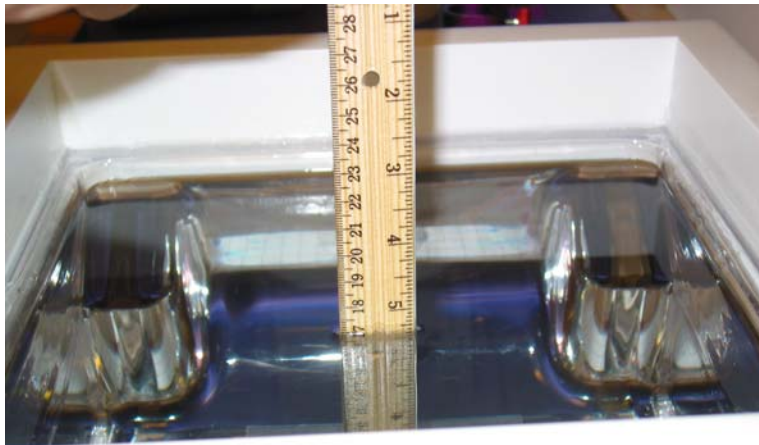

**Body Tissue Depth**





**Bottom Position**



**Front View of Unit**





**Back View of Unit**



**Back View of Unit with Covers Removed**





**RF Modules Location in PC**



**Back View of Battery**



## Appendix D – Probe Calibration Data Sheets



# NCL CALIBRATION LABORATORIES

Calibration File No.: CP-722

Client.: RFEL

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 835 MHz

BODY Calibration

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 215

Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2  
Project No: RFEB-E020CAL-5261

Calibrated: 14<sup>th</sup> February 2007  
Released on: 14<sup>th</sup> February 2007

APREL Laboratories Certified Under Laboratory 48 of SCC

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

**NCL** CALIBRATION LABORATORIES

51 SPECTRUM WAY  
NEPEAN, ONTARIO  
CANADA K2R 1E6

Division of APREL Lab.  
TEL: (613) 820-4988  
FAX: (613) 820-4161



## **Introduction**

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 215.

## **References**

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

## **Conditions**

Probe 215 was a re-calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

**We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.**

-----  
**Stuart Nicol**

-----  
**Jesse Hones**



## **Calibration Results Summary**

<b>Probe Type:</b>	E-Field Probe E-020
<b>Serial Number:</b>	215
<b>Frequency:</b>	835 MHz
<b>Sensor Offset:</b>	1.56 mm
<b>Sensor Length:</b>	2.5 mm
<b>Tip Enclosure:</b>	Ertalyte*
<b>Tip Diameter:</b>	<5 mm
<b>Tip Length:</b>	60 mm
<b>Total Length:</b>	290 mm

\*Resistive to recommended tissue recipes per IEEE-1528

## **Sensitivity in Air**

<b>Channel X:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Y:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Z:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Diode Compression Point:</b>	95 mV



## **Sensitivity in Body Tissue**

**Frequency:** 835 MHz

**Epsilon:** 55.3 (+/-5%)      **Sigma:** 1.08 S/m (+/-10%)

### **ConvF**

**Channel X:** 6.3

**Channel Y:** 6.3

**Channel Z:** 6.3

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.

## **Boundary Effect:**


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.

## **Spatial Resolution:**

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.





## Receiving Pattern 835 MHz (Air)

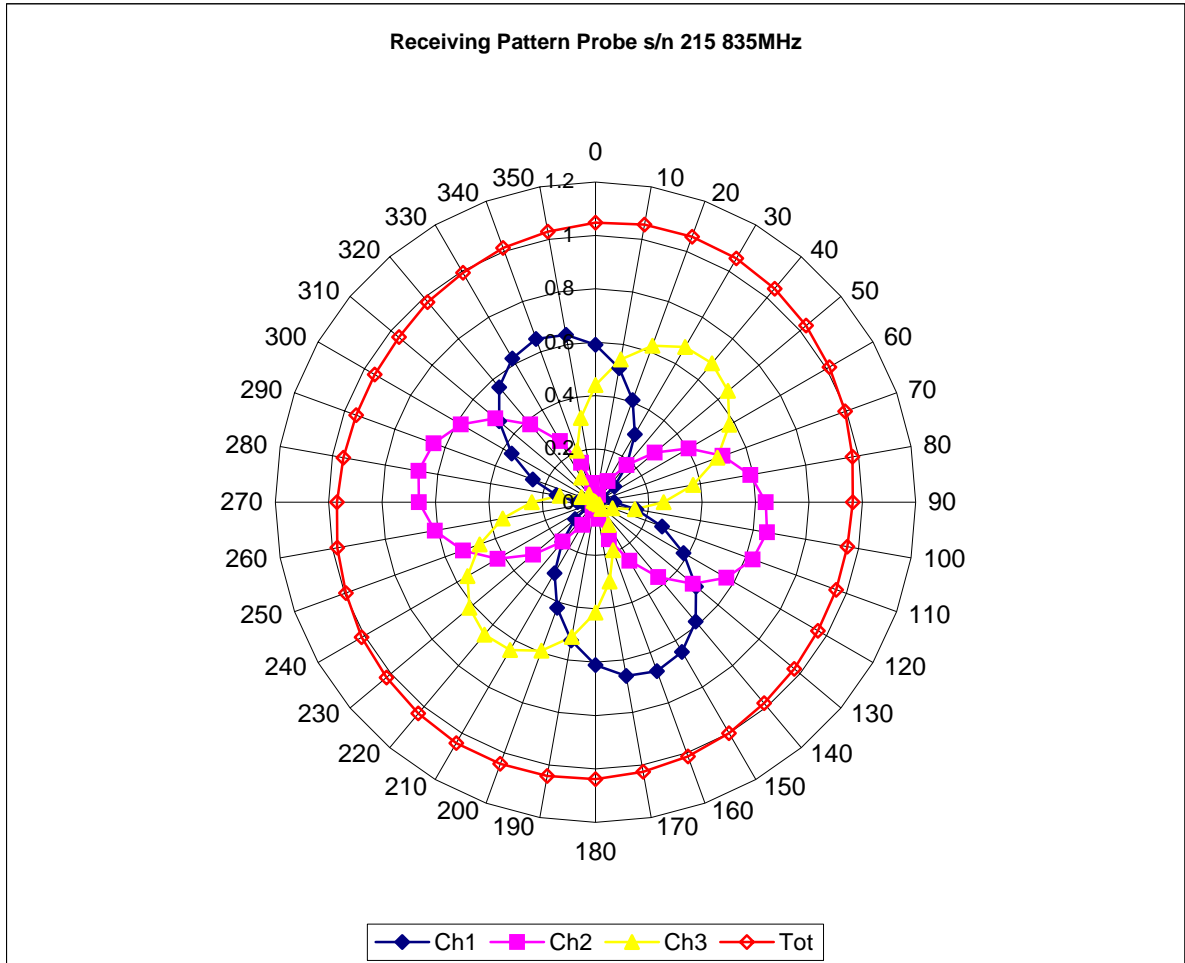



Isotropy Error 835 MHz (Air)

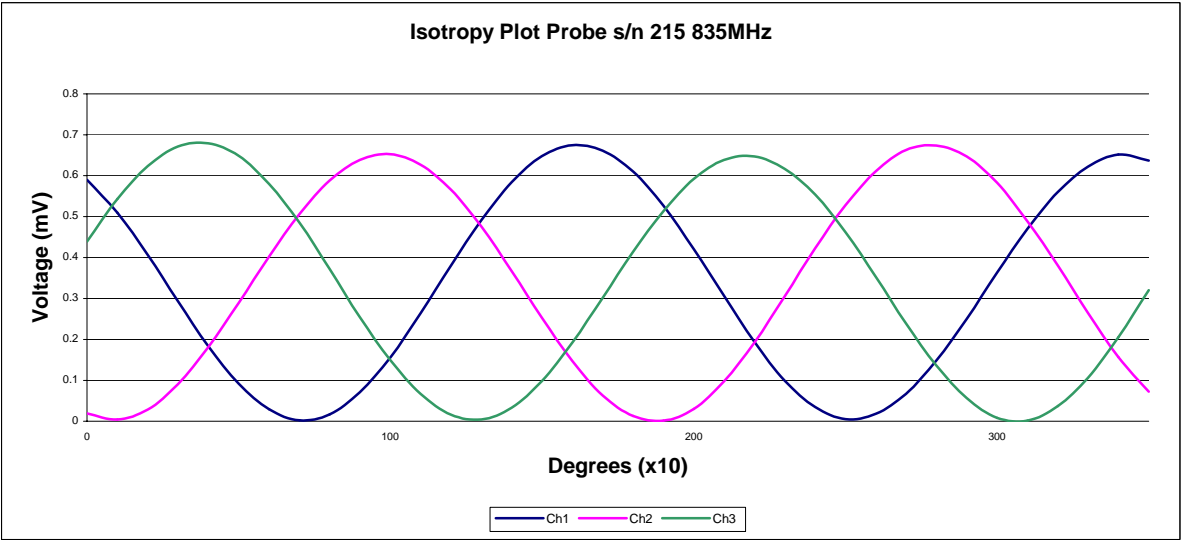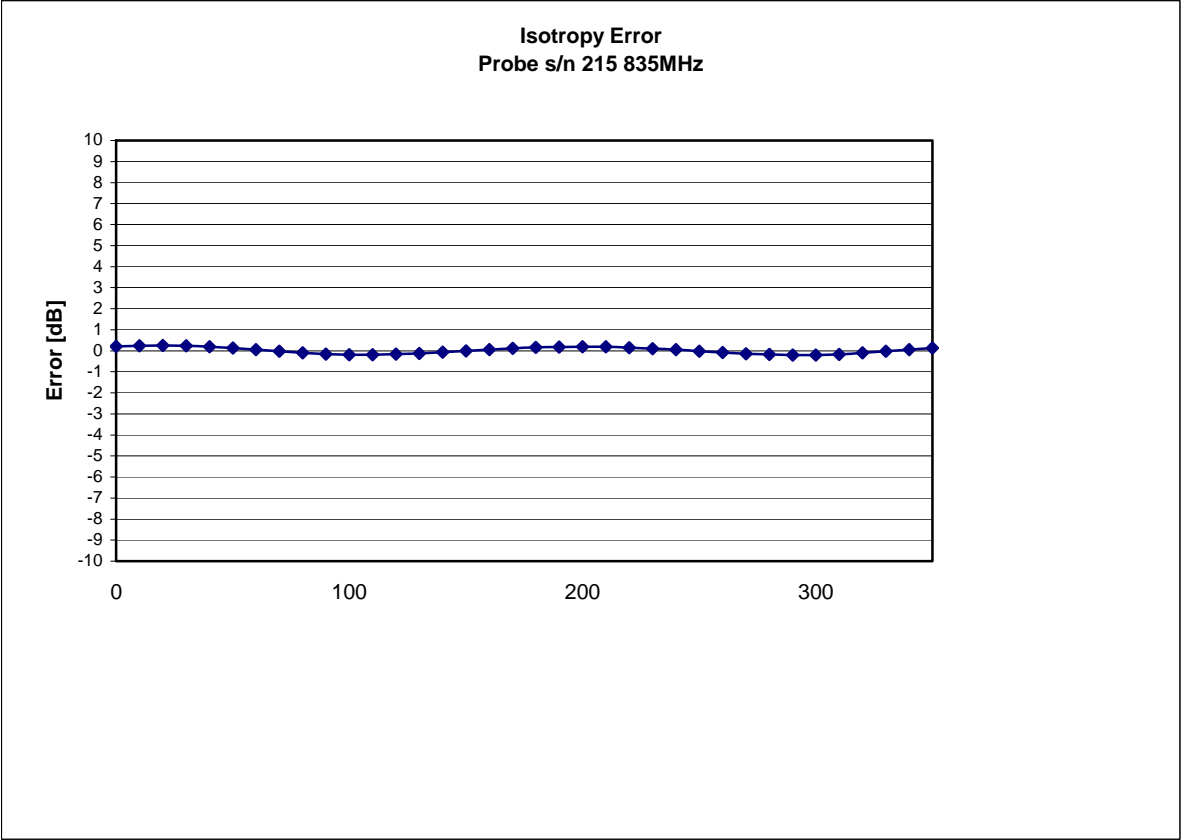


Isotropy Tissue:

0.10 dB




Dynamic Range

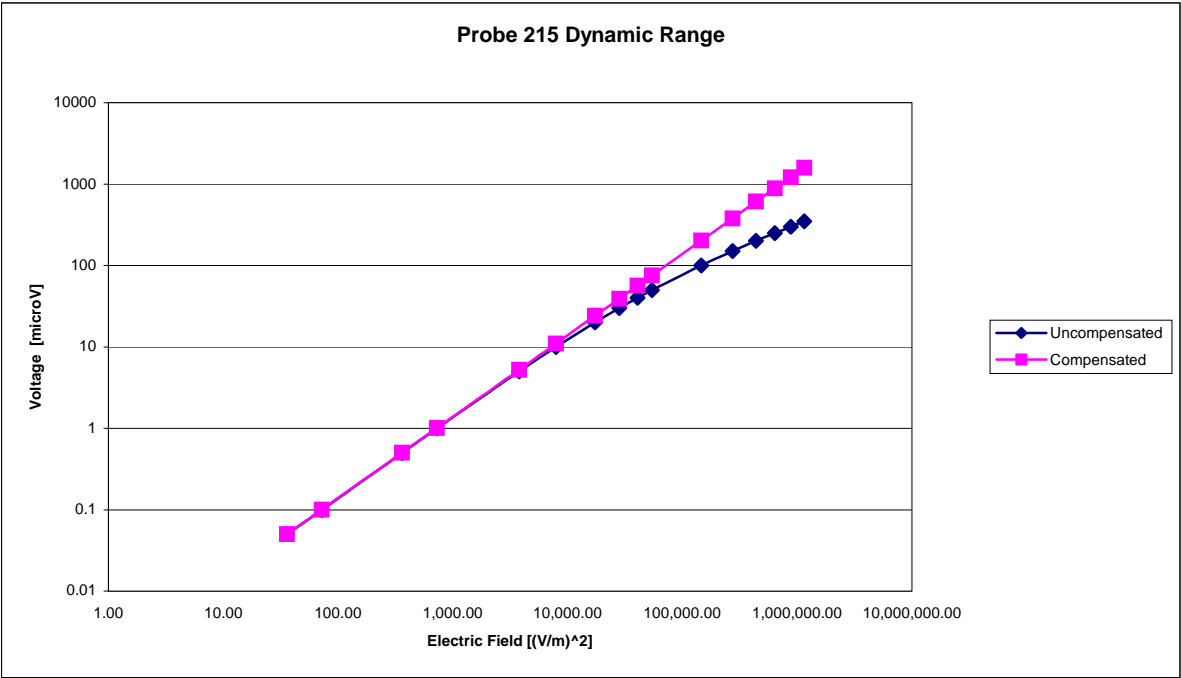



## Video Bandwidth

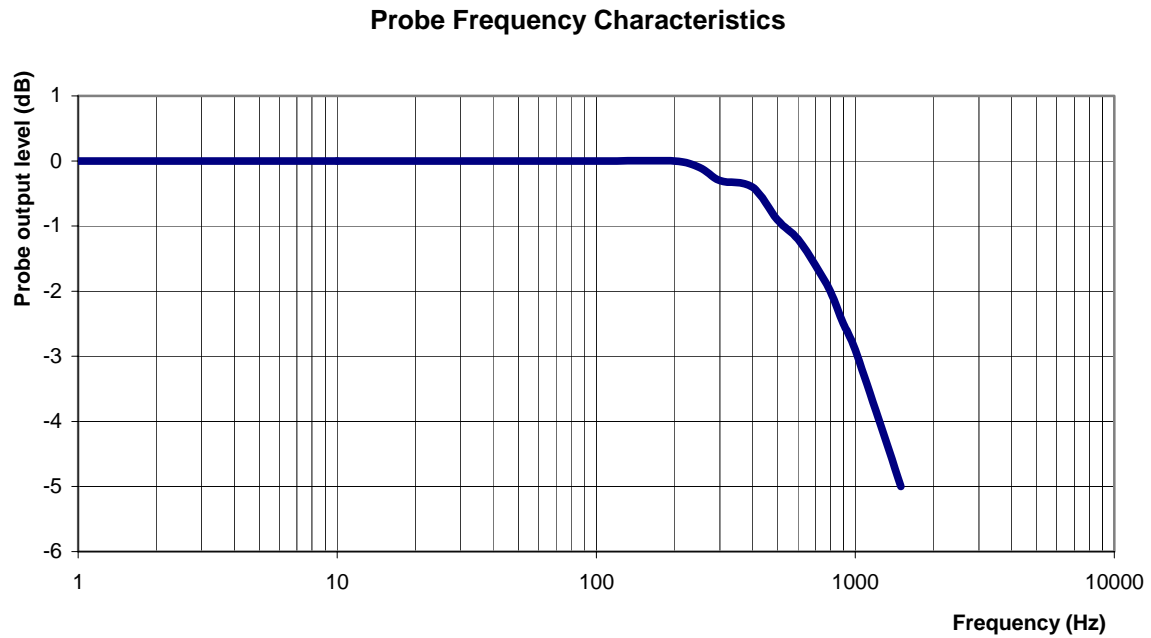

<b>Video Bandwidth at 500 Hz</b>	<b>1 dB</b>
<b>Video Bandwidth at 1.02 KHz:</b>	<b>3 dB</b>



## **Conversion Factor Uncertainty Assessment**

### **Sensitivity in Body Tissue**

**Frequency:** 835 MHz

**Epsilon:** 55.3 (+/-5%)

**Sigma:** 1.08 S/m (+/-10%)

#### **ConvF**

**Channel X:** 6.3 7%(K=2)

**Channel Y:** 6.3 7%(K=2)

**Channel Z:** 6.3 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M $\Omega$ .

#### **Boundary Effect:**

For a distance of 2.5mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.



## **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2006.



# NCL CALIBRATION LABORATORIES

Calibration File No.: CP-724

Client.: RFEL

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 1900 MHz

BODY Calibration

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 215

Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: RFEB-E020CAL-5261

Calibrated: 14<sup>th</sup> February 2007

Released on: 14<sup>th</sup> February 2007

APREL Laboratories Certified Under Laboratory 48 of SCC

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

**NCL** CALIBRATION LABORATORIES

51 SPECTRUM WAY  
NEPEAN, ONTARIO  
CANADA K2R 1E6

Division of APREL Lab.  
TEL: (613) 820-4988  
FAX: (613) 820-4161



## **Introduction**

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 215.

## **References**

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

## **Conditions**

Probe 215 was a re-calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

**We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.**

-----  
**Stuart Nicol**

-----  
**Jesse Hones**



## **Calibration Results Summary**

<b>Probe Type:</b>	E-Field Probe E-020
<b>Serial Number:</b>	215
<b>Frequency:</b>	1900 MHz
<b>Sensor Offset:</b>	1.56 mm
<b>Sensor Length:</b>	2.5 mm
<b>Tip Enclosure:</b>	Ertalyte*
<b>Tip Diameter:</b>	<5 mm
<b>Tip Length:</b>	60 mm
<b>Total Length:</b>	290 mm

\*Resistive to recommended tissue recipes per IEEE-1528

## **Sensitivity in Air**

<b>Channel X:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Y:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Z:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Diode Compression Point:</b>	95 mV



## **Sensitivity in Body Tissue**

**Frequency:** 1900 MHz

**Epsilon:** 55.0 (+/-5%)      **Sigma:** 1.57 S/m (+/-10%)

### **ConvF**

**Channel X:** 5.0

**Channel Y:** 5.0

**Channel Z:** 5.0

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.

## **Boundary Effect:**


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.

## **Spatial Resolution:**

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.





## Receiving Pattern 1900 MHz (Air)

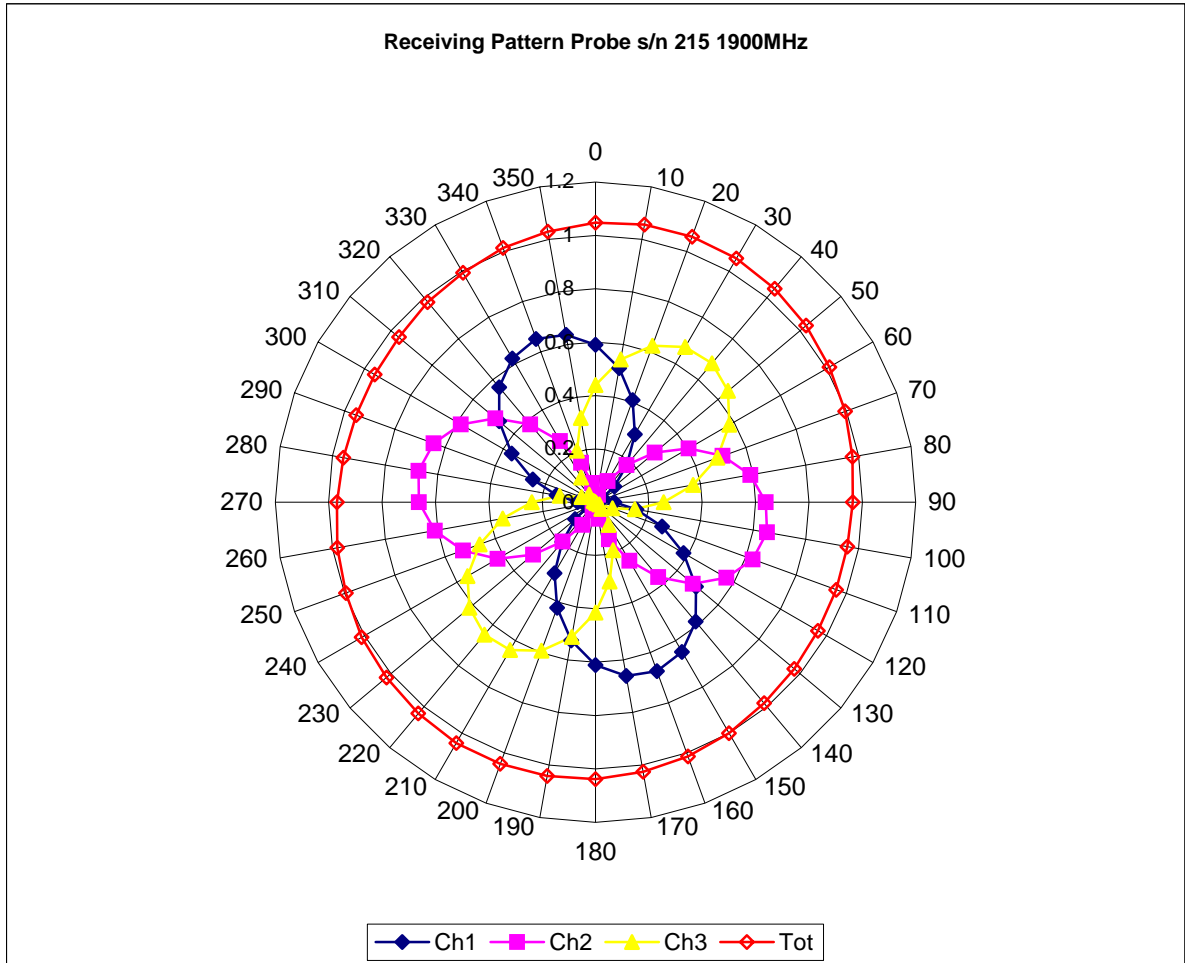



Isotropy Error 1900 MHz (Air)

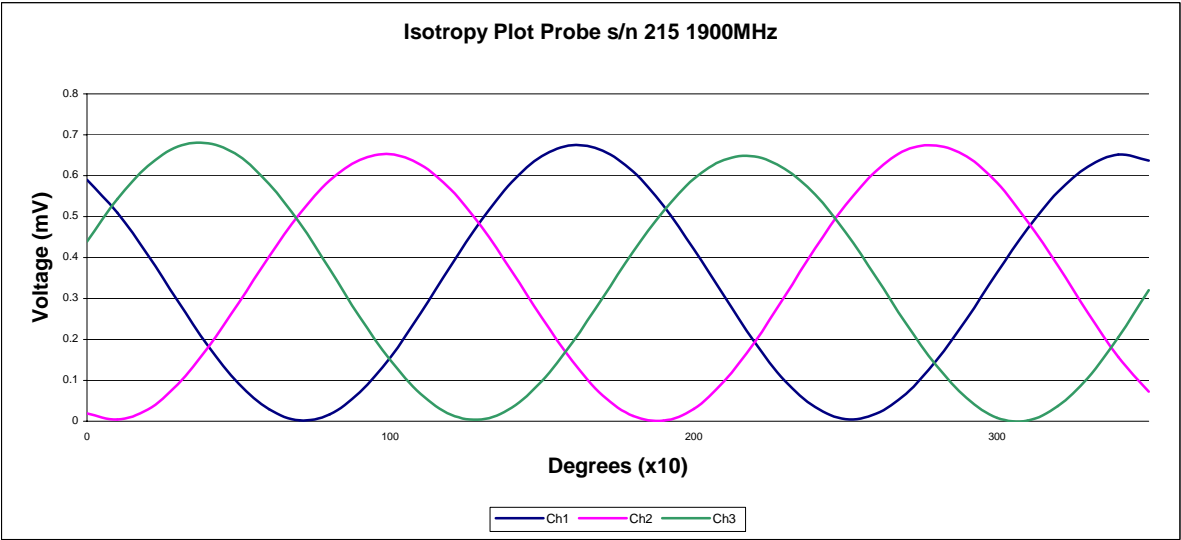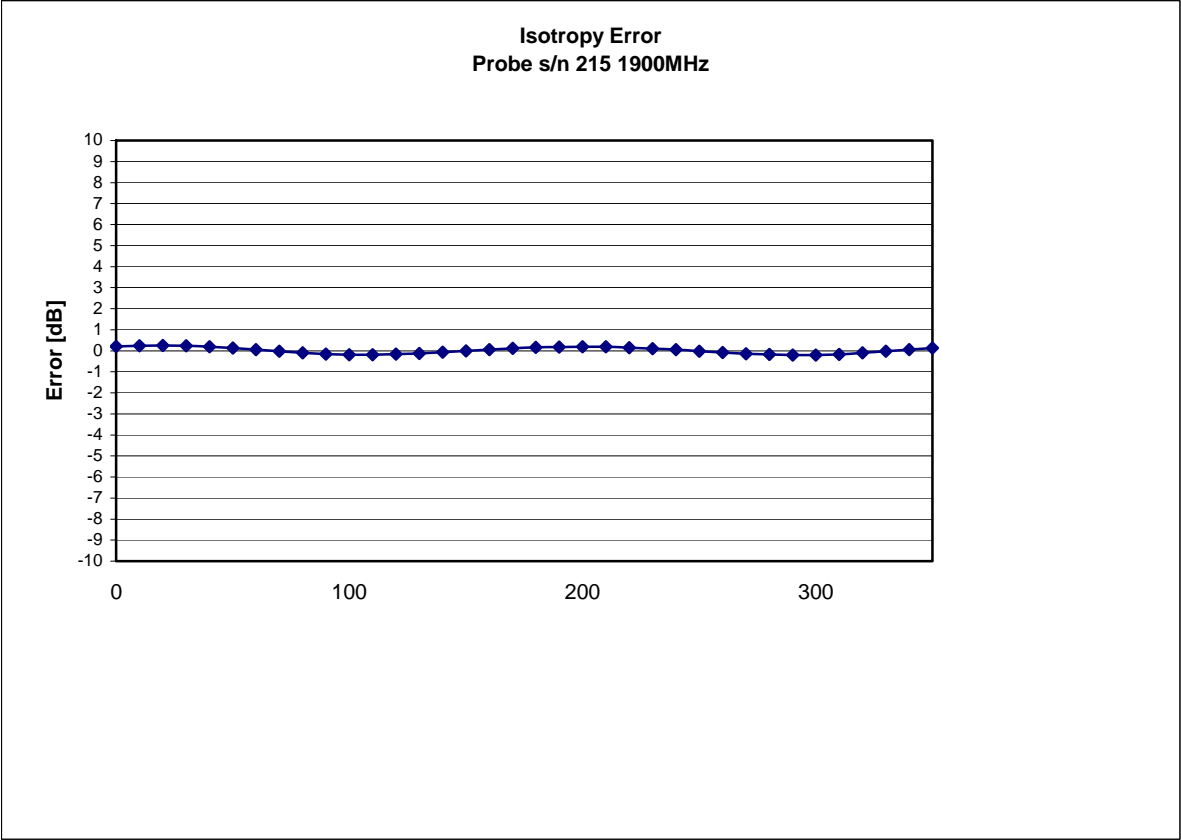


Isotropicity Tissue:

0.10 dB




Dynamic Range

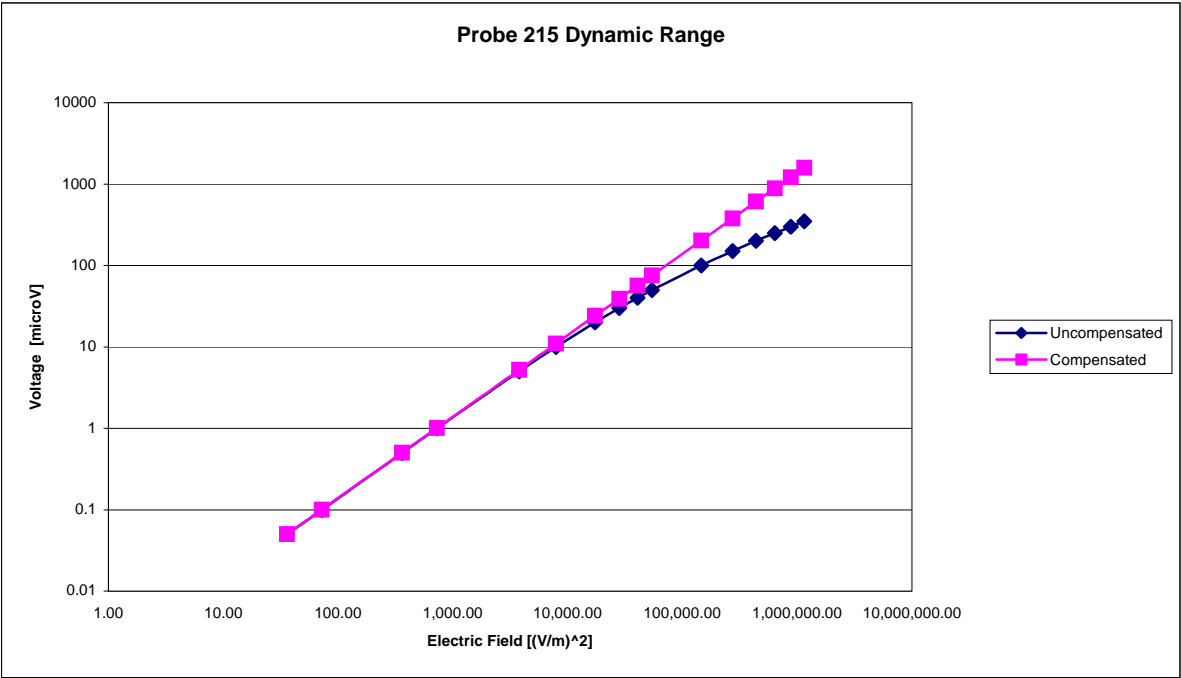



## Video Bandwidth

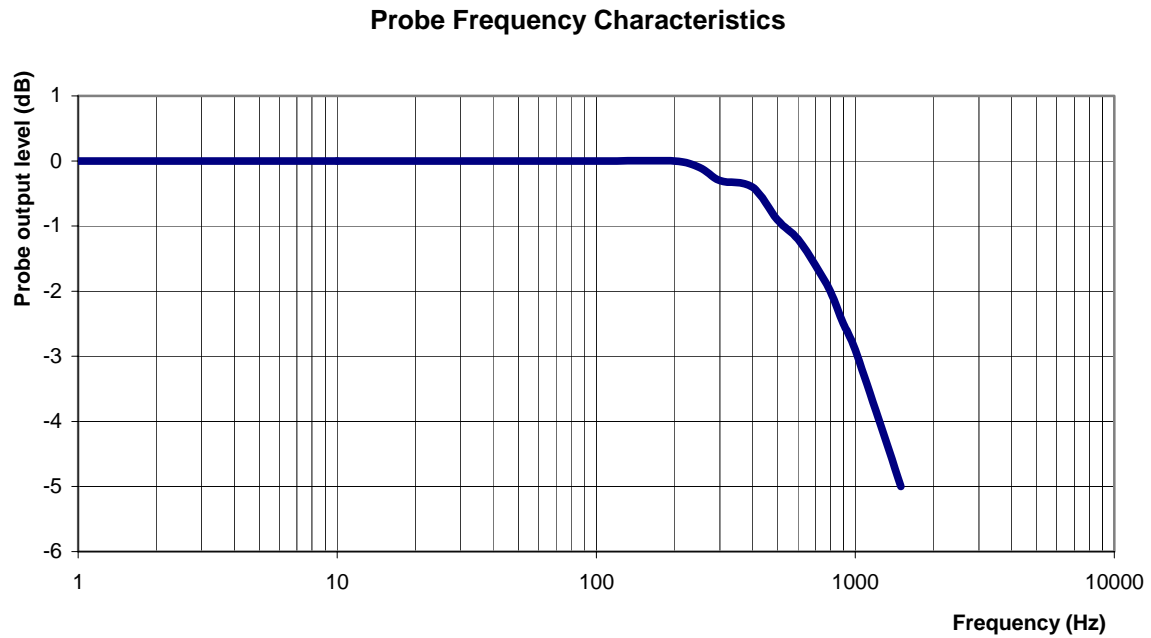

<b>Video Bandwidth at 500 Hz</b>	<b>1 dB</b>
<b>Video Bandwidth at 1.02 KHz:</b>	<b>3 dB</b>



## **Conversion Factor Uncertainty Assessment**

### **Sensitivity in Body Tissue**

**Frequency:** 1900 MHz

**Epsilon:** 55.0 (+/-5%)

**Sigma:** 1.57 S/m (+/-10%)

#### **ConvF**

**Channel X:** 5.0 7%(K=2)

**Channel Y:** 5.0 7%(K=2)

**Channel Z:** 5.0 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M $\Omega$ .

#### **Boundary Effect:**

For a distance of 2.5mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.



## **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2006.



# NCL CALIBRATION LABORATORIES

Calibration File No.: CP-726

Client.: RFEL

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 2450 MHz

Body Calibration

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 215

Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2  
Project No: RFEB-E020CAL-5261

Calibrated: 14<sup>th</sup> February 2007  
Released on: 14<sup>th</sup> February 2007

APREL Laboratories Certified Under Laboratory 48 of SCC

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

**NCL** CALIBRATION LABORATORIES

51 SPECTRUM WAY  
NEPEAN, ONTARIO  
CANADA K2R 1E6

Division of APREL Lab.  
TEL: (613) 820-4988  
FAX: (613) 820-4161



## **Introduction**

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-020 215.

## **References**

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-011 Tissue Calibration Procedure

IEC 62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1 & 2: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"

IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

## **Conditions**

Probe 215 was a re-calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

**We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.**

-----  
**Stuart Nicol**

-----  
**Jesse Hones**



## **Calibration Results Summary**

<b>Probe Type:</b>	E-Field Probe E-020
<b>Serial Number:</b>	215
<b>Frequency:</b>	2450 MHz
<b>Sensor Offset:</b>	1.56 mm
<b>Sensor Length:</b>	2.5 mm
<b>Tip Enclosure:</b>	Ertalyte*
<b>Tip Diameter:</b>	<5 mm
<b>Tip Length:</b>	60 mm
<b>Total Length:</b>	290 mm

\*Resistive to recommended tissue recipes per IEEE-1528

## **Sensitivity in Air**

<b>Channel X:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Y:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Z:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Diode Compression Point:</b>	95 mV



## **Sensitivity in Body Tissue**

**Frequency:** 2450 MHz

**Epsilon:** 52.1 (+/-5%)      **Sigma:** 2.03 S/m (+/-10%)

### **ConvF**

**Channel X:** 4.5

**Channel Y:** 4.5

**Channel Z:** 4.5

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.

## **Boundary Effect:**


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.44mm.

## **Spatial Resolution:**

The measured probe tip diameter is 5 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.





## Receiving Pattern 2450 MHz (Air)

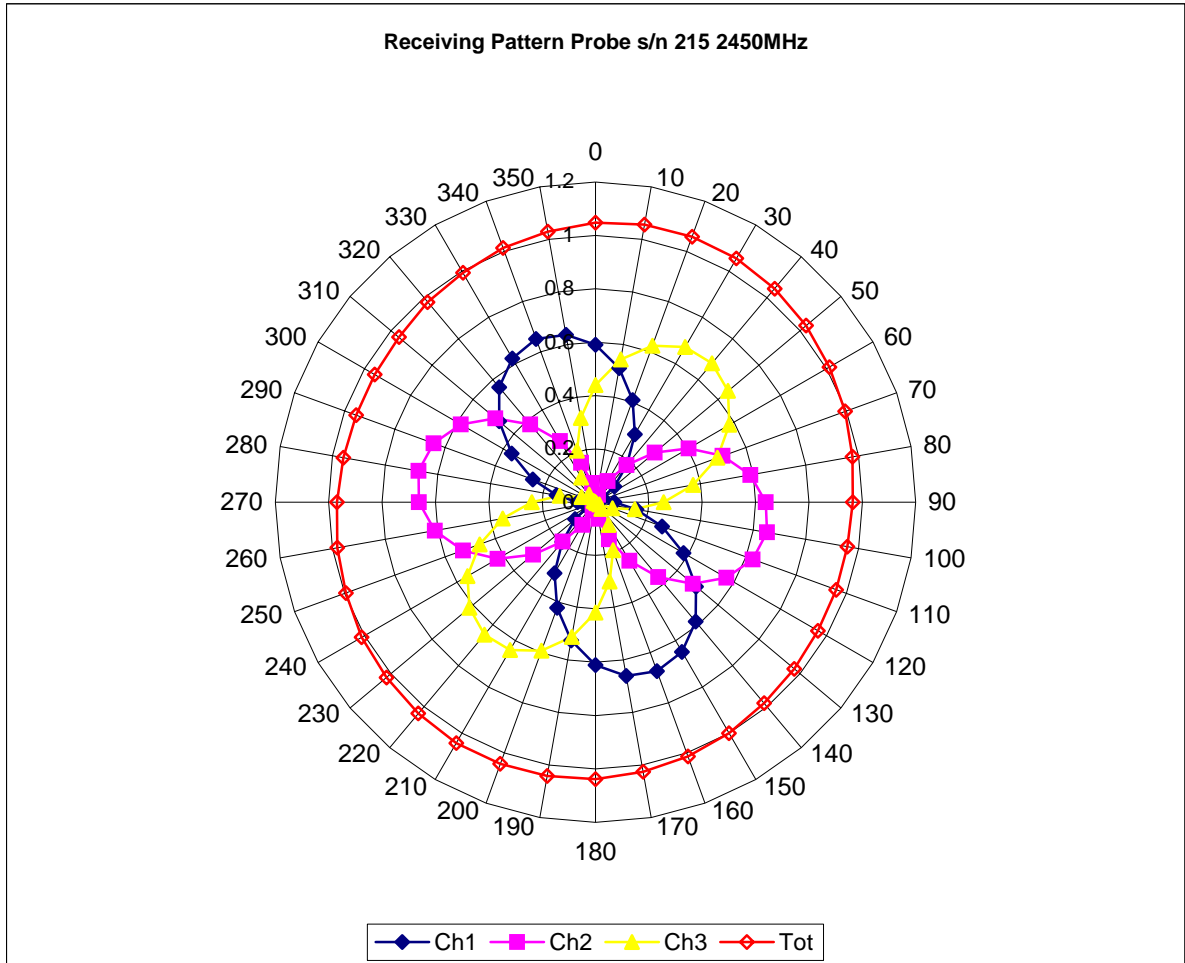



Isotropy Error 2450 MHz (Air)

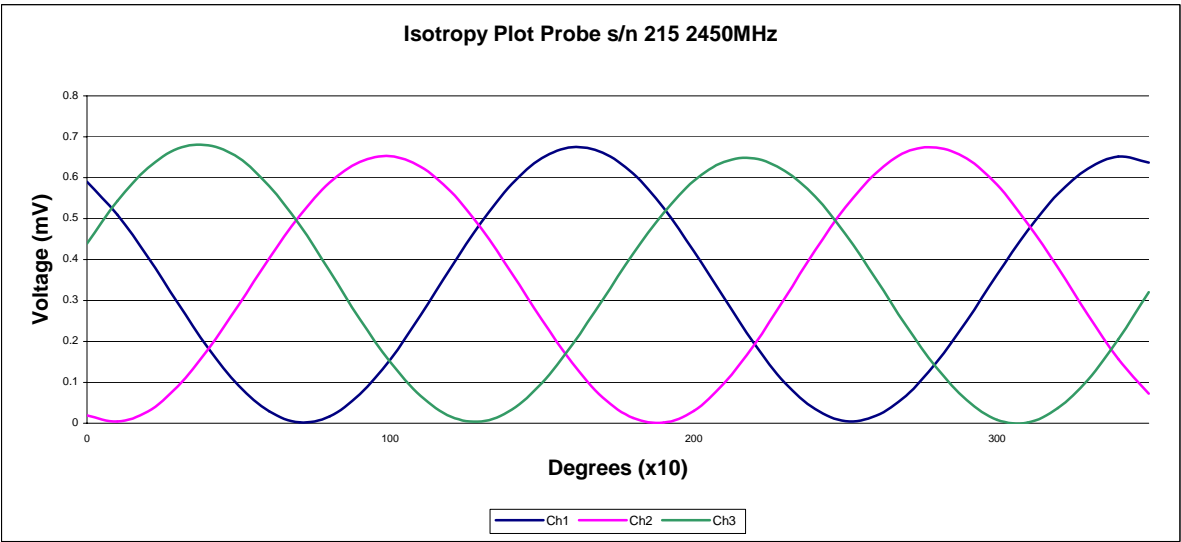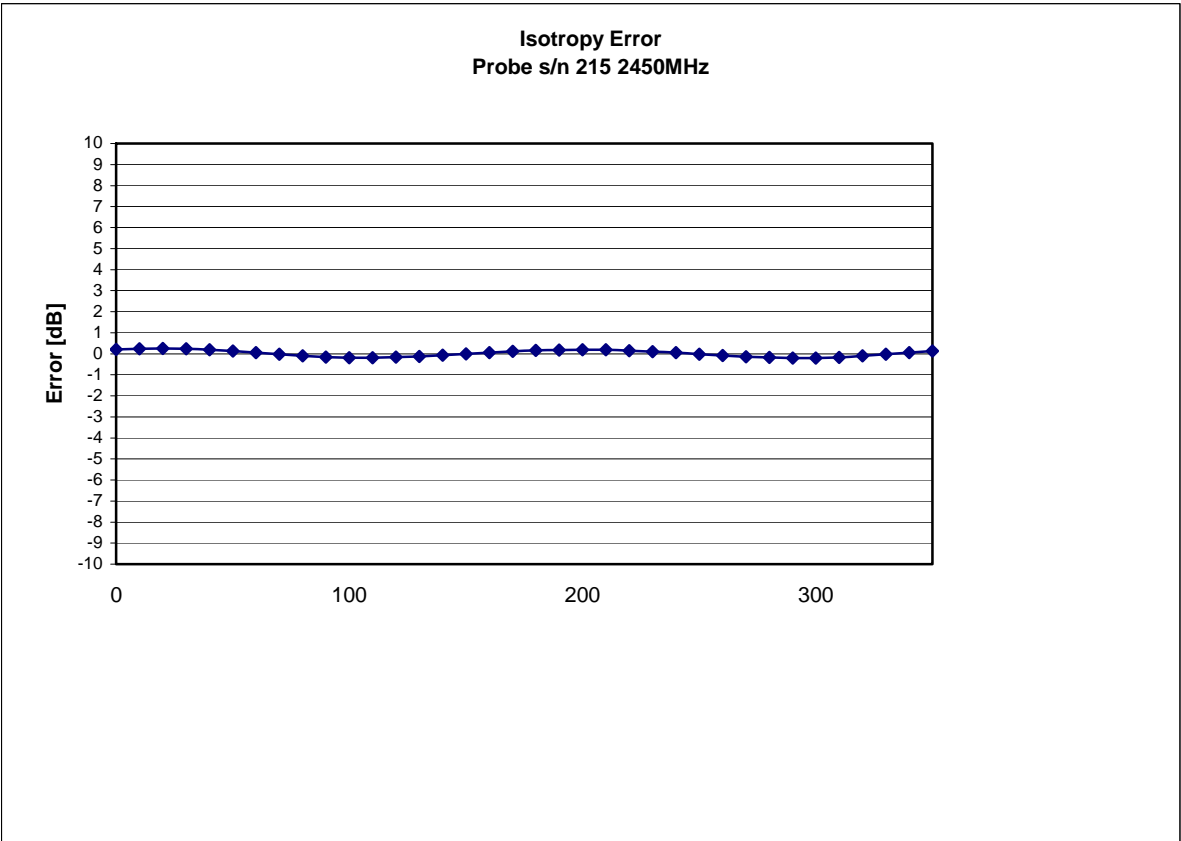


Isotropy Tissue:

0.10 dB




Dynamic Range

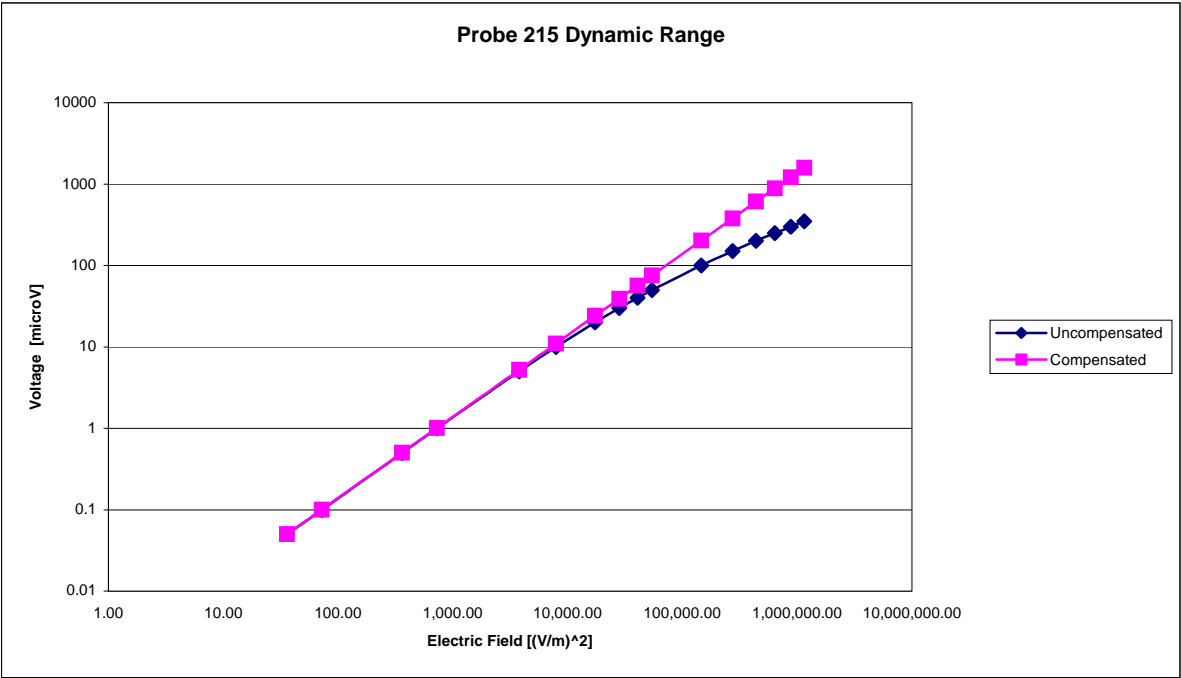



## Video Bandwidth

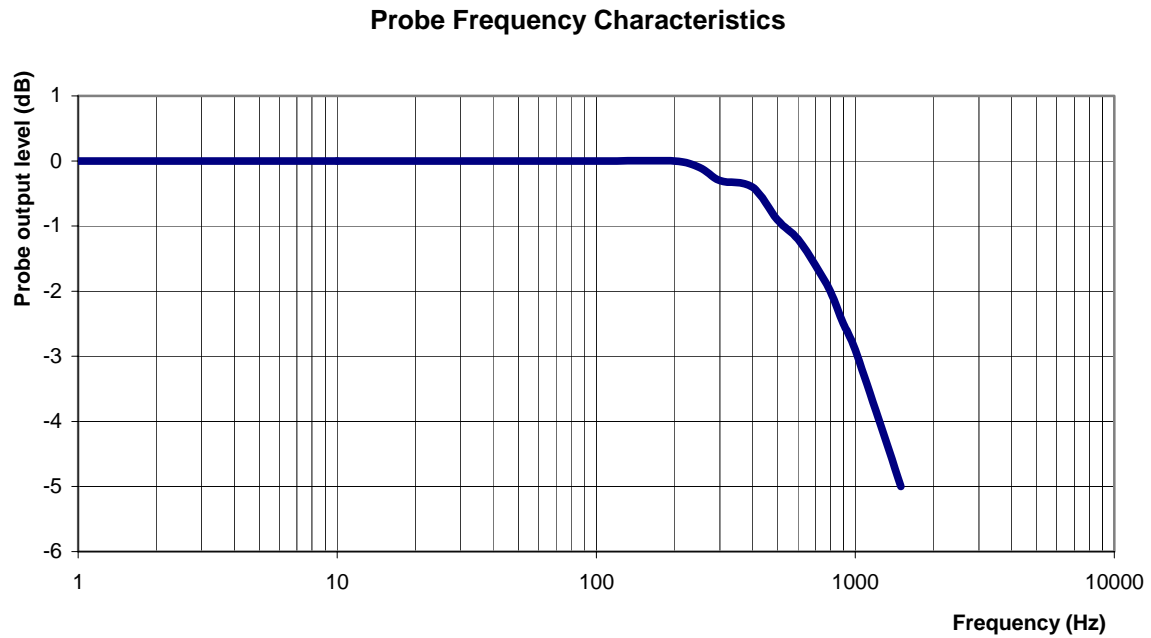

<b>Video Bandwidth at 500 Hz</b>	<b>1 dB</b>
<b>Video Bandwidth at 1.02 KHz:</b>	<b>3 dB</b>



## **Conversion Factor Uncertainty Assessment**

### **Sensitivity in Body Tissue**

**Frequency:** 2450 MHz

**Epsilon:** 52.1 (+/-5%) **Sigma:** 2.03 S/m (+/-10%)

#### **ConvF**

**Channel X:** 4.5 7%(K=2)

**Channel Y:** 4.5 7%(K=2)

**Channel Z:** 4.5 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M $\Omega$ .

#### **Boundary Effect:**

For a distance of 2.5mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.



## **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2006.



# NCL CALIBRATION LABORATORIES

Calibration File No.: CP-752

Client.: APREL

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 5200 MHz

Manufacturer: APREL Laboratories

Model No.: E-030

Serial No.: AL-E3P1

Calibration in Body Tissue


Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: APLB-5200-PC-5264

Calibrated: 29<sup>th</sup> April 2007  
Released on: 30<sup>th</sup> April 2007

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

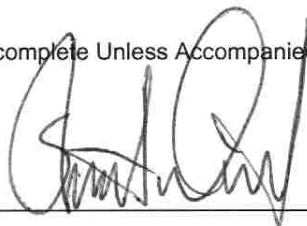

**NCL CALIBRATION LABORATORIES**

17 Bentley Avenue  
NEPEAN, ONTARIO  
CANADA K2E 6T7

Division of APREL Lab.  
TEL: (613) 820-4988  
FAX: (613) 820-4161



## Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-030 AL-E3P1.

## References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure  
IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"  
SSI-TP-011 Tissue Calibration Procedure


## Conditions

Probe AL-E3P1 was a new probe taken from stock prior to calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

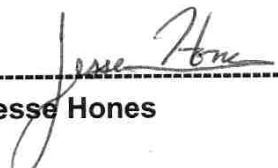  
-----  
**Stuart Nicol**  
-----  
**Jesse Hones**



## **Calibration Results Summary**

<b>Probe Type:</b>	E-Field Probe E-030
<b>Serial Number:</b>	AL-E3P1
<b>Frequency:</b>	5200 MHz
<b>Sensor Offset:</b>	0.56 mm
<b>Sensor Length:</b>	2.5 mm
<b>Tip Enclosure:</b>	Ertalyte*
<b>Tip Diameter:</b>	<3 mm
<b>Tip Length:</b>	60 mm
<b>Total Length:</b>	290 mm

\*Resistive to recommended tissue recipes per IEEE-1528

## **Sensitivity in Air**

<b>Channel X:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Y:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Z:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Diode Compression Point:</b>	95 mV



## **Sensitivity in FCC Body Tissue**

**Frequency:** 5200 MHz

**Epsilon:** 48.9 (+/-10%)      **Sigma:** 5.35 S/m (+/-10%)

### **ConvF**

**Channel X:** 13

**Channel Y:** 13

**Channel Z:** 13

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.

## **Boundary Effect:**


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 0.5mm.

## **Spatial Resolution:**

The measured probe tip diameter is less than 3 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.





## Receiving Pattern 5200 MHz (Air)

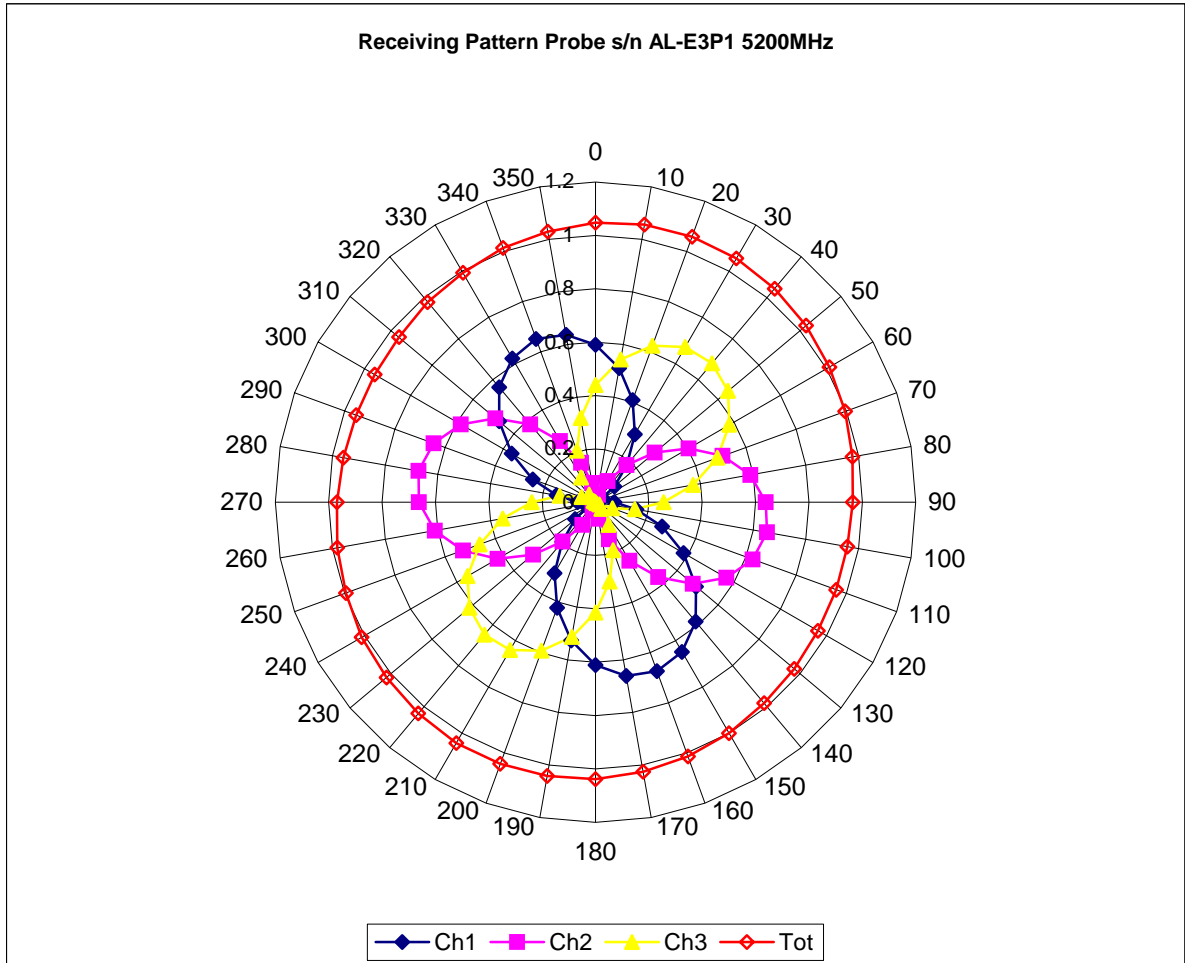



Isotropy Error 5200 MHz (Air)

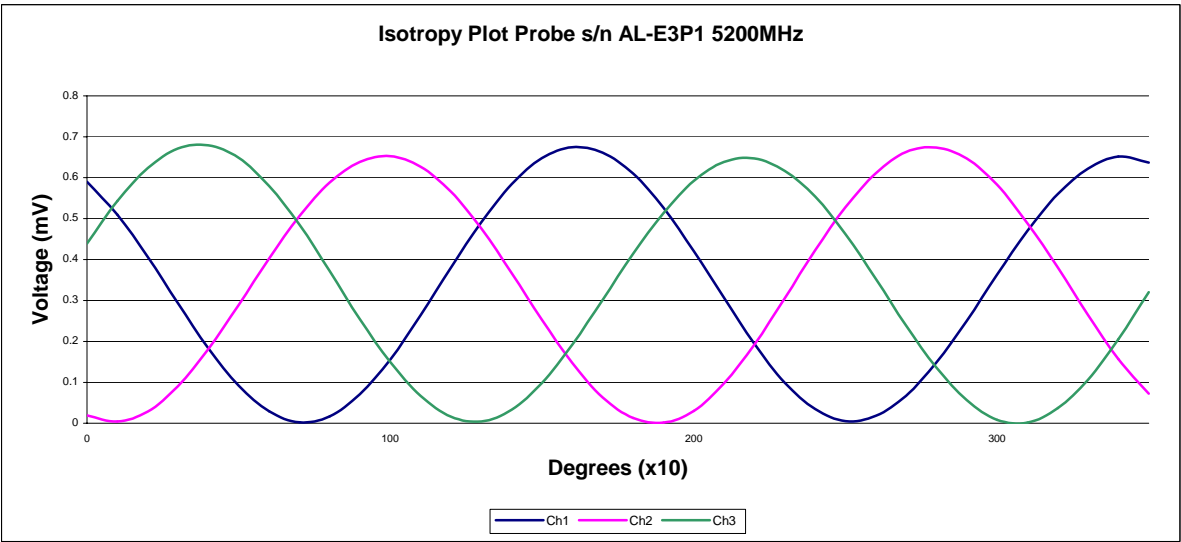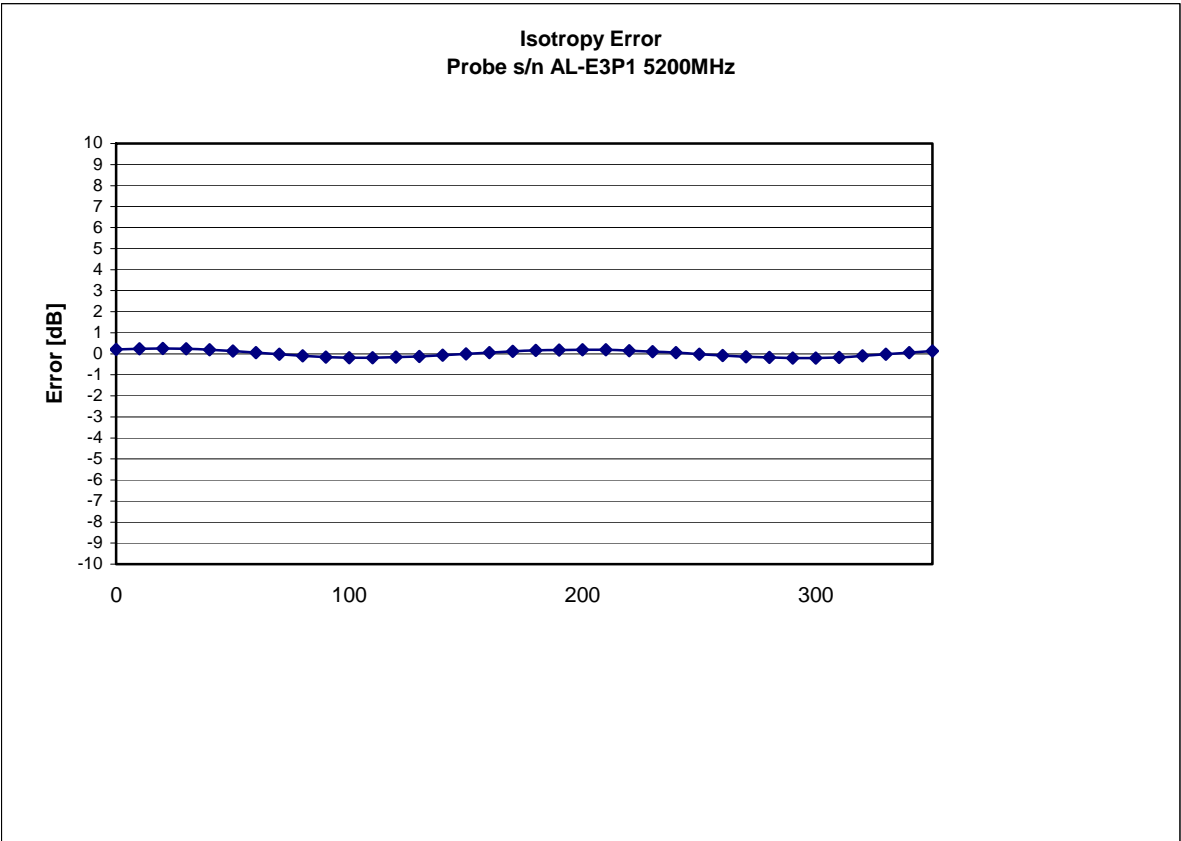


Isotropicity in Tissue:

0.15 dB




Dynamic Range

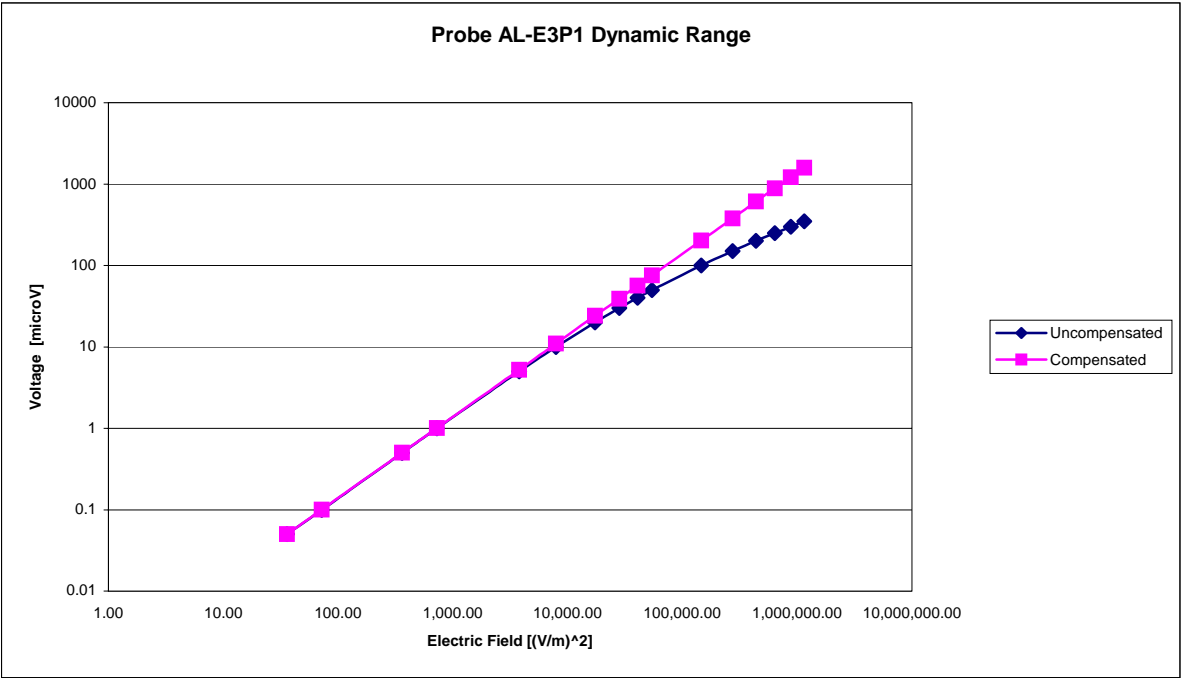



## Video Bandwidth

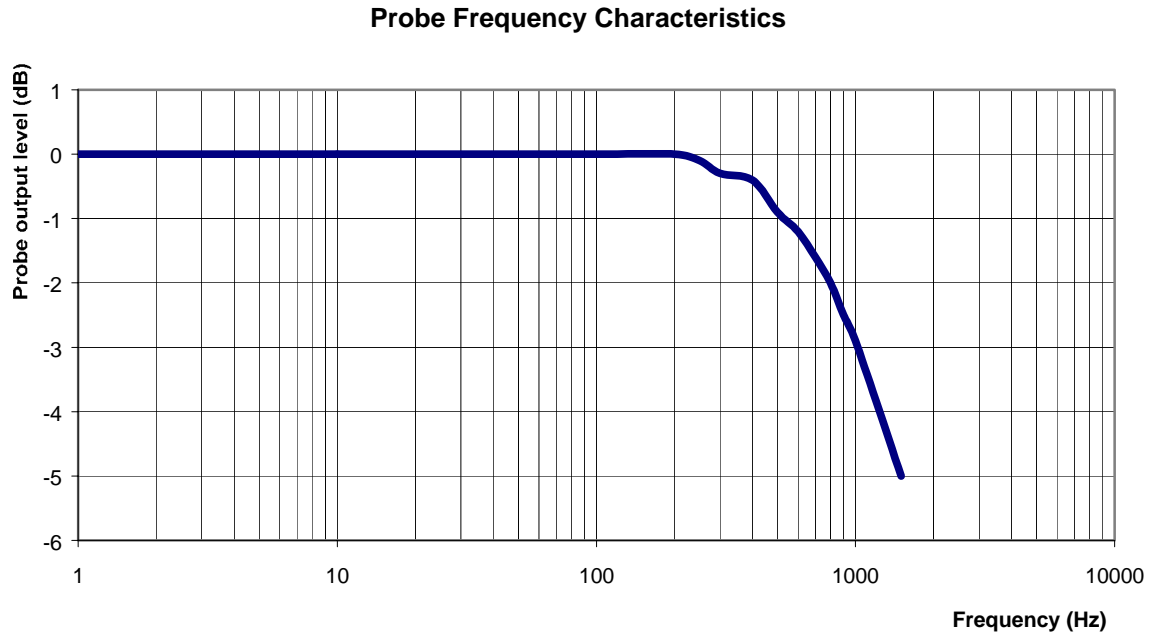

**Video Bandwidth at 500 Hz**                      1 dB  
**Video Bandwidth at 1.02 KHz:**                3 dB



## **Conversion Factor Uncertainty Assessment**

**Frequency:** 5200 MHz

**Epsilon:** 48.9 (+/-10%)

**Sigma:** 5.35 S/m (+/-10%)

### **ConvF**

**Channel X:** 13 7%(K=2)

**Channel Y:** 13 7%(K=2)

**Channel Z:** 13 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

### **Boundary Effect:**

For a distance of 0.5 mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.



## **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2006.



# NCL CALIBRATION LABORATORIES

Calibration File No.: CP-754

Client.: APREL

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 5800 MHz

Manufacturer: APREL Laboratories

Model No.: E-030

Serial No.: AL-E3P1

Calibration in Body Tissue


Calibration Procedure: SSI/DRB-TP-D01-032-E020-V2

Project No: APLB-5800-PC-5264

Calibrated: 30<sup>th</sup> April 2007  
Released on: 30<sup>th</sup> April 2007

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

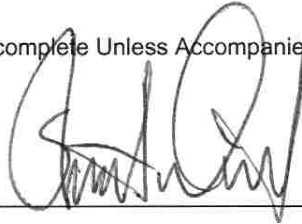

---

**NCL CALIBRATION LABORATORIES**

17 Bentley Avenue  
NEPEAN, ONTARIO  
CANADA K2E 6T7

Division of APREL Lab.  
TEL: (613) 820-4988  
FAX: (613) 820-4161



## Introduction

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-030 AL-E3P1.

## References

SSI/DRB-TP-D01-032-E020-V2 E-Field Probe Calibration Procedure  
IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"  
SSI-TP-011 Tissue Calibration Procedure



## Conditions

Probe AL-E3P1 was a new probe taken from stock prior to calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this probe has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

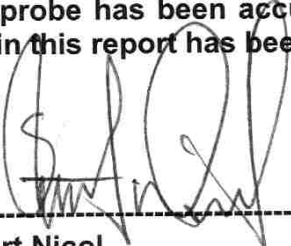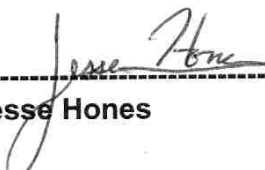  
-----  
**Stuart Nicol**  
-----  
**Jesse Hones**



## **Calibration Results Summary**

<b>Probe Type:</b>	E-Field Probe E-030
<b>Serial Number:</b>	AL-E3P1
<b>Frequency:</b>	5800 MHz
<b>Sensor Offset:</b>	0.56 mm
<b>Sensor Length:</b>	2.5 mm
<b>Tip Enclosure:</b>	Ertalyte*
<b>Tip Diameter:</b>	<3 mm
<b>Tip Length:</b>	60 mm
<b>Total Length:</b>	290 mm

\*Resistive to recommended tissue recipes per IEEE-1528

## **Sensitivity in Air**

<b>Channel X:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Y:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Channel Z:</b>	$1.2 \mu\text{V}/(\text{V}/\text{m})^2$
<b>Diode Compression Point:</b>	95 mV



## **Sensitivity in FCC Body Tissue**

**Frequency:** 5800 MHz

**Epsilon:** 48.2 (+/-10%)      **Sigma:** 6.0 S/m (+/-10%)

### **ConvF**

**Channel X:** 14

**Channel Y:** 14

**Channel Z:** 14

Tissue sensitivity values were calculated using the load impedance of the APREL Laboratories Daq-Paq.

## **Boundary Effect:**


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 0.5mm.

## **Spatial Resolution:**

The measured probe tip diameter is less than 3 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.





## Receiving Pattern 5800 MHz (Air)

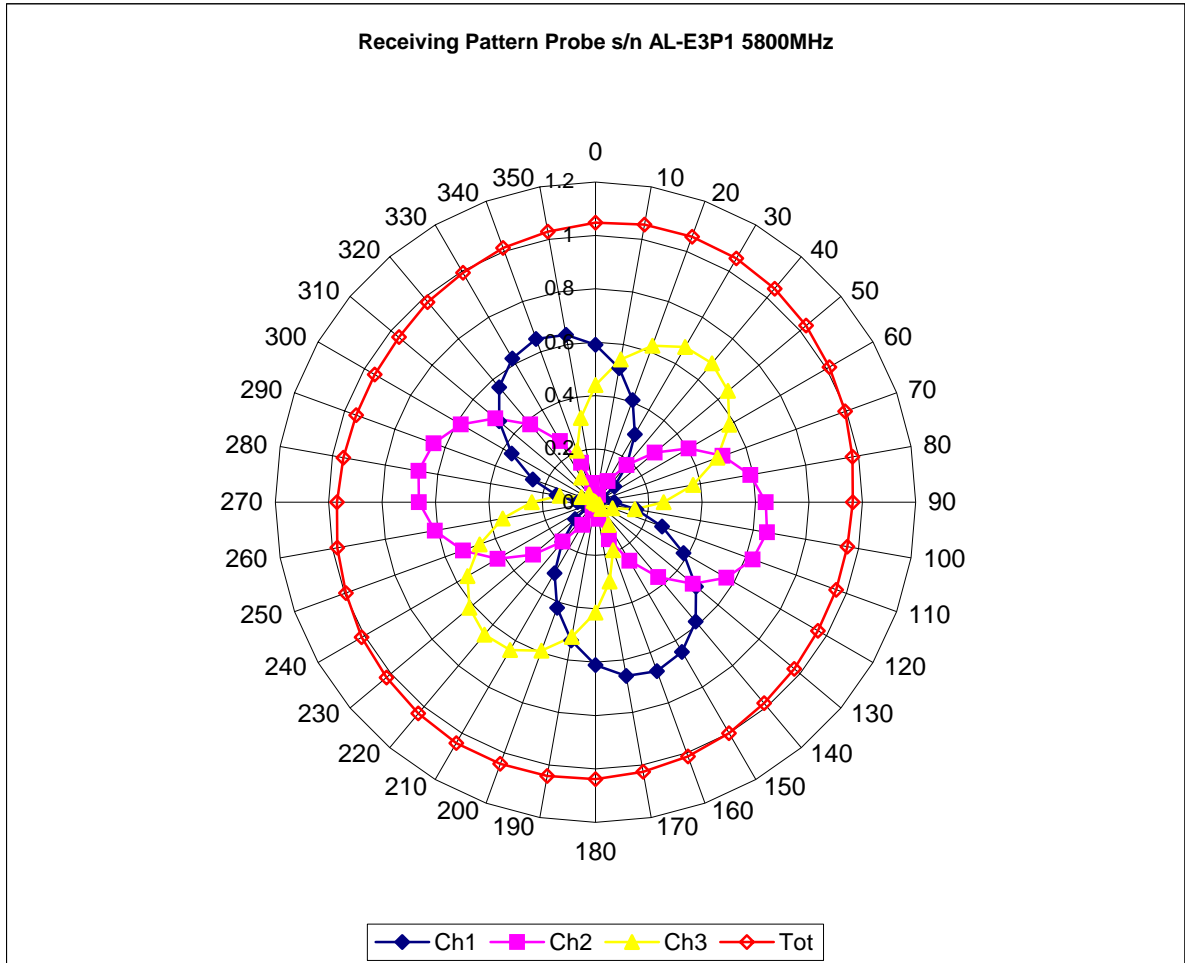



Isotropy Error 5800 MHz (Air)

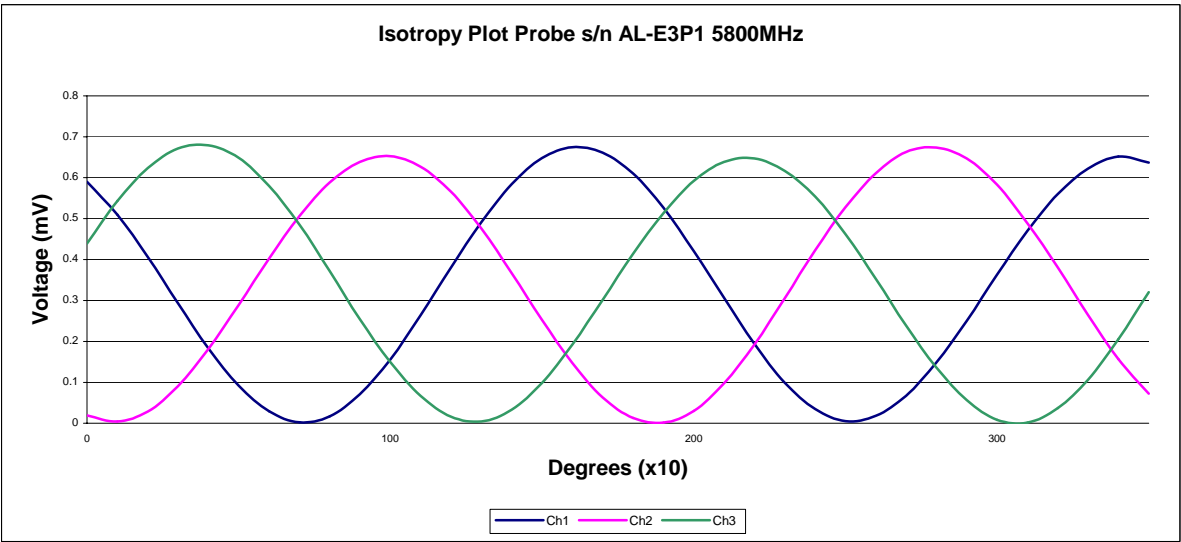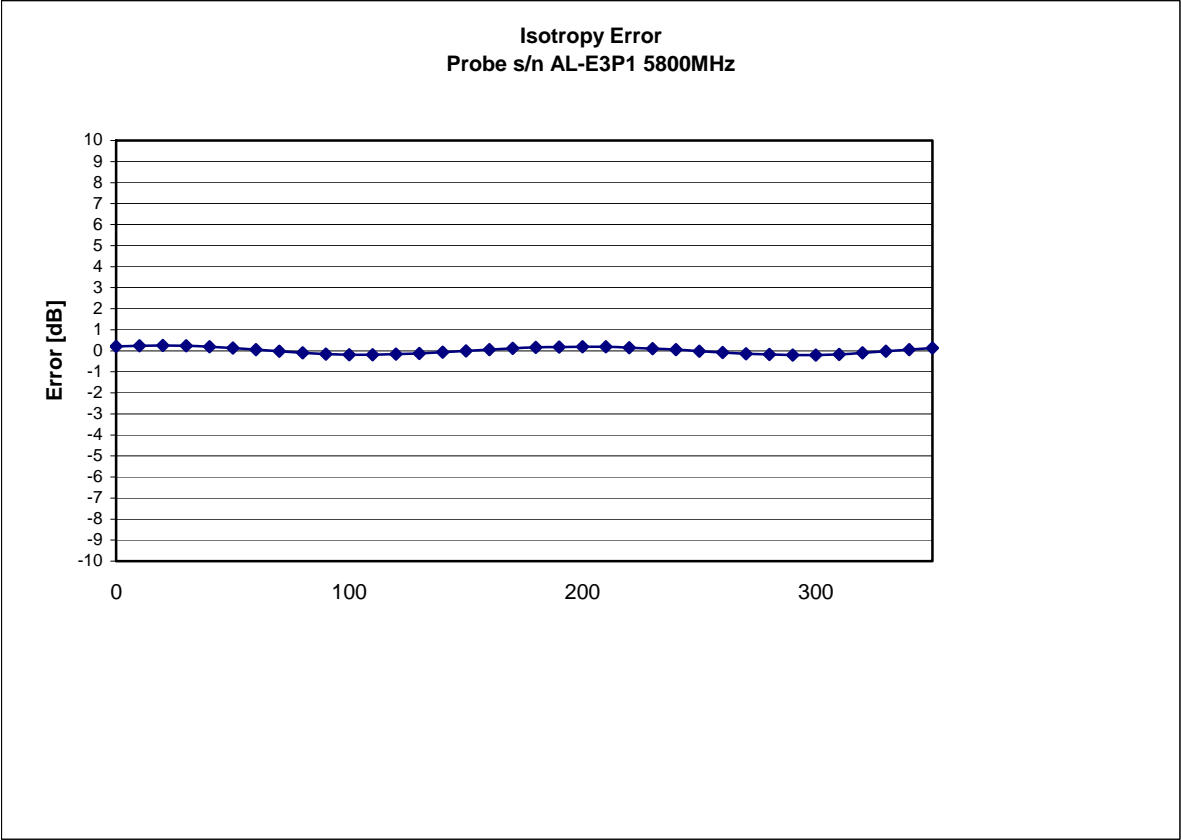


Isotropy in Tissue:

0.15 dB




## Dynamic Range

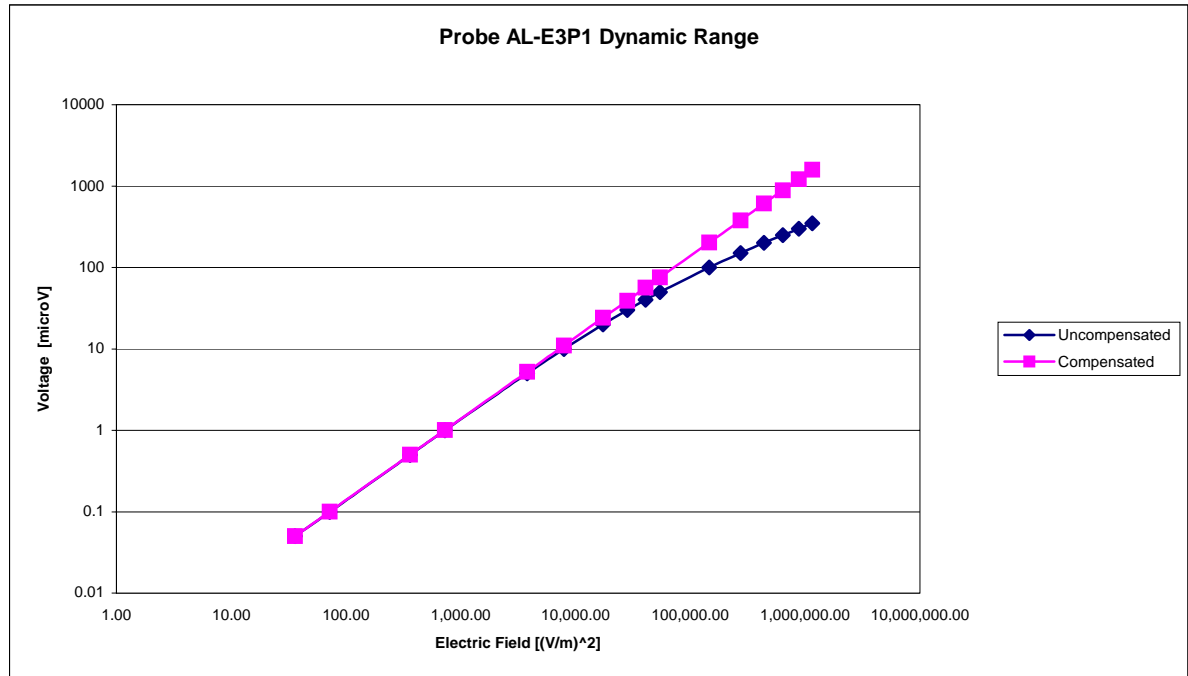



## Video Bandwidth

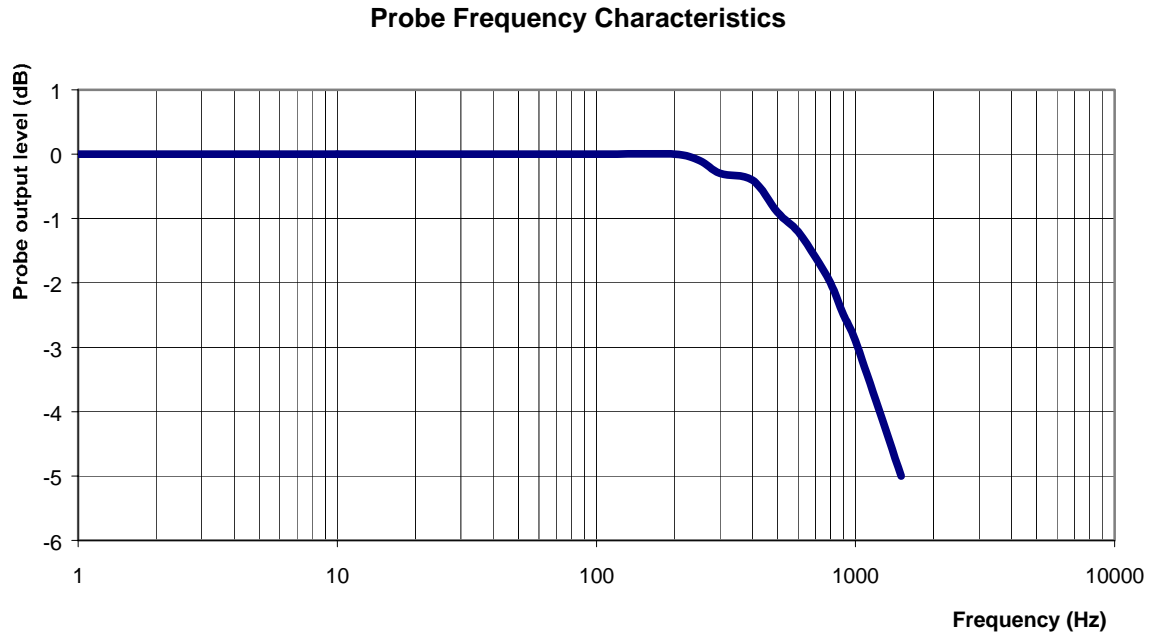

**Video Bandwidth at 500 Hz**                      1 dB  
**Video Bandwidth at 1.02 KHz:**                3 dB



## **Conversion Factor Uncertainty Assessment**

**Frequency:**

5800 MHz

**Epsilon:** 48.4 (+/-10%)

**Sigma:** 6.0 S/m (+/-10%)

**ConvF**

**Channel X:** 14

7%(K=2)

**Channel Y:** 14

7%(K=2)

**Channel Z:** 14

7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

**Boundary Effect:**

For a distance of 0.5 mm the evaluated uncertainty (increase in the probe sensitivity) is less than 2%.



## **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2006.