



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

Applicant Name:
NOVATEL WIRELESS
9645 Scranton Road, Suite 205
San Diego, CA 92121
USA

Date of Testing:
10/29/07 - 11/01/07
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0710241238-R1.NBZ

FCC ID: NBZNRM-MC930D

APPLICANT: NOVATEL WIRELESS

EUT Type: 850/1900 GSM/GPRS/EGPRS Modem
Application Type: Certification
FCC Rule Part(s): §2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
FCC Classification: PCS Licensed Transmitter (PCB)
Model(s): NRM-MC930D
Tx Frequency: 824.20 - 848.80 MHz (Cellular GSM)
1850.20 - 1909.80 MHz (GSM PCS)
Conducted Power: 32.68 dBm GSM / 30.22 dBm PCS
Max. SAR Measurement: 1.11 W/kg Cellular GPRS Body SAR
1.47 W/kg PCS GPRS Body SAR
Test Device Serial No.: Pre-Production [S/N: SAR 1]

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-2005 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

***Note: This Revised Test Report (S/N: 0710241238-R1.NBZ) supersedes and replaces the previously-issued test report on the same subject EUT for the same type of testing as indicated. Please discard or destroy the previously-issues test report (S/N: 0710241238.NBZ) and dispose of it accordingly.**

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez
President



FCC ID: NBZNRM-MC930D		CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 1 of 26

TABLE OF CONTENTS

1	INTRODUCTION	3
2	TEST SITE LOCATION	4
3	SAR MEASUREMENT SETUP	5
4	DASY E-FIELD PROBE SYSTEM	7
5	PROBE CALIBRATION PROCESS	8
6	PHANTOM AND EQUIVALENT TISSUES.....	9
7	DOSIMETRIC ASSESSMENT & PHANTOM SPECS.....	10
8	TEST CONFIGURATION POSITIONS	11
9	ANSI/IEEE C95.1-2005 RF EXPOSURE LIMITS.....	14
10	MEASUREMENT UNCERTAINTIES	15
11	SYSTEM VERIFICATION.....	16
12	SAR DATA SUMMARY	17
13	EQUIPMENT LIST.....	23
14	CONCLUSION.....	24
15	REFERENCES	25

FCC ID: NBZNRM-MC930D	 <small>Complete Wireless Lab</small>	CERTIFICATION REPORT	 <small>NOVATEL WIRELESS</small>	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem	Page 2 of 26	

1 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz[2] and Health Canada RF Exposure Guidelines Safety Code 6 [26]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [3] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

1.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 1-1).

Equation 1-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 3 of 26

3 SAR MEASUREMENT SETUP

3.1 Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure 3-1).

3.2 System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

3.3 System Electronics

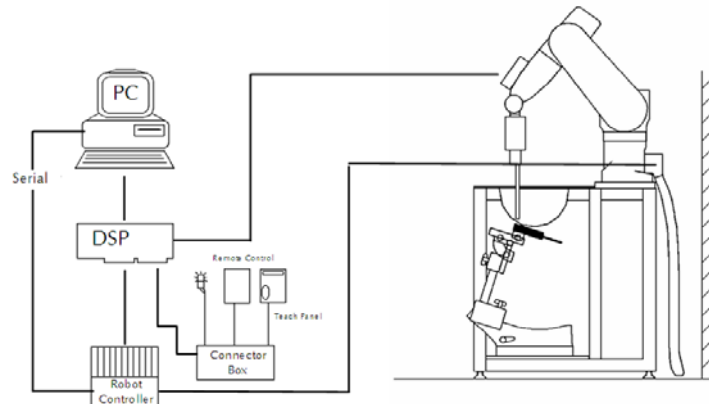




Figure 3-1
SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 5 of 26

3.4 Automated Test System Specifications

Positioner

Robot: Stäubli Unimation Corp. Robot RX60L
 Repeatability: 0.02 mm
 No. of Axes: 6

Data Acquisition Electronic System (DAE)

Cell Controller

Processor: Pentium 4
 Clock Speed: 2.53 GHz
 Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter & control logic
 Software: DASY4, SEMCAD software
 Connecting Lines: Optical Downlink for data and status info
 Optical upload for commands and clock

PC Interface Card



Function: 166MHz low power Pentium MMX 32MB chipdisk
 Link to DAE
 16-bit A/D converter for surface detection system
 Two Serial & Ethernet link to robotics
 Direct emergency stop output for robot

Phantom

Type: SAM Twin Phantom (V4.0)
 Shell Material: Composite
 Thickness: 2.0 ± 0.2 mm



Figure 3-2
DASY4 SAR Measurement System

FCC ID: NBZNRM-MC930D		CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 6 of 26

4.1 Probe Measurement System



Figure 4-1
SAR System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration [7] (see Figure 4-1) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip (see Figure 4-2). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches

maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Figure 5-1). The approach is stopped at reaching the maximum.

4.2 Probe Specifications



Model:	EX3DV4
Frequency Range:	10 MHz – 6.0 GHz
Calibration:	In brain and muscle simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB (30 MHz to 6 GHz)
Dynamic Range:	10 mW/kg – 100 W/kg
Probe Length:	330 mm
Probe Tip Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm
Tip-Center:	1 mm
Application:	SAR Dosimetry Testing Compliance tests of mobile phones



Figure 4-2
Near-Field Probe



Figure 4-3
Triangular Probe Configuration

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 7 of 26

5 PROBE CALIBRATION PROCESS

5.1 Dosimetric Assessment Procedure

Each E-Probe/Probe amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

5.2 Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

5.3 Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- σ = simulated tissue conductivity,
- ρ = Tissue density

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;




Figure 5-1 E-Field and Temperature measurements at 900MHz [7]

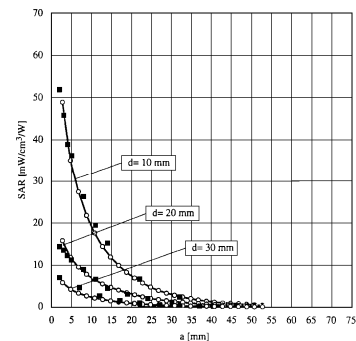




Figure 5-2 E-Field and temperature measurements at 1.9GHz [7]

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 8 of 26

6

PHANTOM AND EQUIVALENT TISSUES

6.1 SAM Phantoms



Figure 6-1
SAM Phantoms

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

6.2 Brain & Muscle Simulating Mixture Characterization

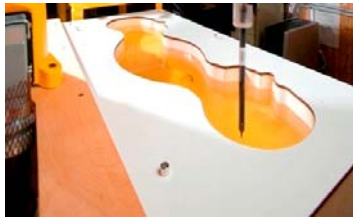


Figure 6-2
Head Simulated



The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 6-1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in IEEE-1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrrove [13].(See Table 6-1)

Table 6-1
Composition of the Brain & Muscle Tissue Equivalent Matter

Frequency (MHz)	300			450			835			900			1450			1800				1900		1950		2000		2100		2450			3000	
Recipe #	1	1	3	1	1	2	3	1	1	2	2	3	1	1	2	2	3	1	2	4	1	1	2	2	3	2	2	2				
Ingredients: (% by weight)																																
1,3-Propanediol								64.81																								
Bactericide	0.19	0.19	0.50	0.10	0.10			0.50										0.50											0.50			
Diaceta			48.90					49.20										49.43												49.75		
DGBE								45.41	47.00	13.84	44.92							44.84	13.84	45.00	50.00	50.00	7.99	7.99					7.99			
HEC	0.98	0.98		1.00	1.00																											
NaCl	5.95	3.95	1.70	1.45	1.48	0.79	1.10	0.67	0.36	0.35	0.18	0.64	0.18	0.35												0.16	0.16		0.16			
Sucrose	55.32	56.32			57.00	56.50																										
Triton X-100															30.45							30.45					19.97	19.97		19.97		
Water	37.56	38.56	48.90	40.45	40.92	34.40	49.20	53.80	52.64	55.36	54.90	49.43	54.90	55.36	55.00	50.00	50.00	55.00	50.00	50.00	50.00	50.00	50.00	71.88	71.88	49.75	71.88		71.88			
Measured dielectric parameters																																
ϵ'_r	46.00	43.4	44.3	41.6	41.2	41.8	42.7	40.9	39.3	41	40.4	39.2	39.9	41	40.1	37	36.8	41.1	40.3	39.2	37.9											
σ (S/m)	0.86	0.87	0.9	0.9	0.98	0.97	0.99	1.21	1.39	1.38	1.4	1.4	1.42	1.38	1.41	1.4	1.51	1.53	1.88	1.82	2.46											
Temp. (°C)	22	22	20	22	22	22	20	22	22	21	22	20	21	20	21	20	22	20	20	20	20	20	20	20	20	20	20	20	20			
Target dielectric parameters (Table 2)																																
ϵ'_r	45.30	43.50	41.5		41.50		40.5						40.0					39.80		39.2		38.5										
σ (S/m)	0.87	0.87	0.9		0.97		1.2						1.4					1.49		1.8		2.4										

NOTE—Multiple columns for any single frequency are optional recipes. Recipe # reference: 1 (Kanda et al. [B85]), 2 (Vignone [B145]), 3 (Peyman and Gabriel [B119]), 4 (Falcovaga et al. [B50]).

*The formulas containing Triton X-100 and corresponding measured parameters are under review and verification.

FCC ID: NBZNR-MC930D		CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 9 of 26

7

DOSIMETRIC ASSESSMENT & PHANTOM SPECS

7.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the phantom was measured at a distance of 3.0mm from the inner surface of the shell. The horizontal grid spacing was 15mm x 15mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Figure 7-1):
 - a. The data at the surface was extrapolated since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in the z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was found with a software algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using 3D-Spline interpolation. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 1, was re-measured to measure drift. If the value drifted by more than 5%, the evaluation was repeated.

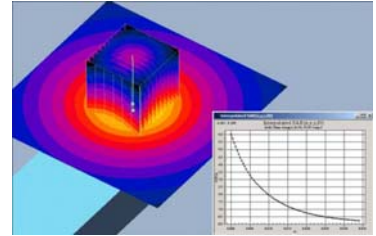




Figure 7-1
Sample SAR Area Scan

7.2 Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Figure 7-2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 7-2
SAM Twin Phantom Shell

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem	Page 10 of 26	

8 TEST CONFIGURATION POSITIONS

8.1 SAR for Notebooks and Lap-touching Devices

Lap-touching devices that have transmitting antennas located less than 20 cm from the lap of the user require routine SAR evaluation. Such devices are considered portable and are capable of being held to the body. Devices are to be setup touching the phantom and are configured with maximum output power during SAR assessment for a worst-case SAR evaluation.



Figure 8-1
Notebook Setup for SAR

8.2 Integral Antenna PCMCIA and CompactFlash Cards

KDB 497522. Integral-antenna PCMCIA and CompactFlash radio cards are common module-like devices meant to be purchased and installed without tools or special skills by consumers. The common host configurations (platforms, categories) are notebook (laptop) computers with PCMCIA slot(s) in the keyboard section, and PDAs (personal digital assistants or palmtop computers). Integral-antenna radio cards installed in PDAs with body-worn and/or held-to-ear configurations, and in all notebook computers, must be evaluated under portable RF exposure conditions per 47 C.F.R. 2.1093(b). To better represent the range of near field topography and environment of various notebook and PDA hosts, SAR evaluation using a minimum of three hosts within each platform type (three PDAs, three notebooks, etc.) is recommended by FCC. Hosts shall be modern, current-market, and expected final installations for the PC Cards.



Figure 8-2
CompactFlash radio card in PDA host configuration

shall be modern, current-market, and expected final installations for the PC Cards.

For notebook computers with multiple card slots (e.g., two stacked), RF exposure should be evaluated with the transmitter installed in the slot(s) producing the highest SAR (See Figure 8-3). The minimum number of positions that should be evaluated for notebook computers and body-worn PDAs are bottom-face in parallel and in contact (0 cm) with flat phantom, and device perpendicular to phantom with recommended spacing of 1.5 cm.



Figure 8-3
PCMCIA Radio Card in a notebook host configuration

8.3 Positioning for Convertible and Slate Tablet Computers



Figure 8-4
Tablet Computer Form Factors






Figure 8-5
Tablet PC Body SAR

KDB 447498. Tablet (notepad) computers are tested in a lap-held position with the bottom of the computer in direct contact against a flat phantom for all user-enabled portrait and landscape positions.

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 11 of 26

8.4 SAR Testing with IEEE 802.11 a/b/g Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.



8.4.1 General Device Setup



Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

8.4.2 Frequency Channel Configurations [22]

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz §15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels. These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

**Table 8-1
802.11 Test Channels per FCC Requirements**

Mode	GHz	Channel	Turbo Channel	“Default Test Channels”			
				§15.247		UNII	
				802.11b	802.11g		
802.11 b/g	2.412	1		√	∇		
	2.437	6		√	∇		
	2.462	11		√	∇		
802.11a	5.18	36				√	
	5.20	40	42 (5.21 GHz)				*
	5.22	44					*
	5.24	48	50 (5.25 GHz)			√	
	5.26	52				√	
	5.28	56	58 (5.29 GHz)				*
	5.30	60					*
	5.32	64				√	
	5.500	100					*
	5.520	104				√	
	5.540	108					*
	5.560	112					*
	5.580	116				√	
	5.600	120	Unknown				*
	5.620	124				√	
	5.640	128					*
	5.660	132					*
	5.680	136				√	
	5.700	140					*
	UNII or §15.247	5.745	149		√		√
5.765		153	152 (5.76 GHz)		*		*
5.785		157		√			*
5.805		161	160 (5.80 GHz)		*	√	*
§15.247	5.825	165		√			

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 12 of 26

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR was measured using TDSO / SO32 with power control bits in the “All Up”

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

8.5 Device Conducted Powers:

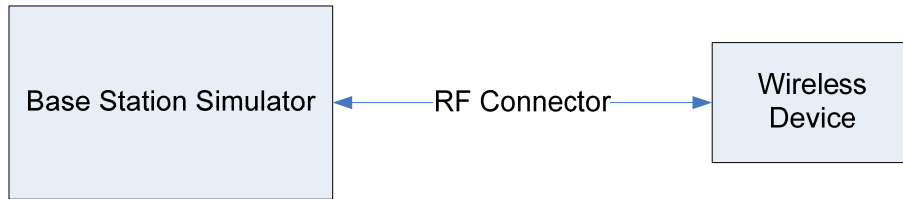




Figure 8-6
Power Measurement Setup

		GPRS RF Maximum Conducted Power				EDGE RF Maximum Conducted Power			
GSM	Channel	GPRS 1 Slot [dBm]	GPRS 2 Slot [dBm]	GPRS 3 Slot [dBm]	GPRS 4 Slot [dBm]	EDGE 1 Slot [dBm]	EDGE 2 Slot [dBm]	EDGE 3 Slot [dbm]	EDGE 4 Slot [dbm]
		128	32.68	32.65	31.51	29.38	27.8	27.83	27.78
	190	32.14	32.58	31.46	29.35	27.75	27.8	27.71	27.61
	251	33.00	32.95	31.31	29.24	27.62	27.63	27.58	27.54
PCS	512	30.22	30.20	30.13	30.10	26.96	26.91	26.92	26.91
	661	29.96	29.93	29.89	29.81	26.65	26.64	26.62	26.62
	810	30.22	30.20	30.10	30.00	26.94	26.99	26.90	26.91

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 13 of 26

9.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



9.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 9-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-2005 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20



- 1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2 The Spatial Average value of the SAR averaged over the whole body.
- 3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 14 of 26

10 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.6	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)	RSS						12.4	12.0	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 15 of 26

11 SYSTEM VERIFICATION

11.1 Tissue Verification

Table 11-1
Measured Tissue Properties

Calibrated Date:	10/29/07		10/29/07		10/29/07		10/29/07	
	835H		835M		1900H		1900M	
	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant	41.50	42.14	55.20	56.89	40.00	41.36	53.30	52.00
Conductivity	0.90	0.92	0.97	0.93	1.40	1.34	1.52	1.58

11.2 Test System Verification

Prior to assessment, the system is verified to $\pm 10\%$ of the specifications at 835 MHz and 1900 MHz by using the system validation kit(s). (Graphic Plots Attached)

Table 11-2
System Verification Results

System Verification TARGET & MEASURED							
Date:	Amb. Temp (°C)	Liquid Temp(°C)	Input Power (W)	Tissue Frequency (Mhz)	Targeted SAR _{1g} (mW)	Measured SAR _{1g} (mW)	Deviation (%)
10/29/07	23.6	21.9	0.25	835	2.29	2.45	6.99%
10/30/07	23.4	21.6	0.25	835	2.29	2.42	5.68%
10/31/07	23.5	21.7	0.1	1900	3.77	4.01	6.37%
11/01/07	23.6	21.8	0.1	1900	3.77	4.05	7.43%

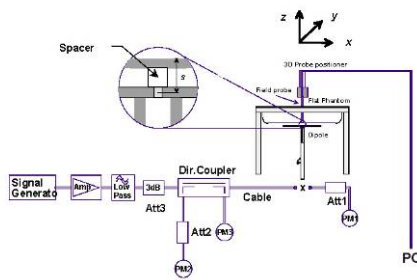




Figure 11-1
System Verification Setup Diagram



Figure 11-2
System Verification Setup Photo

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 16 of 26



12 SAR DATA SUMMARY

12.1 Cellular GSM Body SAR Results with ACER Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
824.20	128	GSM	29.38	29.55	Body	Laptop	GPRS	4x	1.5 cm	ACER	0.804
836.60	190	GSM	29.35	29.32	Body	Laptop	GPRS	4x	1.5 cm	ACER	0.884
848.80	251	GSM	29.24	29.22	Body	Laptop	GPRS	4x	1.5 cm	ACER	0.923
824.20	128	GSM	31.51	31.49	Body	Laptop	GPRS	3x	1.5 cm	ACER	0.946
836.60	190	GSM	31.46	31.39	Body	Laptop	GPRS	3x	1.5 cm	ACER	1.080
848.80	251	GSM	31.31	31.38	Body	Laptop	GPRS	3x	1.5 cm	ACER	1.110
824.20	128	GSM	32.65	32.67	Body	Laptop	GPRS	2x	1.5 cm	ACER	0.814
836.60	190	GSM	32.58	32.72	Body	Laptop	GPRS	2x	1.5 cm	ACER	0.910
848.80	251	GSM	32.95	33.01	Body	Laptop	GPRS	2x	1.5 cm	ACER	0.946
836.60	190	GSM	32.14	32.30	Body	Laptop	GPRS	1x	1.5 cm	ACER	0.542
824.20	128	GSM	27.72	27.87	Body	Laptop	EGPRS	4x	1.5 cm	ACER	0.881
836.60	190	GSM	27.61	27.49	Body	Laptop	EGPRS	4x	1.5 cm	ACER	0.868
848.80	251	GSM	27.54	27.51	Body	Laptop	EGPRS	4x	1.5 cm	ACER	0.912
824.20	128	GSM	27.78	27.73	Body	Laptop	EGPRS	3x	1.5 cm	ACER	0.918
836.60	190	GSM	27.71	27.66	Body	Laptop	EGPRS	3x	1.5 cm	ACER	1.020
848.80	251	GSM	27.58	27.61	Body	Laptop	EGPRS	3x	1.5 cm	ACER	1.090
824.20	128	GSM	27.83	27.83	Body	Laptop	EGPRS	2x	1.5 cm	ACER	0.787
836.60	190	GSM	27.80	27.91	Body	Laptop	EGPRS	2x	1.5 cm	ACER	0.871
848.80	251	GSM	27.63	27.61	Body	Laptop	EGPRS	2x	1.5 cm	ACER	0.943
836.60	190	GSM	27.75	27.84	Body	Laptop	EGPRS	1x	1.5 cm	ACER	0.500
ANSI / IEEE C95.1 2005 - SAFETY LIMIT							Muscle				
Spatial Peak							1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population							averaged over 1 gram				

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. ± 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 17 of 26

12.2 PCS GSM Body SAR Results with ACER Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
1850.20	512	PCS	30.10	30.13	Body	Laptop	GPRS	4x	1.5 cm	ACER	1.420
1880.00	661	PCS	29.81	29.92	Body	Laptop	GPRS	4x	1.5 cm	ACER	1.300
1909.80	810	PCS	30.00	30.03	Body	Laptop	GPRS	4x	1.5 cm	ACER	1.200
1850.20	512	PCS	30.13	29.95	Body	Laptop	GPRS	3x	1.5 cm	ACER	1.080
1880.00	661	PCS	29.89	29.91	Body	Laptop	GPRS	3x	1.5 cm	ACER	0.976
1909.80	810	PCS	30.10	30.28	Body	Laptop	GPRS	3x	1.5 cm	ACER	0.984
1880.00	661	PCS	29.93	29.95	Body	Laptop	GPRS	2x	1.5 cm	ACER	0.673
1880.00	661	PCS	29.96	29.99	Body	Laptop	GPRS	1x	1.5 cm	ACER	0.379
1850.20	512	PCS	26.91	26.89	Body	Laptop	EGPRS	4x	1.5 cm	ACER	1.460
1880.00	661	PCS	26.62	26.65	Body	Laptop	EGPRS	4x	1.5 cm	ACER	1.380
1909.80	810	PCS	26.91	26.92	Body	Laptop	EGPRS	4x	1.5 cm	ACER	1.280
1850.20	512	PCS	26.92	27.06	Body	Laptop	EGPRS	3x	1.5 cm	ACER	0.998
1880.00	661	PCS	26.62	26.64	Body	Laptop	EGPRS	3x	1.5 cm	ACER	1.070
1909.80	810	PCS	26.90	27.01	Body	Laptop	EGPRS	3x	1.5 cm	ACER	0.988
1880.00	661	PCS	26.64	26.62	Body	Laptop	EGPRS	2x	1.5 cm	ACER	0.731
1880.00	661	PCS	26.65	26.74	Body	Laptop	EGPRS	1x	1.5 cm	ACER	0.375
ANSI / IEEE C95.1 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram					

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 18 of 26

12.3 Cellular GSM Body SAR Results with TOSHIBA Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
836.60	190	GSM	29.35	29.42	Body	Laptop	GPRS	4x	1.5 cm	Toshiba	0.677
836.60	190	GSM	31.46	31.53	Body	Laptop	GPRS	3x	1.5 cm	Toshiba	0.783
836.60	190	GSM	32.58	32.64	Body	Laptop	GPRS	2x	1.5 cm	Toshiba	0.670
836.60	190	GSM	32.14	32.23	Body	Laptop	GPRS	1x	1.5 cm	Toshiba	0.396
836.60	190	GSM	27.61	27.77	Body	Laptop	EGPRS	4x	1.5 cm	Toshiba	0.636
836.60	190	GSM	27.71	27.55	Body	Laptop	EGPRS	3x	1.5 cm	Toshiba	0.762
836.60	190	GSM	27.80	27.91	Body	Laptop	EGPRS	2x	1.5 cm	Toshiba	0.628
836.60	190	GSM	27.75	27.95	Body	Laptop	EGPRS	1x	1.5 cm	Toshiba	0.377
ANSI / IEEE C95.1 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 19 of 26

12.4 PCS GSM Body SAR Results with TOSHIBA Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
1850.20	512	PCS	30.10	30.13	Body	Laptop	GPRS	4x	1.5 cm	Toshiba	1.450
1880.00	661	PCS	29.81	29.84	Body	Laptop	GPRS	4x	1.5 cm	Toshiba	1.440
1909.80	810	PCS	30.00	30.04	Body	Laptop	GPRS	4x	1.5 cm	Toshiba	1.470
1850.20	512	PCS	30.13	30.15	Body	Laptop	GPRS	3x	1.5 cm	Toshiba	1.210
1880.00	661	PCS	29.89	29.90	Body	Laptop	GPRS	3x	1.5 cm	Toshiba	1.160
1909.80	810	PCS	30.10	30.06	Body	Laptop	GPRS	3x	1.5 cm	Toshiba	1.150
1850.20	512	PCS	30.20	30.25	Body	Laptop	GPRS	2x	1.5 cm	Toshiba	0.928
1880.00	661	PCS	29.93	29.95	Body	Laptop	GPRS	2x	1.5 cm	Toshiba	0.826
1909.80	810	PCS	30.20	30.20	Body	Laptop	GPRS	2x	1.5 cm	Toshiba	0.770
1880.00	661	PCS	29.96	29.92	Body	Laptop	GPRS	1x	1.5 cm	Toshiba	0.411
1850.20	512	PCS	26.91	27.10	Body	Laptop	EGPRS	4x	1.5 cm	Toshiba	1.430
1880.00	661	PCS	26.62	26.54	Body	Laptop	EGPRS	4x	1.5 cm	Toshiba	1.420
1909.80	810	PCS	26.91	26.86	Body	Laptop	EGPRS	4x	1.5 cm	Toshiba	1.450
1850.20	512	PCS	26.92	26.97	Body	Laptop	EGPRS	3x	1.5 cm	Toshiba	1.230
1880.00	661	PCS	26.62	26.69	Body	Laptop	EGPRS	3x	1.5 cm	Toshiba	1.080
1909.80	810	PCS	26.90	26.88	Body	Laptop	EGPRS	3x	1.5 cm	Toshiba	1.050
1850.20	512	PCS	26.91	26.96	Body	Laptop	EGPRS	2x	1.5 cm	Toshiba	0.846
1880.00	661	PCS	26.64	26.71	Body	Laptop	EGPRS	2x	1.5 cm	Toshiba	0.741
1909.80	810	PCS	26.99	27.02	Body	Laptop	EGPRS	2x	1.5 cm	Toshiba	0.709
1880.00	661	PCS	26.65	26.84	Body	Laptop	EGPRS	1x	1.5 cm	Toshiba	0.380
ANSI / IEEE C95.1 2005 - SAFETY LIMIT						Brain					
Spatial Peak						1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population						averaged over 1 gram					

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 20 of 26

12.5 Cellular GSM Body SAR Results with HP Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
836.60	190	GSM	29.35	29.42	Body	Laptop	GPRS	4x	2.5 cm	HP	0.291
836.60	190	GSM	31.46	31.52	Body	Laptop	GPRS	3x	2.5 cm	HP	0.355
836.60	190	GSM	32.58	32.70	Body	Laptop	GPRS	2x	2.5 cm	HP	0.310
836.60	190	GSM	32.14	32.28	Body	Laptop	GPRS	1x	2.5 cm	HP	0.185
836.60	190	GSM	27.61	27.78	Body	Laptop	EGPRS	4x	2.5 cm	HP	0.268
836.60	190	GSM	27.71	27.91	Body	Laptop	EGPRS	3x	2.5 cm	HP	0.328
836.60	190	GSM	27.80	27.82	Body	Laptop	EGPRS	2x	2.5 cm	HP	0.295
836.60	190	GSM	27.75	27.95	Body	Laptop	EGPRS	1x	2.5 cm	HP	0.170
ANSI / IEEE C95.1 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 21 of 26

12.6 PCS GSM Body SAR Results with HP Laptop PC

MEASUREMENT RESULTS											
FREQUENCY		Mode	C_Power[dBm]		Position	Test Position	Service	Tx Slot	Spacing	Laptop PC	SAR
MHz	Ch.		Start	End							(W/kg)
1850.20	512	PCS	30.10	30.14	Body	Laptop	GPRS	4x	2.5 cm	HP	0.829
1880.00	661	PCS	29.81	29.77	Body	Laptop	GPRS	4x	2.5 cm	HP	0.883
1909.80	810	PCS	30.00	30.01	Body	Laptop	GPRS	4x	2.5 cm	HP	0.755
1880.00	661	PCS	29.89	29.89	Body	Laptop	GPRS	3x	2.5 cm	HP	0.573
1880.00	661	PCS	29.93	29.97	Body	Laptop	GPRS	2x	2.5 cm	HP	0.466
1880.00	661	PCS	29.96	30.08	Body	Laptop	GPRS	1x	2.5 cm	HP	0.239
1850.20	512	PCS	26.91	26.88	Body	Laptop	EGPRS	4x	2.5 cm	HP	0.836
1880.00	661	PCS	26.62	26.55	Body	Laptop	EGPRS	4x	2.5 cm	HP	0.850
1909.80	810	PCS	26.91	26.96	Body	Laptop	EGPRS	4x	2.5 cm	HP	0.731
1880.00	661	PCS	26.62	26.65	Body	Laptop	EGPRS	3x	2.5 cm	HP	0.658
1880.00	661	PCS	26.64	26.76	Body	Laptop	EGPRS	2x	2.5 cm	HP	0.450
1880.00	661	PCS	29.65	29.73	Body	Laptop	EGPRS	1x	2.5 cm	HP	0.231
ANSI / IEEE C95.1 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram					

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



FCC ID: NBZNRM-MC930D	 PCTEST Computer Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 22 of 26

13 EQUIPMENT LIST

Manufacturer	Model / Equipment	Calibration Date	Cal Inerval	Calibration Due	Serial No.
Agilent	N4010A Wireless Connectivity Test Set	6/11/2007	Annual	6/10/2008	GB46170464
Agilent	E5515C Wireless Communications Test Set	7/27/2006	Biennial	7/26/2008	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/6/2006	Biennial	10/5/2008	GB43193972
Agilent	E5515C Wireless Communications Test Set	10/26/2006	Biennial	10/25/2008	GB46310798
Rohde & Schwarz	NRVS Power Meter	7/3/2007	Biennial	7/2/2009	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	7/3/2007	Biennial	7/2/2009	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	9/7/2007	Annual	9/6/2008	833855/010
Rohde & Schwarz	CMU200 Base Station Simulator	5/24/2007	Annual	5/23/2008	836371/079
SPEAG	D1900V2 1900 MHz SAR Dipole	1/23/2007	Biennial	1/22/2009	502
SPEAG	D835V2 835MHz SAR Dipole	8/27/2007	Biennial	8/26/2009	4d026
SPEAG	D2450V2 2450 MHz SAR Dipole	9/26/2007	Biennial	9/25/2009	719
SPEAG	D5GHzV2 5 GHz SAR Dipole	9/25/2007	Biennial	9/24/2009	1007
SPEAG	EX3DV4 SAR Probe	1/22/2007	Annual	1/22/2008	3550
SPEAG	DAE4	5/24/2007	Annual	5/23/2008	704
SPEAG	EX3DV4 SAR Probe	5/28/2007	Annual	5/27/2008	3589
SPEAG	DAE4	8/29/2007	Annual	8/28/2008	665
SPEAG	EX3DV4 SAR Probe	8/30/2007	Annual	8/29/2008	3561
SPEAG	ES3DV2 SAR Probe	10/27/2007	Annual	10/26/2008	3022
SPEAG	DAE4	1/23/2007	Annual	1/23/2008	649
SPEAG	D2600V2 2600MHz SAR Dipole	1/5/2007	Annual	1/5/2008	1004
Agilent	HP 85070B Dielectric Probe Kit	N/A	Annual	N/A	352
Agilent	E8257D (250kHz-20GHz) Signal Generator	3/8/2007	Annual	3/7/2008	MY45470194
Rohde & Schwarz	NRVD Dual Channel Power Meter	12/11/2006	Biennial	12/10/2008	101695
Rohde & Schwarz	NRV-Z33 Peak Power Sensor (1mW-20W)	11/28/2006	Biennial	11/27/2008	100155
Rohde & Schwarz	NRV-Z32 Peak Power Sensor (100uW-2W)	12/21/2006	Biennial	12/20/2008	100004
SPEAG	D835V2 835MHz SAR Dipole	1/8/2007	Biennial	1/7/2009	4d047
SPEAG	D1900V2 1900MHz SAR Dipole	1/23/2007	Biennial	1/22/2009	5d080
SPEAG	D2450V2 2450MHz SAR Dipole	1/17/2007	Biennial	1/16/2009	797
SPEAG	D5GHzV2 5GHz SAR Dipole	1/24/2007	Biennial	1/23/2009	1057
SPEAG	D1800V2 1800MHz SAR Dipole	11/20/2006	Biennial	11/19/2008	2d106
SPEAG	D1450V2 1450 MHz SAR Dipole	6/11/2007	Biennial	6/10/2009	1025
SPEAG	D1765V2 1765 MHz SAR Dipole	6/11/2007	Biennial	6/10/2009	1008
IndexSAR	IXTL-010 Dielectric Measurement Kit	N/A		N/A	
IndexSAR	IXTL-030 30MM TEM line for 6 GHz	N/A		N/A	

Notes:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by PCTEST prior to SAR evaluation. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem		Page 23 of 26

14 CONCLUSION

14.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Labs	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem	Page 24 of 26	

15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, April 2006.
- [3] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: NBZNRM-MC930D	 PCTEST Complete Wireless Lab	CERTIFICATION REPORT	 NOVATEL WIRELESS	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem	Page 25 of 26	

- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [21] FCC SAR Measurement Procedures for 3G Devices, June 2006
- [22] SAR Measurement procedures for IEEE 802.11a/b/g rev 1.1, Oct 2006
- [23] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [24] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [25] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 2, November 2005
- [26] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 1999
- [27] Interim SAR Procedures for Release 6 HSPA Devices, FCC OET, June 2007

FCC ID: NBZNRM-MC930D	 PCTEST <small>Complete Wireless Lab</small>	CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 0710241238-R1.NBZ	Test Dates: 10/29/07 - 11/01/07	EUT Type: 850/1900 GSM/GPRS/EGPRS Modem	Page 26 of 26

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With ACER Laptop PC**

Communication System: GSM850 GPRS; 3Tx slots; Frequency: 848. MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.6 cm

Test Date: 10-30-2007; Ambient Temp: 23.4 C; Tissue Temp: 21.6 C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 GPRS, Body SAR, Laptop Position, Ch.251, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.8 V/m

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.771 mW/g

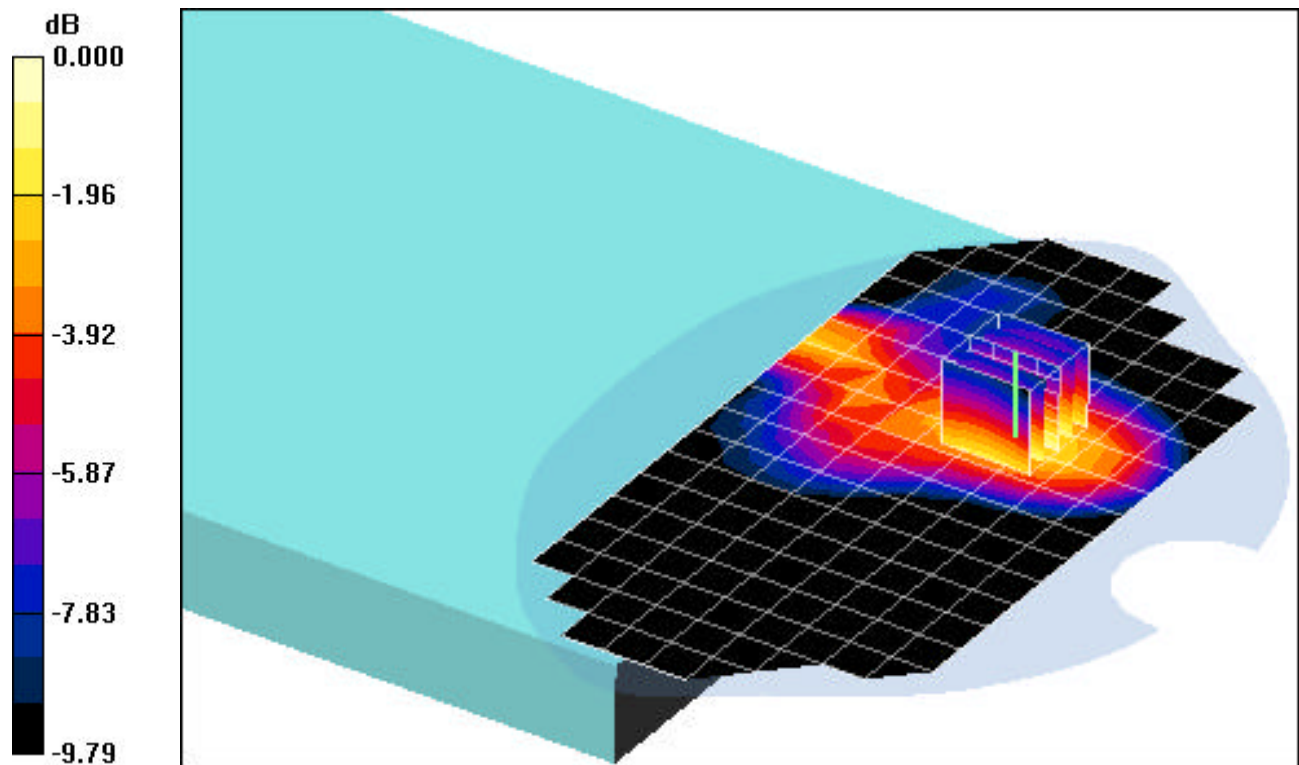

0 dB = 1.27mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With ACER Laptop PC**

Communication System: GSM850 EGPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.6 cm

Test Date: 10-30-2007; Ambient Temp: 23.4 C; Tissue Temp: 21.6 C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 EGPRS, Body SAR, Laptop Position, Ch.251, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.7 V/m

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.750 mW/g

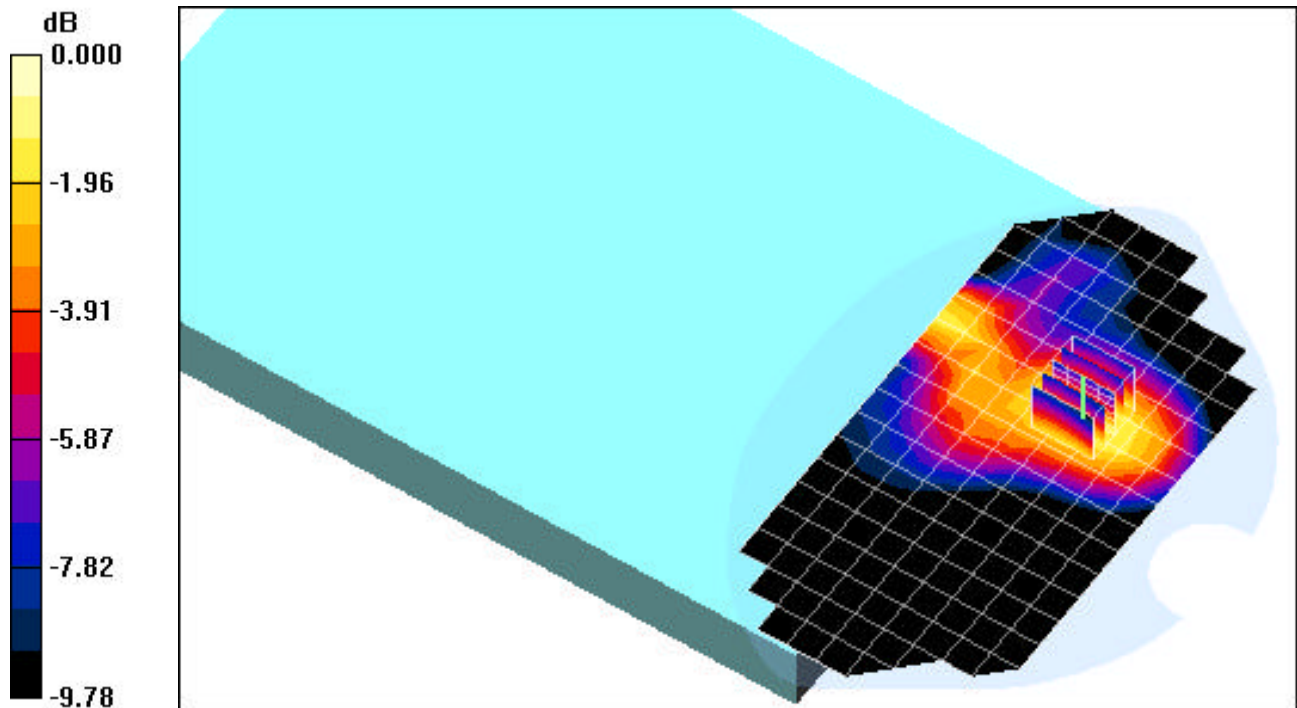

0 dB = 1.20mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With ACER Laptop PC**

Communication System: GSM1900 GPRS; 4 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.6 cm

Test Date: 10-31-07; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 GPRS, Body SAR, Laptop Position, Ch.512, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.6 V/m

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.811 mW/g

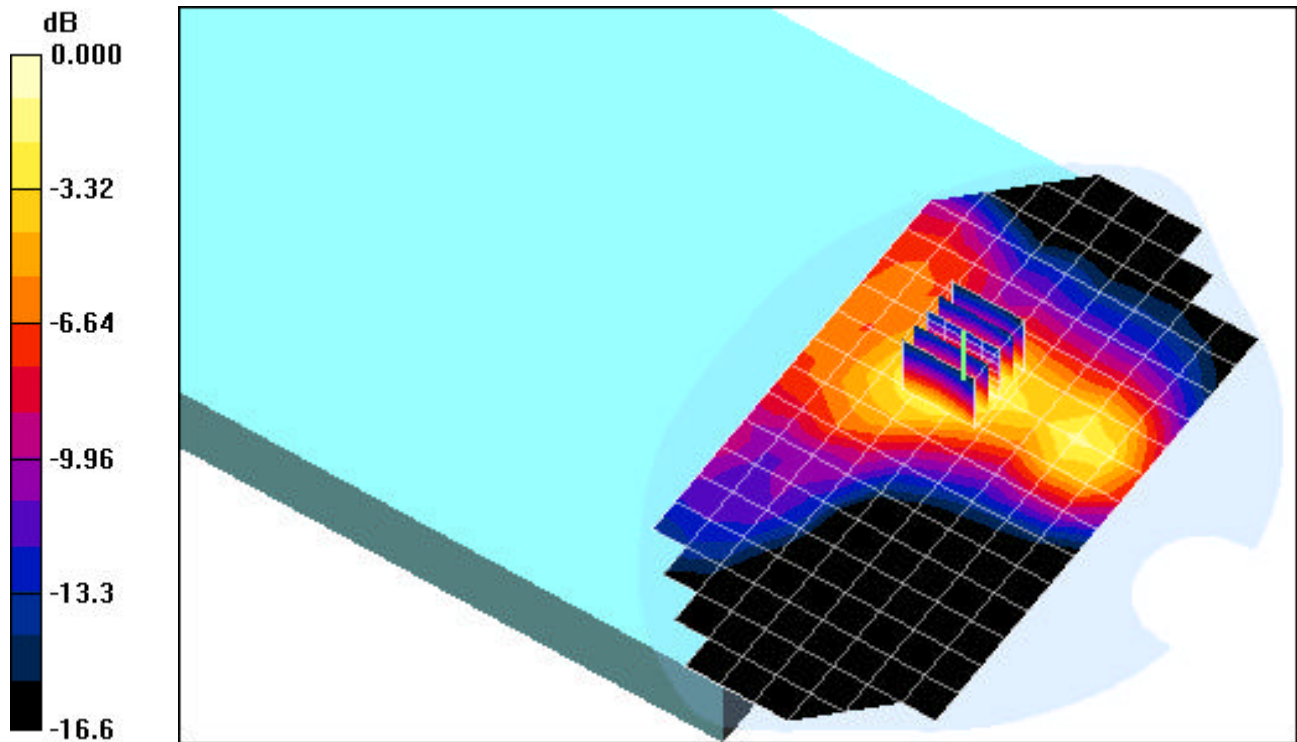

0 dB = 1.73mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With ACER Laptop PC**

Communication System: GSM1900 EGPRS; 4 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.6 cm

Test Date: 10-31-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 EGPRS, Body SAR, Laptop Position, Ch.512, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.9 V/m

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.46 mW/g; SAR(10 g) = 0.839 mW/g

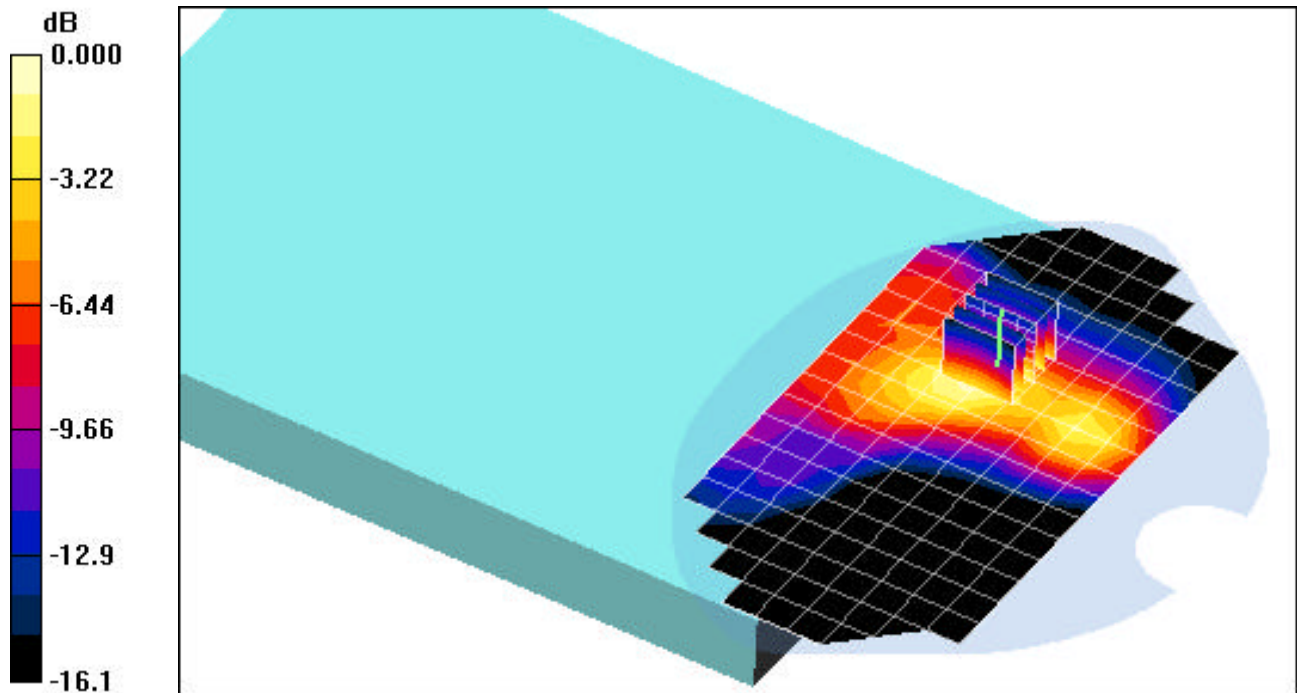

0 dB = 1.78mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With TOSHIBA Laptop PC**

Communication System: GSM850 GPRS; 3x Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-29-07; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 GPRS, Body SAR, Laptop Position, Ch.190, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.5 V/m

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.571 mW/g

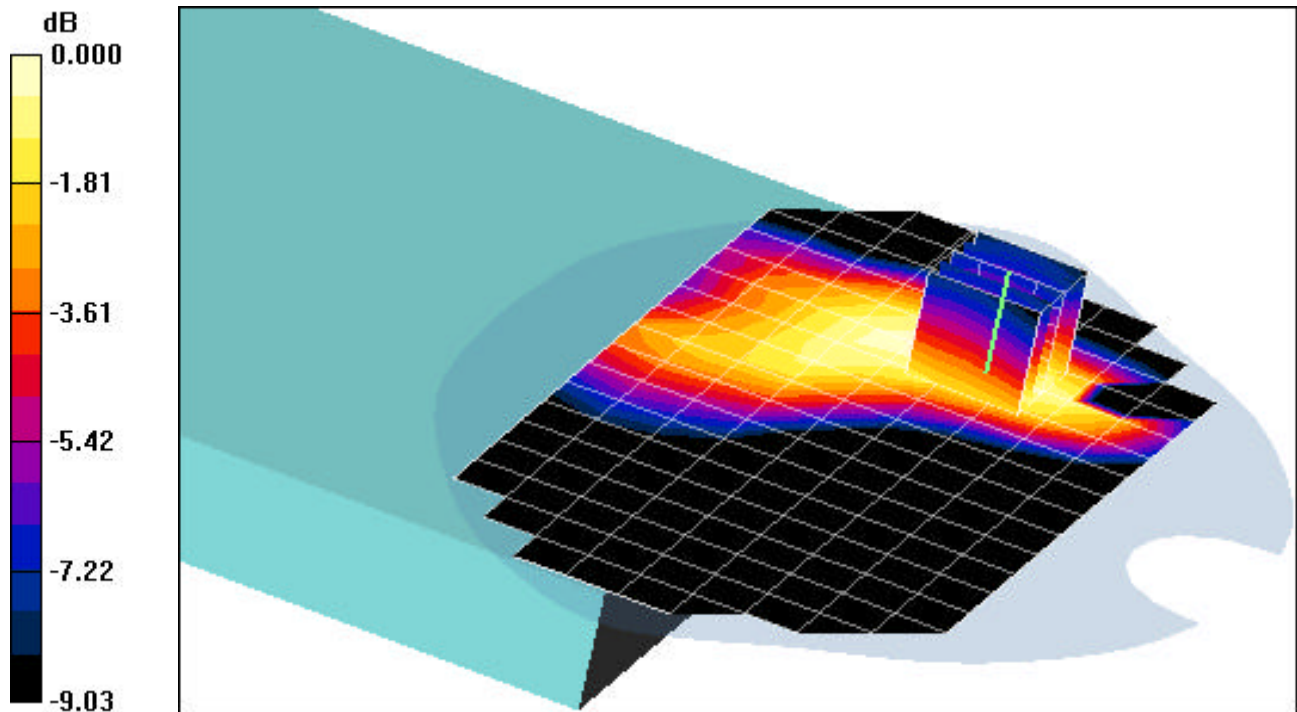

0 dB = 0.879mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With TOSHIBA Laptop PC**

Communication System: GSM850 EGPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-29-07; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 EGPRS, Body SAR, Laptop Position, Ch.190, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.9 V/m

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.559 mW/g

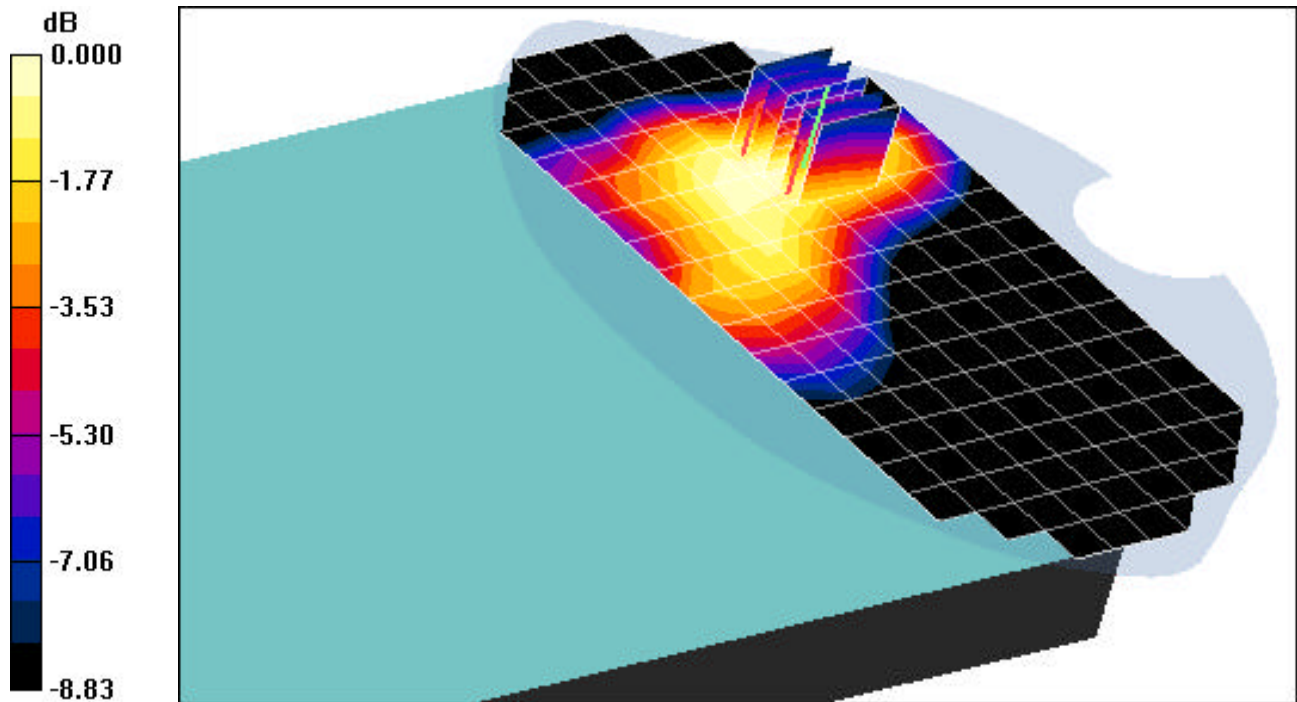

0 dB = 0.851mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With TOSHIBA Laptop PC**

Communication System: GSM1900 GPRS; 4 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-31-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 GPRS, Body SAR, Laptop Position, Ch.810, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.6 V/m

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.829 mW/g

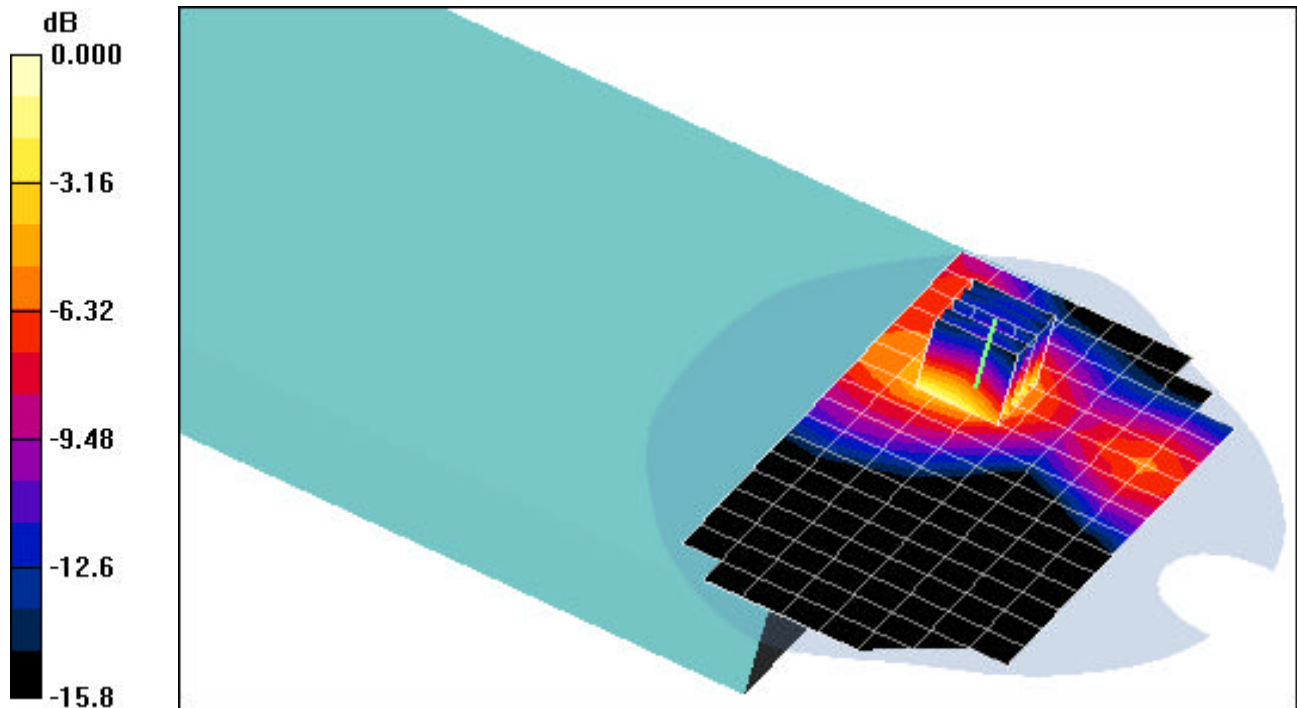

0 dB = 1.71mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With TOSHIBA Laptop PC**

Communication System: GSM1900 EGPRS; MHzFrequency: 1909.8 MHz;Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-01-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 EGPRS, Body SAR, Laptop Position, Ch.810, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.788 mW/g

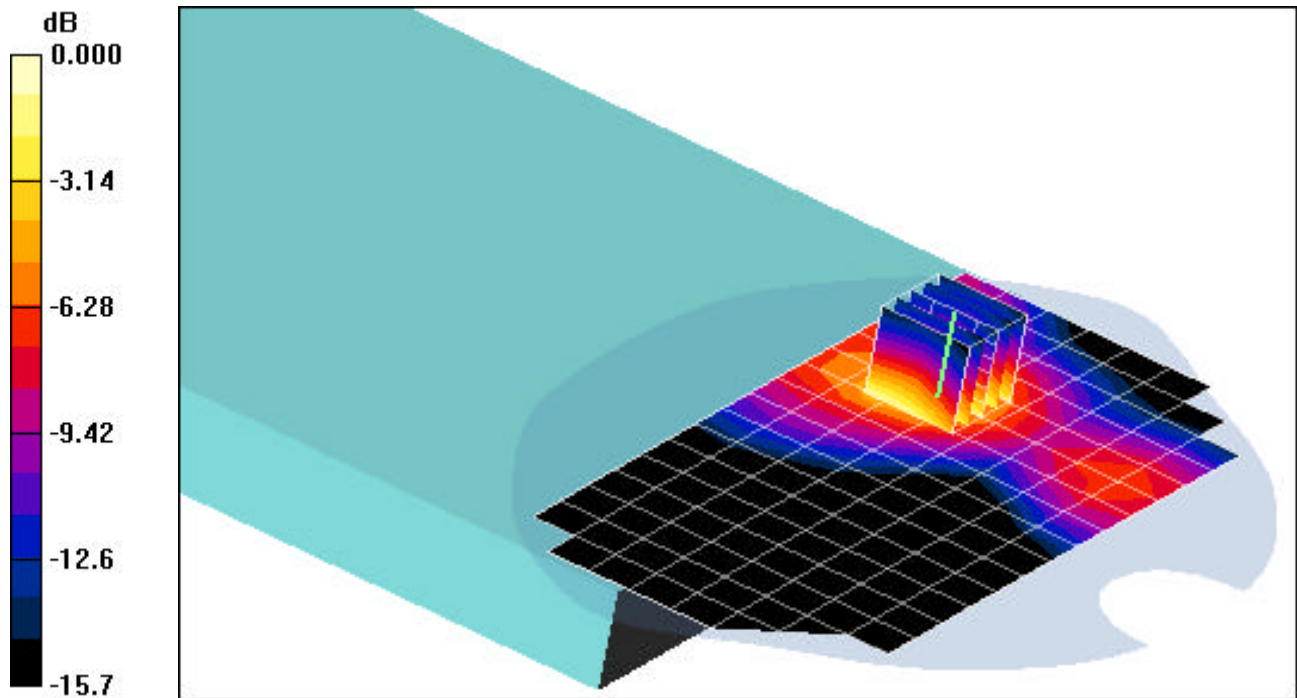

0 dB = 1.69mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With HP Laptop PC**

Communication System: GSM850 GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5 cm

Test Date: 10-29-07; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 GPRS, Body SAR, Laptop Position, Ch.190, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.0 V/m

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.257 mW/g

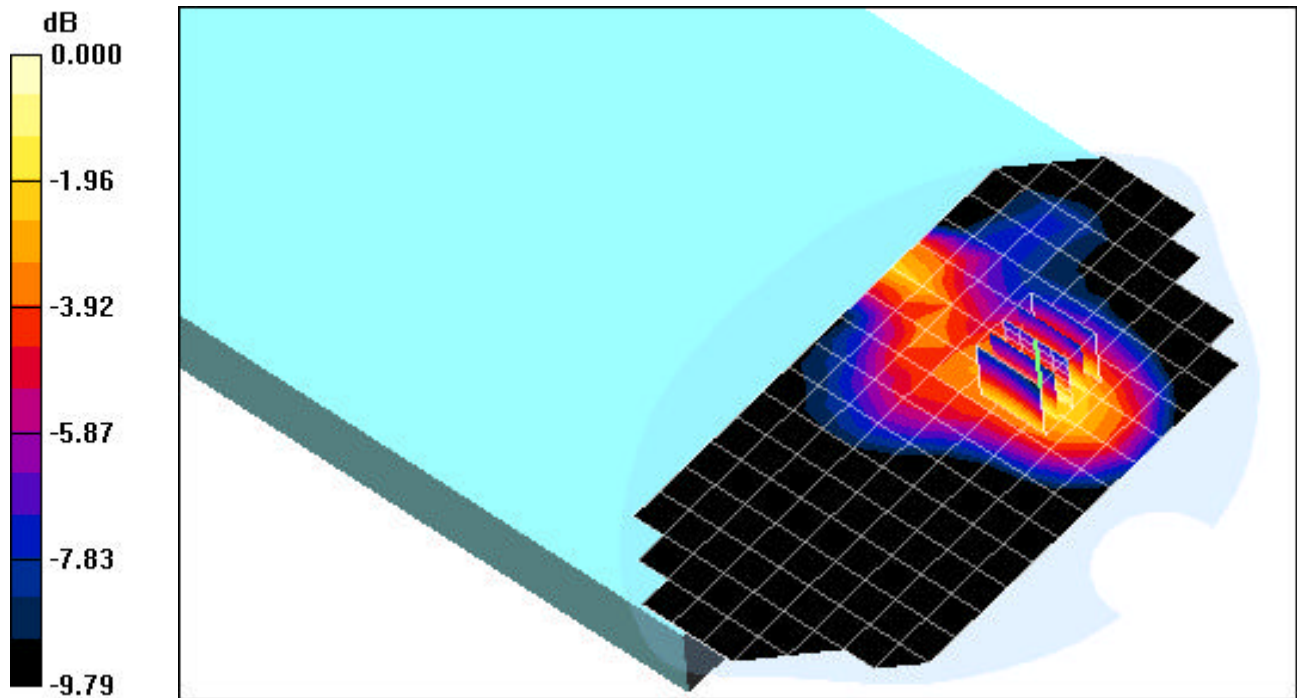

0 dB = 0.396mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With HP Laptop PC**

Communication System: GSM850 EGPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5 cm

Test Date: 10-29-07; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/25/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 EGPRS, Body SAR, Laptop Position, Ch.190, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.5 V/m

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.234 mW/g

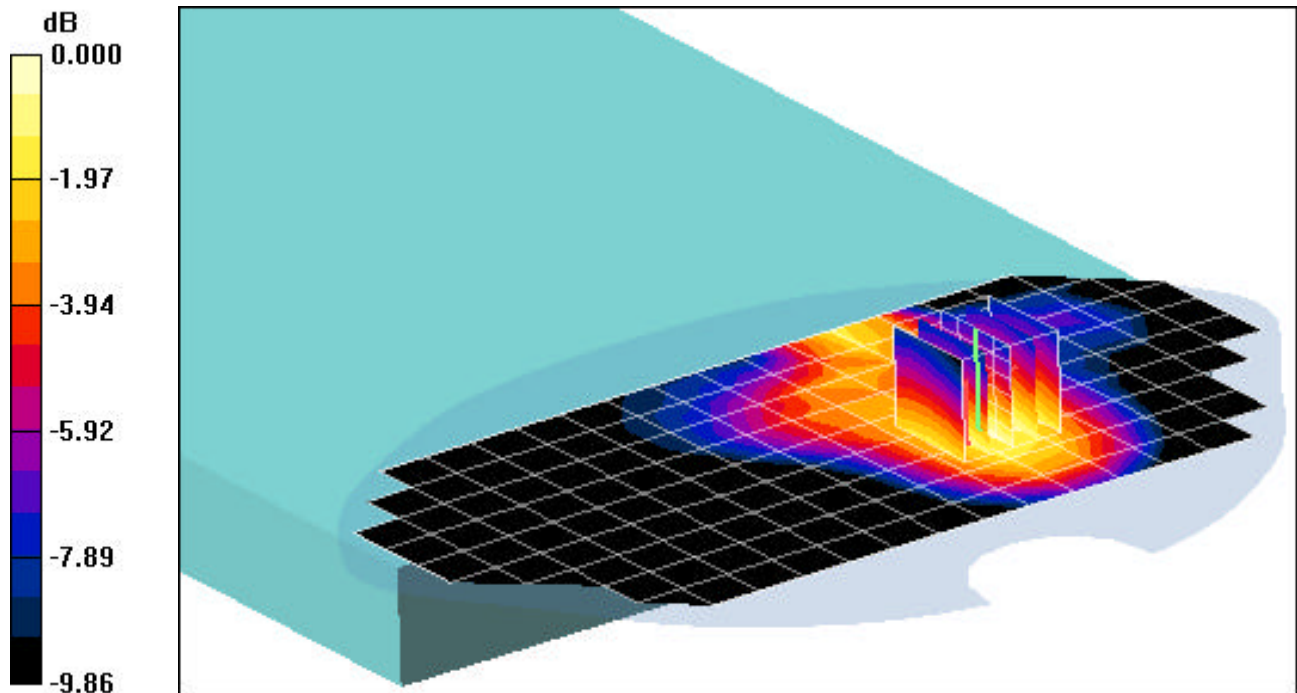

0 dB = 0.351mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With HP Laptop PC**

Communication System: GSM1900 GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5 cm

Test Date: 11-01-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 GPRS, Body SAR, Laptop Position, Ch.661, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.7 V/m

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.883 mW/g; SAR(10 g) = 0.536 mW/g

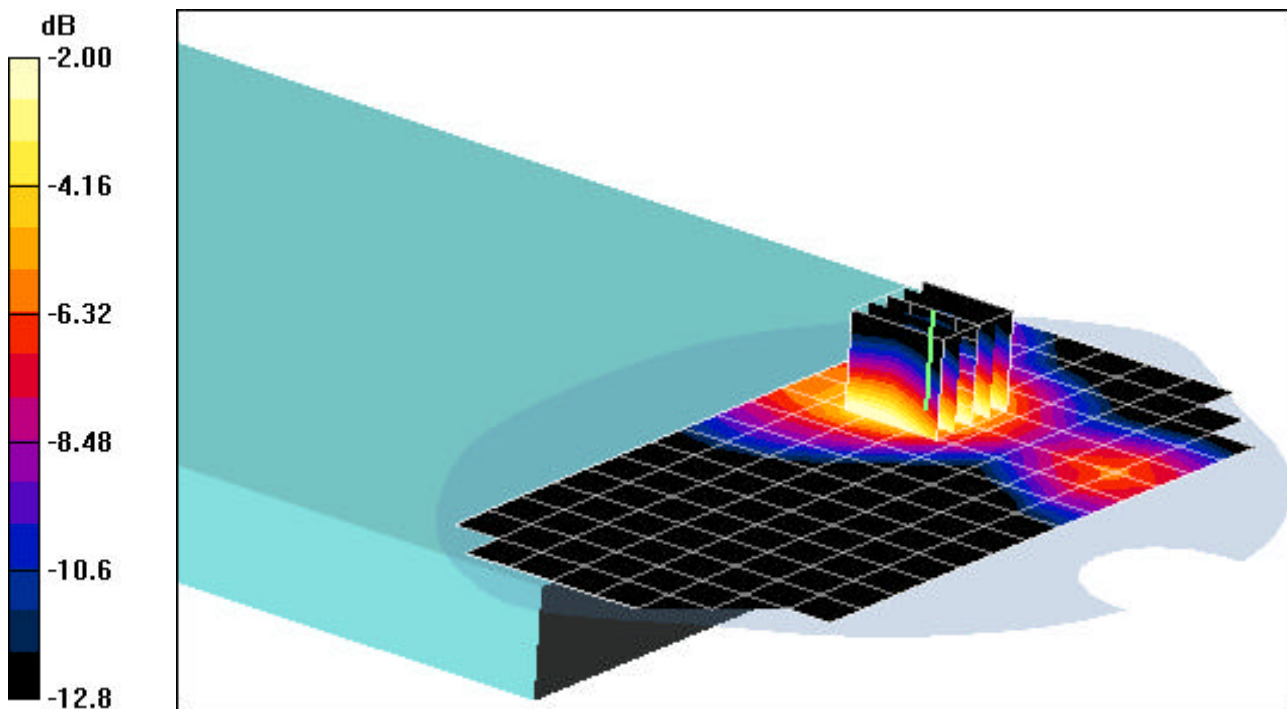

0 dB = 1.05mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With HP Laptop PC**

Communication System: GSM1900 EGPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5 cm

Test Date: 11-01-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 EGPRS, Body SAR, Laptop Position, Ch.661, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.6 V/m

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.518 mW/g

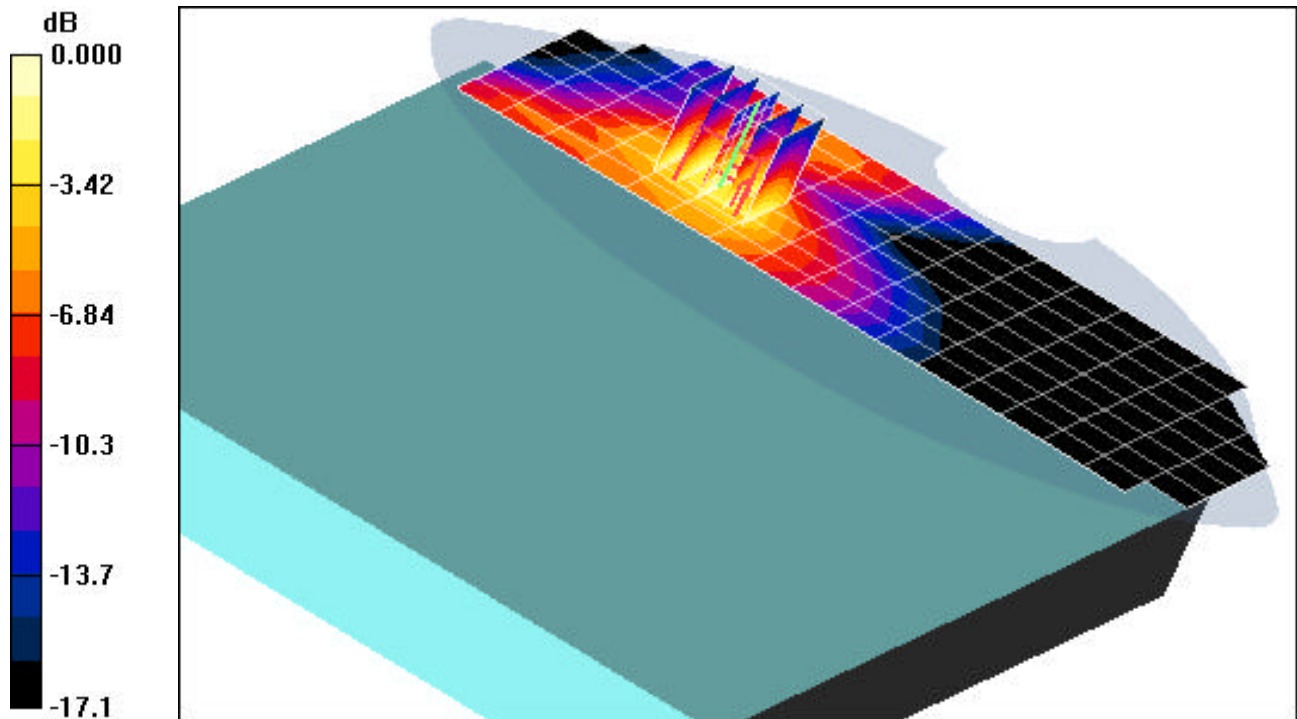

0 dB = 1.01mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With ACER Laptop PC**

Communication System: GSM850 GPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76
Medium: 835 Muscle ($\sigma = 0.93$ mho/m, $\epsilon_r = 56.89$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.6 cm

Test Date: 10-30-2007; Ambient Temp: 23.4 C; Tissue Temp: 21.6 C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM850 GPRS, Body SAR, Laptop Position, Ch.251, 3Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.8 V/m

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.771 mW/g

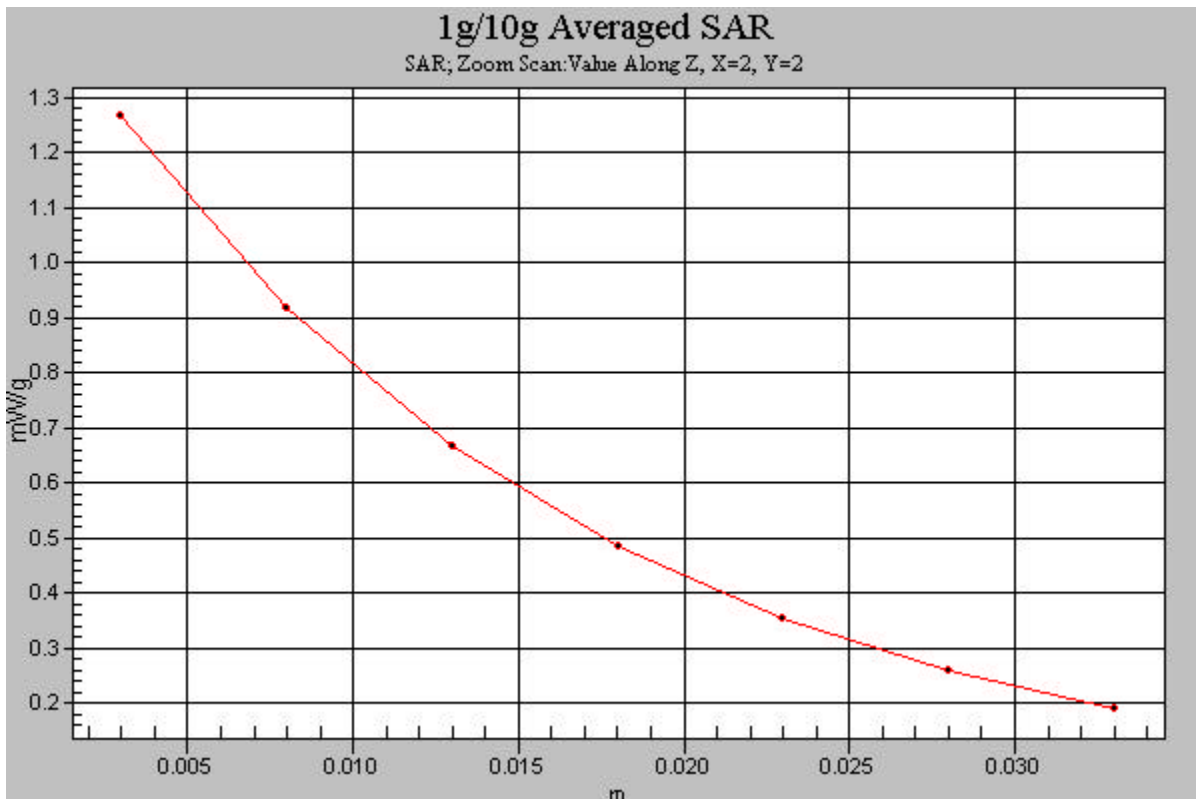

PCTEST ENGINEERING LABORATORY, INC.

**DUT: NOVATEL NRM-MC930D; Type: 850/1900 GSM/GPRS/EGPRS USB Modem; Serial: SAR 1
With TOSHIBA Laptop PC**

Communication System: GSM1900 GPRS; 4 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium: 1900 Muscle ($\sigma = 1.58$ mho/m, $\epsilon_r = 52.00$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-31-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM1900 GPRS, Body SAR, Laptop Position, Ch.810, 4Tx Slot


Area Scan (10x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.6 V/m

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.46 mW/g; SAR(10 g) = 0.829 mW/g

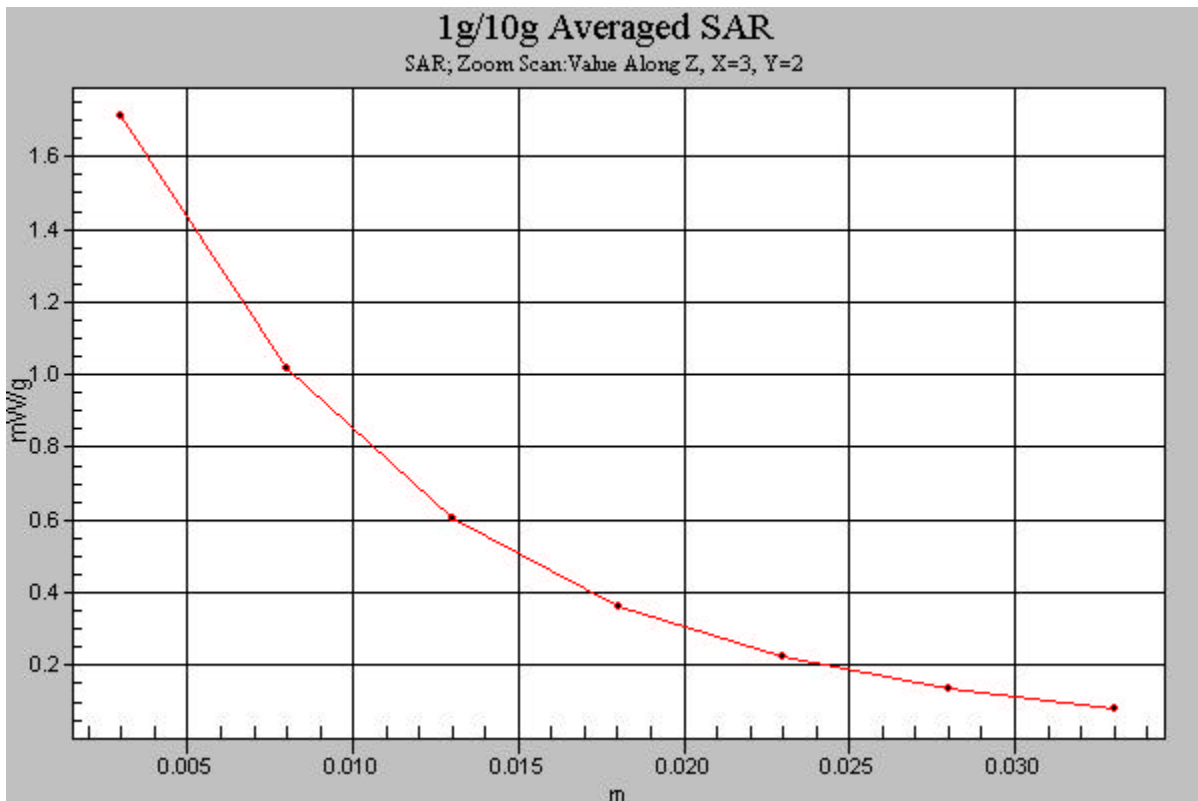

APPENDIX B: DIPOLE VALIDATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.92$ mho/m, $\epsilon_r = 42.14$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-29-07; Ambient Temp: 23.6°C ; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(8.28, 8.28, 8.28); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

835MHz Dipole Validation


Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 24.0 dBm (250 mW)

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.59 mW/g

Target SAR(1g) = 2.29 mW/g; Deviation = + 6.99 %

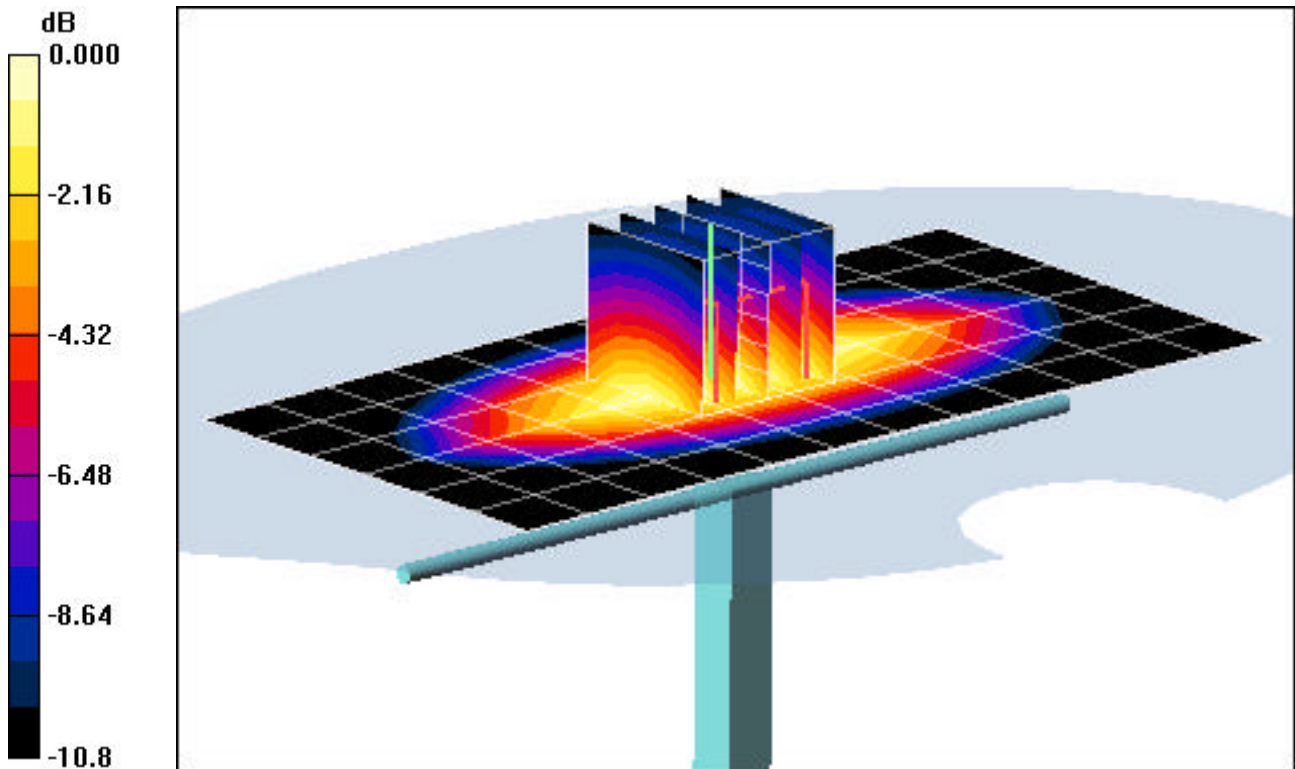

0 dB = 2.88mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ($\sigma = 0.92$ mho/m, $\epsilon_r = 42.14$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-30-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(8.28, 8.28, 8.28); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

835MHz Dipole Validation


Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 24.0 dBm (250 mW)

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.57 mW/gg

Target SAR(1g) = 2.29 mW/g; Deviation = + 5.68 %

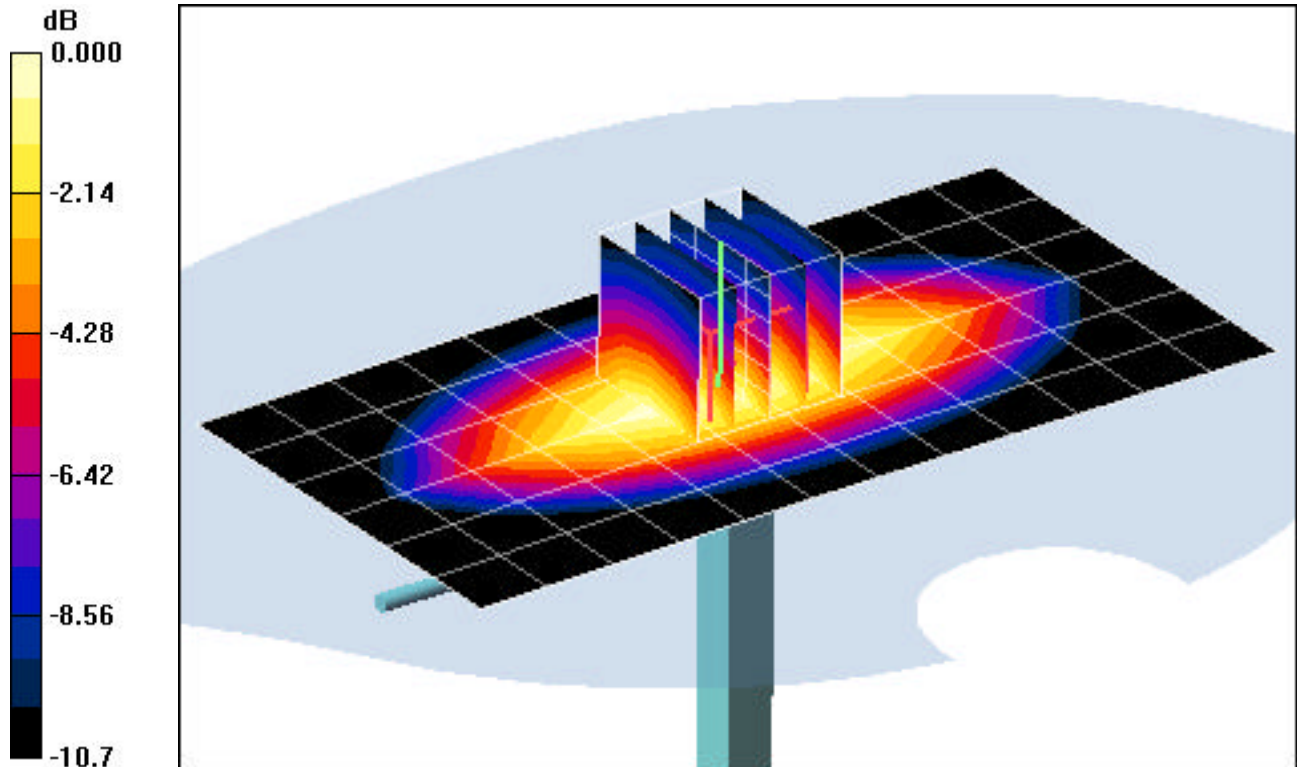

0 dB = 2.84mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.34$ mho/m, $\epsilon_r = 41.36$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 10-31-2007; Ambient Temp: 23.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(6.71, 6.71, 6.71); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

1900MHz Dipole Validation


Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

SAR(1 g) = 4.01 mW/g; SAR(10 g) = 2.06 mW/g

Target SAR(1g) = 3.77 mW/g; Deviation = + 6.37 %

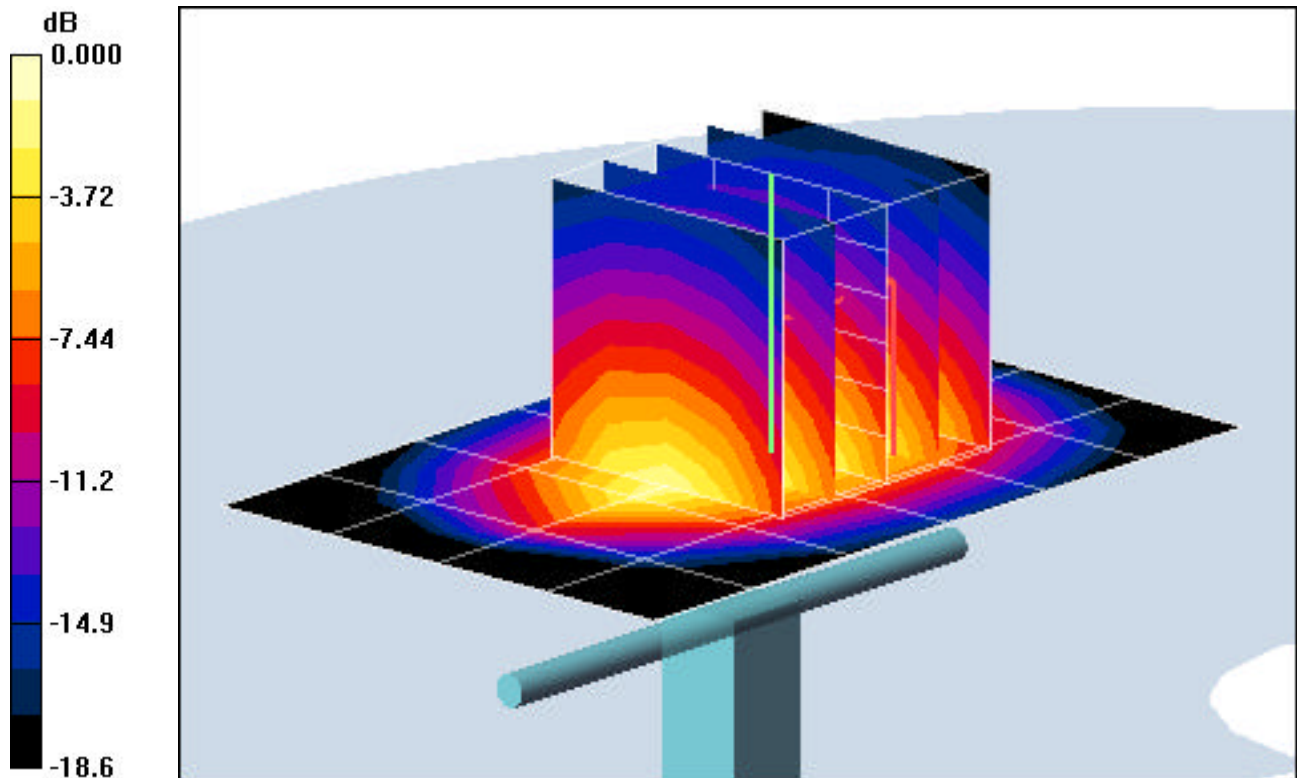

0 dB = 5.09mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ($\sigma = 1.34$ mho/m, $\epsilon_r = 41.36$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

Test Date: 11-01-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.71, 6.71, 6.71); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/25/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

1900MHz Dipole Validation


Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

SAR(1 g) = 4.05 mW/g; SAR(10 g) = 2.13 mW/g

Target SAR(1g) = 3.77 mW/g; Deviation = + 7.43 %

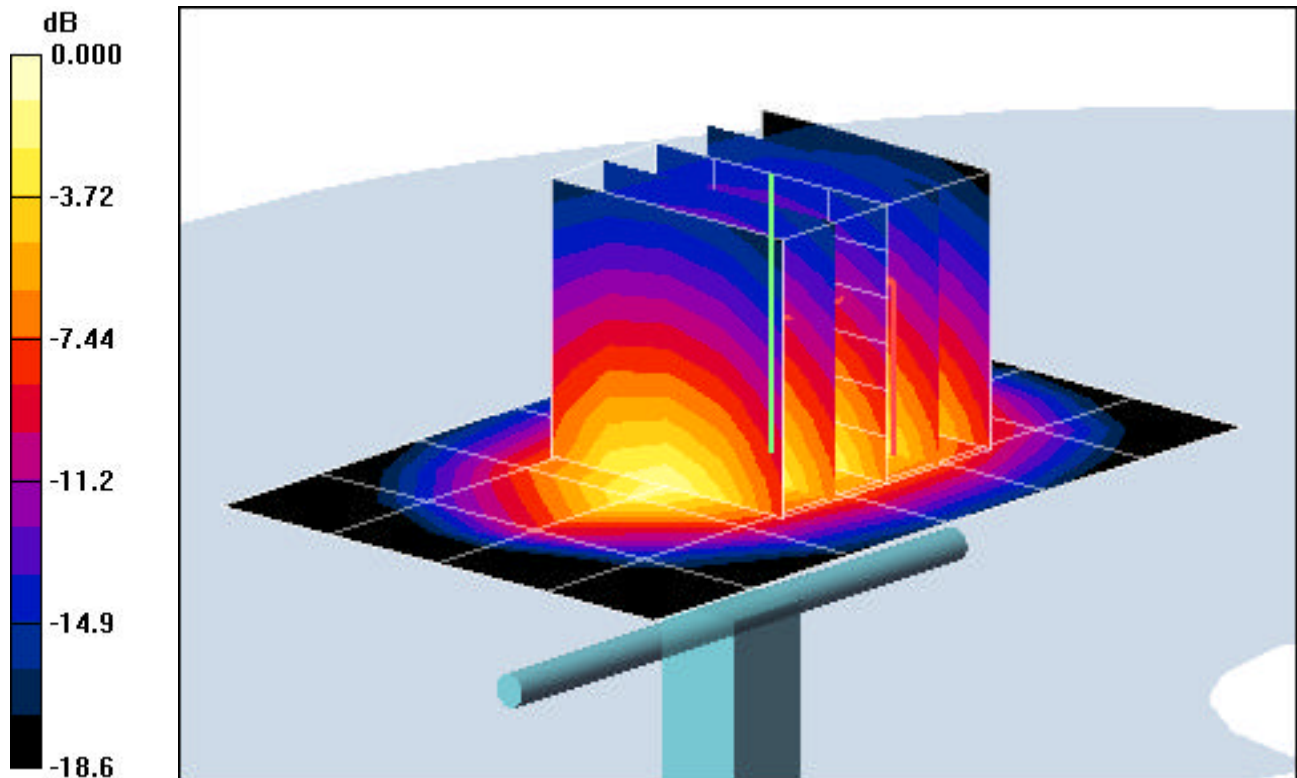

0 dB = 5.16mW/g

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3589_May07**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3589**

Calibration procedure(s) **QA CAL-01.v5 and QA CAL-14.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 28, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bomholt	R&D Director	

Issued: May 29, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3589

Manufactured:	March 30, 2006
Last calibrated:	July 14, 2006
Recalibrated:	May 28, 2007

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)

DASY - Parameters of Probe: EX3DV4 SN:3589

Sensitivity in Free Space^A

NormX	0.460 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	0.400 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	0.370 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	90 mV
DCP Y	91 mV
DCP Z	92 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **835 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	3.8	1.3
SAR _{be} [%]	With Correction Algorithm	0.0	0.1

TSL **1900 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	4.5	1.6
SAR _{be} [%]	With Correction Algorithm	0.3	0.5

Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

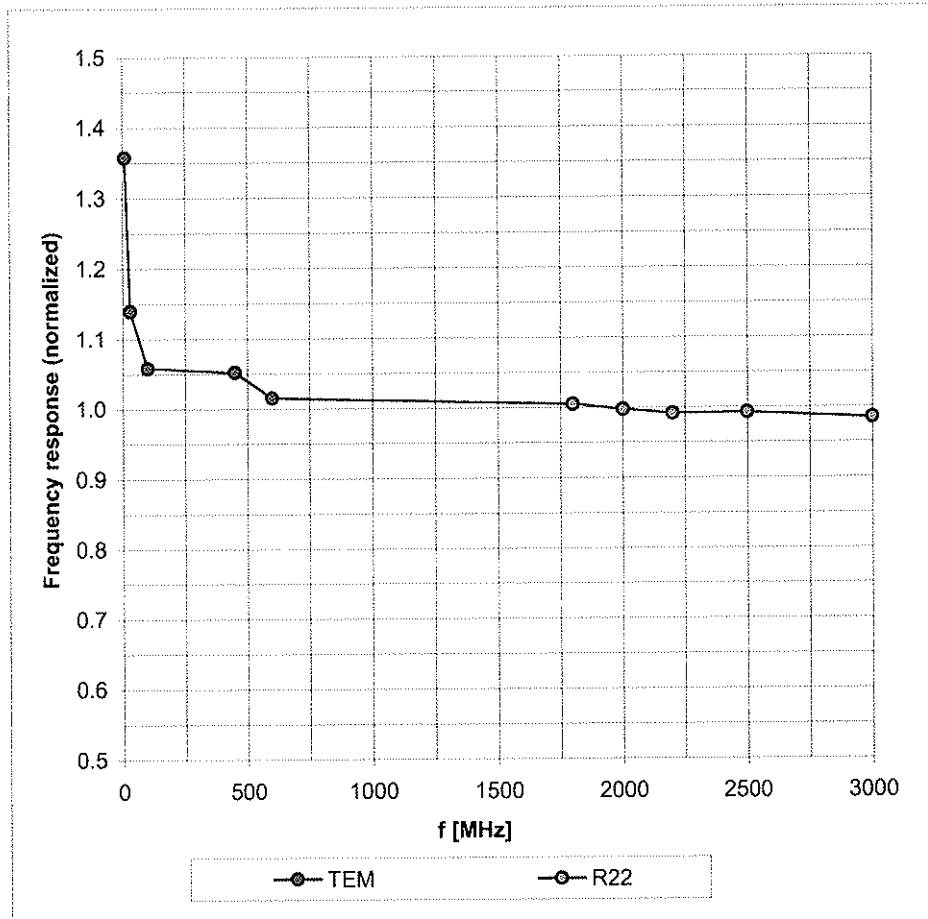


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

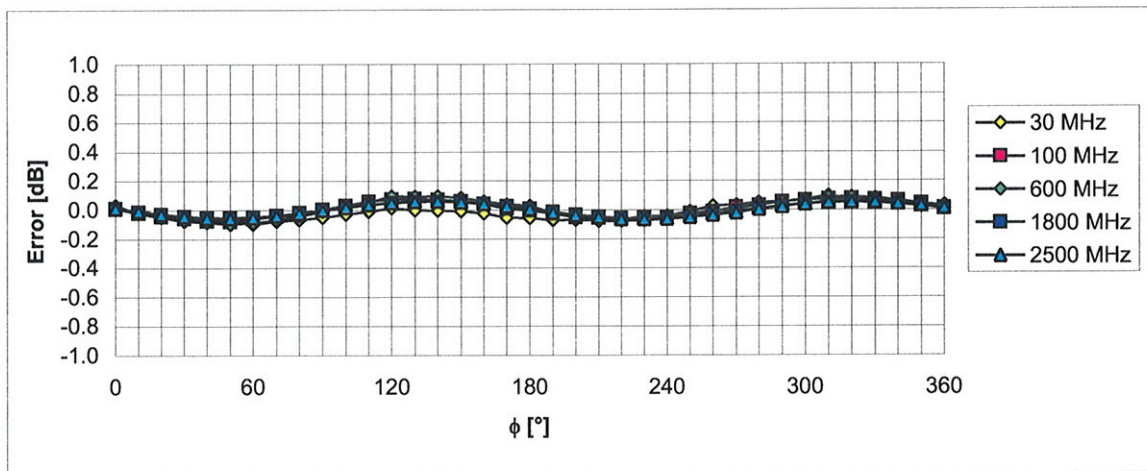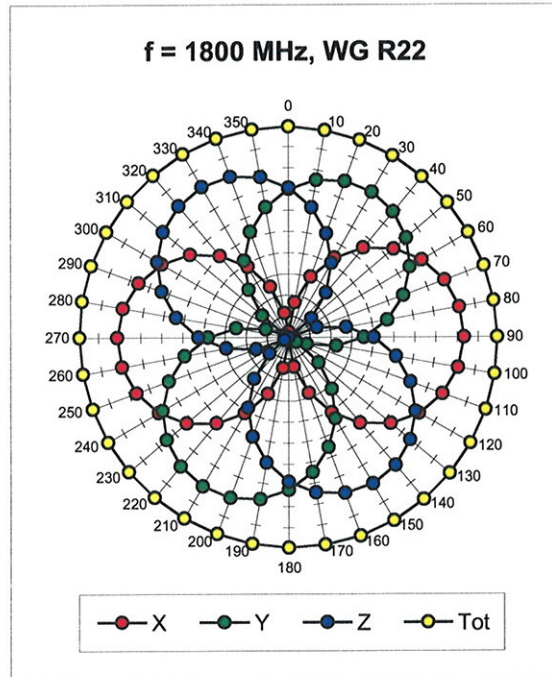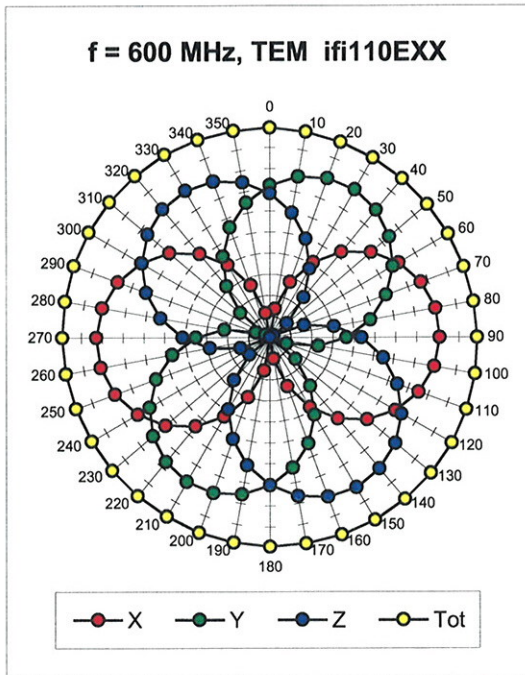



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

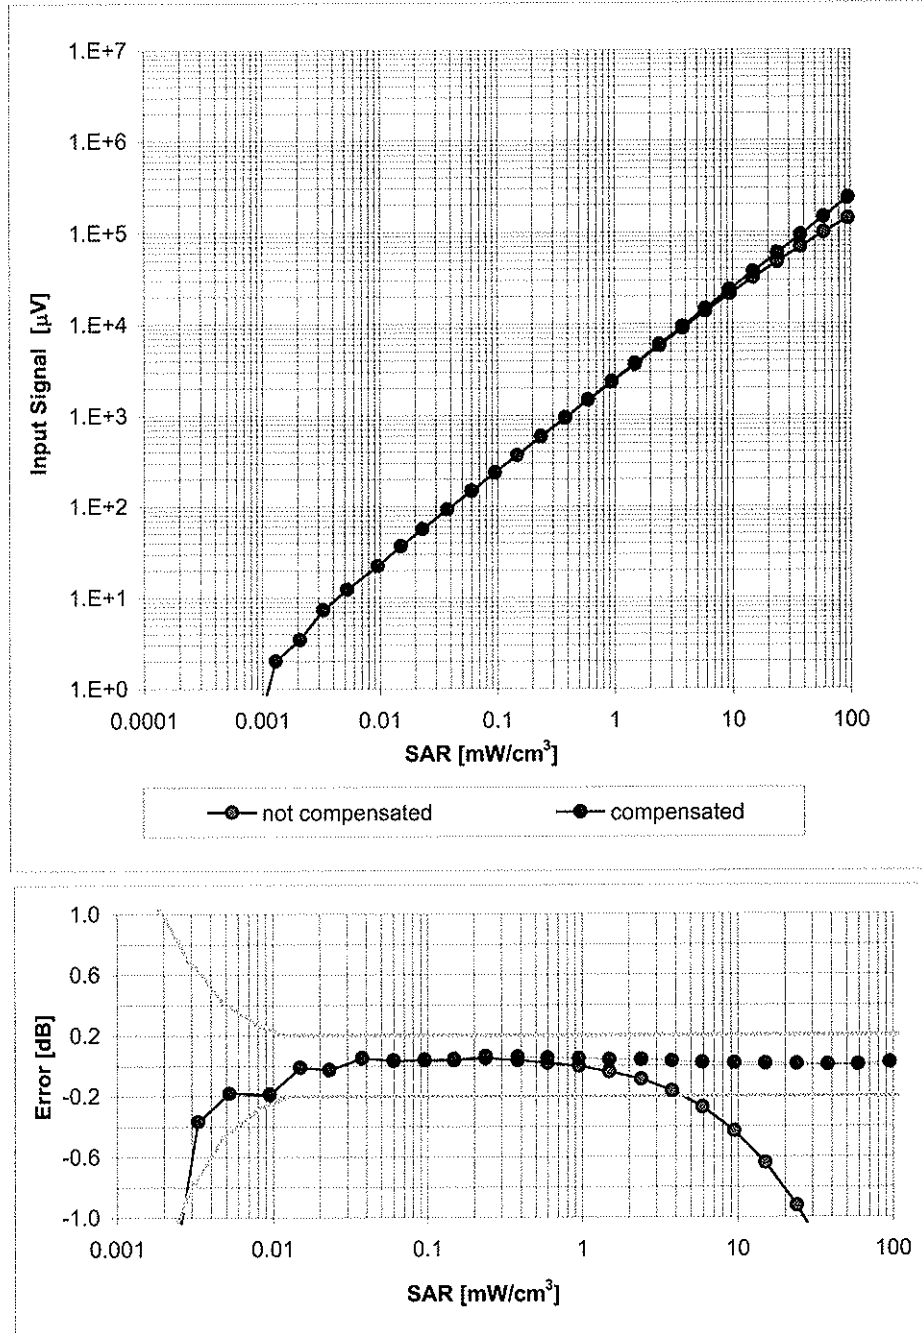

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

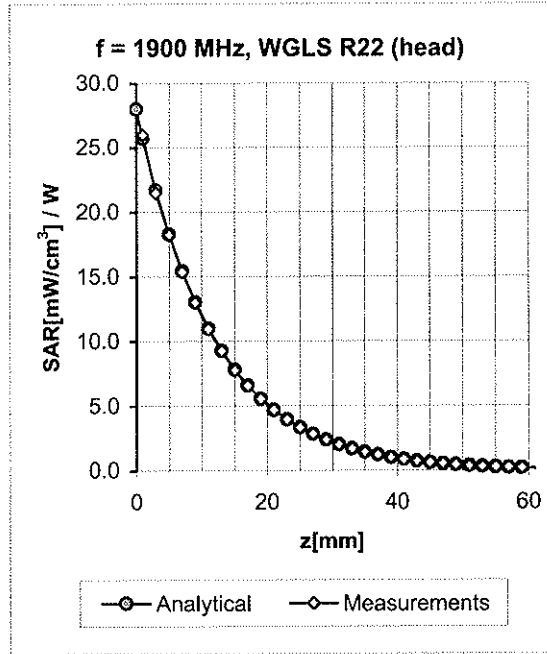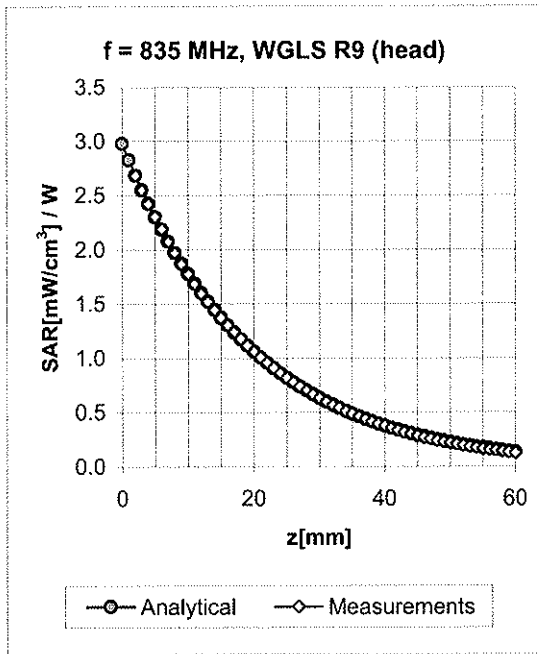


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.27	0.99	8.28 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.22	1.08	6.71 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.44	1.00	6.29 ± 11.8% (k=2)
2600	± 50 / ± 100	Head	39.0 ± 5%	1.96 ± 5%	0.50	1.08	6.10 ± 11.8% (k=2)
5200	± 50 / ± 100	Head	36.0 ± 5%	4.66 ± 5%	0.36	1.75	4.60 ± 13.1% (k=2)
5300	± 50 / ± 100	Head	35.9 ± 5%	4.76 ± 5%	0.38	1.75	4.31 ± 13.1% (k=2)
5800	± 50 / ± 100	Head	35.3 ± 5%	5.27 ± 5%	0.35	1.75	4.16 ± 13.1% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.33	0.91	8.30 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.26	1.00	6.79 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.47	1.00	6.37 ± 11.8% (k=2)
2600	± 50 / ± 100	Body	52.5 ± 5%	2.16 ± 5%	0.52	1.08	6.06 ± 11.8% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.42	1.70	4.12 ± 13.1% (k=2)
5300	± 50 / ± 100	Body	48.5 ± 5%	5.42 ± 5%	0.38	1.70	3.91 ± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.35	1.70	3.97 ± 13.1% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

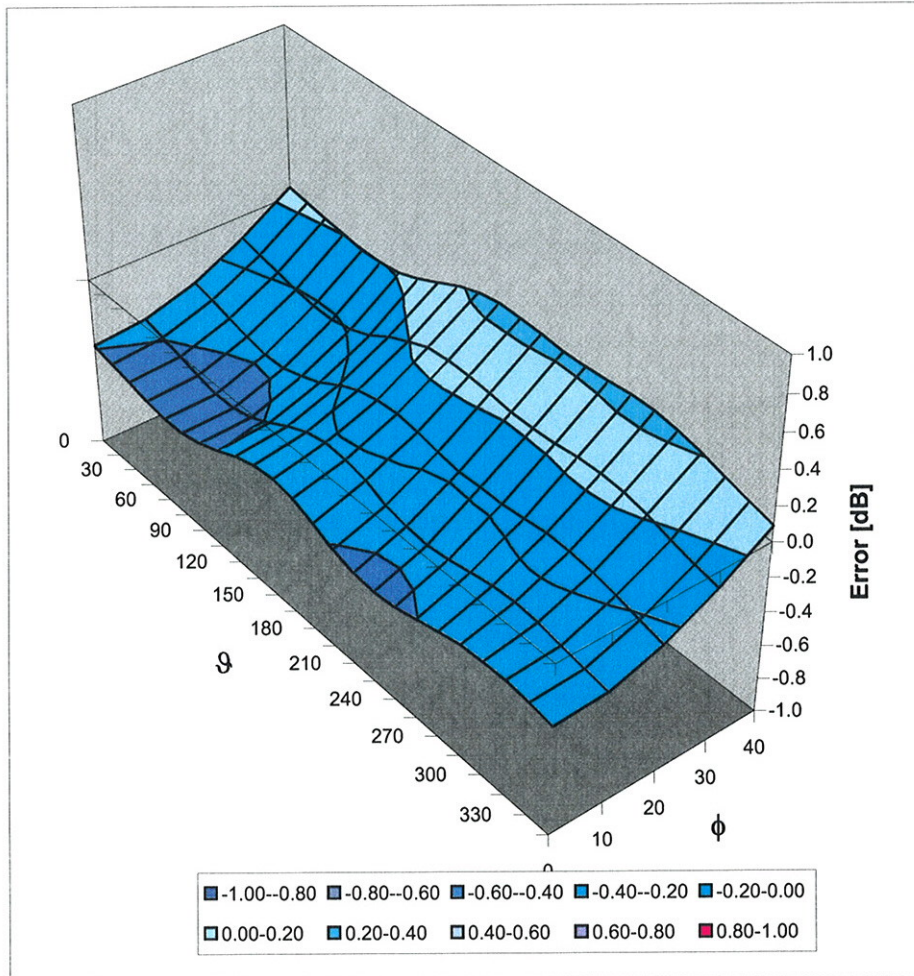

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)