

Test Report

Radio Frequency Devices – Intentional Radiators

Test Report – No.: 2222709KAU-002b

Date of issue: 2015-08-27

This test report is an update of a former issued test report, the changes are explained on the page „Test Results – Overview

Type: GAT Access 6100 F Bio

Description of the EUT: Access Control Terminal with Biometry

Serialnumber: 1444175 (test sample with modulation)
1444176 (test sample with test mode CW)

Manufacturer and Applicant: GANTNER Electronic GmbH

Address: Montafonerstr. 8
6780 Schruns
Österreich

Summary:

Referring to the emission limits and the operating mode during the tests specified in this report the equipment complies with the requirements according to

47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 /
RSS-210, Issue 8 and RSS-GEN, Issue 4


Test methods according to ANSI C63.10-2009

Test Laboratory:

Intertek Deutschland GmbH, Innovapark 20, 87600 Kaufbeuren

Compiled by:

U. Gronert
Senior Project Engineer



Approved by:

R. Dressler
Technical Manager EMC/ Radio



This test report consists of 23 pages. All measurement results exclusively refer to the equipment, which was tested.
Reproduction of this report except in its entirety is not permitted without written approval of Intertek Deutschland GmbH.

Revision History

Edition	Date	Description
1	2015-05-28	First release
2	2015-08-27	Editorial changes

Details about Accreditation/ Acceptance

EMC/ Radio National



The Intertek Deutschland EMC- Lab is accredited of the Deutsche Akkreditierungsstelle GmbH (DAkkS)

Registration Number: **D-PL-12085-01-01**

International



The Intertek Deutschland EMC- Lab is accepted of the Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE)

CB Test Laboratory: **TL118**



The Intertek Deutschland EMC- Lab is listed at the Federal Communications Commission (FCC)

Registration Number: **498399**



The Intertek Deutschland EMC- Lab is listed at Industry Canada

No. **8882A-1** (OATS) and **8882A-2** (3 m alternative test site)

Automotive



The Intertek Deutschland EMC- Lab is recognized technical Service of the Kraftfahrt-Bundesamtes (KBA)

Registration Number: **KBA-P 00046**

Table of Contents

1 Equipment under test (EUT)	6
1.1 Identification of the EUT according to the manufacturer/client declaration.....	6
1.2 Additional hardware information about the EUT	7
1.3 Additional software information about the EUT	7
1.4 Peripheral equipment	7
1.5 Test signals	7
1.6 Modification during the tests.....	7
2 Test specifications	8
2.1 Standards.....	8
2.2 Additions, deviations and exclusions from standards and accreditation.....	8
2.3 Test site	8
2.4 Test set-up	9
2.5 Test conditions	9
3 Test summary	10
4 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)	11
4.1 Requirement.....	11
4.2 Test setup details	11
4.3 Test data	12
4.4 Test equipment	12
5 Radiated test below 30 MHz	13
5.1 Requirement.....	13
5.2 Test setup details	13
5.3 Test data	14
5.4 Test equipment	15
6 Radiated emissions measurements from 30 MHz to 1000 MHz	16



- 6.1 Requirement..... 16
- 6.2 Test setup details 16
- 6.3 Test data 17
- 6.4 Test equipment 17

- 7 Frequency stability measurements 18**
- 7.1 Requirement..... 18
- 7.2 Test data 18
- 7.3 Test equipment 18

- 8 Occupied Bandwidth..... 19**
- 8.1 Requirement..... 19
- 8.2 Test setup details 19
- 8.3 Test data 19
- 8.4 Test equipment 20

- 9 Photos of the EUT 21**

1 Equipment under test (EUT)

1.1 Identification of the EUT according to the manufacturer/client declaration

Type/ Model: GAT Access 6100 F Bio
Description of the EUT: Access Control Terminal with Biometry

Transmitter frequency range: 13.56 MHz

Frequency agile or hopping: Yes No

Antenna: Internal antenna External antenna

Antenna connector: None, internal antenna Yes, type

Type of modulation: Transponder: AM

Temperature range: Category I (General): -20°C to +55°C
 Category II (Portable equipment): -10°C to +55°C
 Category III (Equipment for normal indoor use): +5°C to +35°C
 Other:

Power rating: Max. 3 W

Transmitter stand by mode supported: Yes No

1.2 Additional hardware information about the EUT

The EUT consists of the following units:

See 2.4

1.3 Additional software information about the EUT

During the tests the EUT supported the following software:

Software	Version / Release
BL-Vers	2.0
SW Version	04.07.00

1.4 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

See 2.4

1.5 Test signals

The radiated emission tests of the GAT Access 6100 F Bio were done with CW and with modulation.

1.6 Modification during the tests

No modifications have been made during the tests.



2 Test specifications

2.1 Standards

47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 /
RSS-210, Issue 8 and RSS-GEN, Issue 4

Test methods in:

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices

2.2 Additions, deviations and exclusions from standards and accreditation

No additions, deviations or exclusions have been made from standards and accreditation.

2.3 Test site

Measurements were performed at:


Intertek Deutschland GmbH, Innovapark 20, 87600 Kaufbeuren

Test sites:

Measurement Chamber	Type of chamber	IC Site filing #
OATS	10m	8882A-1
ANECHOIC CHAMBER 1	Semi-anechoic 3m	8882A-2

2.4 Test set-up

This is the principle block diagram. The serial numbers were different at the set-up of this test report. For the serial number of the equipment under test see first page.

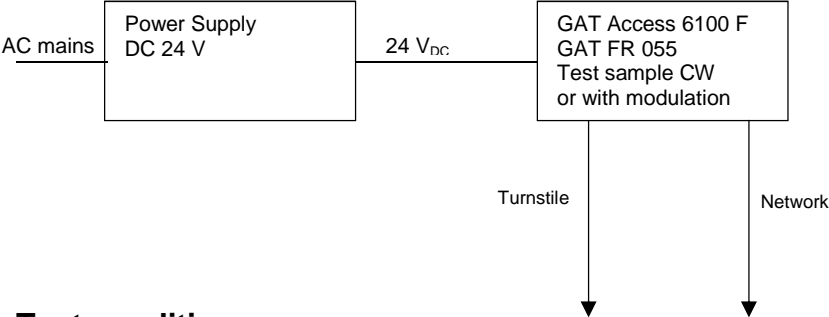

2.5 Test conditions

The radiated emission tests of the GAT Access 6100 F were done with CW and with modulation. If not additionally specified, the tests were performed under the following environmental conditions:

Parameter	Normal
Supplying voltage	24 V _{DC}
Nominal voltage range	12/24 V _{DC}
Permitted input voltage:	10 to 28 V _{DC}



3 Test summary

The results in this report apply only to the tested sample:

Test	Result	Section in report	Note
Standard test methods			
AC power-line conducted tests	Pass	See EMC report	Class A
Radiated test below 30 MHz	Pass	4, 5	
Radiated emissions measurements from 30 to 1000 MHz	Pass	6	
Determination of radiated and antenna conducted emissions above 1 GHz	NA		
Frequency Stability Test	Pass	7	
Occupied bandwidth test	Pass	8	
Output Power average symbol envelope power	NA		
Power Spectral Density < 40 GHz	NA		
Power Spectral Density > 40 GHz	NA		
In-situ measurements	NA		
Polar plot, main lobe and variation on radiated emissions test	NA		
Device-specific tests			
Measurement of cable locating equipment	NA		
Determining of cordless telephone handset security code	NA		
Determination of total input power	NA		
Procedure determining compliance for periodic operation [15.231, 15.240(b)]	NA		
Determining the average value of pulsed emissions per 15.35(c)	NA		
Comparison of limits per 15.231(b)(3)	NA		
Procedure to determine compliance of frequency pairing for 47 CFR 15.233(b)(2)	NA		
Determination of frequency hopping compliance per 47 CFR 15.247	NA		
Determination of digital modulation compliance per 47 CFR 15.247	NA		
Determination of peak conducted output unlicensed wireless device power [15.247(b), 15.255]	NA		
Determination of maximum conducted output power (15.247, 15-E)	NA		
Determination of MIMO compliance (2nd edition)	NA		
Determination of Smart antenna compliance (2nd edition)	NA		
Determination of antenna gains, including those emitting in multiple directions (15.247)	NA		
Determination of compliance with RF exposure limits	NA		
Millimeter wave test procedures for systems operating at 54GHz and greater	NA		
Determination of EIRP (15-F)	NA		
Determination Transmitter Etiquette FCC Part 15.255	NA		
Determination of Dynamic Frequency Selection (DFS) including Channel Move Time and In Service Monitoring	NA		
Determination of channel availability	NA		
Determination of Dynamic Frequency Selection including Channel Move Time	NA		
Determination of transmitter power control (TPC) (15-E)	NA		
Peak excursion measurement for UNII devices	NA		
Determination of UWB bandwidth	NA		
Determination of the center frequency, f_C , and highest radiated emissions, f_M (15-F)	NA		

NT = Not Tested, by request of the Client

NA = Not Applicable

4 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)

Date of test:	2015-03-09	Test location:	Anechoic chamber 1
EUT Serial:	1444176	Ambient temp.	21.5 °C
Tested by:	UGR	Relative humidity	31 %
Test result:	Pass	Margin:	> 50 dB

4.1 Requirement

Reference: FCC §15.225 (a) – (c) and IC RSS-210, Issue 8, section A2.6
 Methods of measurement: ANSI C63.10, Clause 6.4 and RSS-Gen 6.13 / 8.9
 The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).


Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)	Field strength (dBµV/m)	Measurement distance (m)
13.110 - 13.410	106	40.5	30	80.5	3
13.410 - 13.553	334	50.5	30	90.5	3
13.553 - 13.567	15848	84.0	30	124.0	3
13.567 - 13.710	334	50.5	30	90.5	3
13.710 - 14.010	106	40.5	30	80.5	3

4.2 Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.
 The test was carried out automatically by the test receiver.
 The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

4.3 Test data

Overview sweeps performed with peak detectors

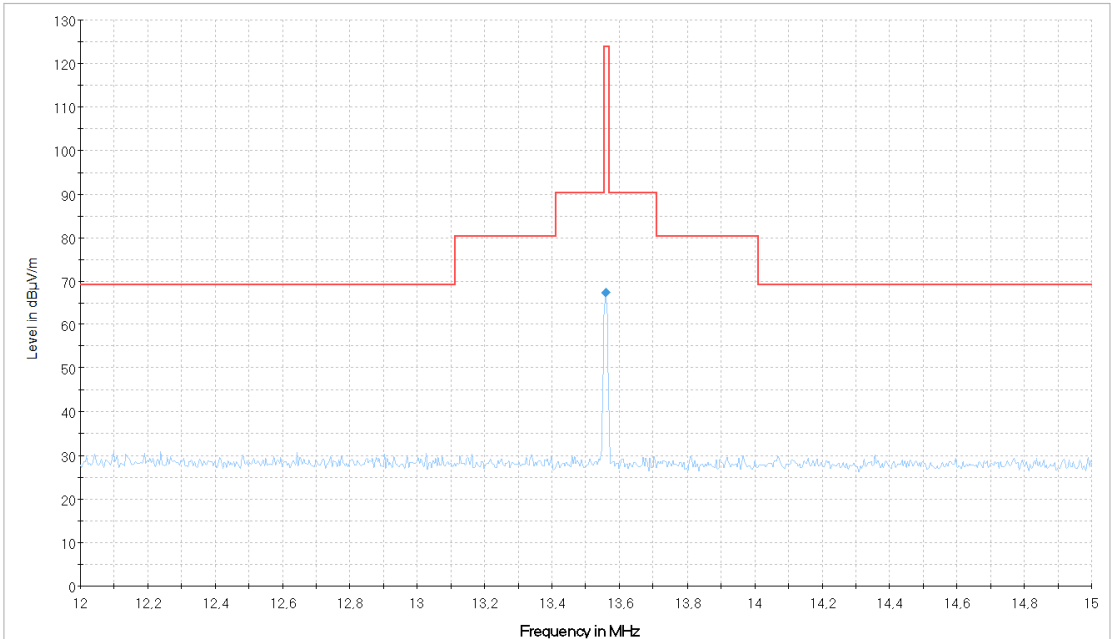

Frequency MHz	Disturbance Level dBµV/m	RBW kHz	Detector	Limit dBµV/m	Margin dB
13.56	67.4	100	Peak	124	56.6

4.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2015-06
Loop antenna, 9 kHz- 30 MHz	Rohde & Schwarz	HFH2-Z2	PM KF 1401	2016-03

5 Radiated test below 30 MHz

Date of test:	2015-03-09	Test location:	Anechoic chamber 1
EUT Serial:	1444176	Ambient temp.	21.5 °C
Tested by:	UGR	Relative humidity	31.0 %
Test result:	Pass	Margin:	>30 dB

5.1 Requirement

Reference: FCC §15.225 (d)/ §15.209 and IC RSS-210, Issue 8, section A2.6

Methods of measurement: ANSI C63.10, Clause 6.4 and RSS-Gen 6.13 / 8.9

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31)

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
1.705 - 13.110	30	29.5	30
14.010 - 30.000	30	29.5	30


Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.

5.2 Test setup details

see 4.2

5.3 Test data

FCC 15.209_15.225 9kHz-30MHz

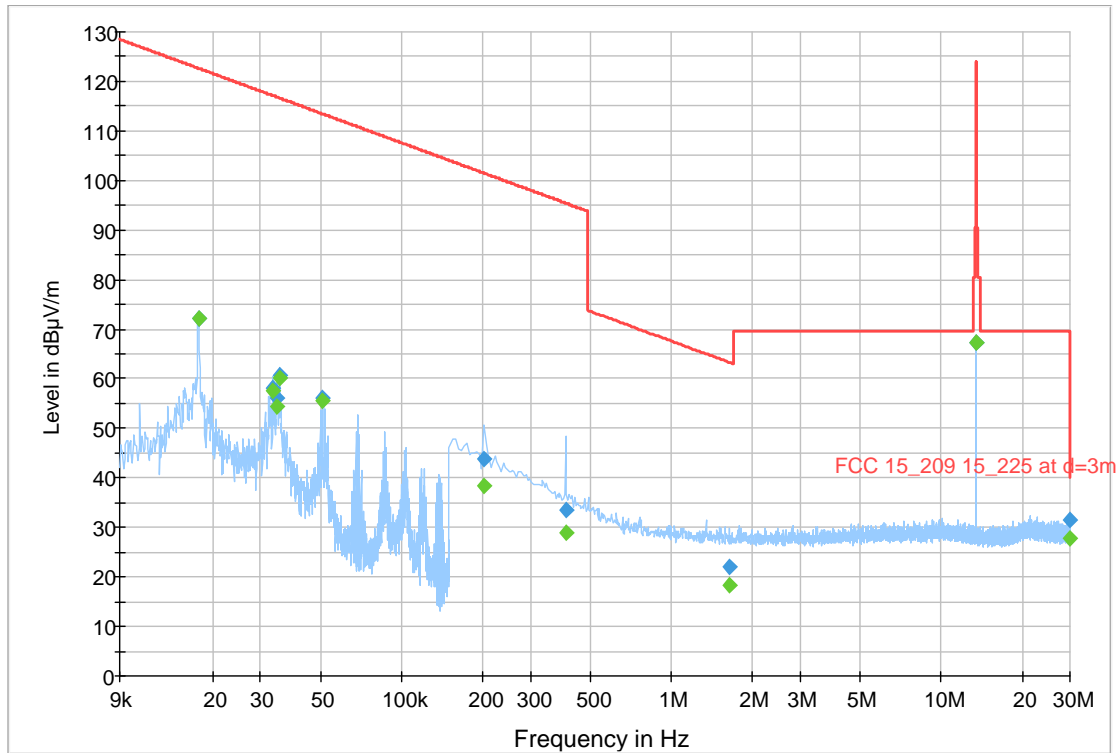

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
0.017640	72.3	5000.0	0.200	100.0	H	330.0	21.6	50.4	122.7
0.033400	58.2	5000.0	0.200	100.0	H	92.0	20.8	59.0	117.1
0.034520	56.1	5000.0	0.200	100.0	H	286.0	20.8	60.7	116.8
0.035320	60.8	5000.0	0.200	100.0	H	216.0	20.8	55.8	116.6
0.051080	56.0	5000.0	0.200	100.0	H	131.0	20.6	57.4	113.4
0.202000	43.7	5000.0	9.000	100.0	H	-1.0	20.4	57.8	101.5
0.406000	33.6	5000.0	9.000	100.0	H	18.0	20.4	61.9	95.4
1.642000	22.1	5000.0	9.000	100.0	H	240.0	20.4	41.2	63.3
13.558000	67.4	5000.0	9.000	100.0	H	174.0	20.1	56.6	124.0
30.000000	31.4	5000.0	9.000	100.0	V	122.0	20.1	38.6	70.0

Final Result 2

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Comment
0.017640	72.2	5000.0	0.200	100.0	H	330.0	21.6	
0.033400	57.6	5000.0	0.200	100.0	H	92.0	20.8	
0.034520	54.5	5000.0	0.200	100.0	H	286.0	20.8	
0.035320	60.1	5000.0	0.200	100.0	H	216.0	20.8	
0.051080	55.5	5000.0	0.200	100.0	H	131.0	20.6	
0.202000	38.5	5000.0	9.000	100.0	H	-1.0	20.4	
0.406000	28.9	5000.0	9.000	100.0	H	18.0	20.4	
1.642000	18.3	5000.0	9.000	100.0	H	240.0	20.4	
13.558000	67.3	5000.0	9.000	100.0	H	174.0	20.1	



5.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2015-06
Loop antenna, 9 kHz-30 MHz	Rohde & Schwarz	HFH2-Z2	PM KF 1401	2016-03



6 Radiated emissions measurements from 30 MHz to 1000 MHz

Date of test:	2015-03-09	Test location:	Anechoic chamber 1
EUT Serial:	1444176	Ambient temp.	21.5 °C
Tested by:	UGR	Relative humidity	31.0 %
Test result:	Pass	Margin:	5.7 dB

6.1 Requirement

Reference: FCC §15.225 (d)/ §15.209 and IC RSS-210, Issue 8, section A2.6
Methods of measurement: ANSI C63.10, Clause 6.5 and RSS-Gen 6.13 / 8.9

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3


6.2 Test setup details

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

6.3 Test data

Overview sweeps performed with peak detectors and final measurement with quasi-peak detectors.

FCC Class B QP 30-1000MHz

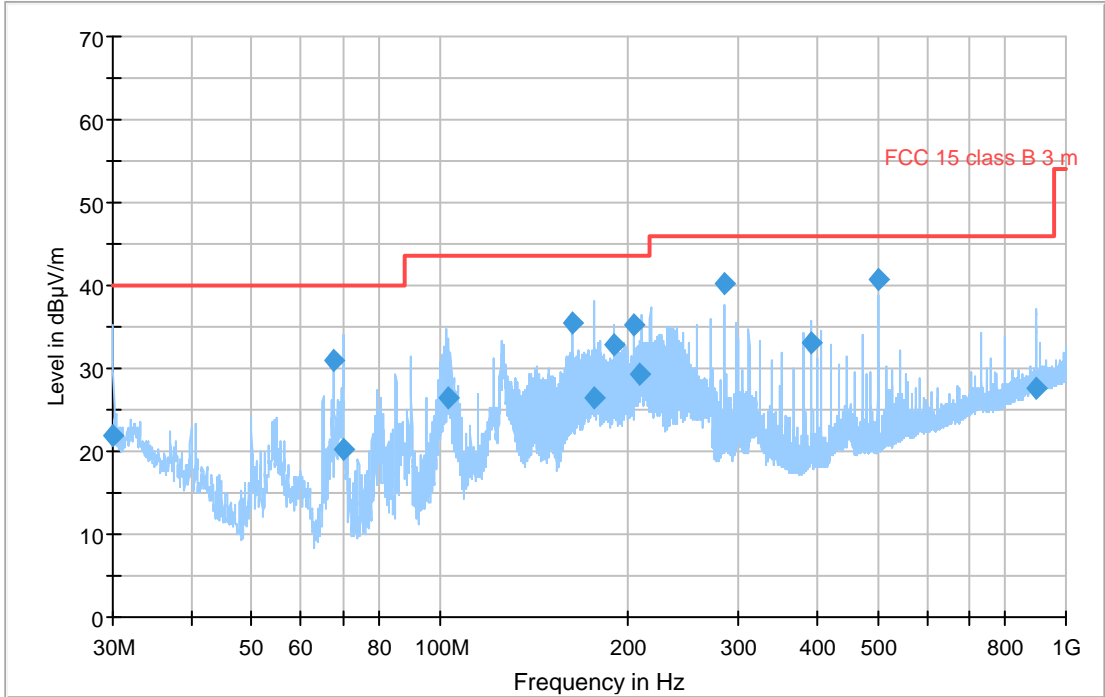

Final Result 1

Frequency (MHz)	QP (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
30.090000	21.9	1000.0	120.000	100.0	V	-12.0	20.6	18.1	40.0	
67.800000	31.0	1000.0	120.000	232.0	H	195.0	7.7	9.0	40.0	RFID transmitter
70.110000	20.2	1000.0	120.000	200.0	V	75.0	8.4	19.8	40.0	
102.780000	26.4	1000.0	120.000	116.0	H	-28.0	11.6	17.1	43.5	
162.660000	35.6	1000.0	120.000	100.0	V	242.0	10.4	7.9	43.5	RFID transmitter
175.800000	26.3	1000.0	120.000	207.0	H	135.0	11.1	17.2	43.5	RFID transmitter
189.780000	32.9	1000.0	120.000	144.0	H	132.0	10.4	10.6	43.5	RFID transmitter
203.370000	35.3	1000.0	120.000	100.0	H	133.0	10.7	8.2	43.5	RFID transmitter
209.160000	29.2	1000.0	120.000	112.0	H	133.0	10.8	14.3	43.5	
284.730000	40.3	1000.0	120.000	112.0	H	146.0	14.4	5.7	46.0	RFID transmitter
393.180000	33.1	1000.0	120.000	130.0	V	195.0	18.0	12.9	46.0	RFID transmitter
500.010000	40.8	1000.0	120.000	100.0	V	-22.0	20.7	5.2	46.0	
895.950000	32.4	1000.0	120.000	271.0	H	218.0	27.9	13.6	46.0	RFID transmitter Manual measurement

6.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2015-06
Antenna, 30-3000 MHz	Rohde & Schwarz	HL 562	PM KF 1123	2016-01

7 Frequency stability measurements

Date of test:	2015-04-14	Test location:	Temperature chamber
EUT Serial:	1444176	Ambient temp.	See test data
Tested by:	UGR	Relative humidity	---
Test result:	Pass		

7.1 Requirement

Reference: FCC §15.225 (e) and IC RSS-210, Issue 8, section A2.6/ RSS-Gen Issue 4, section 6.12
 Methods of measurement: ANSI C63.10, Clause 6.5

Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	0°C to +60°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)

7.2 Test data

Temperature °C	Carrier MHz	Voltage 10 V _{DC}		Voltage 12 V _{DC}		Voltage 24 V _{DC}		Voltage 28 V _{DC}	
		Frequency deviation		Frequency deviation		Frequency deviation		Frequency deviation	
		kHz	%	kHz	%	kHz	%	kHz	%
-30	13.558083	0,44	0,003	0,44	0,003	0,44	0,003	0,44	0,003
-20	13.558083	0,40	0,003	0,40	0,003	0,40	0,003	0,40	0,003
-10	13.558083	0,30	0,002	0,30	0,002	0,30	0,002	0,30	0,002
0	13.558083	0,22	0,002	0,21	0,002	0,21	0,002	0,21	0,002
20	13.558083	0,00	0,000	0,00	0,000	0,00	0,000	0,01	0,000
30	13.558083	-0,05	-0,000	-0,05	-0,000	-0,05	-0,000	0,05	0,000
40	13.558083	-0,13	-0,001	-0,13	-0,001	-0,13	-0,001	0,13	0,001
50	13.558083	-0,19	-0,001	-0,19	-0,001	-0,19	-0,001	0,19	0,001
55	13.558083	-0,22	-0,002	-0,22	-0,002	-0,22	-0,002	0,22	0,002

At a temperature of -10°C and a voltage of 10 V the carrier level was reduced for 0.5 dB (minimum value).
 At 55°C and a voltage of 28 V the carrier level was increased for 0.6 dB (maximum value).

7.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2015-06
Near field probe set, 901-6 cm Loop probe	EMCO	7405	PM KF 2441	-/-
Temperature chamber	Heraeus-Vötsch	HT4010	PM KF 1402	2016-02

8 Occupied Bandwidth

Date of test:	2015-03-17	Test location:	Anechoic chamber 1
EUT Serial:	1431000012	Ambient temp.	23.1 °C
Tested by:	UGR	Relative humidity	32.8 %
Test result:	Pass		

8.1 Requirement


Reference: RSS-Gen, Issue 4, 6.6

8.2 Test setup details

The test setup was identical to the test setup at the radiated tests below 30 MHz.

8.3 Test data


Occupied bandwidth (99%) at 12 V power supply

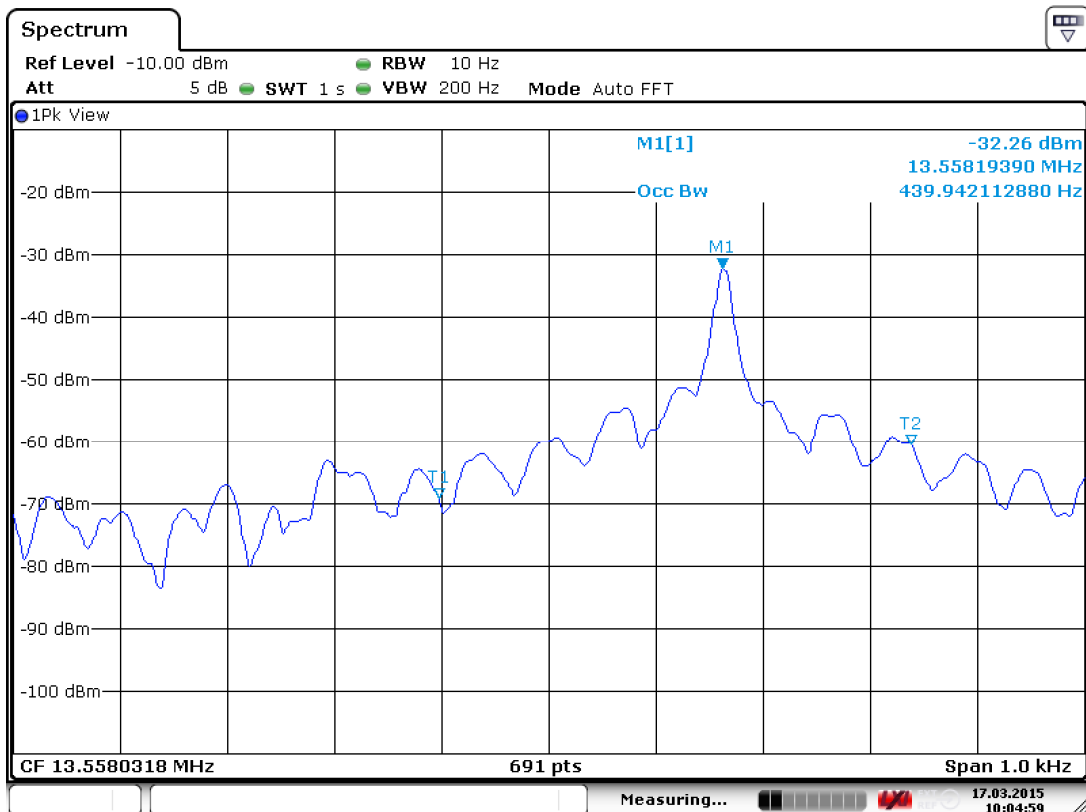

Date: 17.MAR.2015 10:04:59

Test result: The occupied bandwidth is 439.9 Hz

Occupied bandwidth (99%) at 24 V power supply

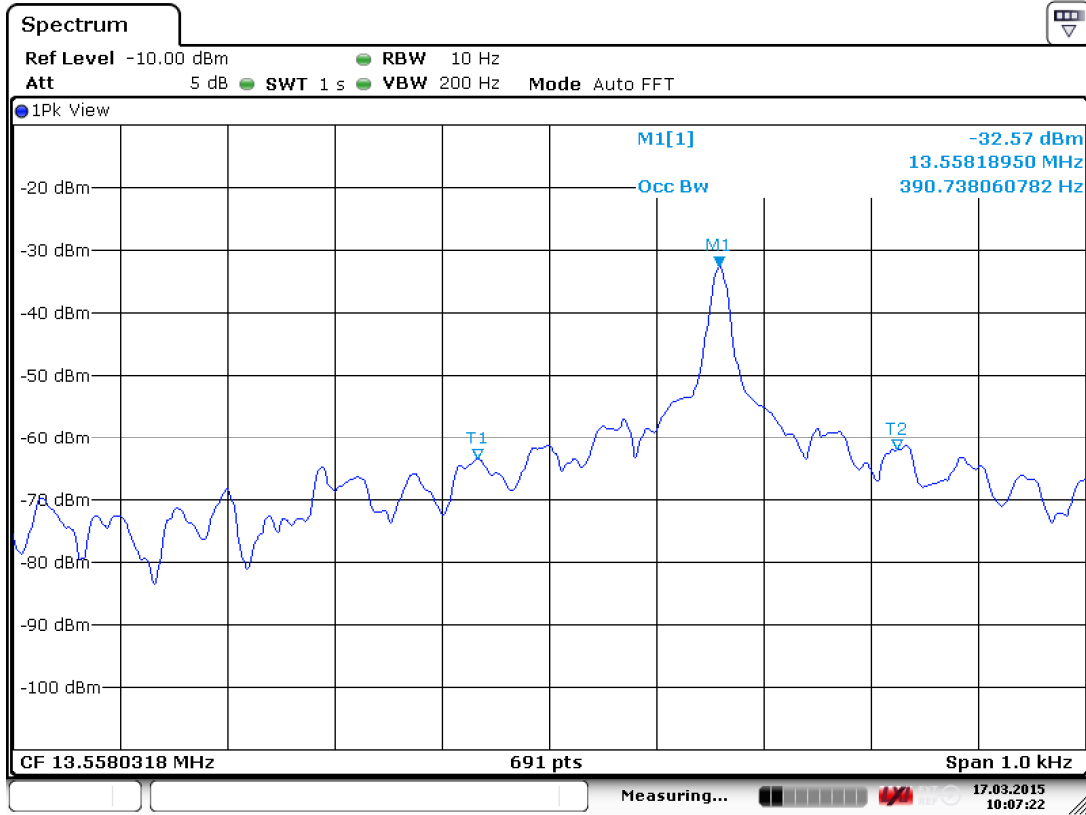

Date: 17.MAR.2015 10:07:22

Test result: The occupied bandwidth is 390.7Hz

8.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer, 10 Hz- 40 GHz	Rohde & Schwarz	FSV 40	PM KF 2783	2015-09
Loop antenna, 9 kHz-30 MHz	Rohde & Schwarz	HFH2-Z2	PM KF 1401	2016-03

9 Photos of the EUT

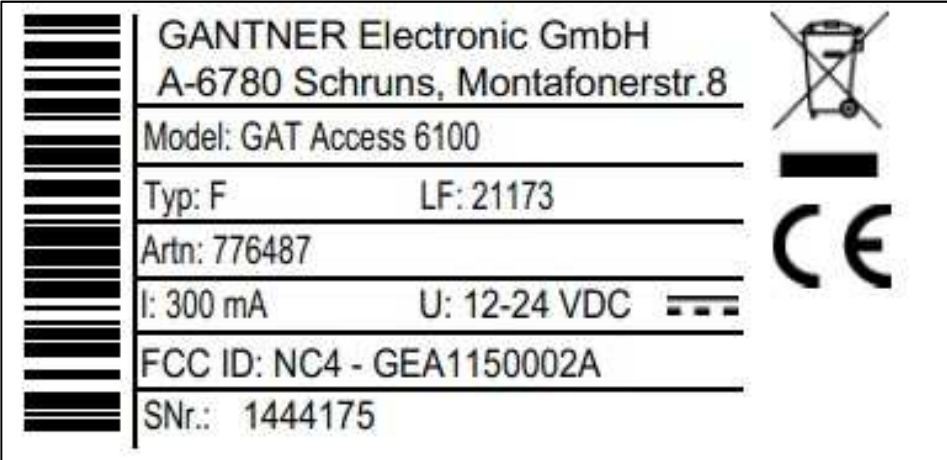


Photo 1: Photo of the rating plate Terminal GAT Access 6100 F Bio

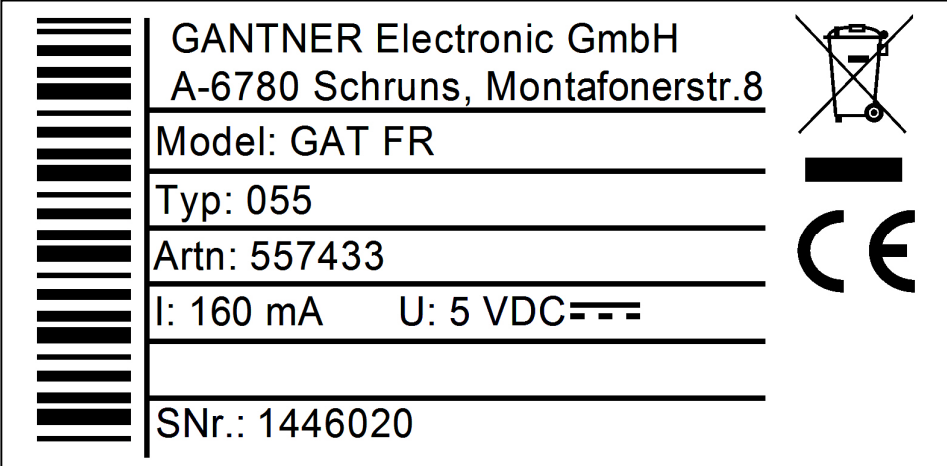


Photo 2: Photo of the rating plate Fingerprint reader GAT FR 055



Photo 3: Front side, chip key input off



Photo 4: Front side, chip key input on



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.