

Gantner Electronic GmbH

TEST REPORT

SCOPE OF WORK

RADIO TESTING – GAT NET.Lock 7020 P / GAT NET.Lock 7020 USB P

REPORT NUMBER

2236263KAU-001

ISSUE DATE

05-August-2019

PAGES

62

DOCUMENT CONTROL NUMBER

R_FCC 15-225_18-01 (25-January-2018)

© 2017 INTERTEK



TYPE: GAT NET.Lock 7020 P / GAT NET.Lock 7020 USB P
DESCRIPTION: electronic locker locks for GAT NET.Lock 7020 controllers
SERIAL NO: 1913000001

The USB unit can be connected or disconnected. Therefore the Lock has the same serial number if a USB unit is connected or not. All measurement results refer to the equipment which was tested.

MANUFACTURER: Gantner Electronic GmbH
CUSTOMER NAME: Gantner Electronic GmbH
ADDRESS (CUSTOMER): Montafonerstraße 8
AT-6780 Schruns
Österreich

REPORT NO: 2236263KAU-001

TEST RESULT: The equipment complies to 47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 / RSS-210, Issue 9 and RSS-GEN, Issue 5 (Referring to the operating modes specified in this report).

TEST LABORATORY: Intertek Deutschland GmbH
Innovapark 20, 87600 Kaufbeuren
Germany

FCC DESIGNATION NUMBER: DE0014

FCC TEST FIRM REGISTRATION NUMBER: 359260

ISED CAB IDENTIFIER: DE0014

ISED #: 24854


TEST ENGINEER: R. Dressler
Technical Manager EMC/ Radio

REVIEWER: U. Gronert
Senior Project Engineer







Details about Accreditations/Acceptances


EMC / Radio National

 <p>DAkKS Deutsche Akkreditierungsstelle D-PL-12085-01-01</p>	<p>The Intertek Deutschland EMC-Lab is accredited by the Deutsche Akkreditierungsstelle GmbH (DAkKS)</p>
	<p>Registration Number (EMC general): D-PL-12085-01-01</p>
	<p>Registration Number (EMC Med): D-PL-12085-01-03</p>

International

 <p>IECEE CB SCHEME</p>	<p>The Intertek Deutschland EMC-Lab is accepted to participate in the IECEE (IEC Conformity assessment for Electrotechnical Equipment and Components) CB-Scheme</p> <p>CB Test Laboratory: TL118</p>
 <p>FCC Federal Communications Commission</p>	<p>The Intertek Deutschland EMC-Lab is accredited for the Federal Communications Commission (FCC)</p> <p>Designation Number: DE0014 Test Firm Registration Number: 359260</p>
 <p>Bundesnetzagentur BNetzA-CAB-16/21-10</p>	<p>The <i>Bundesnetzagentur</i> recognizes Intertek Deutschland GmbH as Conformity Assessment Body in the sector electromagnetic compatibility (EMC).</p>
 <p>Innovation, Science and Economic Development Canada</p>	<p>The Intertek Deutschland EMC-Lab is accredited for Innovation, Science and Economic Development Canada (ISED)</p> <p>ISED CAB IDENTIFIER: DE0014 ISED #: 24854</p>

Automotive

 <p>KBA Anerkennungsstelle Anerkannt unter KBA-P 00046-03</p>	<p>The Intertek Deutschland EMC-Lab is recognized as technical service of the Kraftfahrt-Bundesamt (KBA)</p> <p>Registration Number: KBA-P 00046-03</p>
---	--

SECTION 1
CONTENTS

SECTION 2	MEASUREMENT AND TEST SPECIFICATION	5
SECTION 3	GENERAL INFORMATION	6
SECTION 4	SUMMARY OF TESTING	7
4.1	General annotation.....	7
4.2	Measurement uncertainty.....	7
4.3	Omission of tests	7
4.4	Document History.....	7
SECTION 5	TEST RESULTS – OVERVIEW	8
SECTION 6	INFORMATION ABOUT THE EUT	9
6.1	Description of the EUT.....	9
6.2	Power interface	10
6.3	Configuration mode.....	10
6.4	Operation mode.....	11
6.5	Peripheral devices used for testing	12
6.6	Supply and interconnecting cables used for testing.....	12
6.7	Clock frequencies of the EUT.....	12
6.8	Block diagram of the test setup at the radio tests.....	12
SECTION 7	CONFORMANCE REQUIREMENTS.....	13
7.1	Conducted emissions.....	13
7.2	Radiated emissions < 30 MHz	14
7.3	Radiated emissions 30 MHz to 1 GHz	17
7.4	Occupied bandwidth.....	19
SECTION 8	SELECTION OF THE CONTROLLER TYPE FOR FINAL TESTING	22
8.1	Emission tests with all different lock combinations and test diagram No.....	22
8.2	Diagrams conducted spurious emission tests.....	23
8.3	Diagrams radiated emissions < 30 MHz.....	35
8.4	Diagrams radiated emissions 30 MHz to 1 GHz (Pk, Pre-tests).....	47
SECTION 9	MEASUREMENT UNCERTAINTY EVALUATION	61

SECTION 2

MEASUREMENT AND TEST SPECIFICATION

47 CFR Part 15, Subpart C, Intentional radiators, section 15.207 and section 15.225 /
RSS-210, Issue 9 and RSS-GEN, Issue 5

Test methods in:

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

No additions, deviations or exclusions have been made from standards and accreditation.

The test results detailed in this report apply only to the GAT NET.Lock 7020 P /
GAT NET.Lock 7020 USB P with the test setup described. Any modification such as a
change, addition to or inclusion of another device into this product will require an
additional evaluation.

The support equipment listed as part of the emission tests is required to properly exercise
and test the device under test.

SECTION 3
GENERAL INFORMATION

Possible test case verdicts:

Test case does not apply to the test object: N/A (Not Applicable)

Test object does meet the requirement: P (Pass)

Test object does not meet the requirements: F (Fail)

Samples arrived: 2019-04-18

Testing: 2019-04-26 to 2019-06-04

Decimal separator: Point Comma

Environmental conditions during testing:

Temperature:	15 °C - 35 °C
Humidity:	20 % - 60 %
Atmospheric pressure:	900 mbar - 1000 mbar

If explicitly required by a basic standard the measured climatic conditions are documented in the corresponding test section.

SECTION 4**SUMMARY OF TESTING****4.1 General annotation**

The tests were performed in the order of the right column in the “Test Results – Overview” table.

At least at one emission test the margin to the limit is less than 3 dB. A minimum margin of 3 - 6 dB is recommended for a serial production.

4.2 Measurement uncertainty

For each test method, an uncertainty evaluation was carried out. The results of the evaluation can be provided upon request from Intertek Deutschland GmbH.

4.3 Omission of tests

The Frequency Stability Test is not required at the 125 kHz on-board RFID technology for FCC or ISED. The Frequency Stability Test on the 13.56 MHz RFID antenna of the locks GAT NET.Lock 7020 P / GAT NET.Lock 7020 USB P were tested together with the different RFID readers inside of the controller types (GAT NET. Controller S 7020 F/ISO, ... ICLS and ... BA). These tests can be found in the appropriate test reports.

4.4 Document History

REVISION	DATE	REPORT	CHANGES	AUTHOR
Initial release	2019-08-05	2236263KAU-001	Initial issue	RDR

SECTION 5**TEST RESULTS – OVERVIEW**

EMISSION	REQUESTED	VERDICT	DATE
Conducted emissions (AC power-line, 0.15 MHz - 30 MHz)	see 7.1	P	2019-05-13
Radiated emissions (< 30 MHz)	see 7.3	P	2019-05-08
Radiated emissions (30 MHz - 1 GHz)	see 7.4	P	2019-04-26 2019-04-29 2019-04-30
Occupied bandwidth test	see 7.6	P	2019-06-04

SECTION 6

INFORMATION ABOUT THE EUT

6.1 Description of the EUT

<input checked="" type="checkbox"/> table-top EUT	<input type="checkbox"/> floor-standing EUT
---	---

Dimensions:	Height:	Width:	Length:
	P-Type: 25 mm	100 mm	110 mm
	USB P-Type: 37 mm		

Hardware version:	Locks: 3.0	Master Controller: 1.0	SUB Controller BA: 1.5
-------------------	------------	------------------------	------------------------

Description:

The GAT NET.Lock 7020 lock is the ideal solution for the convenient electronic locking of lockers in leisure facilities, universities, company offices, and depot compartments.




The identification of users at the GAT NET.Lock 7020 is carried out using contactless RFID data carriers and NFC technology. To use a locker, the user presses the locker door shut and holds their data carrier or NFC device near the reading field of the GAT NET.Lock 7020. The locking or usage status of the locker is signaled by an LED indicator. The various operating modes enable the flexible use of these locker locks.




The "USB" version of the GAT NET.Lock 7020 is equipped with two USB ports to conveniently charge mobile devices.

Transmitter frequency range: 13.56 MHz

Frequency agile or hopping:	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Antenna:	<input checked="" type="checkbox"/> Internal antenna	<input type="checkbox"/> External antenna
Antenna connector:	<input checked="" type="checkbox"/> None	<input type="checkbox"/> Yes, type
Type of modulation:		
Type of used TAG:	GAT Chip Card 210 ISO (Test Card ISO)	
Temperature range:	<input checked="" type="checkbox"/> FCC requirement: -20°C to +50°C	
	<input checked="" type="checkbox"/> Customers specification of EUT: 0°C to +60°C	
	<input checked="" type="checkbox"/> Testing range: -20°C to +60°C	

6.1.1 Photo of the rating plate

  	Gantner Electronic GmbH, 6780 Schruns / Austria
	Model: GAT NET.Lock 7020 P
	U (in): 5 / 24 VDC I (in): 300 / 500 mA max.
	IC: 11873A-1190149A FCC ID: NC4-GEA1190149A SN: 1913000001 AN: 1100391

  	Gantner Electronic GmbH, 6780 Schruns / Austria
	Model: GAT NET.Lock 7020 USB P
	U (in): 5 / 24 VDC I (in): 300 / 500 mA max. U (out): 5 VDC I (out): 2 A
	IC: 11873A-1190149A FCC ID: NC4-GEA1190149A SN: 1913000001 AN: 1100392

The USB unit can be connected or disconnected. Therefore the Lock has the same serial number if a USB unit is connected or not. All measurement results refer to the equipment which was tested.

6.2 Power interface

MODE	VOLTAGE (V)	FREQUENCY (Hz)	COMMENT
1	120	60	Power supply: Dongguan Dongsong Electronic
2	120	60	Power supply: Adapter Tech.

Power sources/associated test equipment

DEVICE	MANUFACTURER	TYPE	SN	ASSET NO.
4 quadrant amplifier	Spitzenberger & Spies	PAS 5000	826149/005	PM KF 2555
Power supply	Dongguan Dongsong Electronic	DYS404-240166W	-	-
Power supply	Adapter Tech.	ATS090-P240	-	-

6.3 Configuration mode

MODE	DESCRIPTION
1	Three locks were connected to the sub controller unit (sockets: 1, 12, 24)
2	One lock was connected to the controller

6.4 Operation mode

MODE	DESCRIPTION
	<p>General: Pulse transmission with an interval of 250 ms. In 250 ms each lock was transmitting after each other first with 13.56 MHz and secondly with 125 kHz (at the lock versions with "P"). The locks are closed and locked. With a different card (other card number) it was tried to open the lock continuously with the card placed in front of the lock. This way the RFID part is transmitting continuously.</p>
1	<p>Pulse transmission (normal mode) with an interval of 250ms; 13.56 MHz Card; Comparison measurements between the 13.56 MHz tag card and the 125 kHz tag card in front of the lock showed the 13.56 MHz card to be the worst case situation. Therefore all measurements were done with the 13.56 MHz card. At the CE tests no difference between the card frequencies were detectable.</p>

6.5 Peripheral devices used for testing

See power supplies under 6.2


6.6 Supply and interconnecting cables used for testing

LINE	LENGTH (cm)	SHIELDING
Cable between controller and lock	500	Y
Cable between power supply (Type: ATS090-P240) and controller	100	N
Cable between power supply (Type: DYS404-240166W) and controller	35	N
Mains cable	150	N

6.7 Clock frequencies of the EUT

SOURCE	FREQUENCY (MHz)
Processor	24

6.8 Block diagram of the test setup at the radio tests

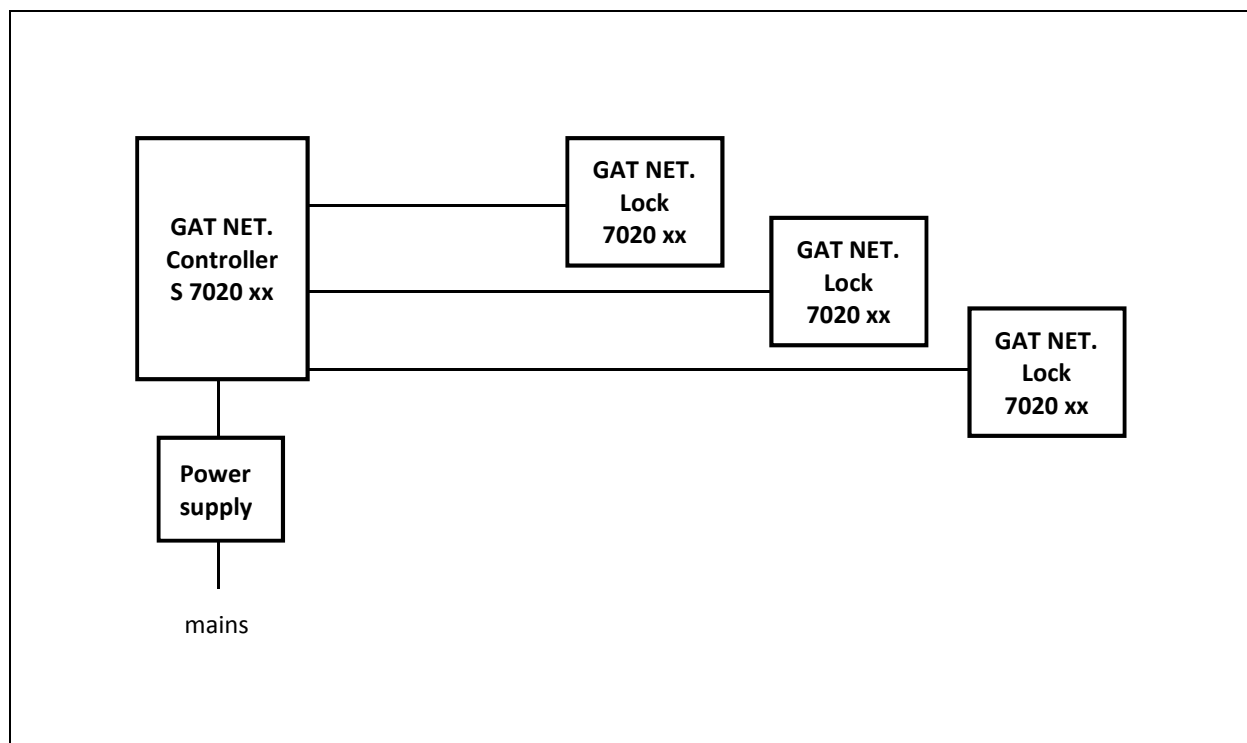

SECTION 7 CONFORMANCE REQUIREMENTS

7.1 Conducted emissions

NORMATIVE REFERENCES		RESULT
Limits according to:	FCC §15.207 RSS-Gen, Section 8.8	P
Methods of measurement according to:	ANSI C63.4	
Equipment mode	Power interface	1
	EUT configuration mode	2
	Operation mode	1
Test requirements	Frequency range	150 kHz - 30 MHz

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Shielded cabin	ETS LINDGREN	RFSD 100	3598	PM KF 2955-2	-
Pulse Limiter 10 dB 9 kHz - 200 MHz	Schwarzbeck	VTSD 9561-F N	9561-F N242	PM KF 3059	2019-01 (1 year)
Receiver 9 kHz - 7 GHz	Rohde & Schwarz	ESR7	101095	PM KF 2441	2018-10 (1 year)
V-Artificial mains-network, 2 Line	Rohde & Schwarz	ESH3-Z5	863367/018	PM KF 0142	2017-10 (2 years)
RF-Cable	Schwarzbeck	AK 9513	95956	PM-KF-2056	2018-10 (2 years)
RF-Cable	Schwarzbeck	RG 58 C/U	-	PM-KF-1103	2018-07 (2 years)
Test software	Rohde & Schwarz	EMC 32 V.8.54	-	PM KF 2983	-

Comment

The conducted emission tests were performed in all different controller combinations according to the table in section 8 with the hereon following measurement diagrams (8.2).

In the conducted emission diagrams, the N and L line are merged.

The two additional controller were added to terminate the interfaces of the EUT for the EMC tests according to FCC, Part 15 B and is described in detail in the appropriate EMC test report.

Because the 125 kHz RFID frequency is outside the to be measured frequency range and no harmonics of the 125 kHz transmitter could be found, no worst case result was detectable.

7.2 Radiated emissions < 30 MHz

NORMATIVE REFERENCES		RESULT
Limits according to:	FCC §15.225 (d), §15.209 RSS-210, Issue 9, section B6	P
Methods of measurement according to:	ANSI C63.10, section 6.3, 6.4 RSS-Gen 6.13, 8.9	
Equipment mode	Power interface	2
	EUT configuration mode	1
	Operation mode	1
Test requirements	Frequency range	9 kHz - 30 MHz
	Antenna height	1 m

Limits

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
1.705 - 13.110	30	29.5	30
14.010 - 30.000	30	29.5	30

Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.

Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber	Siepel	REF W460SLB	-	PM KF 1150-01	2016-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 9 kHz- 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2019-04 (1 year)
Loop antenna 9 kHz- 30 MHz	Rohde & Schwarz	HFH2-Z2	881058/48	PM KF 1401	2017-10 (2 years)
DC power supply for HFH2-Z2	Rohde & Schwarz	HZ-9	101865	PM KF 3455	-
RF-cable	Rohde & Schwarz	HFU2-Z5	11673862	PM KF 1646	2018-12 (1 year)
RF-cable Kabel Micro-Coax UTIFLEX	Rosenberger	LA3-020-5500	010-1788635	PM-KF-3187	2018-06 (1 years)
RF-cable Kabel Micro-Coax UTIFLEX	Rosenberger	LA2-001-7200	010-1786350	PM-KF-3188	2019-03 (1 years)
Test software	Rohde & Schwarz	EMC 32 V.10.01.00	-	PM KF 2983-2	-

Comment

The radiated emission tests < 30 MHz were performed in all different controller combinations according to the table in section 8 with the hereon following measurement diagrams (8.5).

The measurements with the worst case results is marked in the table in section 8.

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 9 kHz – 30 MHz It includes automatic turntable of radius 2 m. It enables manual and fully automatic measurements.

To find the highest level of radiation

- the height of the antenna is 1m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dBμV)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dBμV/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$

7.3 Radiated emissions 30 MHz to 1 GHz

NORMATIVE REFERENCES		RESULT
Limits according to:	FCC §15.225 (d), §15.209 RSS-210, Issue 9, section B6	P
Methods of measurement according to:	ANSI C63.10, section 6.3, 6.5 RSS-Gen 6.13, 8.9	
Equipment mode	Power interface	2
	EUT configuration mode	1
	Operation mode	1
Test requirements	Frequency range	30 MHz - 1 GHz

Limits

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

Test setup details

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

Overview sweeps performed with peak detectors and final measurement with quasi-peak detectors. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber	Siepel	REF W460SLB	-	PM KF 1150-01	2016-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 9 kHz- 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2018-04 (1 year)
Antenna 30 MHz - 3GHz	Rohde & Schwarz	HL 562	100354	PM KF 1123	2018-03 (2 years)
RF-cable	Rohde & Schwarz	HFU2-Z5	11673862	PM KF 1646	2018-12 (1 year)
RF-cable Kabel Micro-Coax UTIFLEX	Rosenberger	LA3-020-5500	010-1788635	PM-KF-3187	2018-06 (1 years)
RF-cable Kabel Micro-Coax UTIFLEX	Rosenberger	LA2-001-7200	010-1786350	PM-KF-3188	2019-03 (1 years)
Test software	Rohde & Schwarz	EMC 32 V.10.01.00	-	PM KF 2983-2	-

Comment

The radiated emission test from 30 MHz to 1 GHz was performed in all different controller combinations as peak pre-measurements according to the table in section 8 with the hereon following measurement diagrams (8.6).

Because the 125 kHz RFID frequency is outside the to be measured frequency range and no harmonics of the 125 kHz transmitter could be found, no worst case result was detectable.

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 30 MHz – 18 GHz (40 GHz). It includes automatic antenna mast of height 4 m and turntable of radius 2 m. It enables both manual and fully automatic measurements. To find the highest level of radiation

- the height of the antenna is scanned in range 1m to 4 m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation. The calculations are performed automatically by the measurement software EMC 32. As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dBμV)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dBμV/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$


7.4 Occupied bandwidth

NORMATIVE REFERENCES		RESULT
Limits according to:	RSS-Gen, Issue 5, 6.7	P
Methods of measurement according to:	RSS-Gen, Issue 5, 6.7	
Equipment mode	Power interface	1
	EUT configuration mode	2
	Operation mode	3

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Spectrum analyser	Rohde & Schwarz	FSV40	837356/012	PM KF 2783	2018-09 (1 year)
Loop antenna	Rohde & Schwarz	HZ-10	100055	PM KF 0965	2017-04 (3 year)

Measurement results - 99% occupied bandwidth – with GAT NET.Controller S 7020 BA:

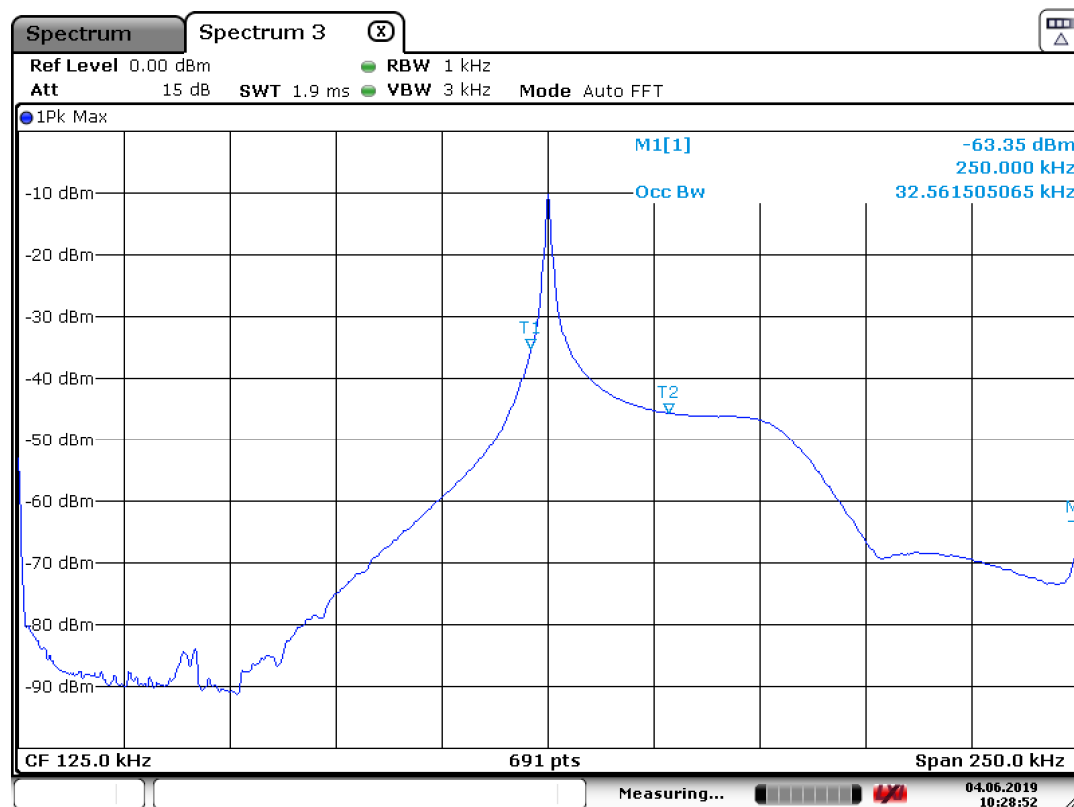


Date: 4.JUN.2019 10:28:52

Comment

The 99% occupied bandwidth is 32.562 kHz at the 125 kHz RFID. The test was done with the lock type GAT NET.Lock 7020 USB P. The USB unit can be connected or disconnected. Therefore the Lock has the same serial number if a USB unit is connected or not. The test results are also valid for the GAT NET.Lock 7020 P.

Measurement results - 99% occupied bandwidth – with GAT NET.Controller S 7020 F/ISO:

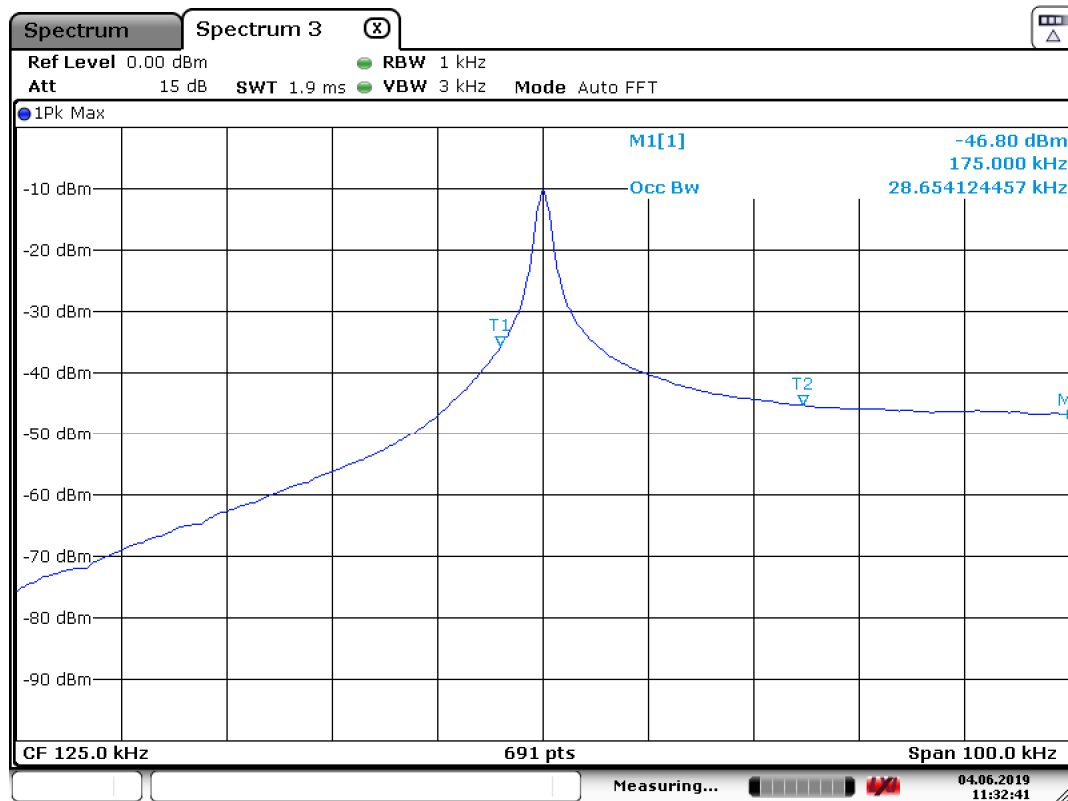


Date: 4.JUN.2019 11:32:41

Comment

The 99% occupied bandwidth is 28.654 kHz at the 125 kHz RFID. The test was done with the lock type GAT NET.Lock 7020 USB P. The USB unit can be connected or disconnected. Therefore the Lock has the same serial number if a USB unit is connected or not. The test results are also valid for the GAT NET.Lock 7020 P.

Measurement results - 99% occupied bandwidth – with GAT NET.Controller S 7020 ICLS:

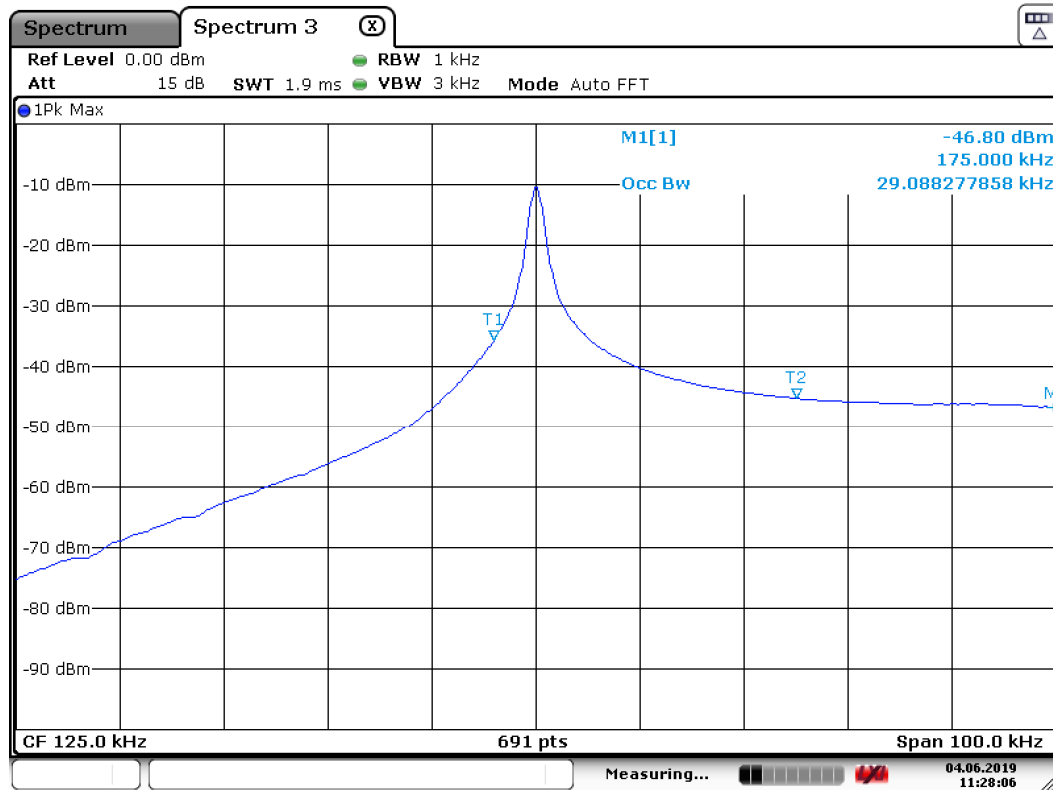

Date: 4.JUN.2019 11:28:06

Comment

The 99% occupied bandwidth is 29.088 kHz at the 125 kHz RFID. The test was done with the lock type GAT NET.Lock 7020 USB P. The USB unit can be connected or disconnected. Therefore the Lock has the same serial number if a USB unit is connected or not. The test results are also valid for the GAT NET.Lock 7020 P.


SECTION 8

SELECTION OF THE CONTROLLER TYPE FOR FINAL TESTING

8.1 Emission tests with all different lock combinations and test diagram No.

GAT NET.Lock 7020 P	Frequency Range		
	CE 150 kHz- 30 MHz*	RE 9 kHz- 30 MHz	RE 30 MHz- 1 GHz Pre-tests (Pk) **
GAT NET.Controller S 7020 BA	1	7	13
GAT NET.Controller S 7020 F/ISO	3	8	14
GAT NET.Controller S 7020 ICLS	5	9	15

GAT NET.Lock 7020 USB P	Frequency Range		
	CE 150 kHz- 30 MHz*	RE 9 kHz- 30 MHz	RE 30 MHz- 1 GHz Pre-tests (Pk) **
GAT NET.Controller S 7020 BA	2	10	16
GAT NET.Controller S 7020 F/ISO	4	11	17
GAT NET.Controller S 7020 ICLS	6	12	18

 Worst case result at 125 kHz


* outside the 13.56 MHz transmitter's fundamental emission band (spurious emissions).
Because the 125 kHz RFID frequency is outside the to be measured frequency range and no harmonics of the 125 kHz transmitter could be found, no worst case result was detectable.

** Because the 125 kHz RFID frequency is outside the to be measured frequency range and no harmonics of the 125 kHz transmitter could be found, no worst case result was detectable.

8.2 Diagrams conducted spurious emission tests

1 EUT: GAT NET.Controller S 7020 BA with **Lock 7020 P**
 Project No.: 36260
 Test description: Conducted Emissions, outside the 13.56 MHz transmitter's fundamental emission band
 Test standard: FCC Part 15 Subpart B, § 15.207
 Tested port: Mains, 120 V/ 60 Hz
 Test verdict: Pass
 Operating conditions: Pulse transmission (normal mode) with an interval of 250ms; 13.56 MHz Card
 Operator name: RDR
 Date of testing: 2019-05-13

EN-CE-R32-LN01

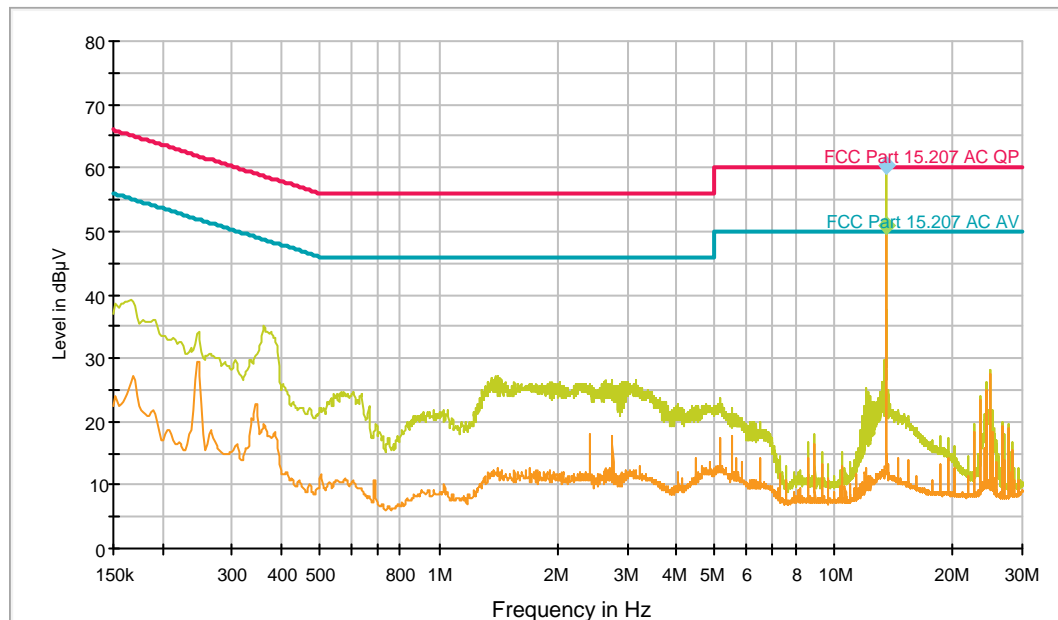

— FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\
— FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\
— Preview Result 1-QPK [Preview Result 1.Result:1]
— Preview Result 2-CAV [Preview Result 2.Result:2]
◆ Final Result 1-QPK [Final Result 1.Result:1]
◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	60.3	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	50.9	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

2 EUT: GAT NET.Controller S 7020 BA with **Lock 7020 USB P**
Project No.: 36260
Test description: Conducted Emissions,
 outside the 13.56 MHz transmitter's fundamental emission band
Test standard: FCC Part 15 Subpart B, § 15.207
Tested port: Mains, 120 V/ 60 Hz
Test verdict: Pass
Operating conditions: Pulse transmission (normal mode) with an interval of 250ms;
 13.56 MHz Card
Operator name: RDR
Date of testing: 2019-05-13

EN-CE-R32-LN01

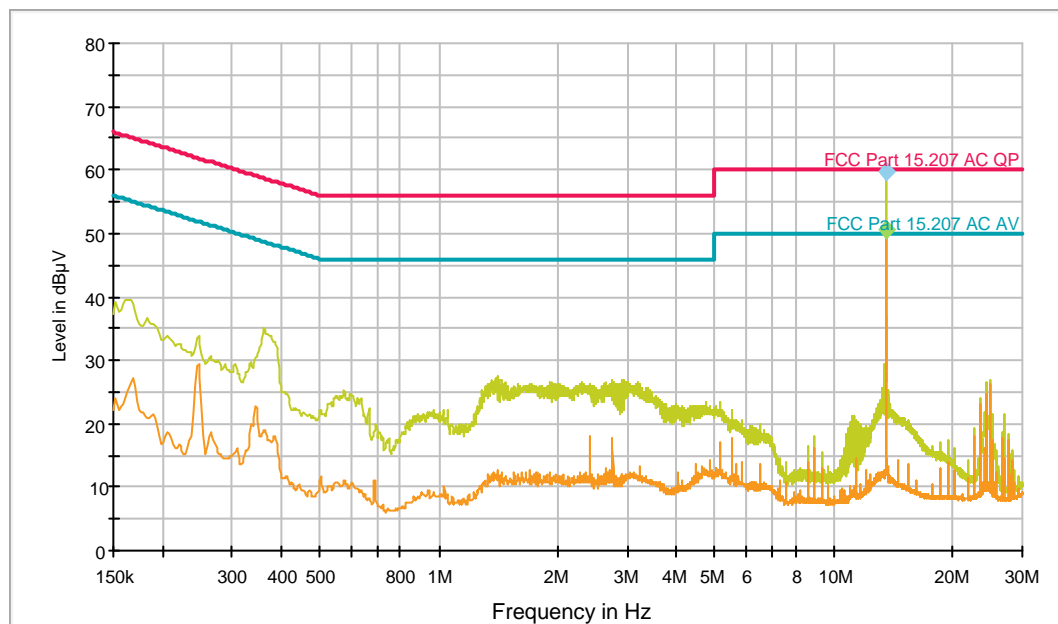

- FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\]
- FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- Preview Result 2-CAV [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	59.7	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	50.6	GND	N	10.8	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

3 EUT: GAT NET.Controller S 7020 F/ISO with **Lock 7020**
Project No.: 36259
Test description: Conducted Emissions,
 outside the 13.56 MHz transmitter's fundamental emission band
Test standard: FCC Part 15 Subpart B, § 15.207
Tested port: Mains, 120 V/ 60 Hz
Test verdict: Pass
Operating conditions: Pulse transmission (normal mode) with an interval of 250ms;
 13.56 MHz Card
Operator name: RDR
Date of testing: 2019-05-13

EN-CE-R32-LN01

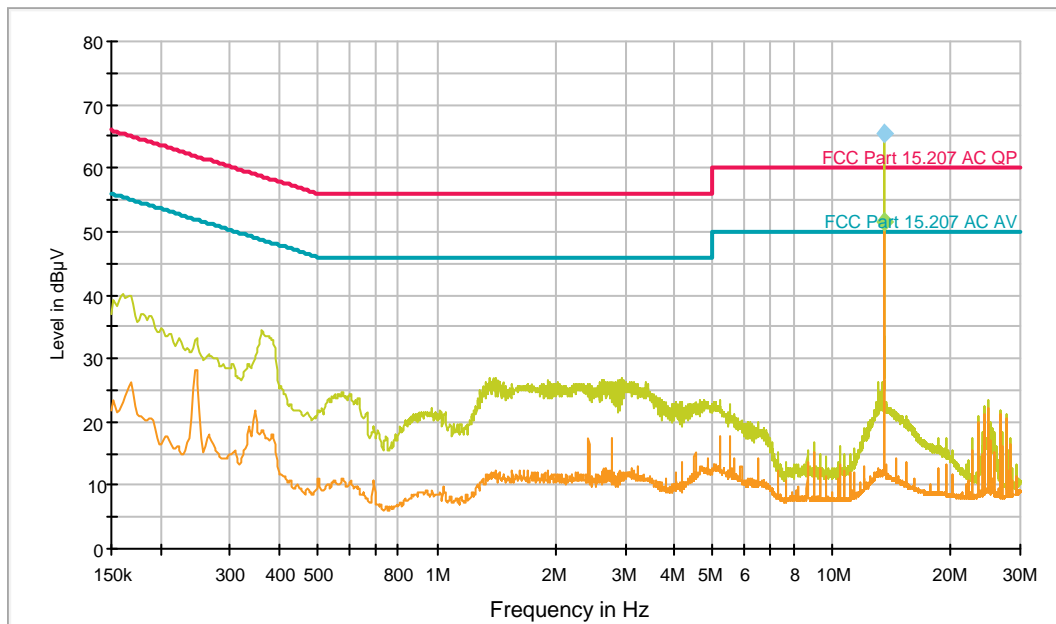

- FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\]
- FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- Preview Result 2-CAV [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	65.4	GND	N	10.8	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	51.6	GND	N	10.8	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

4 EUT: GAT NET.Controller S 7020 F/ISO with **Lock 7020 USB**
Project No.: 36259
Test description: Conducted Emissions,
 outside the 13.56 MHz transmitter's fundamental emission band
Test standard: FCC Part 15 Subpart B, § 15.207
Tested port: Mains
Test verdict: Pass
Operating conditions: Pulse transmission (normal mode) with an interval of 250ms;
 13.56 MHz Card
Operator name: RDR
Date of testing: 2019-05-13

EN-CE-R32-LN01

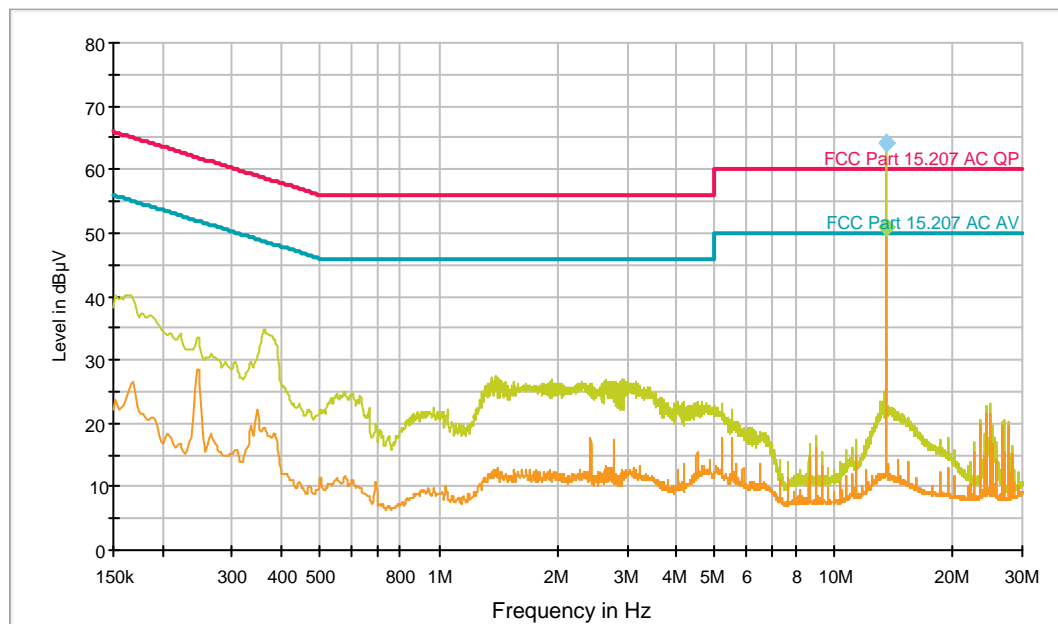

- FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\]
- FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- Preview Result 2-CAV [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	64.1	GND	N	10.8	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	51.0	GND	N	10.8	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

5 EUT: GAT NET.Controller S 7020 ICLS with **Lock 7020**
Project No.: 36261
Test description: Conducted Emissions, outside the 13.56 MHz transmitter's fundamental emission band
Test standard: FCC Part 15 Subpart B, § 15.207
Tested port: Mains, 120 V/ 60 Hz
Test verdict: Pass
Operating conditions: Pulse transmission (normal mode) with an interval of 250ms; 13.56 MHz Card
Operator name: RDR
Date of testing: 2019-05-13

EN-CE-R32-LN01

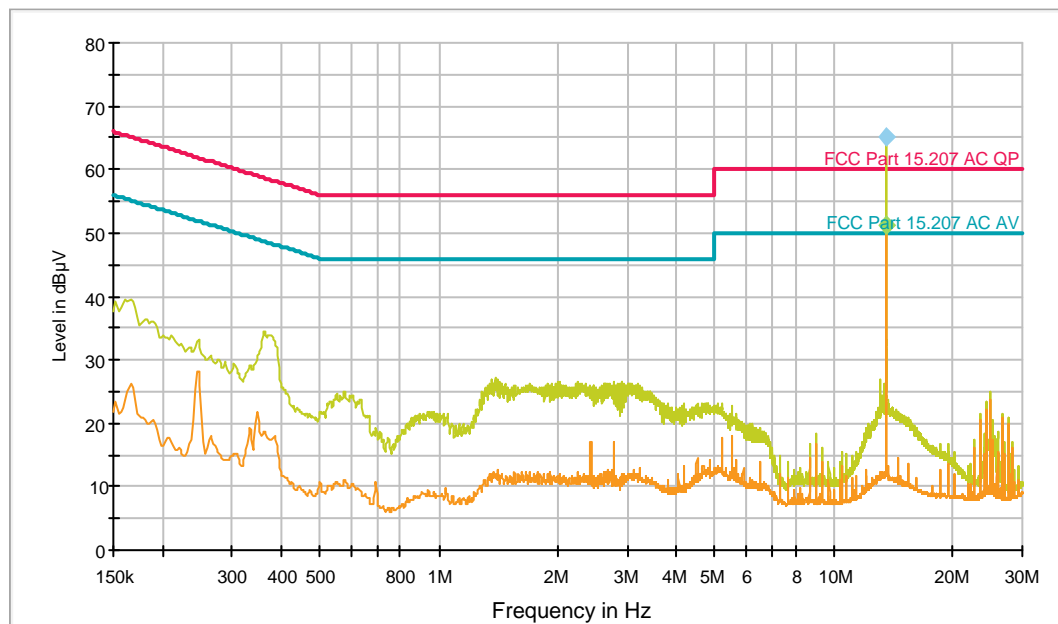

- FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\]
- FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- Preview Result 2-CAV [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	65.1	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	51.3	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

6 EUT: GAT NET.Controller S 7020 ICLS with **Lock 7020 USB**
Project No.: 36261
Test description: Conducted Emissions, outside the 13.56 MHz transmitter's fundamental emission band
Test standard: FCC Part 15 Subpart B, § 15.207
Tested port: Mains, 120 V/ 60 Hz
Test verdict: Pass
Operating conditions: Pulse transmission (normal mode) with an interval of 250ms; 13.56 MHz Card
Operator name: RDR
Date of testing: 2019-05-13

EN-CE-R32-LN01

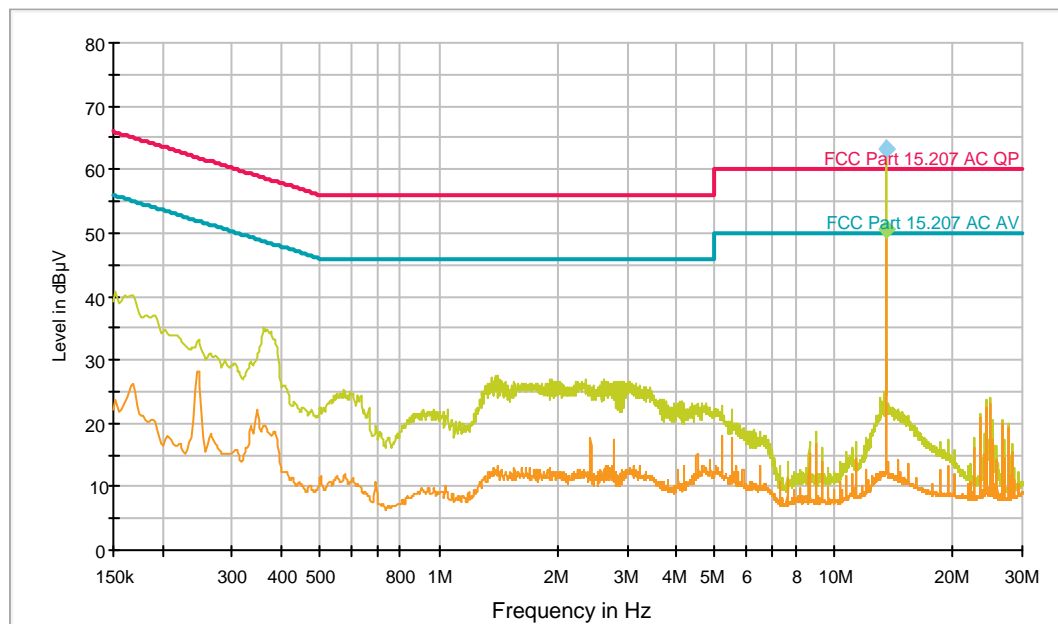

- FCC Part 15.207 AC QP [..\EMI conducted\FCC Part 15 Subpart C\]
- FCC Part 15.207 AC AV [..\EMI conducted\FCC Part 15 Subpart C\]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- Preview Result 2-CAV [Preview Result 2.Result:2]
- ◆ Final Result 1-QPK [Final Result 1.Result:1]
- ◆ Final Result 2-CAV [Final Result 2.Result:1]

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	63.1	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

Final Result 2

Frequency (MHz)	CAverage-ClearWrite (dBµV)	PE	Line	Corr. (dB)	Comment
13.560000	50.5	GND	L1	11.0	Result not relevant, because it's the transmitter's fundamental emission band

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
 Measurement Type: 2 Line LISN
 Frequency Range: 150 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:
 Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB


Receiver: [ESR 7]

Data Reduction:
 Limit Line #1: FCC Part 15.207 AC QP
 Limit Line #2: FCC Part 15.207 AC AV
 Peak Search: 6 dB , Maximum Results: 10
 Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
 Acceptance Offset: -10 dB
 Maximum Number of Results: 20
 After Data Reduction: Interactive data reduction

Report Settings:
 Report Template: Standard Report_EMK KF_Conducted Emission

8.3 Diagrams radiated emissions < 30 MHz

7 EUT:	GAT NET.Controller S 7020 BA with 3x Lock 7020 P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36260
Date:	08.05.2019
Comment:	Card 13.56 MHz

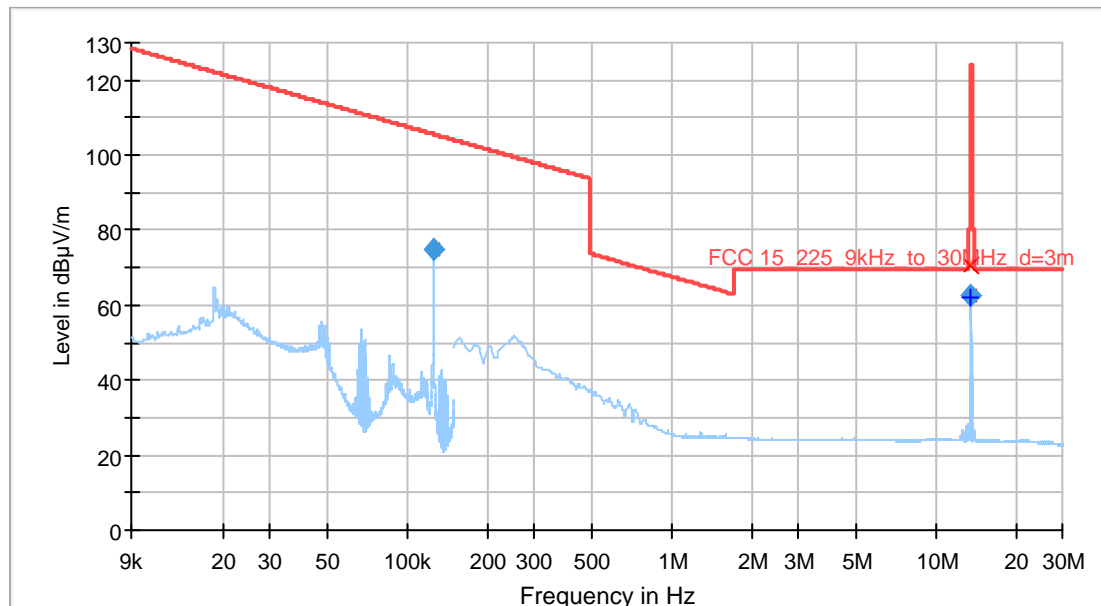

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]
- × MaxPeak-PK+ (Single) [Result Table_Single.Result:1]
- + QuasiPeak-QPK (Single) [Result Table_Single.Result:2]
- × Average-AVG (Single) [Result Table_Single.Result:3]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	75.01	---	105.66	30.65	1000.0	0.200	V	88.0
13.560000	62.82	---	124.00	61.18	1000.0	9.000	V	220.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	18:37:02 - 08.05.2019
13.560000	20	Pk: 71,22


EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V/m - 130 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

8 EUT:	GAT NET.Controller S 7020 BA with 3x Lock 7020 USB P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36260
Date:	08.05.2019
Comment:	Card 13.56 MHz

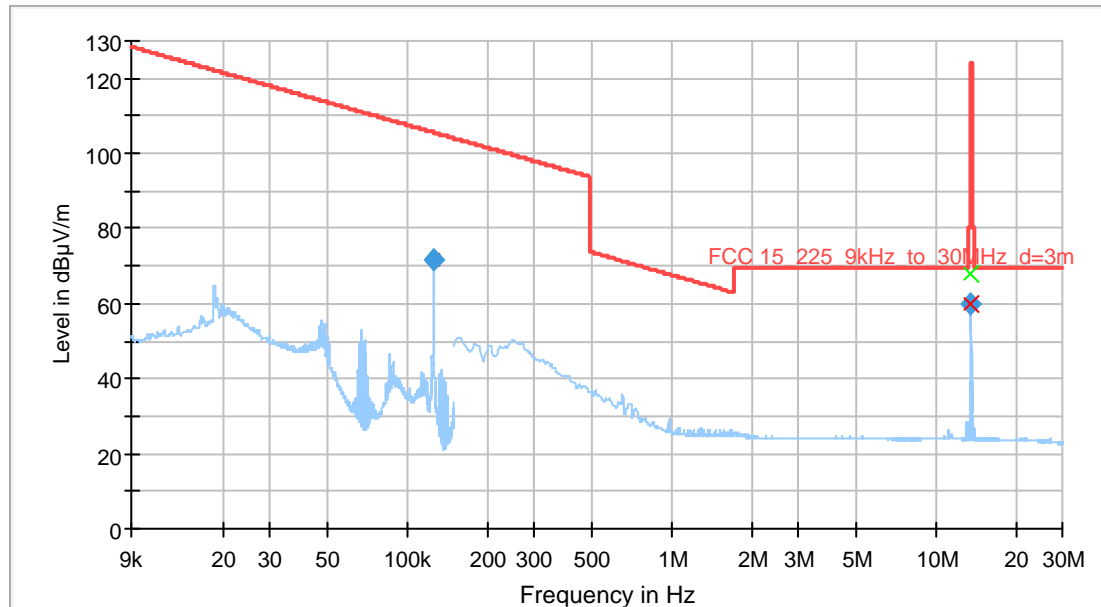

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]
- × QuasiPeak-QPK (Single) [Result Table_Single.Result:2]
- + Average-AVG (Single) [Result Table_Single.Result:3]
- × MaxPeak-PK+ (Single) [Result Table_Single.Result:1]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	71.61	---	105.66	34.05	1000.0	0.200	H	176.0
13.560000	59.96	---	124.00	64.04	1000.0	9.000	V	110.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	Pk: 81,96
13.560000	20	Pk: 67,85


EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dBµV/m - 130 dBµV/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

9 EUT:	GAT NET.Controller S 7020 F/ISO with 3x Lock 7020 P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36259
Date:	08.05.2019
Comment:	

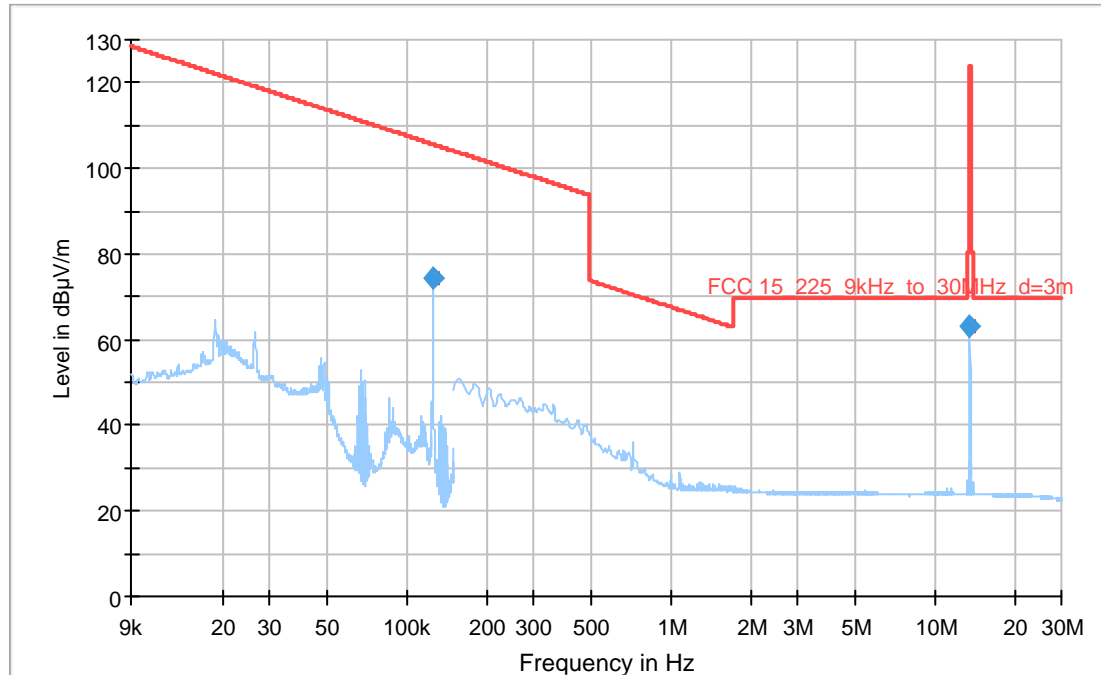

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\v\F radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	74.14	---	105.66	31.52	1000.0	0.200	H	154.0
13.560000	63.34	---	124.00	60.66	1000.0	9.000	V	110.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	14:49:23 - 08.05.2019
13.560000	20	14:49:23 - 08.05.2019


EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V/m - 130 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

10 EUT:	GAT NET.Controller S 7020 F/ISO with 3x Lock 7020 USB P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36259
Date:	08.05.2019
Comment:	

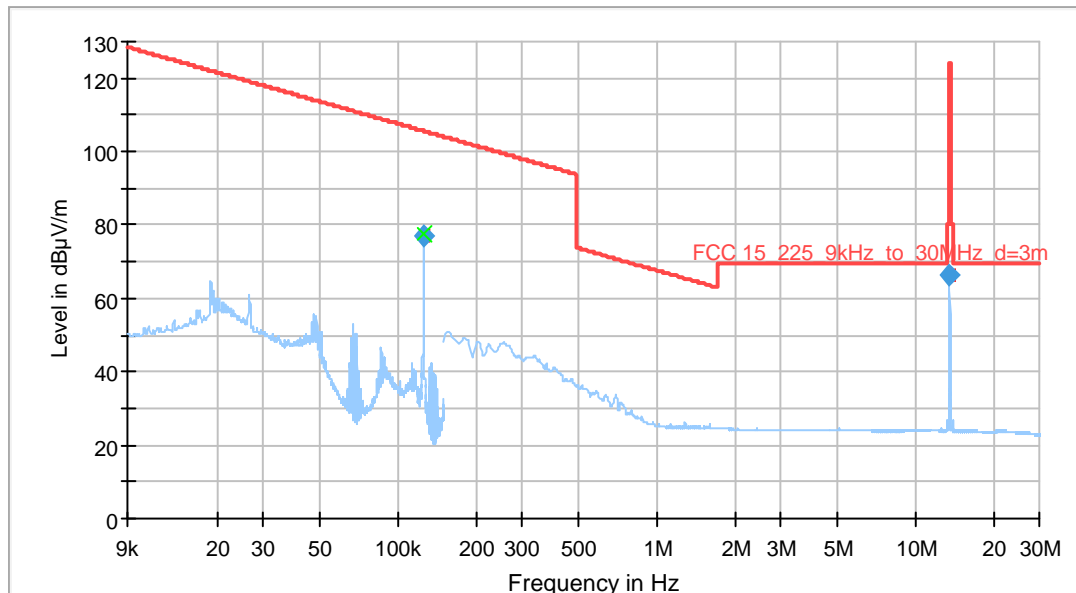

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C\]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]
- × QuasiPeak-QPK (Single) [Result Table_Single.Result:2]
- + Average-AVG (Single) [Result Table_Single.Result:3]
- × MaxPeak-PK+ (Single) [Result Table_Single.Result:1]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	76.99	---	105.66	28.67	---	---	H	132.0
13.560000	66.25	---	124.00	57.75	---	---	V	242.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	Pk: 82.9 / 125 kHz Card: 81.5
13.560000	20	Pk: 76.2 / 125 kHz Card: 75.3


EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V/m - 130 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

11 EUT:	GAT NET.Controller S 7020 ICLS with 3x Lock 7020 P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36261
Date:	08.05.2019
Comment:	Card 13.56 MHz

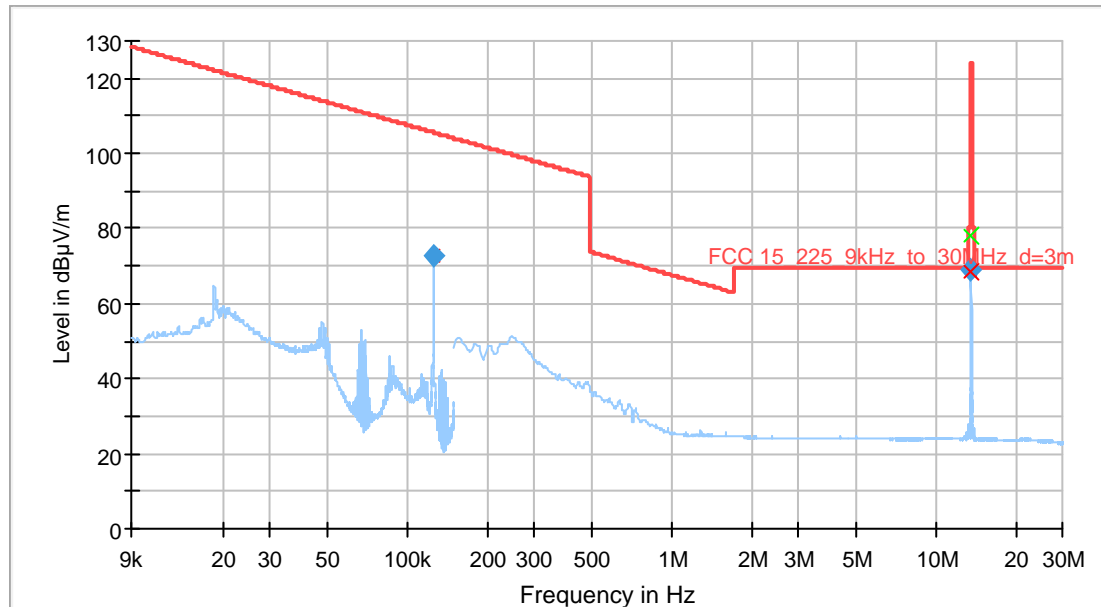

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]
- × QuasiPeak-QPK (Single) [Result Table_Single.Result:2]
- + Average-AVG (Single) [Result Table_Single.Result:3]
- × MaxPeak-PK+ (Single) [Result Table_Single.Result:1]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	72.81	---	105.66	32.85	1000.0	0.200	H	198.0
13.560000	69.01	---	124.00	54.99	1000.0	9.000	V	220.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	Pk: 81,38
13.560000	20	Pk: 78,26


EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V/m - 130 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

12 EUT:	GAT NET.Controller S 7020 ICLS with 3x Lock 7020 USB P
Test Verdict:	pass
Test Description:	Spurious Emissions, 9kHz-30MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36261
Date:	08.05.2019
Comment:	Card 13.56 MHz

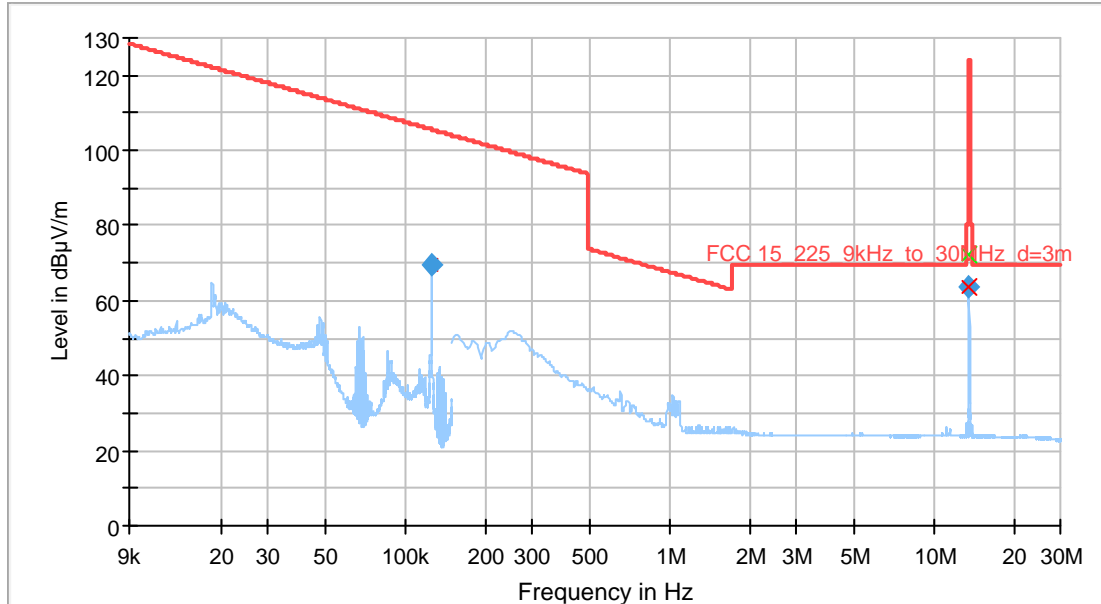

- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Critical_Freqs AVG [Critical_Freqs.Result:5]
- * Critical_Freqs QPK [Critical_Freqs.Result:4]
- FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]
- ◆ Final_Result AVG [Final_Result.Result:5]
- × QuasiPeak-QPK (Single) [Result Table_Single.Result:2]
- + Average-AVG (Single) [Result Table_Single.Result:3]
- × MaxPeak-PK+ (Single) [Result Table_Single.Result:1]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
0.125000	69.37	---	105.66	36.28	1000.0	0.200	H	154.0
13.560000	63.49	---	124.00	60.51	1000.0	9.000	V	88.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
0.125000	20	Pk: 83,42
13.560000	20	Pk: 72,38

EMI Auto Test Template: FCC-RE-R17-AN23


Hardware Setup: EN-RE-R12-AN23
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 9 kHz - 30 MHz
 Graphics Level Range: 0 dB μ V/m - 130 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 1000 cm , Step Size = 0 cm , Positioning Speed = 1
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz - 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz - 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

8.4 Diagrams radiated emissions 30 MHz to 1 GHz (Pk, Pre-tests)

13 EUT:	GAT NET.Controller S 7020 BA with 3x Lock 7020 P
Test Verdict:	Pass
Test Description:	Spurious Emissions, 30-1000MHz
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250 ms
Operator Name:	RDR MBE
Project Number:	34993 / 36260
Date:	2019-04-26
Comment:	Because it is a Pre-test this measurement was done with Pk detector. The limit is for QP, therefore it's not relevant if the Pk values are over the limit line in this diagram.

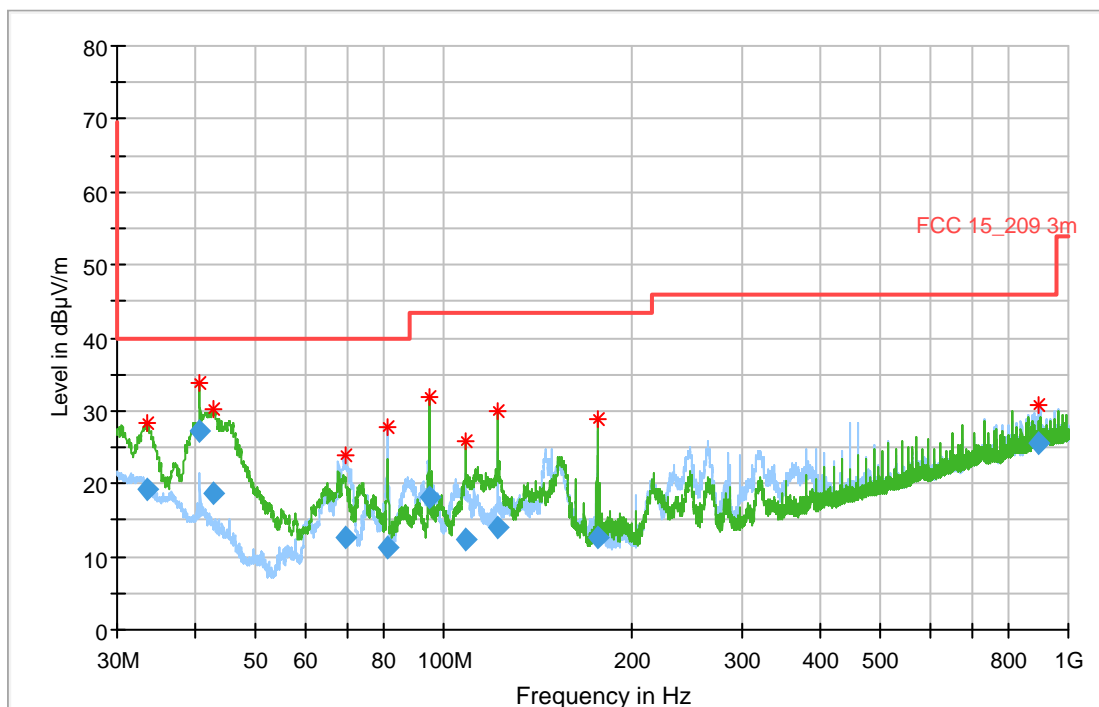

- Preview Result 1H-PK+ [Preview Result 1H.Result:2]
- Preview Result 1V-PK+ [Preview Result 1V.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result QPK [Final_Result.Result:4]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.390000	19.30	40.00	20.70	1000.0	120.000	105.0	V	151.0
40.680000	27.09	40.00	12.91	1000.0	120.000	100.0	V	97.0
42.840000	18.70	40.00	21.30	1000.0	120.000	100.0	V	82.0
69.420000	12.57	40.00	27.43	1000.0	120.000	213.0	H	191.0
81.360000	11.28	40.00	28.72	1000.0	120.000	315.0	H	185.0
94.890000	18.10	43.52	25.42	1000.0	120.000	315.0	H	-15.0
108.450000	12.44	43.52	31.08	1000.0	120.000	100.0	V	118.0
122.010000	13.91	43.52	29.62	1000.0	120.000	137.0	V	306.0
176.250000	12.61	43.52	30.91	1000.0	120.000	105.0	V	288.0
894.930000	25.45	46.02	20.57	1000.0	120.000	100.0	H	42.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
33.390000	18	13:37:30 - 26.04.2019
40.680000	14	13:34:45 - 26.04.2019
42.840000	12	13:33:19 - 26.04.2019
69.420000	9	13:27:31 - 26.04.2019
81.360000	11	13:31:13 - 26.04.2019
94.890000	12	13:29:26 - 26.04.2019
108.450000	12	13:36:06 - 26.04.2019
122.010000	12	13:40:36 - 26.04.2019
176.250000	11	13:39:08 - 26.04.2019
894.930000	23	13:25:41 - 26.04.2019

EMI Auto Test Template: FCC-RE-R17-AN08

Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 80 dBµV/m

Preview Measurements:
 Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
 Polarization: H + V
 Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
 Graphics Display: Show separate traces for horizontal and vertical polarization
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,3 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB


Frequency Zoom:
 Zoom Scan Template: EN-RE-R12-AN08_ZOOM

Adjustment:
 Antenna height: Range = 90 cm , Measuring Speed = 3
 Turntable position: Range = 30 deg , Measuring Speed = 3
 Template for Single Meas.: EN-RE-R12-AN08_MAX

Final Measurements:
 Template for Single Meas.: EN-RE-R12-AN08_FIN

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	40 kHz	QPK	120 kHz	1 s	20 dB
1 GHz - 3 GHz	40 kHz	QPK	1 MHz	1 s	20 dB

14 EUT:	GAT NET.Controller S 7020 BA with 3x Lock 7020 USB P
Test Verdict:	Pass
Test Description:	FCC Part 15 Subpart C
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36260
Date:	2019-04-30
Comment:	Because it is a Pre-test this measurement was done with Pk detector. The limit is for QP, therefore it's not relevant if the Pk values are over the limit line in this diagram.

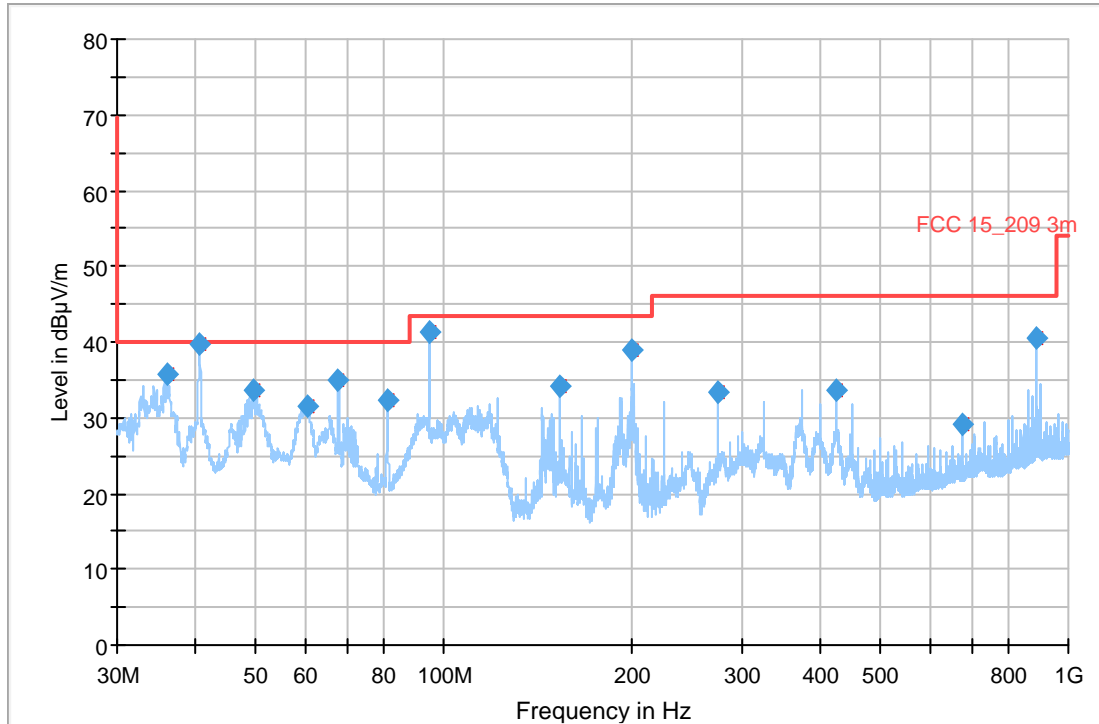

- Preview Result 1-PK+ [Preview Result 1.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result PK+ [Final_Result.Result:4]

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
-----------------	------------------	----------------	-------------	-----------------	-----------------	-------------	-----	---------------

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
36.030000	16	15:07:55 - 30.04.2019
40.680000	14	15:07:55 - 30.04.2019
49.500000	8	15:07:55 - 30.04.2019
60.330000	5	15:07:55 - 30.04.2019
67.770000	8	15:07:55 - 30.04.2019
81.360000	11	15:07:55 - 30.04.2019
94.920000	11	15:07:55 - 30.04.2019
153.330000	10	15:07:55 - 30.04.2019
200.010000	10	15:07:55 - 30.04.2019
275.010000	12	15:07:55 - 30.04.2019
424.980000	16	15:07:55 - 30.04.2019
678.000000	20	15:07:55 - 30.04.2019
890.460000	23	15:07:55 - 30.04.2019

EMI Auto Test Template: zF-EN-RE-R17-AN08


Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 80 dBµV/m

Preview Measurements:
 Antenna height: 0 - 0 cm , Step Size = 0 cm , Positioning Speed = 8
 Turntable position: 0 - 315 deg , Step Size = 45 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,3 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB

Frequency Zoom:
 Zoom Scan Template: EN-RE-R12-AN08_ZOOM

15 EUT:	GAT NET.Controller S 7020 F/ISO with 3x Lock 7020 P
Test Verdict:	Pass
Test Description:	FCC Part 15 Subpart C
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR
Project Number:	36259
Date:	2019-04-30
Comment:	Because it is a Pre-test this measurement was done with Pk detector. The limit is for QP, therefore it's not relevant if the Pk values are over the limit line in this diagram.

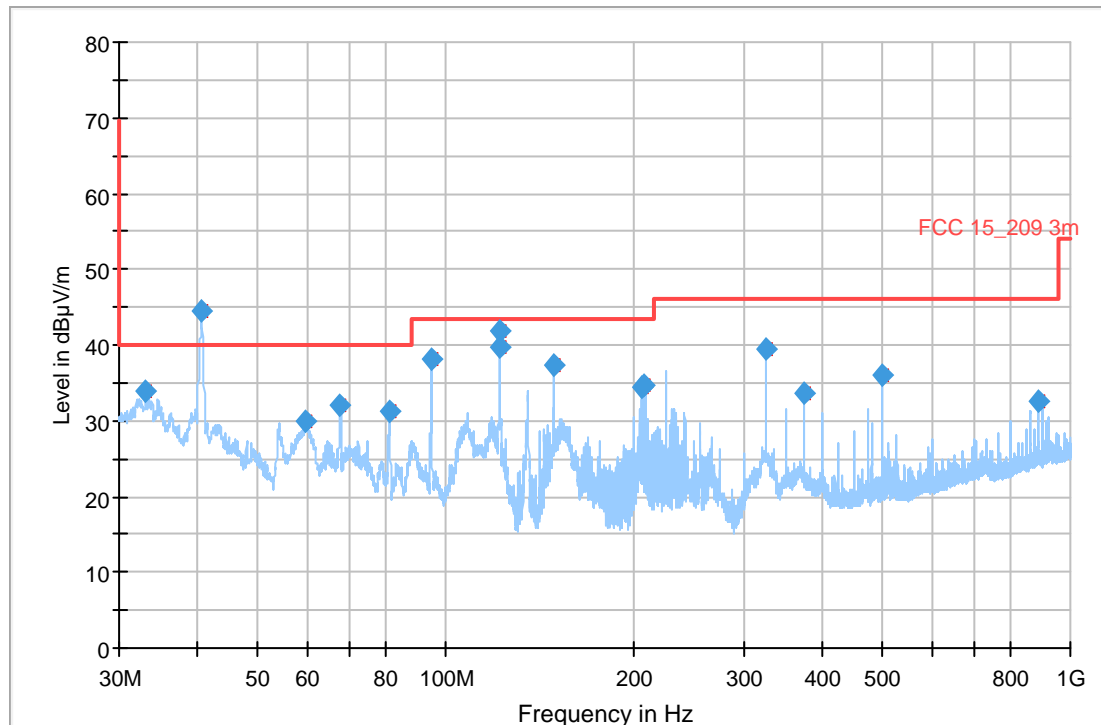

- Preview Result 1-PK+ [Preview Result 1.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result PK+ [Final_Result.Result:4]

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.090000	33.78	40.00	6.22	300.0	120.000	100.0	V	90.0
40.650000	44.42	40.00	-4.42	300.0	120.000	100.0	V	135.0
59.700000	29.92	40.00	10.08	300.0	120.000	140.0	V	225.0
67.800000	32.09	40.00	7.91	300.0	120.000	100.0	V	180.0
81.330000	31.38	40.00	8.62	300.0	120.000	100.0	V	135.0
94.920000	38.08	43.52	5.44	300.0	120.000	100.0	V	135.0
121.950000	39.68	43.52	3.84	300.0	120.000	100.0	V	45.0
122.040000	41.95	43.52	1.57	300.0	120.000	100.0	V	45.0
148.800000	37.32	43.52	6.20	300.0	120.000	160.0	H	225.0
206.340000	34.32	43.52	9.20	300.0	120.000	160.0	H	270.0
207.180000	34.75	43.52	8.77	300.0	120.000	100.0	V	225.0
324.990000	39.53	46.02	6.49	300.0	120.000	100.0	H	270.0
375.000000	33.70	46.02	12.32	300.0	120.000	100.0	H	270.0
499.980000	36.12	46.02	9.90	300.0	120.000	100.0	H	315.0
888.030000	32.61	46.02	13.41	300.0	120.000	100.0	H	315.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
33.090000	18	14:04:09 - 30.04.2019
40.650000	14	14:04:09 - 30.04.2019
59.700000	5	14:04:09 - 30.04.2019
67.800000	8	14:04:09 - 30.04.2019
81.330000	11	14:04:09 - 30.04.2019
94.920000	11	14:04:09 - 30.04.2019
121.950000	12	14:04:09 - 30.04.2019
122.040000	12	14:04:09 - 30.04.2019
148.800000	11	14:04:09 - 30.04.2019
206.340000	10	14:04:09 - 30.04.2019
207.180000	10	14:04:09 - 30.04.2019
324.990000	14	14:04:09 - 30.04.2019
375.000000	15	14:04:09 - 30.04.2019
499.980000	18	14:04:09 - 30.04.2019
888.030000	23	14:04:09 - 30.04.2019

EMI Auto Test Template: zF-EN-RE-R17-AN08


Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 80 dBµV/m

Preview Measurements:
 Antenna height: 0 - 0 cm , Step Size = 0 cm , Positioning Speed = 8
 Turntable position: 0 - 315 deg , Step Size = 45 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,3 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB

Frequency Zoom:
 Zoom Scan Template: EN-RE-R12-AN08_ZOOM

16 EUT: GAT NET.Controller S 7020 F/ISO with 3x Lock 7020 USB P
 Test Verdict: Pass
 Test Description: FCC Part 15 Subpart C
 Operating Conditions: Pulse transmission (normal mode) with an interval of 250ms
 Operator Name: RDR
 Project Number: 36259
 Date: 2019-04-30
 Comment: Because it is a Pre-test this measurement was done with Pk detector. The limit is for QP, therefore it's not relevant if the Pk values are over the limit line in this diagram.

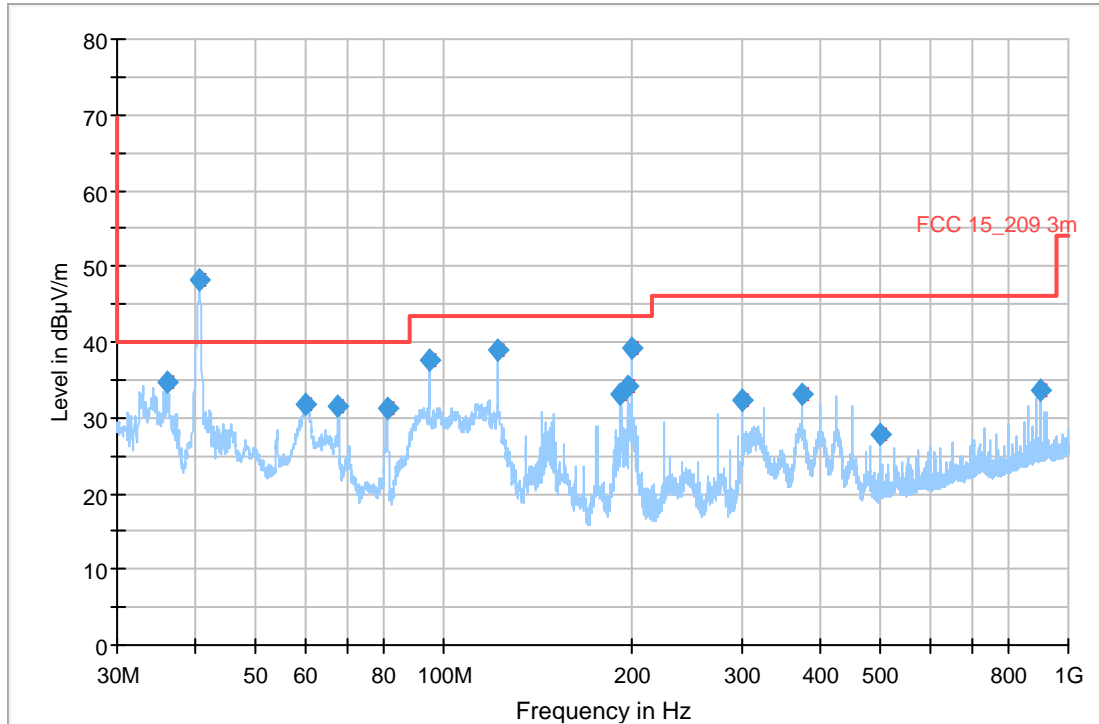

- Preview Result 1-PK+ [Preview Result 1.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result PK+ [Final_Result.Result:4]

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
-----------------	------------------	----------------	-------------	-----------------	-----------------	-------------	-----	---------------

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
35.970000	17	14:31:40 - 30.04.2019
40.650000	14	14:31:40 - 30.04.2019
60.150000	5	14:31:40 - 30.04.2019
67.770000	8	14:31:40 - 30.04.2019
81.330000	11	14:31:40 - 30.04.2019
94.920000	11	14:31:40 - 30.04.2019
122.040000	13	14:31:40 - 30.04.2019
192.030000	10	14:31:40 - 30.04.2019
196.800000	10	14:31:40 - 30.04.2019
200.010000	10	14:31:40 - 30.04.2019
300.000000	13	14:31:40 - 30.04.2019
375.000000	15	14:31:40 - 30.04.2019
500.010000	18	14:31:40 - 30.04.2019
900.000000	24	14:31:40 - 30.04.2019

EMI Auto Test Template: zF-EN-RE-R17-AN08

Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dB μ V/m - 80 dB μ V/m

Preview Measurements:
 Antenna height: 0 - 0 cm , Step Size = 0 cm , Positioning Speed = 8
 Turntable position: 0 - 315 deg , Step Size = 45 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,3 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB


Frequency Zoom:
 Zoom Scan Template: EN-RE-R12-AN08_ZOOM

17 EUT:
Test Verdict:
Test Description:

GAT NET.Controller S 7020 ICLS with 3x Lock 7020 P
Pass
Radiated Emissions, 30 MHz - 1 GHz, FCC Part 15 Subpart B,
Class A

Operating Conditions:
Operator Name:
Project Number:
Date
Comment:

Pulse transmission (normal mode) with an interval of 250 ms
RDR
36261
2019-04-29
Because it is a Pre-test this measurement was done with Pk detector.
The limit is for QP, therefore it's not relevant if the Pk values are over
the limit line in this diagram.

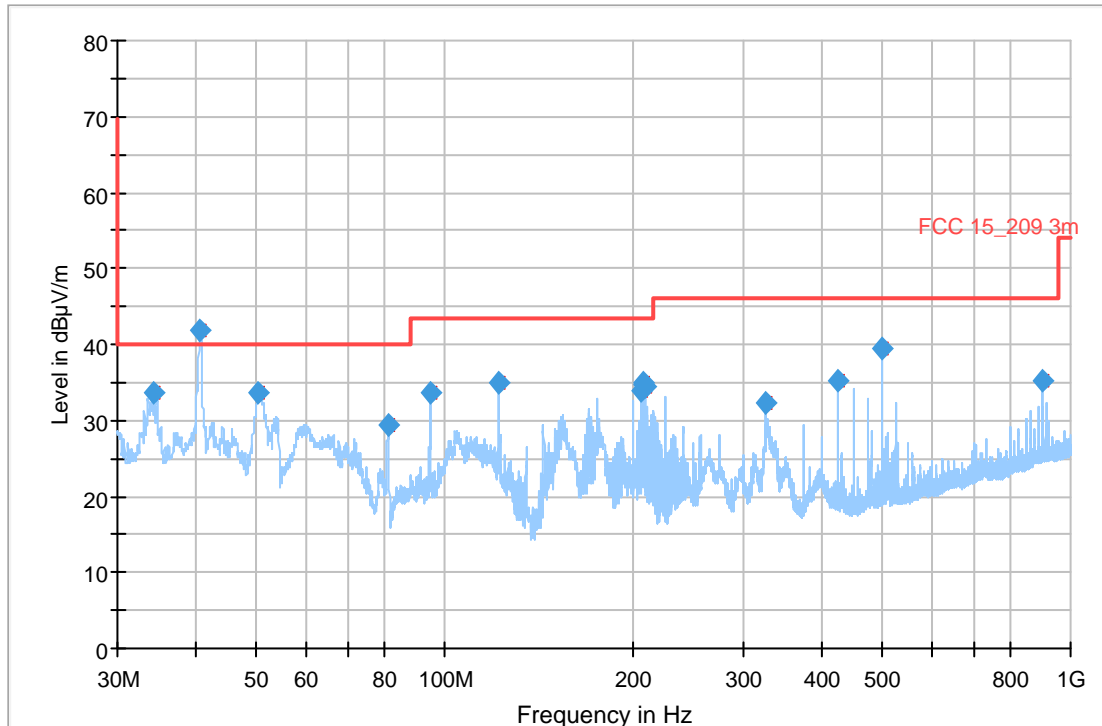

- Preview Result 1-PK+ [Preview Result 1.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result PK+ [Final_Result.Result:4]

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
34.140000	33.70	40.00	6.30	100.0	120.000	140.0	V	45.0
40.680000	41.73	40.00	-1.73	100.0	120.000	100.0	V	315.0
50.430000	33.60	40.00	6.40	100.0	120.000	140.0	V	45.0
81.330000	29.42	40.00	10.58	100.0	120.000	100.0	V	135.0
94.920000	33.64	43.52	9.88	100.0	120.000	100.0	H	0.0
122.040000	34.85	43.52	8.67	100.0	120.000	140.0	V	315.0
206.520000	33.99	43.52	9.53	100.0	120.000	100.0	V	180.0
207.300000	34.67	43.52	8.85	100.0	120.000	100.0	V	180.0
208.080000	35.07	43.52	8.45	100.0	120.000	100.0	V	180.0
208.890000	34.35	43.52	9.17	100.0	120.000	100.0	V	180.0
324.990000	32.26	46.02	13.76	100.0	120.000	100.0	H	90.0
425.010000	35.25	46.02	10.77	100.0	120.000	100.0	H	45.0
499.980000	39.54	46.02	6.48	100.0	120.000	160.0	H	315.0
901.050000	35.24	46.02	10.78	100.0	120.000	100.0	V	315.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
34.140000	18	13:19:43 - 29.04.2019
40.680000	14	13:19:43 - 29.04.2019
50.430000	7	13:19:43 - 29.04.2019
81.330000	11	13:19:43 - 29.04.2019
94.920000	12	13:19:43 - 29.04.2019
122.040000	12	13:19:43 - 29.04.2019
206.520000	10	13:19:43 - 29.04.2019
207.300000	10	13:19:43 - 29.04.2019
208.080000	10	13:19:43 - 29.04.2019
208.890000	10	13:19:43 - 29.04.2019
324.990000	14	13:19:43 - 29.04.2019
425.010000	16	13:19:43 - 29.04.2019
499.980000	18	13:19:43 - 29.04.2019
901.050000	24	13:19:43 - 29.04.2019

EMI Auto Test Template: zF-EN-RE-R17-AN08

Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 80 dBµV/m

Preview Measurements:


Antenna height: 0 - 0 cm , Step Size = 0 cm , Positioning Speed = 8
 Turntable position: 0 - 315 deg , Step Size = 45 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,1 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB

Frequency Zoom:

Zoom Scan Template: EN-RE-R12-AN08_ZOOM

18 EUT:	GAT NET.Controller S 7020 ICLS with 3x Lock 7020 USB P
Test Verdict:	Pass
Test Description:	Radiated Emissions, 30 MHz - 1 GHz, FCC Part 15 Subpart C
Operating Conditions:	Pulse transmission (normal mode) with an interval of 250ms
Operator Name:	RDR/ MBE
Project Number:	34476
Date:	2019-04-29
Comment:	Because it is a Pre-test this measurement was done with Pk detector. The limit is for QP, therefore it's not relevant if the Pk values are over the limit line in this diagram.

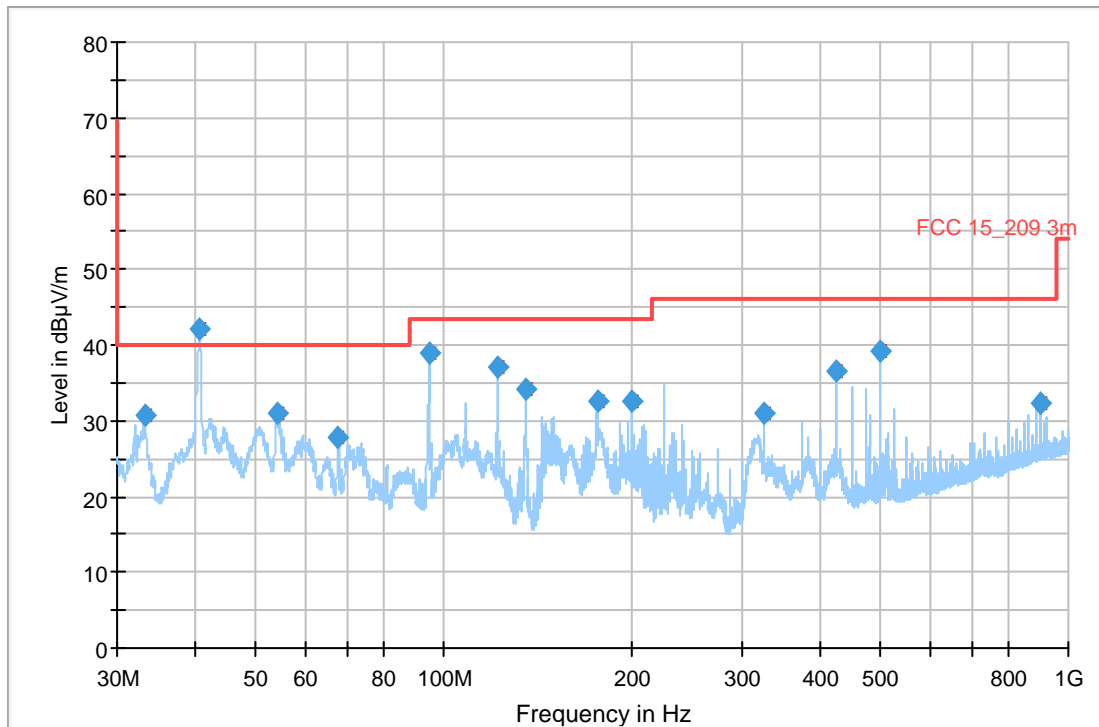

- Preview Result 1-PK+ [Preview Result 1.Result:2]
- * Critical_Freqs PK+ [Critical_Freqs.Result:4]
- FCC 15_209 3m [..\EMI radiated\FCC Part 15C]
- ◆ Final_Result PK+ [Final_Result.Result:4]

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.150000	30.76	40.00	9.24	300.0	120.000	100.0	V	45.0
40.650000	42.02	40.00	-2.02	300.0	120.000	100.0	V	180.0
54.180000	30.93	40.00	9.07	300.0	120.000	140.0	V	0.0
67.740000	27.85	40.00	12.15	300.0	120.000	140.0	V	270.0
94.920000	39.06	43.52	4.46	300.0	120.000	160.0	H	135.0
122.040000	37.09	43.52	6.43	300.0	120.000	160.0	H	90.0
135.570000	34.15	43.52	9.37	300.0	120.000	140.0	V	90.0
176.280000	32.58	43.52	10.94	300.0	120.000	160.0	H	90.0
200.010000	32.71	43.52	10.81	300.0	120.000	160.0	H	270.0
324.990000	30.96	46.02	15.06	300.0	120.000	100.0	H	270.0
425.010000	36.43	46.02	9.59	300.0	120.000	100.0	H	45.0
499.980000	39.21	46.02	6.81	300.0	120.000	160.0	H	315.0
900.000000	32.23	46.02	13.79	300.0	120.000	100.0	H	225.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
33.150000	18	15:09:37 - 29.04.2019
40.650000	14	15:09:37 - 29.04.2019
54.180000	5	15:09:37 - 29.04.2019
67.740000	8	15:09:37 - 29.04.2019
94.920000	12	15:09:37 - 29.04.2019
122.040000	13	15:09:37 - 29.04.2019
135.570000	11	15:09:37 - 29.04.2019
176.280000	12	15:09:37 - 29.04.2019
200.010000	10	15:09:37 - 29.04.2019
324.990000	14	15:09:37 - 29.04.2019
425.010000	16	15:09:37 - 29.04.2019
499.980000	18	15:09:37 - 29.04.2019
900.000000	24	15:09:37 - 29.04.2019

EMI Auto Test Template: zF-EN-RE-R17-AN08

Hardware Setup: EN-RE-R12-AN08
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 30 MHz - 1 GHz
 Graphics Level Range: 0 dBµV/m - 80 dBµV/m

Preview Measurements:
 Antenna height: 0 - 0 cm , Step Size = 0 cm , Positioning Speed = 8
 Turntable position: 0 - 315 deg , Step Size = 45 deg , Positioning Speed = 8
 Scan Test Template: EN-RE-R12-AN08_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	PK+	120 kHz	0,3 s	20 dB
1 GHz - 3 GHz	250 kHz	PK+	1 MHz	0,1 s	20 dB

Frequency Zoom:
 Zoom Scan Template: EN-RE-R12-AN08_ZOOM

SECTION 9

MEASUREMENT UNCERTAINTY EVALUATION

Measurement uncertainty for radiated magnetic field, 9 kHz – 30 MHz	± 3.2 dB
Measurement uncertainty for radiated emission, 30 MHz - 1000 MHz	
Uncertainty for the frequency range 30 to 300 MHz using a biconical or a combination antenna at 3 m	± 4.9 dB
Uncertainty for the frequency range 300 to 1000 MHz using a logperiodic or a combination antenna at 3 m	± 4.7 dB
Measurement uncertainty for radiated emission 1 to 26 GHz	
Uncertainty for the frequency range 1 to 18 GHz	± 6.1 dB
Uncertainty for the frequency range 18 to 26,5 GHz	± 6.5 dB
Measurement uncertainty for conducted disturbances at the antenna port on radio equipment	
Frequency range 9 kHz - 1 GHz	± 1.9 dB
Frequency range 1 GHz - 18 GHz	± 3.0 dB
Frequency range 18 GHz -26,5 GHz	± 3.6 dB
Measurement uncertainty for Frequency error	± 1 x 10 ⁻⁸
Measurement uncertainty for Output power (Conducted), 9 kHz - 18 GHz	± 1.0 dB
Measurement uncertainty for RF Power density	
Frequency range 9 kHz - 1 GHz	± 1.9 dB
Frequency range 1 GHz - 18 GHz	± 3.0 dB
Frequency range 18 GHz -26,5 GHz	± 3.6 dB
Measurement uncertainty for humidity	± 4 %
Measurement uncertainty for temperature	± 0.5 °C
Measurement uncertainty for voltage	
DC	± 0.1 %
AC up to 10 kHz	± 1.8 %
Measurement uncertainty for time	± 0.058 %
Measurement uncertainty for conducted emissions, LISN, 150 kHz -30 MHz	± 2.3 dB
Measurement uncertainty for OBW	± 4.3 %
601 points resolution (Spectrum analyzer)	± 0.83 %
30000 points resolution (Spectrum analyzer)	± 0.016 %

End of test report