

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....	LETTER REQUESTING CONFIDENTIALLY AND LETTER OF EXPLANATION
PAGE 2.....	LIST OF TEST EQUIPMENT AND TEST PROCEDURES
PAGE 3.....	PRODUCT DESCRIPTION
PAGE 4.....	POWERLINE CONDUCTED INTERFERENCE
PAGE 5.....	OCCUPIED BANDWIDTH AND POWER OUTPUT
PAGE 6.....	METHOD OF MEASURING RF CONDUCTED AND SPURIOUS EMISSIONS AT ANTENNA TERMINALS DATA
PAGE 7.....	RADIATION INTERFERENCE TEST DATA
PAGE 8.....	METHOD OF MEASURING RADIATED SPURIOUS EMISS.
PAGE 9.....	POWER SPECTRAL DENSITY
PAGE 10.....	PROCESSING GAIN INFORMATION

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FCC ID LABEL SAMPLE
EXHIBIT 2.....	SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 3A.....	TOP VIEW EXTERNAL PHOTO
EXHIBIT 3B.....	BOTTOM VIEW EXTERNAL PHOTO
EXHIBIT 3C.....	SIDE VIEW EXTERNAL PHOTO
EXHIBIT 3D.....	INTERNAL CHASSIS VIEW PHOTO
EXHIBIT 3E.....	COMPONENT SIDE INTERNAL COMPUTER PHOTO
EXHIBIT 3F.....	COPPER SIDE INTERNAL COMPUTER PHOTO
EXHIBIT 3G.....	FILTER PHOTO
EXHIBIT 3H.....	INTERFACE BOARD WITH SHIELD PHOTO
EXHIBIT 3I.....	TOP VIEW OF RADIO
EXHIBIT 3J.....	BOTTOM VIEW OF RADIO
EXHIBIT 4.....	BLOCK DIAGRAM
EXHIBIT 5.....	INSTRUCTION MANUAL
EXHIBIT 6A-6B.....	POWERLINE CONDUCTED PLOTS
EXHIBIT 7.....	6dB BANDWIDTH PLOT
EXHIBIT 8.....	SPECTRAL DENSITY PLOT
EXHIBIT 9.....	BANDEdge PLOT

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM

REPORT NO.: T:\CUS\S\SPEED\SPE204U0\204U0.RPT

TABLE OF CONTENTS LIST

14 June 2000

Federal Communications Commission  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046

SUBJECT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCCID: NCBSLTM

To Whom It May Concern:

This will serve as a request for confidentiality for the schematics for the radio. The schematics will be sent directly from the manufacturer to the FCC upon request. Once the review of the application is complete and the schematics are no longer needed, they must be returned to the manufacturer, where they were sent from.

The attached application is for a direct sequence spread spectrum assembly, made up of the Bridge/Radio (FCC ID: IMRWLPCE24H), Voltage Injector, 50 foot of coax, an amplifier, 10 foot of coax, a lightening arrestor, and a parabolic antenna.

This system has only one type of antenna, a parabolic dish that has 24dBi.

SPEEDCOM WIRELESS INTERNATIONAL CORP. purchases standard antennas from the manufacturers with unique connectors on them.

The user manual will have the following statement in it;  
"WARNING! ALL PERSONNEL SHOULD STAY AT LEAST 1 METER(3.5') FROM ANTENNA TO AVOID EXPOSURE TO POSSIBLE MICROWAVE ENERGY.", PER FCC RULES 15.247(b)(4).

The antenna is intended to be used outside.

Should you have any questions or require any further information with regards to this, please feel free to contact me.

Sincerely,

S. S. Sanders

SSS/sh  
Encl.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCCID: NCBSLTM

REPORT #: T:\CUS\S\SPEED\SPE204U0\204U0.RPT

PAGE #: 1

## TEST EQUIPMENT LIST

- 1.\_X\_Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/  
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter  
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,  
S/N 3008A00372 Cal. 10/17/99
- 2.\_X\_Biconnical Antenna: Eaton Model 94455-1, S/N 1057
- 3.\_X\_Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
- 4.\_X\_Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,  
1-18 GHz, S/N 2319 Cal. 4/27/99
- 5.\_X\_Line Impedance Stabilization Network: Electro-Metrics Model  
ANS-25/2, S/N 2604 Cal. 2/9/00
- 6.\_X\_AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
- 7.\_X\_Peak Power Meter HP 8900C With Peak Power Sensor HP 84811A Cal.  
7/19/99.

## TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 76oF with a humidity of 55%.

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=1.0MHz and the video bandwidth(VBW) =3.0MHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.

ANTENNA CONDUCTED EMISSIONS: The RBW=100KHz, VBW=300KHz and the span set to 10.0MHz and the spectrum was scanned from 30MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1.0MHz and the VBW = 3.0MHz and the span to 50MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100kHz up to 1GHz and 1.0MHz above 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 3.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 89oF with a humidity of 76%.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.


FCCID: NCBSLTM

REPORT #: T:\CUS\S\SPEED\SPE204U0\204U0.RPT

PAGE #: 2

#### PRODUCT DESCRIPTION:

The NCBSLTM is a direct sequence spread spectrum radio that operates in the 2422MHz frequency.

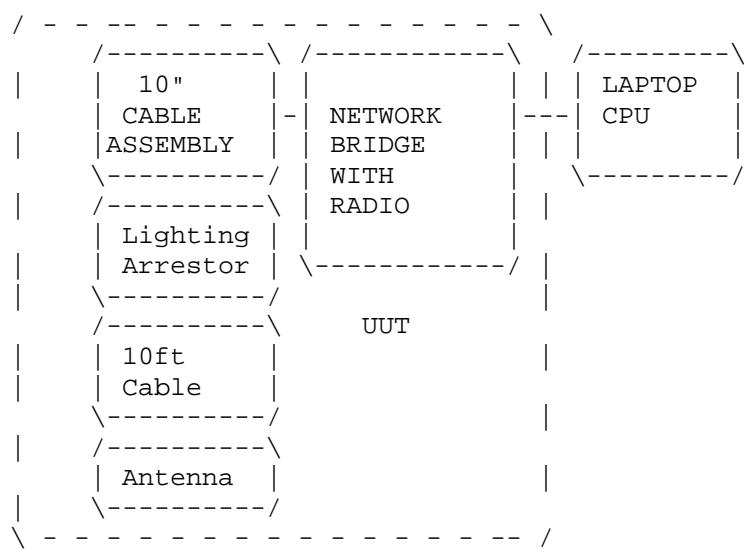

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.  
FCCID: NCBSLTM  
REPORT #: T:\CUS\S\SPED\SPE204U0\204U0.RPT  
PAGE #: 3

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM - ASSEMBLY #1 AND #3

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NUMBER: 15.107(a)

REQUIREMENTS: .45 - 30 MHz 250 uV OR 47.96 dBuV

TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum was scanned from .45 to 30 MHz.

TEST DATA:

THE HIGHEST EMISSION READ FOR LINE 1 WAS 218.51uV @ 6.48MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 201.59uV @ 690kHz.

THE PLOTS IN EXHIBITS 6A-6B REPRESENT THE EMISSIONS TAKEN FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.  
FCCID: NCBSLTM  
REPORT #: T:\CUS\S\ SPEED\SPE204U0\204U0.RPT  
PAGE #: 4

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM

NAME OF TEST: 6.0dB BANDWIDTH

RULES PART NUMBER: 15.247(a)(2)

REQUIREMENTS: The 6.0dB bandwidth must be greater than 500KHz.

MEASUREMENT: The 6.0dB bandwidth measured @ 2422.00MHz was 12.90MHz.


MEASUREMENT DATA: See plots, Exhibit #9.

NAME OF TEST: POWER OUTPUT

RULES PART NUMBER: 15.247(b) 1.0Watt or +30dBm  
20mW Watts or 24dBm for 24dBi Gain Ant


MEASUREMENT: 30.0 mWATTS or 14.75 dBm @ 2422.0MHz

15.247(c) Method of Measuring RF Power output:  
The Peak power Sensor was connected in place of the antenna.

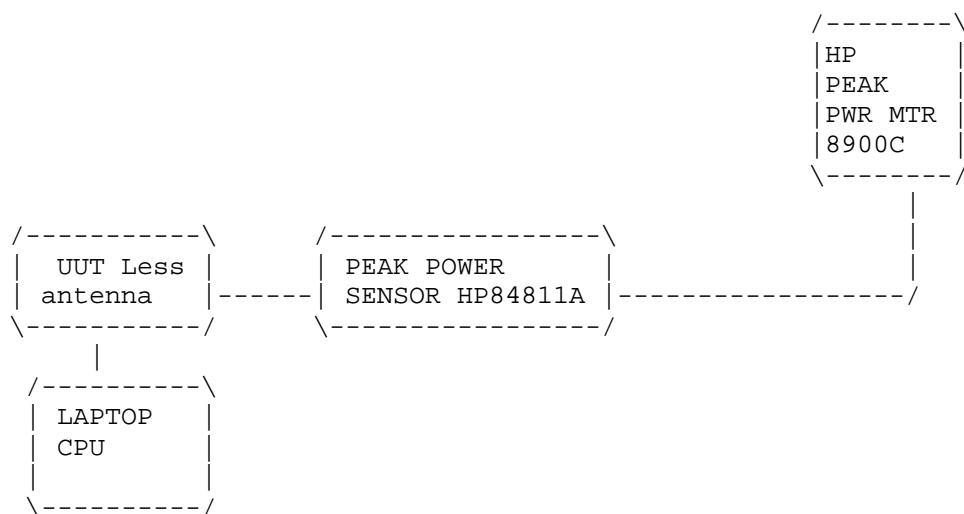

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.  
FCCID: NCBSLTM  
REPORT #: T:\CUS\S\SPEED\SPE204U0\204U0.RPT  
PAGE #: 5

15.247(c) Method of Measuring RF Conducted Spurious Emissions

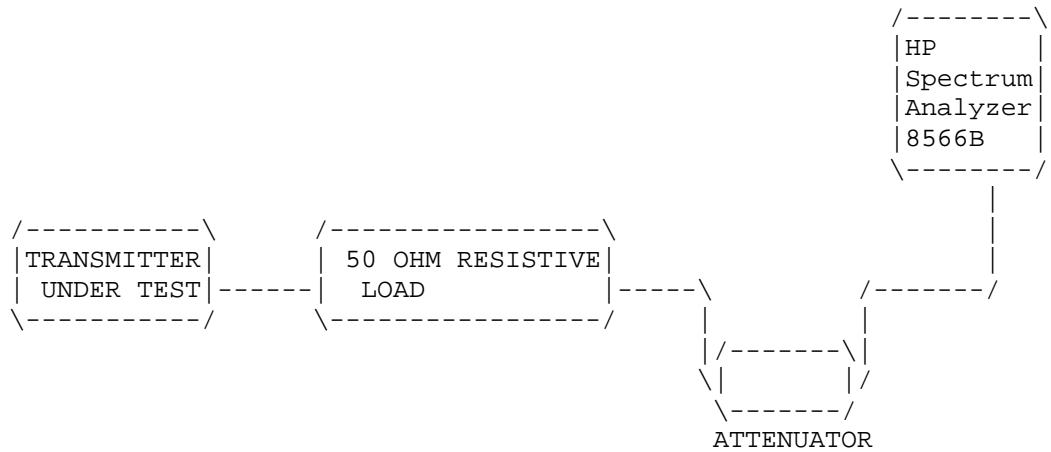

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100KHz RBW.

EMISSION FREQUENCY MHz	dB BELOW CARRIER
2422.0	00.0
4844.0	-36.8
7265.0	-61.70
9688.0	-91.40

NOTE: THE SPECTRUM WAS SCANNED TO THE TENTH HARMONIC.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.  
FCCID: NCBSLTM  
REPORT #: T:\CUS\S\ SPEED\SPE204U0\204U0.RPT  
PAGE #: 6

15.247(c), 15.205 & 15.209(b) Field\_strength\_of\_spurious\_emissions:

REQUIREMENTS:

FIELD STRENGTH of Fundamental: 902-928MHz 2.4-2.4835GHz 127.38dBuV/m @3m	FIELD STRENGTH of Harmonics 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz 54 dBuV/m @3m	S15.209 40 dBuV/m @3M 43.5 46 ABOVE 960 MHz 54dBuV/m
--	---	--

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REQUIREMENTS:

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	FIELD STRENGTH dBuV/m	FCC. LIMIT dB	MARGIN dB	ANT.
------------------------------	-------------------------------	--------------------	-----------------------------	---------------------	--------------	------

DIGITAL EMISSIONS

199.00	18.50	0.90	12.71	32.11	40.00	7.89	H
232.20	19.80	1.20	12.86	33.86	43.50	9.64	H
265.30R	23.70	1.40	13.82	38.92	46.00	7.08	H
331.00R	10.00	1.40	15.00	26.40	46.00	19.60	H

Antenna Gain 24dBi

Intentional Radiator Emissions

2422.00	81.30	1.09	29.06	111.45	127.38	V
2483.50BANDEdge				44.95	54.00	9.05
4844.00R	3.50	1.46	33.95	38.91	54.00	15.09

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 & the Guidance on Measurements for Direct Sequence Spread Spectrum Systems. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road, Newberry, FL 32669.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCCID: NCBSLTM


REPORT #: T:\CUS\S\ SPEED\SPE204U0\204U0.RPT

PAGE #: 7

2.993(a)(b)

2.993(a)(b) Continued Field\_strength\_of\_spurious\_emissions:

Method of Measuring Radiated Spurious Emissions

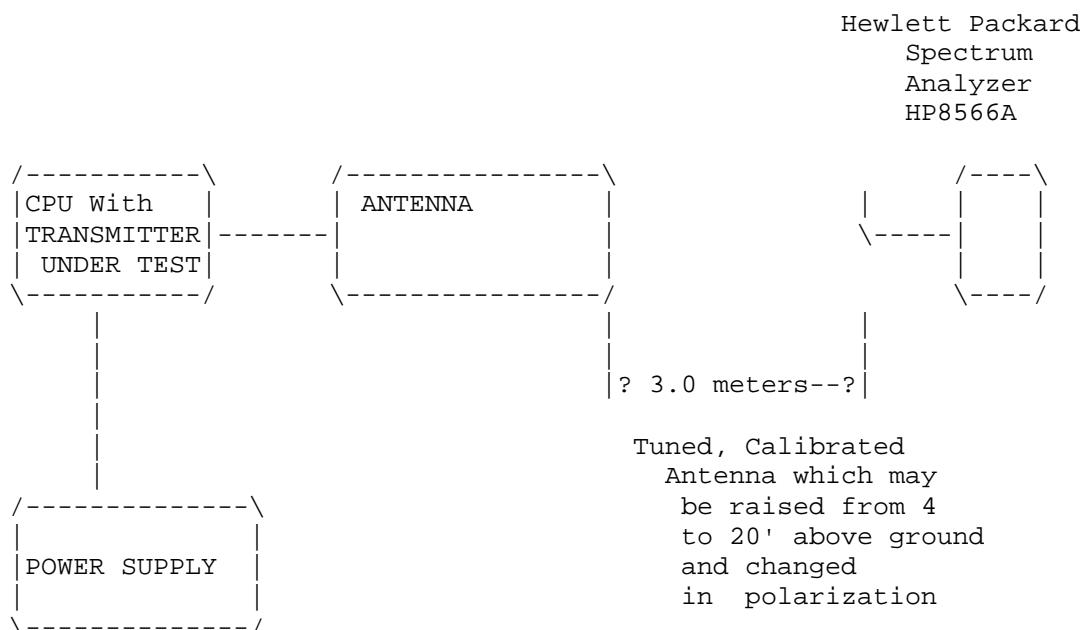

Equipment placed 4' above ground  
on a rotatable platform.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCCID: NCBSLTM

REPORT #: T:\CUS\S\SPEED\SPE204U0\204U0.RPT

PAGE #: 8

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM

NAME OF TEST: POWER SPECTRAL DENSITY

RULES PART NUMBER: 15.247(d)

REQUIREMENTS: The peak level measured must be no greater than +8.0dBm.

DATA: THE PLOTS ARE SHOWN IN EXHIBITS #8.  
The level at 2423.519MHz was -7.8dBm.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.  
FCCID: NCBSLTM  
REPORT #: T:\CUS\S\SPEED\SPE204U0\204U0.RPT  
PAGE #: 9

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCC ID: NCBSLTM

NAME OF TEST: PROCESSING GAIN

RULES PART NUMBER: 15.247(e)

REQUIREMENTS:

DATA: The processing gain information supplied by the manufacturer is 10.0dB.

APPLICANT: SPEEDCOM WIRELESS INTERNATIONAL CORP.

FCCID: NCBSLTM

REPORT #: T:\CUS\S\ SPEED\SPE204U0\204U0.RPT

PAGE #: 10