

RoHS 承認書

RoHS APPROVAL SHEET

精英電腦股份有限公司

Elitegroup Computer Systems Co., Ltd

廠商名稱

Vendor Name 鴻呈(VSO)

ECS 料號

ECS Part No. 13-130-F62021

ECS 品名 ANTENNA L.15.4...W/CABLE...

ECS Description 330..LEAD-FREE.VSO

廠商型號

Vendor Part No. 82-101-01210070

廠商聯絡人

Windows 王志偉

Vendor Address:

Phone: (02)32343038

Fax: (02)32343056

Mobile: 0963-322-105

E-mail: samwang@vso.com.tw

Web: vso.com.tw

INDEX


<i>Item</i>	<i>Content</i>	<i>Page</i>
1.	天線規格表 1
2.	工程圖 2~3
3.	電性測試報告 4~29
4.	Cable材質證明與SGS報告 30~37
5.	Conn#材質證明與SGS報告 48~54
6.	洋白銅材質證明與SGS報告 55~57
7.	錫條材質證明與SGS報告 58~61
8.	套管材質證明與UL卡 62~66
9.	其他資料 67~71

DRAW ID
CD

THIS DRAWING IS CONTROLLED DOCUMENT FOR VSO LTD IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN VSO LTD PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM VSO LTD

REVISION			
REV.	DESCRIPTION	APPROVAL	DATE
D	變更爲環保料,增加條碼與環保貼紙		06.03.16

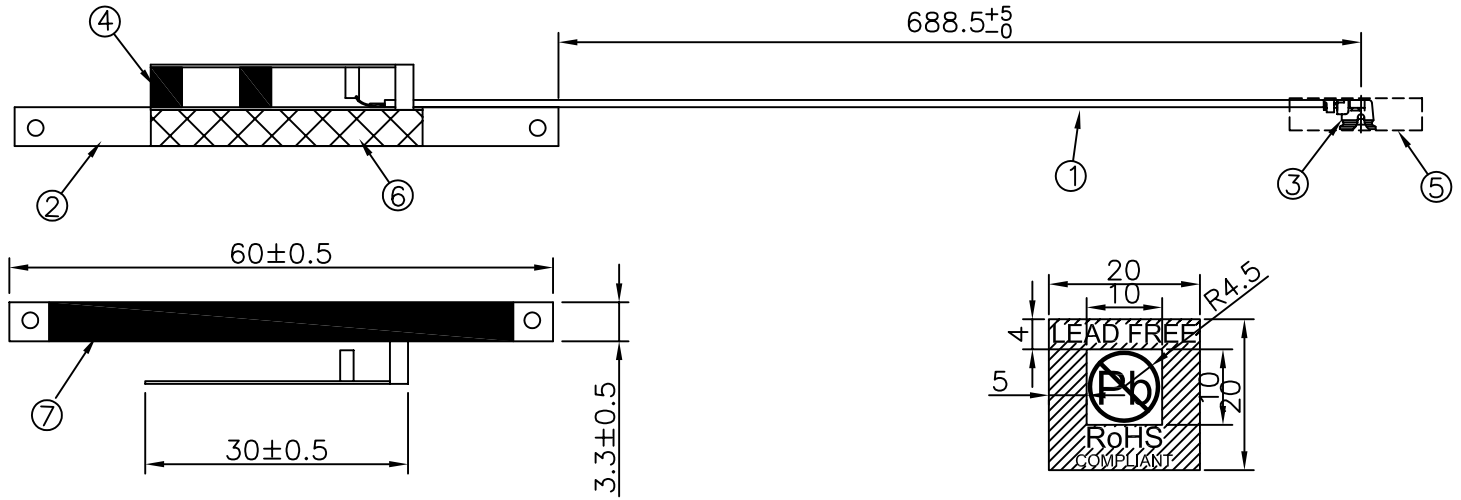

NOTE:
 1.TEXT STYLE:ARIAL
 2."LEAD FREE" TEXT HIGH:2.5mm
 3."ROHS" TEXT HIGH:2.8mm
 4."Pb" TEXT HIGH:4.5mm
 5."COMPLIANT" TEXT HIGH:1.6mm
 6.陰影部分綠底白字,空白部分白底綠字

NOTE: 用網絡分析義測試

ITEM	DESCRIPTION	Q'TY	
⑦	雙面膠	雙面膠:L54*W3.3*T0.14mm	1PCS
⑥	導電泡棉	導電泡棉:30*4*4mm	1PCS
⑤	TUBE	PVC透明套管:φ3.1*20mm	1PCS
④	支撐膠	EVA支撐膠, BLACK	2PCS
③	CONN	I-PEX TERM GOLD-PLATED	1PCS
②	PIFA BODY	洋白銅	1PCS
①	RF CABLE	CABLE:φ1.13 COAXIAL CABLE,COLOR:BLACK	1PCS

XX.	±0.5	CUST. P/N:	DRAW.:
X.	±0.3	精英(13-130-F62021)	
.X	±0.1	TITLE:	ENGIN:
.XX	±0.05	PIFA ANTENNA	
		VSO P/N:	CHECK:
		82-101-01210070	
	UNITS	DWG. NO.:	PAGE:
	mm		1/3
		REV.	APPR.:
		D	

4

3

2


1

DRAW ID
CD


THIS DRAWING IS CONTROLLED DOCUMENT FOR VSO LTD IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN VSO LTD PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM VSO LTD

REVISION			
REV.	DESCRIPTION	APPROVAL	DATE
B	增加條碼與環保貼紙		06.03.16

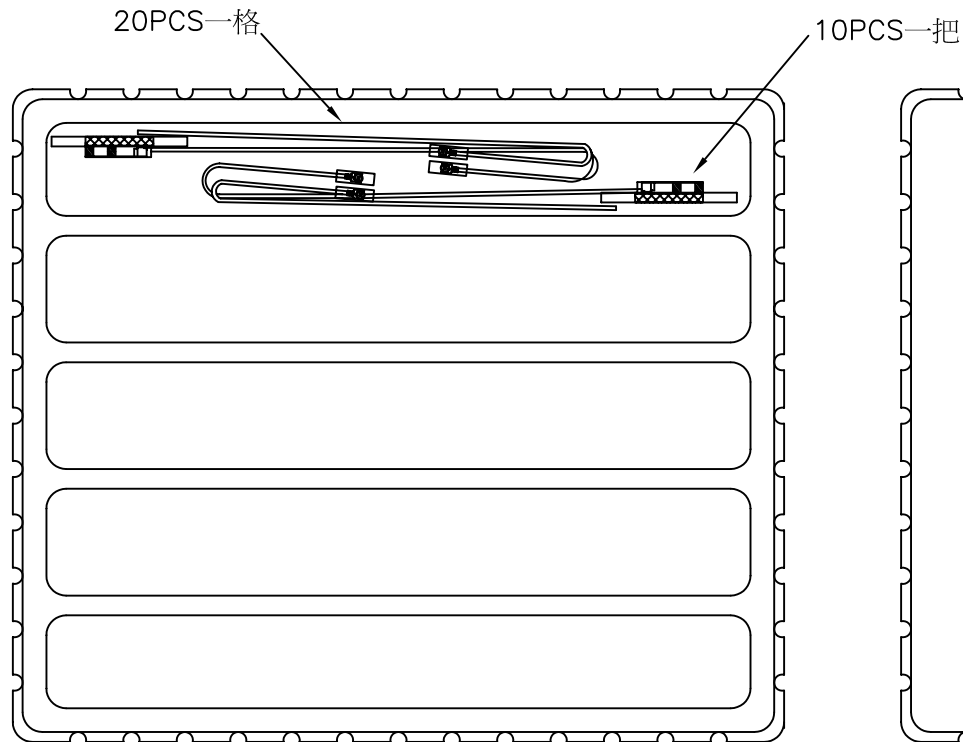

吸塑盤底盤

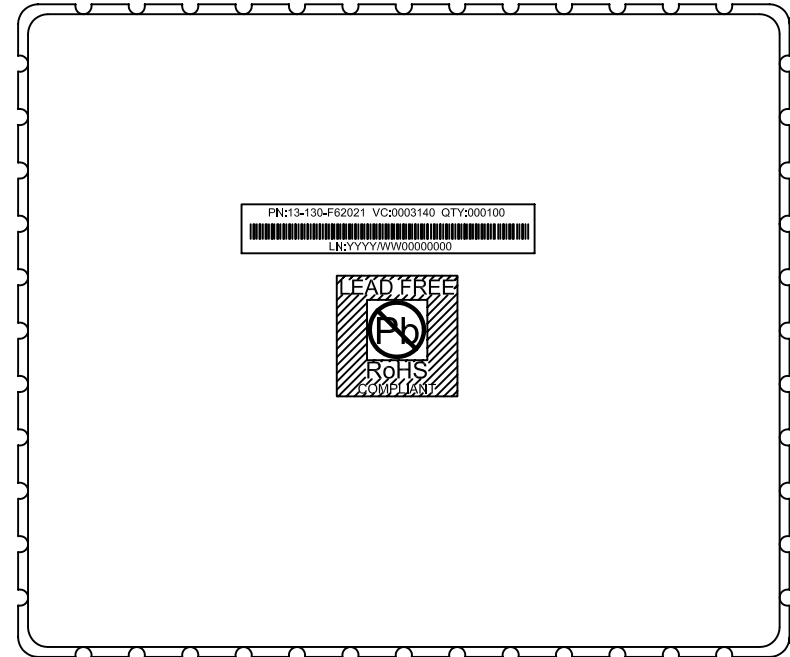

吸塑盤上蓋



NOTE:

- 1.吸塑盤規格:L540*W310*H25mm,紙箱規格:L550*W320*H220mm
- 2.10PCS用橡皮筋捆成一把,一格可放2把20PCS成品
- 3.一個吸塑盤分五格,可放100PCS成品,一箱放八個吸塑盤可裝800PCS成品
- 4.貼紙貼在吸塑盤上蓋中間,用量1

RoHS COMPLIANT **VSO** ELECTRIC CO.,LTD.

XX.	±0.5	CUST. P.N:	精英(13-130-F62021)		DRAW.:
X.	±0.3	TITLE:	包裝圖		ENGIN:
.X	±0.1	VSO P.N:	82-101-01210070		CHECK:
.XX	±0.05	UNITS	DWG. NO.:	PAGE:	REV.
		mm		3/3	B


4

3

2

1

Far-field amplitude of G300-2.4G-Ey.nsi

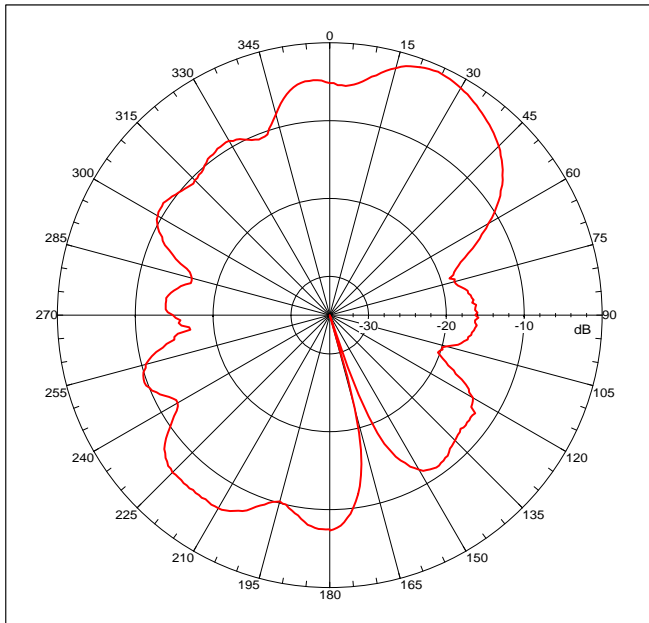

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -0.77614 dBi
 Max far-field (global) = -47.32388 dB, Max far-field (plot) = -47.3239 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 23.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ey-2.nsi
 Measurement date/time: 4/6/2006 5:04:22 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -9.351 dB
 -3. dB beam width: 32.52 deg
 -6. dB beam width: 64.58 deg
 -10. dB beam width: 123.72 deg
 Left Sidelobe: -8.32 dB at -30.585 deg
 Right Sidelobe: -15.65 dB at 84.735 deg

Far-field display setup

Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1


Selected beam(s) 1 of 3

Beam Frequency Azimuth Elevation Pol

1 2.400 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

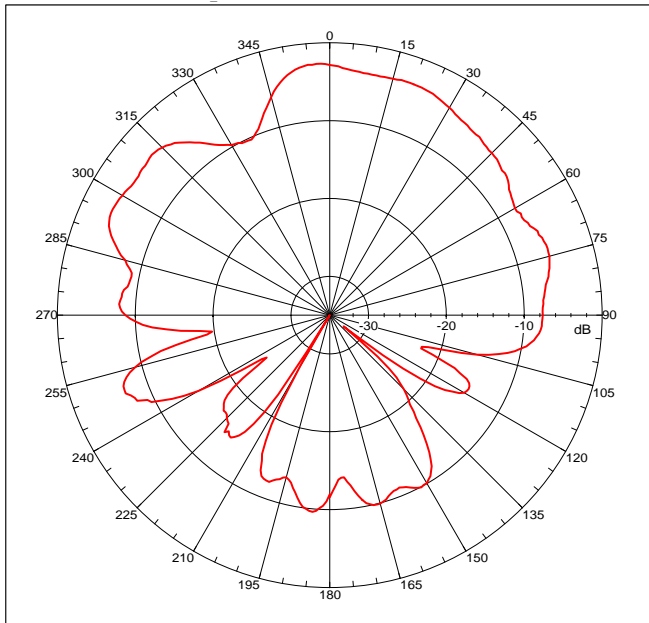

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -2.69088 dBi
 Max far-field (global) = -49.23862 dB, Max far-field (plot) = -49.23862 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: -3.00001 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex-2.nsi
 Measurement date/time: 4/6/2006 4:57:04 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -8.581 dB
 -3. dB beam width: 62.11 deg
 -6. dB beam width: 117.26 deg
 -10. dB beam width: 197.83 deg
 Left Sidelobe: -1.53 dB at -47.632 deg
 Right Sidelobe: -3.49 dB at 68.691 deg

Far-field display setup

Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1


Selected beam(s) 1 of 3

Beam Frequency Azimuth Elevation Pol

1 2.400 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ey.nsi

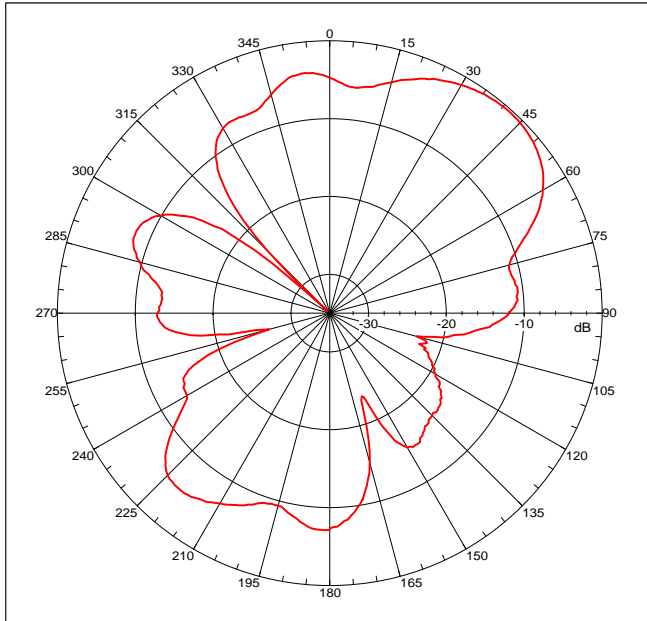

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -0.31879 dBi
 Max far-field (global) = -47.8462 dB, Max far-field (plot) = -47.84621 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 41.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ey-2.nsi
 Measurement date/time: 4/6/2006 5:04:22 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -8.689 dB
 -3. dB beam width: 41.13 deg
 -6. dB beam width: 82.23 deg
 -10. dB beam width: 109.28 deg
 Left Sidelobe: -3.66 dB at -5.515 deg
 Right Sidelobe: -21.60 dB at 107.800 deg

Far-field display setup


Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3

Beam	Frequency	Azimuth	Elevation	Pol
2	2.450 GHz	Azimuth	Elevation	Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

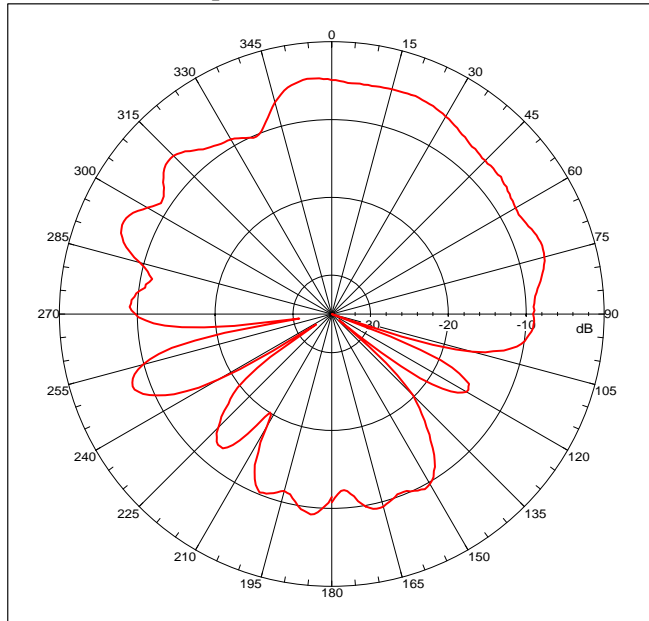

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -4.62222 dBi
 Max far-field (global) = -52.14963 dB, Max far-field (plot) = -52.14963 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: -6.00001 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename:C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex-2.nsi
 Measurement date/time: 4/6/2006 4:57:04 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -9.529 dB
 -3. dB beam width: 75.15 deg
 -6. dB beam width: 176.81 deg
 -10. dB beam width: 199.02 deg
 Left Sidelobe: -1.59 dB at -45.627 deg
 Right Sidelobe: -1.94 dB at 72.702 deg

Far-field display setup

Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1


Selected beam(s) 1 of 3

Beam Frequency Azimuth Elevation Pol

2 2.450 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ey.nsi

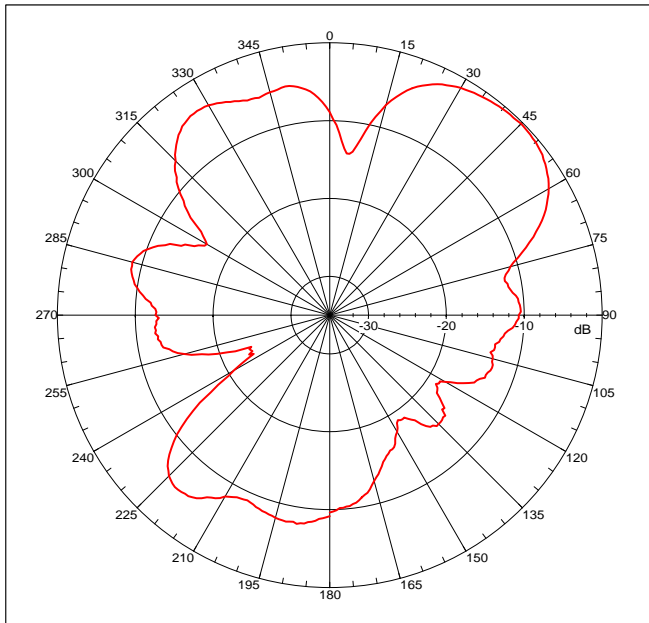

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -0.22392 dBi
 Max far-field (global) = -48.03828 dB, Max far-field (plot) = -48.03832 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 44.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G550\Data\G300-2.4G-Ey-2.nsi
 Measurement date/time: 4/6/2006 5:04:22 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -8.425 dB
 -3. dB beam width: 39.98 deg
 -6. dB beam width: 51.69 deg
 -10. dB beam width: 62.25 deg
 Left Sidelobe: -4.85 dB at -10.529 deg
 Right Sidelobe: -10.22 dB at 89.749 deg

Far-field display setup


Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3

Beam	Frequency	Azimuth	Elevation	Pol
3	2.500 GHz	Azimuth	Elevation	Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

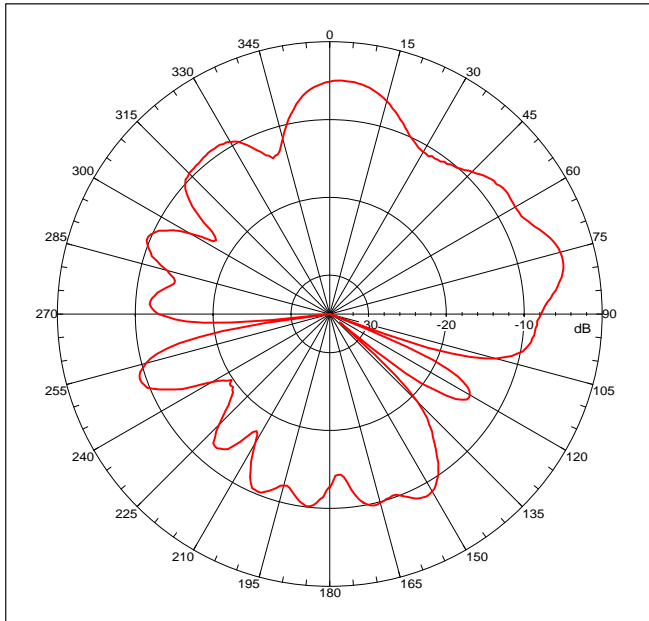

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -4.26204 dBi
 Max far-field (global) = -52.0764 dB, Max far-field (plot) = -52.07645 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 75.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename:C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex-2.nsi
 Measurement date/time: 4/6/2006 4:57:04 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -10.600 dB
 -3. dB beam width: 24.40 deg
 -6. dB beam width: 62.64 deg
 -10. dB beam width: 159.81 deg
 Left Sidelobe: -0.77 dB at 6.518 deg
 Right Sidelobe: -9.88 dB at 121.839 deg

Far-field display setup


Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3

Beam	Frequency	Azimuth	Elevation	Pol
3	2.500 GHz	Azimuth	Elevation	Single-pol


=====

G300 試用 15寸 5.15G Pattern

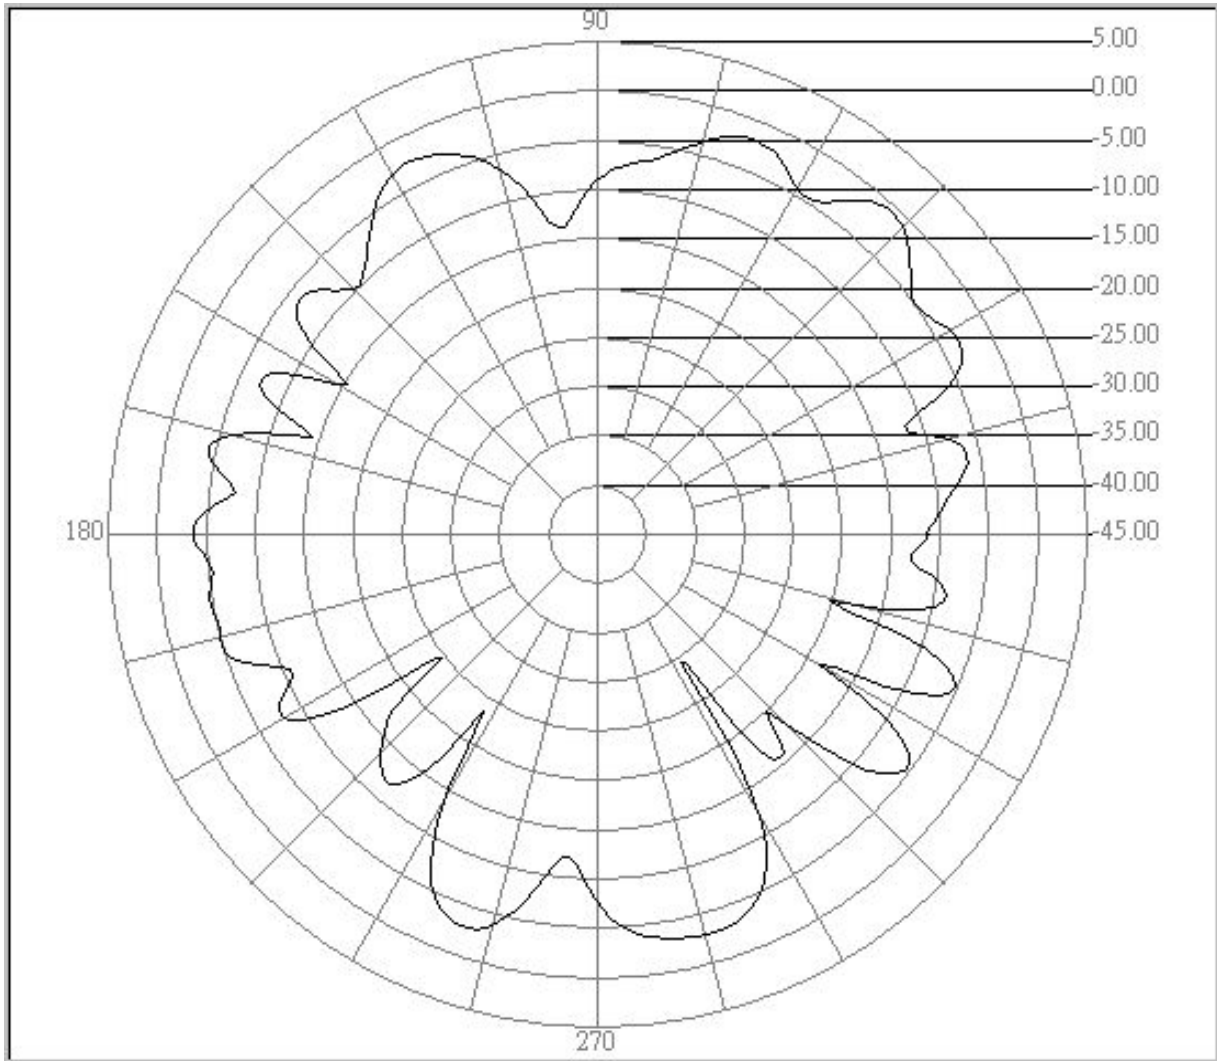


Center freq.(MHz): 5150 Polarization : E Plane
Max gain(dBi):-0.55 Min gain(dBi):-29.48 Avg gain(dBi):-6.16
15 BLACK

G300 試用 15寸 5.15G Pattern

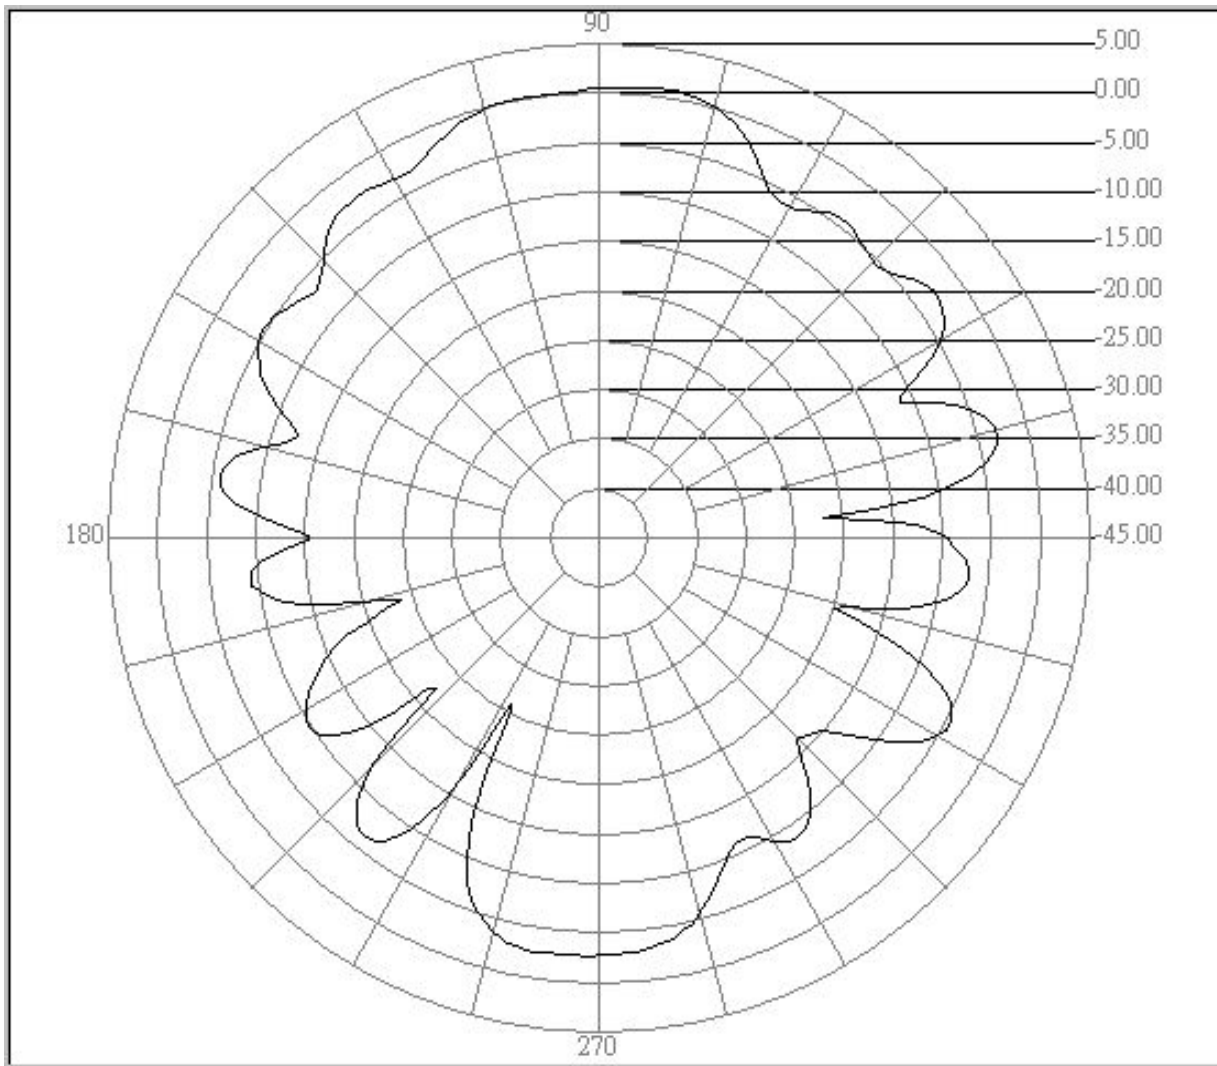


Center freq.(MHz): 5150 Polarization : H Plane
Max gain(dBi):0.90 Min gain(dBi):-25.96 Avg gain(dBi):-4.94
15 BLACK

G300 試用 15寸 5.5G Pattern

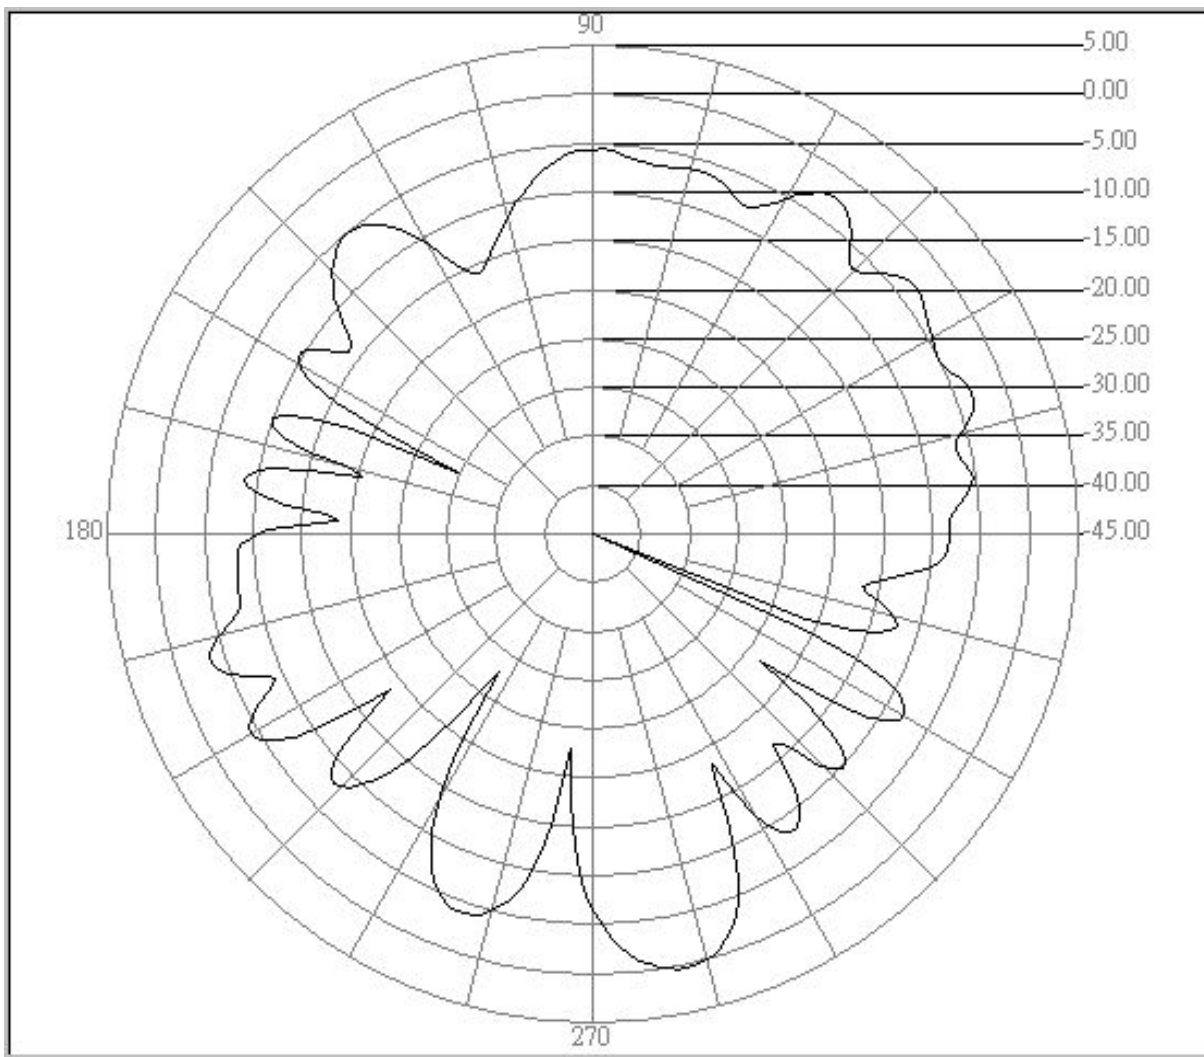


Center freq.(MHz): 5500 Polarization : E Plane
Max gain(dBi):0.39 Min gain(dBi):-44.99 Avg gain(dBi):-6.84
15 BLACK

G300 試用 15寸 5.5G Pattern

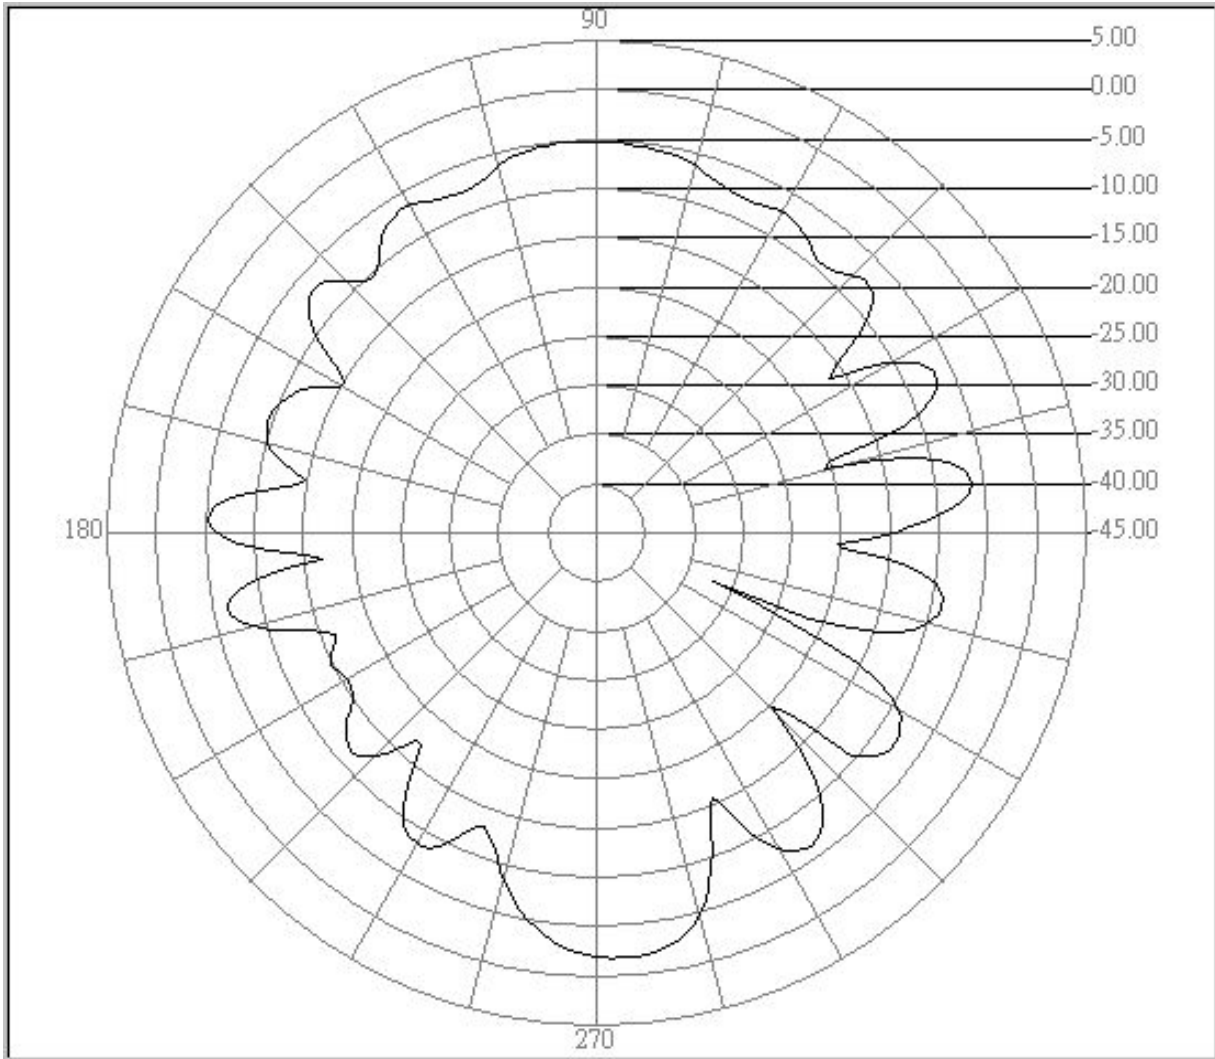


Center freq.(MHz): 5500 Polarization : H Plane
Max gain(dBi):-1.76 Min gain(dBi):-32.03 Avg gain(dBi):-8.02
15 BLACK

G300 試用 15寸 5.85G Pattern

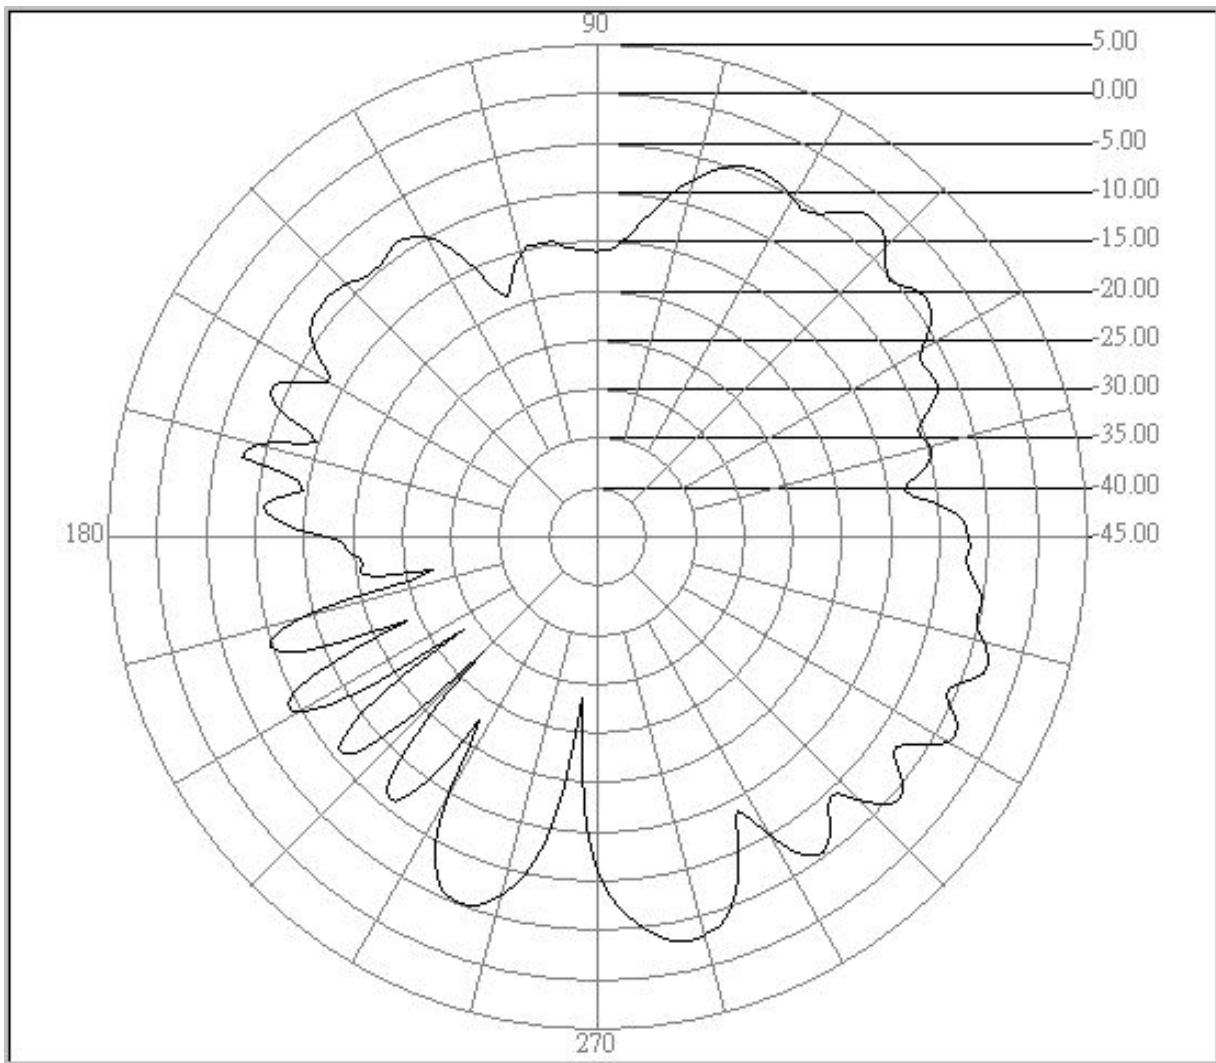

Center freq.(MHz): 5850 Polarization : E Plane
Max gain(dBi):-2.17 Min gain(dBi):-28.60 Avg gain(dBi):-7.76
15 BLACK

G300 試用 15寸 5.85G Pattern

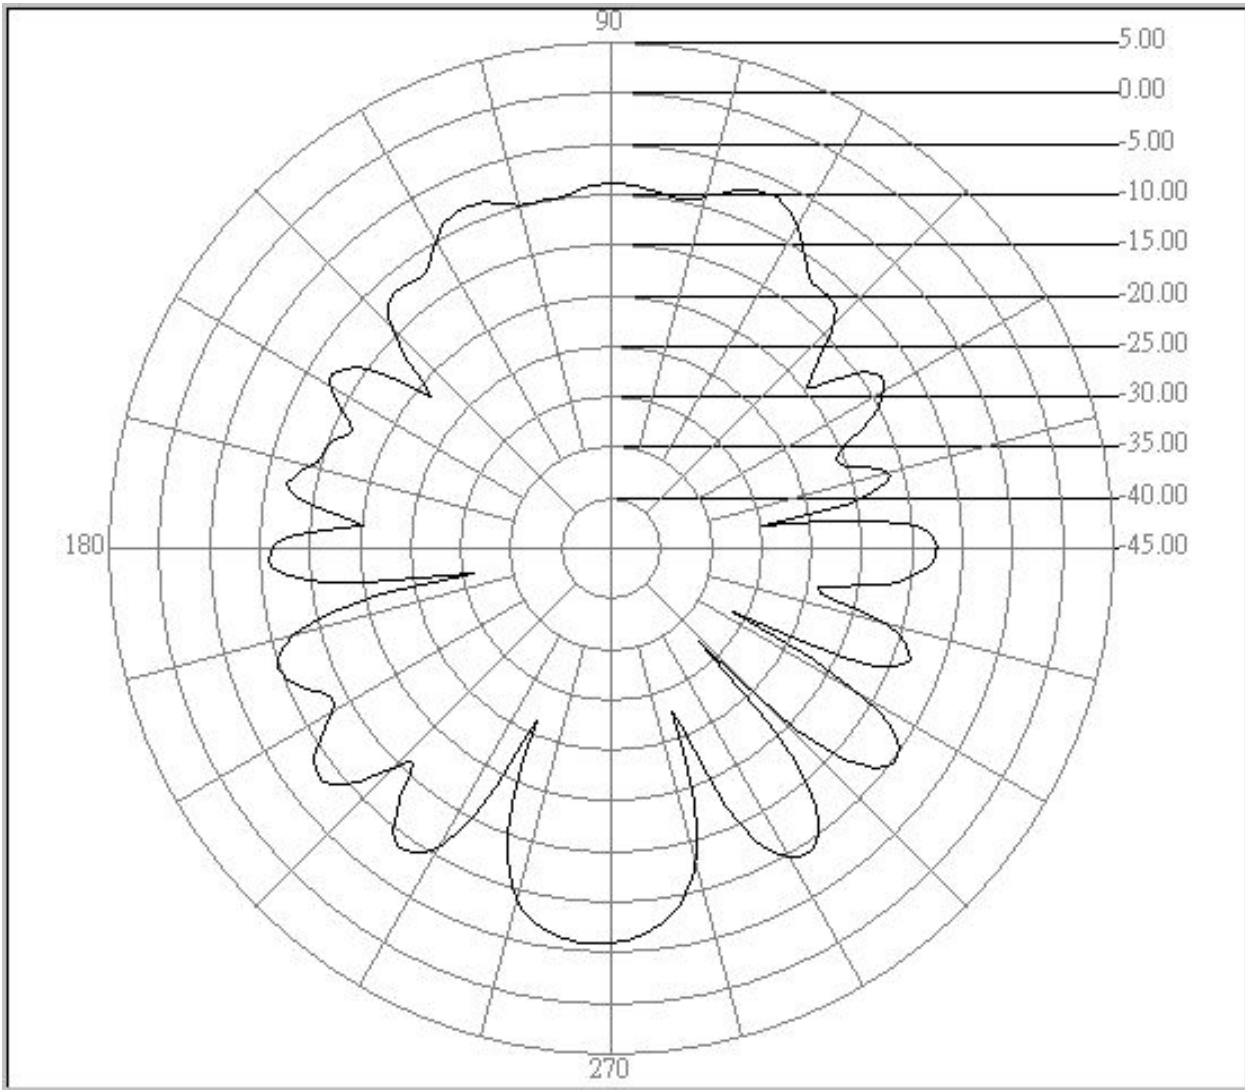


Center freq.(MHz): 5850 Polarization : H Plane
Max gain(dBi):-5.90 Min gain(dBi):-32.35 Avg gain(dBi):-11.23
15 BLACK


精英G300 試用 15.4寸 RETURNLOSS

1 Jul 2005 13:27:33

CH1 S₁₁ log MAG 10 dB/ REF 0 dB 4: -13.348 dB

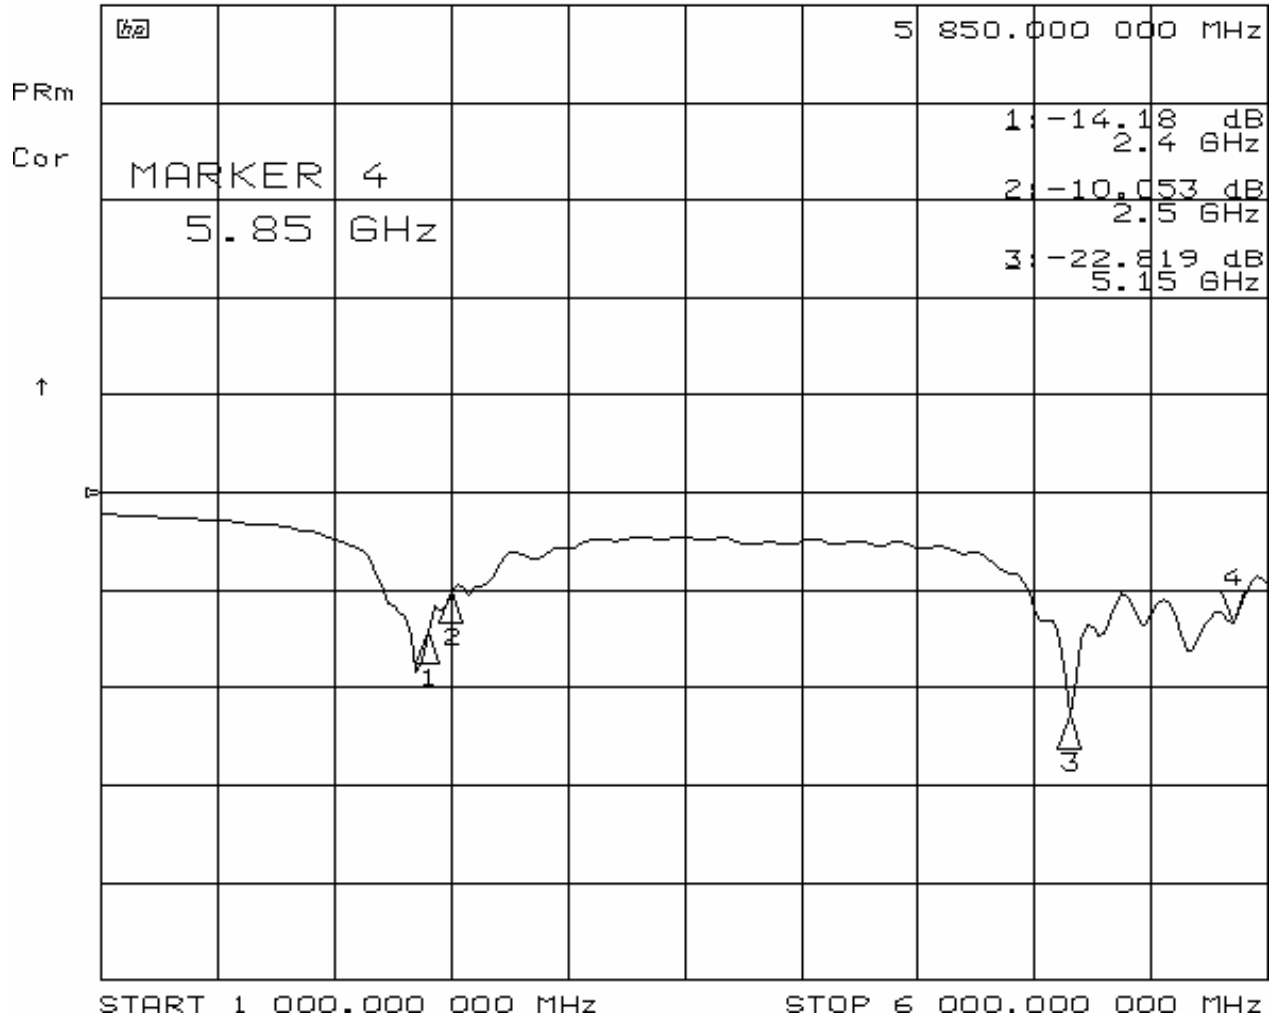

Far-field amplitude of G300-2.4G-Ey.nsi

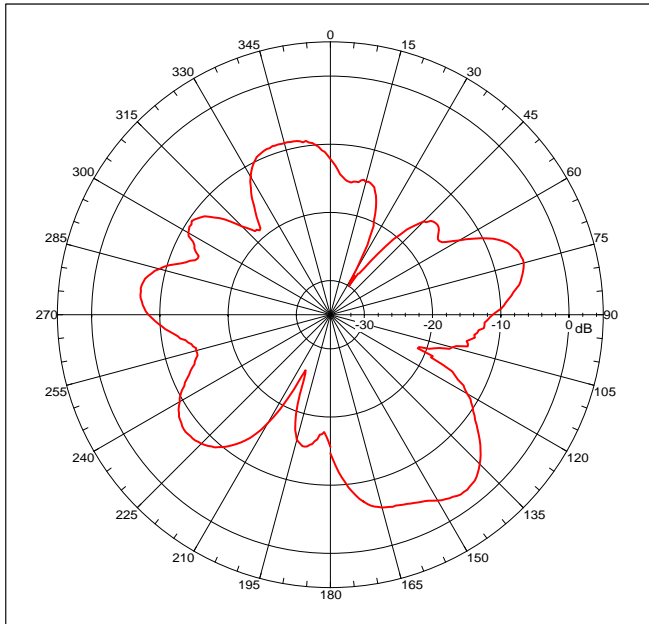

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -2.42152 dBi
 Max far-field (global) = -48.96926 dB, Max far-field (plot) = -48.96947 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 141.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ey.nsi
 Measurement date/time: 4/4/2006 3:33:10 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -10.717 dB
 -3. dB beam width: 29.02 deg
 -6. dB beam width: 45.78 deg
 -10. dB beam width: 58.61 deg
 Left Sidelobe: -11.91 dB at 103.788 deg
 Right Sidelobe: Not Found

Far-field display setup

Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1


Selected beam(s) 1 of 3

Beam Frequency Azimuth Elevation Pol

1 2.400 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

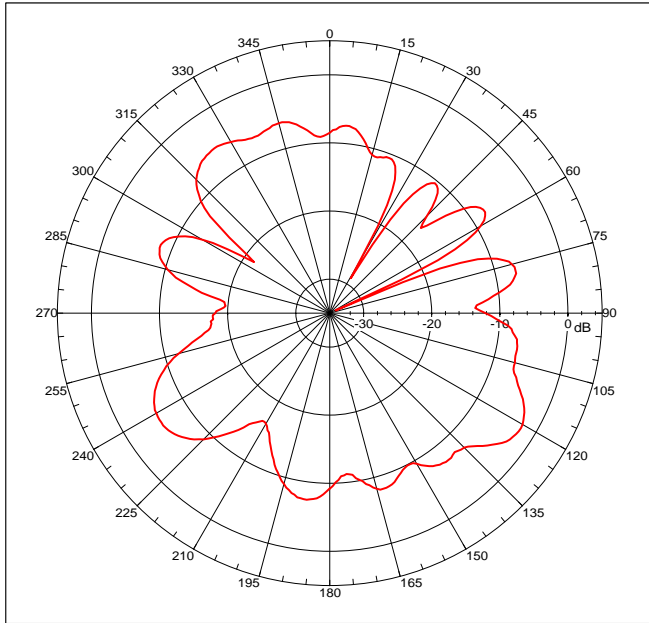

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -2.23657 dBi
 Max far-field (global) = -48.78431 dB, Max far-field (plot) = -48.7844 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 121.000 deg, Vpeak at: 0.000 deg
 Plot centering: On

dual band (5.15-5.85 GHz) PCB E-plane test data using continuous scan mode; IFBW reduced to 100Hz; using suggested dwell time of 20ms

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex.nsi
 Measurement date/time: 4/4/2006 3:28:26 PM, Filetype: NSI-97

Far-field Cut Analysis:
 Avg value: -9.089 dB
 -3. dB beam width: 19.74 deg
 -6. dB beam width: 52.28 deg
 -10. dB beam width: Not Found
 Left Sidelobe: -4.78 dB at 78.719 deg
 Right Sidelobe: -5.79 dB at 162.953 deg


Far-field display setup
 Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3
 Beam Frequency Azimuth Elevation Pol

 1 2.400 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ey.nsi

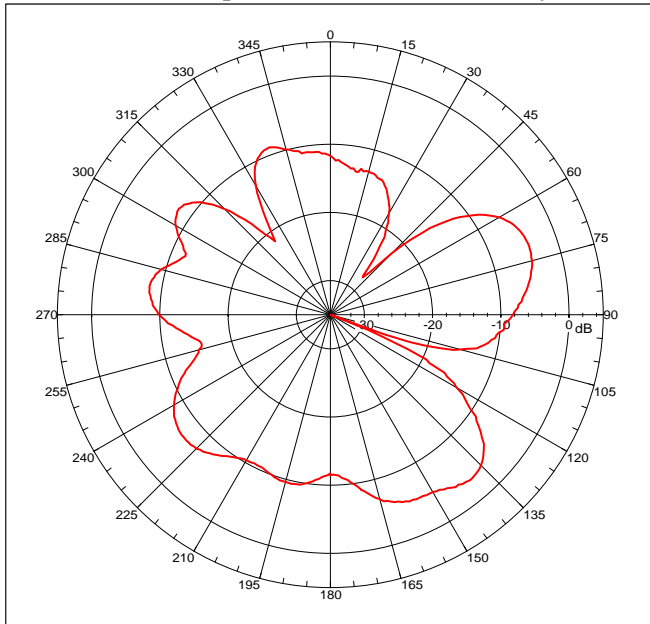

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -3.29007 dBi
 Max far-field (global) = -50.81748 dB, Max far-field (plot) = -50.81748 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 140.000 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ey.nsi
 Measurement date/time: 4/4/2006 3:33:10 PM, Filetype: NSI-97


Far-field Cut Analysis:
 Avg value: -9.771 dB
 -3. dB beam width: 33.29 deg
 -6. dB beam width: 45.98 deg
 -10. dB beam width: Not Found
 Left Sidelobe: -6.15 dB at 94.763 deg
 Right Sidelobe: Not Found

Far-field display setup
 Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3
 Beam Frequency Azimuth Elevation Pol
 --- ----
 2 2.450 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

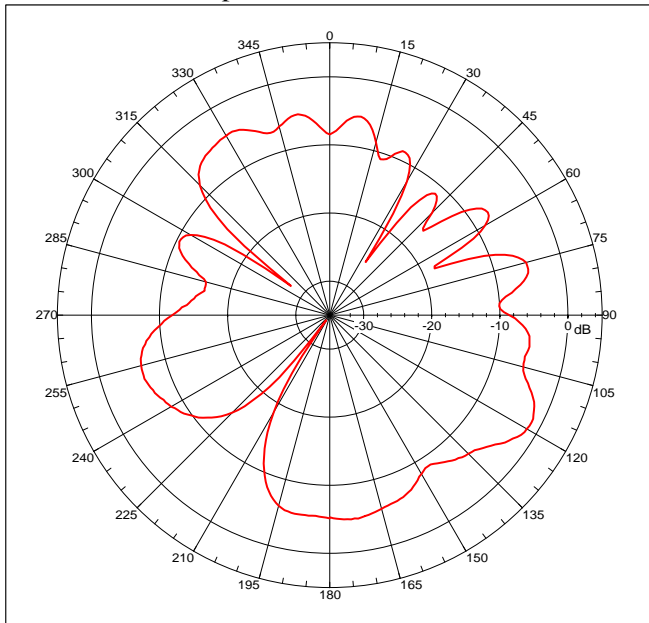

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -1.44088 dBi
 Max far-field (global) = -48.96829 dB, Max far-field (plot) = -48.96833 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 117.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

dual band (5.15-5.85 GHz) PCB E-plane test data using continuous scan mode; IFBW reduced to 100Hz; using suggested dwell time of 20ms

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex.nsi
 Measurement date/time: 4/4/2006 3:28:26 PM, Filetype: NSI-97

Far-field Cut Analysis:
 Avg value: -7.999 dB
 -3. dB beam width: 20.26 deg
 -6. dB beam width: 49.70 deg
 -10. dB beam width: Not Found
 Left Sidelobe: -3.65 dB at 77.716 deg
 Right Sidelobe: -3.41 dB at 172.981 deg


Far-field display setup
 Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3
 Beam Frequency Azimuth Elevation Pol

 2 2.450 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ey.nsi

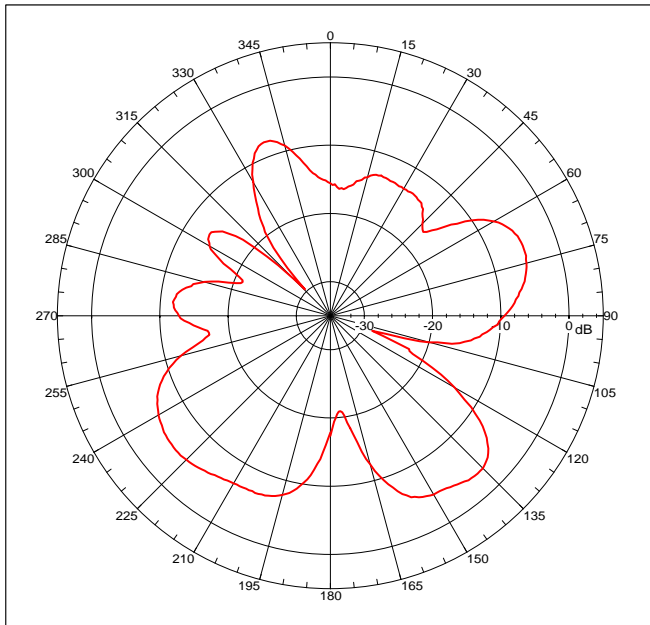

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -3.35753 dBi
 Max far-field (global) = -51.17189 dB, Max far-field (plot) = -51.17194 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: 136.99999 deg, Vpeak at: 0.000 deg
 Plot centering: On

test-20060406

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ey.nsi
 Measurement date/time: 4/4/2006 3:33:10 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -10.286 dB
 -3. dB beam width: 29.63 deg
 -6. dB beam width: 37.67 deg
 -10. dB beam width: 45.53 deg
 Left Sidelobe: -1.64 dB at 73.705 deg
 Right Sidelobe: Not Found

Far-field display setup

Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1


Selected beam(s) 1 of 3

Beam Frequency Azimuth Elevation Pol

3 2.500 GHz Azimuth Elevation Single-pol

=====

Far-field amplitude of G300-2.4G-Ex.nsi

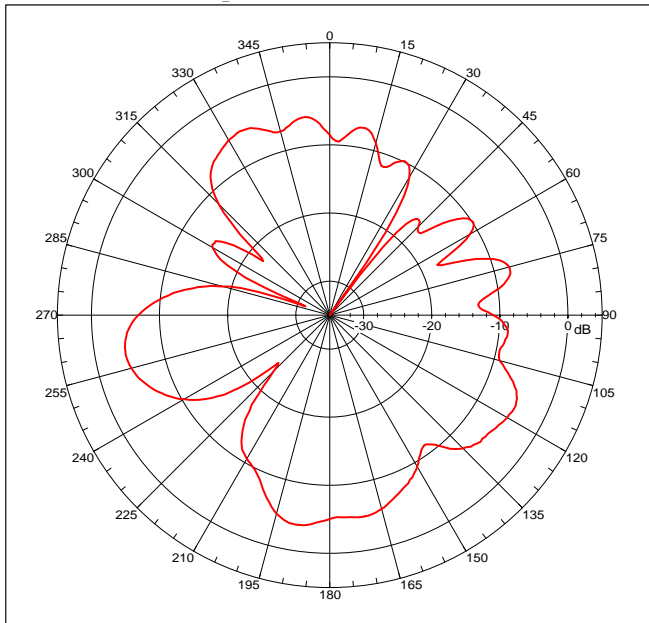

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
 Gain = -3.84447 dBi
 Max far-field (global) = -51.65883 dB, Max far-field (plot) = -51.65888 dB
 Normalization: Reference, Network offset = 0.000 dB
 Hpeak at: -171.000 deg, Vpeak at: 0.000 deg
 Plot centering: On

dual band (5.15-5.85 GHz) PCB E-plane test data using continuous scan mode; IFBW reduced to 100Hz; using suggested dwell time of 20ms

NSI2000 V4.0.174, Filename: C:\PIFA\ECSM\G300\Data\G300-2.4G-Ex.nsi
 Measurement date/time: 4/4/2006 3:28:26 PM, Filetype: NSI-97

Far-field Cut Analysis:
 Avg value: -8.940 dB
 -3. dB beam width: Not Found
 -6. dB beam width: Not Found
 -10. dB beam width: Not Found
 Left Sidelobe: Not Found
 Right Sidelobe: -0.66 dB at -100.780 deg


Far-field display setup
 Azimuth (deg)
 Span = 360.00001 deg, Center = 0.000 deg, #pts = 361
 Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 1.000 deg
 Elevation (deg)
 Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 3
 Beam Frequency Azimuth Elevation Pol

 3 2.500 GHz Azimuth Elevation Single-pol


=====

G300 試用 15.4寸 5.15G Pattern

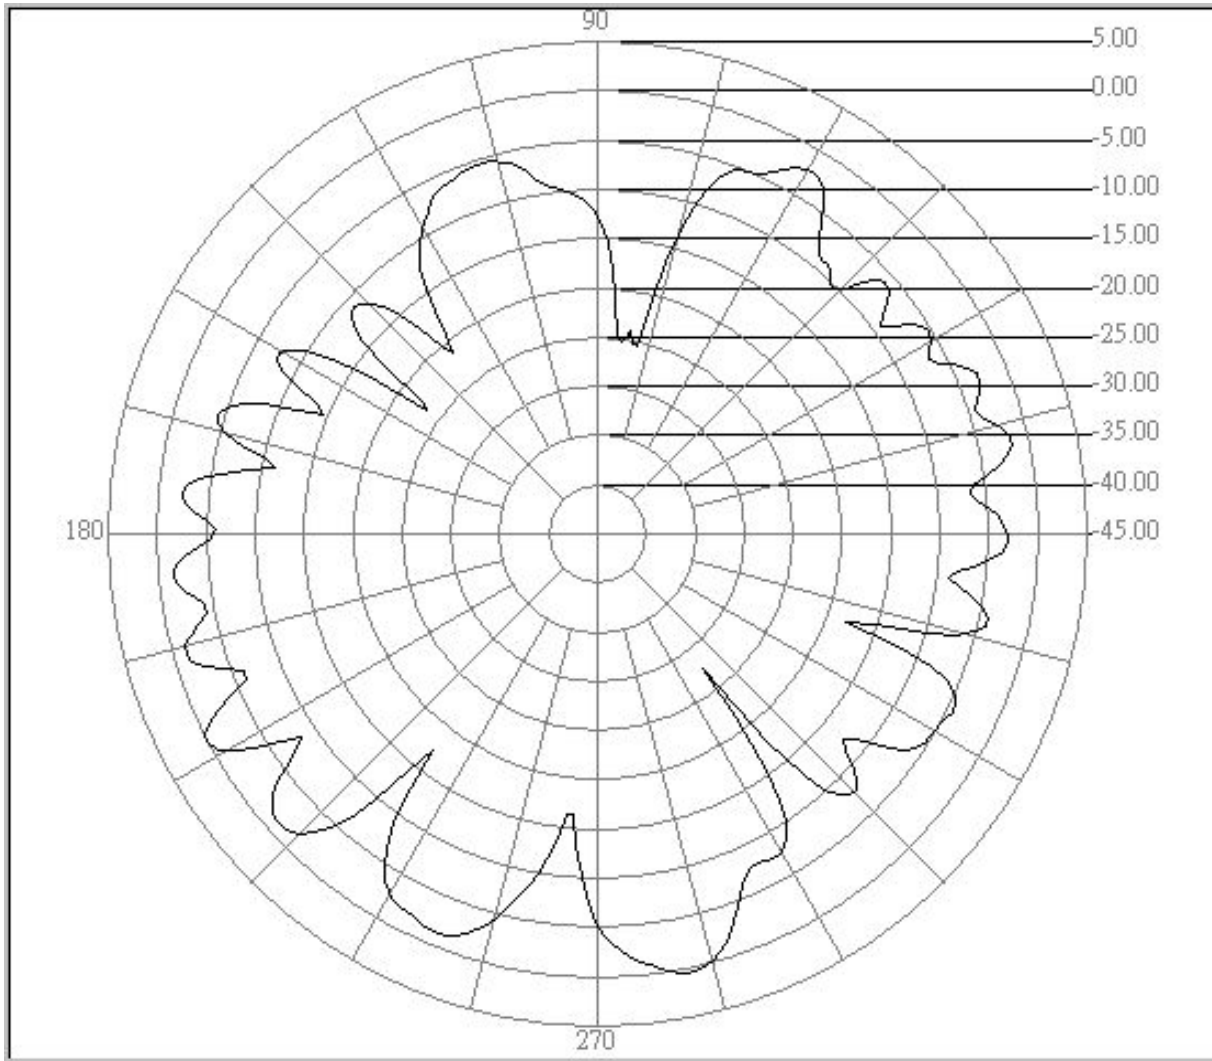


Center freq.(MHz): 5150 Polarization : E Plane
Max gain(dBi):0.47 Min gain(dBi):-27.63 Avg gain(dBi):-5.23
15.1 BLACK

G300 試用 15.4寸 5.15G Pattern

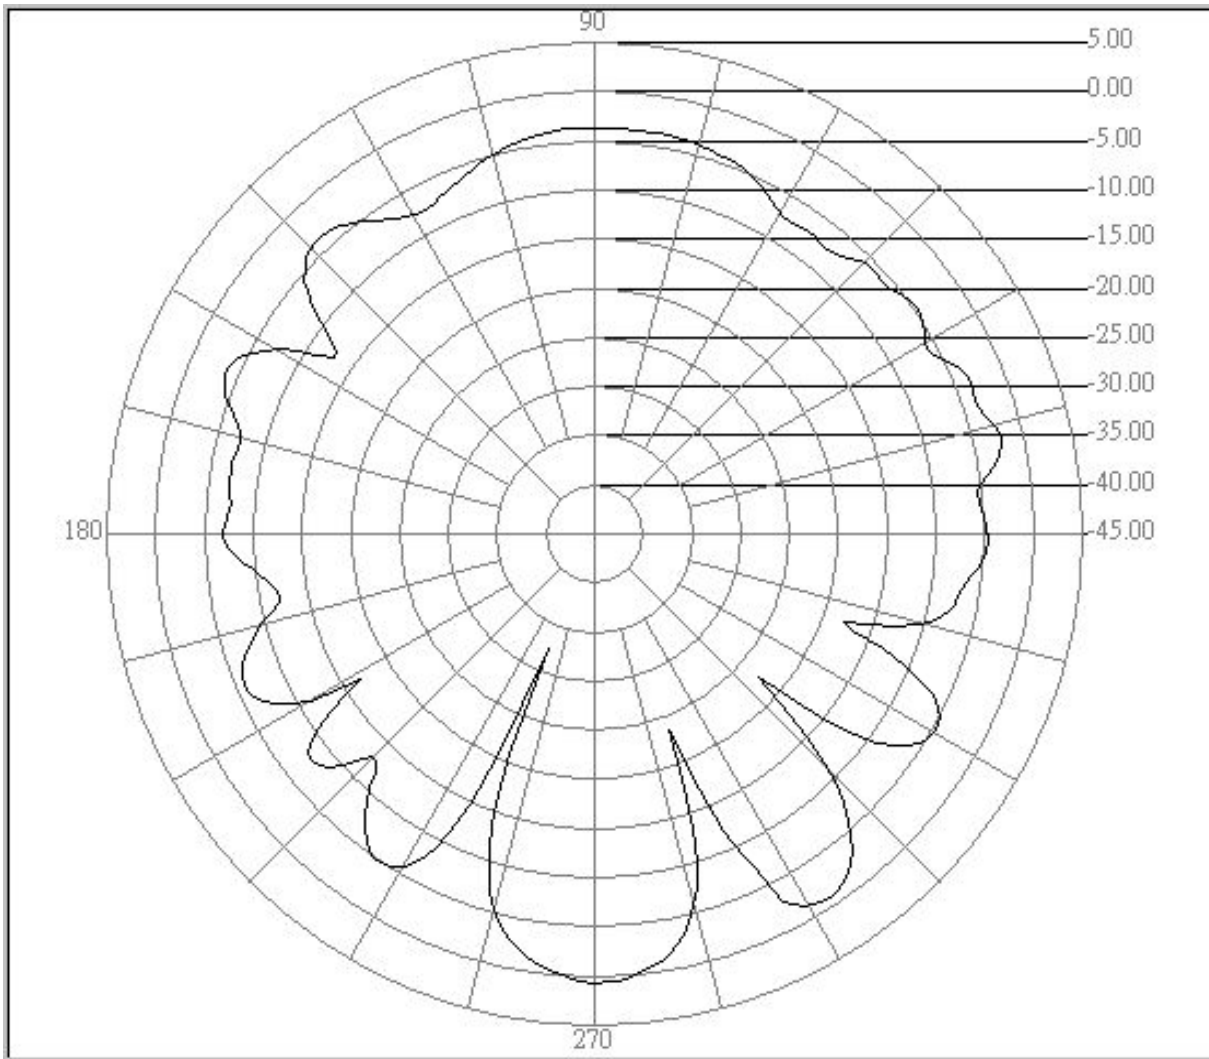


Center freq.(MHz): 5150 Polarization : H Plane
Max gain(dBi):0.68 Min gain(dBi):-32.45 Avg gain(dBi):-5.23
15.1 BLACK

G300 試用 15.4寸 5.5G Pattern

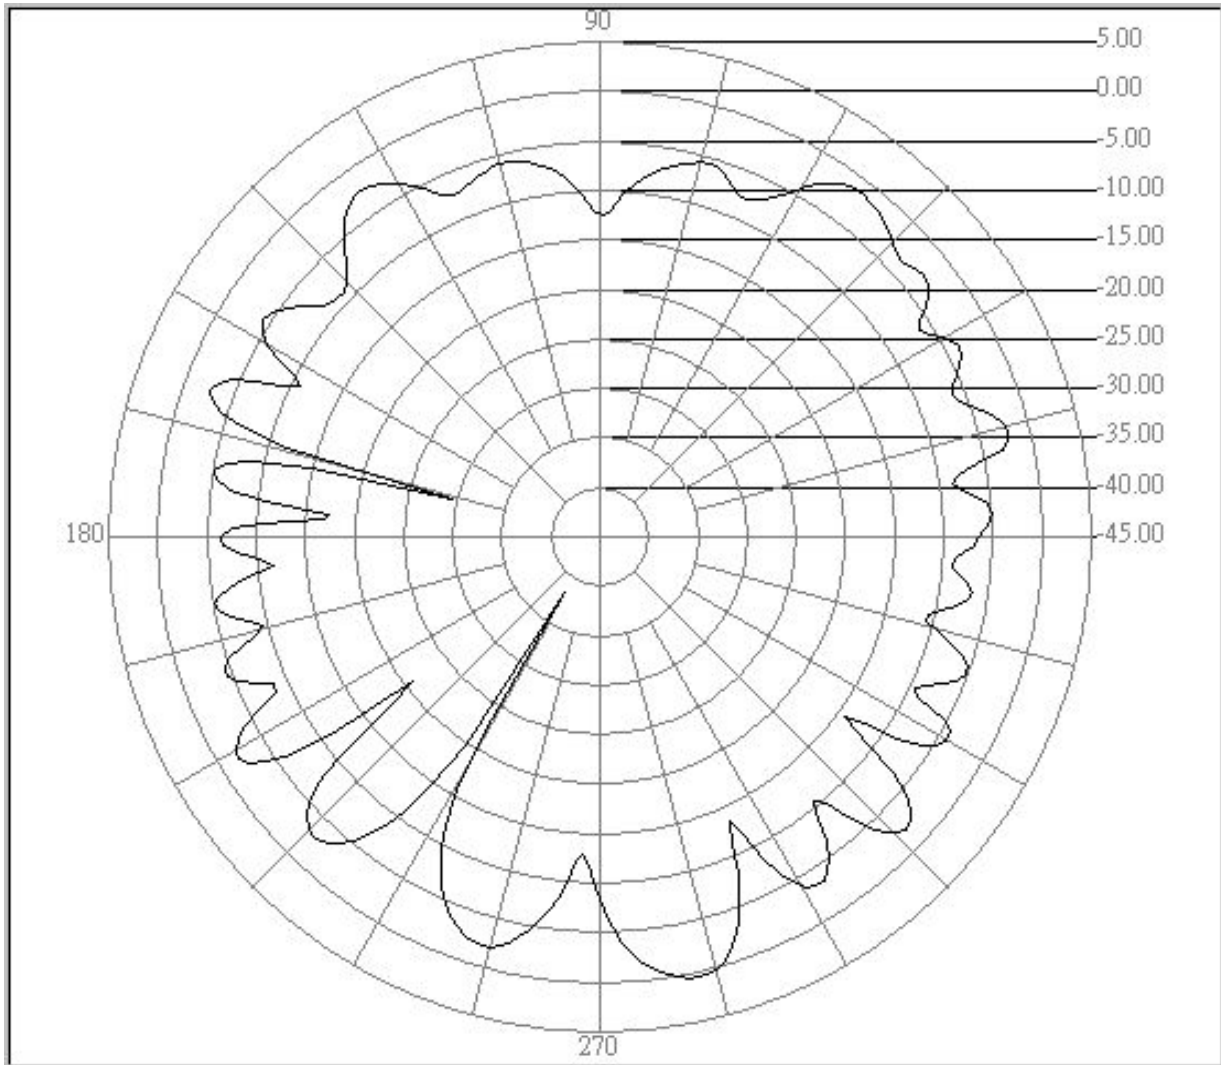


Center freq.(MHz): 5500 Polarization : E Plane
Max gain(dBi):0.58 Min gain(dBi):-38.34 Avg gain(dBi):-5.21
15.1 BLACK

G300 試用 15.4寸 5.5G Pattern

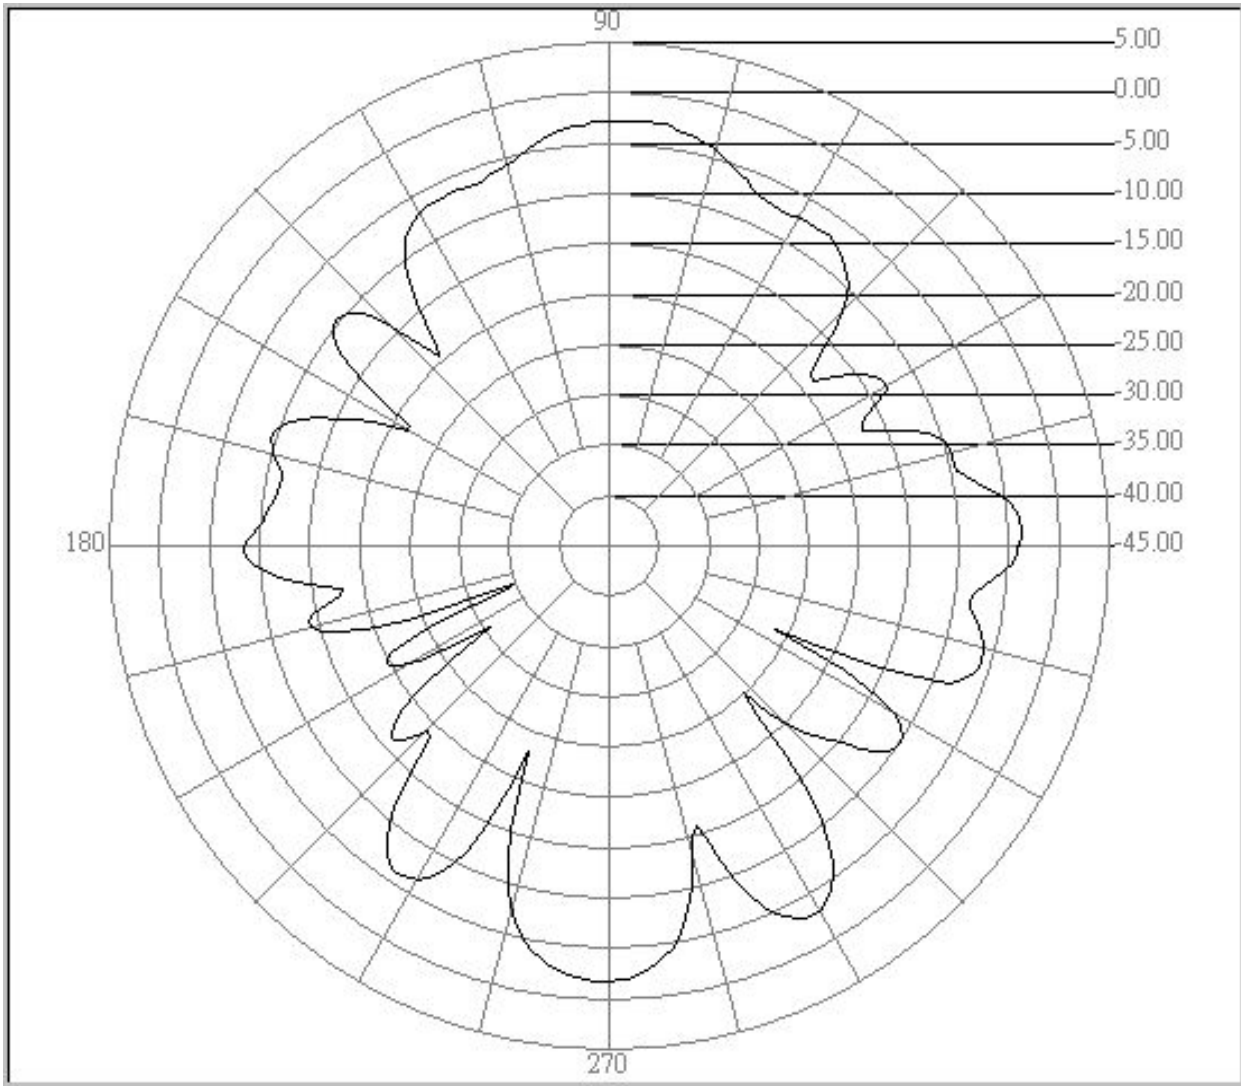

Center freq.(MHz): 5500 Polarization : H Plane
Max gain(dBi):-1.75 Min gain(dBi):-34.72 Avg gain(dBi):-7.57
15.1 BLACK

G300 試用 15.4寸 5.85G Pattern

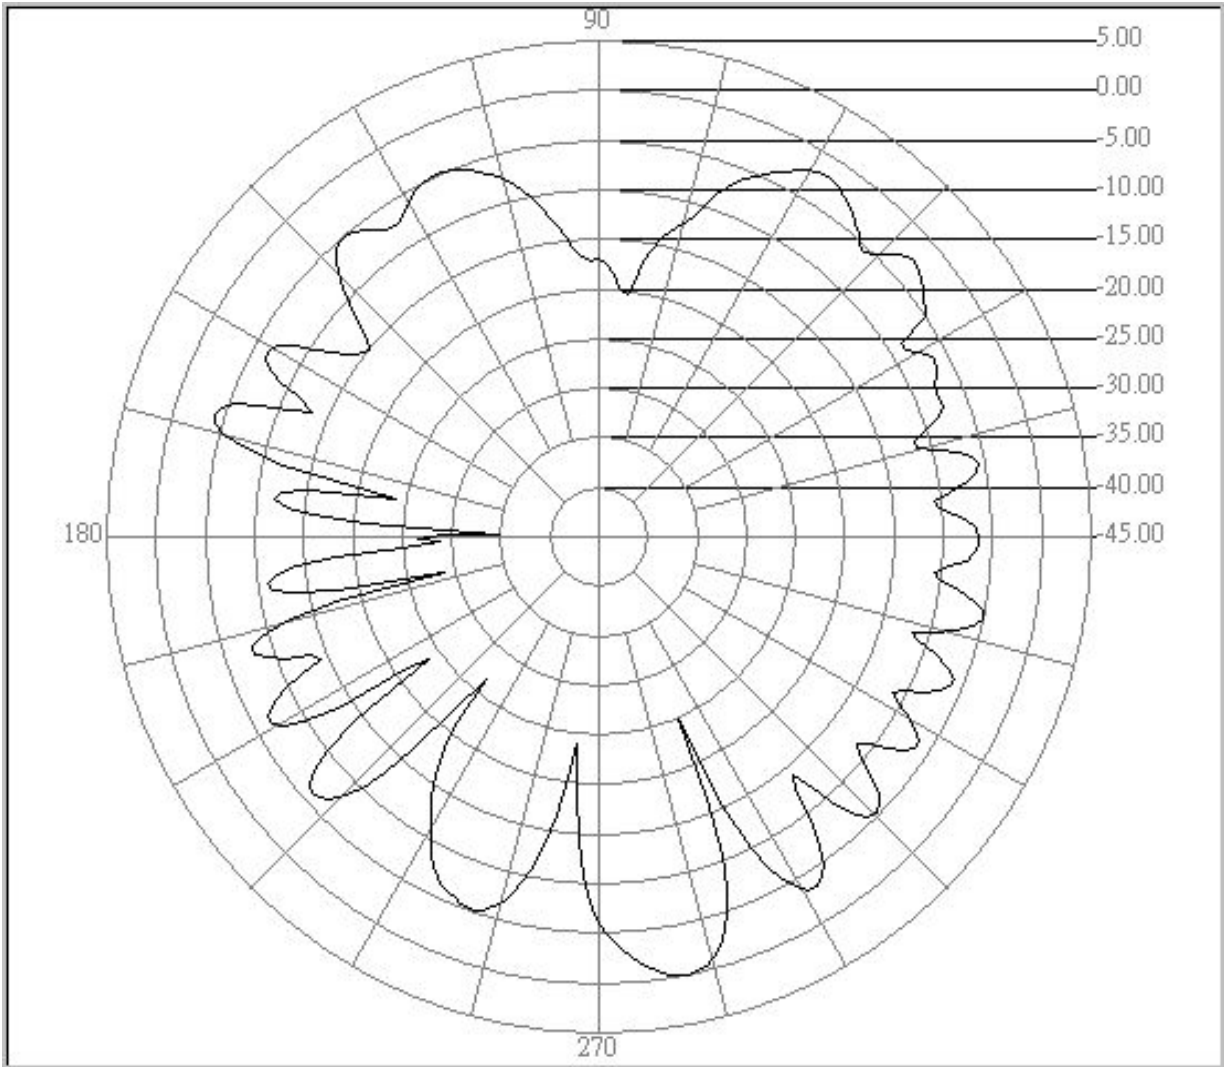


Center freq.(MHz): 5850 Polarization : E Plane

Max gain(dBi):0.05 Min gain(dBi):-34.98 Avg gain(dBi):-7.04

15.1 BLACK

G300 試用 15.4寸 5.85G Pattern

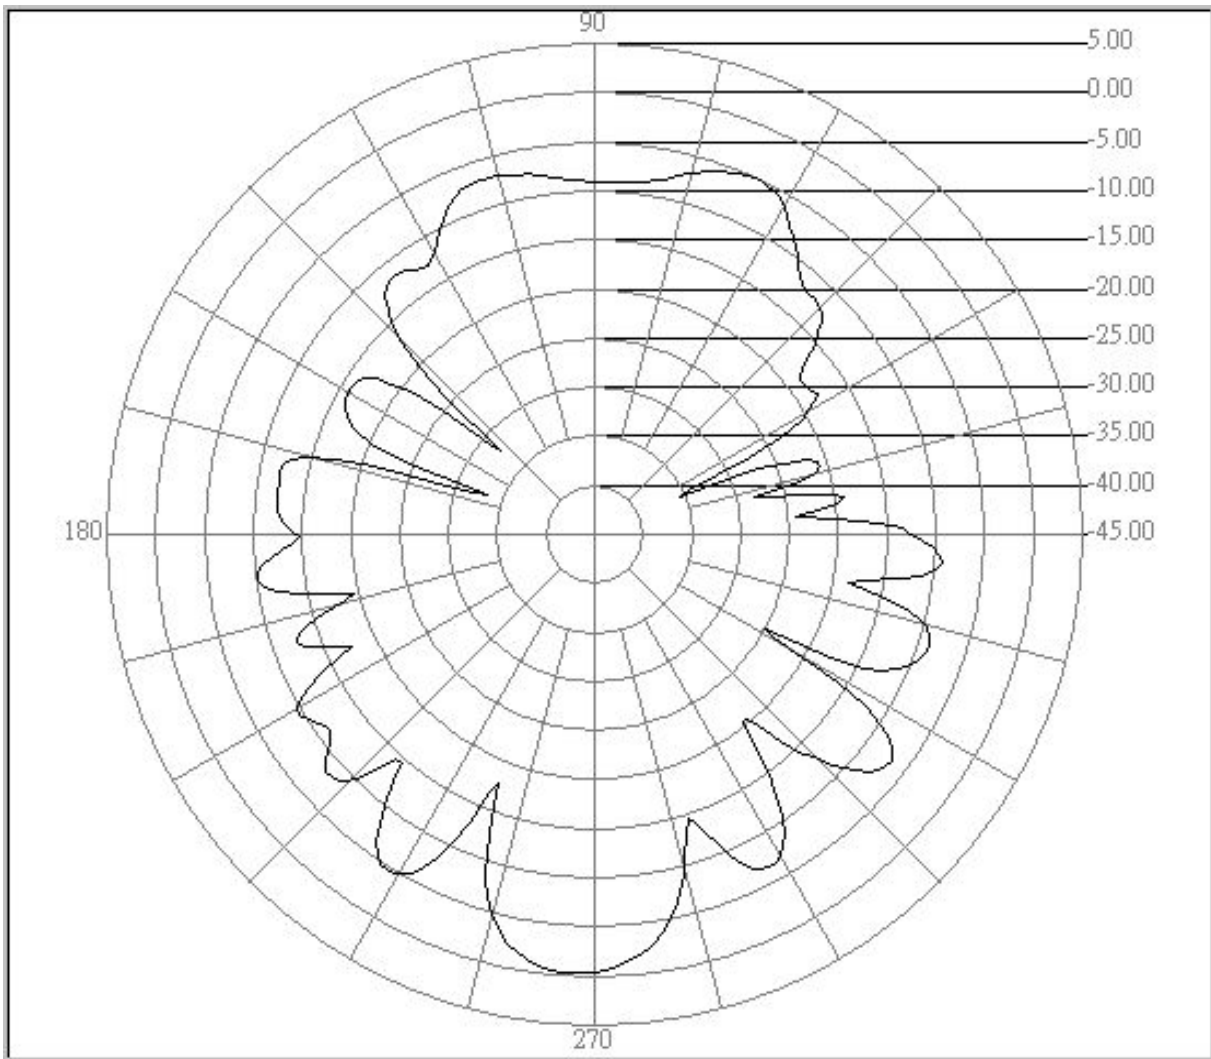

Center freq.(MHz): 5850 Polarization : H Plane
Max gain(dBi):-0.20 Min gain(dBi):-35.43 Avg gain(dBi):-8.65
15.1 BLACK