



ETS PRODUCT SERVICE AG

TEST - REPORT

**FCC RULES PARTS 22H and 24E
IC RADIO STANDARDS RSS 132 and RSS 133
for EDGE enabled GSM device**

FCC ID: NCMOGE0201

Model Name: GE0201

Test report no.: G0M20612-1054-C-2



Certificate 1983.01

TABLE OF CONTENTS

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of approval holder
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards

2 Technical test

- 2.1 Summary of test results
- 2.2 Test environment
- 2.3 Test equipment utilized
- 2.4 General test procedure
- 2.5 Test results

3 Transmitter parameters

- 3.1 RF power output conducted
- 3.2 RF power output radiated (ERP, EIRP)
- 3.3 Occupied bandwidth, emission bandwidth
- 3.4 Frequency stability
- 3.5 Spurious emission conducted (antenna terminal)
- 3.6 Spurious emission radiated
- 3.7 Block edge compliance
- 3.8 AC power line conducted emission

4 Receiver parameters

- 4.1 Radiated emission

APPENDIX

1 General information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS PRODUCT SERVICE AG.

Tester:

19.01.2007

M. Schlaps

i.s. Kasper 

Date

ETS-Lab.

Name

Signature

Technical responsibility for area of testing:

19.01.2007

N. Kasper

N. Kasper 

Date

ETS

Name

Signature

1.2 Testing laboratory

1.2.1 Location

ETS PRODUCT SERVICE AG
Storkower Strasse 38c
D-15526 Reichenwalde b. Berlin
Germany
Telephone : +49 33631 888 00
Telefax : +49 33631 888 660

1.2.2 Details of accreditation status

ACCREDITED TESTING LABORATORY
DAR-REGISTRATION NUMBER: DAT-P-201/96

ACCREDITED COMPETENT BODY
BNETZA-REGISTRATION NUMBER: BNETZA-zS-026/96

FCC FILED TEST LABORATORY:
REG. No. 96970

INDUSTRY CANADA FILED TEST LABORATORY
REG. No. IC 3470

A2LA ACCREDITED
CERTIFICATE NUMBER: 1983.01

BLUETOOTH QUALIFICATION TEST FACILITY (BQTF)
ACCREDITED BY: BLUETOOTH QUALIFICATION REVIEW BOARD (BQRF)

1.3 Details of approval holder

| | |
|-----------|-------------------------|
| Name | : Option N.V. |
| Street | : Gaston Geenslaan 14 |
| Town | : B-3001 Leuven |
| Country | : Belgium |
| Telephone | : +32 16 317 411 |
| Fax | : +32 16 207 164 |
| Contact | : Mr. Stefan Lodeweyckx |
| E-Mail | : +32 16 317 411 |

1.4 Application details

Date of receipt of application : 16.12.2006
 Date of receipt of test item : 16.12.2006
 Date of test : 16.12.2006 - 18.12.2006; 19.01.2007 - 23.01.2007

1.5 Test item

Description of test item : Globe Trotter Express '7.2 Ready' E
 Type identification : GE0201
 Serial number : withoutwithout
 Photos : See annex A.

Technical data

Frequency range Tx - GSM 850 : 824.2 - 848.80 MHz
 Frequency range Tx - PCS : 1850.2 - 1909.8 MHz
 Frequency range Rx - GSM 850 : 869.2 - 893.8 MHz
 Frequency range Rx - PCS : 1930.2 - 1989.8 MHz
 Antenna Type : internal antenna Galtronics #2
 Antenna Gain : 1 dBi (manufacturer declaration)
 Power supply : 3.3 V DC 120V AC/DC Adapter (Laptop)
 Operating mode : duplex
 Type of modulation : 8-PSK (EGPRS)
 Emission : G7W

Manufacturer: (if applicable)

Name :
 Street :
 Town :
 Country :

1.6 Test standards

Technical standard : FCC Parts: 22H, 24E, 2, 15
 IC Standards: RSS 132, RSS 133

Additional information : Because of using the GSM 850 as an alternative technology in 850 MHz band, not all test cases of FCC Part 22 are required.

This device contain functions that are not operational in U.S Territories except as noted in the filing. This filing is only applicable for US operations.

This test report covers the test which are related to EDGE radio technology in GSM 850 band and PCS band only.

Operation in others bands or with other radio technologies are subject of other independent test reports.

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.

2.2 Test environment

Temperature : 25 °C

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

2.3 Test equipment utilized

| No. | Test equipment | Type | Manufacturer |
|----------|--------------------------------|-----------------------|--------------------|
| ETS 0001 | ESD Gun | SESD 30000 | Schlöder |
| ETS 0002 | Test receiver | ESVP | R & S |
| ETS 0003 | Diode Power Sensor | NRV-Z2 | R & S |
| ETS 0004 | Spektrum- and Network-Analyzer | FSMS 26 | R & S |
| ETS 0005 | RF amplifier matrix | RSU-ETS-CTR6 | ETS |
| ETS 0006 | HP-Filter | H1G04G01 | Microwave |
| ETS 0007 | Horn antenna | AT 4004 | ar |
| ETS 0008 | Antenna | Loop antenna | Siemens |
| ETS 0009 | Comb Generator Emitter | CGE 02 | York EMC Services |
| ETS 0011 | Antenna (van Veen/Frame) | HM020Z3 | R & S |
| ETS 0012 | Biconical Antenna | HK 116 | R & S |
| ETS 0013 | LPD Antenna | HL 223 | R & S |
| ETS 0014 | Log Periodical Antenna | HL 025 | R & S |
| ETS 0015 | Log Periodical Antenna | HL 025 | R & S |
| ETS 0016 | Precision antenna kit | VHAP | Schwarzbeck |
| ETS 0017 | Precision antenna kit | UHAP | Schwarzbeck |
| ETS 0018 | Horn antenna | BBHA 9120 D | Schwarzbeck |
| ETS 0019 | Horn antenna | BBHA 9120 D | Schwarzbeck |
| ETS 0020 | Antenna | DP 21 | MEB |
| ETS 0021 | Antenna | DP 3 | MEB |
| ETS 0022 | Antenna | SAS-200/ 521 | A.H. Systeme+D65 |
| ETS 0023 | Antenna | DP 1 | MEB |
| ETS 0024 | Antenna mast | AF 2 | MEB |
| ETS 0025 | Antenna mast | AF 2 | MEB |
| ETS 0026 | Tripod | | Heinrich Deisel |
| ETS 0027 | Tripod | | Heinrich Deisel |
| ETS 0028 | Tripod | STA 2 | C. Lorenz AG |
| ETS 0029 | Tripod | | Berlebach |
| ETS 0030 | Biconical Antenna | HK 116 | R & S |
| ETS 0031 | Turn table | DS 412 | Heinrich Deisel |
| ETS 0032 | Controller | HD 050 | Heinrich Deisel |
| ETS 0033 | Calibr. Set CDN | 3x Adaptor 50-150 Ohm | ETS |
| ETS 0034 | RF Generator/ Amplifier | SMLR | R & S |
| ETS 0035 | RF Generator/ Amplifier | SMLM | R & S |
| ETS 0036 | Zirc. Antenna | 3102 | EMCO |
| ETS 0037 | Zirc. Antenna | 3102L | EMCO |
| ETS 0038 | RF amplifier | 150L | Amplifier Research |
| ETS 0039 | Absorbing clamp | MDS 21 | R & S |
| ETS 0040 | Artificial Mains Network | ESH3-Z5 | R & S |
| ETS 0041 | T-Artificial Mains Network | ESH3-Z4 | R & S |
| ETS 0042 | Artificial Mains | ESH3-Z6 | R & S |

| No. | Test equipment | Type | Manufacturer |
|-----------|---|-------------------------|-----------------------|
| ETS 0043 | Directional Coupler | 1850 | KRYTAR |
| ETS 0046 | Power supply | 2224.7 | Statron |
| ETS 0047 | Power supply | 2224.7 | Statron |
| ETS 0048 | Power supply | 2224.7 | Statron |
| ETS 0049 | Power supply | 2228.1 | Statron |
| ETS 0050 | Power supply | 2224.2 | Statron |
| ETS 0051 | Oscilloscope | TDS 640A | Tektronix |
| ETS 0051a | Probe a | P6139A | Tektronix |
| ETS 0051b | Probe b | P6139A | Tektronix |
| ETS 0052 | Audio analyzer | UPA 4 | R & S |
| ETS 0056 | Ultra Compact Simulator | UCS 500 M4 | EM Test |
| ETS 0057 | Motor Variac | MV 2616 | EM Test |
| ETS 0058 | Capacitive coupling clamp | E 502 B | Keytek/ EMC |
| ETS 0059 | Kikusui amplifier | PCR 2000L | Keytek/ EMC |
| ETS 0064 | CDN IEC 61000-4-6 | | Keytek/ EMC |
| ETS 0066 | EM Injection Clamp | | FCC/ EMC |
| ETS 0067 | Calibration Fixture | IEC 801-2031 CF | FCC/ EMC |
| ETS 0068 | CDN IEC 1000-4-6 | CDN | FCC/ EMC |
| ETS 0069 | EM Radiation Monitor | EMR-20 | W & G |
| ETS 0070 | PC Transfer set EMR-20 | EMR-20 | W & G |
| ETS 0071 | Video camera system | KMB012 | Kocom |
| ETS 0072 | Interphone system | JS-1400 | Jiuh Sheng |
| ETS 0073 | Audio noise meter | GSM 2 | MKD/ RFT |
| ETS 0075 | NF Generator | GF 22 | Präcitronic |
| ETS 0076 | Feeding bridge A | SBA 1000 | ESP |
| ETS 0078 | LCR meter | SR 720 | SRS |
| ETS 0079 | Functional Generator | MX-2020 | Maxcom |
| ETS 0082 | PC Novell network system | Novell | Esotronic |
| ETS 0085 | Shielded room | SR 1 | Frankonia |
| ETS 0086 | Semi-Anechoic chamber | AC 1 | Frankonia |
| ETS 0087 | Climatic cell | HC 4033 | Heraeus |
| ETS 0088 | Color TV pattern Generator | PM 5518-TX VPS | Philips |
| ETS 0089 | Radio Communication tester | CMS 54 | R & S |
| ETS 0091 | Signal Generator | SME 03 | R & S |
| ETS 0092 | Power Amplifier | 150W1000 | AR Amplifier Research |
| ETS 0093 | Attenuator | 57-20-33 | Weinschel |
| ETS 0094 | Power Sensor | NRV-Z55 | R & S |
| ETS 0095 | DECT system controller | PSMD | R & S |
| ETS 0096 | DECT Signaling unit | PSMD-B11 | R & S |
| ETS 0097 | Rack, 19", 36 HU | TS 89RA | R & S |
| ETS 0098 | System engineering and software | CS 893BE | R & S |
| ETS 0099 | Extension unit for basic version | TS 8930B | R & S |
| ETS 0100 | Signal Generator | SME-06 | R & S |
| ETS 0101 | Power Amplifier | 50W1000B | AR Amplifier Research |
| ETS 0102 | CDN | M3-801/6 | MEB |
| ETS 0103 | Magnetic field test set | MF1000 | EMC-Partner |
| ETS 0105 | RF Signal Generator (High power synthesizer/ sweeper) | SMP 02 (SMP 22 / 02) | R & S |

| No. | Test equipment | Type | Manufacturer |
|----------|--|-------------------------|--------------------|
| ETS 0106 | Antenna | Vamp 9243 | Schwarzbeck |
| ETS 0108 | DECT protocol tester TBR 22 | TS 1220 | R & S |
| ETS 0110 | Real time Signaling unit | PSMD-B2 | R & S |
| ETS 0111 | PCM Real-time audio interface for PSM | PSMD-B3 | R & S |
| ETS 0112 | Synthesizer Module | PSMD-B4 | R & S |
| ETS 0114 | RF step attenuator | RSG | R & S |
| ETS 0116 | Protokolltester | PTW 70 | R & S |
| ETS 0117 | Insertion unit | URV5-Z2 | R & S |
| ETS 0120 | RF step attenuator | TRI-50-20 | INCO |
| ETS 0123 | RF attenuator | RBU | R & S |
| ETS 0124 | Tripod | STA 2 | R & S |
| ETS 0136 | Attenuator | 33-6-34 | Weinschel |
| ETS 0140 | High voltage Generator | IP 6Wa | TPW |
| ETS 0141 | Sliding bridge | J 573 | RFT |
| ETS 0143 | Impedance converter | TK 12 | RFT |
| ETS 0144 | Notch filter | WRCT 24000/2497-80-20SS | Wainwright |
| ETS 0145 | Coaxial Directional | 3002-20 | Narda |
| ETS 0146 | Active Voltage Probe | ESH2-Z2 | R & S |
| ETS 0148 | RF Current Probe | F-65 | FCC |
| ETS 0149 | Power divider | ZAPD-21 | MCL |
| ETS 0150 | Switcher | HR07-720 | Wisi |
| ETS 0151 | Interference pulse Generator | NSG 500C | Schaffner |
| ETS 0152 | Simulator for Load-Dump-Impulse | NSG 506C (I) | Schaffner |
| ETS 0153 | Simulator for Load-Dump-Impulse | NSG 506C (II) | Schaffner |
| ETS 0155 | Signal Generator | SMG | R & S |
| ETS 0159 | Programmable power supply | TOE 8815 | Toellner |
| ETS 0160 | Amplifier | AR 1W1000 | Amplifier Research |
| ETS 0161 | Harmonic / Flicker Analyzer | HFA 3000 | Schlöder |
| ETS 0162 | Acoustic chamber | 403-A | IAC |
| ETS 0163 | Test head | BK 4602 | Brüel & Kjær |
| ETS 0164 | Simulator ear | BK 4185 | Brüel & Kjær |
| ETS 0165 | Simulator mouth | BK 4227 | Brüel & Kjær |
| ETS 0166 | Sound level calibrator | BK 4231 | Brüel & Kjær |
| ETS 0167 | Communication Analysis System | CAS TE I | HEAD acoustics |
| ETS 0168 | Acoustical test for DECT | CTR 10 | HEAD acoustics |
| ETS 0169 | Measurement - Front-end (analog) | MFE III | HEAD acoustics |
| ETS 0170 | Measurement - Front-end (digital) | MFE IV | HEAD acoustics |
| ETS 0171 | Electronic test cradle | TEH | HEAD acoustics |
| ETS 0172 | Noise Generator | HNG III.1 | HEAD acoustics |
| ETS 0173 | Speaker | Canton S Pluss | HEAD acoustics |
| ETS 0174 | Measurement - Front-end line interface | MFE V | HEAD acoustics |
| ETS 0175 | Software Line interface (analog) | COPTZV5 | HEAD acoustics |

| No. | Test equipment | Type | Manufacturer |
|-----------|--|-------------|-----------------------|
| ETS 0176 | Acoustic volt meter | COP 4 | HEAD acoustics |
| ETS 0177 | Feeding bridge B | SBB 1000 | ESP |
| ETS 0178 | Open area test side | 10m | ETS |
| ETS 0179 | Open area test side | 3 m | ETS |
| ETS 0186 | Power supply | DF 1730 | WJG |
| ETS 0189 | Spectrum Analyzer | FSEB | R & S |
| ETS 0191 | Sweep function Generator | 7202 | Dagatron |
| ETS 0218 | RF probe | URV5-Z7 | R & S |
| ETS 0219 | Power sensor | NRV-Z2 | R & S |
| ETS 0221 | ISDN-S0-Analyzer | K1403 | Siemens |
| ETS 0222 | ISDN Protocol Analyzer | TE965 | Tekelec Teleco. |
| ETS 0223 | GSM/ PCN/ PCS-Simul. | TS8916B | R & S |
| | Radio Channel Simulator | SOFI 05 | Sofimation |
| ETS 0224A | Millivolt meter | URV5 | R & S |
| ETS 0224B | Diode Power Sensor | NRV-Z1 | R & S |
| ETS 0224C | Programmable high resolution timer counter | PM6654G | Philips |
| ETS 0224D | RF Stepp Attenuator | RSP | R & S |
| ETS 0224E | Signal Generator | SMG | R & S |
| ETS 0225 | SIM Simulator | | Orga |
| ETS 0226 | SIM Editor | | Orga |
| ETS 0227 | Vibration table | TIRA vib | GenRad |
| | Accelerator | PCB M353B33 | PCB Piezotronics Inc. |
| ETS 0228 | Climatic chamber | VT 4010 | Vötsch |
| ETS 0229 | Radio Communication. Tester | CMT 54 | R & S |
| ETS 0230 | Radio Communication. Tester | CMD 65 | R & S |
| ETS 0232 | Radiation test source | VSQ 1 | MEB |
| ETS 0233 | Direction coupler | RK 100 | MEB |
| ETS 0234 | Power meter | NRVD | R & S |
| ETS 0235 | RF-network-Analyzer | 8752 C | HP |
| ETS 0236 | RF-amplifier | 100A100 | ar |
| ETS 0237 | RF-amplifier | 100W1000M1 | ar |
| ETS 0238 | Field strong meter | FM 2000 | ar |
| ETS 0239 | Isotropic field probe 40 GHz | FP 2080 Kit | ar |
| ETS 0240 | Isotropic field probe 1 GHz | FP 2000 Kit | ar |
| ETS 0241 | Pulse Generator | 4050 | PicoSecond PL |
| ETS 0244 | Ultra Compact Simulator | UCS 200 M | EM-Test |
| ETS 0245 | Load dump Generator | LD 200 B1 | EM-Test |
| ETS 0246 | Voltage drop simulator | VDS 200 | EM-Test |
| ETS 0247 | Calibration adaptor | KW50 | EM-Test |
| ETS 0248 | Calibration adaptor | KW1000 | EM-Test |
| ETS 0251 | Climatic chamber | VT 4004 | Vötsch |
| ETS 0252 | System controller | PSM 12 | R & S |
| ETS 0253 | Spectrum Analyzer | FSIQ 26 | R & S |
| ETS 0254 | RF Generator | SMIQ 03 | R & S |
| ETS 0255 | RF Generator | SMIQ 03 | R & S |
| ETS 0256 | RF Generator | SMR 27 | R & S |
| ETS 0257 | Step attenuator | RSP | R & S |
| ETS 0258 | Rubidium standard | RSTU | DATUM GmbH |

| No. | Test equipment | Type | Manufacturer |
|----------|-----------------------|-----------|--------------|
| ETS 0259 | Power meter | NRVD | R & S |
| ETS 0260 | Power sensor | NRV-Z1 | R & S |
| ETS 0261 | Power sensor | NRV-Z1 | R & S |
| ETS 0262 | Switching unit | SSCU | R & S |
| ETS 0263 | Signaling unit | PTW 60 | R & S |
| ETS 0265 | Loop antenna | HFRA 9150 | Schwarzbeck |
| ETS 0266 | Messadapter 1:100 | 50 Ohm | |
| ETS 0267 | RF Signal Generator | SMT 03 | R & S |
| ETS 0268 | Signal Generator | SMP 02 | R & S |
| ETS 0269 | RF bridge 50 Ohm | 86205 A | Agilent |
| ETS 0270 | Signal Generator | SMP 04 | R & S |
| ETS 0271 | Spectrum Analyzer | FSEK 30 | R & S |
| ETS 0272 | Signal Generator | SME 03 | R & S |
| ETS 0273 | Signal Generator | SME 03 | R & S |
| ETS 0274 | Signal Generator | SMY 01 | R & S |
| ETS 0275 | Power sensor | NRV-Z51 | R & S |
| ETS 0276 | Audio Analyzer | UPL 16 | R & S |
| ETS 0277 | Power sensor | NRV-Z1 | R & S |
| ETS 0278 | Power sensor | NRV-Z31 | R & S |
| ETS 0279 | Step attenuator | RSP | R & S |
| ETS 0280 | Power meter | NRVD | R & S |
| ETS 0281 | Spectrum Analyzer | FSM | R & S |
| ETS 0282 | RF bridge 75 Ohm | 86207 A | HP |
| ETS 0283 | RF bridge 50 Ohm | 86205 A | HP |
| ETS 0284 | Field probe | 11940 A | HP |
| ETS 0285 | Field probe | 11941 A | HP |
| ETS 0286 | Limither | 11867 A | HP |
| ETS 0287 | EMI Test receiver | ESHS10 | R & S |
| ETS 0288 | Artificial mains | ESH2-Z5 | R & S |
| ETS 0289 | Audio Generator | TAG 101 | Troneer |
| ETS 0290 | Audio Generator | TAG 101 | Troneer |
| ETS 0291 | Loop antenna | HFH2-Z2 | R & S |
| ETS 0292 | RF Generator | SMHU | R & S |
| ETS 0293 | Artificial mains | NNBM 8125 | Schwarzbeck |
| ETS 0294 | Biconical antenna | HK 116 | R & S |
| ETS 0295 | LPD antenna | HL 223 | R & S |
| ETS 0296 | GTEM cell | GTEM 500 | Schaffner |
| ETS 0297 | Power pulse Generator | IGUF 2910 | Schwarzbeck |
| ETS 0299 | DECT protocol tester | TS 1220 | R & S |
| ETS 0300 | RF amplifier | 75 A 250 | ar |
| ETS 0301 | Relay switch unit | RSU | R & S |
| ETS 0302 | Data line CDN | CM-I/O CD | Keytek |
| ETS 0303 | Telecom line CDN | CM-TEL CD | Keytek |
| ETS 0306 | Function Generator | HP 33120A | HP |
| ETS 0307 | Commu. Sign. Analyzer | CSA 803 A | Tektronix |
| ETS 0308 | Spectrum analyzer | R 3361A | Advantest |
| ETS 0309 | Anechoic chamber | AC 2 | Frankonia |
| ETS 0310 | Anechoic chamber | AC 3 | Frankonia |

| No. | Test equipment | Type | Manufacturer |
|----------|--|-------------------|--------------------|
| ETS 0311 | Anechoic chamber | AC 4 | Frankonia |
| ETS 0313 | Power sensor | NRV-Z51 | R & S |
| ETS 0314 | LPD antenna | HL 223 | R & S |
| ETS 0315 | Biconical antenna | HK 116 | R & S |
| ETS 0316 | Switcher | Hr 07-720 | WISI |
| ETS 0318 | Dial pulse/ DTMF tester | 210 | HE |
| ETS 0319 | Opto link | GPIB 140 | NI |
| ETS 0320 | Opto link | GPIB 140 | NI |
| ETS 0322 | Insertion unit | URV5-Z4 | R & S |
| ETS 0328 | ELF Field Strenght Measurement System | HI-3604 | Holiday Ind., INC. |
| ETS 0329 | VDT / VLF Radiation Measurement System | HI-3603 | Holiday Ind., INC. |
| ETS 0330 | Fiber Optic Remote Control | HI-3616 | Holiday Ind., INC. |
| ETS 0331 | TS 1220 | | |
| ETS 0332 | PSM | | |
| ETS 0333 | Turn table | DE 350 | Heinrich Deisel |
| ETS 0334 | Controller | HD 100 | Heinrich Deisel |
| ETS 0336 | LPD antenna | HL 223 | R & S |
| ETS 0338 | Coupling network | KN002 | ETS |
| ETS 0339 | Isolating Transformer | KN003 | ETS |
| ETS 0347 | Current Probe | EZ-17 | R & S |
| ETS 0348 | RF Millivolt meter | URV 55 | R & S |
| ETS 0349 | | | |
| ETS 0350 | Horn Antenna | BBHA 9120-C | Schwarzbeck |
| ETS 0351 | RF amplifier | DWT-18057 | Microwave |
| ETS 0352 | RF amplifier | | |
| ETS 0353 | Hochpassfilter | | |
| ETS 0354 | RF amplifier | DBS-0408N423 | Microwave |
| ETS 0355 | high pass | H03G12G3 | Microwave |
| ETS 0356 | high pass | H03G12G3 | Microwave |
| ETS 0357 | high pass | H08G18G3 | Microwave |
| ETS 0358 | RF amplifier | AFD3-010040-15-ln | MITEQ |
| ETS 0359 | RF amplifier | M/N AM-1331 | MITEQ |
| ETS 0360 | RF amplifier | DBS-0408N423 | Microwave |
| ETS 0361 | RF amplifier | DBS 1826N515 | Microwave |
| ETS 0362 | high pass | H03G12G3 | Microwave |
| ETS 0363 | high pass | H08G18G3 | Microwave |
| ETS 0364 | high pass | H08G18G3 | Microwave |
| ETS 0365 | Notch filter 2.4 GHz | WRCT2.40/248 | Wain Wright |
| ETS 0366 | high pass | H08G18G3 | Microwave |
| ETS 0367 | high pass | H03G12G3 | Microwave |
| ETS 0368 | Notch filter 0.5-1 GHz | BN86883 | Schomandl |
| ETS 0369 | Notch filter 210-500 MHz | BN86882 | Schomandl |
| ETS 0370 | Notch filter 15-90 MHz | BN86880 | Schomandl |
| ETS 0371 | Notch filter 85-250 MHz | BN86881 | Schomandl |
| ETS 0372 | Direction coupler | RK 100 | MEB |
| ETS 0373 | Direction coupler | DC3001 | EMC |
| ETS 0374 | DC Power Supply | NGSM32 | R & S |

| No. | Test equipment | Type | Manufacturer |
|----------|--|----------------------------|---------------|
| ETS 0375 | Vector Signal Gener. | SMIQ03B | R & S |
| ETS 0376 | Signal Generator | SMP22 | R & S |
| ETS 0377 | Advanced Signal Conditioning Unit | ASCU850 | R & S |
| ETS 0378 | Advanced Signal Conditioning Unit | ASCU190 | R & S |
| ETS 0379 | Advanced Signal Conditioning Unit | ASCU180 | R & S |
| ETS 0380 | Advanced Signal Conditioning Unit | ASCU900 | R & S |
| ETS 0381 | Ethernet HUB | CS-HUB | R & S |
| ETS 0382 | Vector Signal Gener. | SMIQ03B | R & S |
| ETS 0383 | Spectrum Analyzer | FSU26 | R & S |
| ETS 0384 | Main Frame Signal and Conditioning Unit | SSCU-GW | R & S |
| ETS 0385 | Protocol Slave | CRTU-RU (CRTU-G) | R & S |
| ETS 0386 | Power meter | NRVD | R & S |
| ETS 0387 | Power Sensor | NRV-Z1 | R & S |
| ETS 0388 | Power Sensor | NRV-Z1 | R & S |
| ETS 0389 | Fading Simulator | ABFS | R & S |
| ETS 0390 | System PC PC3600 | TS-PC36 | R & S |
| ETS 0391 | Rubidium Frequency Standard | DATUM 8040 | DATUM GmbH |
| ETS 0392 | RF Distribution | DATUM 6502 | DATUM GmbH |
| ETS 0393 | Insertion unit | URV5-Z4 | R & S |
| ETS 0394 | Advanced Signal Conditioning Unit | ASCUFDD-WCDMA | R & S |
| ETS 0395 | Universal Protocol Tester | CRTU-G | R & S |
| ETS 0396 | Protocol Slave | CRTU-S | R & S |
| ETS 0397 | Protocol Slave | CRTU-S | R & S |
| ETS 0398 | Fading Simulator | ABFS | R & S |
| ETS 0399 | Univ. Protocol Tester (Protocol Unit) (Radio Unit) | CRTU-W (CRTU-PU) (CRTU-RU) | R & S |
| ETS 0400 | Univ. Protocol Tester (Protocol Unit) (Radio Unit) | CRTU-W (CRTU-PU) (CRTU-RU) | R & S |
| ETS 0401 | MPEG2 Generator | DVG | R & S |
| ETS 0402 | TV Messenger | SFQ | R & S |
| ETS 0403 | RF Current Probe | F-140 | FCC |
| ETS 0404 | Exposure Level Tester | ELT-400 | Narda |
| ETS 0405 | Magnetic Field Probe 100 cm ² | 2300/90.10 | Narda |
| ETS 0406 | Signal Generator | SML 02 | R & S |
| ETS 0407 | EMC Emission tester | Harmonics 1000 | EMC Partner |
| ETS 0408 | Transient 2000 | TRA1Z191N | EMC Partner |
| ETS 0409 | Stripline | DC220 | Schwarzbeck |
| ETS 0410 | BAN | 1 | ETS |
| ETS 0411 | Universal Protocol Tester | CRTU-G | R & S |
| ETS 0412 | Spectrum Analyzer | FSU 3 | R & S |
| ETS 0413 | Signal Analyzer | FSIQ 26 | R & S |
| ETS 0416 | Power Supply | EX752M | TTi |
| ETS 0417 | Beacon Tester | BT100S | WS Tech. Inc. |

| No. | Test equipment | Type | Manufacturer |
|----------|------------------------------|-------------------|-----------------------|
| ETS 0418 | High pass filter 4 - 8 G | | Microwave |
| ETS 0419 | High pass filter 8 - 18 G | | Microwave |
| ETS 0420 | Amplifier 0.1-1 GHz | M/N AM-1331 | MITEQ |
| ETS 0421 | Amplifier 1-4 GHz | AFD3-010040-15-LN | MITEQ |
| ETS 0422 | Amplifier 4-8 GHz | DBS-0408N423 | Narda |
| ETS 0423 | Amplifier 8-18 GHz | DWT-18057 | Narda |
| ETS 0424 | Amplifier 18-26.5 GHz | DBS-1826N515 | Narda |
| ETS 0425 | T-Artificial Mains Network | ESH3-Z4 | R & S |
| ETS 0426 | CDN | T4 HF | MEB |
| ETS 0427 | Power sensor | NRV-Z6 | R & S |
| ETS 0428 | 4-WIRE ISN with B1 | ENY41 | R & S |
| ETS 0429 | Current Probe Test Jig | SW14 7LY | Chase |
| ETS 0430 | Signal Generator | SML02 | R&S |
| ETS 0431 | AC Mains Adaptor | BS5733 | Travel Emporium |
| ETS 0432 | RF amplifier matrix | RSU-ETS-BT | ETS |
| ETS 0433 | RF amplifier matrix | RSU-ETS-CTR6 | ETS |
| ETS 0434 | Reserviert Tre | RSU-ETS-GSM | |
| ETS 0435 | HP-Filter | H1G04G01 | Microwave |
| ETS 0436 | HP-Filter | H1G04G01 | Microwave |
| ETS 0437 | HP-Filter | H04G08G1 | Microwave |
| ETS 0438 | HP-Filter | H0G408G1 | Microwave |
| ETS 0439 | Amplifier | DBS-1826N515 | Narda-DBS-Microwave |
| ETS 0440 | Amplifier | AM-1331 | MITEQ |
| ETS 0441 | Bluetooth Protocol Tester | PTW 60 | R & S |
| ETS 0445 | RF-Attenuator 6dB | 50FH-006-300 | JFK |
| ETS 0446 | RF-Attenuator 30dB | 50FH-030-300 | JFK |
| ETS 0447 | Artificial Mains Network | LN-KFZ/200 | Heine |
| ETS 0448 | RF Power Amplifier | AR 60S1G3 | AR Amplifier Research |
| ETS 0449 | Stäubli Robot | RX90B L | Stäubli |
| ETS 0450 | Stäubli Robot Controller | CS/MBs&p | Stäubli |
| ETS 0451 | DASY 4 Measurement Server | | Schmid & Partner |
| ETS 0452 | Control Pendant | | Stäubli |
| ETS 0453 | Compaq Computer | Pentium IV, 2GHz | Schmid & Partner |
| ETS 0454 | Data Acquisition Electronics | DAE3V1 | Schmid & Partner |
| ETS 0455 | Dummy Probe | | Schmid & Partner |
| ETS 0456 | Dosimetric E-Field Probe | ET3DV6 | Schmid & Partner |
| ETS 0457 | Dosimetric E-Field Probe | ET3DV6 | Schmid & Partner |
| ETS 0458 | Dosimetric H-Field Probe | H3DV6 | Schmid & Partner |
| ETS 0459 | System Validation Kit | D900V2 | Schmid & Partner |
| ETS 0460 | System Validation Kit | D1800V2 | Schmid & Partner |
| ETS 0461 | System Validation Kit | D1900V2 | Schmid & Partner |
| ETS 0462 | System Validation Kit | D2450V2 | Schmid & Partner |
| ETS 0463 | Probe Alignment Unit | LBV2 | Schmid & Partner |
| ETS 0464 | SAM Twin phantom | V 4.0 | |
| ETS 0465 | Mounting Device | V 3.1 | |
| ETS 0466 | Directional Coupler | HP 87300B | HP |
| ETS 0467 | Oval flat phantom | ELI 4 | Schmid & Partner |
| ETS 0468 | Isotropic E-Field Probe | ER3DV6 | Schmid & Partner |

| No. | Test equipment | Type | Manufacturer |
|----------|---|-------------------------|--------------------------|
| ETS 0469 | Dielectric Probe Kit | 85070D | Agilent |
| ETS 0470 | Amplifier | AM-1300-1103 | withEQ |
| ETS 0472 | Antenna | BTA-H | Frankonia |
| ETS 0473 | GSM / UMTS System Simulator | TS 8950 | R&S |
| ETS 0474 | EMI Test Receiver | ESCS 30 | R&S |
| ETS 0475 | Amplifier | AFS4-00101800-U | withEQ |
| ETS 0476 | EMI Test receiver | ESCS 30 | R&S |
| ETS 0477 | GPS-System (active GPS-antenne) | 4490 | HOPF |
| ETS 0478 | Crystal filter | MQF 127.50-2400/F | Vectron International |
| ETS 0479 | System Validation Dipoles | D300V3 | Schmid & Partner |
| ETS 0480 | System Validation Dipoles | D450V3 | Schmid & Partner |
| ETS 0481 | 40GHz Standard Gain Horn with Amplifier | 22240-25 CBL26402075 | Flann Microwave |
| ETS 0482 | 40GHz High Gain Antenna | AT4560 | Amplifier research |
| ETS 0483 | Amplifier | AFD3010040-15-LN | MITEQ |
| ETS 0484 | Radio Communication Tester | CMU 200 | R&S |
| ETS 0485 | Radio Communication Tester | CMU 200 | R&S |
| ETS 0486 | Circular polarized antenna | 3101L | EMCO |
| ETS 0487 | Torso simulator | | ETS |
| ETS 0488 | EMI Test Receiver | ESHS10 | R & S |
| ETS 0489 | Rubidium Frequency Standard | MFS | DATUM |
| ETS 0490 | Rubidium Frequency Standard | 8040 | DATUM |
| ETS 0491 | RF Distribution | DATUM 6502 | DATUM |
| ETS 0492 | Industrial Controller | PSM12 | R & S |
| ETS 0493 | Protokoll Tester | PTW60 | R & S |
| ETS 0494 | Switching unit | SSCU | R & S |
| ETS 0495 | RF Step Attenuator | RSP | R & S |
| ETS 0496 | Spectrum Analyzer | FSP | R & S |
| ETS 0497 | Power Meter | NRVD | R & S |
| ETS 0498 | Diode Power Sensor | NRV-Z1 | R & S |
| ETS 0499 | Diode Power Sensor | NRV-Z1 | R & S |
| ETS 0500 | Signal Generator | SMIQ03 | R & S |
| ETS 0501 | Signal Generator | SMIQ03 | R & S |
| ETS 0502 | Power Splitter | DS-808-4 | Macom |
| ETS 0503 | Directional Coupler | IAW | Microwave Filter Company |
| ETS 0504 | AMTS-Simulator A | Feeding Bridge A | Emmerich |
| ETS 0505 | Diode Power Sensor | NRV-Z1 | R & S |
| ETS 0506 | Diode Power Sensor | NRV-Z6 | R & S |
| ETS 0507 | Power Divider | PS-Z101-4S | UMCC |
| ETS 0508 | Power Divider | T-1000 | Macom |
| ETS 0509 | Power Divider | T-1000 | Macom |
| ETS 0510 | Power Divider | T-1000 | Macom |
| ETS 0511 | Power Divider | DS-409-4 | Anzac |
| ETS 0512 | Log Periodical Antenna | HL 025 | R & S |
| ETS 0513 | Flat Phantom | V4.4 | Schmid & Partner |

2.4 General test procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 6.4 using a spectrum analyzer. The resolution bandwidth of the spectrum analyzer was 100 kHz for measurements below 1 GHz and RBW 1 MHz was used above 1 GHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS for Field strength: The Field Strength at 3 m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

| | |
|-------------|--|
| Freq. (MHz) | METER READING + ACF + CABLE LOSS (to the receiver) = FS |
| 33 | 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @ 3 m |

ANSI STANDARD C63.4-2003 6.2.1 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1 m by 1.5 m (non metallic table). The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to at least 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

Measurements were made by ETS Product Service AG at the registered open field test site located at Storkower Str. 38c, 15526 Reichenwalde, Germany.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1 m to 4 m. The antenna was placed in both the horizontal and vertical planes.

ANTENNA & GROUND:

This unit uses internal antennas.

2.5 Test results

1st test

test after modification

production test

| SECT. | TEST CASE | FCC 47 CFR PART | IC RSS | Required | Test passed | Test failed |
|----------|--|----------------------------------|----------------------------------|-------------------------------------|-------------------------------------|--------------------------|
| 3 | TRANSMITTER PARAMETERS | | | | | |
| 3.1 | RF power output conducted | 2.1046 22.913(a) 24.232(c) | Gen §4.6 132 §4.4 133 §4.3 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.2 | RF power output radiated (ERP, EIRP) | 22.913(a) 24.232(c) | 132 §4.4 133 §4.3 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.3 | Occupied bandwidth | 2.1049 | Gen §4.4.1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.3 | Emission bandwidth | 22.917(b) 24.238(b) | - | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.4 | Frequency stability | 2.1055 22.355 24.235 | Gen §4.5 132 §4.3 133 §4.2 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.5 | Spurious emission conducted (antenna terminal) | 2.1051 22.917 24.238 | Gen §4.7 132 §4.5 133 §4.4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 3.6 | Spurious emission radiated | 2.1053 22.917 24.238 | Gen §4.7 132 §4.5 133 §4.4 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.7 | Block edge compliance | 22.917(b) 24.238(b) | 132 §4.5.1.1 133 §4.4 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 3.8 | AC power line conducted emissions | 15.207 | - | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 4 | RECEIVER PARAMETERS | | | | | |
| 4.1 | Radiated emissions | 2.1053 15.109 | Gen 4.8 132 §4.6 133 §4.5 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

3 Transmitter parameters

3.1 RF power output, conducted

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|--|--|
| FCC | CFR part 22.913(a), 2.1046 | CFR part 24.232(c), 2.1046 |
| IC | RSS-132 Issue 2, §4.4 RSS-Gen Issue 1, §4.6 | RSS-133 Issue 3, §4.3 RSS-Gen Issue 1, §4.6 |

Method of measurement

The transmitter output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the spectrum analyzer reading.

An HP power meter was also used to measure the RF power.

Tests were performed at three frequencies (low, middle, and high channels) and on all power levels, which can be set-up on the transmitters.

Test results

| | Frequency channel | Peak output power | AVG output power |
|-----------------------------------|-------------------|-------------------|------------------|
| Cellular telephone 850 MHz (EDGE) | 128 | 28.27 dBm | -- |
| | 188 | 28.36 dBm | -- |
| | 251 | 28.43 dBm | -- |
| PCS 1900 MHz (EDGE) | 512 | 28.08 dBm | -- |
| | 661 | 27.87 dBm | -- |
| | 810 | 27.25 dBm | -- |

See attached diagrams

Test equipment: ETS 0413, ETS 0416, ETS 0484

3.2 RF power output, radiated

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|----------------------------|-----------------------|
| FCC | CFR part 22.913(a) | CFR part 24.232(c) |
| IC | RSS-132 Issue 2, §4.4 | RSS-133 Issue 3, §4.3 |

Method of measurement

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane on an open test site. The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer.

Worst case emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna.


ERP in frequency band 824.2 - 848.8 MHz, and EIRP in frequency band 1850.2 - 1909.8 MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824.2 - 848.8 MHz) or horn antenna (1850.2 - 1909.8 MHz) connected to a signal generator.

Substitution RF power measurement at ETS Product Service AG

General:

The applied substitution method follows ANSI/TIA/EIA-603, ANSI/TIA/EIA-102.CAAA or the appropriate ETSI rules respectively.

The actual signal generated by the EUT can be determined by means of a substitution measurement in which a known signal source replaces the device to be measured.

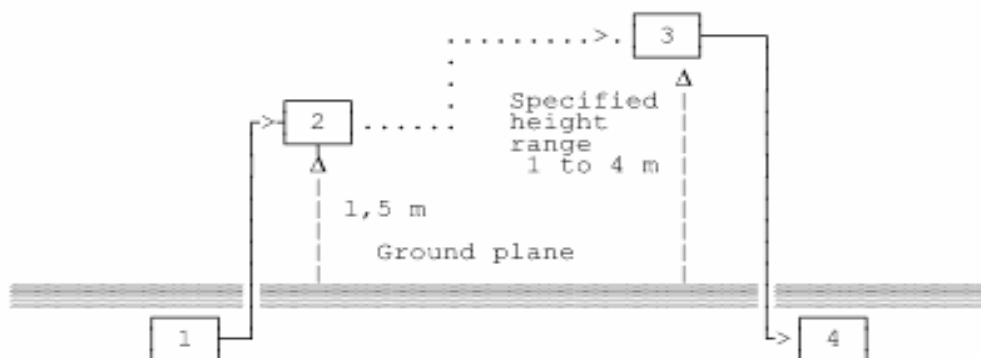

- 1) Signal generator;
- 2) Substitution antenna;
- 3) Test antenna;
- 4) Spectrum analyzer or selective voltmeter.

The substitution antenna replaces the transmitter antenna at the same position and in vertical polarization. The frequency of the signal generator shall be adjusted to the measurement frequency. The test antenna shall be raised or lowered, if necessary, to ensure that the maximum signal is still received. The input signal to the substitution antenna shall be adjusted in level until an equal or a known related level to that detected from the transmitter is obtained in the measurement receiver. If a fully anechoic chamber is used as test site in order to provide free space conditions there is no need to change the height of the antenna. The measurement will be repeated in horizontal position.

Calibration:

In order to make this kind of measurement more effective and to avoid subjective measurement faults ETS has installed automatic computer controlled measurement procedures. With the above described substitution method a test site is calibrated over the full frequency range which is used in suitable frequency steps. For a certain power level on the substitution antenna the received power over the whole frequency range is documented. All necessary antenna gains, cable losses, filter losses and amplifications of preamplifiers are taken in consideration. The summary of this calibration measurement performs a transducer factor that is related to the considered test site and a certain measurement distance. Differences of the radiated power levels of different test samples are determined by internal attenuation of the measurement receiver. The proper function of such test site will be maintained by short term plausibility checks and periodical re-calibration.

Testing:

The test sample is put on the table at the defined position and the measurement receiver receives and documents the radiated power. On test sites with ground plane the measurement antenna will be lowered and raised to maximum values at significant frequencies. For peak power measurements the sample is turned by the turntable over 360 degree in order to find the direction with the maximum radiation or to document the max reading with the MAXHOLD function during the rotation.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|------------|-----------------------------------|------------------------|
| FCC | 38,5 dBm (7 Watts), ERP | 33 dBm (2 Watts), EIRP |
| IC | 38 dBm (6.3 Watts), ERP | 33 dBm (2 Watts), EIRP |

Test Results

| | Frequency channel | Radiated power ERP | Radiated power EIRP |
|--|--------------------------|---------------------------|----------------------------|
| Cellular telephone 850 MHz (EDGE) | 128 | 27.44 dBm | -- |
| | 188 | 28.66 dBm | -- |
| | 251 | 28.10 dBm | -- |
| PCS 1900 MHz (EDGE) | 512 | -- | 26.52 dBm |
| | 661 | -- | 26.00 dBm |
| | 810 | -- | 27.01 dBm |

See attached diagrams

Test equipment: ETS 0014, ETS 0281, ETS 0295, ETS 0310, ETS 0416, ETS 0484

3.3 Occupied bandwidth, emission bandwidth

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|----------------------------|----------------------------|
| FCC | CFR part 22.917(b), 2.1049 | CFR part 24.238(b), 2.1049 |
| IC | RSS-Gen Issue 1, §4.4.1 | RSS-Gen Issue 1, §4.4.1 |

Method of measurement

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The RF output of the transceiver was connected to the input of the spectrum analyzer through sufficient attenuation.

Occupied Bandwidth was measured with a occupied bandwidth function of the analyzer.

To find the Emission Bandwidth (-26 dB) the delta markers were set -26 dB below transmitter power.

Test results

| | Frequency channel | Occupied bandwidth | Emission bandwidth |
|-----------------------------------|-------------------|--------------------|--------------------|
| Cellular telephone 850 MHz (EDGE) | 128 | 236.479 kHz | 296.593 kHz |
| | 188 | 238.476 kHz | 318.637 kHz |
| | 251 | 238.476 kHz | 316.633 kHz |
| PCS 1900 MHz (EDGE) | 512 | 238.476 kHz | 312.625 kHz |
| | 661 | 238.476 kHz | 318.637 kHz |
| | 810 | 238.476 kHz | 318.637 kHz |

See attached diagrams

Test equipment: ETS 0413, ETS 0416, ETS 0484

3.4 Frequency stability

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|------------|--|--|
| FCC | CFR part 22.355, 2.1055 | CFR part 24.235, 2.1055 |
| IC | RSS-132 Issue 2, §4.3 RSS-Gen Issue 1, §4.5 | RSS-133 Issue 3, §4.2 RSS-Gen Issue 1, §4.5 |

Method of measurement

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable, exited the chamber through an opening made for that purpose.

After the temperature stabilized the frequency output was recorded from the counter.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|------------|----------------------------|---|
| FCC | ± 2.5 ppm | Must stay within the authorized frequency block |
| IC | ± 2.5 ppm | ± 2.5 ppm |

Test results

Frequency stability vs. temperature

| | $\vartheta / ^\circ\text{C}$ | Frequency error (Hz) | Frequency error (ppm) |
|--|------------------------------|----------------------|-----------------------|
| Cellular telephone 850 MHz (EDGE) | -30 | -46 | -0,05501 |
| | -20 | -45 | -0,05381 |
| | -10 | 11 | 0,01315 |
| | 0 | 13 | 0,01555 |
| | +10 | -33 | -0,03946 |
| | +20 | -37 | -0,04425 |
| | +30 | -39 | -0,04664 |
| | +40 | 49 | 0,05860 |
| | +50 | -31 | -0,03707 |

| | $\vartheta / ^\circ\text{C}$ | Frequency error (Hz) | Frequency error (ppm) |
|------------------------------------|------------------------------|----------------------|-----------------------|
| PCS 1900 MHz (EDGE) | -30 | 13 | 0,00691 |
| | -20 | 17 | 0,00904 |
| | -10 | -17 | -0,00904 |
| | 0 | 39 | 0,02074 |
| | +10 | 41 | 0,02181 |
| | +20 | -45 | -0,02394 |
| | +30 | -61 | -0,03245 |
| | +40 | -23 | -0,01223 |
| | +50 | -46 | -0,02447 |

Frequency stability vs. voltage

| | U_B / V | Frequency error (Hz) | Frequency error (ppm) |
|--|-----------|----------------------|-----------------------|
| Cellular telephone 850 MHz (EDGE) | 3,30 | -37 | -0,04425 |
| | 3,10 | -54 | -0,06458 |
| | 2,90 | -46 | -0,05501 |
| | 2,70 | -45 | -0,05381 |

| | U_B / V | Frequency error (Hz) | Frequency error (ppm) |
|------------------------------------|-----------|----------------------|-----------------------|
| PCS 1900 MHz (EDGE) | 3,30 | -45 | -0,02394 |
| | 3,10 | -87 | -0,04628 |
| | 2,90 | -61 | -0,03245 |

Test equipment: ETS 0251, ETS 0416, ETS 0484

3.5 Spurious emission conducted (antenna terminal)

Reference

| | Cellular Telephone 850 MHz | PCS 1900 MHz |
|------------|--|--|
| FCC | CFR part 22.917, 2.1051 | CFR part 24.238, 2.1051 |
| IC | RSS-132 Issue 2, §4.5 RSS-Gen Issue 1, §4.7 | RSS-133 Issue 3, §4.4 RSS-Gen Issue 1, §4.7 |

Method of measurement

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission. The magnitude of spurious emission which are attenuated more than 20 dB below the permissible value need not be specified. Tests are performed for lowest, middle and highest transmitter block frequency.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|------------|---------------------------------------|---------------------------------------|
| FCC | $P_c - (43 + 10 \log (P) \text{ dB})$ | $P_c - (43 + 10 \log (P) \text{ dB})$ |
| IC | $P_c - (43 + 10 \log (P) \text{ dB})$ | $P_c - (43 + 10 \log (P) \text{ dB})$ |

Test results

| | Harmonic | TCX 128 [MHz] | Level [dBm] | TCX 188 [MHz] | Level [dBm] | TCX 251 [MHz] | Level [dBm] |
|---|----------|---------------------|----------------|---------------------|----------------|---------------------|----------------|
| Cellular telephone 850 MHz | 1 | -- | -- | -- | -- | -- | -- |
| | 2 | -- | -- | -- | -- | -- | -- |
| | 3 | -- | -- | -- | -- | -- | -- |
| | 4 | -- | -- | -- | -- | -- | -- |
| | 5 | -- | -- | -- | -- | -- | -- |
| | 6 | -- | -- | -- | -- | -- | -- |
| | 7 | -- | -- | -- | -- | -- | -- |
| | 8 | -- | -- | -- | -- | -- | -- |
| | 9 | -- | -- | -- | -- | -- | -- |
| | 10 | -- | -- | -- | -- | -- | -- |

| | Harmonic | TCX 512 [MHz] | Level [dBm] | TCX 661 [MHz] | Level [dBm] | TCX 810 [MHz] | Level [dBm] |
|-------------------------|----------|---------------------|----------------|---------------------|----------------|---------------------|----------------|
| PCS 1900 MHz | 1 | -- | -- | -- | -- | -- | -- |
| | 2 | -- | -- | -- | -- | -- | -- |
| | 3 | -- | -- | -- | -- | -- | -- |
| | 4 | -- | -- | -- | -- | -- | -- |
| | 5 | -- | -- | -- | -- | -- | -- |
| | 6 | -- | -- | -- | -- | -- | -- |
| | 7 | -- | -- | -- | -- | -- | -- |
| | 8 | -- | -- | -- | -- | -- | -- |
| | 9 | -- | -- | -- | -- | -- | -- |
| | 10 | -- | -- | -- | -- | -- | -- |

Not required.

Test equipment:

ETS 0375, ETS 0376, ETS 0377, ETS 0378, ETS 0379, ETS 0380, ETS 0382, ETS 0383, ETS 0384, ETS 0385, ETS 0386, ETS 0390, ETS 0394, ETS 0473


3.6 Spurious emission radiated

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|--|--|
| FCC | CFR part 22.917, 2.1053 | CFR part 24.238, 2.1053 |
| IC | RSS-132 Issue 2, §4.5 RSS-Gen Issue 1, §4.7 | RSS-133 Issue 3, §4.4 RSS-Gen Issue 1, §4.7 |

Method of measurement

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane. The radiated emission at the fundamental frequency was measured at 3 m distance with a test antenna and spectrum analyzer.

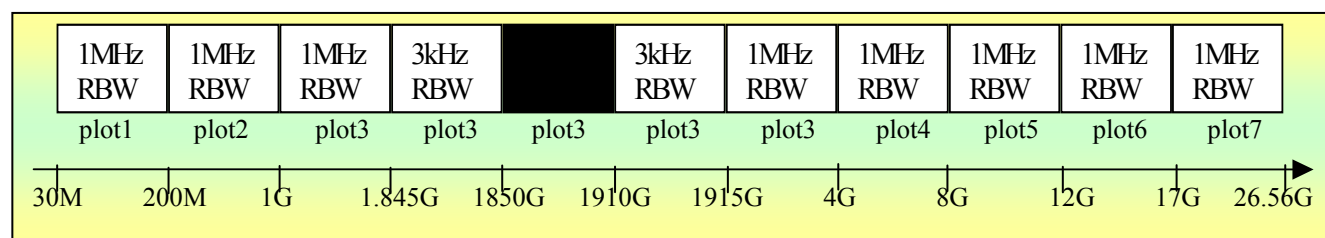

Worst case emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna.

ERP was measured using a substitution method. The EUT was replaced by horn antenna connected to a signal generator.

The frequency range up to tenth harmonic was investigated.

The tests of spurious radiated emission have been carried out with the EKS-Software from Rohde & Schwarz.

The analyzer gives automatic the measurements of spectral plots to the EKS software.

In the 1st 1 MHz band outside the band edge nearest the channel of interest a 3 kHz res. BW is used. The measurements from 30 MHz to 1845 GHz and 1915 GHz to 26.56 GHz were performed with a measurement bandwidth of 1 MHz.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits. In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|------------|-----------------------------------|---------------------------|
| FCC | Pc - (43 + 10 log (P) dB) | Pc - (43 + 10 log (P) dB) |
| IC | Pc - (43 + 10 log (P) dB) | Pc - (43 + 10 log (P) dB) |

GSM 850

Summary table with radiated data of the test plots for Carrier Test Frequency 824,2 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn. [dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|----------------------|--|-------------------------------------|----------------------------|--|-------------------------------|----------------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | 823,980 | -34,75 | 0 | -34,75 | -13 | -21,75 |
| horizontal | 823,970 | -27,07 | 0 | -27,07 | -13 | -14,07 |
| vertical | 2.473,000 | -29,35 | 0 | -29,35 | -13 | -16,35 |
| horizontal | 3.297,000 | -32,16 | 0 | -32,16 | -13 | -19,16 |
| vertical | 7,423 | -24,93 | 0 | -24,93 | -13 | -11,93 |
| horizontal | 7.423,000 | -21,46 | 0 | -21,46 | -13 | -8,46 |
| vertical | 8.240,000 | -20,44 | 0 | -20,44 | -13 | -7,44 |
| horizontal | 8.240,000 | -25,05 | 0 | -25,05 | -13 | -12,05 |

Summary table with radiated data of the test plots for Carrier Test Frequency 836,2 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn.[dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|---------------|-----------------------------------|------------------------------|--------------------|---------------------------------|------------------------|---------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | 881,210 | -50,06 | 0 | -50,06 | -13 | -37,06 |
| horizontal | 861,607 | -32,61 | 0 | -32,61 | -13 | -19,61 |
| vertical | 1.673,000 | -32,34 | 0 | -32,34 | -13 | -19,34 |
| horizontal | 1.673,000 | -36,01 | 0 | -36,01 | -13 | -23,01 |
| vertical | 7.527,000 | -22,91 | 0 | -22,91 | -13 | -9,91 |
| horizontal | 7.527,000 | -23,89 | 0 | -23,89 | -13 | -10,89 |
| vertical | 8.361,000 | -21,84 | 0 | -21,84 | -13 | -8,84 |
| horizontal | 8.361,000 | -23,81 | 0 | -23,81 | -13 | -10,81 |

Summary table with radiated data of the test plots for Carrier Test Frequency 848,8 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn.[dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|---------------|-----------------------------------|------------------------------|--------------------|---------------------------------|------------------------|---------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | 849,000 | -38,95 | 0 | -38,95 | -13 | -25,95 |
| horizontal | 849,010 | -21,5 | 0 | -21,5 | -13 | -8,5 |
| vertical | 1.697,000 | -34,18 | 0 | -34,18 | -13 | -21,18 |
| horizontal | 1.697,000 | -37,92 | 0 | -37,92 | -13 | -24,92 |
| vertical | 7.639,000 | -27,49 | 0 | -27,49 | -13 | -14,49 |
| horizontal | 7.639,000 | -29,31 | 0 | -29,31 | -13 | -16,31 |
| vertical | 8.481,000 | -25,42 | 0 | -25,42 | -13 | -12,42 |
| horizontal | 8.481,000 | -25,48 | 0 | -25,48 | -13 | -12,48 |

See attached diagrams.

PCS 1900

Summary table with radiated data of the test plots for Carrier Test Frequency 1850.2 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn. [dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|---------------|-----------------------------------|------------------------------|---------------------|---------------------------------|------------------------|---------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | 1.850,000 | -20,37 | 0 | -20,37 | -13 | -7,37 |
| horizontal | 1.850,000 | -20,73 | 0 | -20,73 | -13 | -7,73 |
| vertical | 7.407,000 | -18,55 | 0 | -18,55 | -13 | -5,55 |
| horizontal | 7.407,000 | -19,92 | 0 | -19,92 | -13 | -6,92 |
| vertical | 11.102,000 | -26,94 | 0 | -26,94 | -13 | -13,94 |
| horizontal | 9.251,000 | -27,08 | 0 | -27,08 | -13 | -14,08 |
| vertical | 12,950 | -30,83 | 0 | -30,83 | -13 | -17,83 |
| horizontal | 17.928,000 | -30,96 | 0 | -30,96 | -13 | -17,96 |
| vertical | 26,074 | -31,54 | 0 | -31,54 | -13 | -18,54 |
| horizontal | 26.040,000 | -31,77 | 0 | -31,77 | -13 | -18,77 |

Summary table with radiated data of the test plots for Carrier Test Frequency 1880.0 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn.[dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|---------------|-----------------------------------|------------------------------|--------------------|---------------------------------|------------------------|---------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | 3.866,000 | -26,92 | 0 | -26,92 | -13 | -13,92 |
| horizontal | 3.983,000 | -26,63 | 0 | -26,63 | -13 | -13,63 |
| vertical | 7.527,000 | -19,56 | 0 | -19,56 | -13 | -6,56 |
| horizontal | 7.519,000 | -21,64 | 0 | -21,64 | -13 | -8,64 |
| vertical | 11.287,000 | -30,98 | 0 | -30,98 | -13 | -17,98 |
| horizontal | 11.287,000 | -34,66 | 0 | -34,66 | -13 | -21,66 |
| vertical | 16.918,000 | -30,96 | 0 | -30,96 | -13 | -17,96 |
| horizontal | 17.916,000 | -31,38 | 0 | -31,38 | -13 | -18,38 |
| vertical | 26.040,000 | -31,78 | 0 | -31,78 | -13 | -18,78 |
| horizontal | 25,444 | -32,34 | 0 | -32,34 | -13 | -19,34 |

Summary table with radiated data of the test plots for Carrier Test Frequency 1909.8 MHz

| Spectral Plot | Frequency Marker Indication [MHz] | Indication Power Level [dBm] | External Attn.[dB] | Worst Case Emission Level [dBm] | Compliance Limit [dBm] | Results |
|---------------|-----------------------------------|------------------------------|--------------------|---------------------------------|------------------------|---------|
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | -- | -- | -- | -- | -- | -- |
| vertical | -- | -- | -- | -- | -- | -- |
| horizontal | 1.910,000 | -18,98 | 0 | -18,98 | -13 | -5,98 |
| vertical | 1.910,000 | -17,88 | 0 | -17,88 | -13 | -4,88 |
| horizontal | 7.639,000 | -25,92 | 0 | -25,92 | -13 | -12,92 |
| vertical | 7.639,000 | -28,56 | 0 | -28,56 | -13 | -15,56 |
| horizontal | 11.463,000 | -26,65 | 0 | -26,65 | -13 | -13,65 |
| vertical | 11.463,000 | -31,77 | 0 | -31,77 | -13 | -18,77 |
| horizontal | 17.964,000 | -30,65 | 0 | -30,65 | -13 | -17,65 |
| vertical | 17.904,000 | -30,96 | 0 | -30,96 | -13 | -17,96 |
| horizontal | 26.006,000 | -31,77 | 0 | -31,77 | -13 | -18,77 |

See attached diagrams

Test equipment: ETS 0014, ETS 0294, ETS 0295, ETS 0310, ETS 0416, ETS 0484

3.7 Block edge compliance

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|----------------------------|-----------------------|
| FCC | CFR part 22.917(b) | CFR part 24.238(b) |
| IC | RSS-132 Issue 2, §4.5.1.1 | RSS-133 Issue 3, §4.4 |

Method of measurement

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|---------------------------------------|---------------------------------------|
| FCC | $P_c - (43 + 10 \log (P) \text{ dB})$ | $P_c - (43 + 10 \log (P) \text{ dB})$ |
| IC | $P_c - (43 + 10 \log (P) \text{ dB})$ | $P_c - (43 + 10 \log (P) \text{ dB})$ |

Test results

| | Frequency channel | RBW kHz | Worst case emission level dBm |
|-----------------------------------|-------------------|---------|-------------------------------|
| Cellular telephone 850 MHz (EDGE) | 128 | 3 kHz | 25.46 |
| | 251 | 3 kHz | 28.45 |
| PCS 1900 MHz (EDGE) | 512 | 3 kHz | 28.04 |
| | 810 | 3 kHz | 27.27 |

See attached diagrams.

Test equipment: ETS 0413, ETS 0416, ETS 0484

3.8 AC power line conducted emissions

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|----------------------------|-----------------|
| FCC | CFR part 15.207 | CFR part 15.207 |
| IC | Not applicable | Not applicable |

Method of measurement

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz | |
|-----|-----------------------------|---------------------------------------|---------|
| FCC | Frequency of emission [MHz] | Conducted limit field strength [dBµV] | |
| | | Quasi Peak | Average |
| | 0.15 - 0.5 | 66 to 56 | 56 - 46 |
| | 0.5 - 5 | 56 | 46 |
| | 5 - 30 | 60 | 50 |
| IC | Not applicable | | |

Test results

| Frequency | Level | |
|-----------|------------------|------------------|
| | Quasi-peak | Average |
| 150 kHz | Lower limit line | Lower limit line |

Comment: See attached diagrams.

Test equipment: ETS 0059, ETS 0085, ETS 0288, ETS 0476

4 Receiver parameters

4.1 Radiated emissions

Reference

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|---|--|
| FCC | CFR part 15.109, 2.1053 | CFR part 15.109, 2.1053 |
| IC | RSS-132 Issue 2, 4.6 RSS-Gen Issue 1, §4.8 | RSS-133 Issue 3, §4.5 RSS-Gen Issue 1, §4.8 |

Method of measurement

The receiver shall be operated in the normal receive mode near the mid-point of the band(s) over which the receiver is designed to operate.

The measurement method is the radiated emission measurement. The measurement starts at 30 MHz and ends at least 3 times the highest tunable local oscillator frequency (6 GHz).

Limits

| | Cellular telephone 850 MHz | PCS 1900 MHz |
|-----|--|---|
| FCC | Spurious frequency [MHz] 30 - 88 88 - 216 216 - 960 above 960 | Field strength microvolt/m at 3 meters 100 150 200 500 |
| IC | Not applicable | |

Test Results

| | Frequency marker indication [MHz] | Antenna polarization | Worst case emission level [dBm] | Compliance limit [dBm] | Results [dBm] |
|--|-----------------------------------|----------------------|---------------------------------|------------------------|---------------|
| Cellular telephone 850 MHz (EDGE) | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |

| | Frequency marker indication [MHz] | Antenna polarization | Worst case emission level [dBm] | Compliance limit [dBm] | Results [dBm] |
|----------------------------|-----------------------------------|----------------------|---------------------------------|------------------------|---------------|
| PCS 1900 MHz (EDGE) | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |
| | -- | -- | -- | -- | -- |

Not required.

Test equipment: ETS 0014, ETS 0294, ETS 0295, ETS 0310, ETS 0416, ETS 0484

Appendix

- A Pictures
- B RF power output conducted
- C RF power output radiated
- D Occupied bandwidth, emission bandwidth
- E Frequency stability
- F Spurious emission conducted (antenna terminal)
- G Spurious emission radiated
- H Block edge compliance
- I AC power line conducted emissions
- J Receiver radiated emissions