


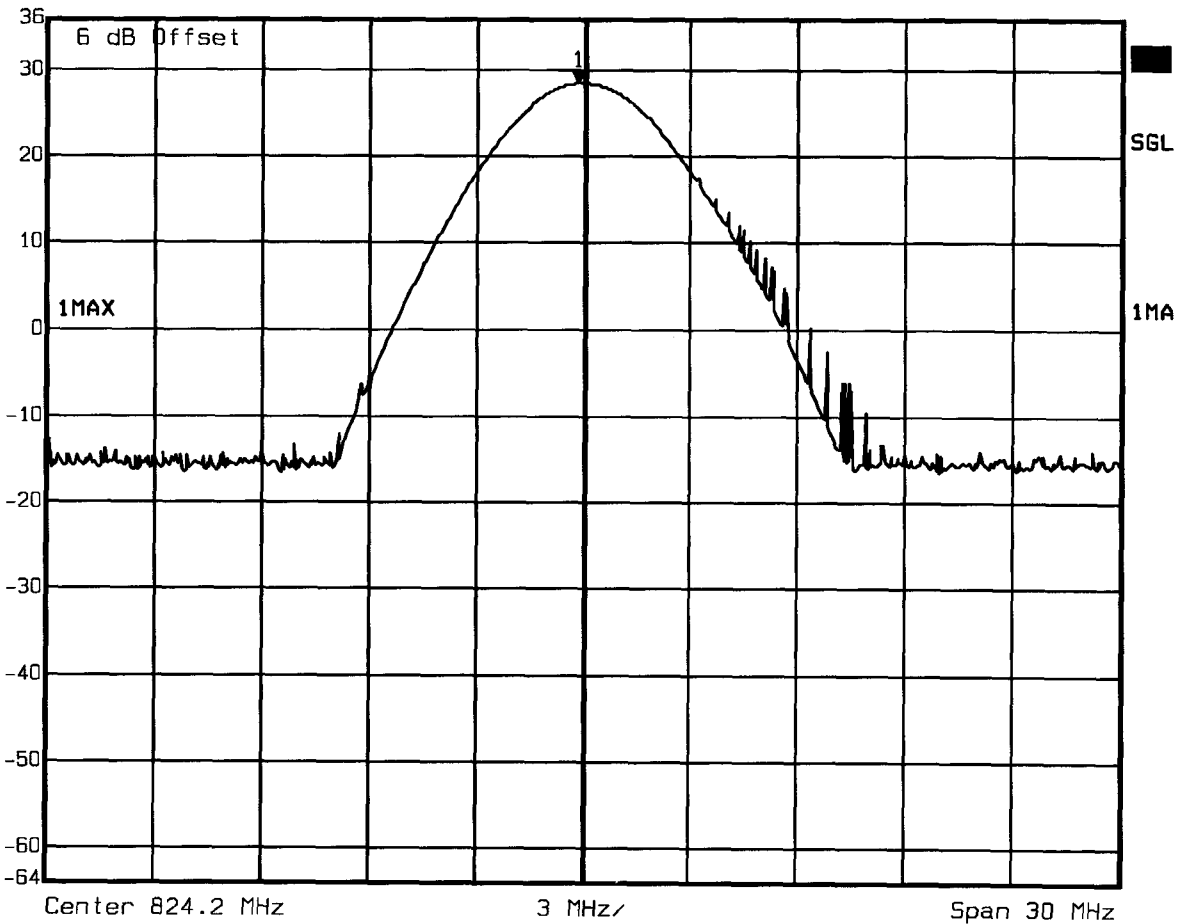
Appendix B

RF power output conducted

FCC Part 22 H
Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 128
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	28.27 dBm	VBW	3 MHz	
	36 dBm	824.04969940 MHz	SWT	5 ms	Unit dBm



Date: 18.JAN.2007 21:29:08

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

FCC Part 22 H
Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 188
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	28.36 dBm	VBW	3 MHz	
	36 dBm	835.98957916 MHz	SWT	5 ms	Unit dBm

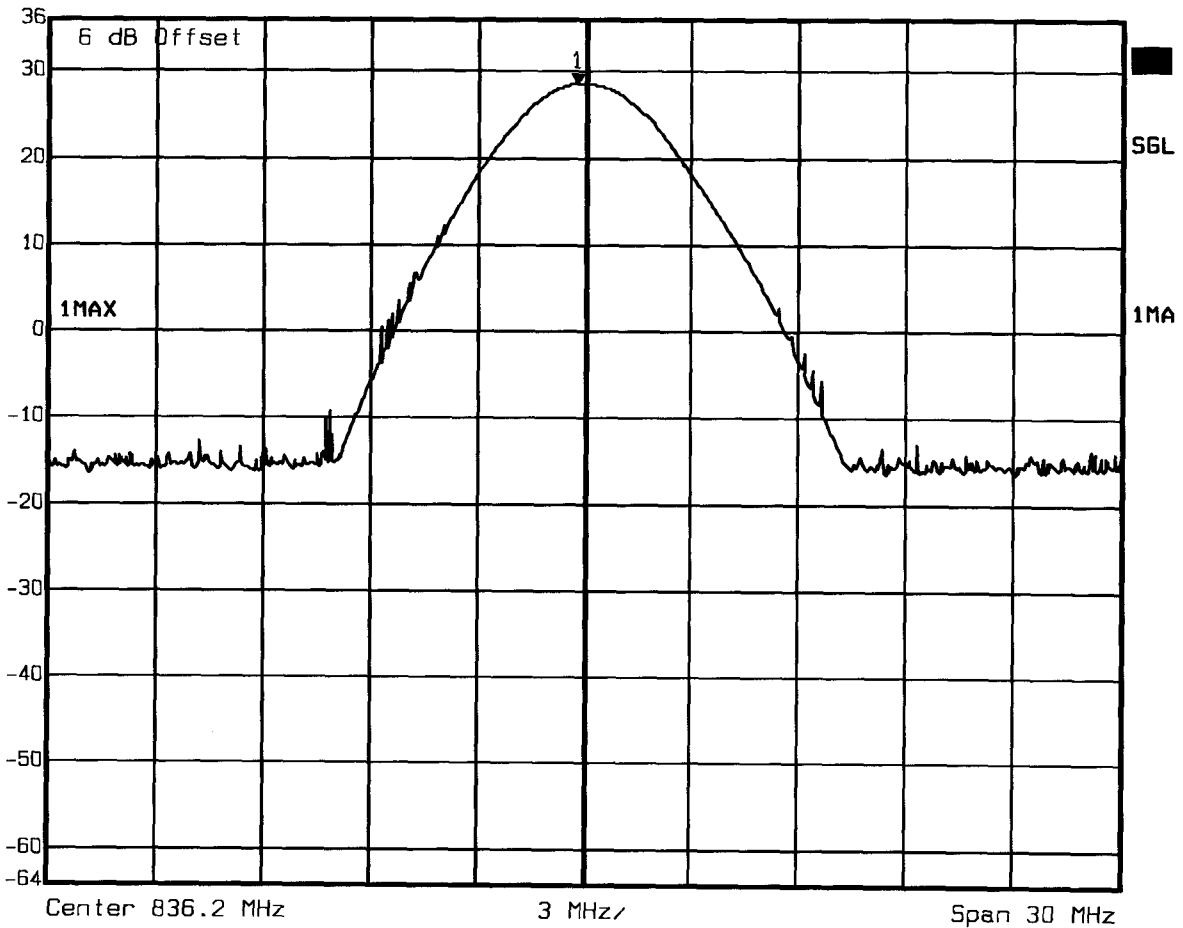

Date: 18.JAN.2007 21:31:47

Measurement diagram


ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

FCC Part 22 H

Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 251
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	28.43 dBm	VBW	3 MHz	
	36 dBm	848.58957916 MHz	SWT	5 ms	Unit

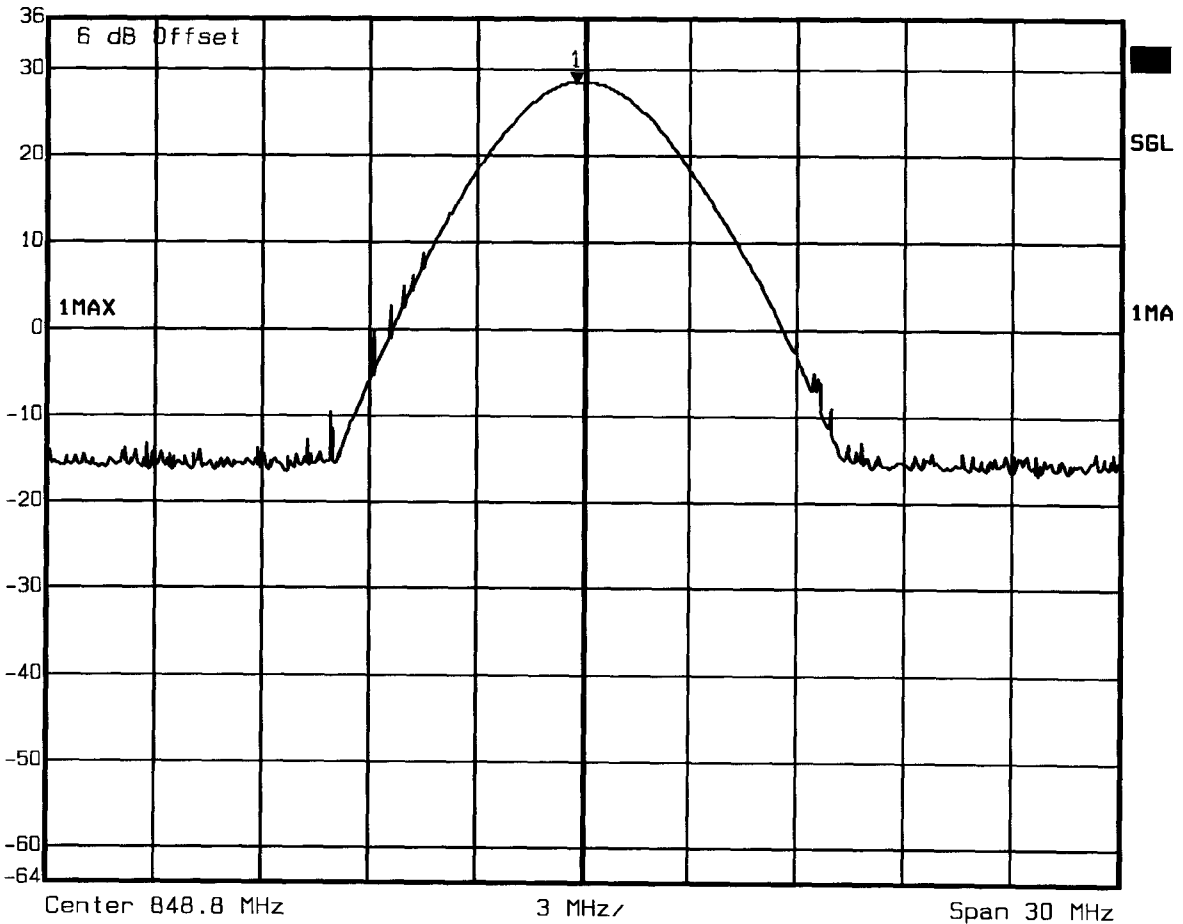

Date: 18.JAN.2007 21:32:30

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

FCC Part 24 E
Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 512
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	28.08 dBm	VBW	3 MHz	
	36 dBm	1.85010982 GHz	SWT	5 ms	Unit dBm

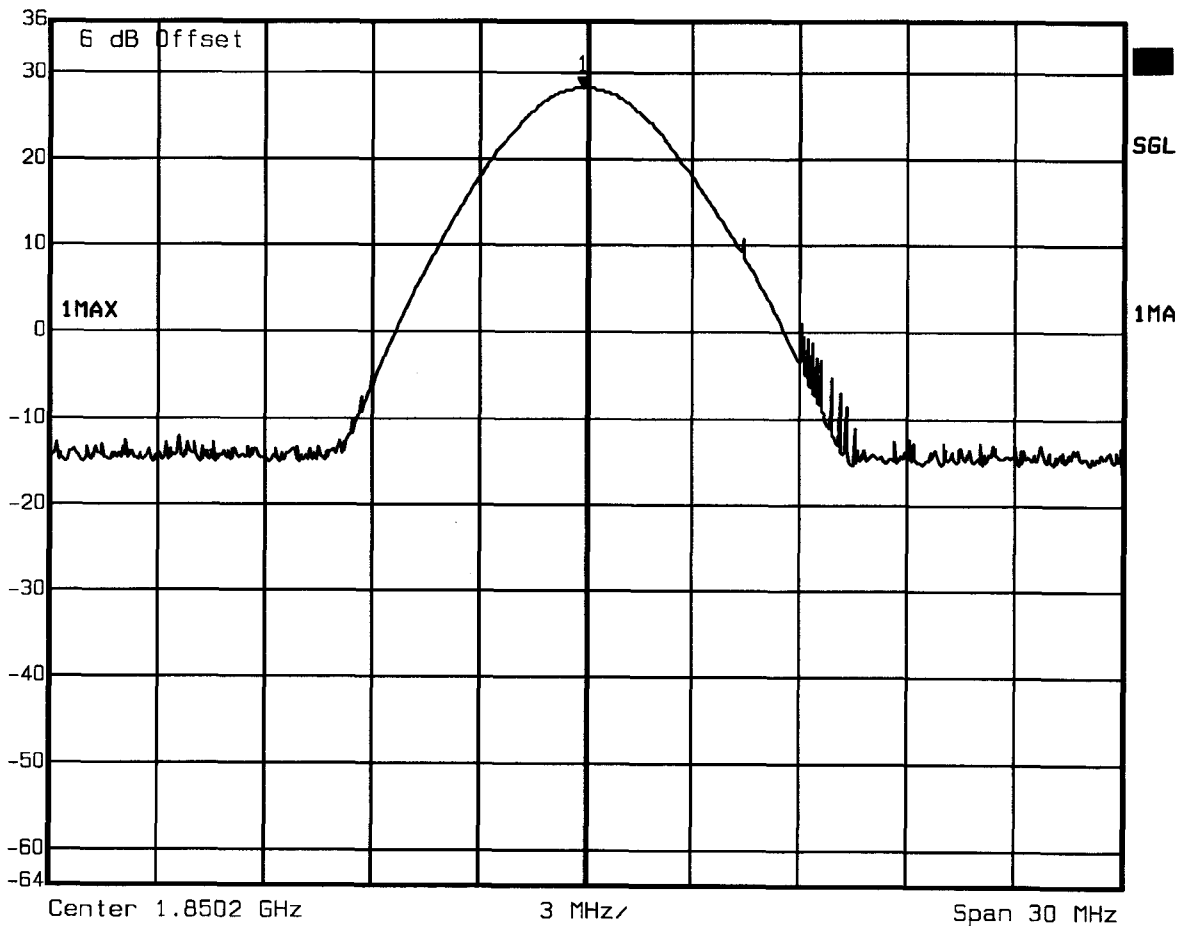


Date: 18.JAN.2007 21:09:56

Measurement diagram

FCC Part 24 E
Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 661
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	27.87 dBm	VBW	3 MHz	
	36 dBm	1.88009018 GHz	SWT	5 ms	Unit

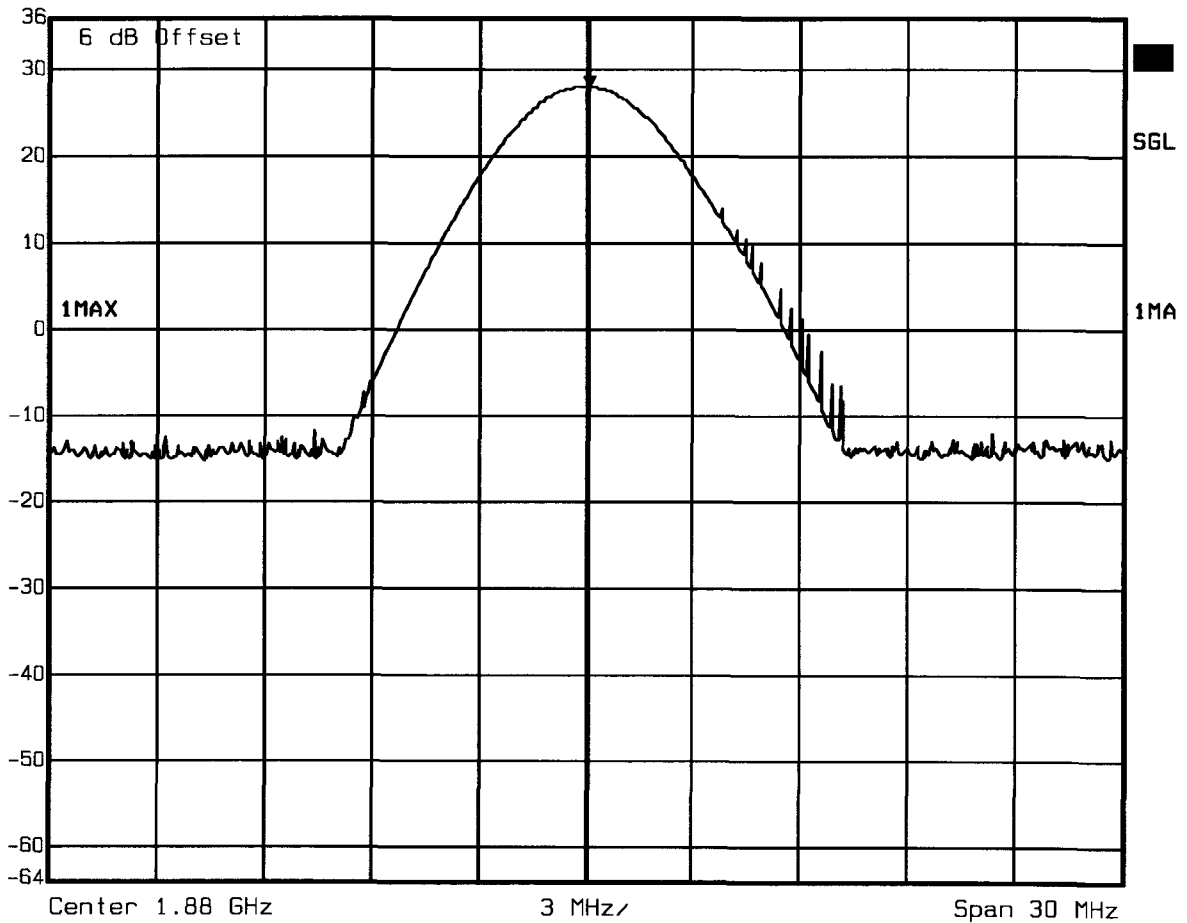


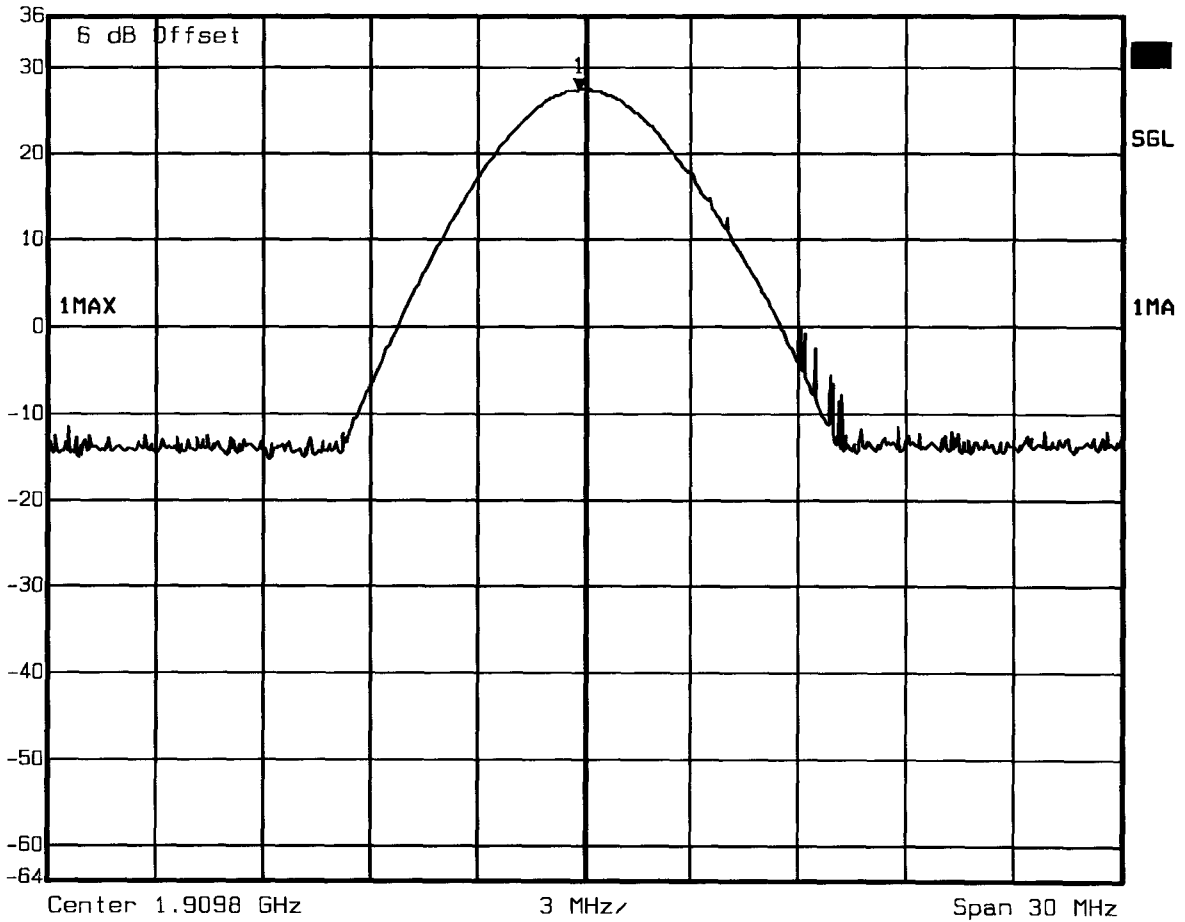
Date: 18.JAN.2007 21:09:14

Measurement diagram

FCC Part 24 E
Output power conducted

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 810
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	60 dB
	Ref Lvl	27.25 dBm	VBW	3 MHz	
	36 dBm	1.90964970 GHz	SWT	5 ms	Unit



Date: 18.JAN.2007 21:06:01

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Appendix C

RF power output radiated


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 825.126MHz, Pmax: 14.47dBm, RBW: 3MHz

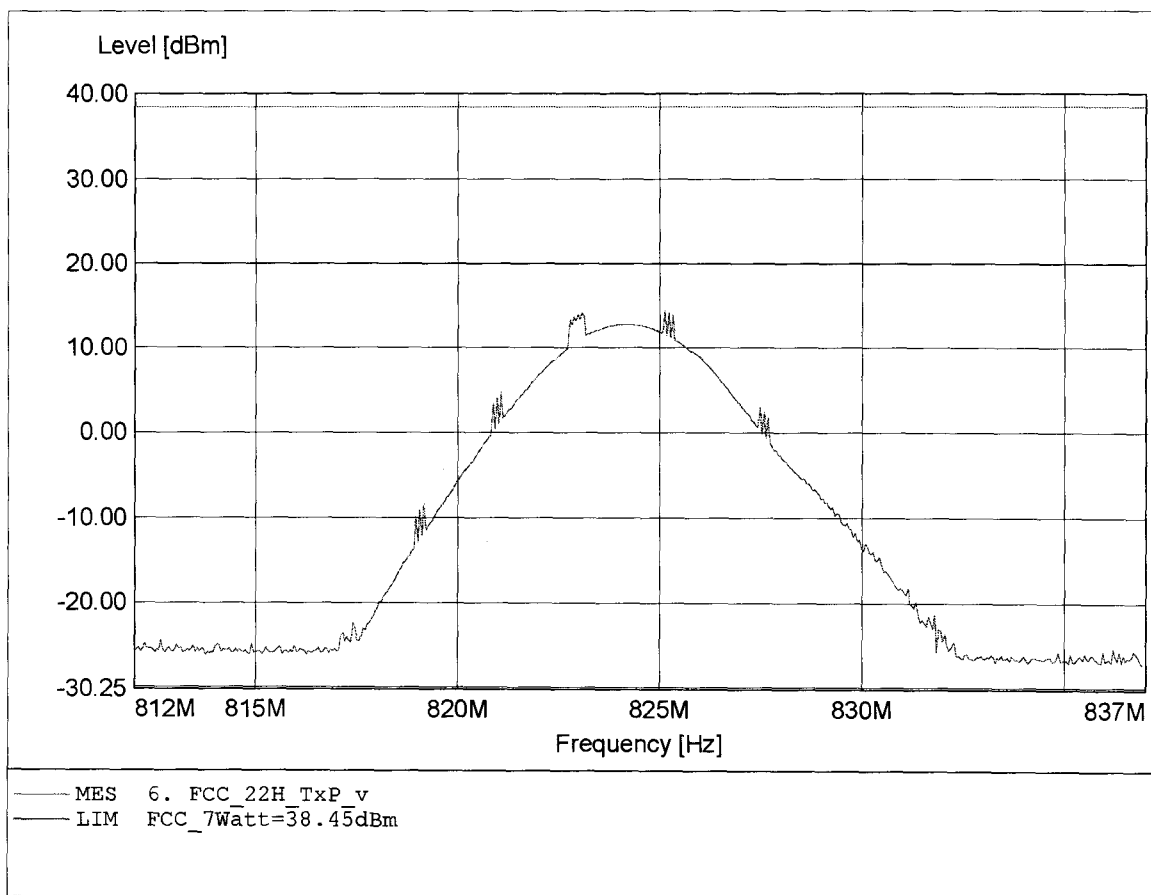


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.275MHz, Pmax: 27.44dBm, RBW: 3MHz

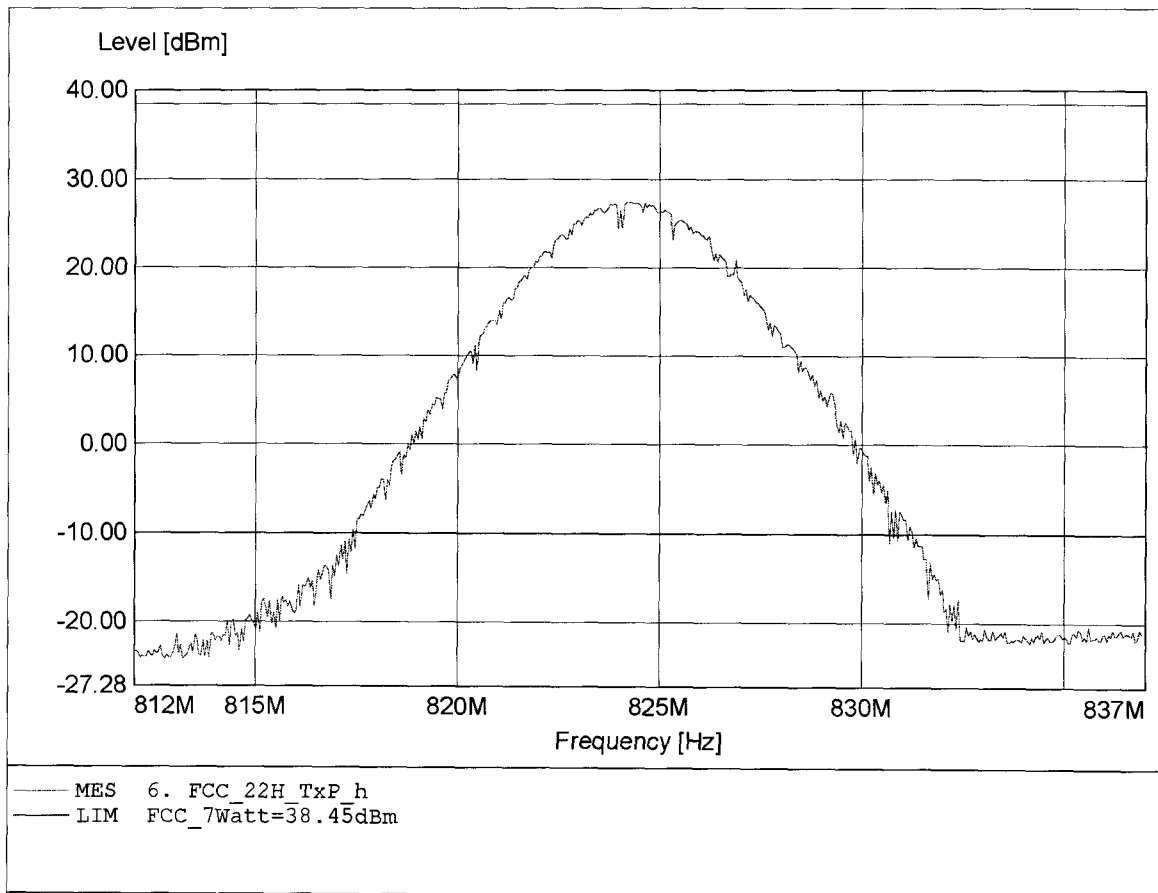


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.072MHz, Pmax: 15.63dBm, RBW: 3MHz

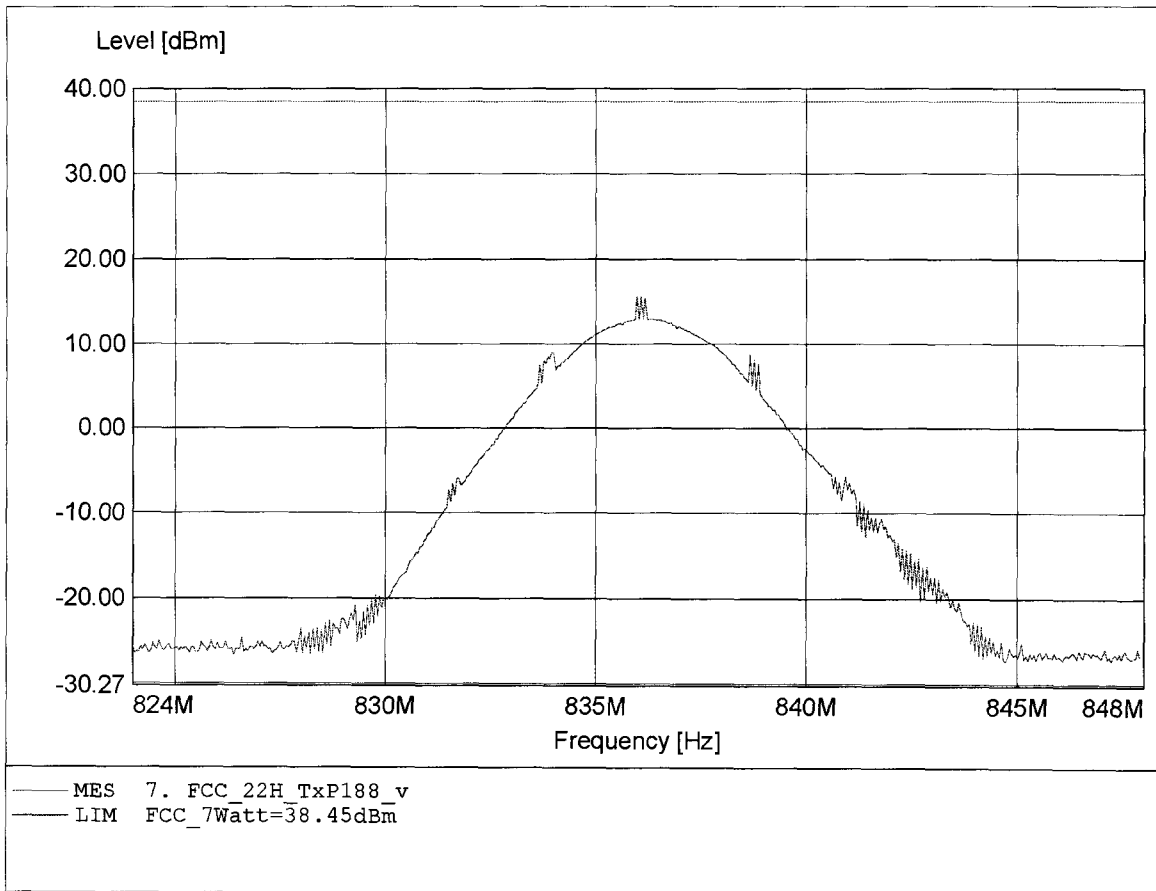


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.505MHz, Pmax: 28.66dBm, RBW: 3MHz

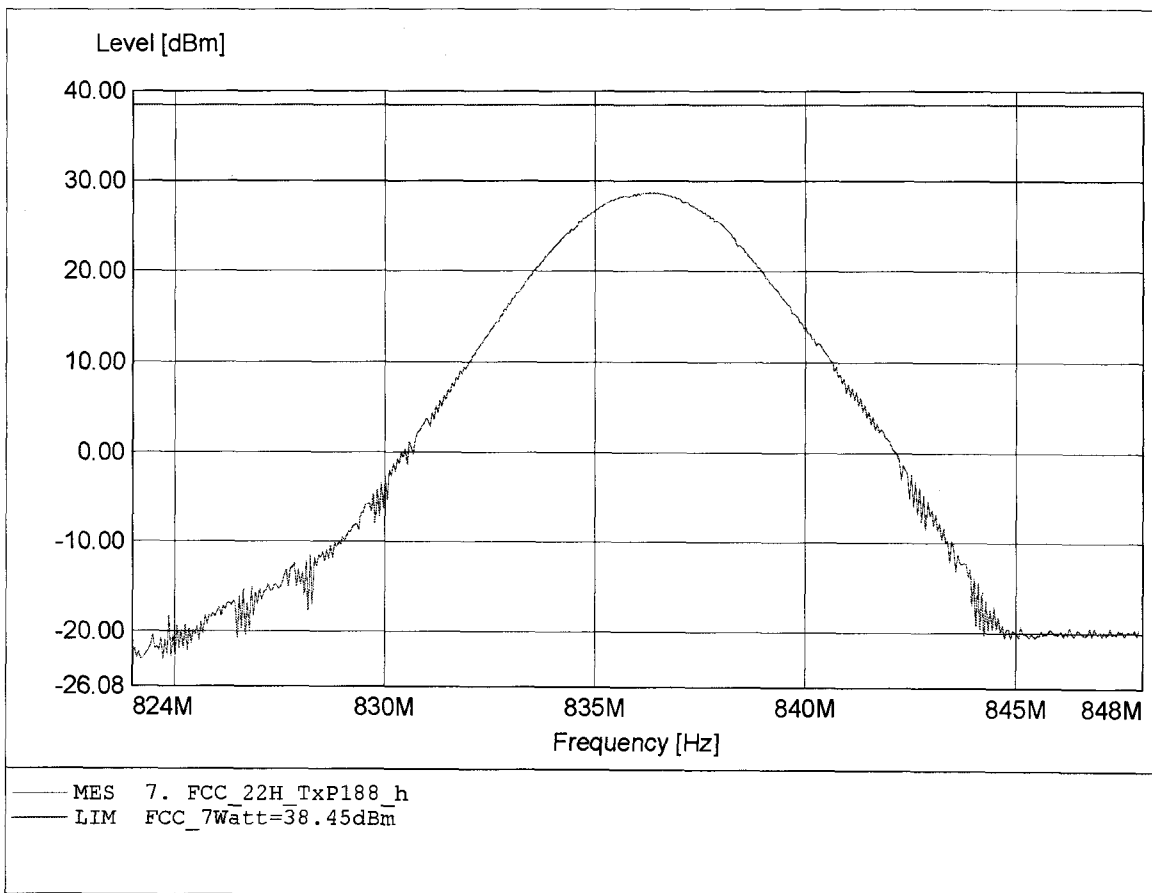


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.880MHz, Pmax: 14.46dBm, RBW: 3MHz

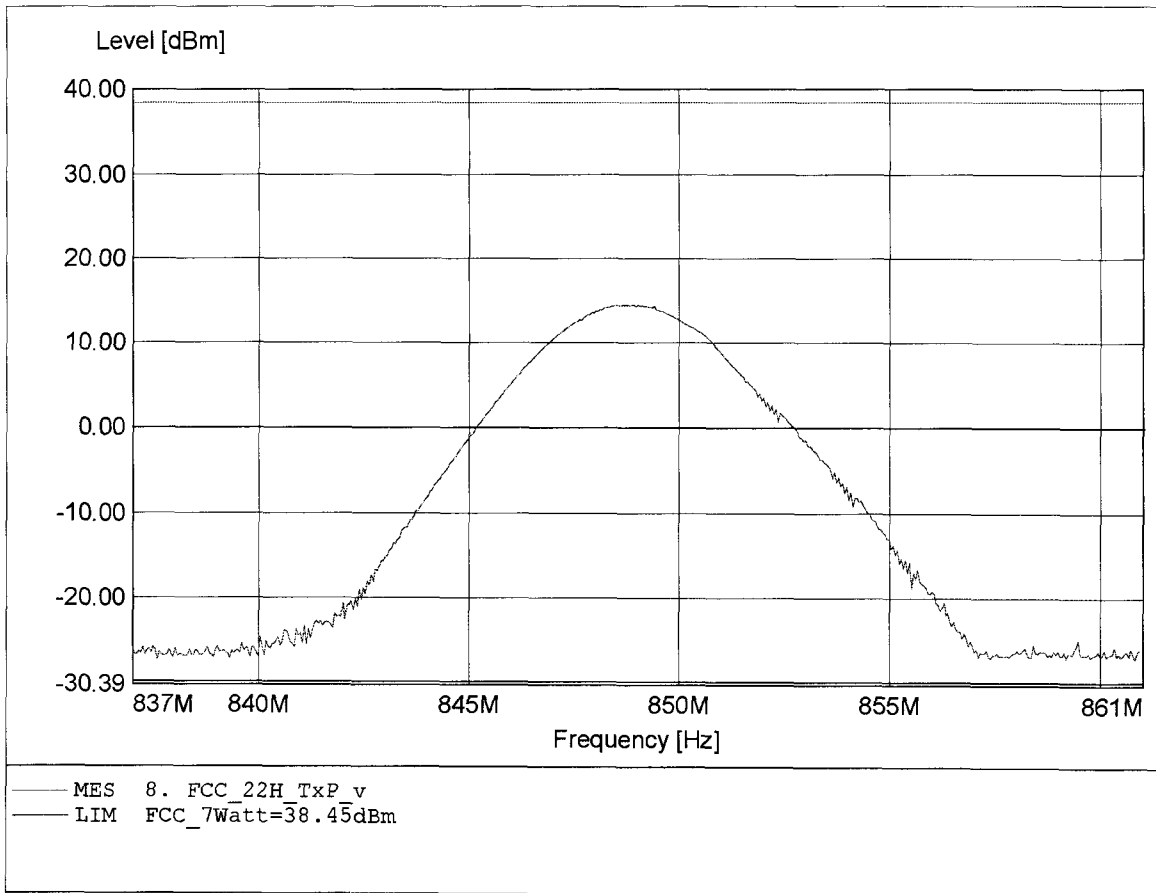


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 25.16dBm, RBW: 3MHz

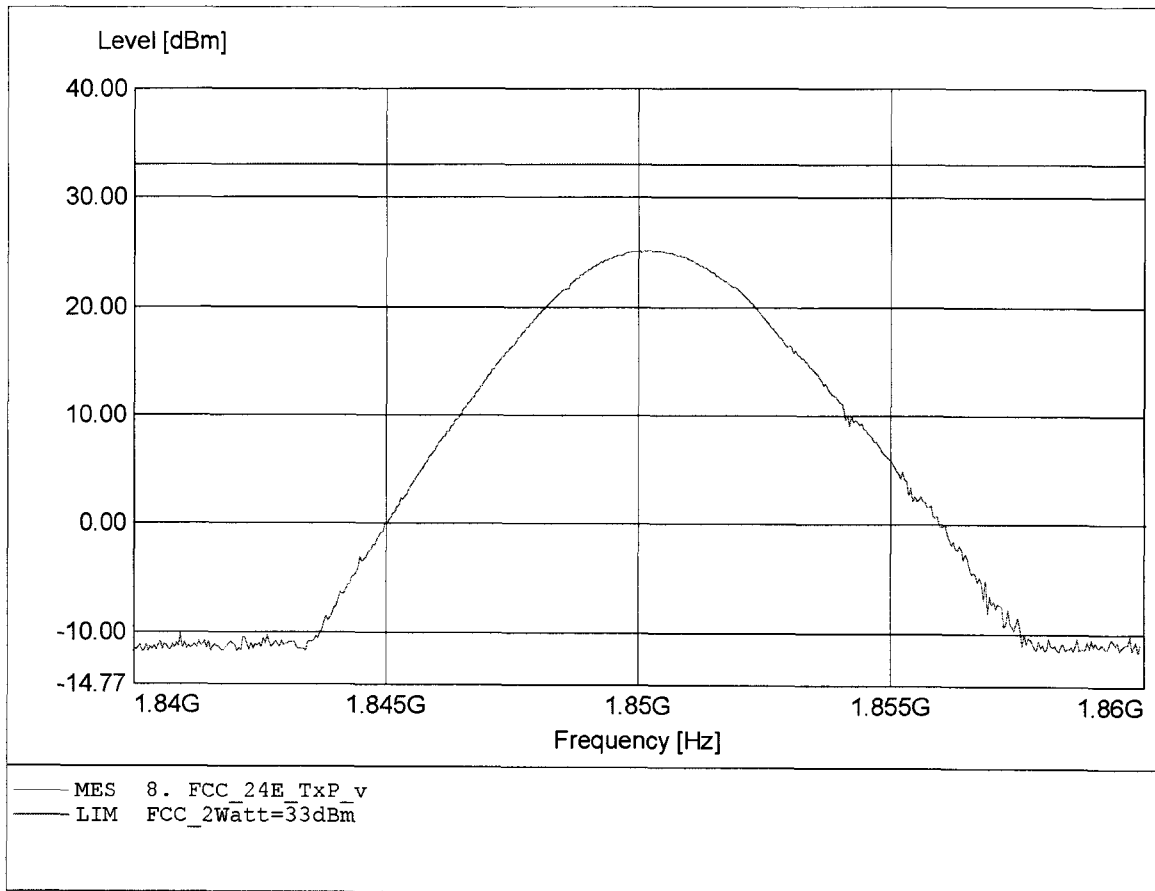


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.784MHz, Pmax: 28.10dBm, RBW: 3MHz

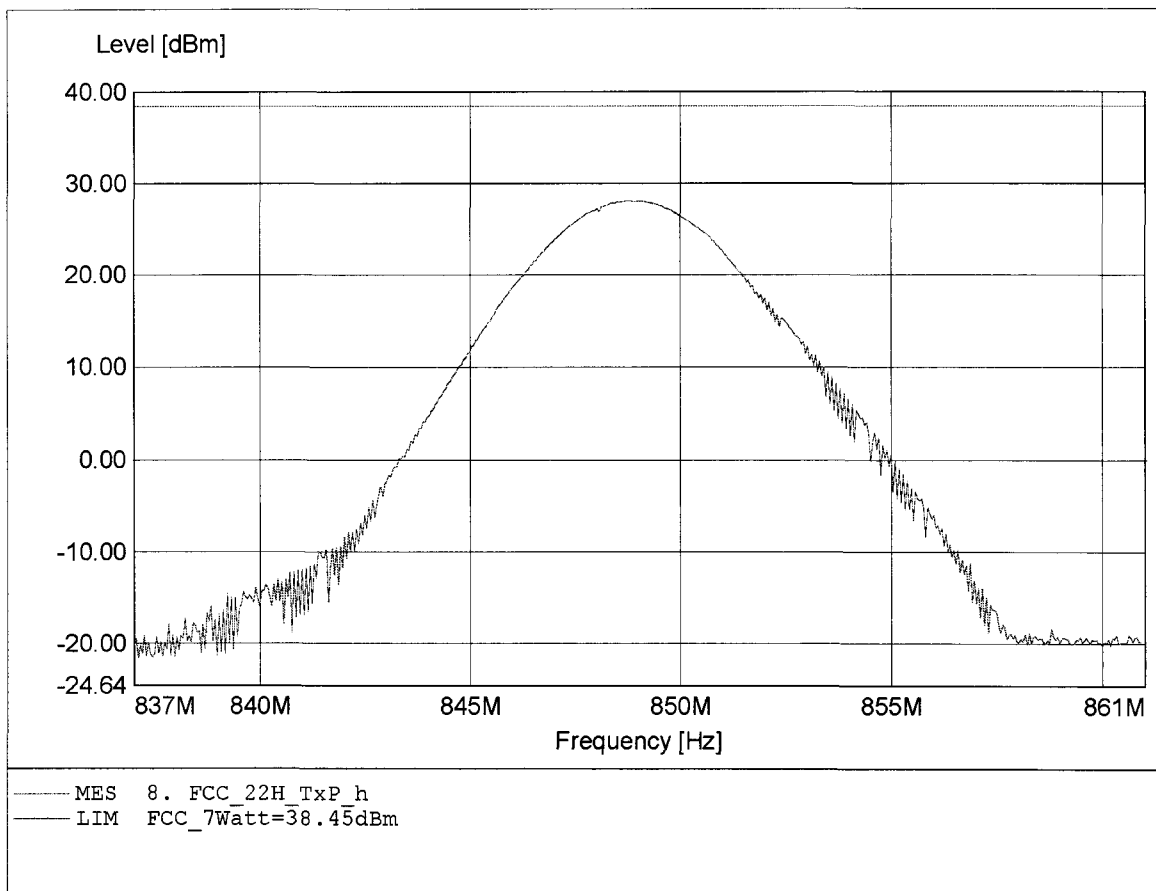


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 25.46dBm, RBW: 3MHz

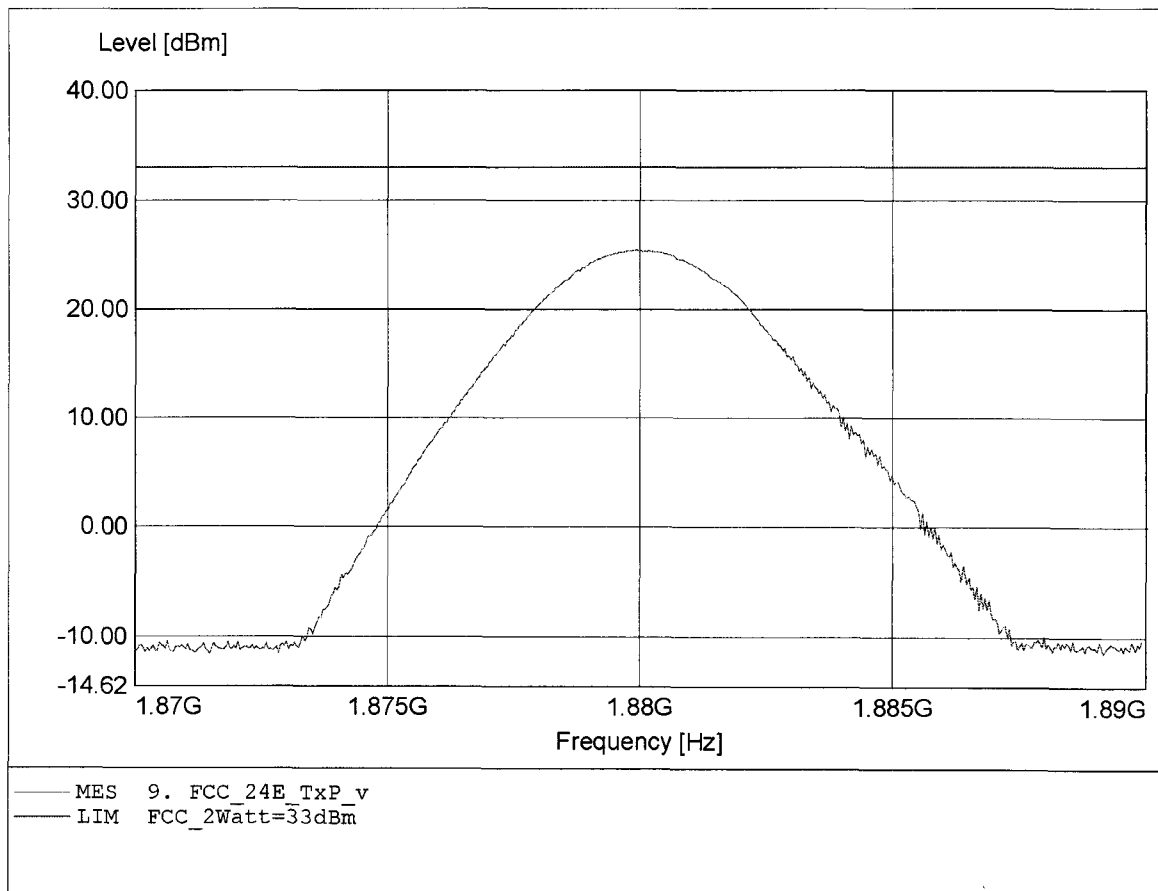


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 26.52dBm, RBW: 3MHz

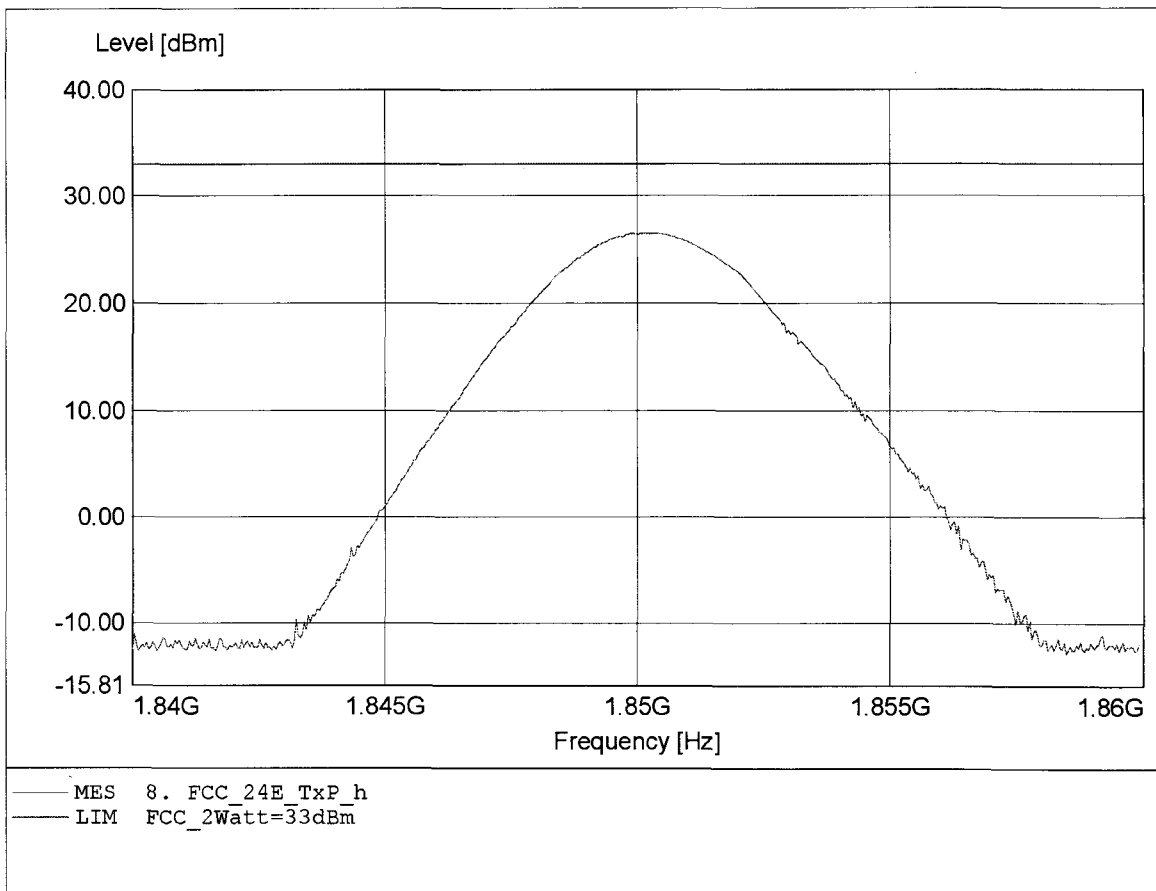


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 26.00dBm, RBW: 3MHz

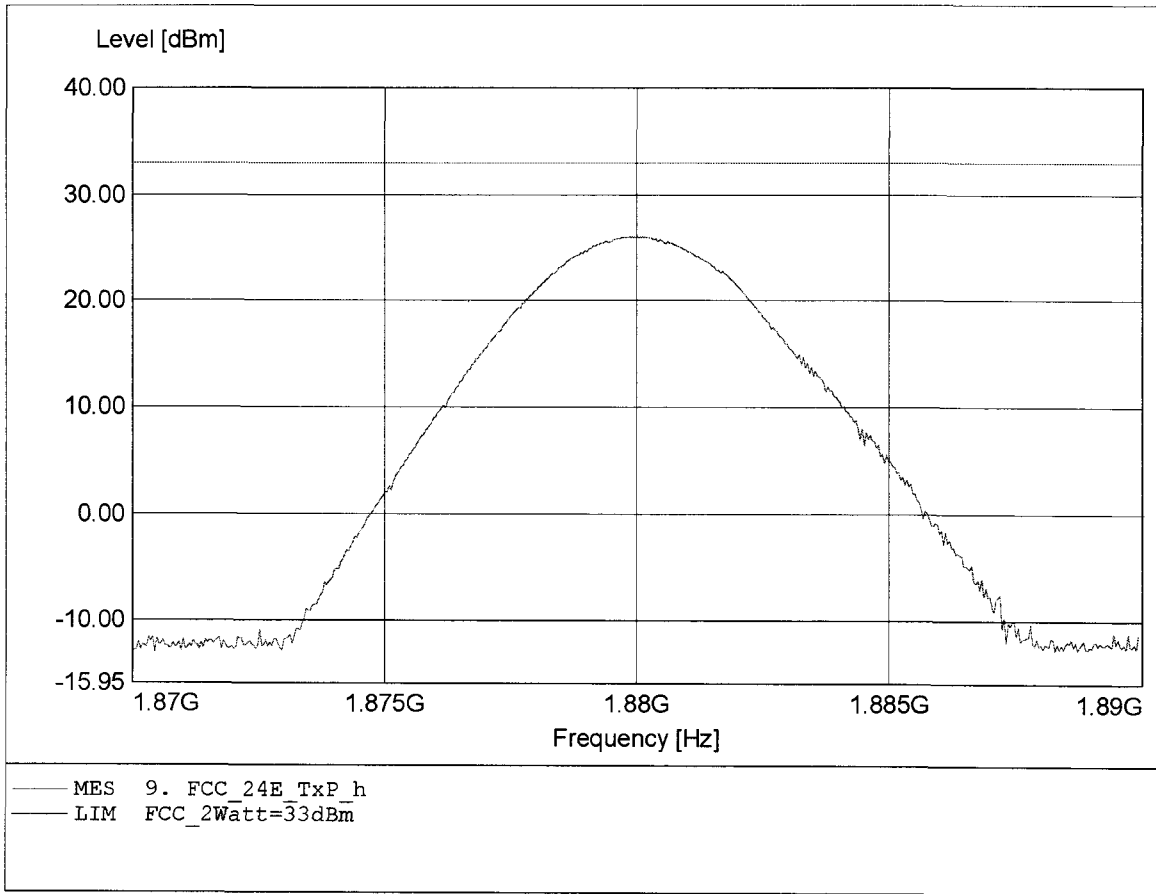


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 24.54dBm, RBW: 3MHz

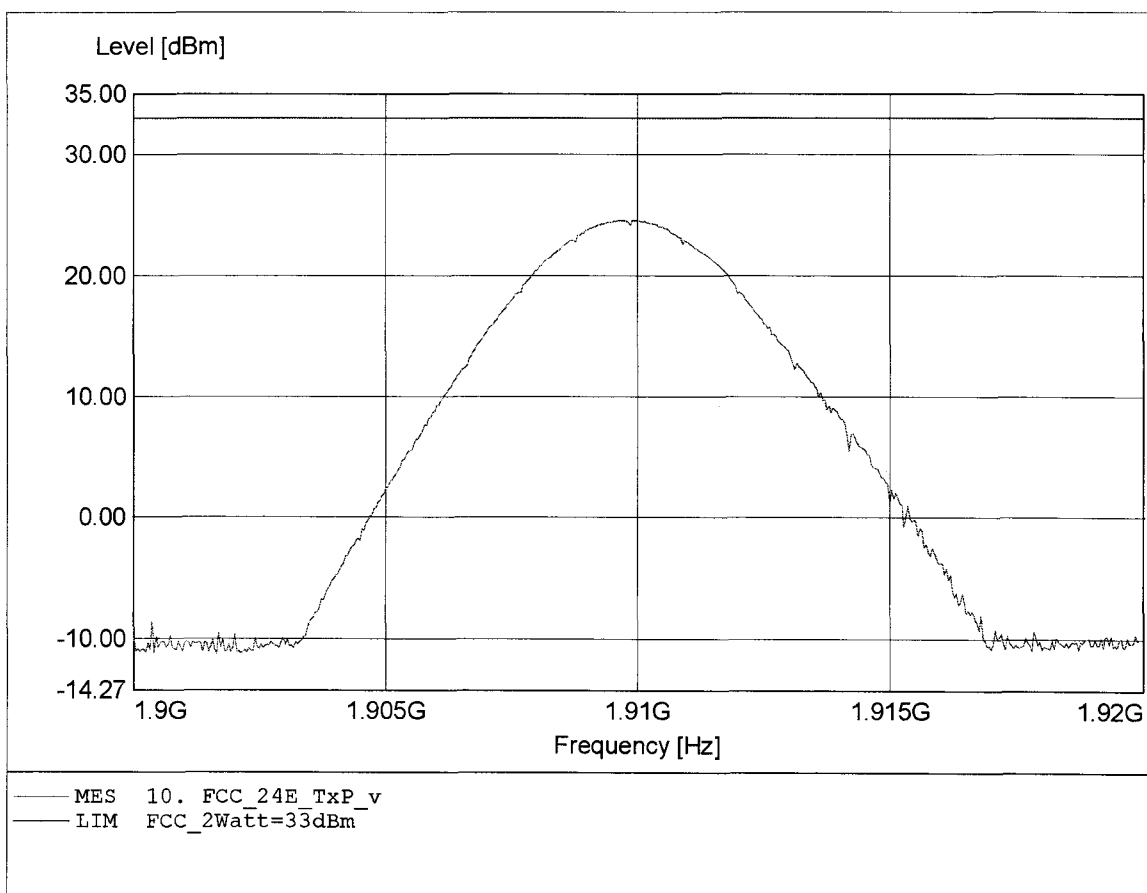

**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 27.01dBm, RBW: 3MHz

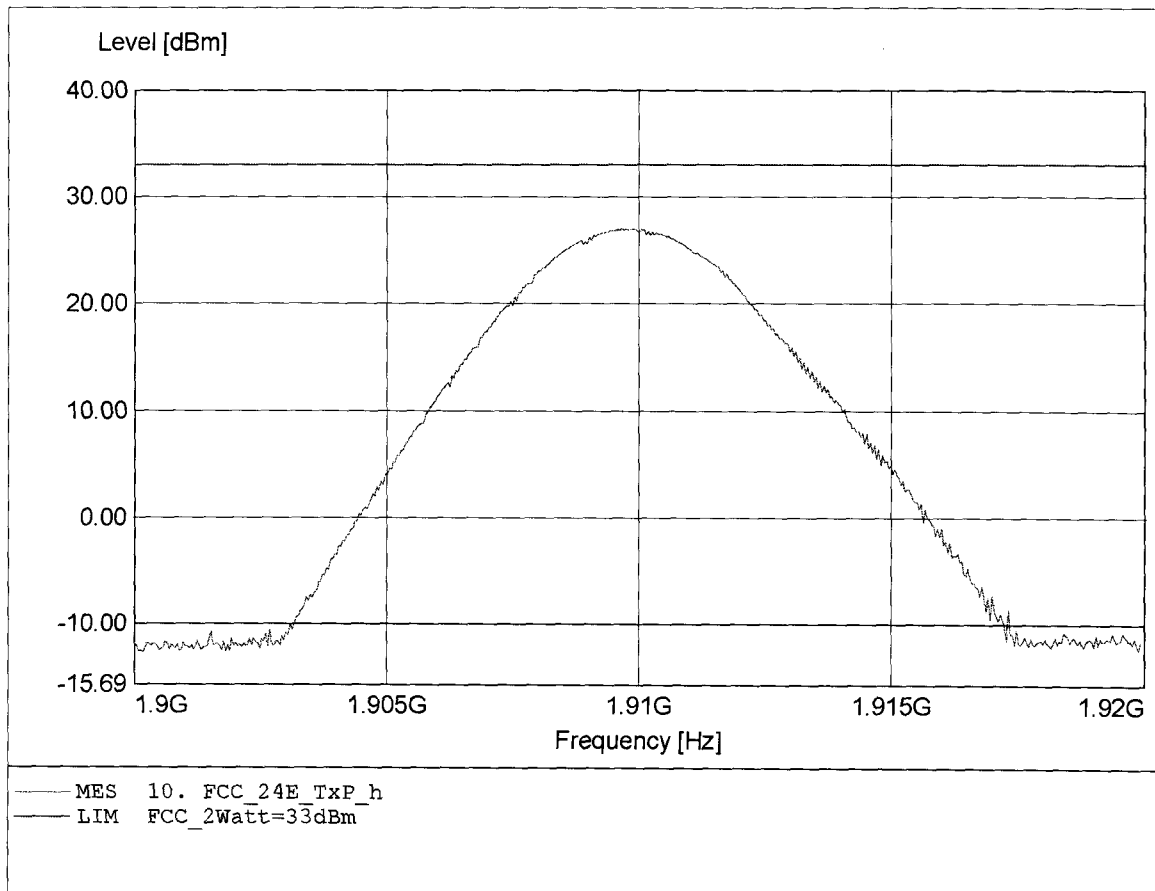


Appendix D

Occupied bandwidth, emission bandwidth

**FCC Part 22 H
Occupied Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 128
Comment 2	
Comment 3	

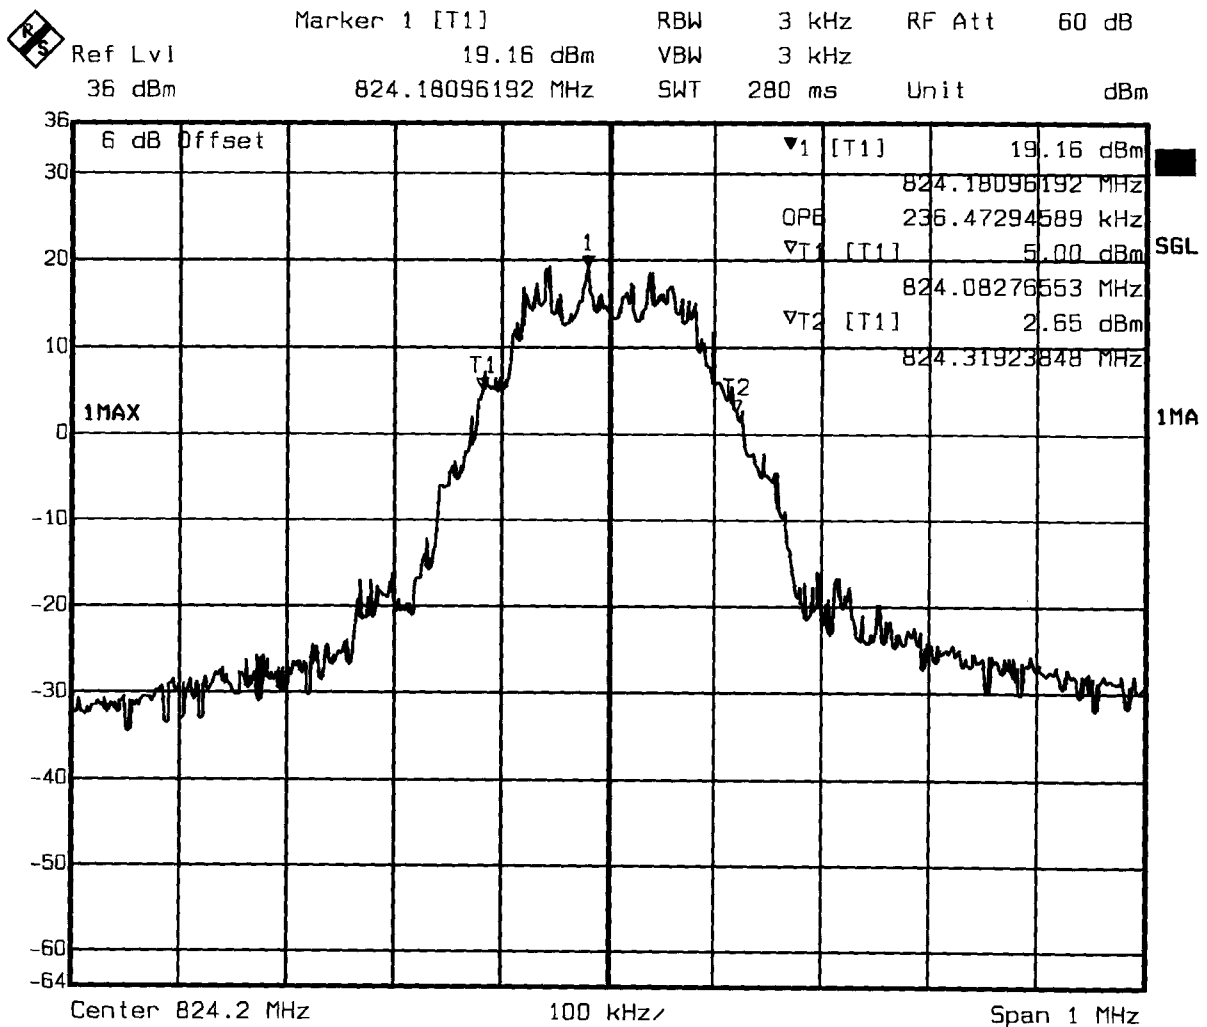


Date: 18.JAN.2007 21:28:43

Measurement diagram

**FCC Part 22 H
Occupied Bandwidth**

EUT GLOBE TROTTER EXPRESS '7.2 READY' E
 Model GE0201 / Mode: EGPRS
 Approval Holder OPTION N.V.
 Temperature / Voltage 23°C / Unom.: PC EXPRESS SLOT
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 188
 Comment 2
 Comment 3

Marker 1 [T1] RBW 3 kHz RF Att 60 dB
 Ref Lvl 19.16 dBm VBW 3 kHz
 36 dBm 836.14288577 MHz SWT 280 ms Unit dBm

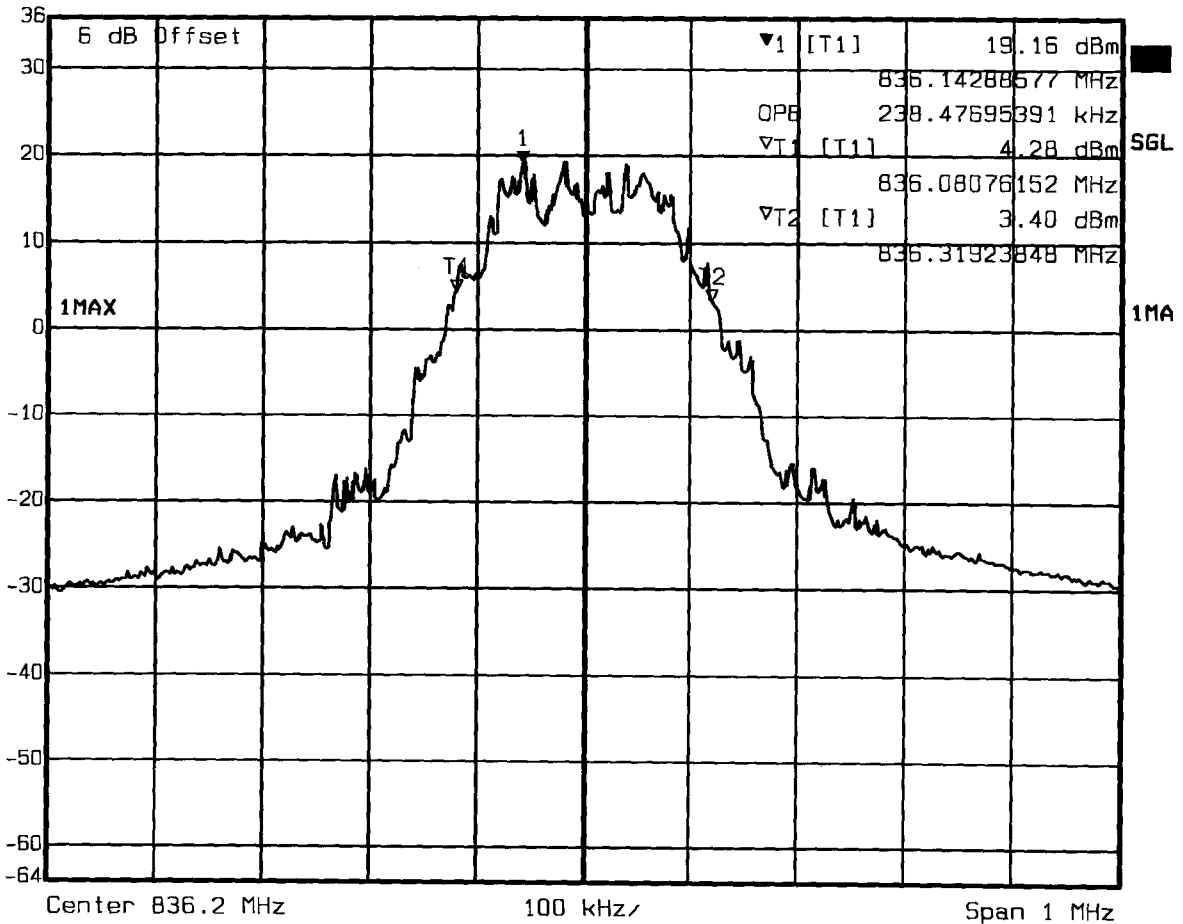

Date: 18.JAN.2007 21:31:10

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 22 H
Occupied Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 251
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	19.32 dBm	VBW	3 kHz	
	36 dBm	848.78096192 MHz	SWT	280 ms	Unit dBm

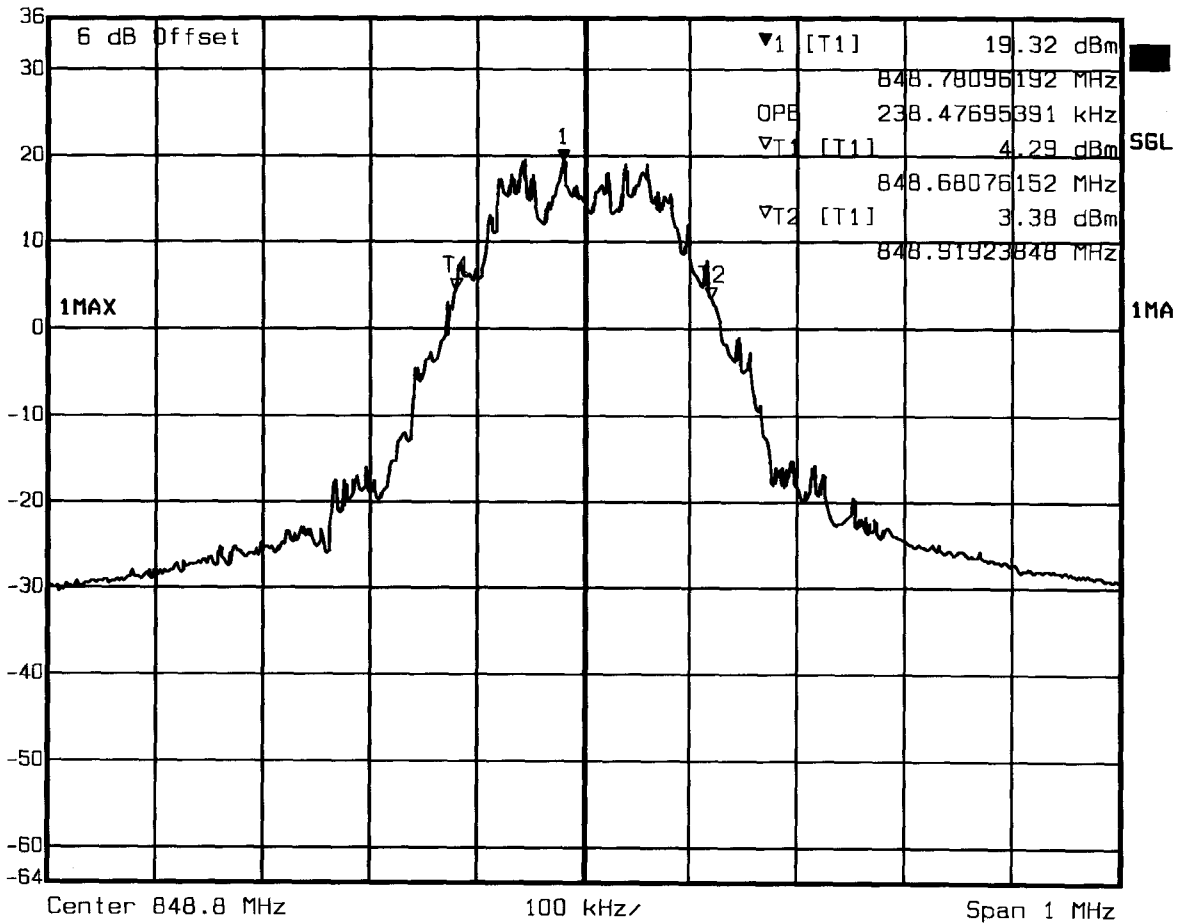


Date: 18.JAN.2007 21:33:26

Measurement diagram

**FCC Part 22 H
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 128
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz
	36 dBm	BW	296.59318637 kHz	SWT	280 ms

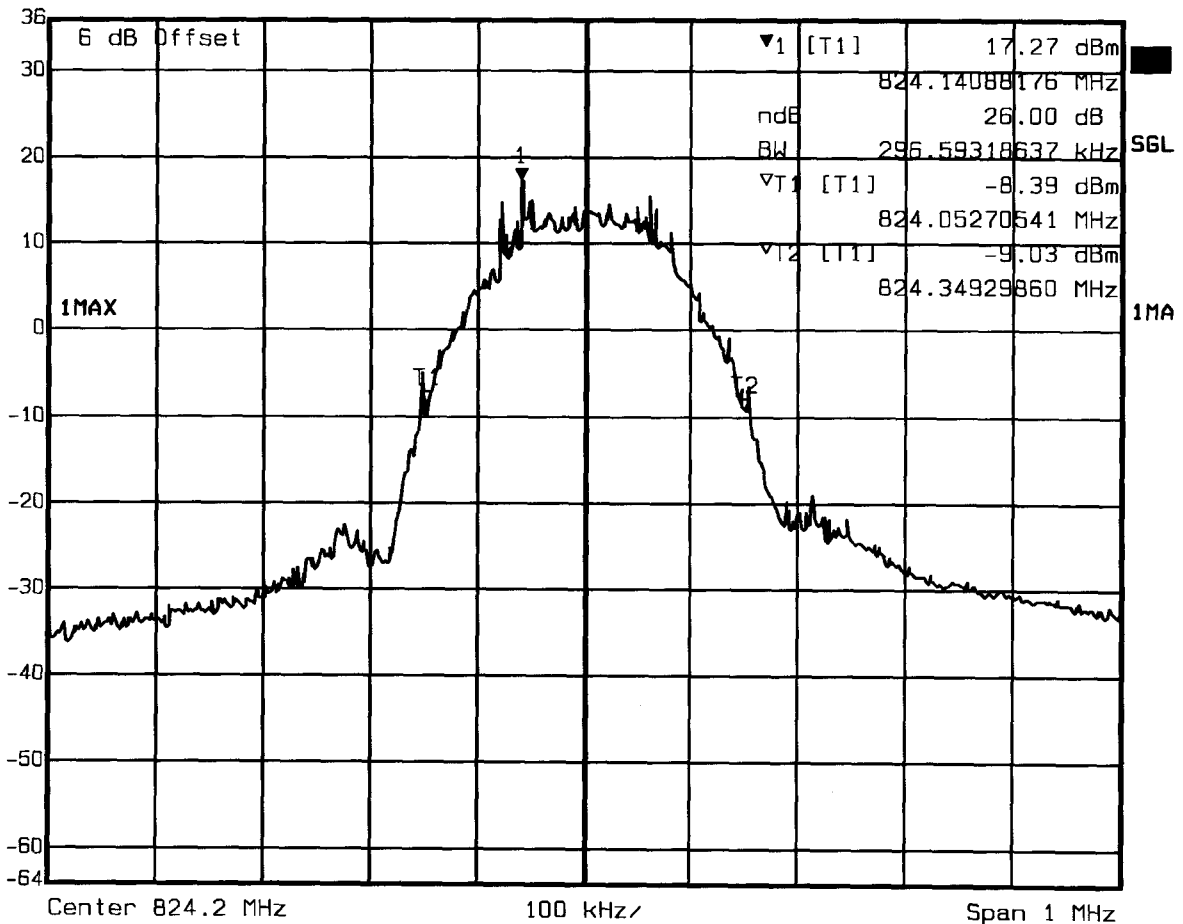

Date: 18.JAN.2007 21:27:06

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 22 H
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 188
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz
	36 dBm	BW	318.63727455 kHz	SWT	280 ms

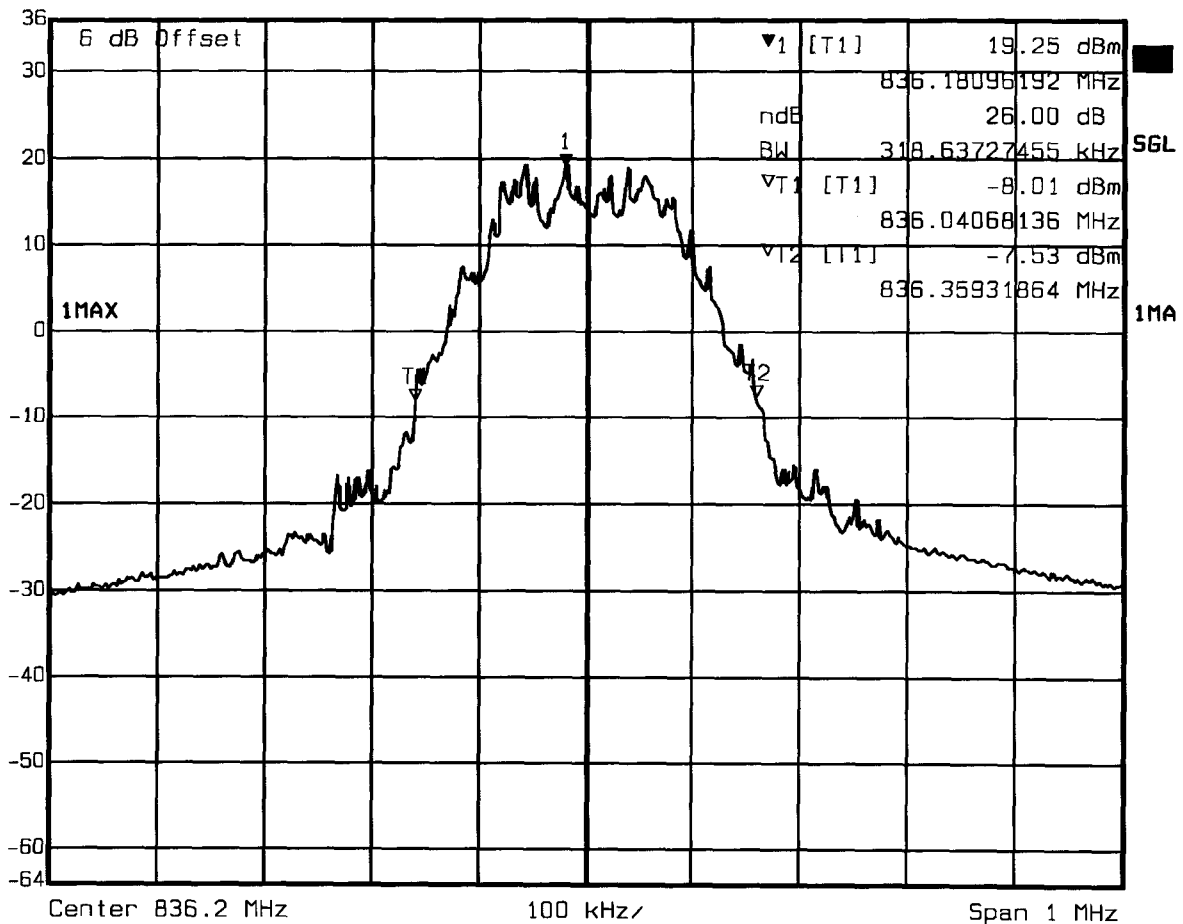


Date: 18.JAN.2007 21:30:11

Measurement diagram

**FCC Part 22 H
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 251
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB	
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	316.63326653 kHz	SWT	280 ms	Unit

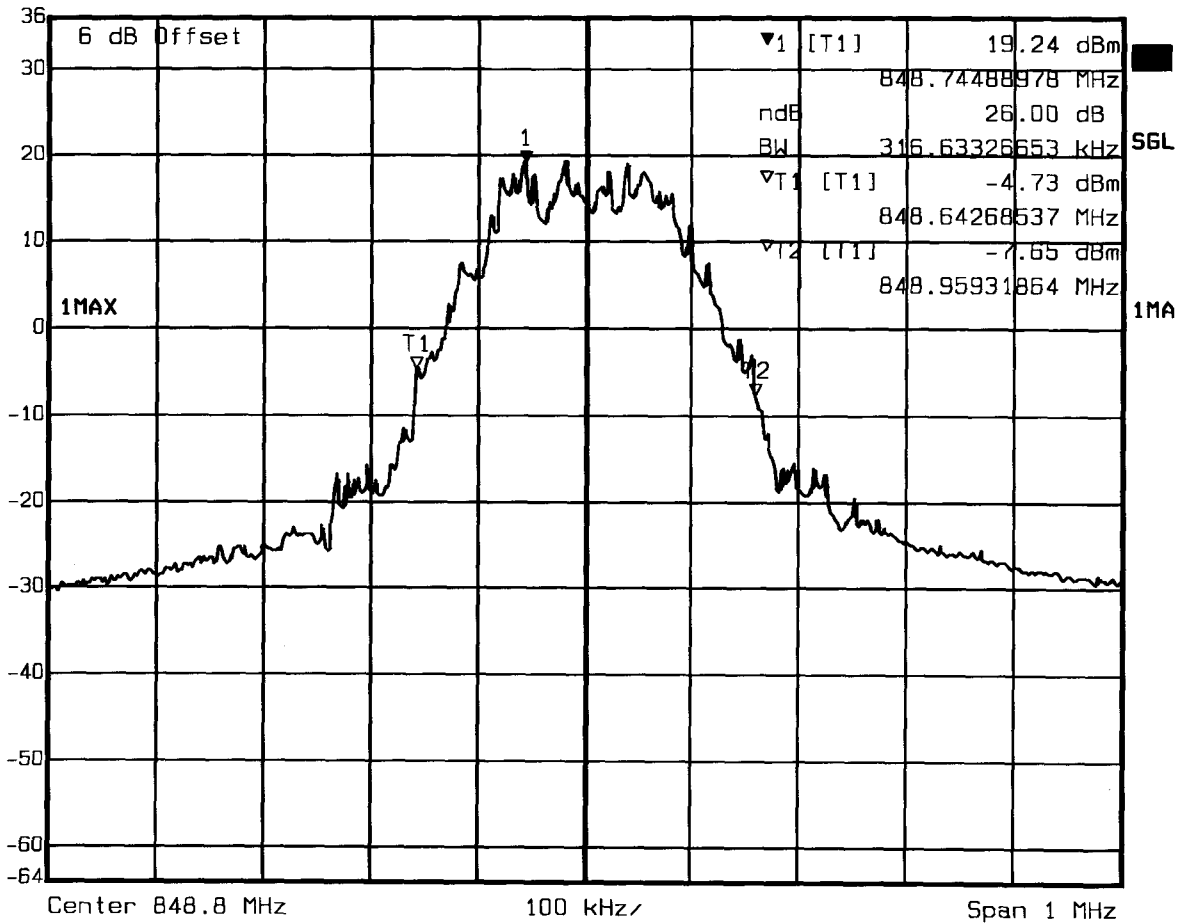

Date: 18.JAN.2007 21:34:54

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 24 E
Occupied Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 512
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	18.91 dBm	VBW	3 kHz	
	36 dBm	1.85018096 GHz	SWT	280 ms	Unit dBm

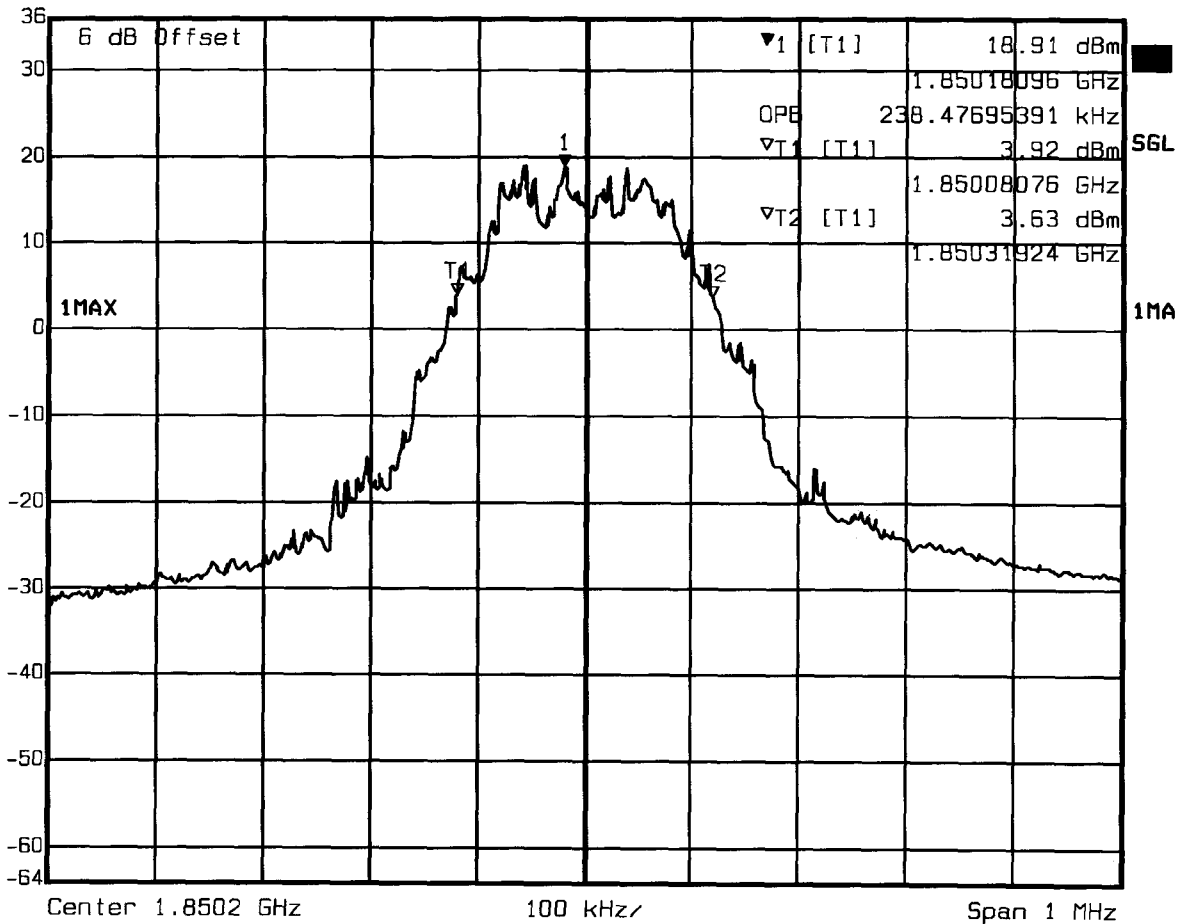

Date: 18.JAN.2007 21:11:42

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 24 E
Occupied Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 661
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	18.73 dBm	VBW	3 kHz	
	36 dBm	1.87998096 GHz	SWT	280 ms	Unit

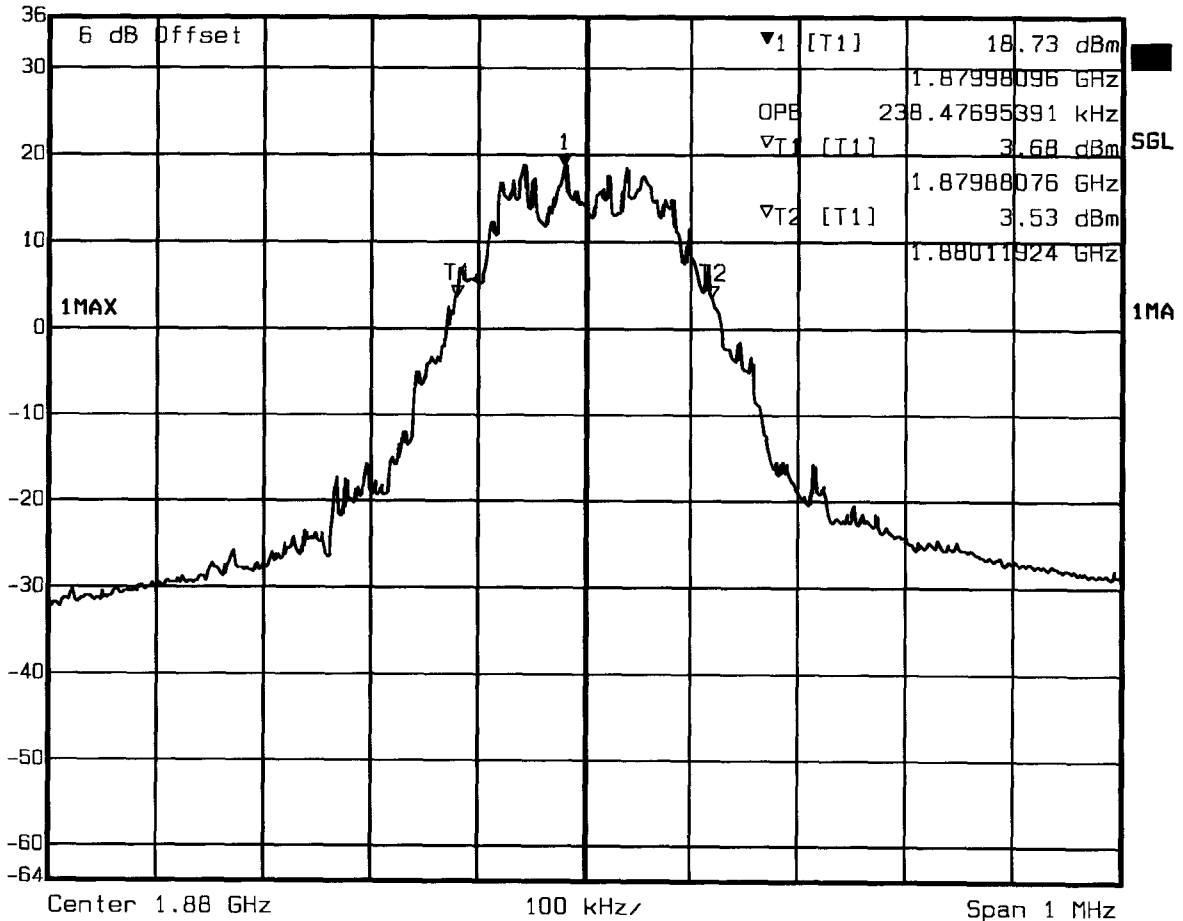


Date: 18.JAN.2007 21:15:58

Measurement diagram

**FCC Part 24 E
Occupied Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 810
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	18.11 dBm	VBW	3 kHz	
	36 dBm	1.90978096 GHz	SWT	280 ms	Unit dBm

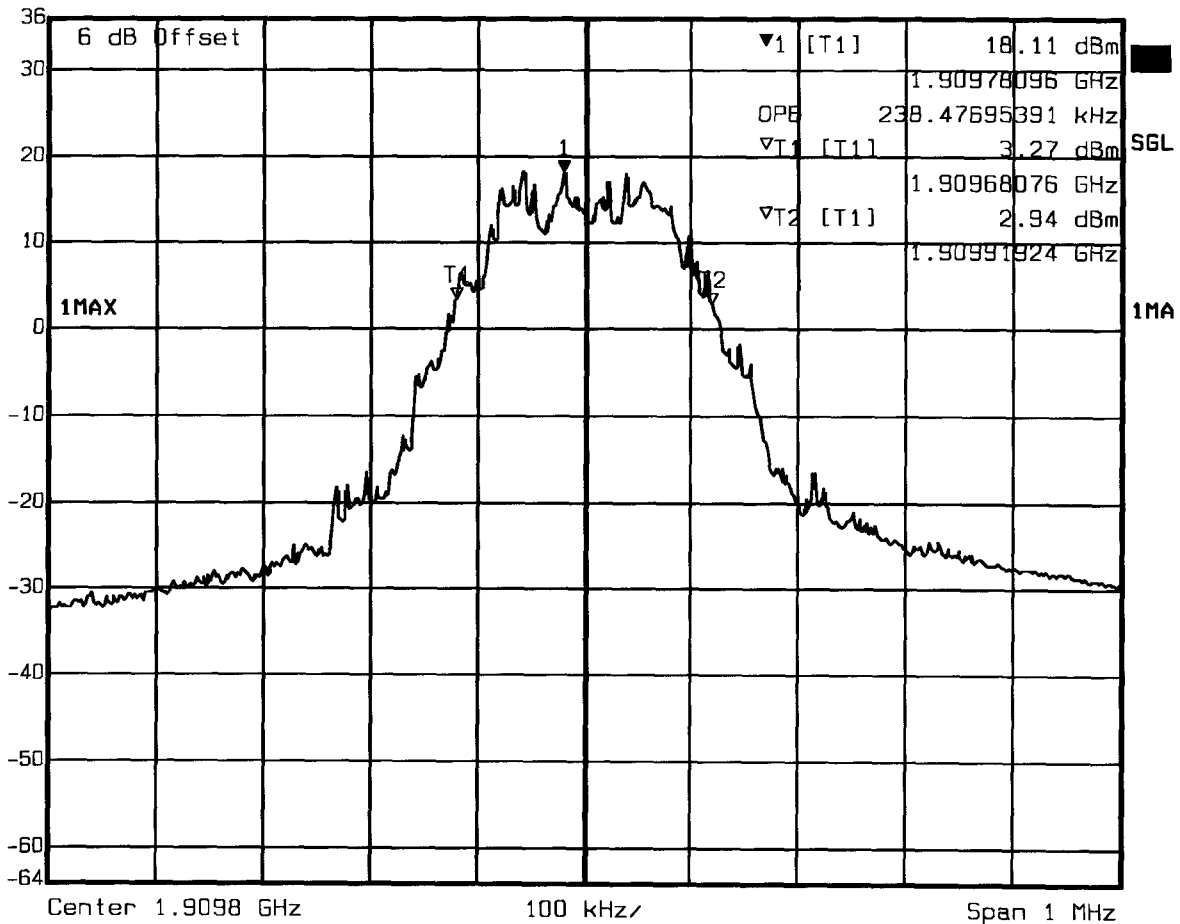

Date: 18.JAN.2007 21:18:47

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 24 E
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 512
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz
	36 dBm	BW	312.62525050 kHz	SWT	280 ms
				Unit	dBm

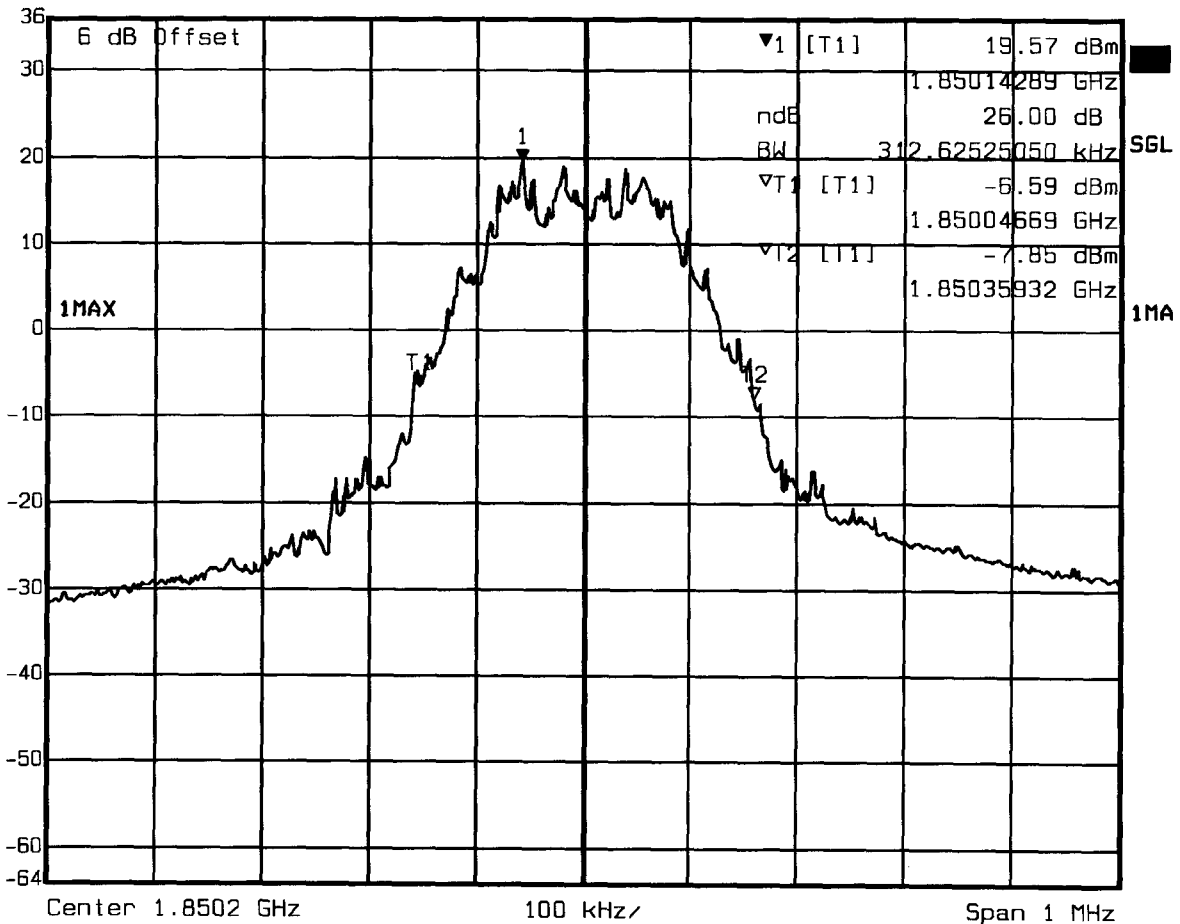

Date: 18.JAN.2007 21:13:40

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 24 E
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 661
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz
	36 dBm	BW	318.63727455 kHz	SWT	280 ms

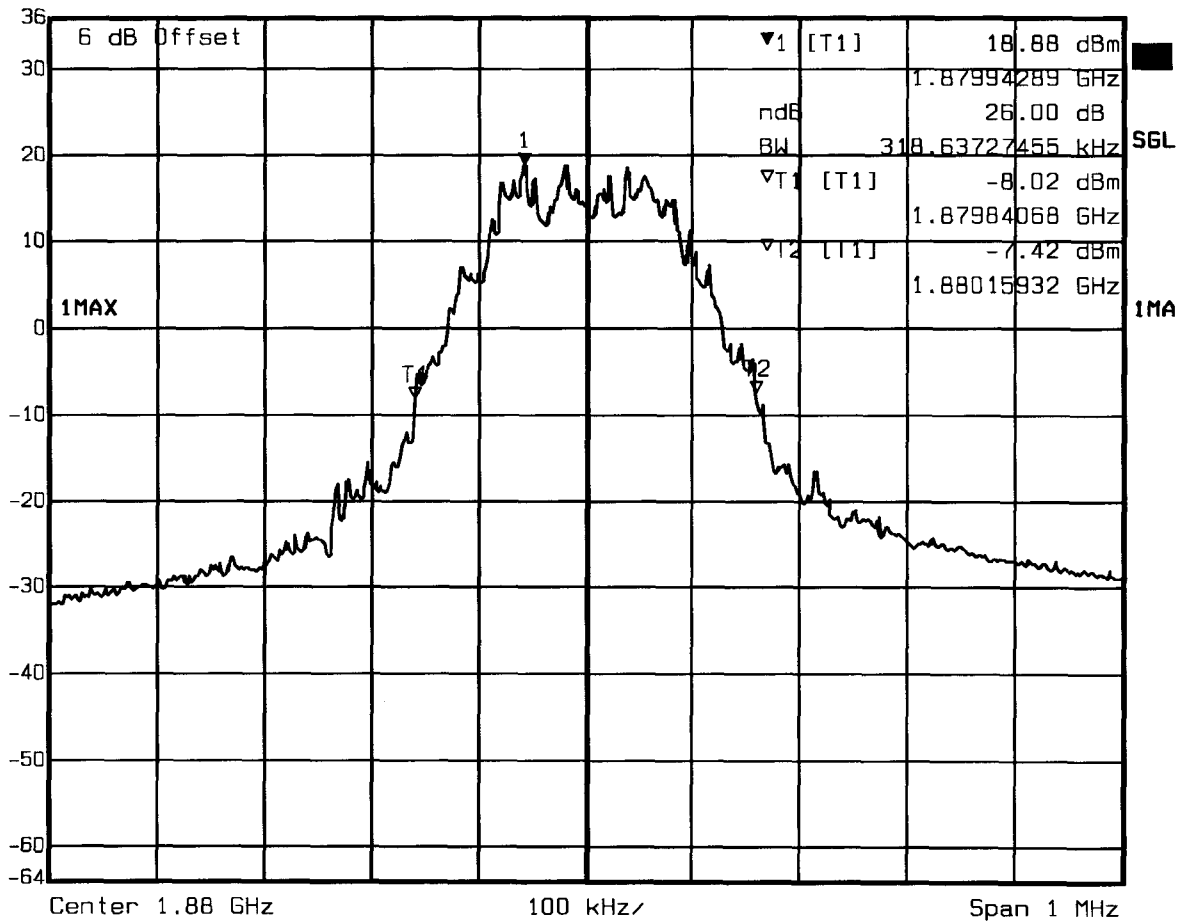

Date: 18.JAN.2007 21:14:52

Measurement diagram


ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 24 E
Emission Bandwidth**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 810
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	60 dB	
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	318.63727455 kHz	SWT	280 ms	Unit

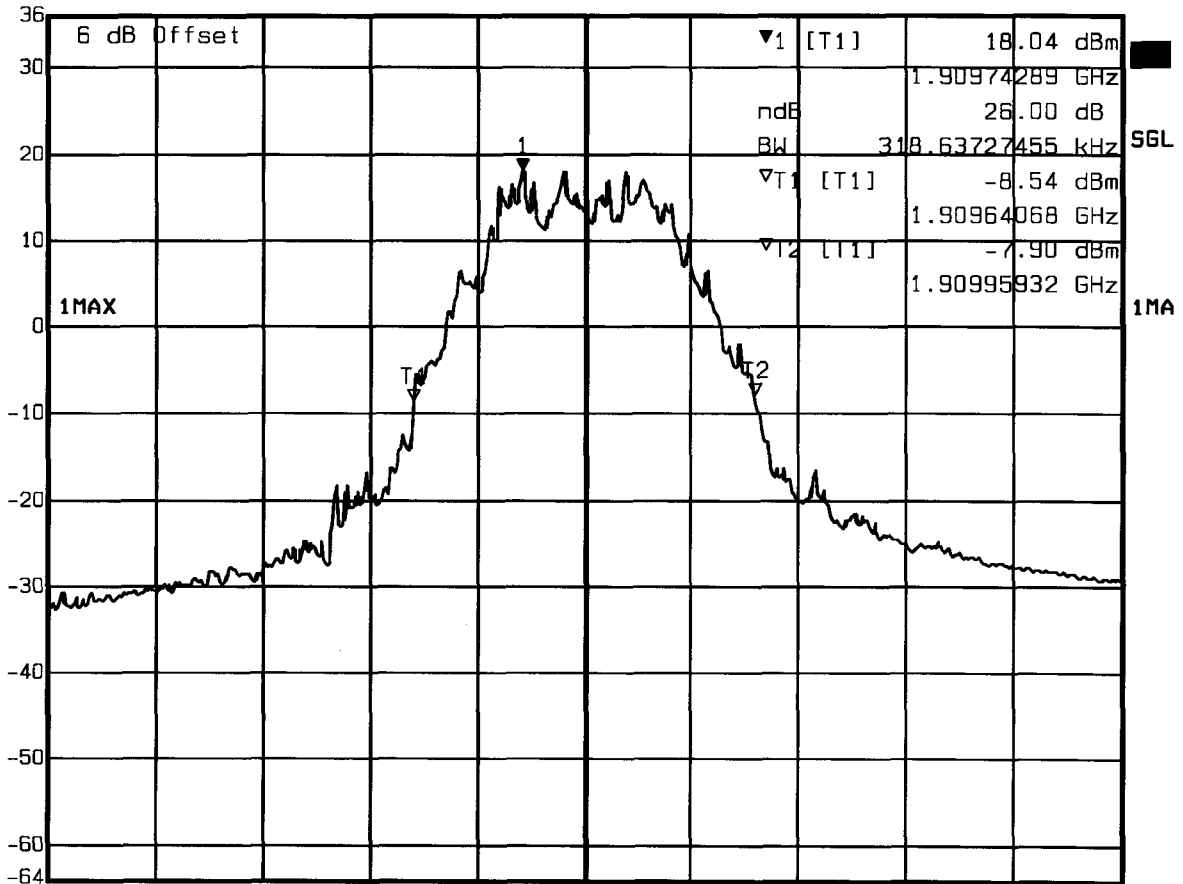

Center 1.9098 GHz 100 kHz/ Span 1 MHz

Date: 18.JAN.2007 21:20:27

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Appendix E

Frequency stability

Appendix F


Spurious emission conducted (antenna terminal)

Appendix G

Spurious emission radiated


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.980MHz, Pmax: -34.75dBm, RBW: 100kHz

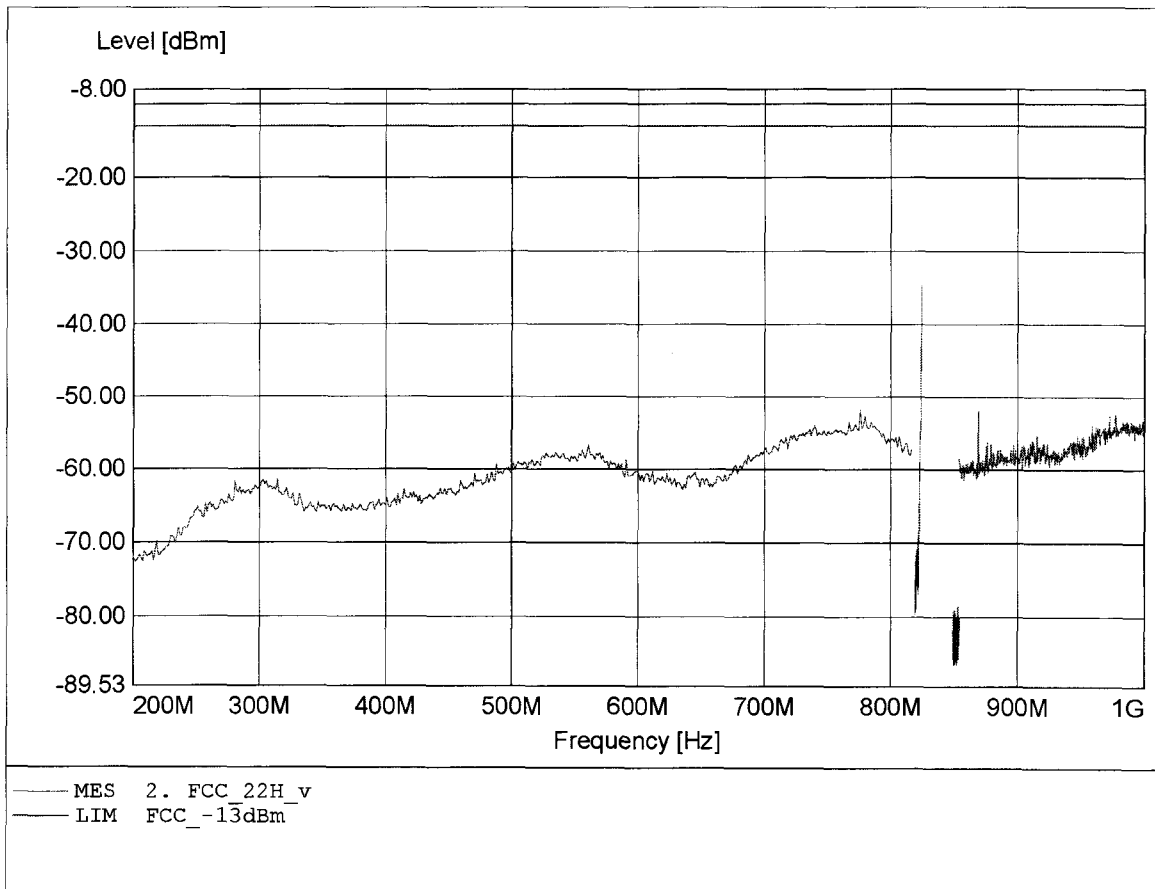


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 823.970MHz, Pmax: -27.07dBm, RBW: 100kHz

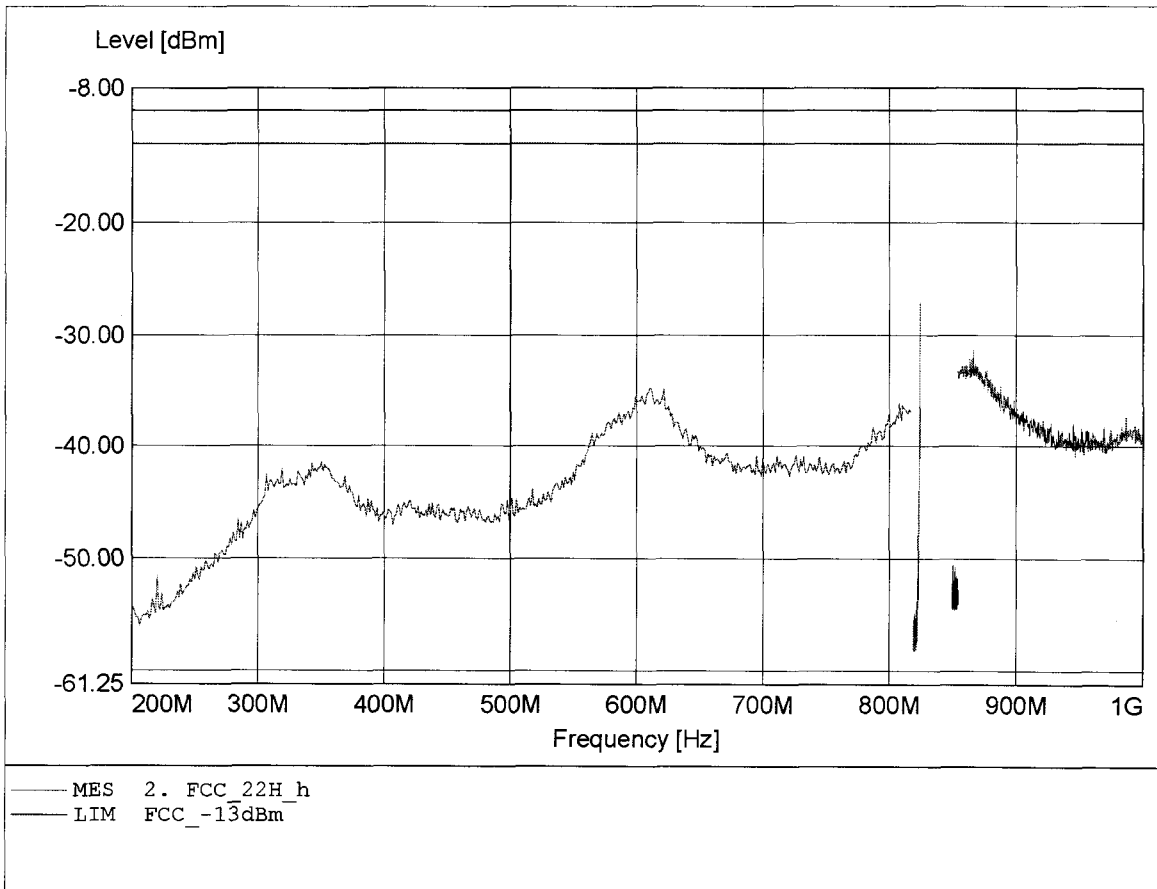


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 2.473GHz, Pmax: -29.35dBm, RBW: 1MHz

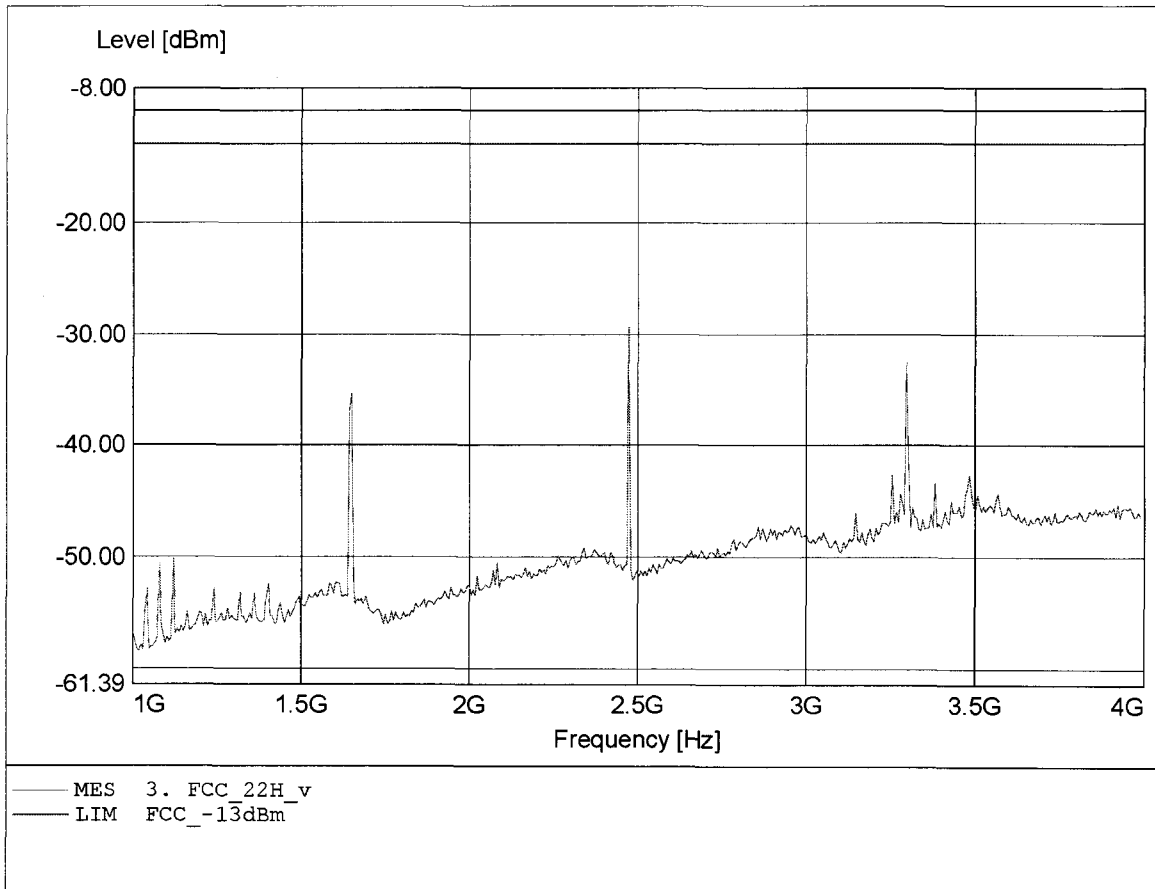


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.297GHz, Pmax: -32.16dBm, RBW: 1MHz

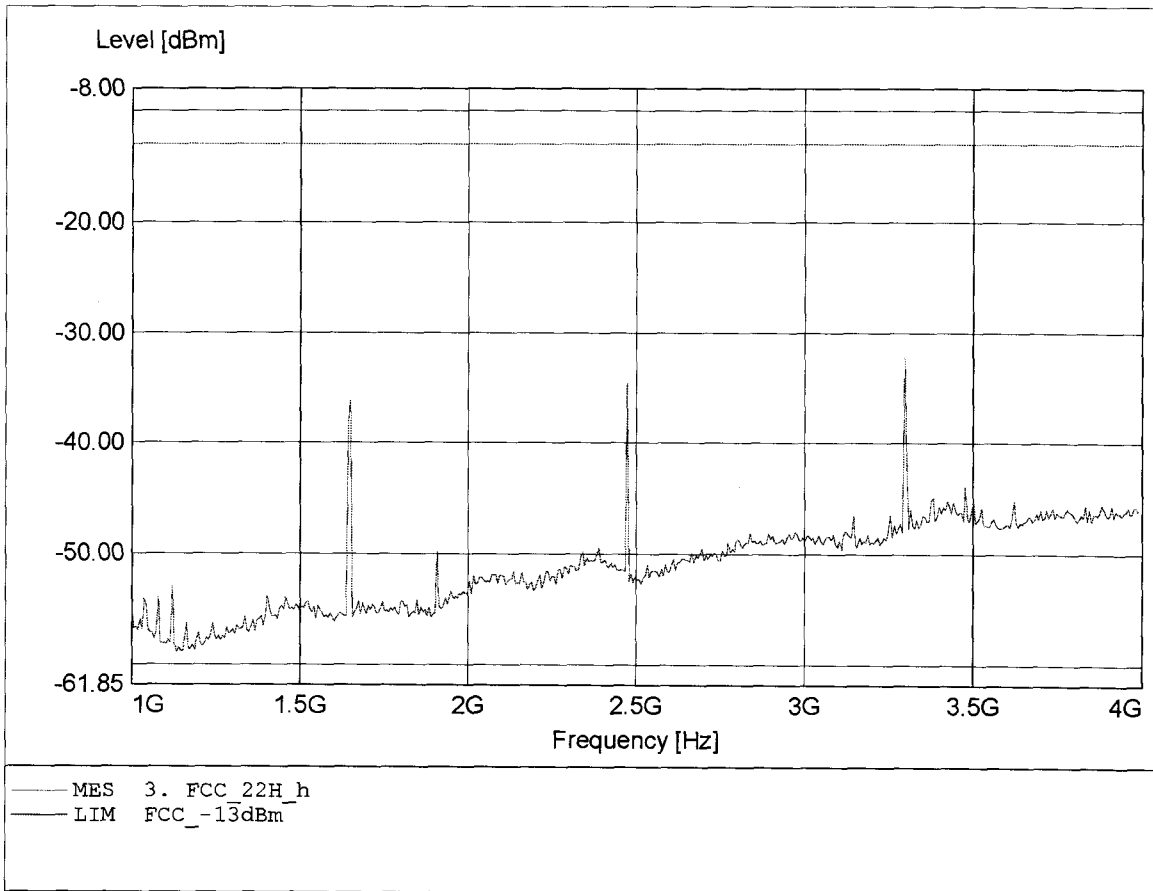


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.423GHz, Pmax: -24.93dBm, RBW: 1MHz

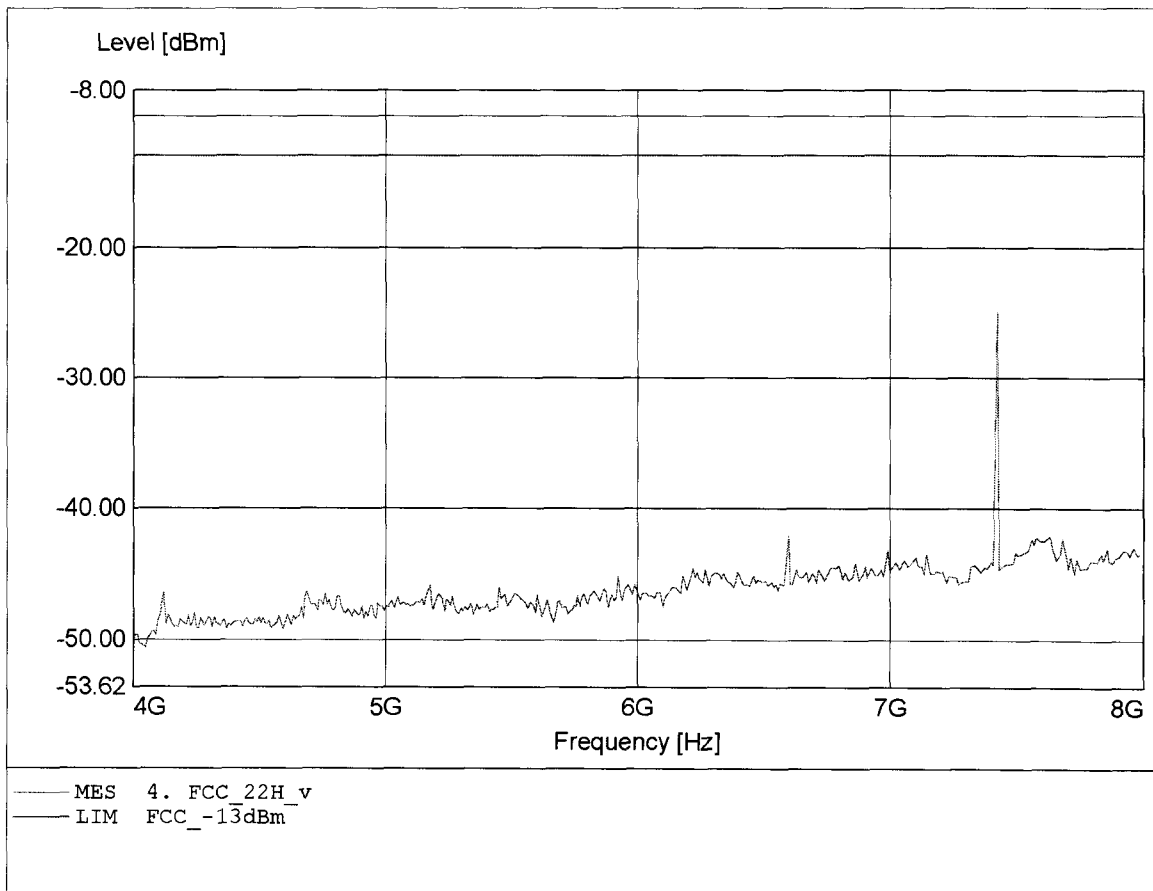


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.240GHz, Pmax: -20.44dBm, RBW: 1MHz

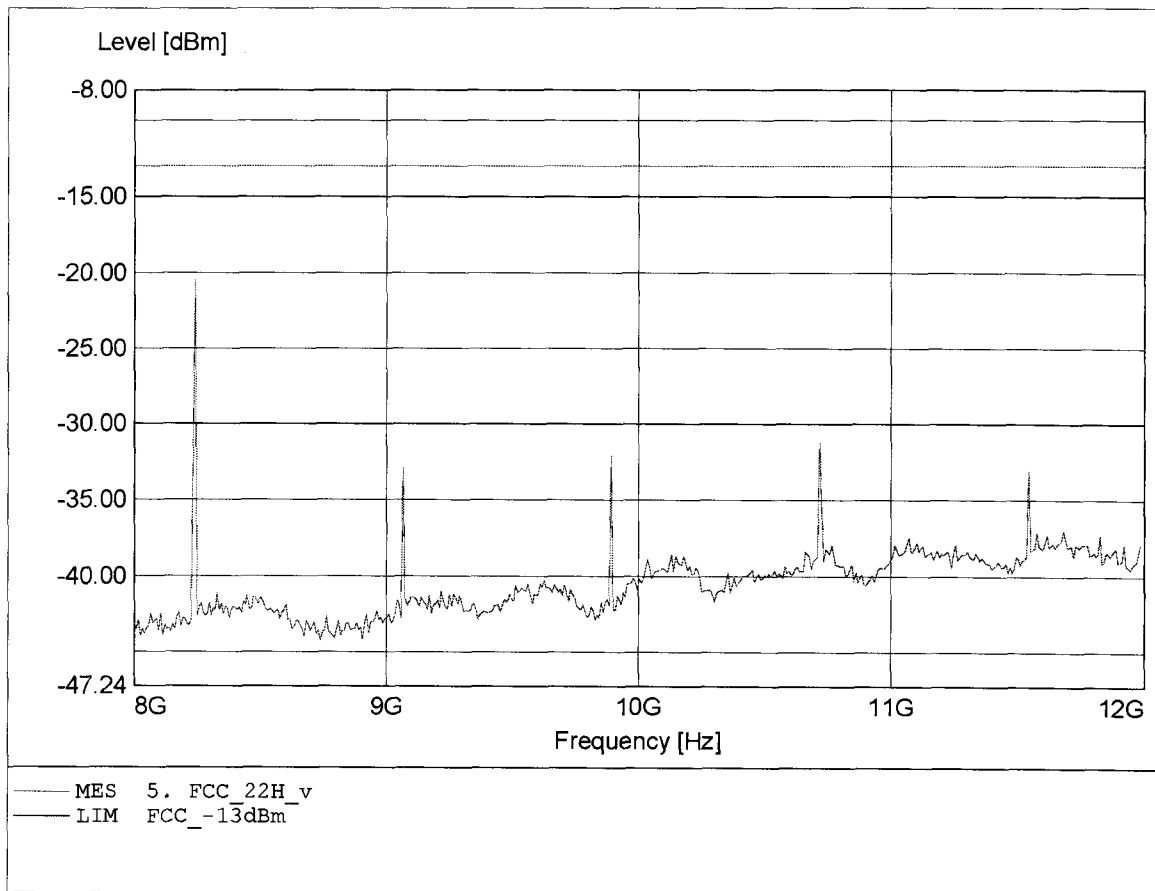


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.423GHz, Pmax: -21.46dBm, RBW: 1MHz

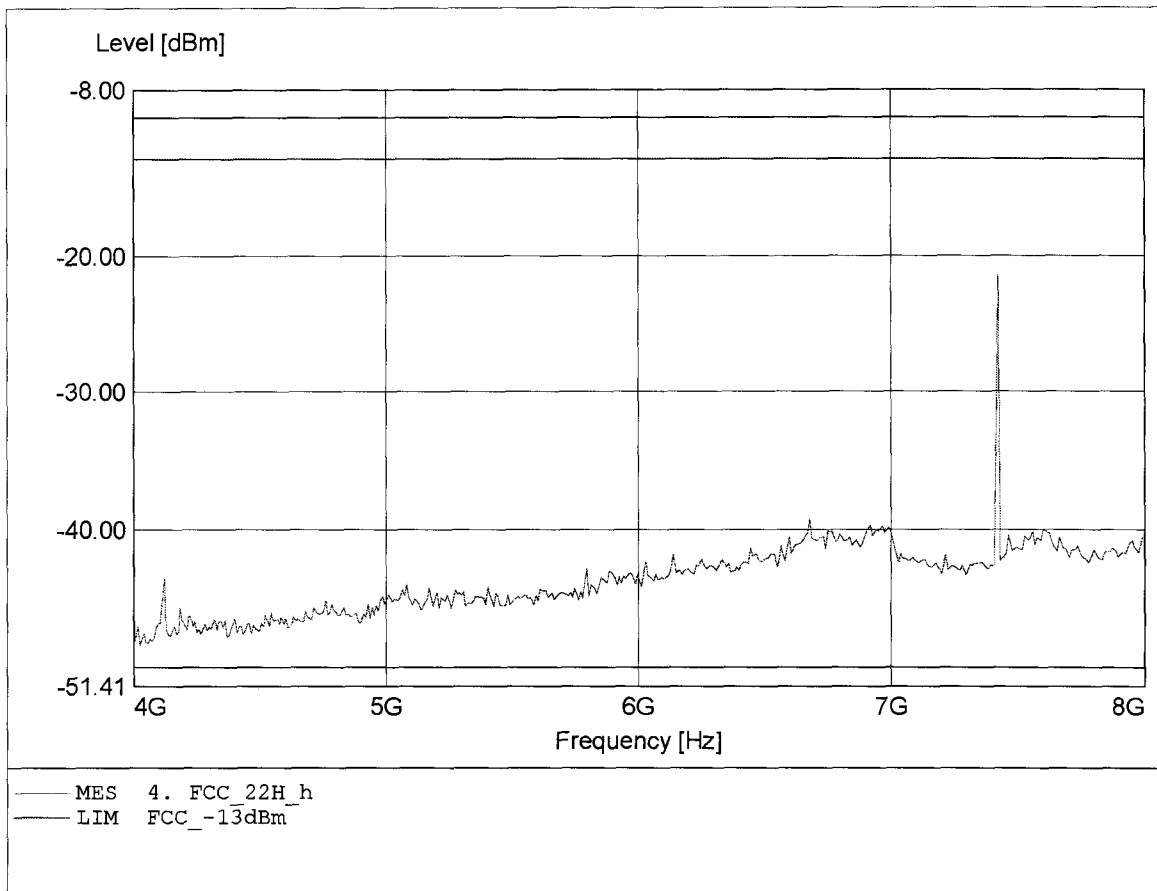


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 128
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.240GHz, Pmax: -25.05dBm, RBW: 1MHz

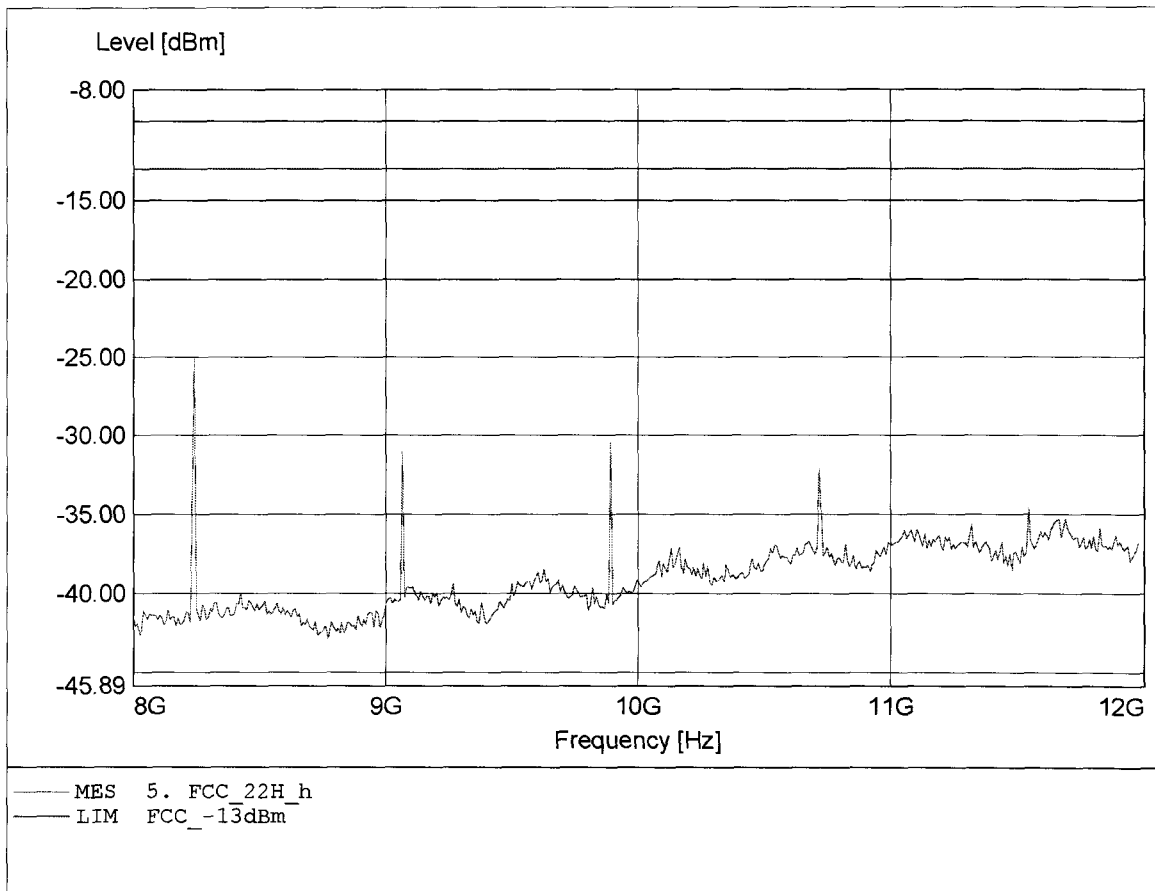


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 881.210MHz, Pmax: -50.06dBm, RBW: 100kHz

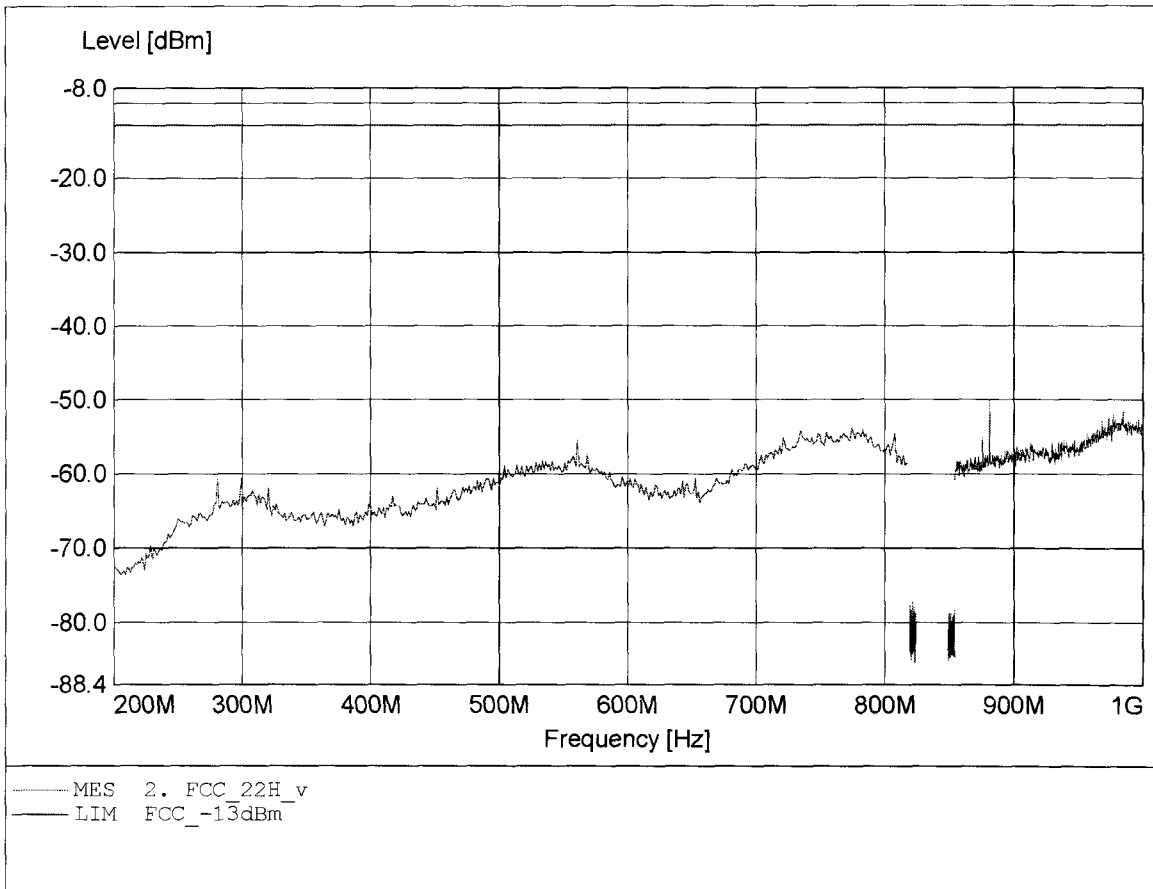


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 861.607MHz, Pmax: -32.61dBm, RBW: 100kHz

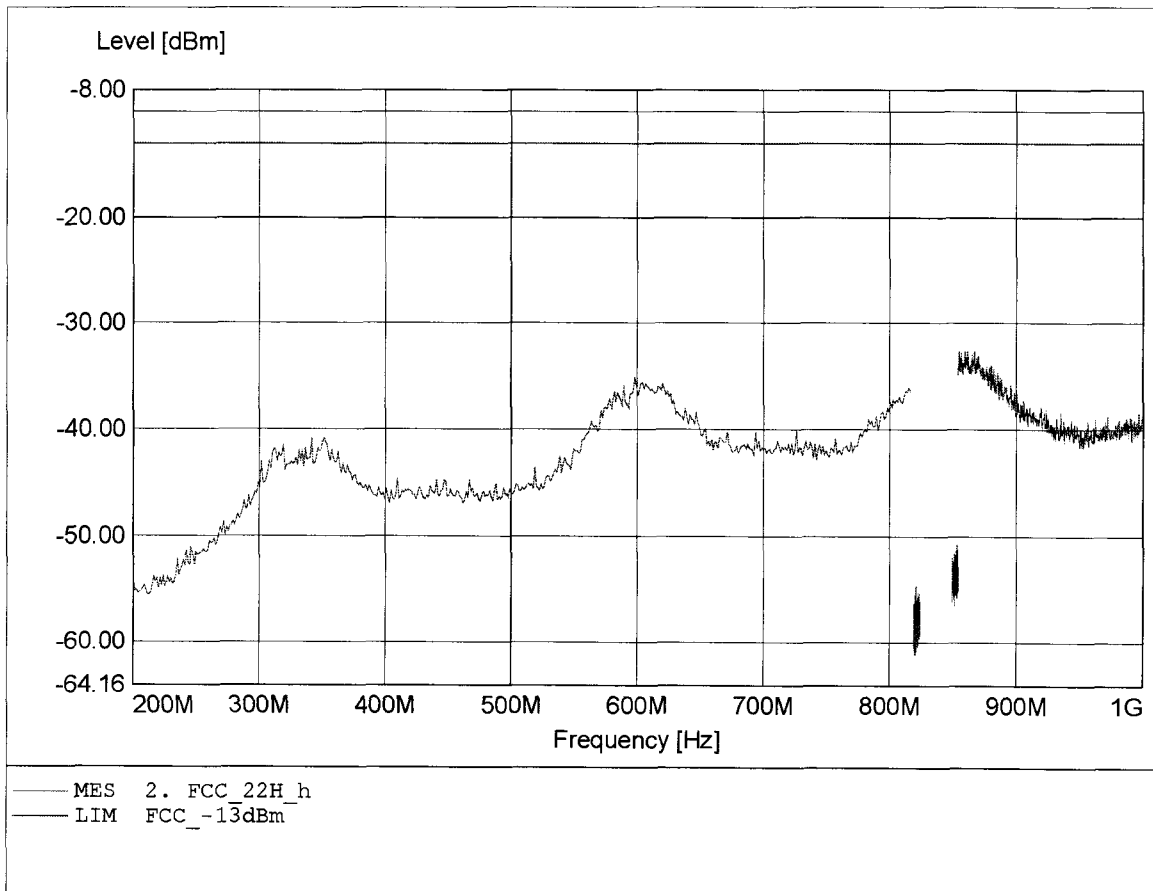


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.673GHz, Pmax: -32.34dBm, RBW: 1MHz

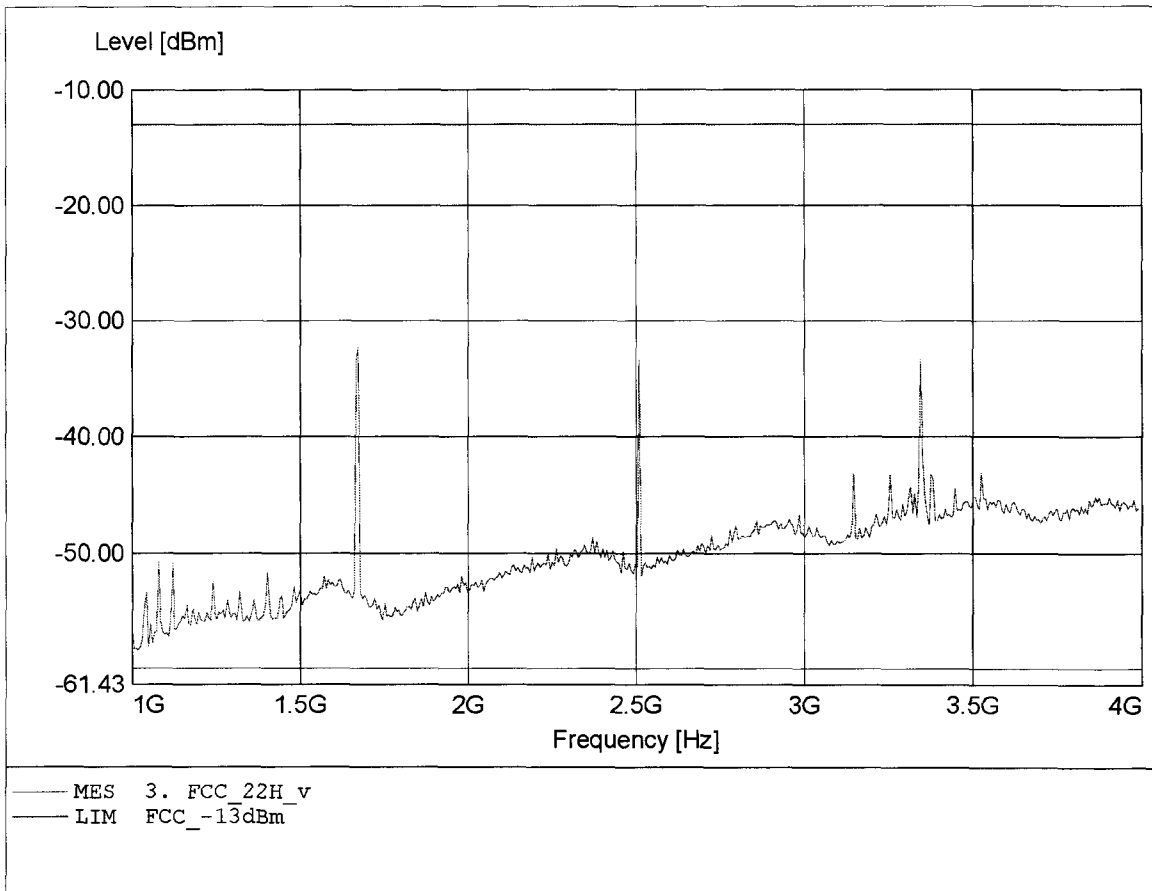


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -22.91dBm, RBW: 1MHz

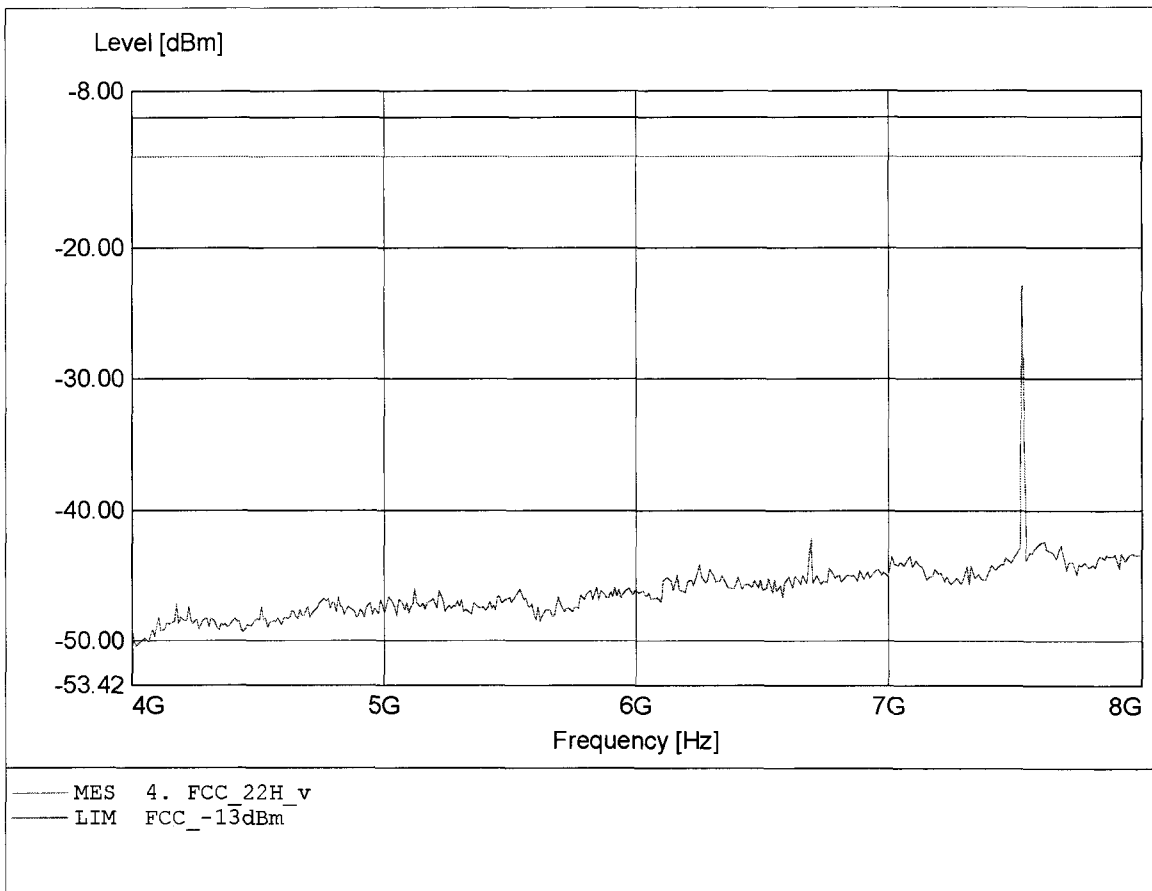


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.673GHz, Pmax: -36.01dBm, RBW: 1MHz

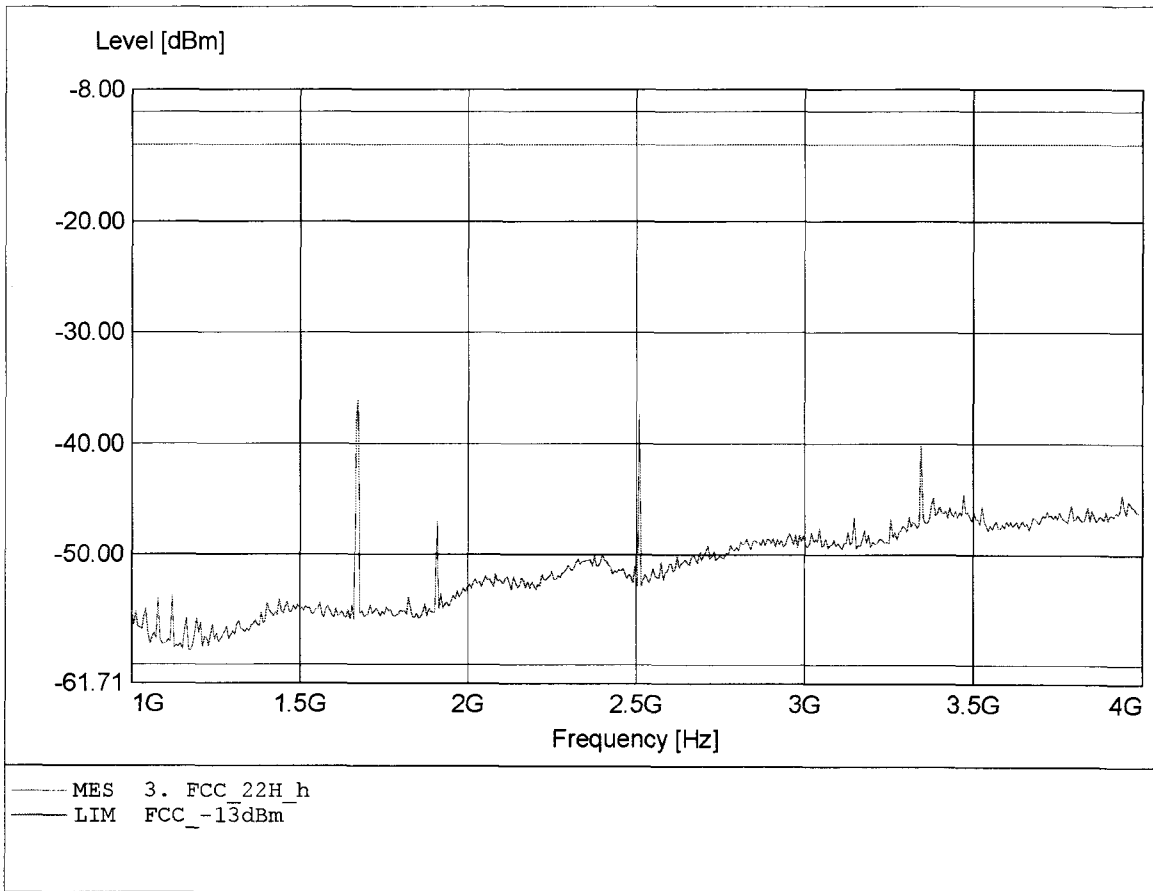


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -23.89dBm, RBW: 1MHz

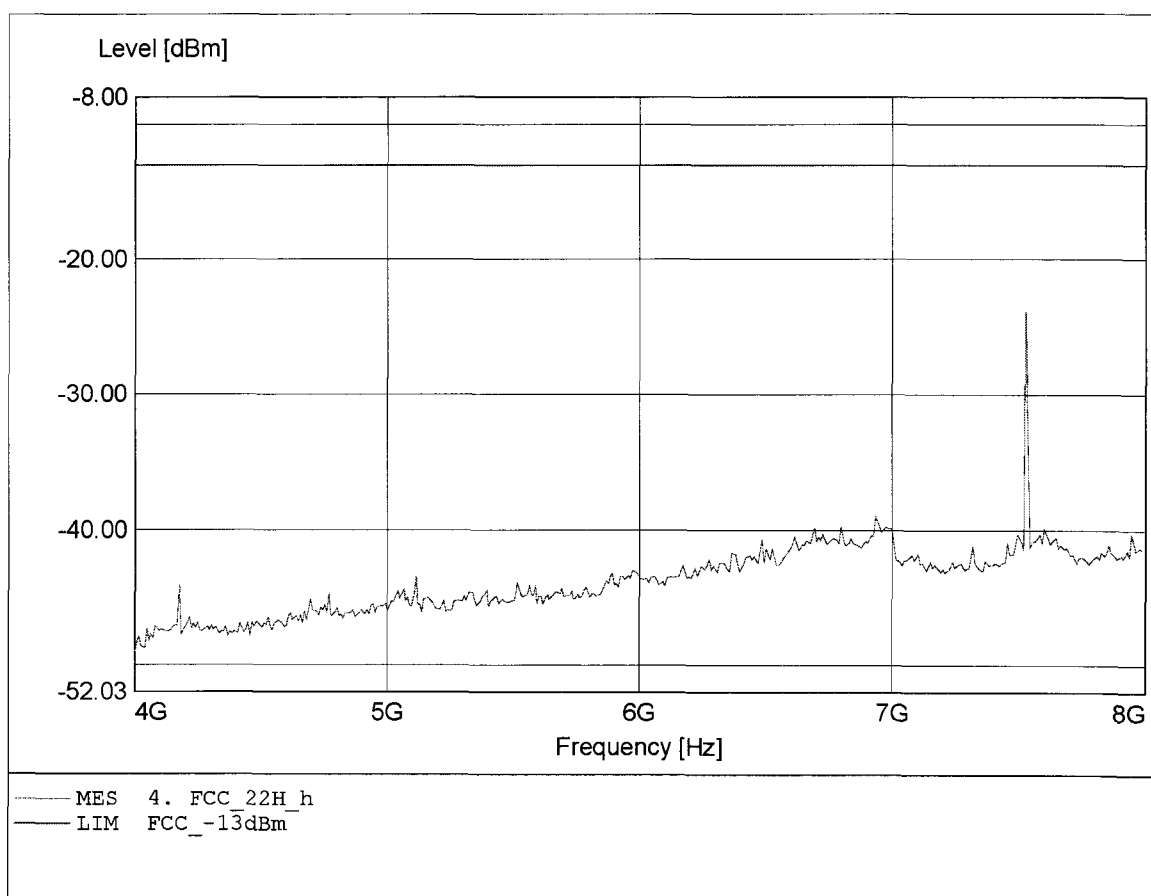


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.361GHz, Pmax: -21.84dBm, RBW: 1MHz

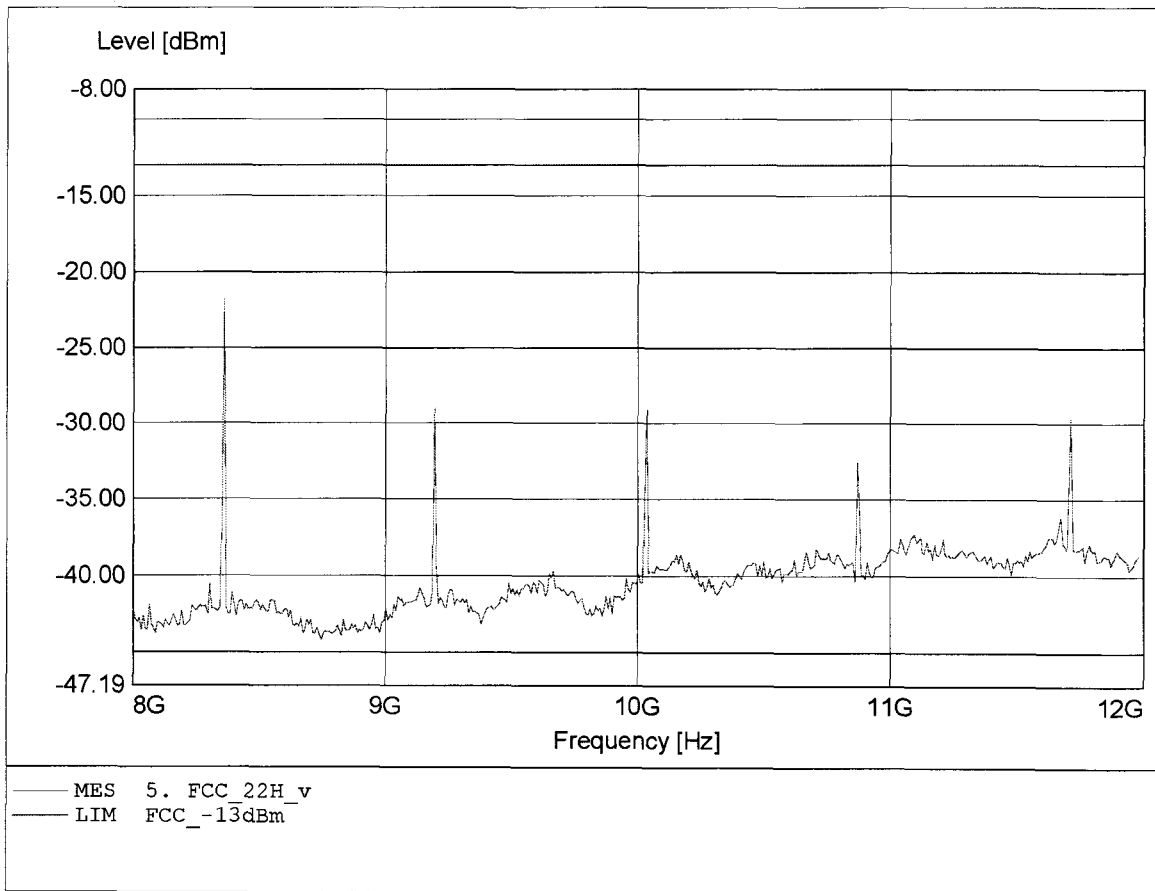


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 188
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.361GHz, Pmax: -23.81dBm, RBW: 1MHz

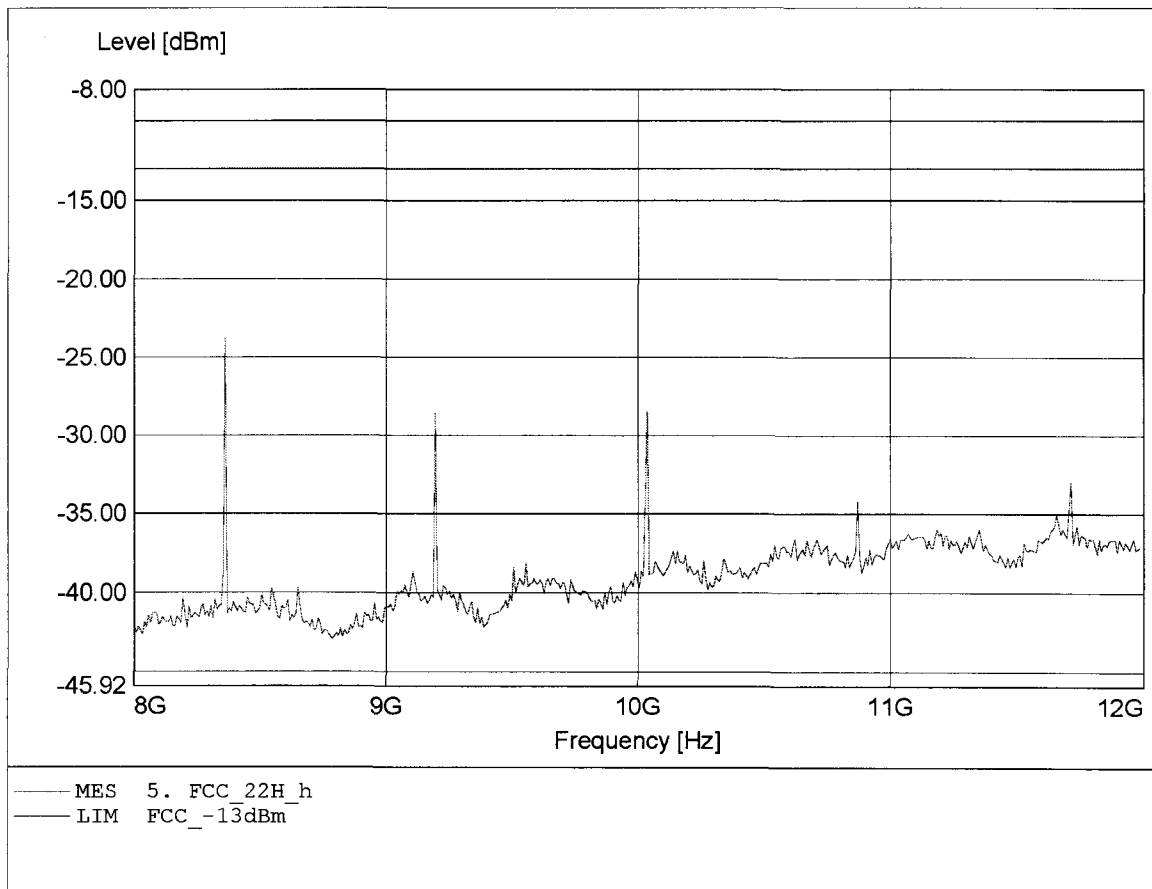


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.000MHz, Pmax: -38.94dBm, RBW: 100kHz

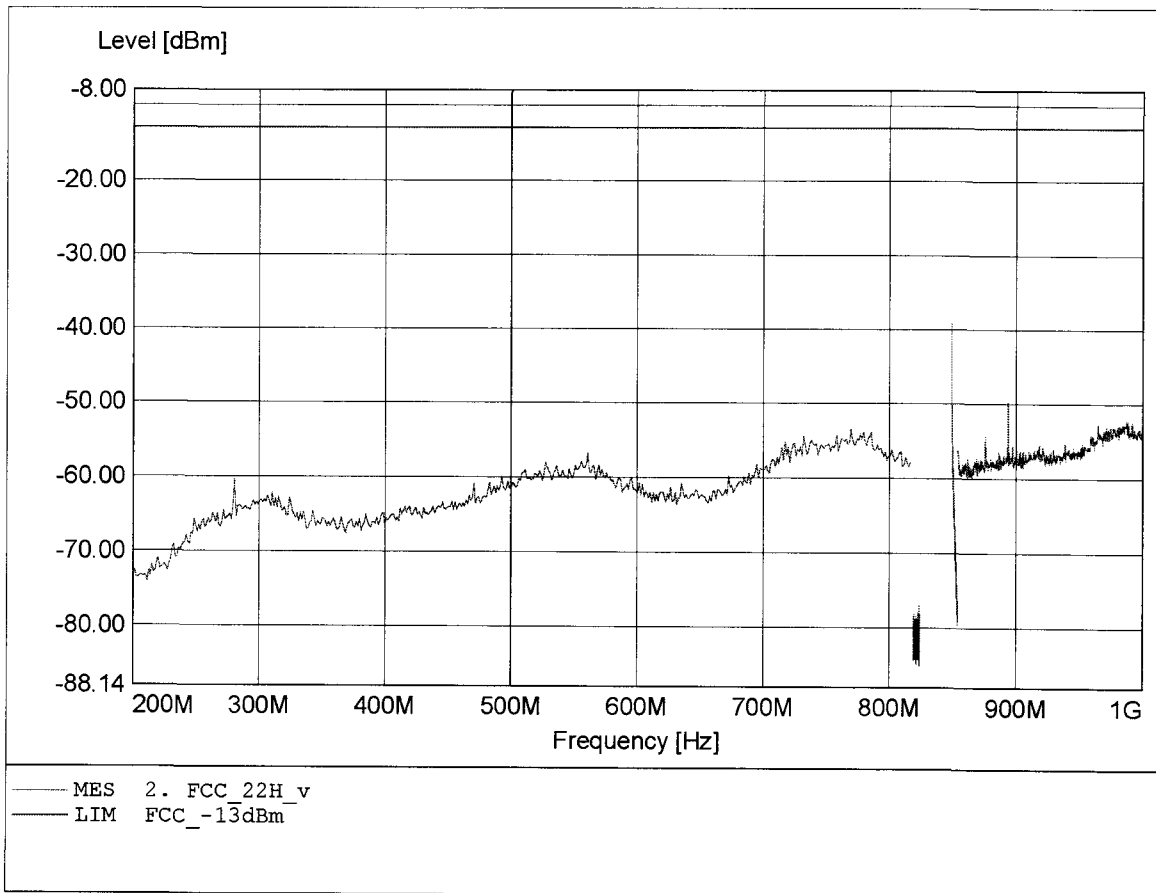


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.697GHz, Pmax: -34.18dBm, RBW: 1MHz

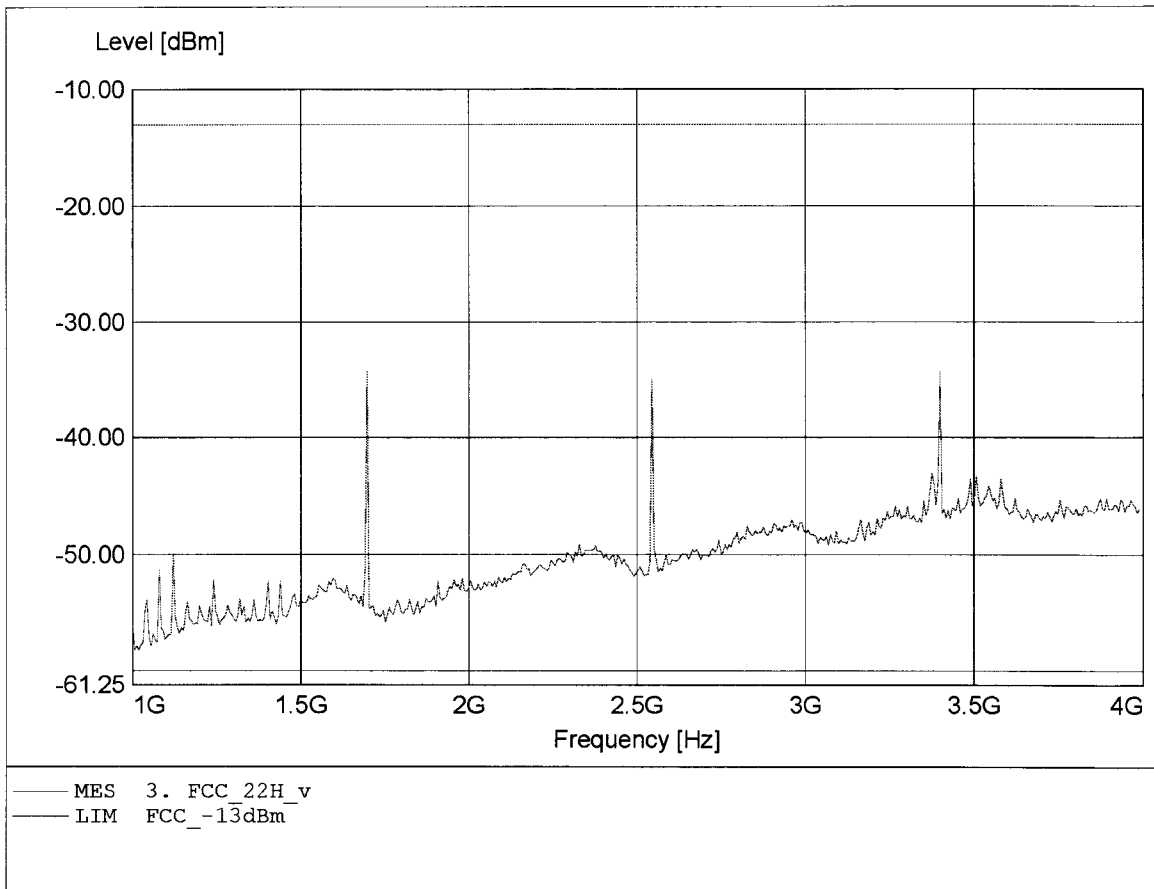


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 849.010MHz, Pmax: -21.50dBm, RBW: 100kHz

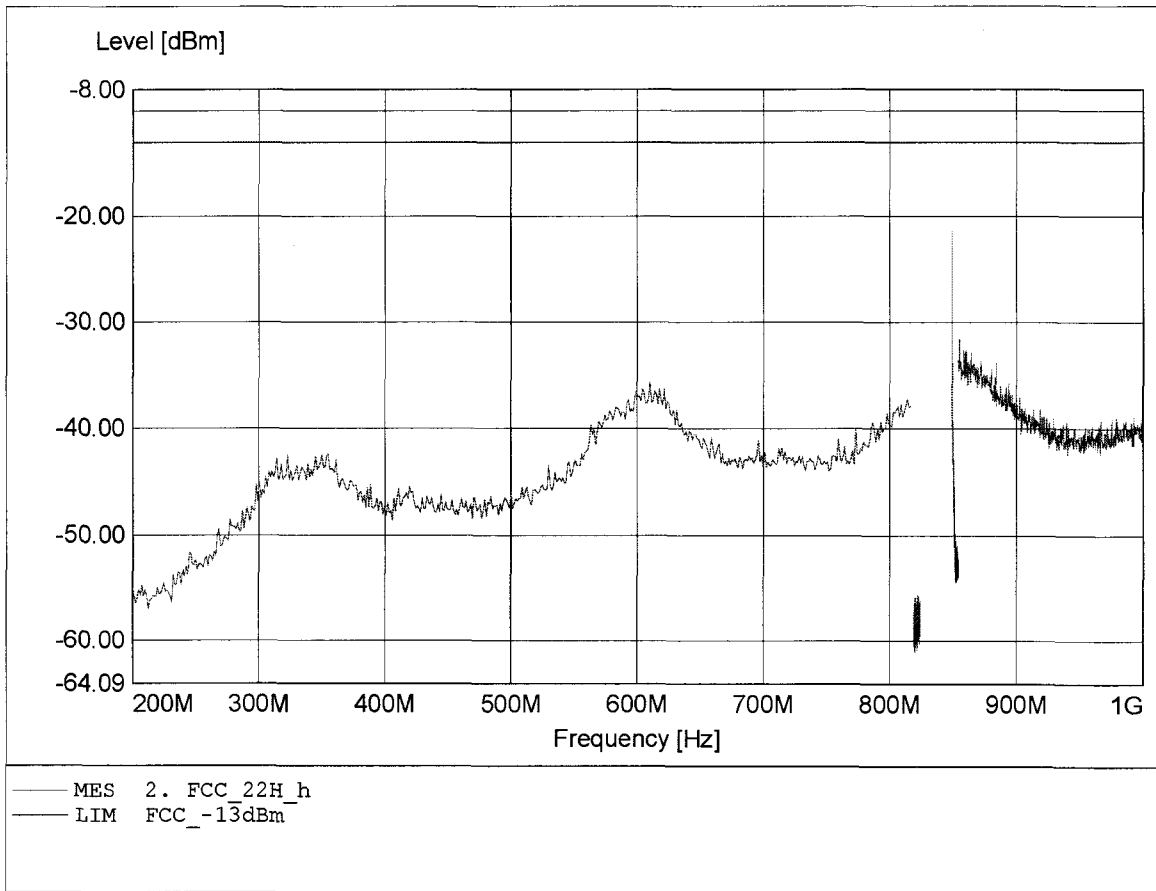


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.697GHz, Pmax: -37.92dBm, RBW: 1MHz

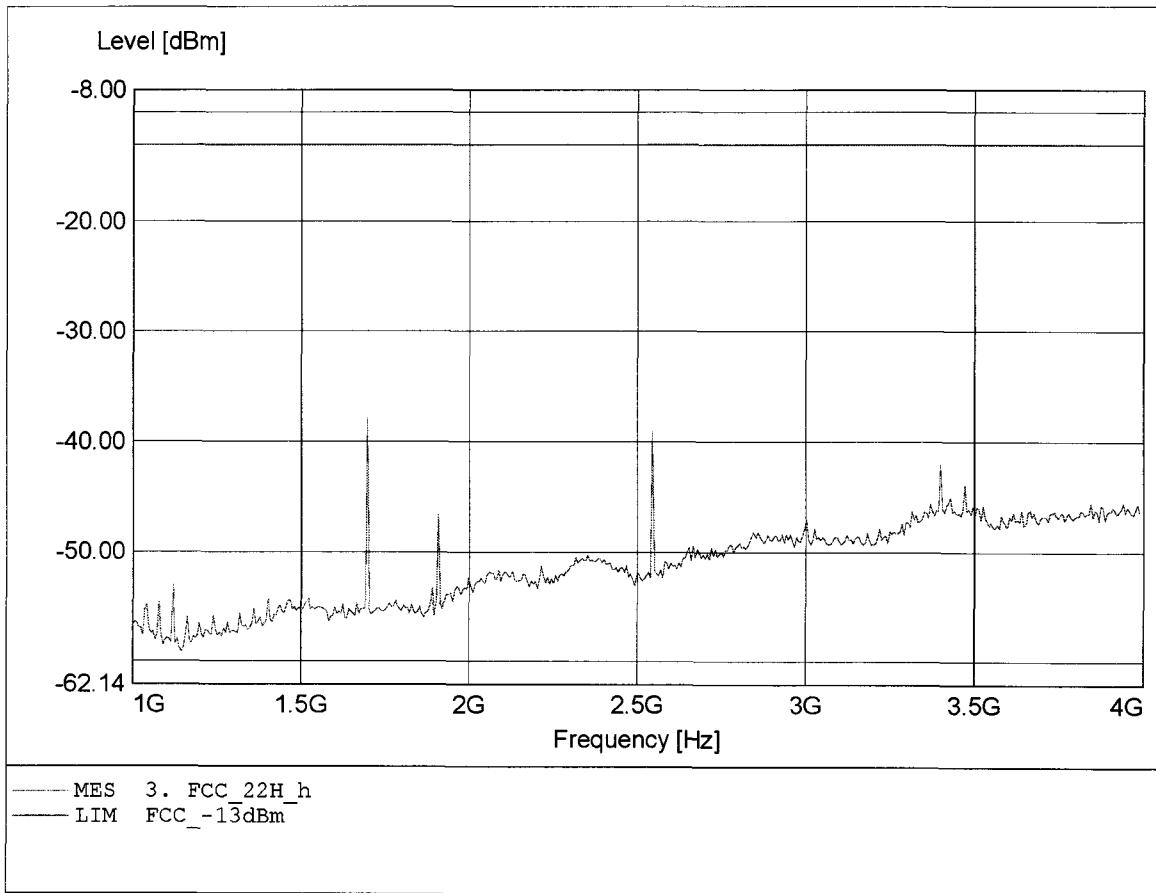


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -27.49dBm, RBW: 1MHz

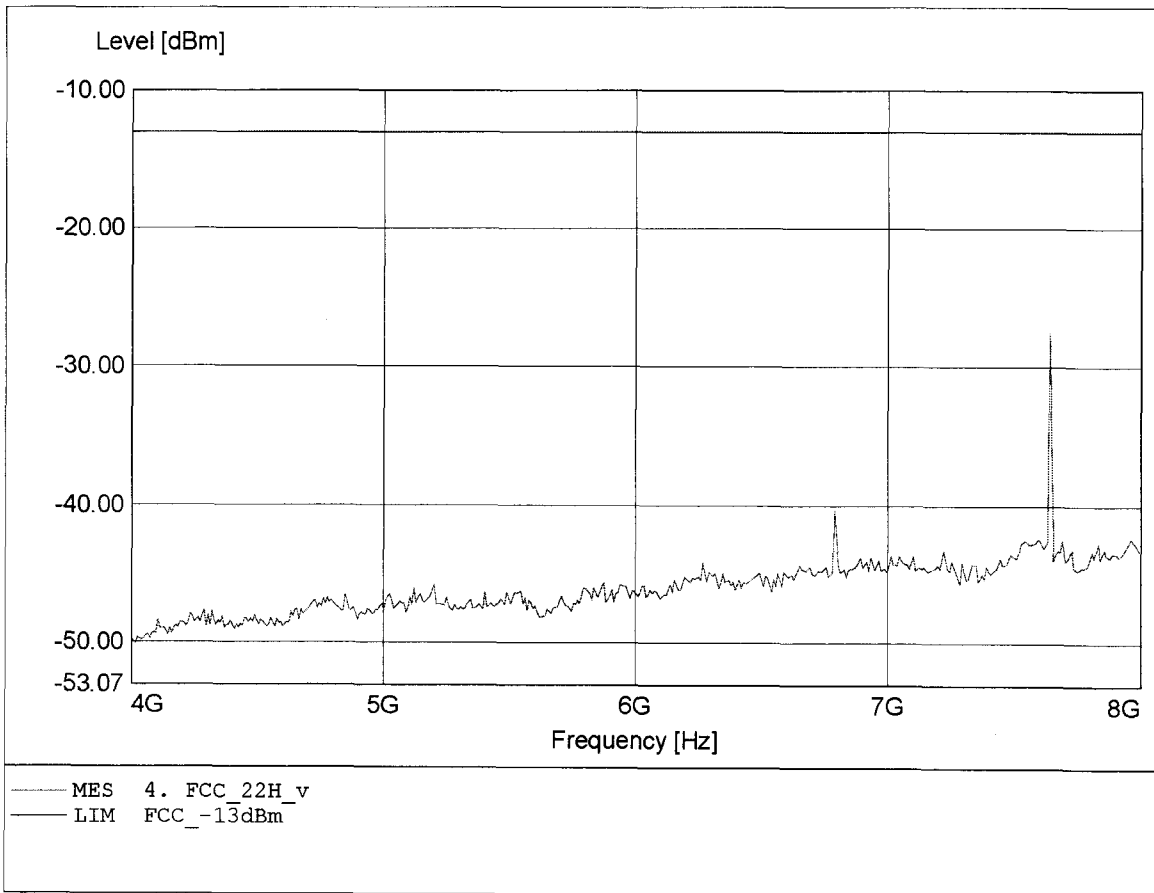


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -29.31dBm, RBW: 1MHz

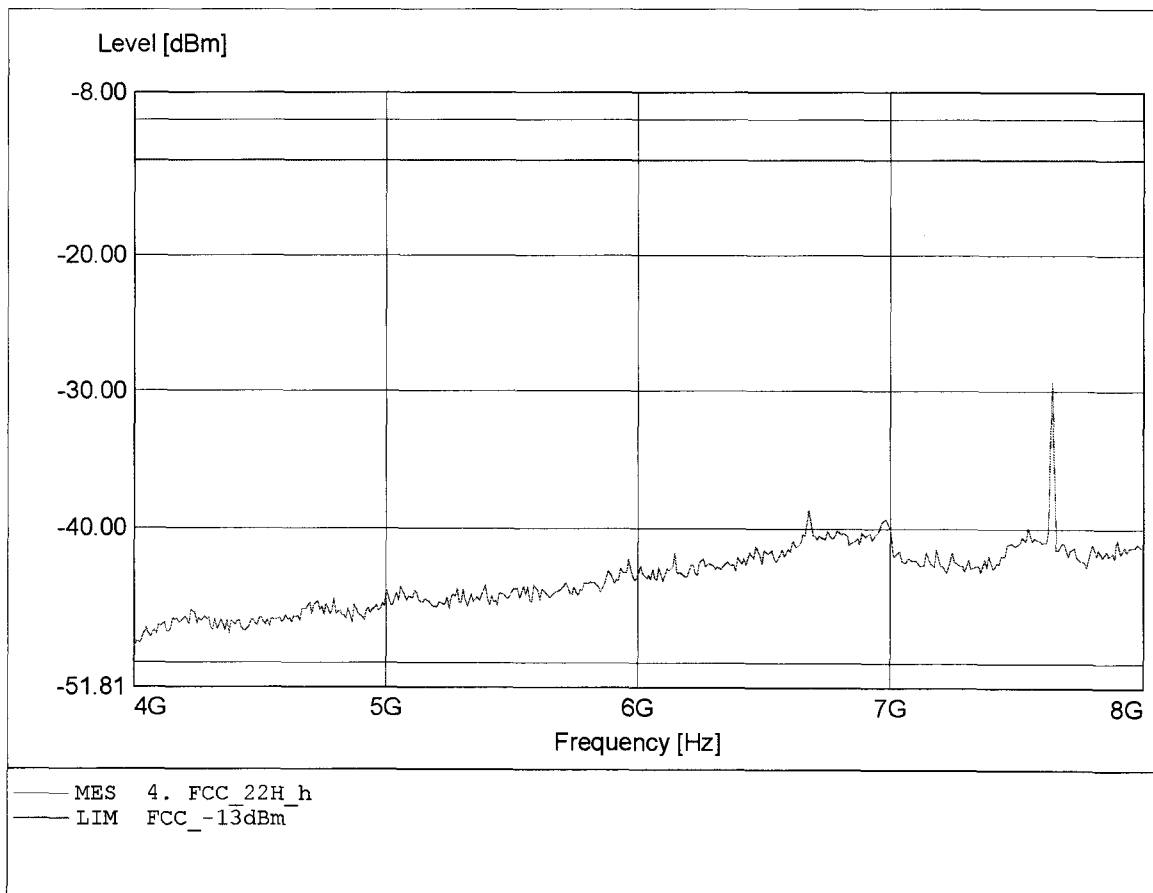


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.481GHz, Pmax: -25.42dBm, RBW: 1MHz

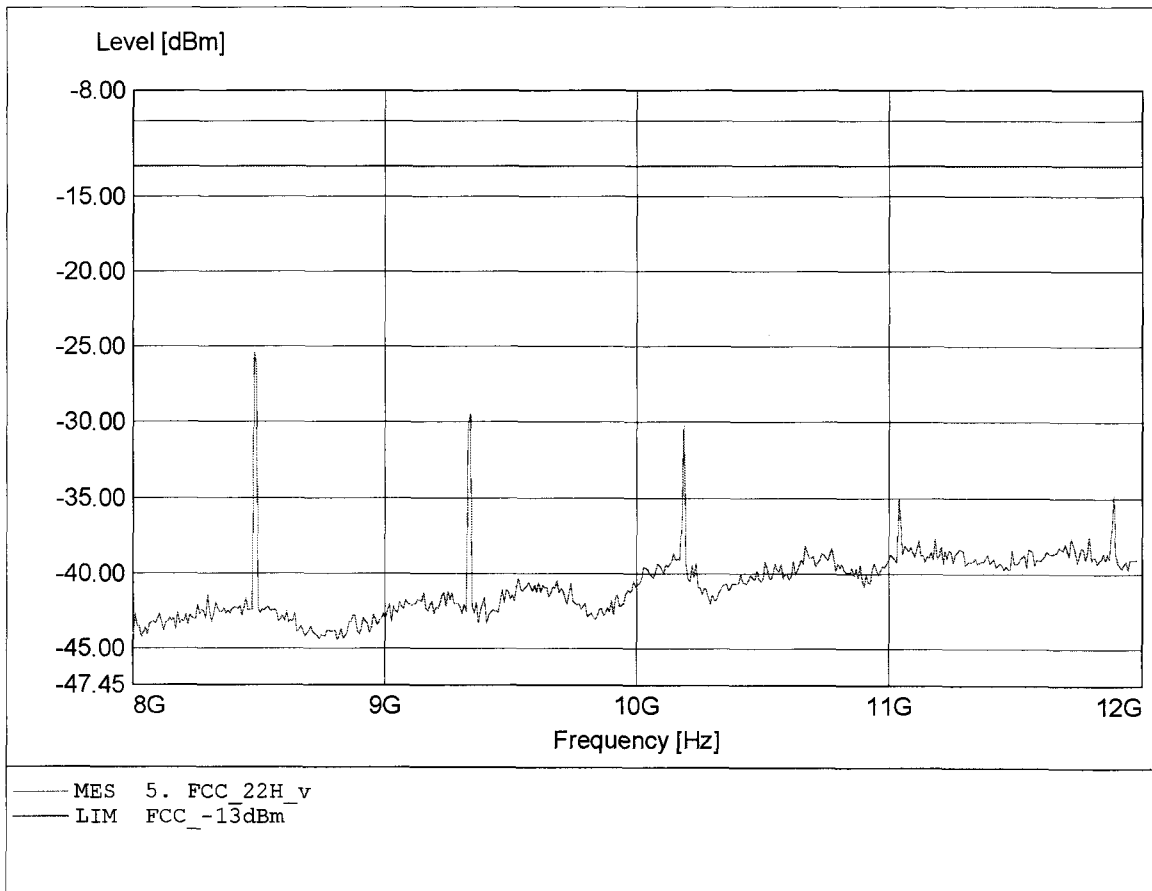


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 251
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.481GHz, Pmax: -25.58dBm, RBW: 1MHz

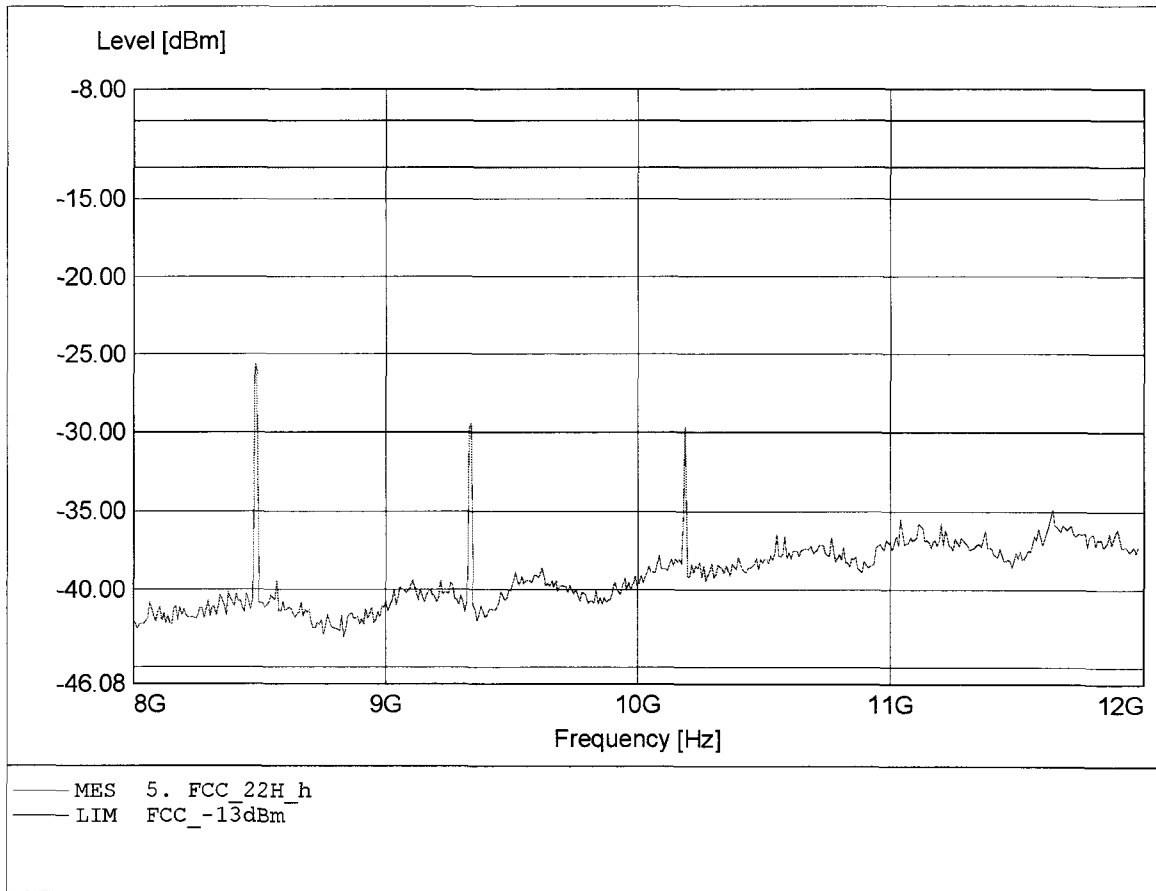


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -20.37dBm, RBW: 1MHz/3kHz

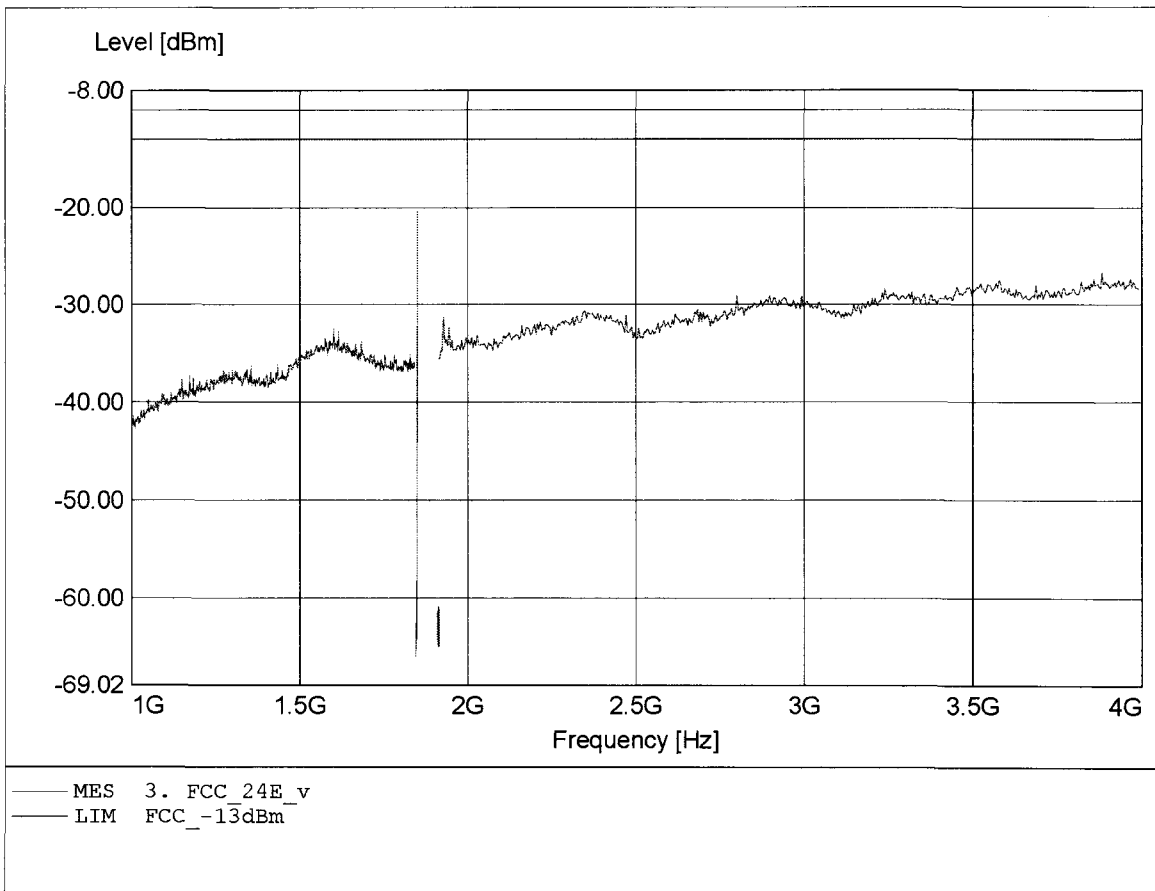


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -20.73dBm, RBW: 1MHz/3kHz

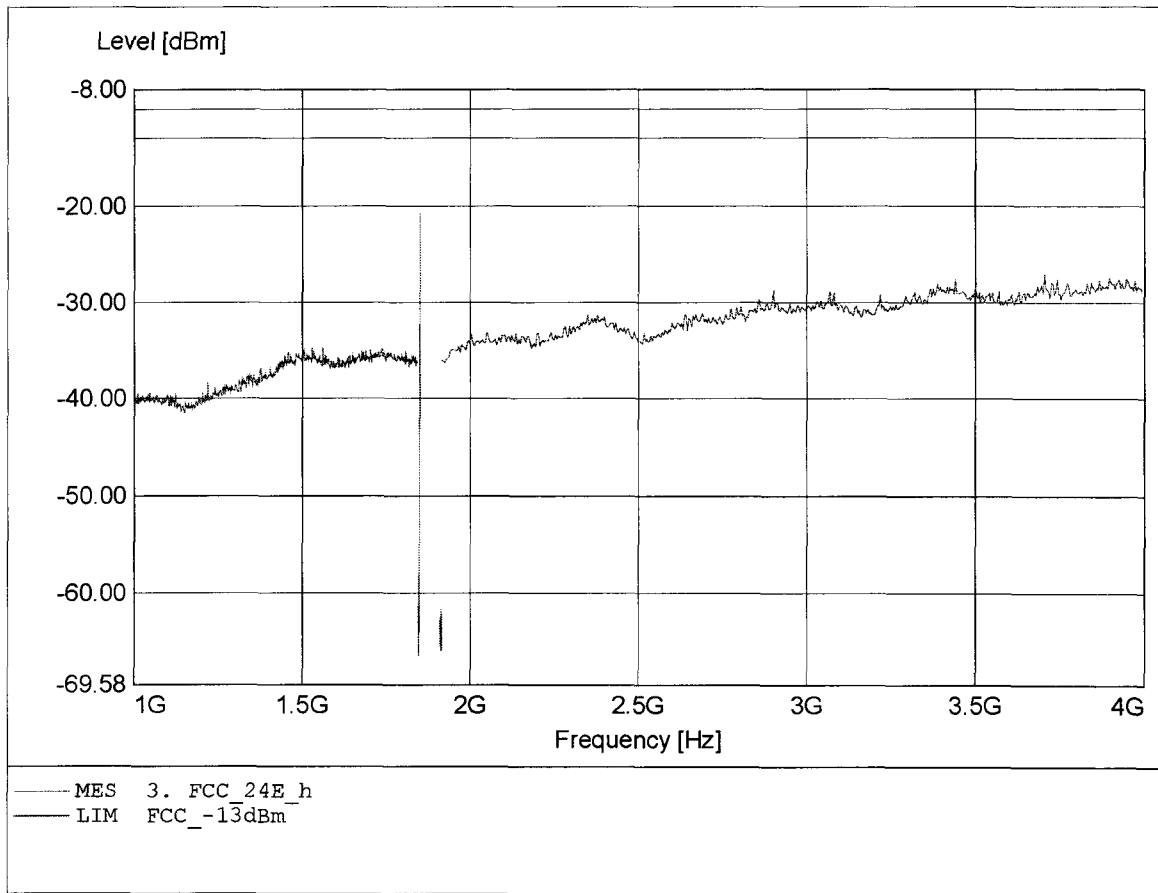


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.407GHz, Pmax: -18.55dBm, RBW: 1MHz

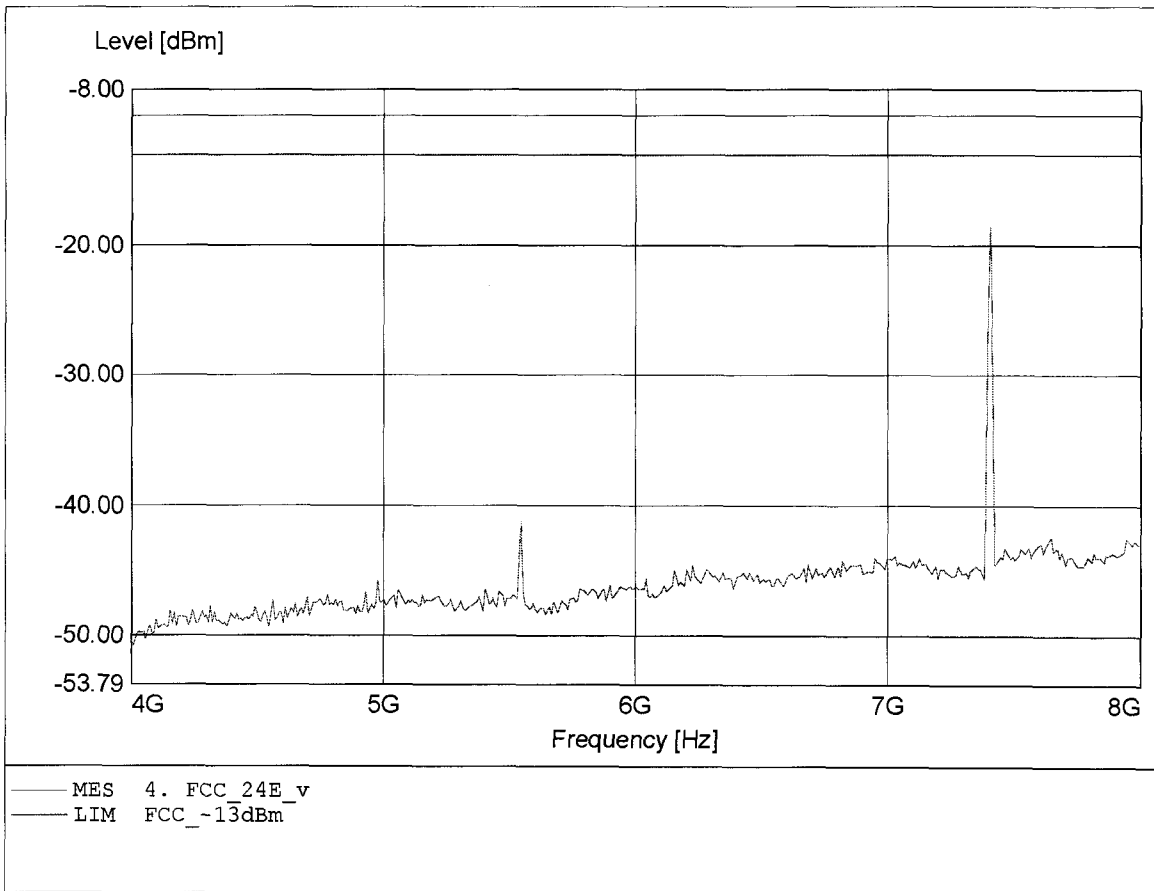


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.407GHz, Pmax: -19.92dBm, RBW: 1MHz

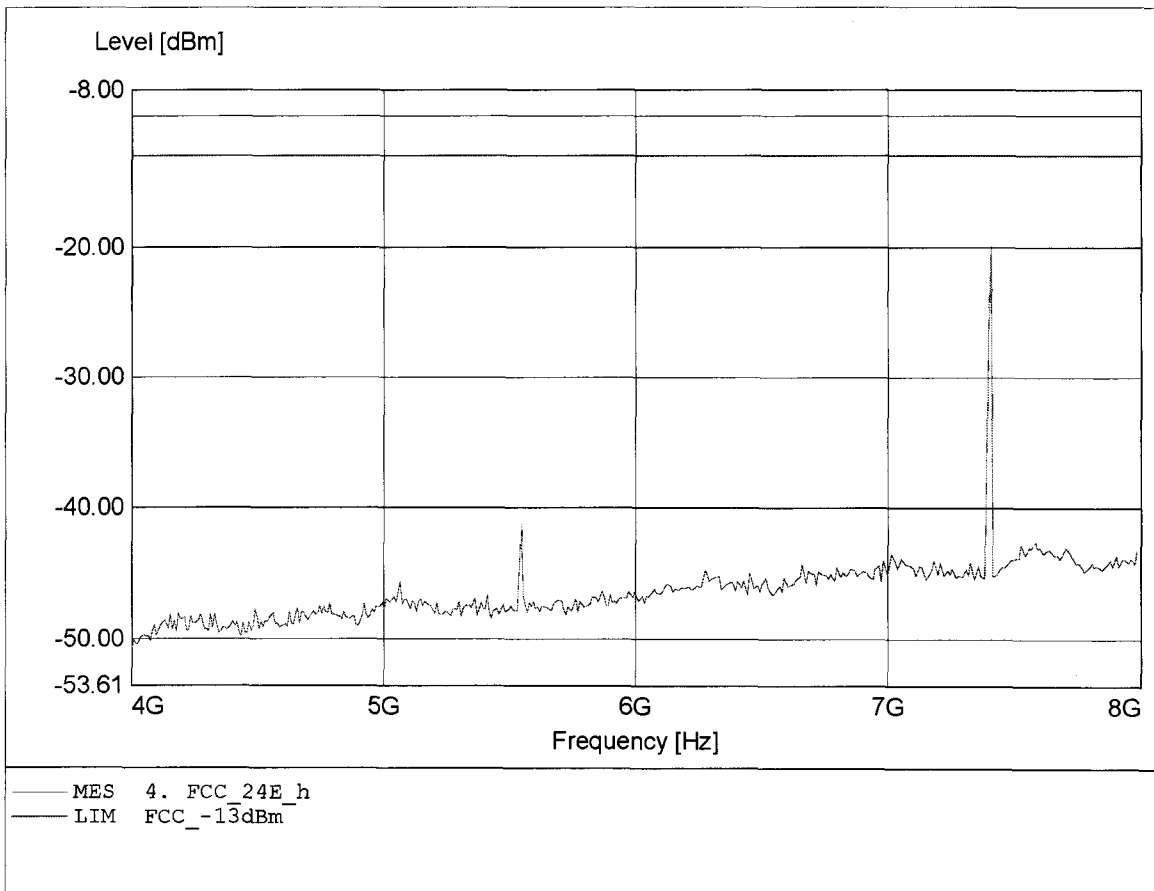


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.102GHz, Pmax: -26.94dBm, RBW: 1MHz

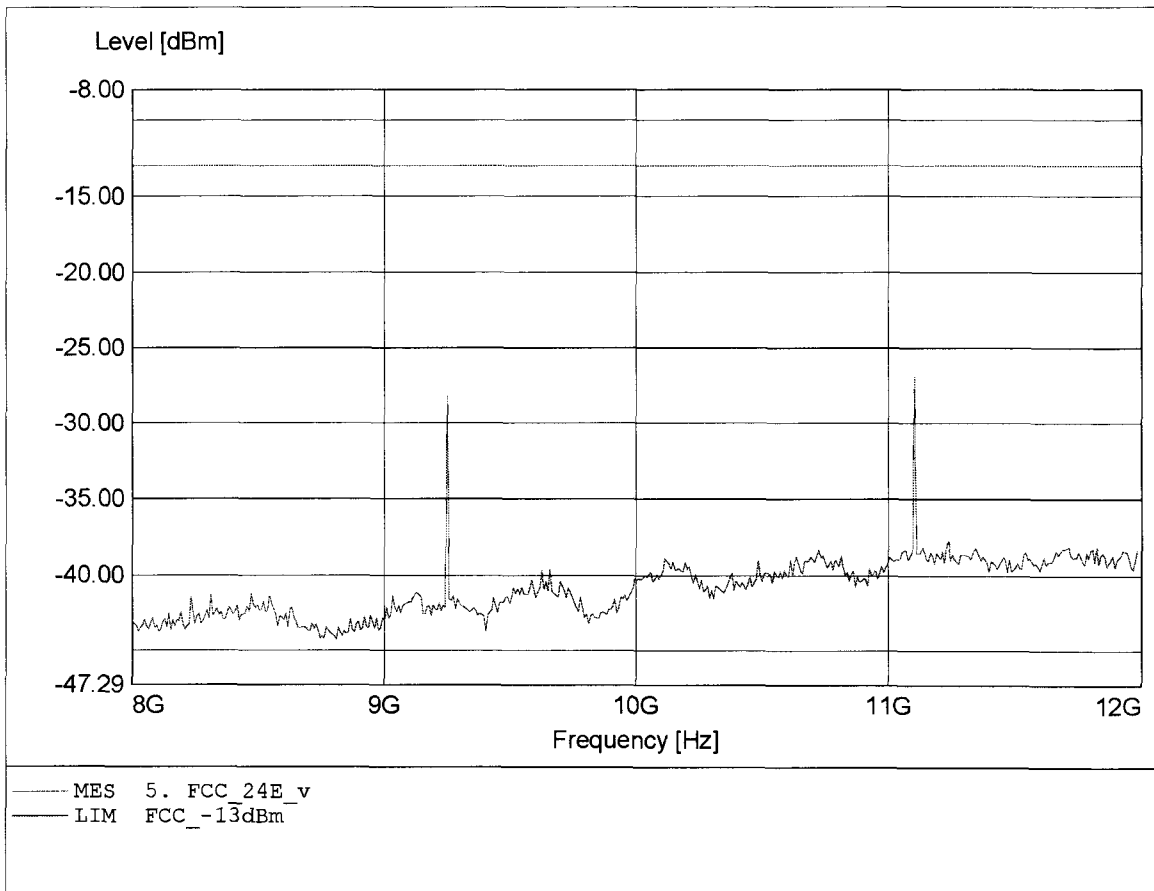


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.251GHz, Pmax: -27.08dBm, RBW: 1MHz

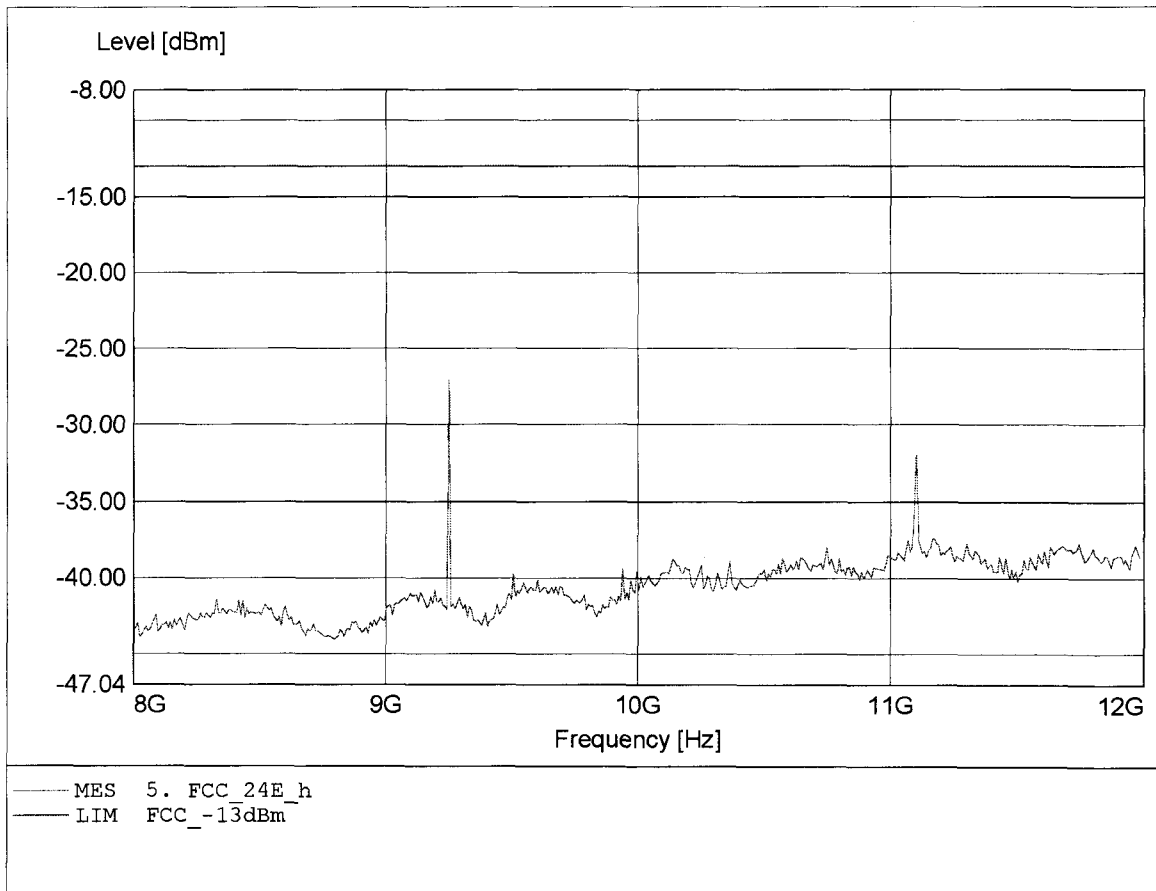


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 12.950GHz, Pmax: -30.83dBm, RBW: 1MHz

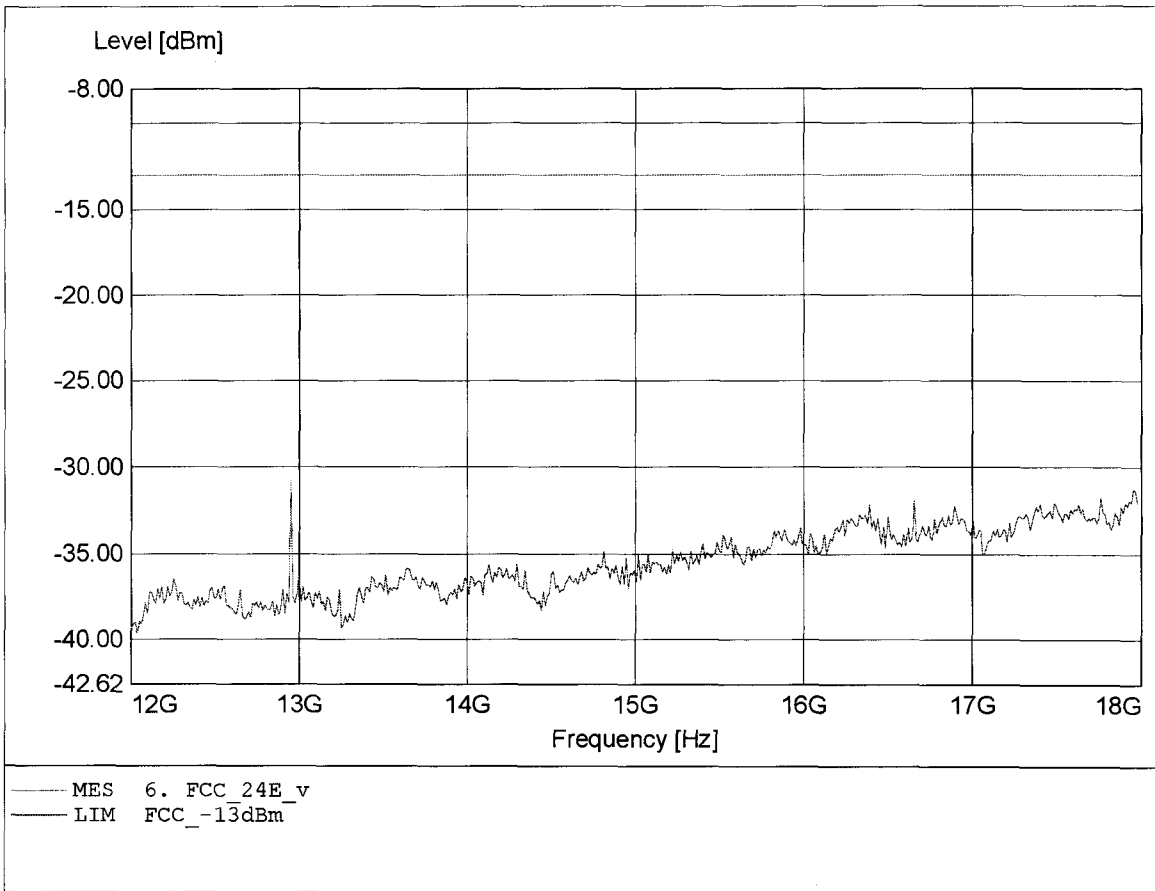


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.928GHz, Pmax: -30.96dBm, RBW: 1MHz

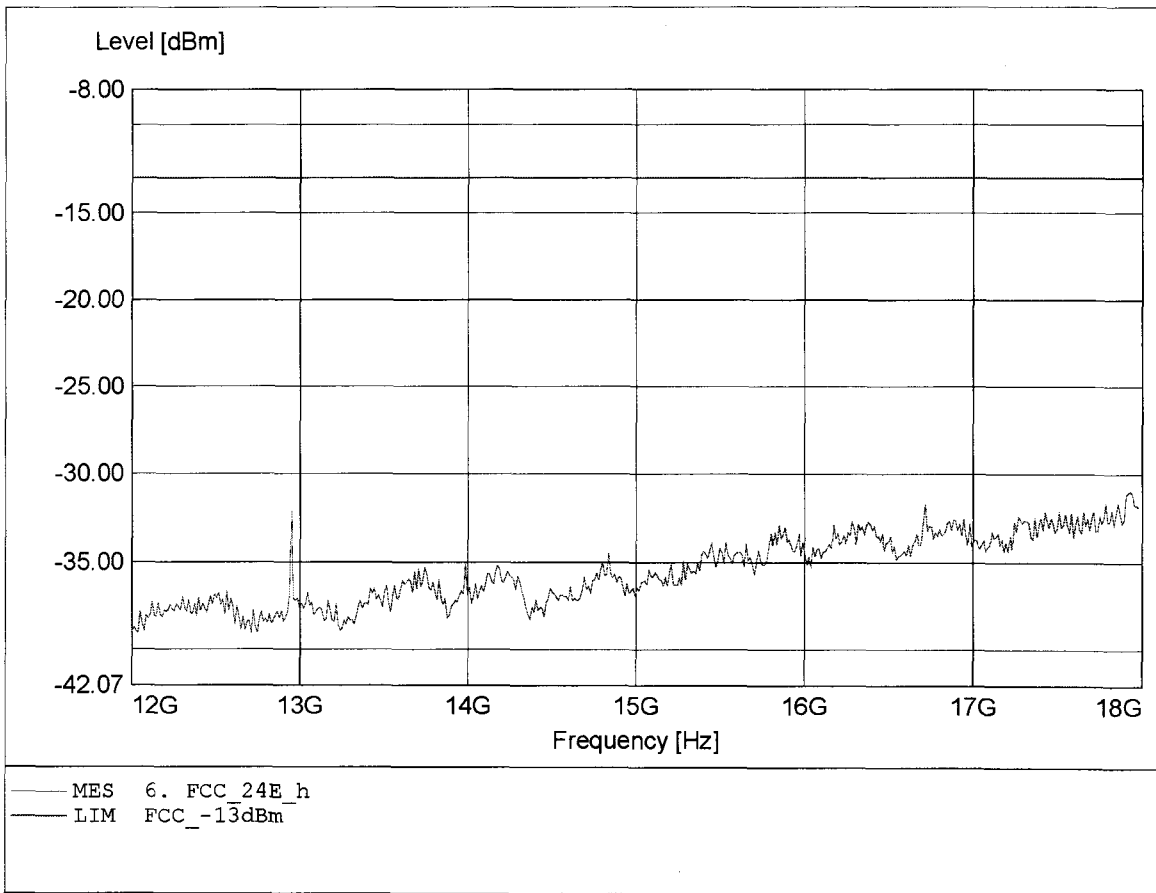


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.074GHz, Pmax: -31.53dBm, RBW: 1MHz

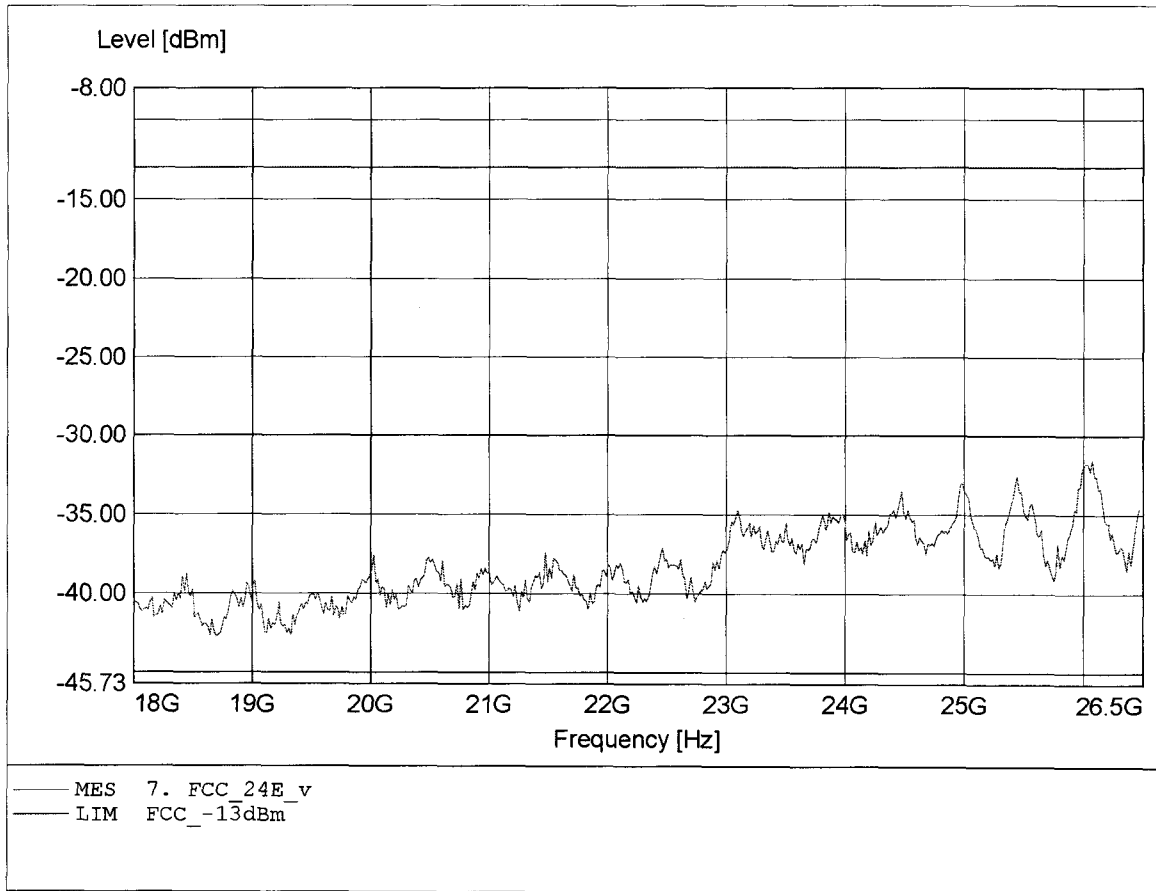


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 512
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.040GHz, Pmax: -31.77dBm, RBW: 1MHz

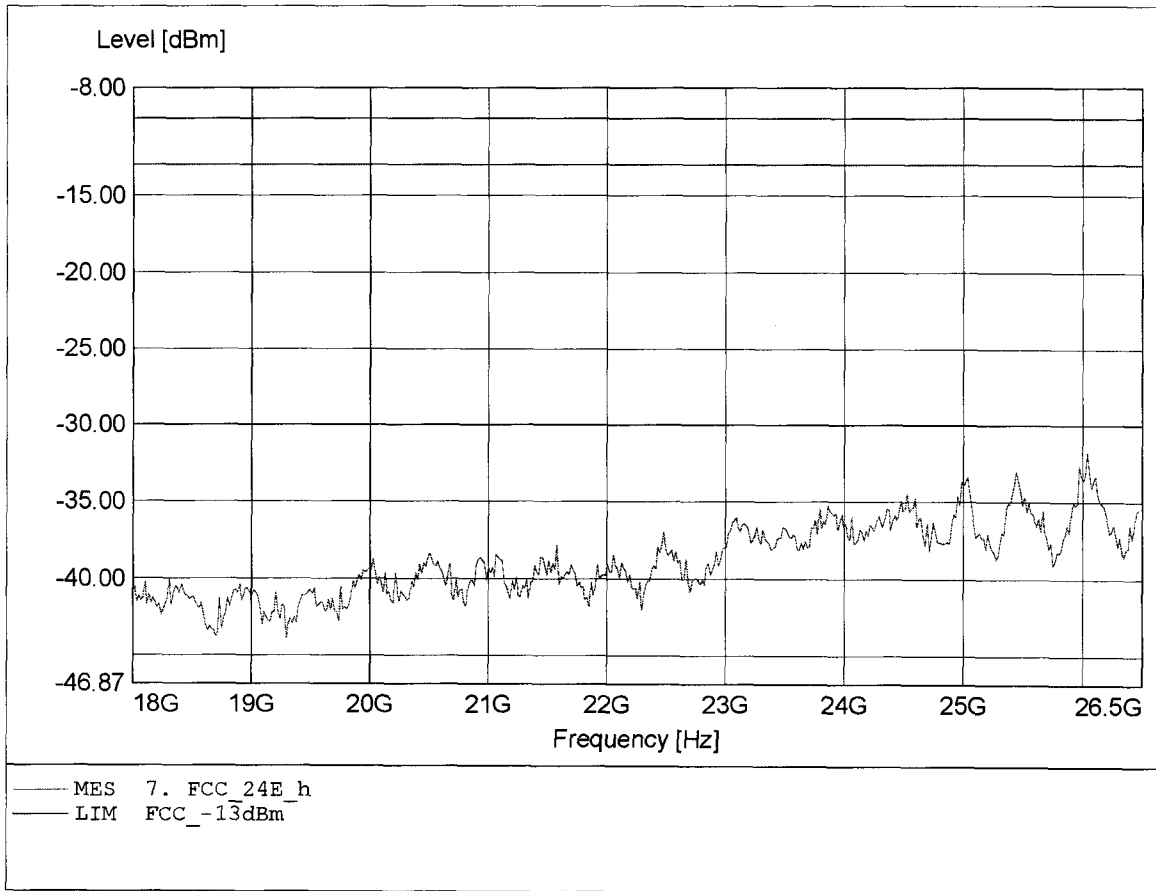


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.866GHz, Pmax: -26.92dBm, RBW: 1MHz/3kHz

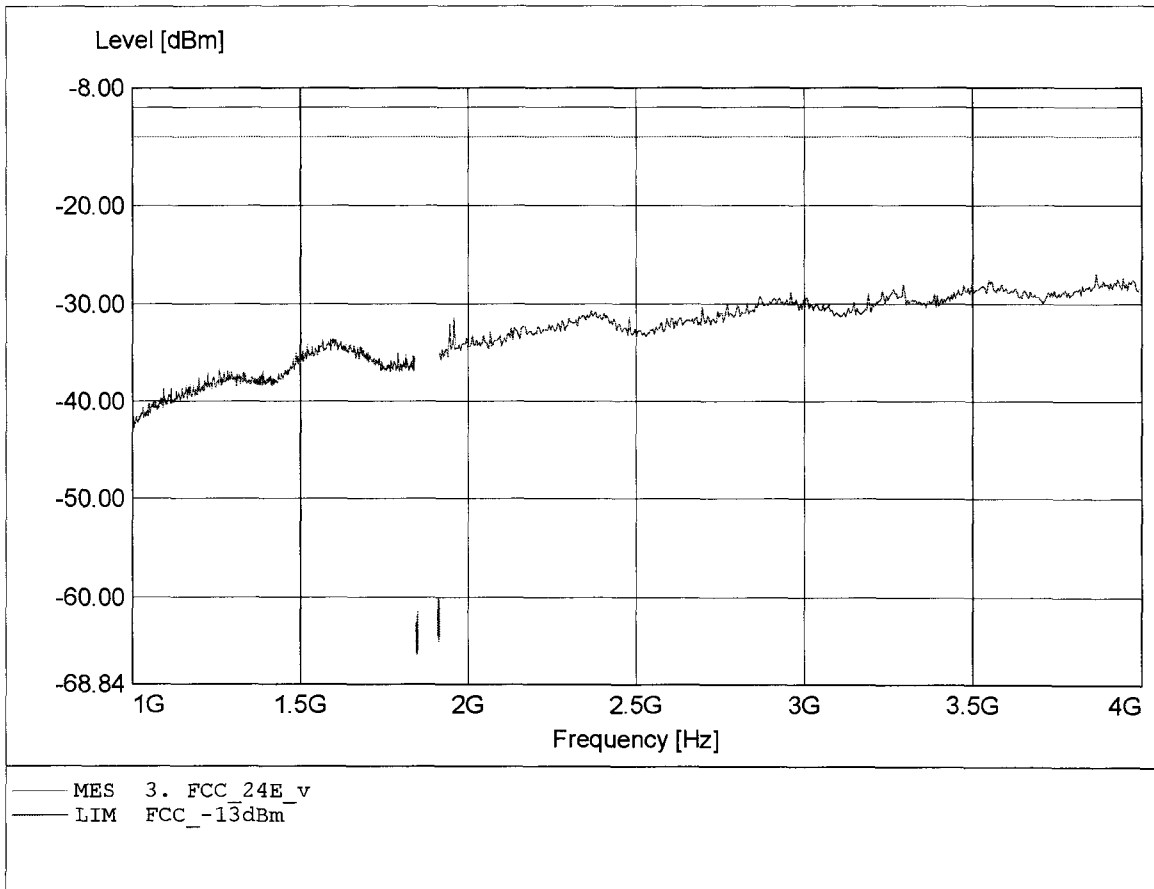


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.983GHz, Pmax: -26.63dBm, RBW: 1MHz/3kHz

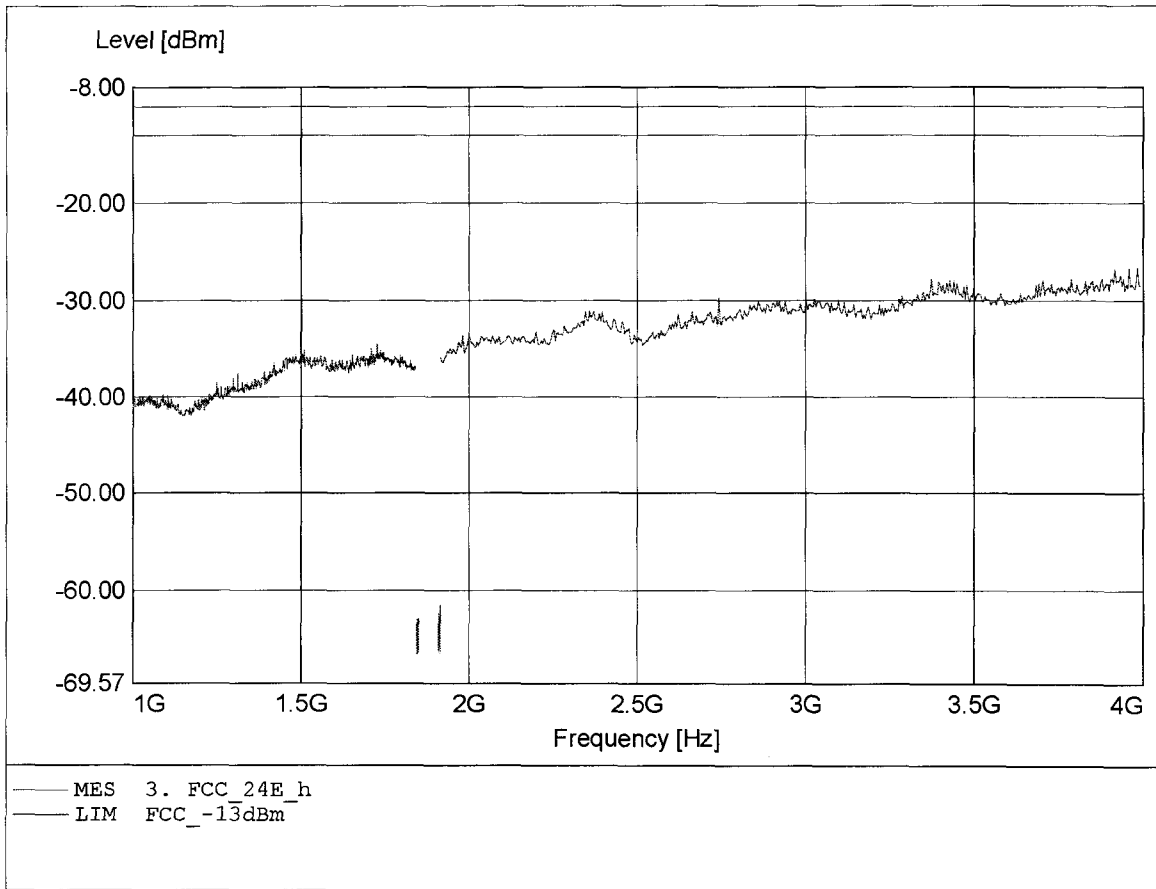


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -19.56dBm, RBW: 1MHz

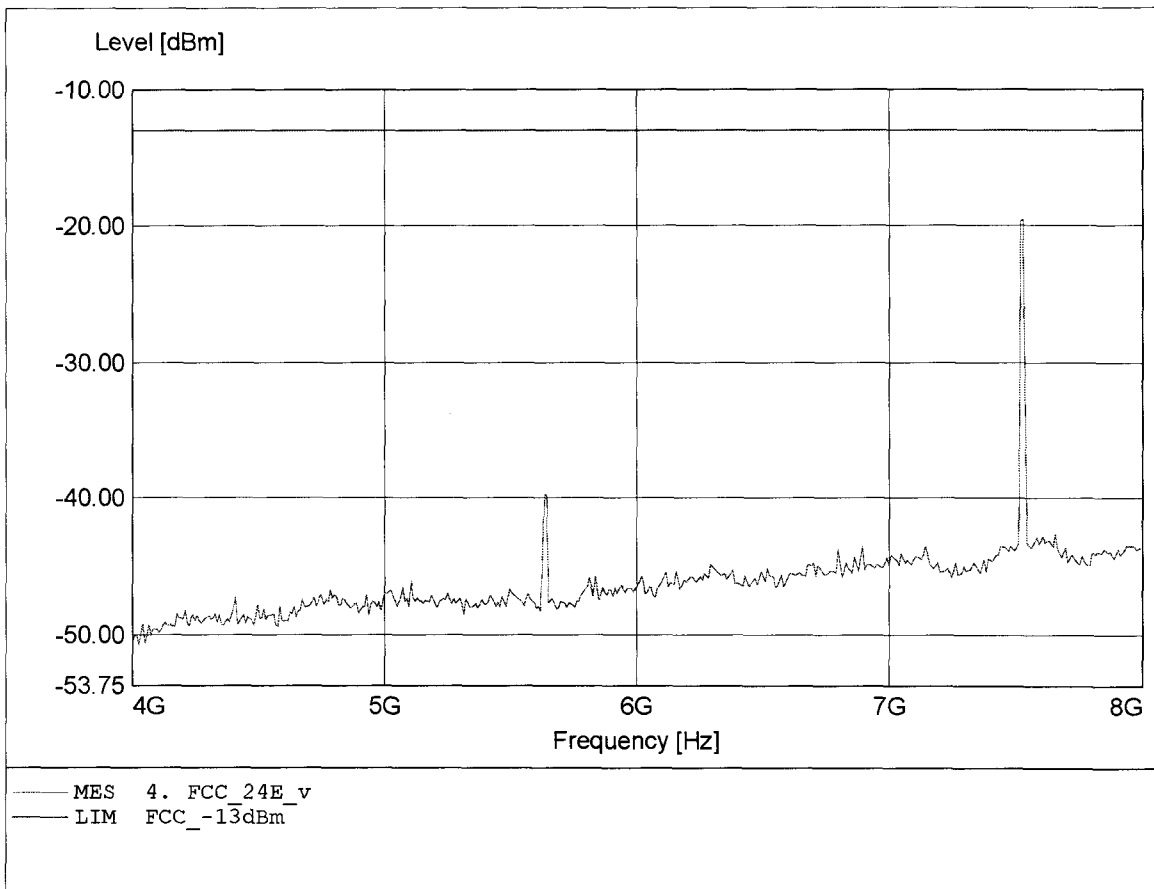


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.287GHz, Pmax: -30.89dBm, RBW: 1MHz

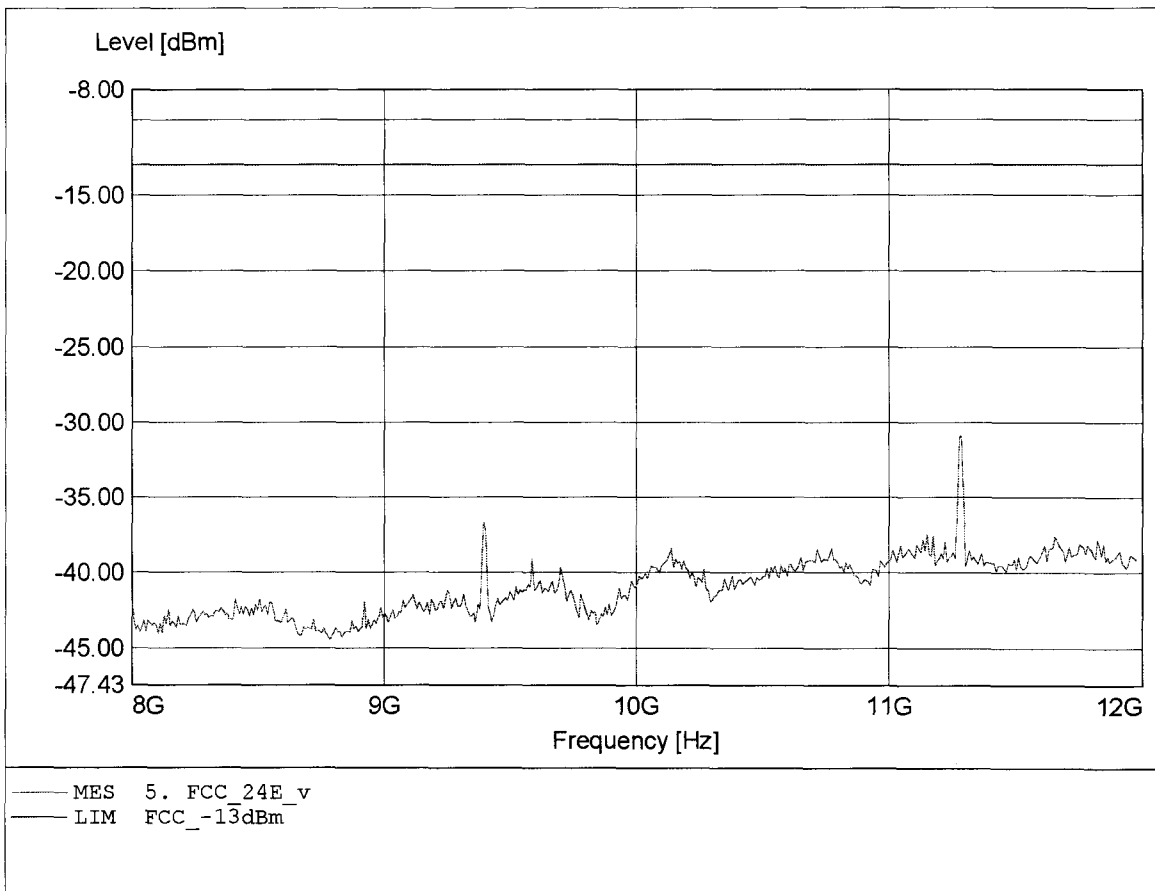


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.519GHz, Pmax: -21.64dBm, RBW: 1MHz

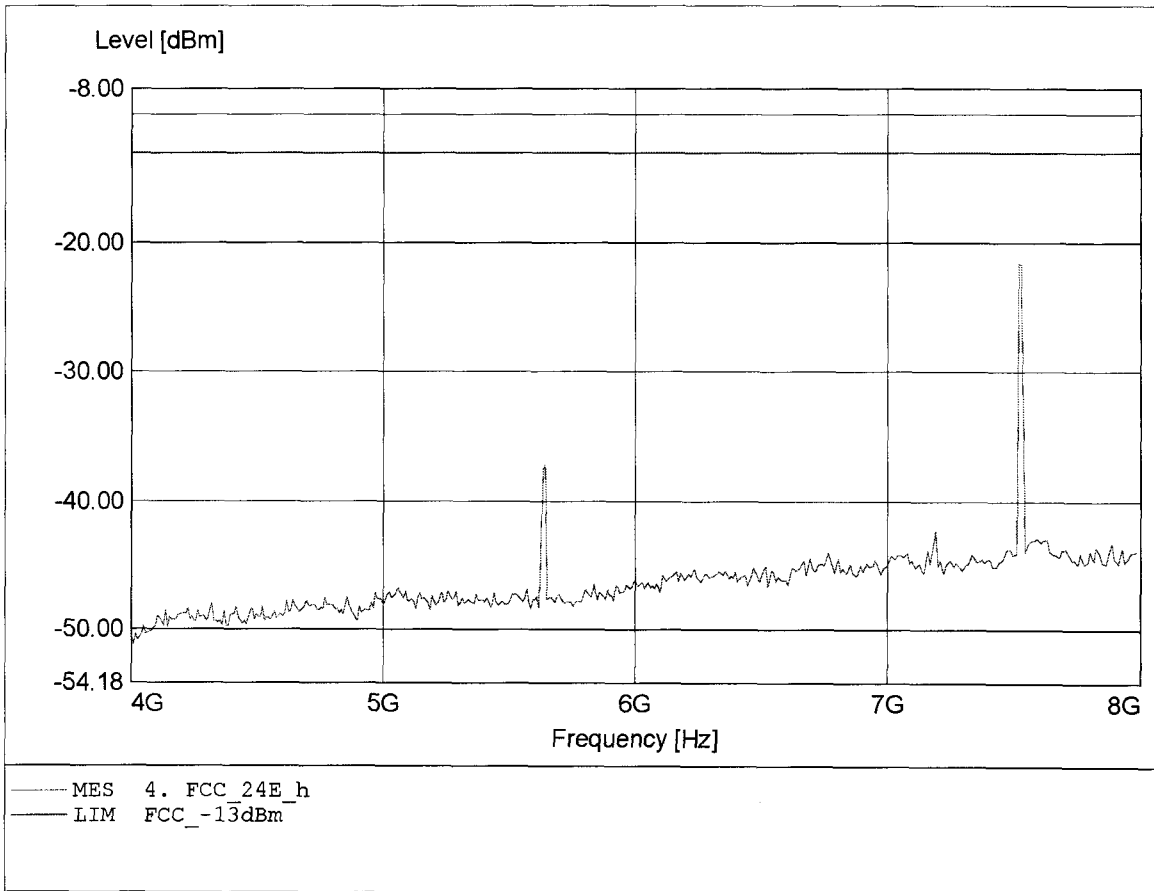


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.287GHz, Pmax: -34.66dBm, RBW: 1MHz

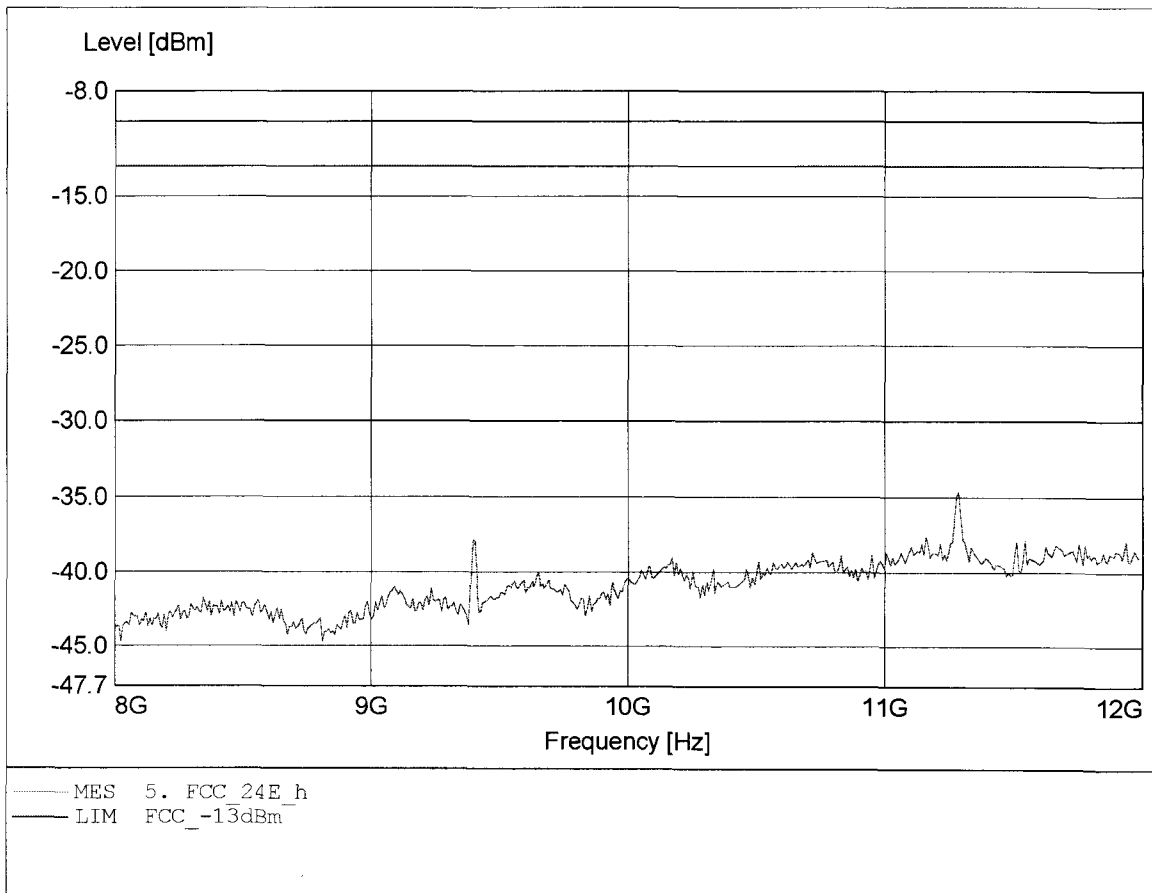


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.918GHz, Pmax: -30.96dBm, RBW: 1MHz

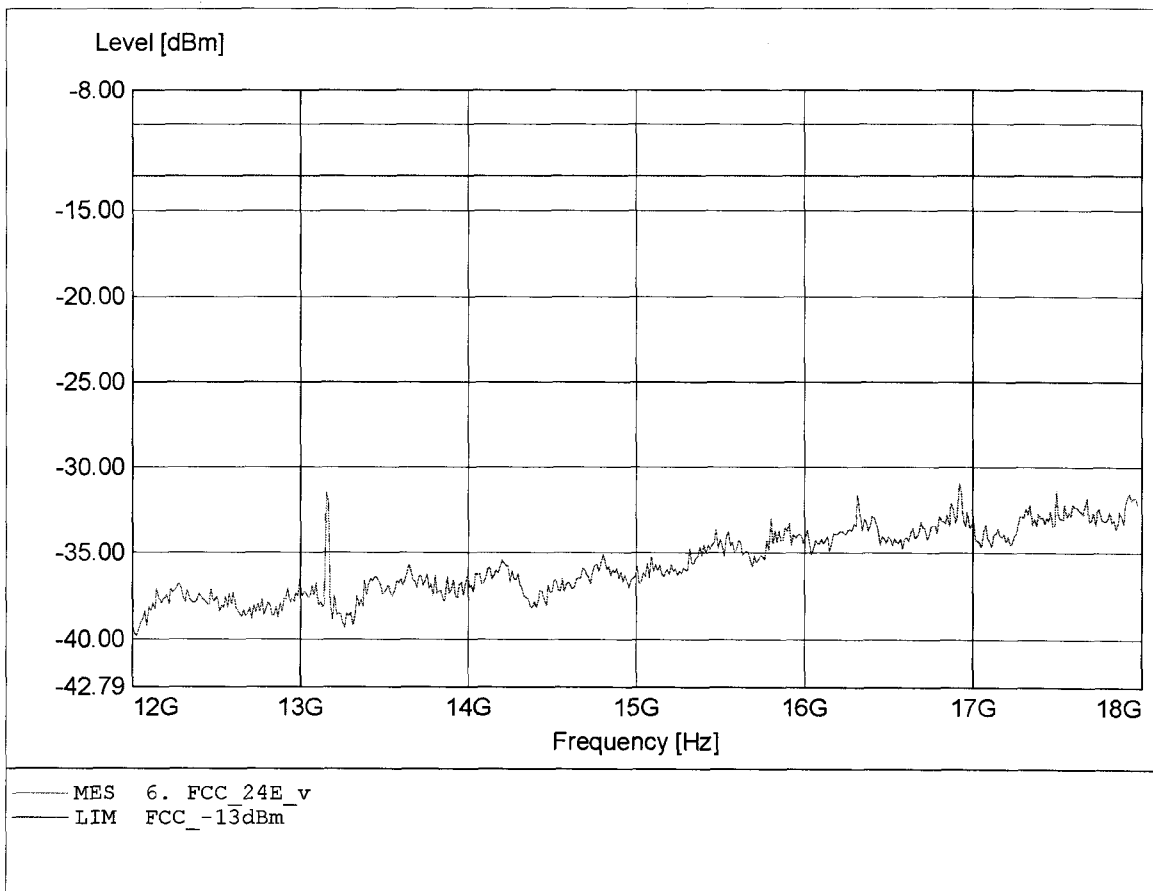


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.916GHz, Pmax: -31.38dBm, RBW: 1MHz

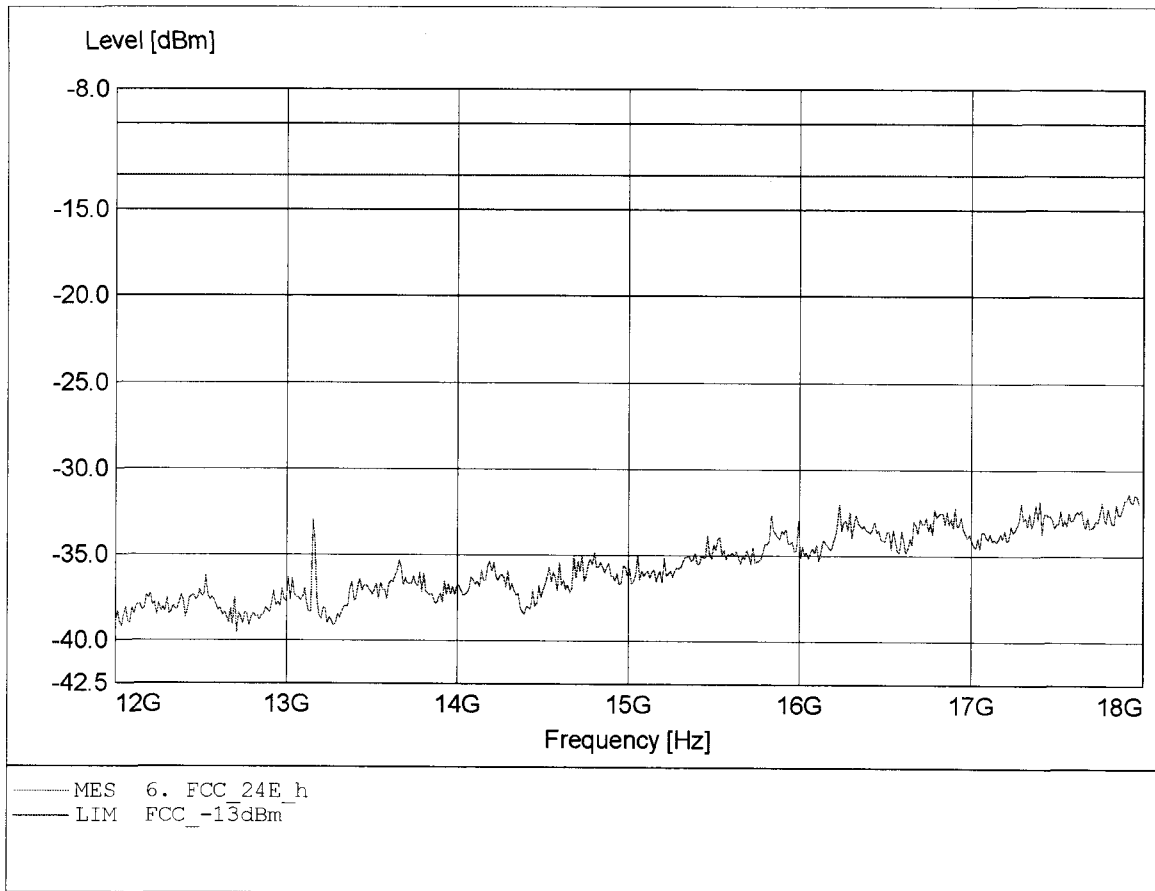


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.040GHz, Pmax: -31.78dBm, RBW: 1MHz

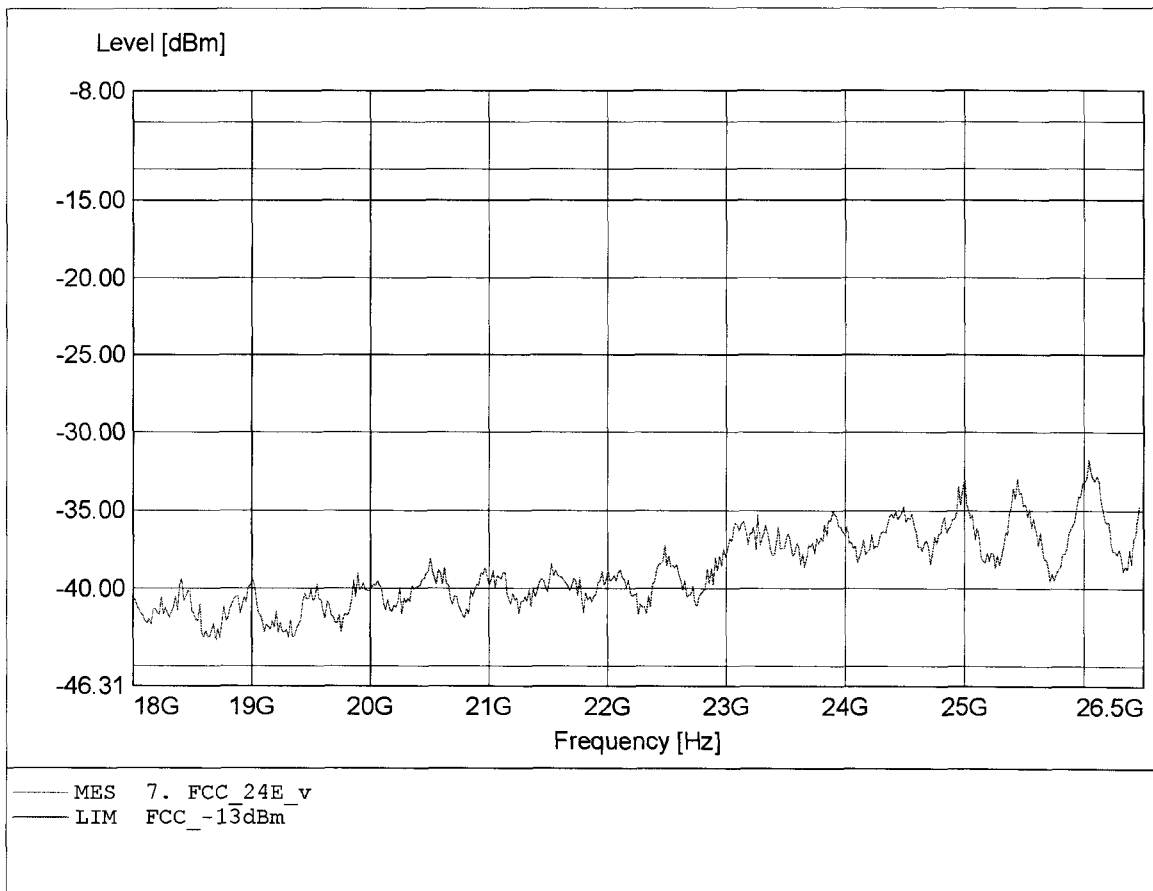


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 661
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.444GHz, Pmax: -32.34dBm, RBW: 1MHz

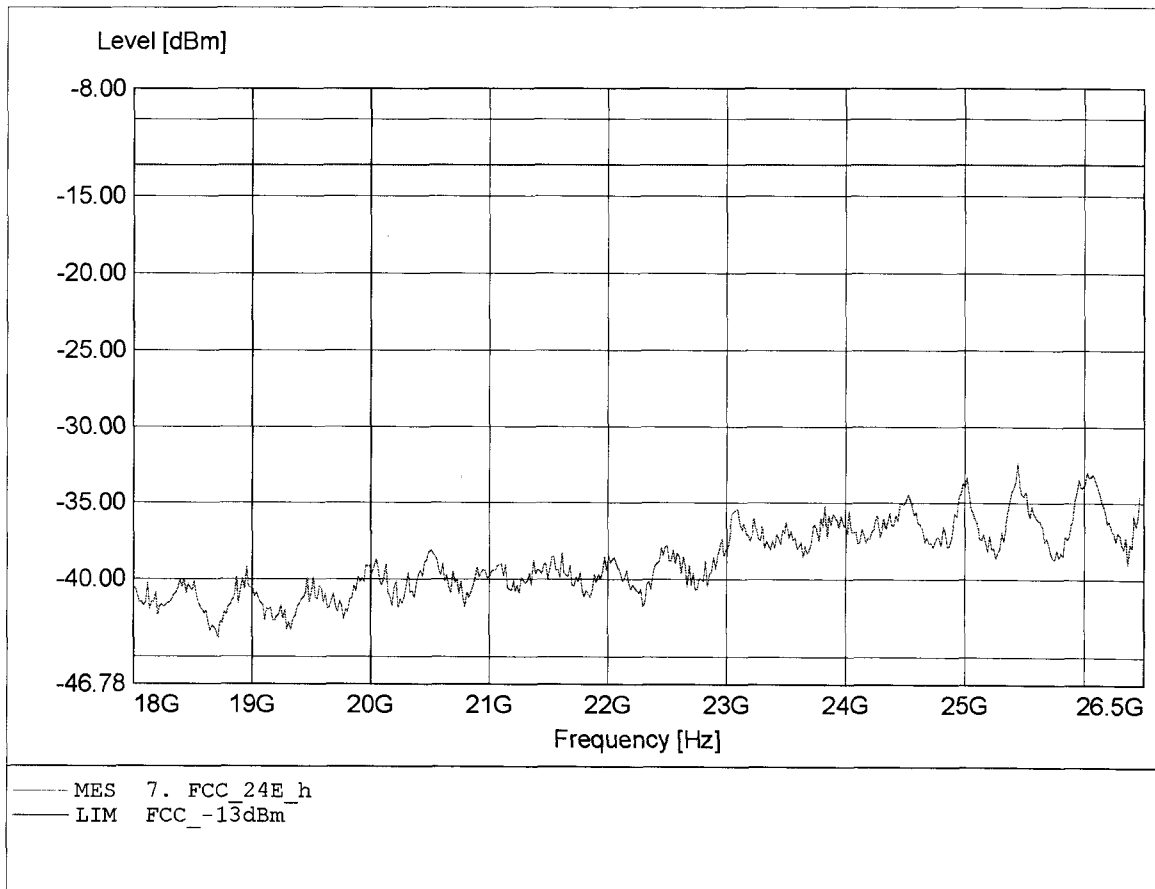


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -18.98dBm, RBW: 1MHz/3kHz

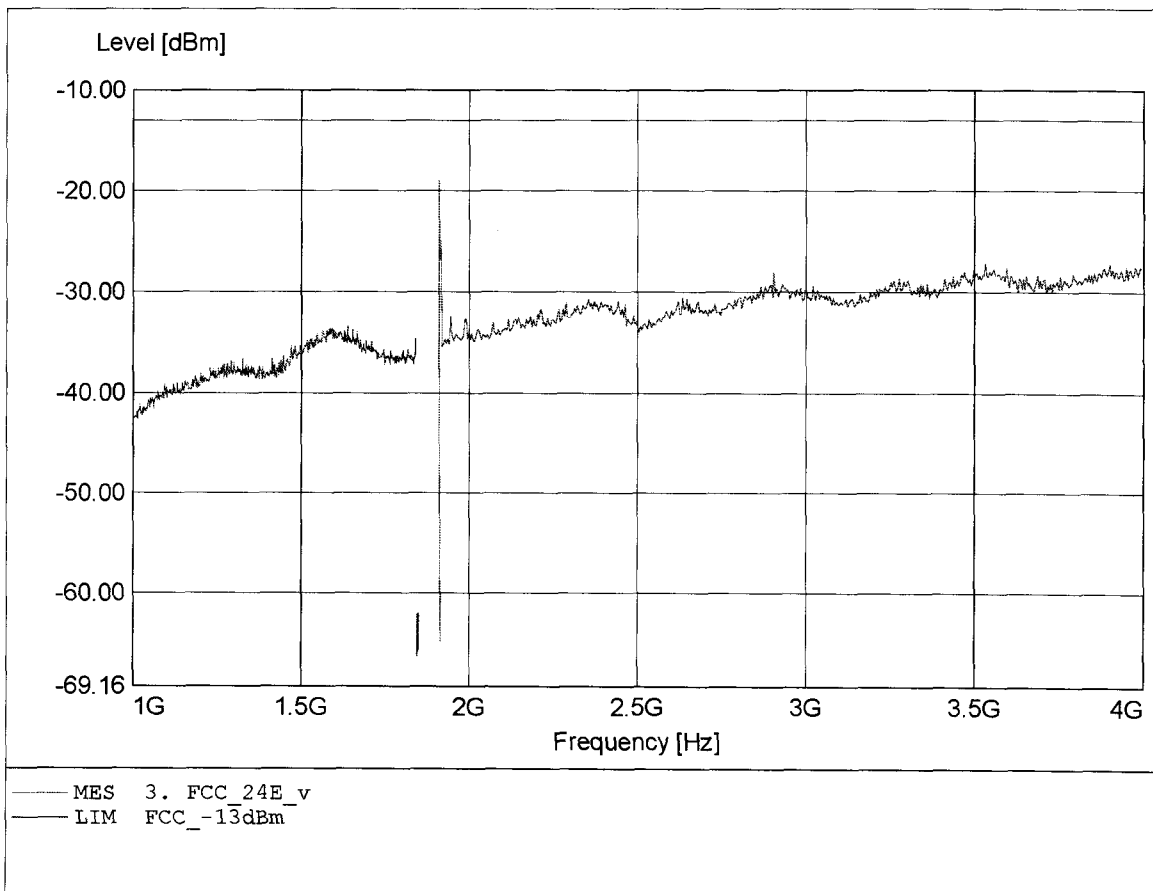


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -17.88dBm, RBW: 1MHz/3kHz

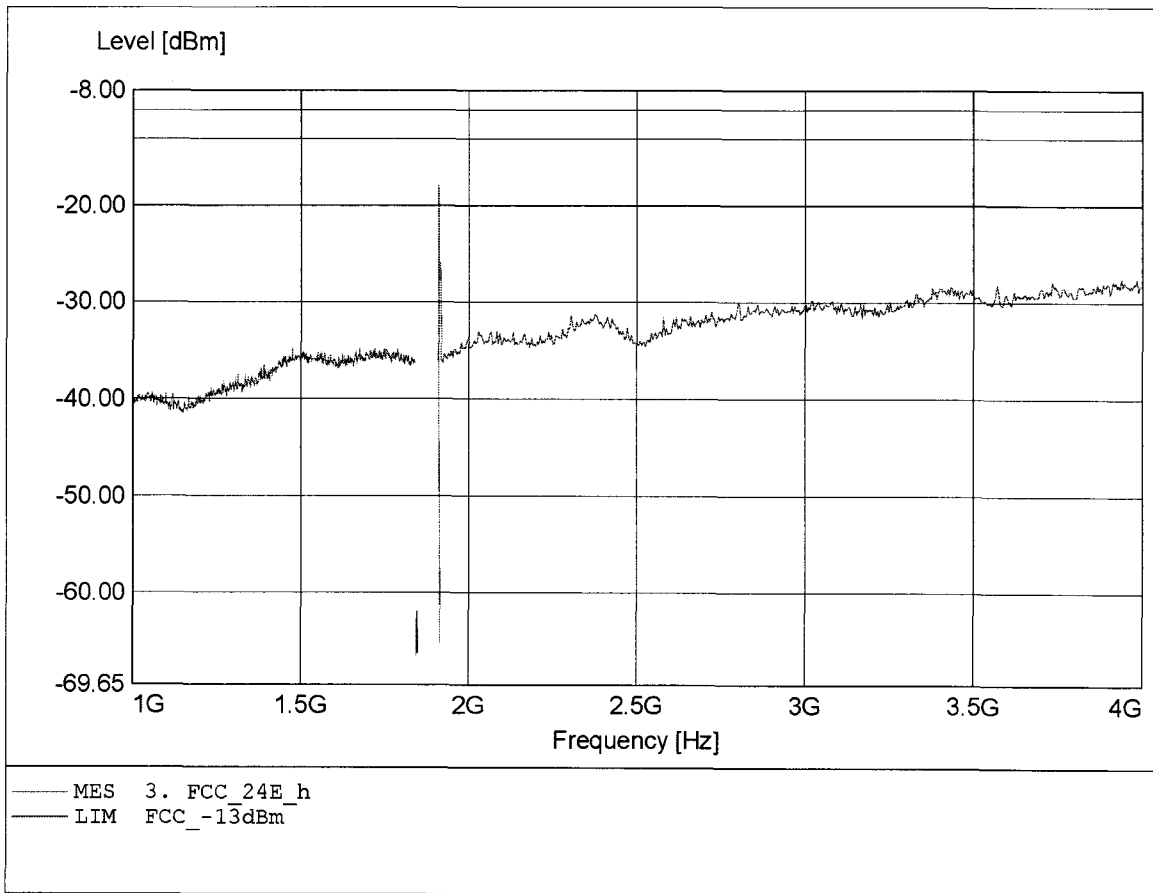


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -25.92dBm, RBW: 1MHz

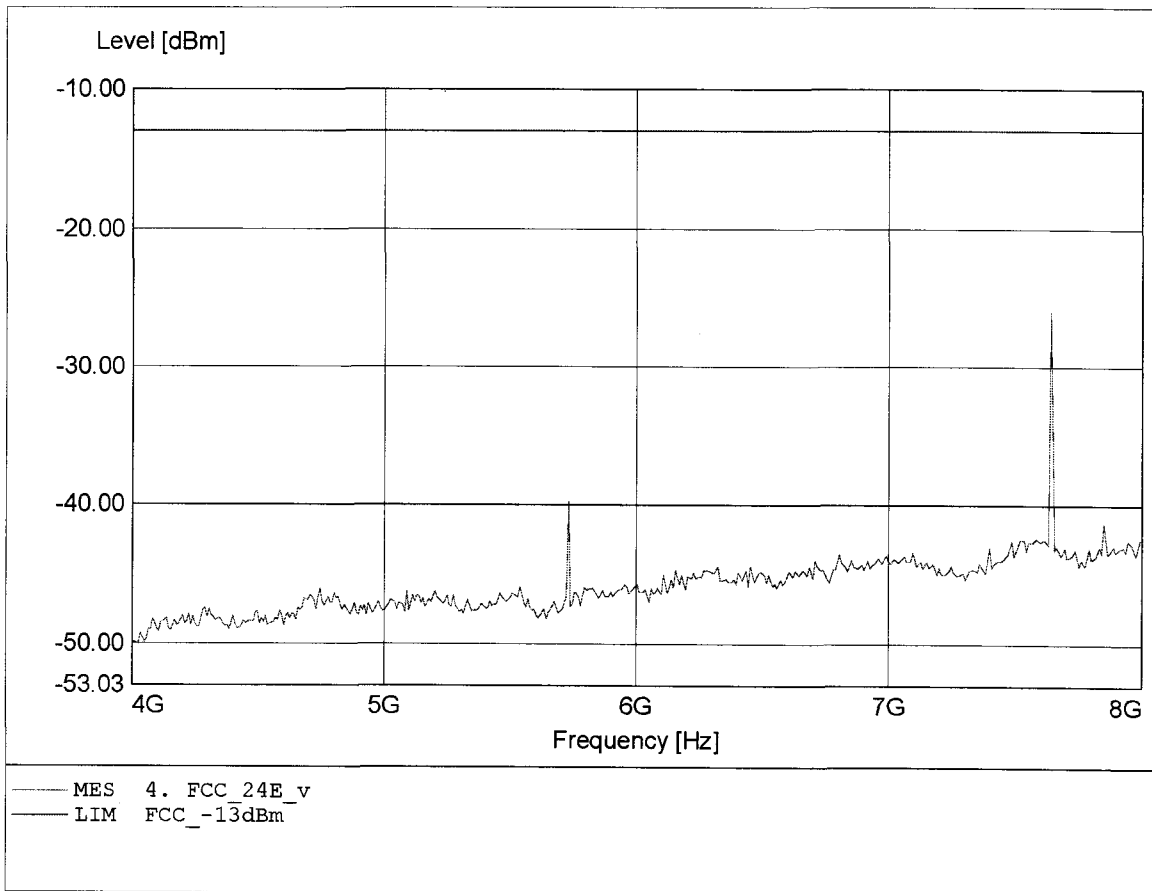


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -28.56dBm, RBW: 1MHz

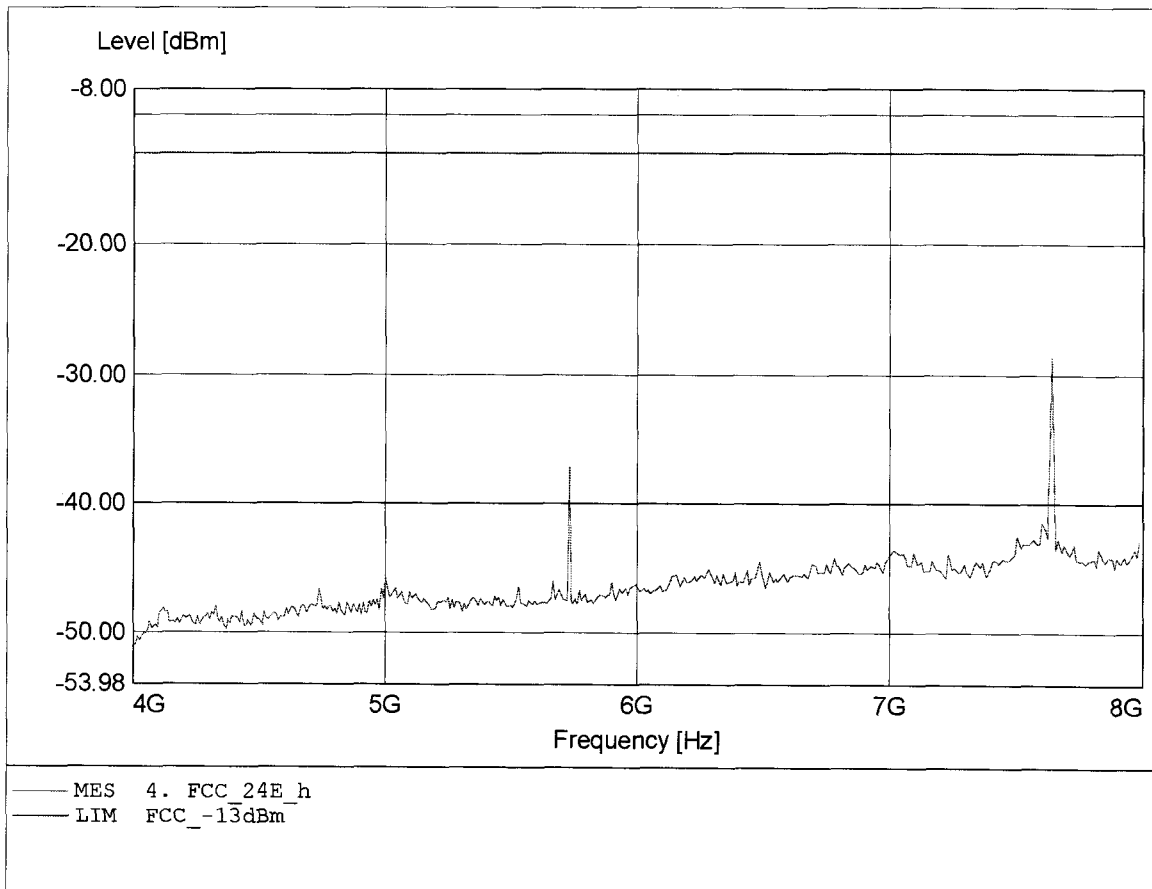


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.463GHz, Pmax: -26.65dBm, RBW: 1MHz

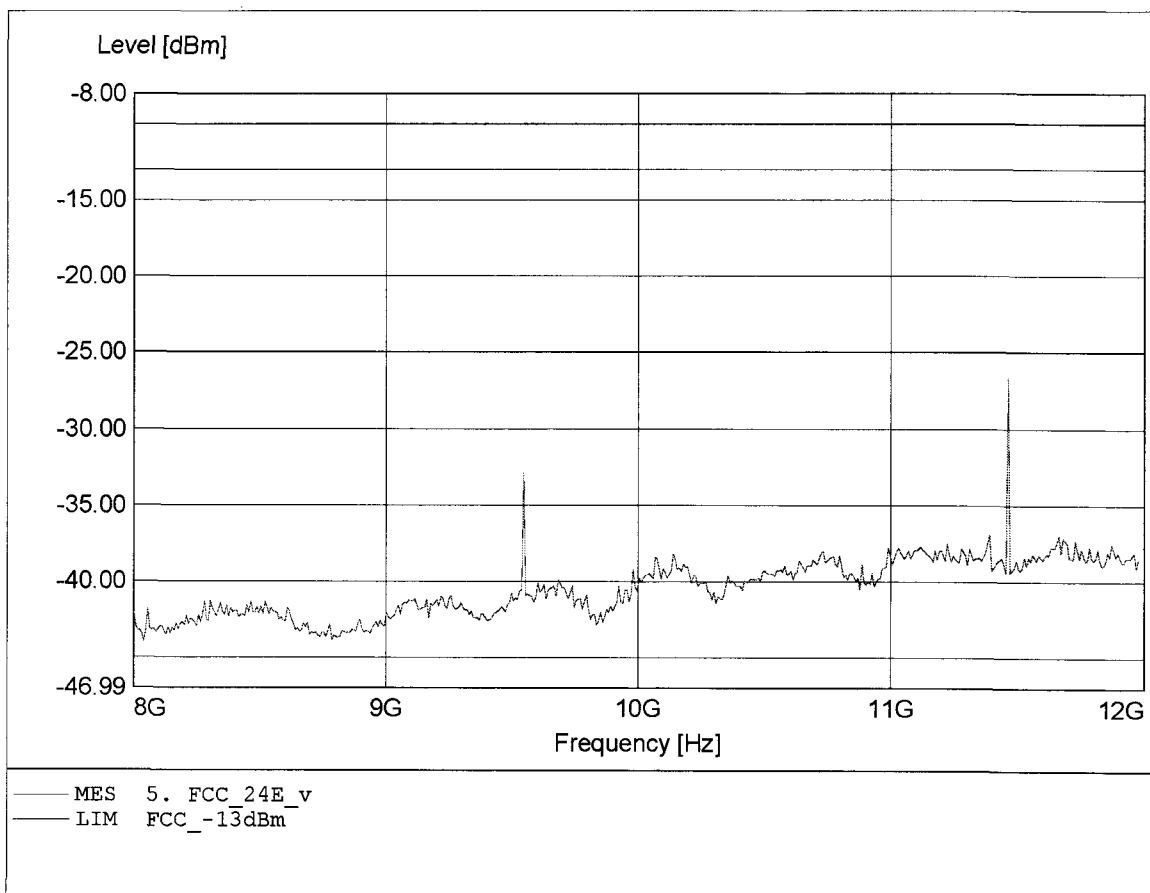


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.463GHz, Pmax: -31.77dBm, RBW: 1MHz

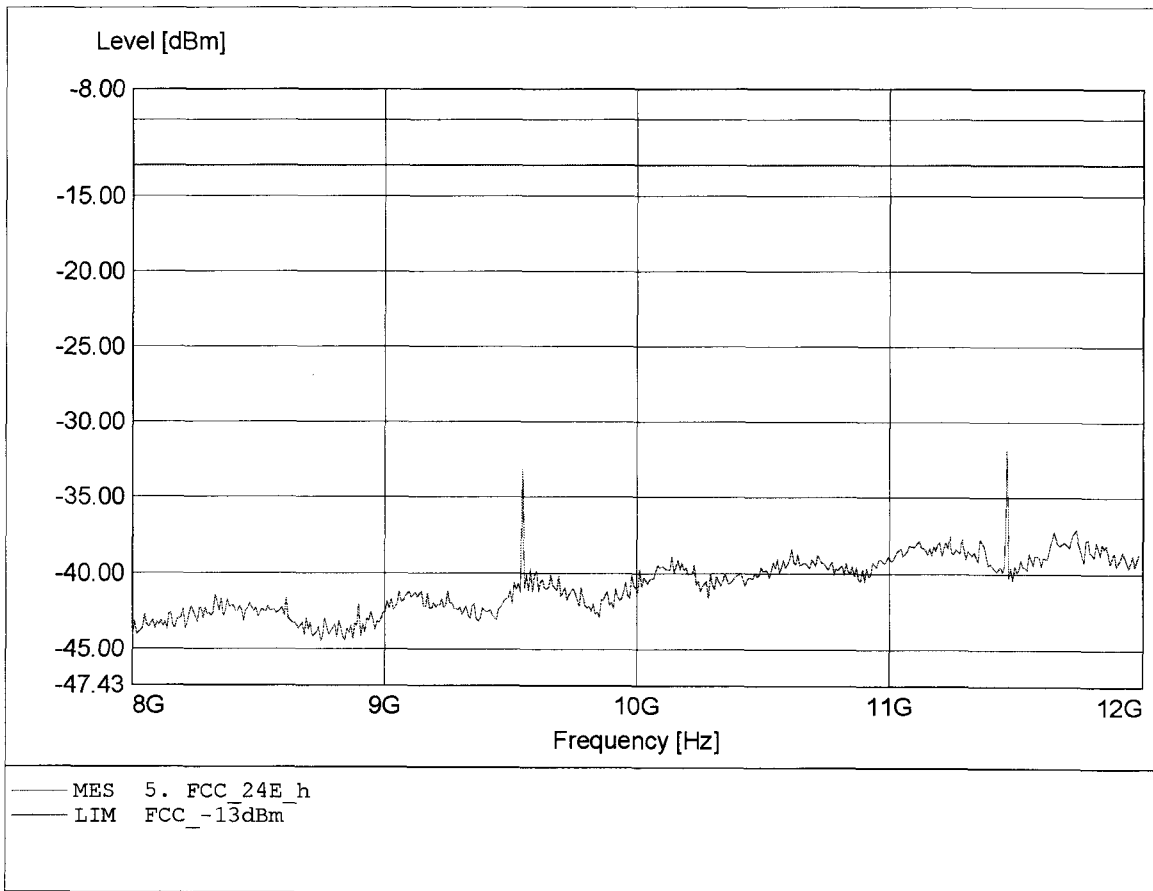


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.964GHz, Pmax: -30.65dBm, RBW: 1MHz

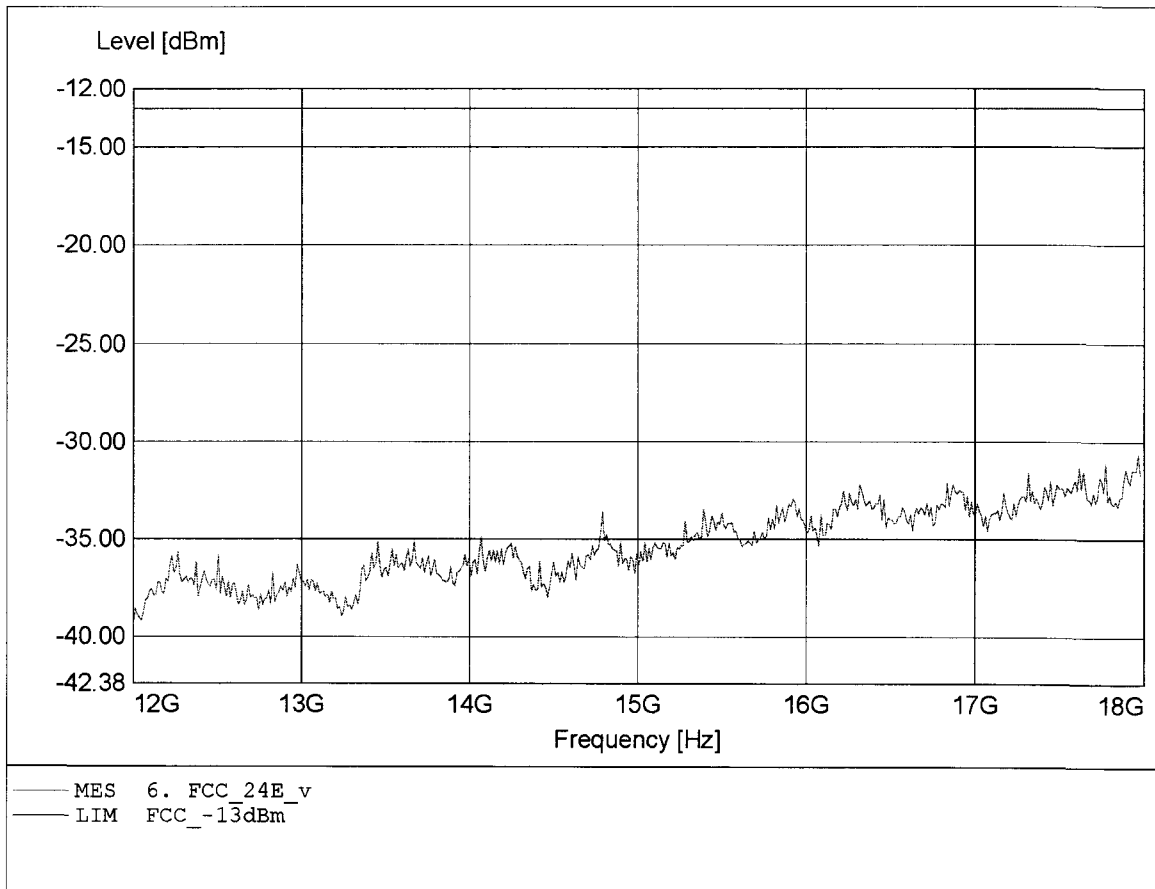


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.904GHz, Pmax: -30.96dBm, RBW: 1MHz

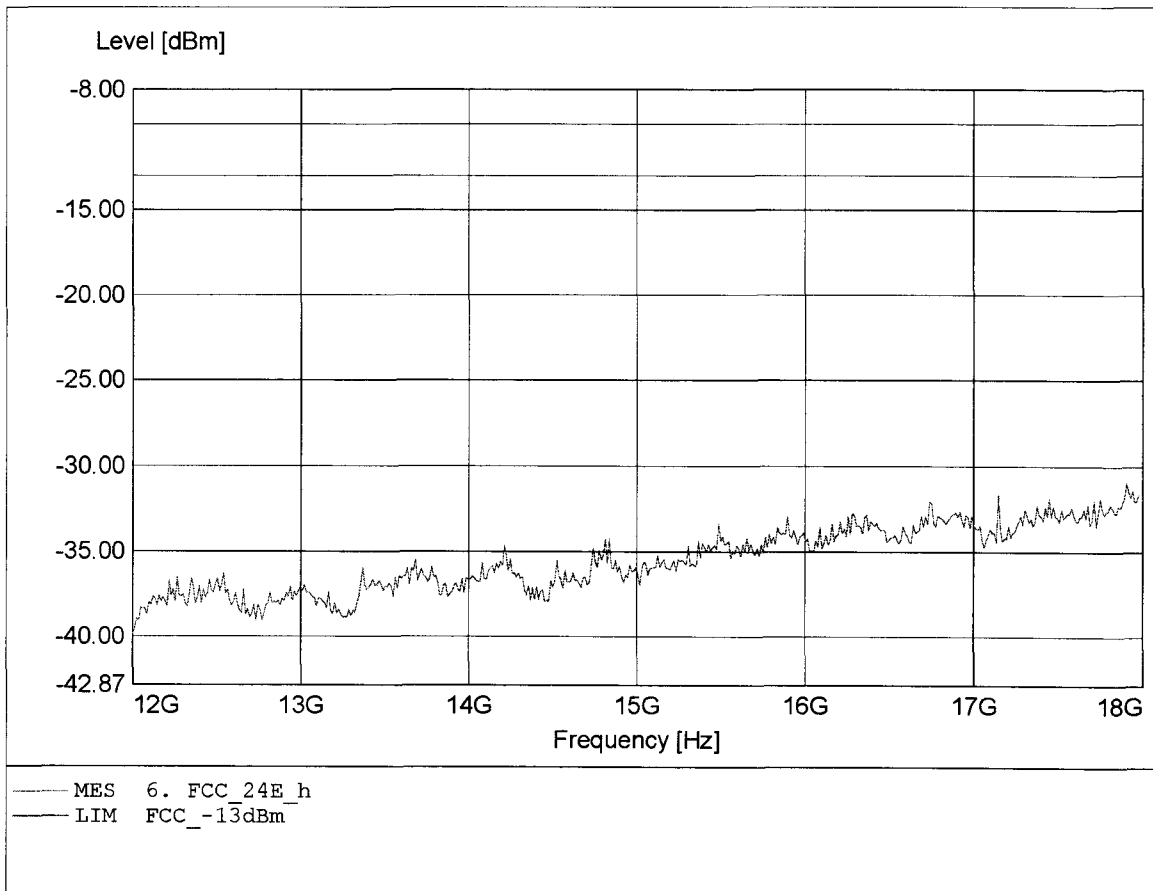


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.006GHz, Pmax: -31.77dBm, RBW: 1MHz

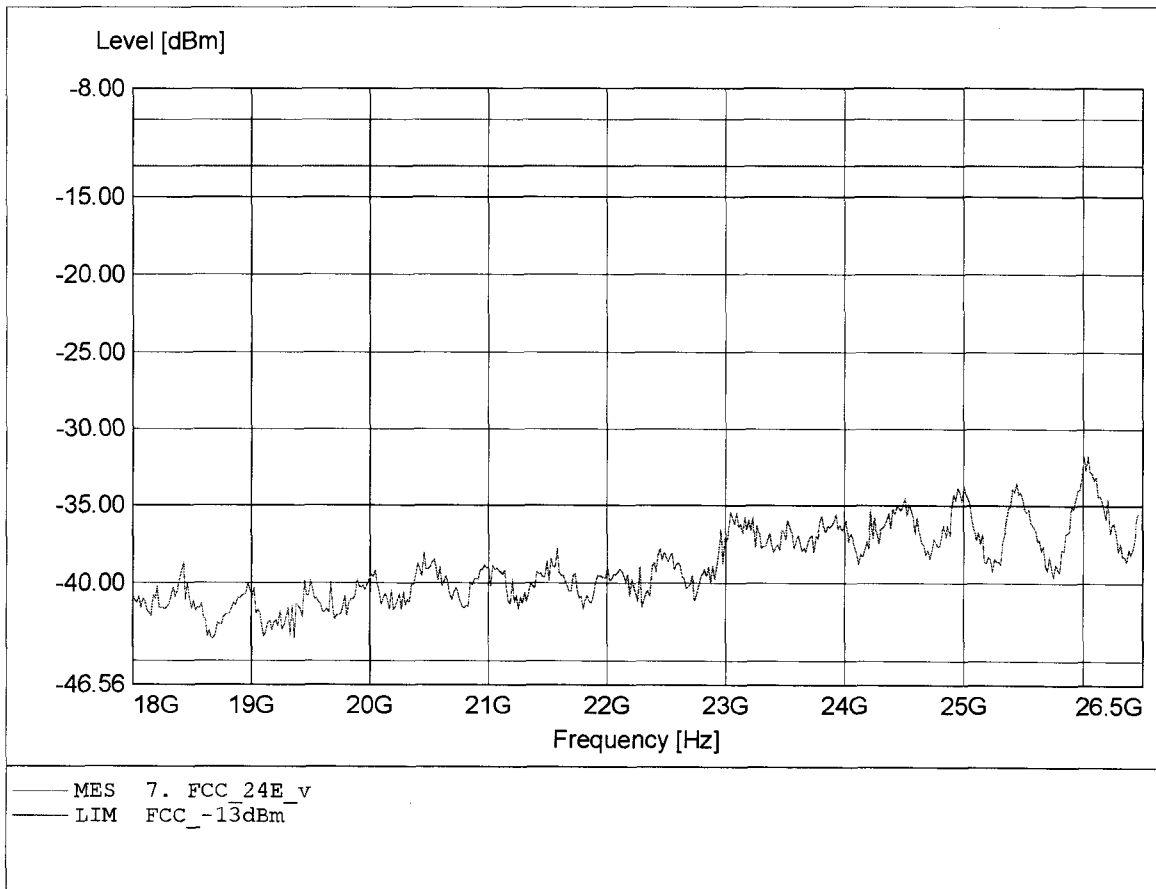

Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Option N.V.
EUT: Globe Trotter Express '7.2 Ready' E
Model / Mode: GE0201 / EGPRS / Ch.: 810
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: PCI EXPRESS SLOT
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.040GHz, Pmax: -32.73dBm, RBW: 1MHz

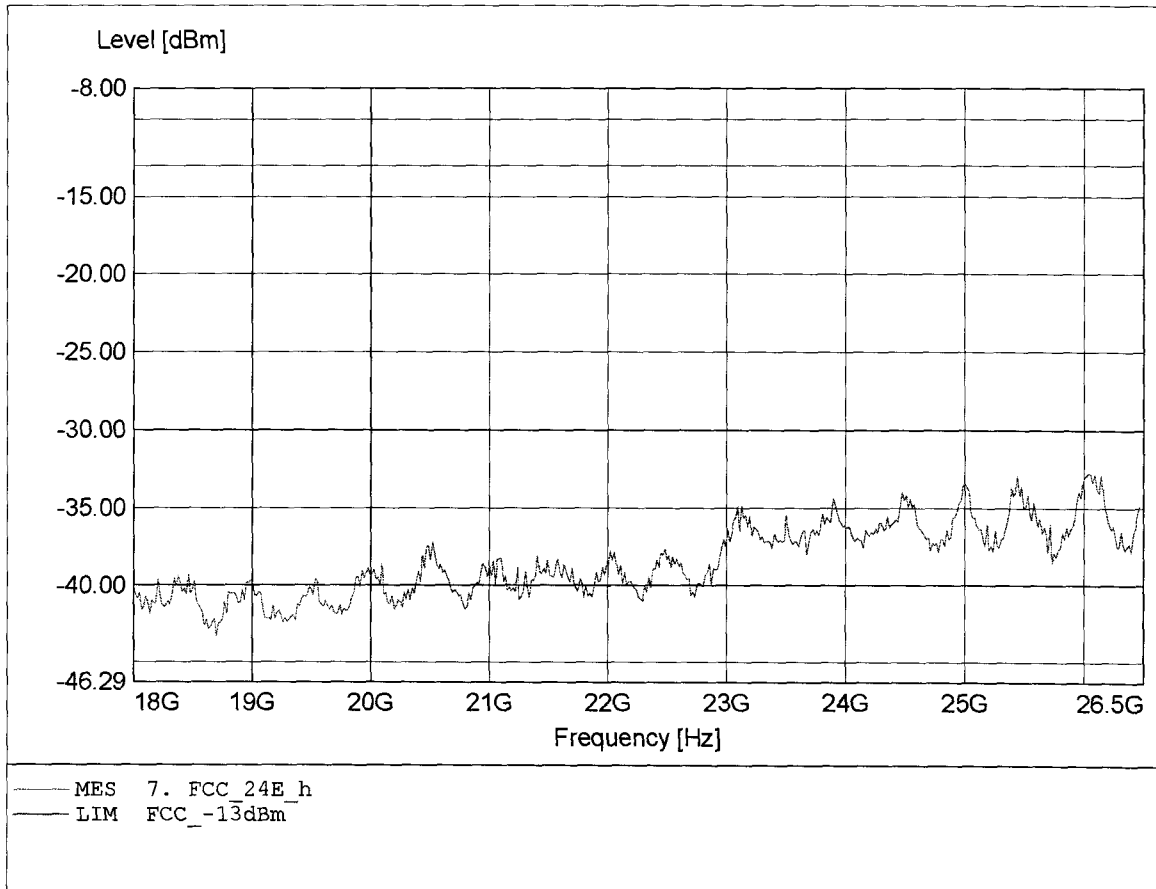


Appendix H

Block edge compliance

**FCC Part 22 H
Lower band edge**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 128
Comment 2	
Comment 3	

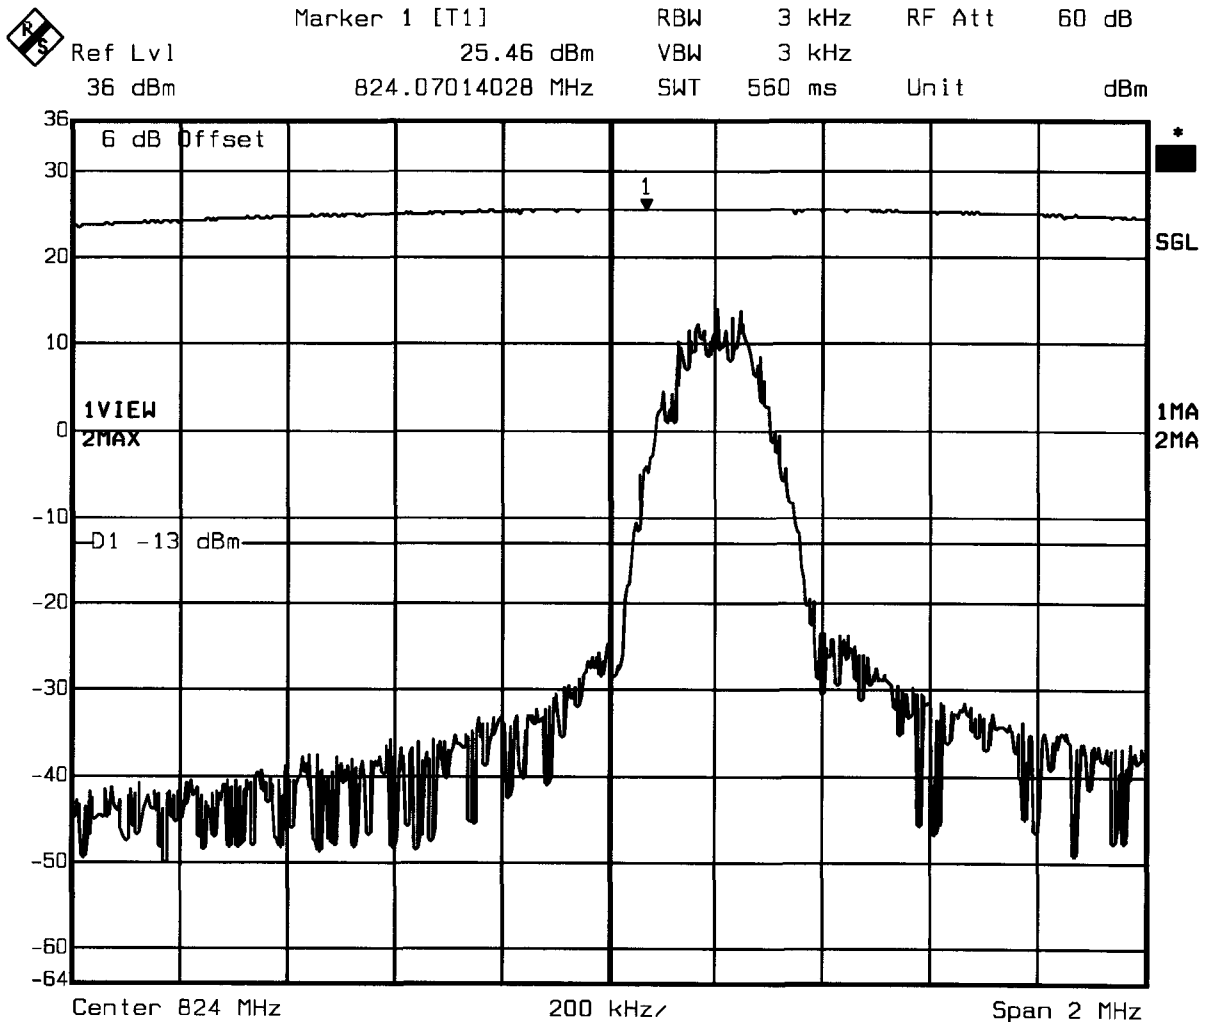

Date: 18.JAN.2007 21:27:46

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

**FCC Part 22 H
Higher band edge**

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 251
Comment 2	
Comment 3	



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
36 dBm	28.45 dBm	VBW	3 kHz		
	848.68136273 MHz	SWT	560 ms	Unit	dBm

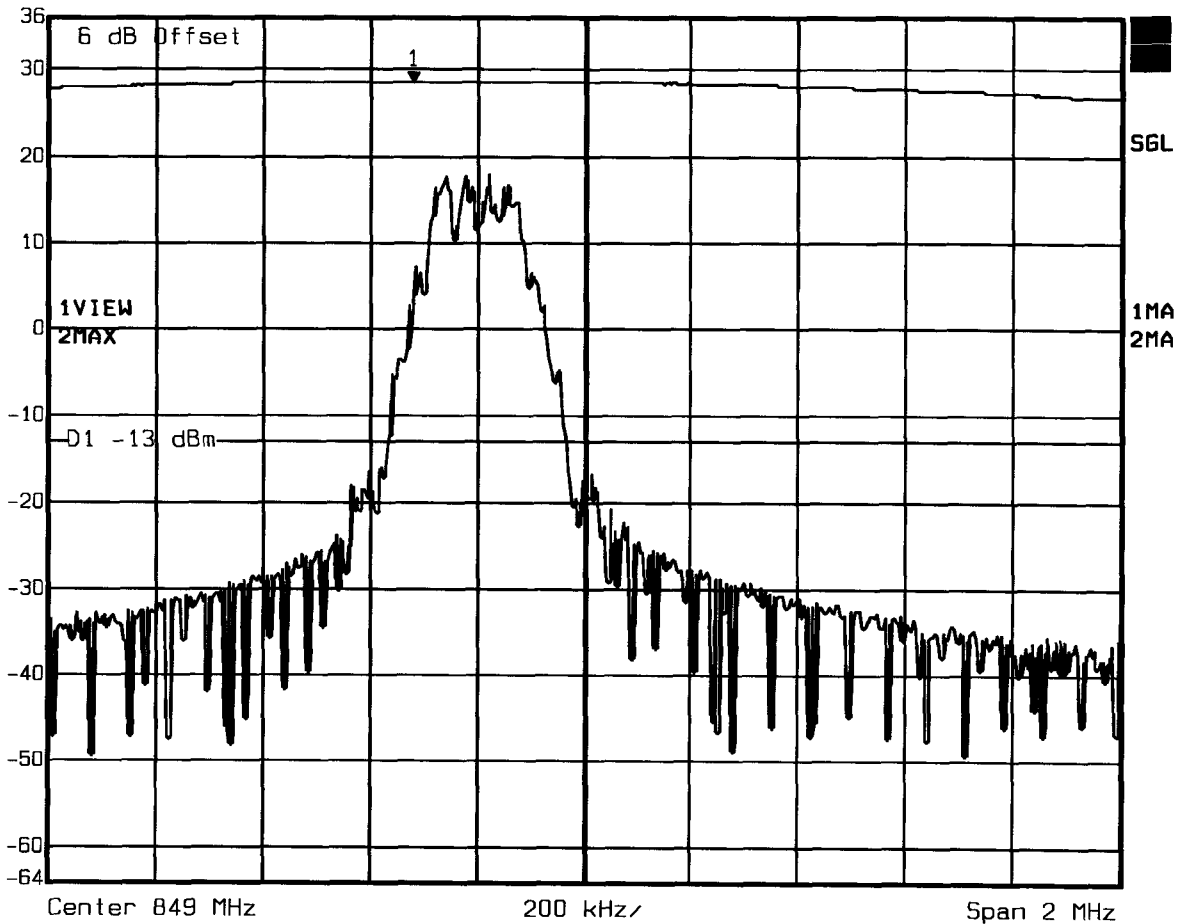

Date: 18.JAN.2007 21:34:01

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 2 of 2

FCC Part 24 E
Lower Block edge

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 512
Comment 2	
Comment 3	

◆	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	Ref Lvl	28.04 dBm	VBW	3 kHz	
	36 dBm	1.84989379 GHz	SWT	560 ms	Unit dBm

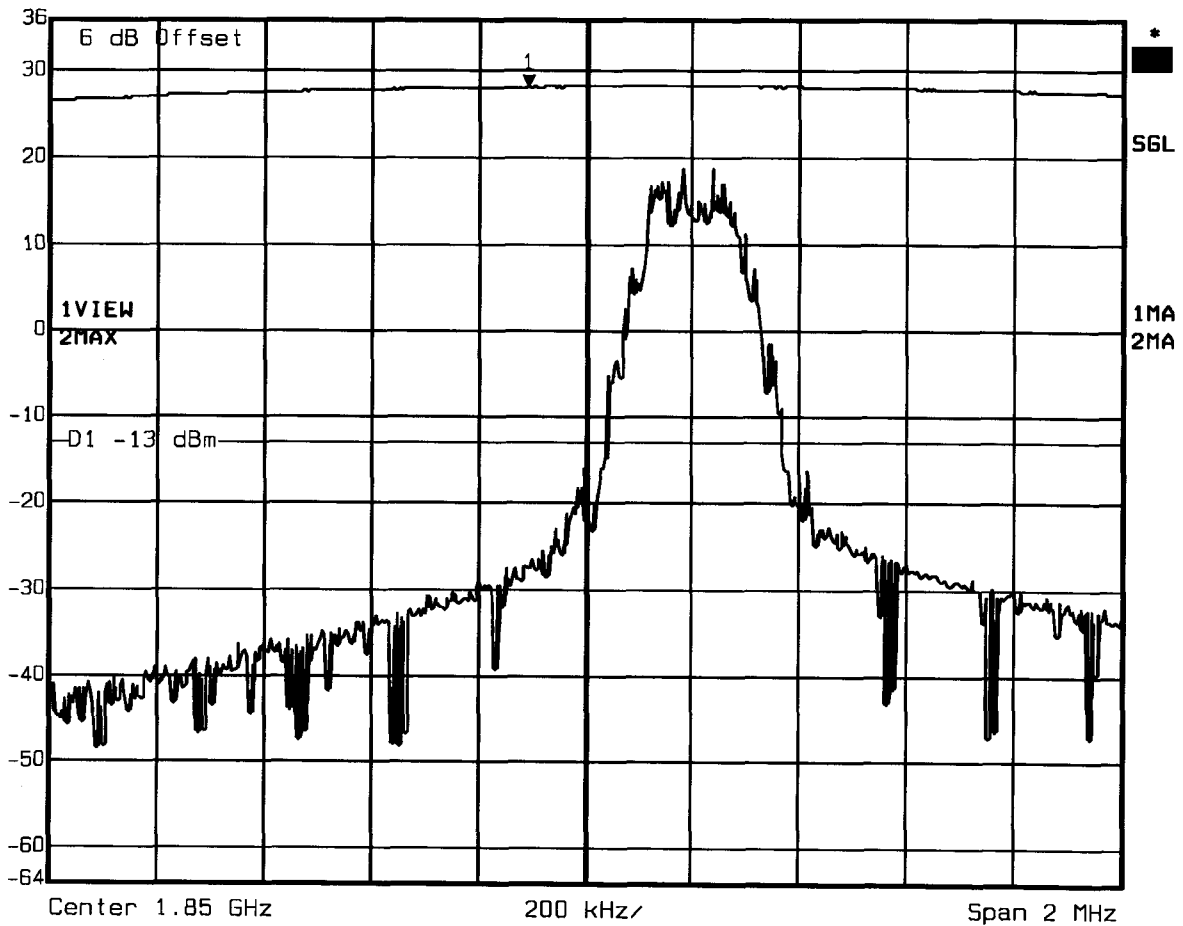

Date: 18.JAN.2007 21:12:24

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


FCC Part 24 E

Higher Block edge

EUT	GLOBE TROTTER EXPRESS '7.2 READY' E
Model	GE0201 / Mode: EGPRS
Approval Holder	OPTION N.V.
Temperature / Voltage	23°C / Unom.: PC EXPRESS SLOT
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 810
Comment 2	
Comment 3	



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
36 dBm	27.27 dBm	VBW	3 kHz		
	1.90974549 GHz	SWT	560 ms	Unit	dBm

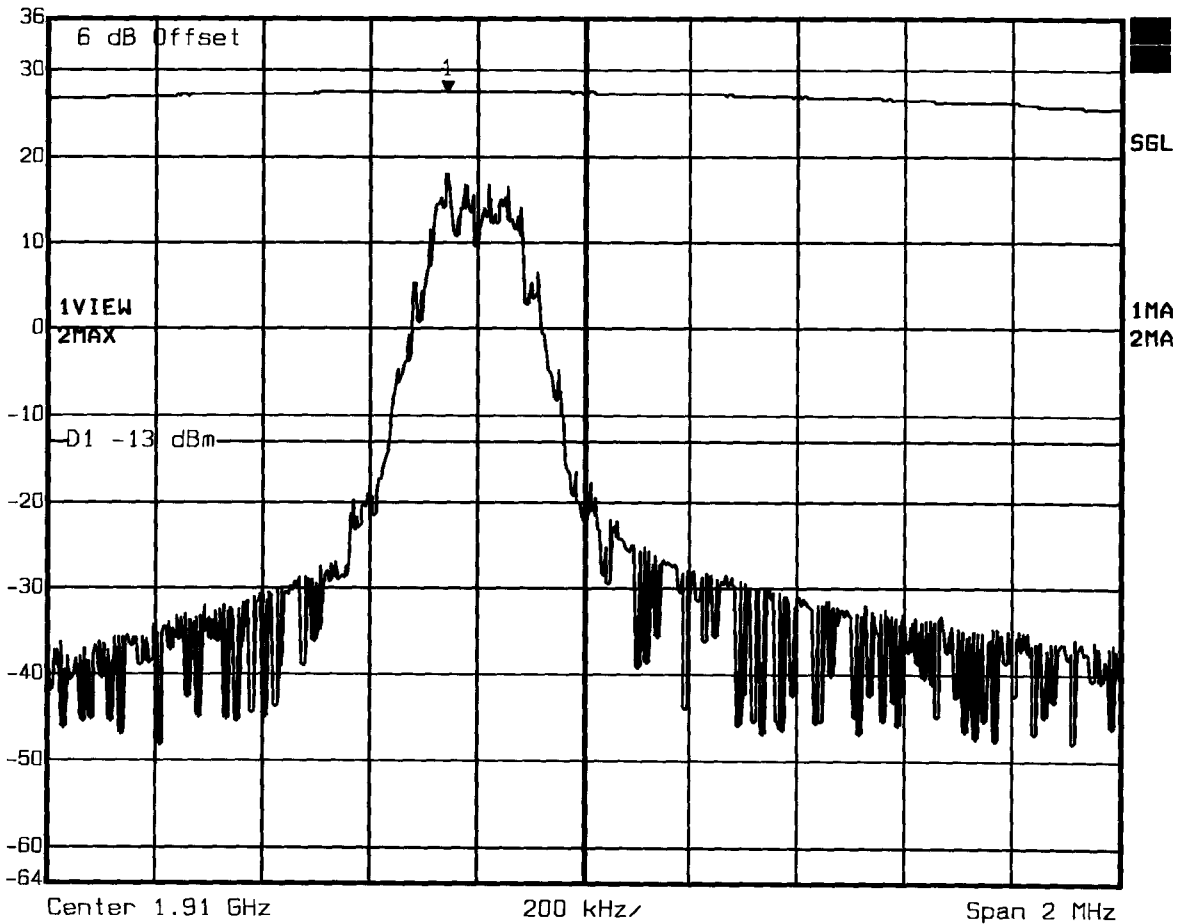

Date: 18.JAN.2007 21:19:25

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Appendix I

AC power line conducted emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: Option N.V.
Manufacturer: Fuji EX
Reference: Unom: 120 V AC (AC/DC-ADAPTOR Laptop), Tnom: 23°C
Test Site: ETS
Operator: Mr. Mees
Test Specification: V-Network: ESH2-Z5 (L1)
model: Fuji Ex mode: GSM 900 PCM: 5
Laptop: Compaq nc6320 Netzteil: HP6604722501

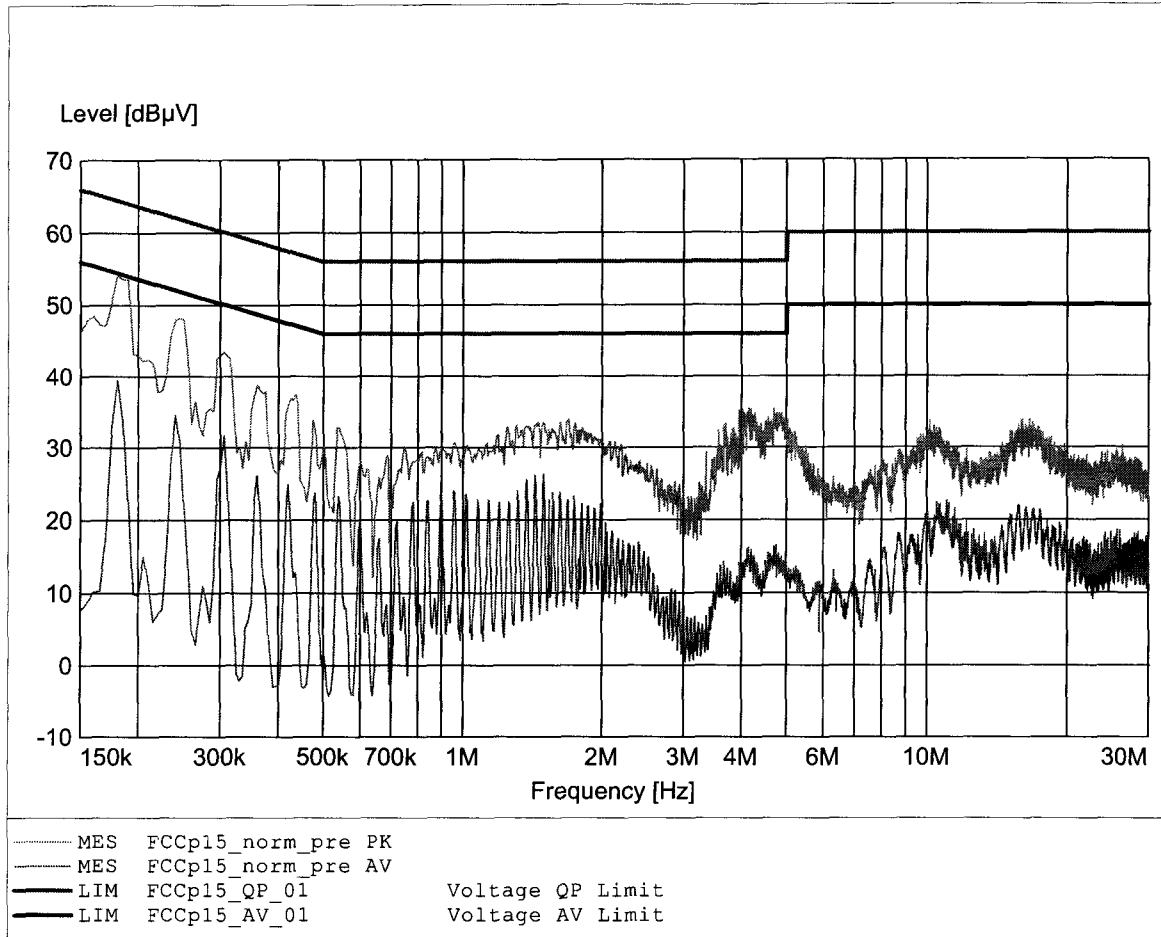

EMI voltage test in the ac-mains according to FCC part 15

EUT: Option N.V.
Manufacturer: Fuji EX
Reference: Unom: 120 V AC (AC/DC-ADAPTOR Laptop), Tnom: 23°C
Test Site: ETS
Operator: Mr. Mees
Test Specification: V-Network: ESH2-Z5 (N)
model: Fuji Ex mode: GSM 900 PCM: 5
Laptop: Compaq nc6320 Netzteil: HP6604722501

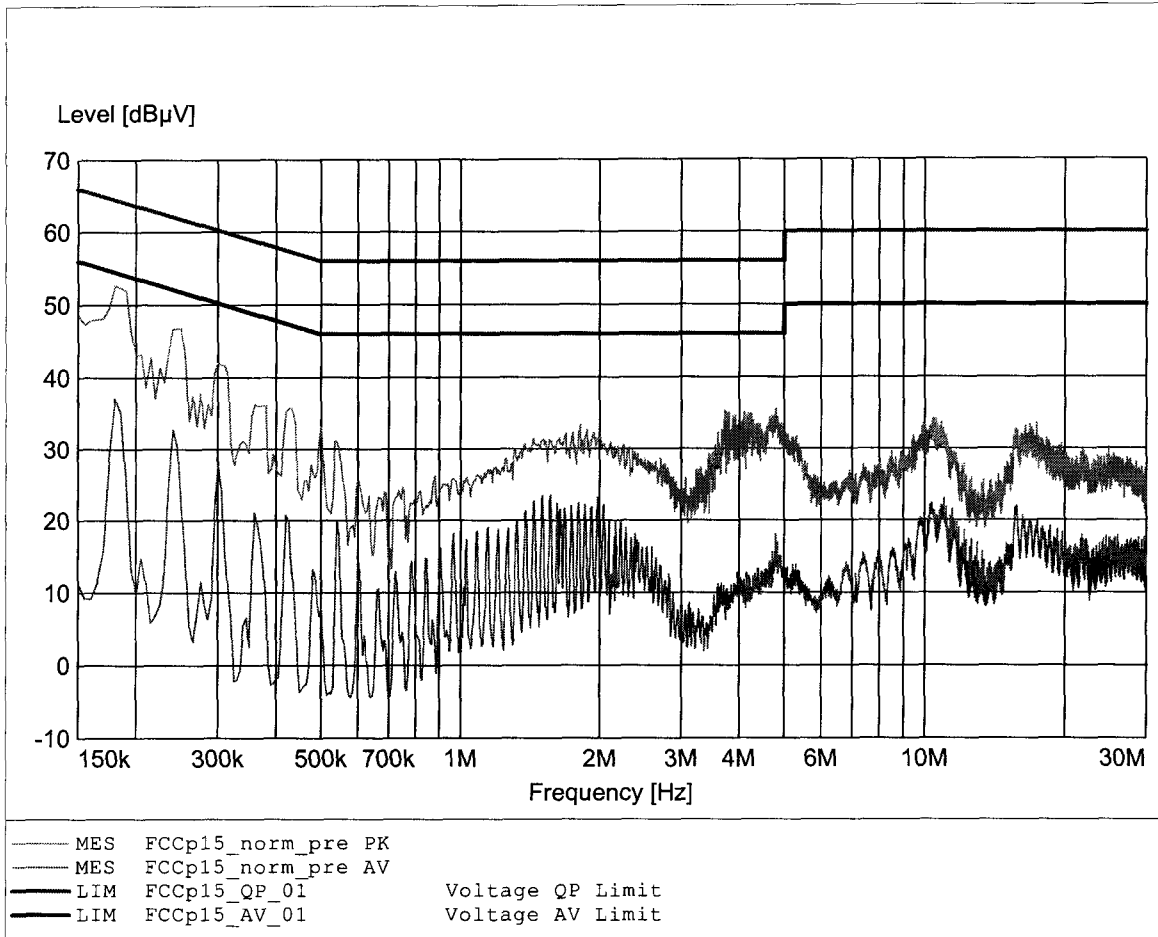

Appendix J

Receiver radiated emission