

# InterLab<sup>®</sup>

## Final Report on GI0643

**Report Reference:** MDE\_OPTI\_1101\_FCCf

acc. Title 47 CFR chapter I part 24 subpart E

**Date:** November 10, 2011

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Markus Becker  
Vorstand • Board:  
Dr. H.-J. Meckelburg

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Yao Jing  
*Date Of Test Report:* 2011/11/10  
*Date of first test:* 2011/06/21  
*Date of last test:* 2011/10/20

### 1.2 Applicant Data

*Company Name:* Option nv  
*Street:* Gaston Geenslaan 14,  
*City:* B-3001 Leuven  
*Country:* Belgium  
*Contact Person:* Mr. Jan Willems  
*Phone:* +32 16 311 516  
*E-Mail:* j.willems@option.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

---

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radio Lab	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01

## 1.4 Signature of the Testing Responsible



Robert Machulec  
responsible for tests performed in: Lab 1, Lab 2

## 1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person  
responsible for Lab 1, Lab 2

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: GI0643

*Product Category:* Computer Accessory

#### **Parameter List:**

<i>Parameter name</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2:</b>	
highest channel	251 (848.8MHz) for GSM850, 810 (1909.8MHz) for GSM1900, 9538 (1907.6MHz) for FDD2
lowest channel	128 (824.2MHz) for GSM850, 512 (1850.2MHz) for GSM1900, 9262 (1852.4MHz) for FDD2
mid channel	190 (836.6MHz) for GSM850, 661 (1880.0MHz) for GSM1900, 9400 (1880MHz) for FDD2



## 2.2 Detailed Description of OUT Samples

### **Sample : a01**

<i>OUT Identifier</i>	GI0643		
<i>Sample Description</i>	USB modem		
<i>Serial No.</i>	YM29B2B53W		
<i>HW Status</i>	2.0.2.0		
<i>SW Status</i>	2.1.1.0x		
		<i>Low Temp.</i>	0 °C
		<i>High Temp.</i>	40 °C
<i>Nominal Voltage</i>	5 V	<i>Normal Temp.</i>	23 °C

### **Sample : b01**

<i>OUT Identifier</i>	GI0643		
<i>Sample Description</i>	USB modem		
<i>Serial No.</i>	YM29B2B548		
<i>HW Status</i>	2.0.2.0		
<i>SW Status</i>	2.1.1.0x		
		<i>Low Temp.</i>	0 °C
		<i>High Temp.</i>	40 °C
<i>Nominal Voltage</i>	5 V	<i>Normal Temp.</i>	23 °C

## 2.3 OUT Features

### Features for OUT: GI0643

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
<b>Features for scope: FCC_v2</b>			
DC	The OUT is powered by or connected to DC Mains		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PantC	permanent fixed antenna connector, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
Wn	EUT supports WLAN in mode n in the band 2400 MHz - 2483.5 MHz		

## 2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 8	conv. to SMA				Simple RF adapter
AE 11	lenovo 90W 20V 92P1103	11S92P1103Z1Z BEF7161JH	-	-	AC/DC Adapter (for laptop)
AE 10	lenovo R60 9461-54G	L3-AA471 06/10	-	WinXP Prof. Ger.	Laptop IBM
AE 4	Toshiba PA3378E-3AC3	-	-	-	AC/DC Adapter (for laptop)
AE 3	Toshiba TECRA M9	87060248H	-	-	Laptop Toshiba
AE 9	USB	-	-	-	USB extension cable

## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples	List of auxiliary equipment	
Sample No.	Sample Description	AE No.	AE Description
A01_FCCcond2			
Sample: a01	USB modem	AE 8	Simple RF adapter
B01_PoP (The EUT is powered by AE 3)			
Sample: b01	USB modem	AE 4	AC/DC Adapter (for laptop)
		AE 3	Laptop Toshiba
		AE 9	USB extension cable
B01_rad (The EUT is powered by AE 10)			
Sample: b01	USB modem	AE 11	AC/DC Adapter (for laptop)
		AE 10	Laptop IBM

## 3 Results

### 3.1 General

#### Documentation of tested devices:

Available at the test laboratory.

#### Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

#### Note:

The original product is the product with model number GI0653 (FCC ID: NCMOGI0653), which is a 2G/3G USB modem with security functions. The new product has model number GI0643 (FCC ID: NCMOGI0643). This modem can connect to 2G/3G and WLAN, and can act as a hotspot for connecting other WLAN devices. The WLAN part has been added, no changes were made in the 2G/3G part.

We measured the conducted output power of GI0643 and made the comparison with values of the original product GI0653 (see page61). They are very near with each other and inside the tolerance of output power (see document "tune-up procedure for GI0643"). So the conducted test results in FCC report EH/2010/90017 dated Oct. 06 2010 for original product GI0653 will be re-used for the new product GI0643. We have done the re-test of radiated emission on the new product GI0643 because of hardware changes.

This Test Report replaces the Test Report MDE\_OPTI\_1101\_FCCb.



---

Reference: MDE\_OPTI\_1101\_FCCf

acc. Title 47 CFR chapter I part 24 subpart E

### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES	Part 24, Subpart E - Broadband PCS

### 3.3 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 24</b>
<i>Version</i>	10-1-10 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 24 - PERSONAL COMMUNICATIONS SERVICES

### 3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>24.1 RF Power Output §2.1046, §24.232</b>				
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = 1900, Mode = GPRS, Channel = 512, Frequency = 1850.2MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz, Method = radiated	Passed	2011/06/21	Lab 1	B01_PoP
24.1; Frequency Band = 1900, Mode = GPRS, Channel = 661, Frequency = 1880.0MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz, Method = radiated	Passed	2011/06/21	Lab 1	B01_PoP
24.1; Frequency Band = 1900, Mode = GPRS, Channel = 810, Frequency = 1909.8MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz, Method = radiated	Passed	2011/06/21	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9262, Frequency = 1852.4MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9400, Frequency = 1880MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_1, Channel = 9538, Frequency = 1907.6MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_2, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_2, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2





Reference: MDE\_OPTI\_1101\_FCCf

acc. Title 47 CFR chapter I part 24 subpart E

Test Case Identifier / Name Test (condition)	Result	Date of Test	Lab	
			Ref.	Setup
<b>24.1 RF Power Output §2.1046, §24.232</b>				
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_2, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_3, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_3, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_3, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_4, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_4, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSDPA_subtest_4, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/12	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_1, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_1, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_1, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_2, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_2, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_2, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_3, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_3, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_3, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_4, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_4, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_4, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9262, Frequency = 1852.4MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
<b>24.1 RF Power Output §2.1046, §24.232</b>				
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9400, Frequency = 1880MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/07/18	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = HSUPA_subtest_5, Channel = 9538, Frequency = 1907.6MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz, Method = conducted	Passed	2011/08/02	Lab 2	A01_FCCcond2
24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz, Method = radiated	Passed	2011/06/22	Lab 1	B01_PoP
<b>24.4 Field strength of spurious radiation §2.1053, §24.238</b>				
24.4; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz	Passed	2011/10/20	Lab 1	B01_rad
footnote: 1				
24.4; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz	Passed	2011/07/29	Lab 1	B01_rad
footnote: 1				
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz	Passed	2011/10/20	Lab 1	B01_rad
footnote: 1				
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz	Passed	2011/10/20	Lab 1	B01_rad
footnote: 1				
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	Passed	2011/10/20	Lab 1	B01_rad
footnote: 1				

### 3.5 Detailed Footnotes

<i>No.</i>	<i>Description</i>
1	During the spurious emissions radiated tests, the WLAN function was activated in addition to the GSM function to ensure full compliance to the FCC rules for colocated transmitters.

### 3.6 Detailed Results

#### 3.6.1 24.1 RF Power Output §2.1046, §24.232

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz, Method = conducted**

*Result:* Passed

*Setup No.:* A01\_FCCcond2

*Date of Test:* 2011/08/02 11:24

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	verdict
average	25.60	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz, Method = radiated**

*Result:* Passed


*Setup No.:* B01\_PoP

*Date of Test:* 2011/06/22 5:31

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

### Detailed Results:

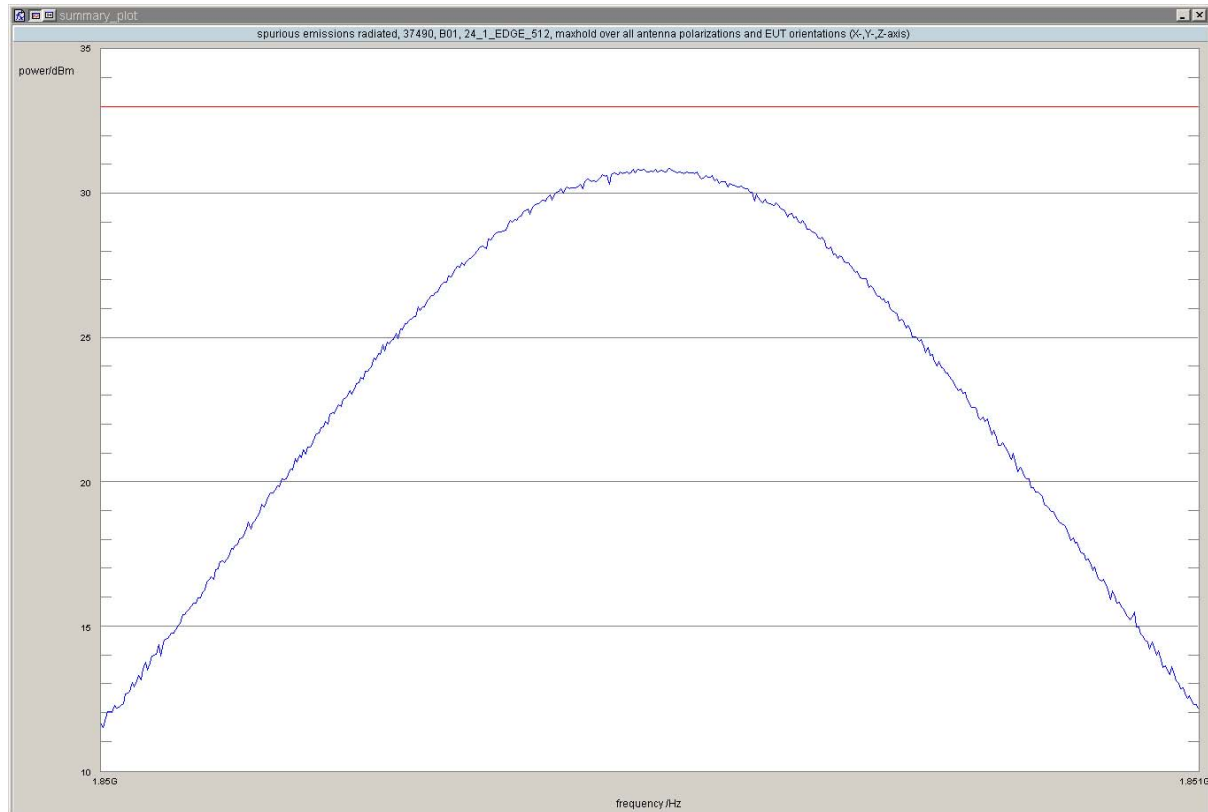

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1850.22	30.87	33.00	2.13	-60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz, Method = conducted**

Result: Passed

Setup No.: A01\_FCCcond2

Date of Test: 2011/08/02 11:24

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24


### Detailed Results:

method	conducted value / dBm	verdict
average	25.30	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz, Method = radiated**

*Result:* Passed  
*Setup No.:* B01\_PoP  
*Date of Test:* 2011/06/22 5:04  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

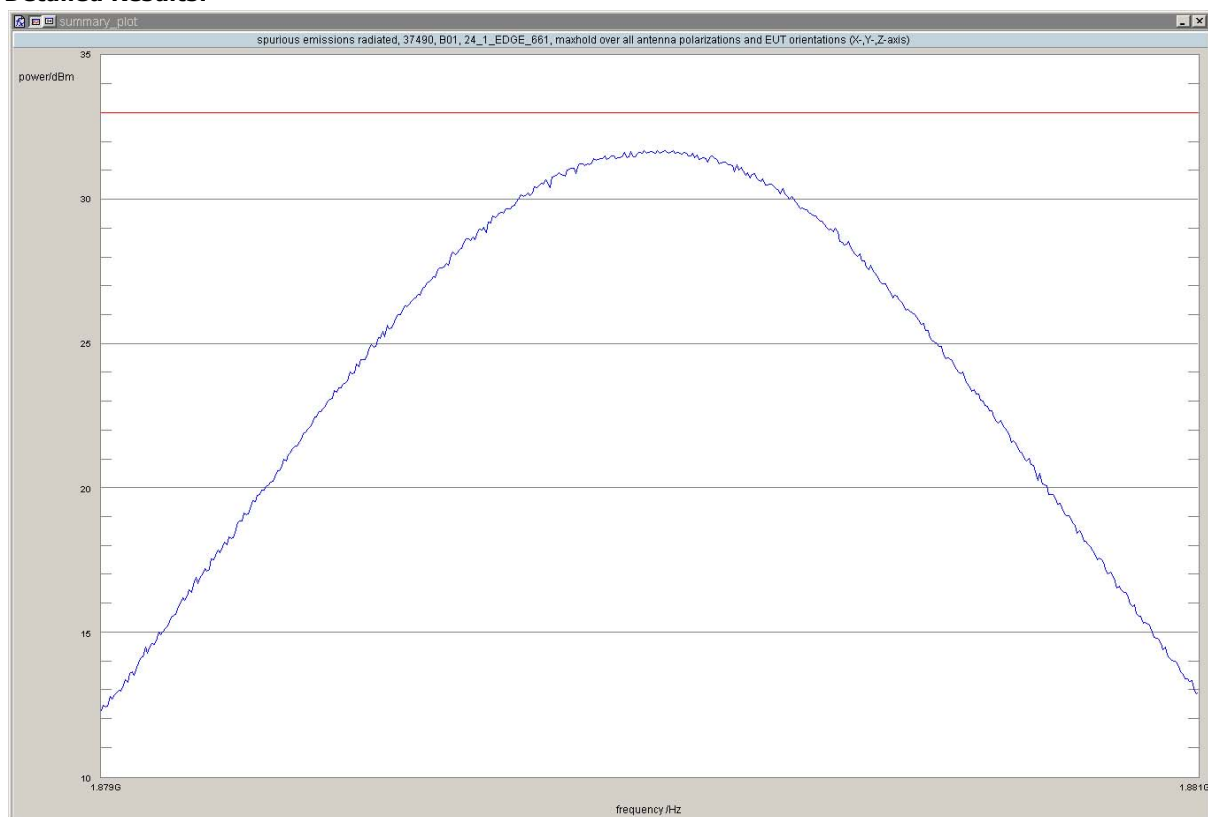**Detailed Results:**


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1880.01	31.70	33.00	1.30	-60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/08/02 11:23  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

#### Detailed Results:

method	conducted value / dBm	verdict
average	25.50	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/22 5:59

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

#### Detailed Results:

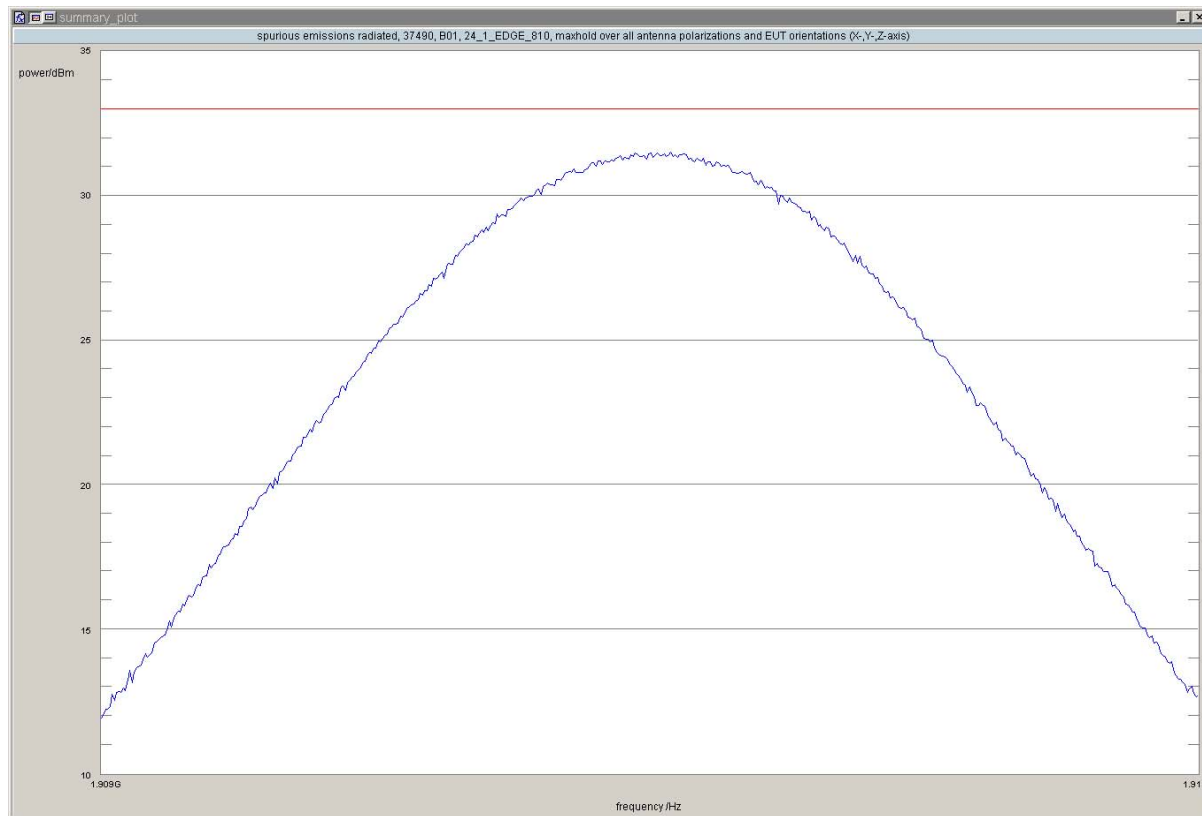

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1909.82	31.50	33.00	1.50	-60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = 1900, Mode = GPRS, Channel = 512, Frequency = 1850.2MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/08/02 11:21  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**


method	conducted value / dBm	verdict
average	28.70	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz, Method = radiated**

*Result:* Passed  
*Setup No.:* B01\_PoP  
*Date of Test:* 2011/06/21 21:24  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

### Detailed Results:

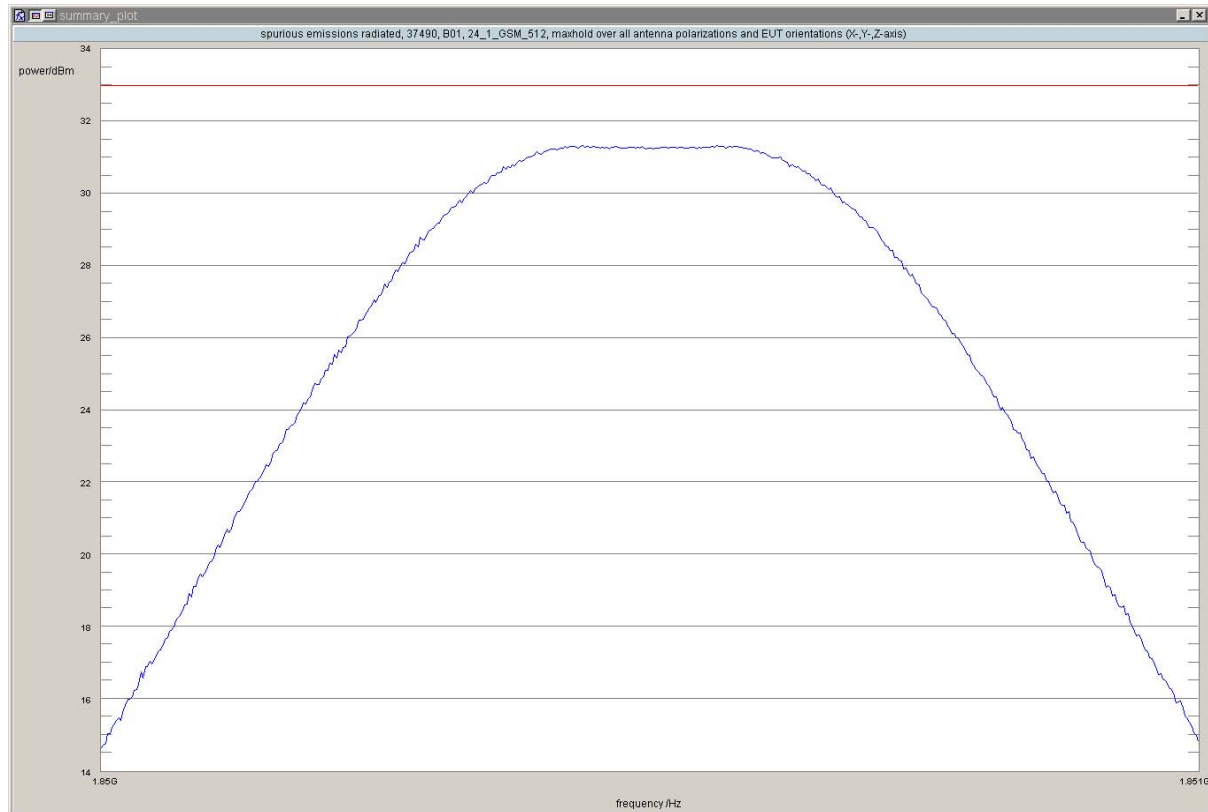

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1850.26	31.34	33.00	1.66	-30.0	horizontal	vertical	passed

**Test: 24.1; Frequency Band = 1900, Mode = GPRS, Channel = 661, Frequency = 1880.0MHz, Method = conducted**

Result: Passed

Setup No.: A01\_FCCcond2

Date of Test: 2011/08/02 11:22

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:


method	conducted value / dBm	verdict
average	28.90	passed

antenna gain = 2.00 dBi



**Test: 24.1; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz, Method = radiated**

*Result:* Passed  
*Setup No.:* B01\_PoP  
*Date of Test:* 2011/06/21 21:25  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

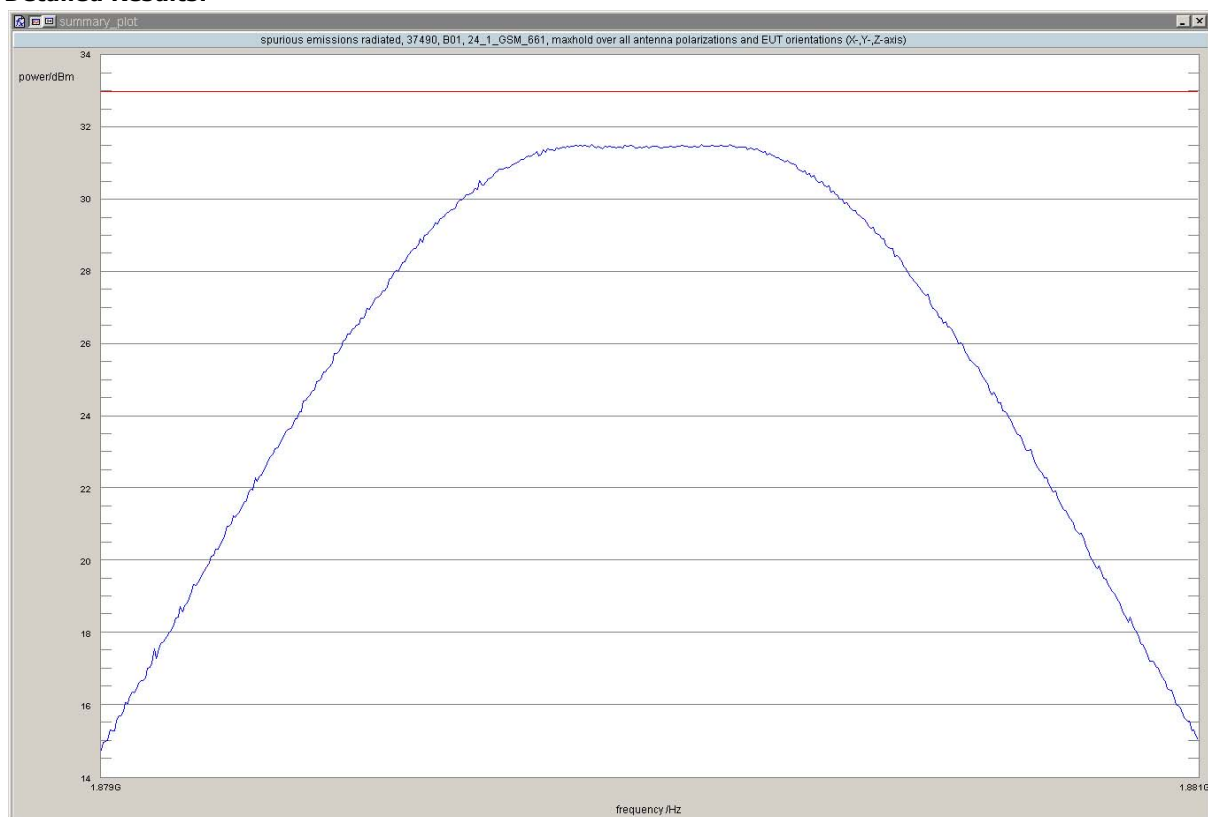**Detailed Results:**


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1880.05	31.54	33.00	1.46	-30.0	horizontal	vertical	passed

**Test: 24.1; Frequency Band = 1900, Mode = GPRS, Channel = 810, Frequency = 1909.8MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/08/02 11:22  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

### Detailed Results:

method	conducted value / dBm	verdict
average	28.80	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/21 21:26

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

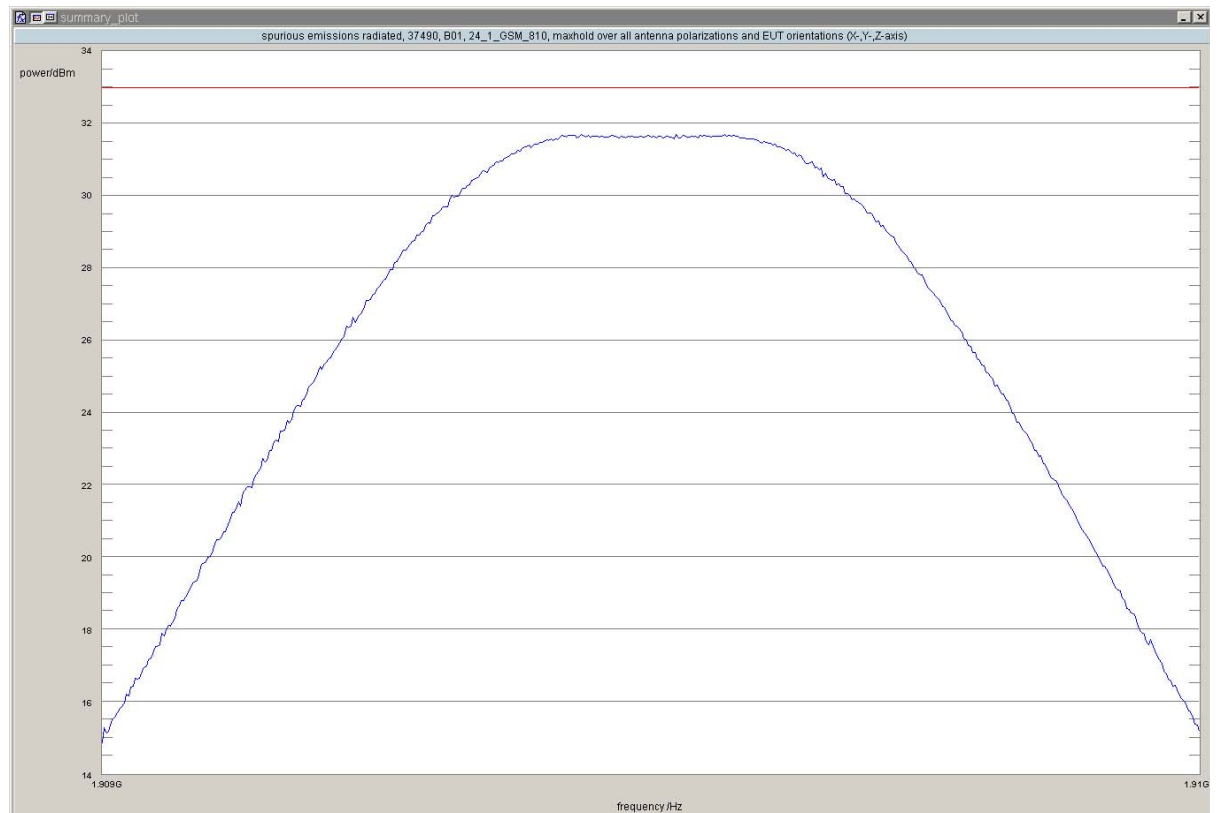

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	300	1909.87	31.71	33.00	1.29	75.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:45  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**


method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.76	21.76	19.62	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9262, Frequency = 1852.4MHz, Method = radiated**

*Result:* Passed  
*Setup No.:* B01\_PoP  
*Date of Test:* 2011/06/22 9:58  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

### Detailed Results:

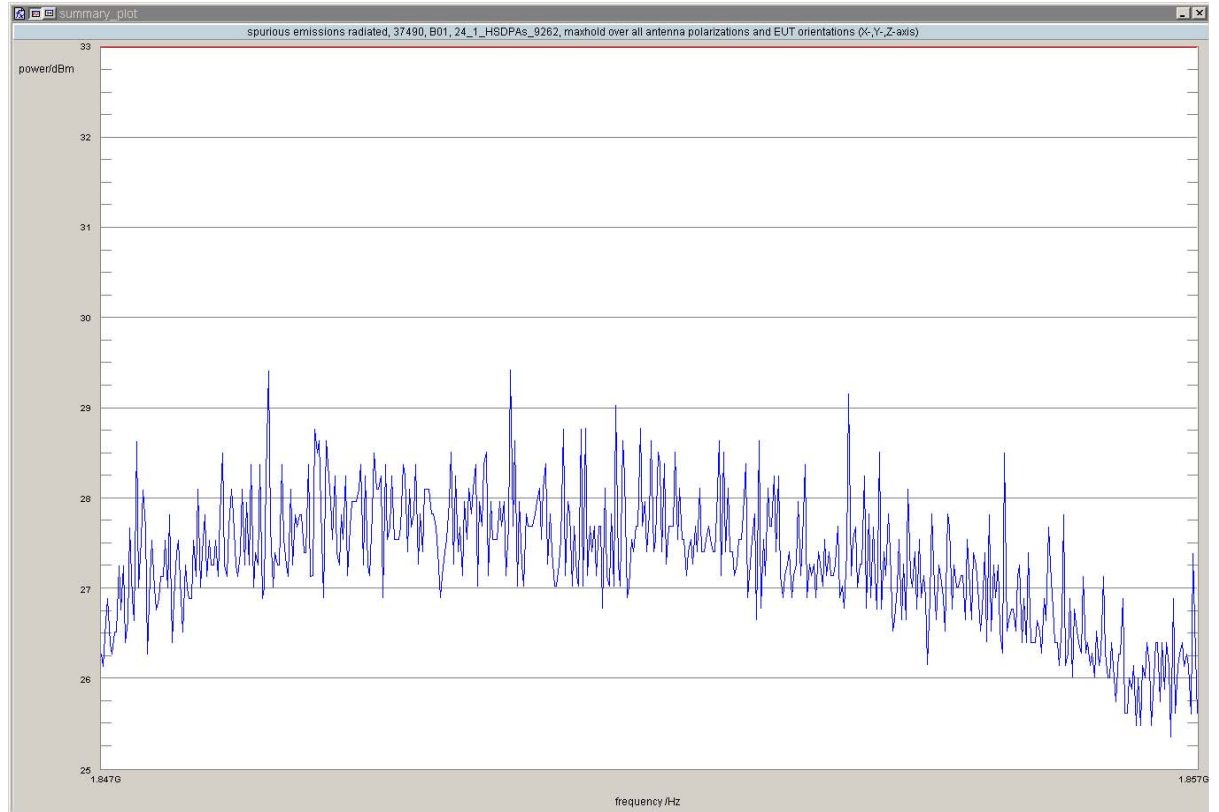

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1851	29.42	33.00	3.58	-30.0	horizontal	vertical	passed
rms	maxhold	10000	1852	22.26	33.00	10.74	-30.0	horizontal	vertical	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:45  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

### Detailed Results:


method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.84	21.84	19.70	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9400, Frequency = 1880MHz, Method = radiated**

Result: Passed  
Setup No.: B01\_PoP  
Date of Test: 2011/06/22 10:40  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24

#### Detailed Results:

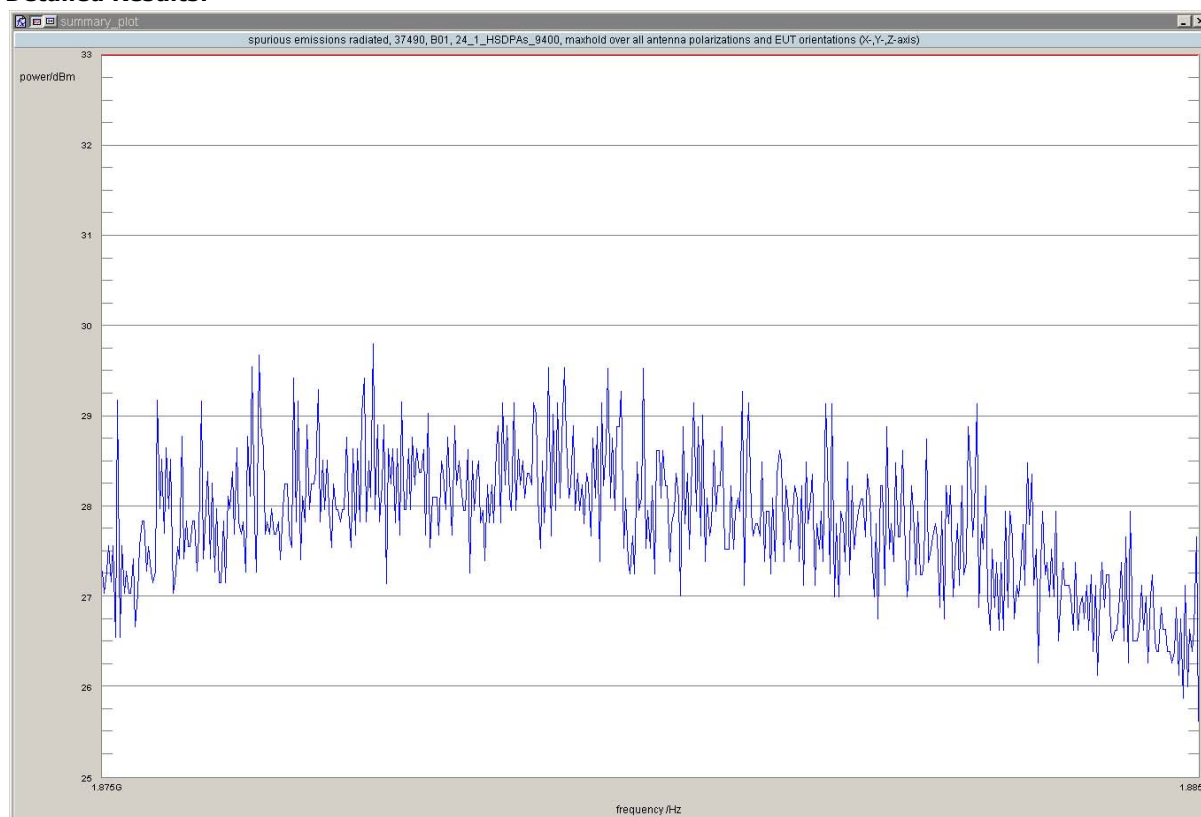

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1877	29.80	33.00	3.20	-60.0	horizontal	horizontal	passed
rms	maxhold	10000	1881	17.05	33.00	15.95	-60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

Result: Passed  
Setup No.: A01\_FCCcond2  
Date of Test: 2011/07/12 11:43  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24

### Detailed Results:

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.62	21.62	19.48	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_1, Channel = 9538, Frequency = 1907.6MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/22 11:18

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

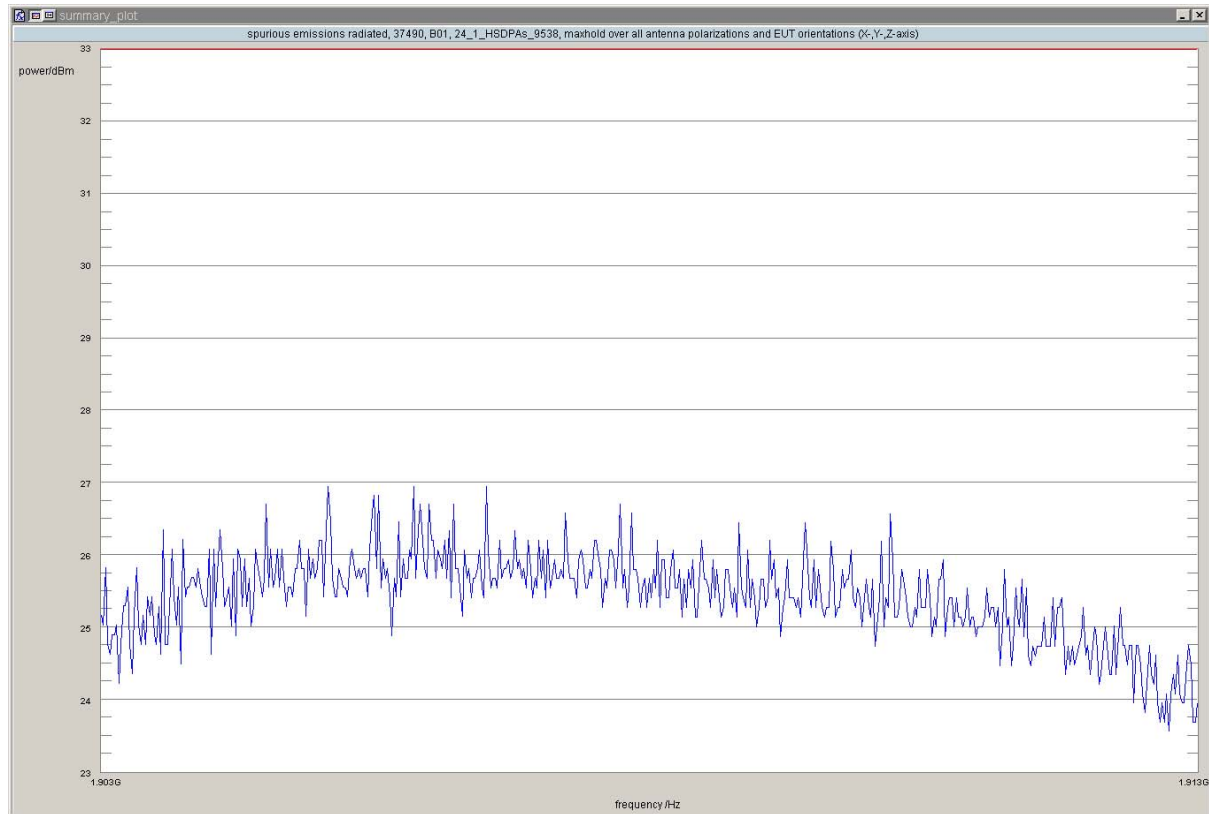

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1905	26.95	33.00	6.05	-30.0	horizontal	vertical	passed
rms	maxhold	10000	1907	20.83	33.00	12.17	-30.0	horizontal	vertical	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_2, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:46  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.06	21.06	18.92	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_2, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:47  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.40	21.40	19.26	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_2, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:46  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.07	21.07	18.93	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_3, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:48  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	18.96	20.96	18.82	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_3, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:48  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.39	21.39	19.25	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_3, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:47  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.12	21.12	18.98	EIRP 33	passed

antenna gain = 2.00 dBi



**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_4, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:49  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.01	21.01	18.87	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_4, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:50  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.43	21.43	19.29	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSDPA\_subtest\_4, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/12 11:49  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.08	21.08	18.94	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_1, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:30  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.09	21.09	18.95	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_1, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:30  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.14	21.14	19.00	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_1, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:29  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	18.82	20.82	18.68	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_2, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:32  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.10	19.10	16.96	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_2, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:32  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.54	19.54	17.40	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_2, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:31  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.24	19.24	17.10	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_3, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:33  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.87	19.87	17.73	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_3, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:38  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	18.52	20.52	18.38	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_3, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:33  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	18.04	20.04	17.90	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_4, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:40  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.72	19.72	17.58	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_4, Channel = 9400, Frequency = 1880MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:40  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	18.23	20.23	18.09	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_4, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_FCCcond2  
*Date of Test:* 2011/07/18 11:39  
*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	17.87	19.87	17.73	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed

*Setup No.:* A01\_FCCcond2

*Date of Test:* 2011/07/18 11:41

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

#### Detailed Results:

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.13	21.13	18.99	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9262, Frequency = 1852.4MHz, Method = radiated**

*Result:* Passed


*Setup No.:* B01\_PoP

*Date of Test:* 2011/06/22 12:47

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

### Detailed Results:

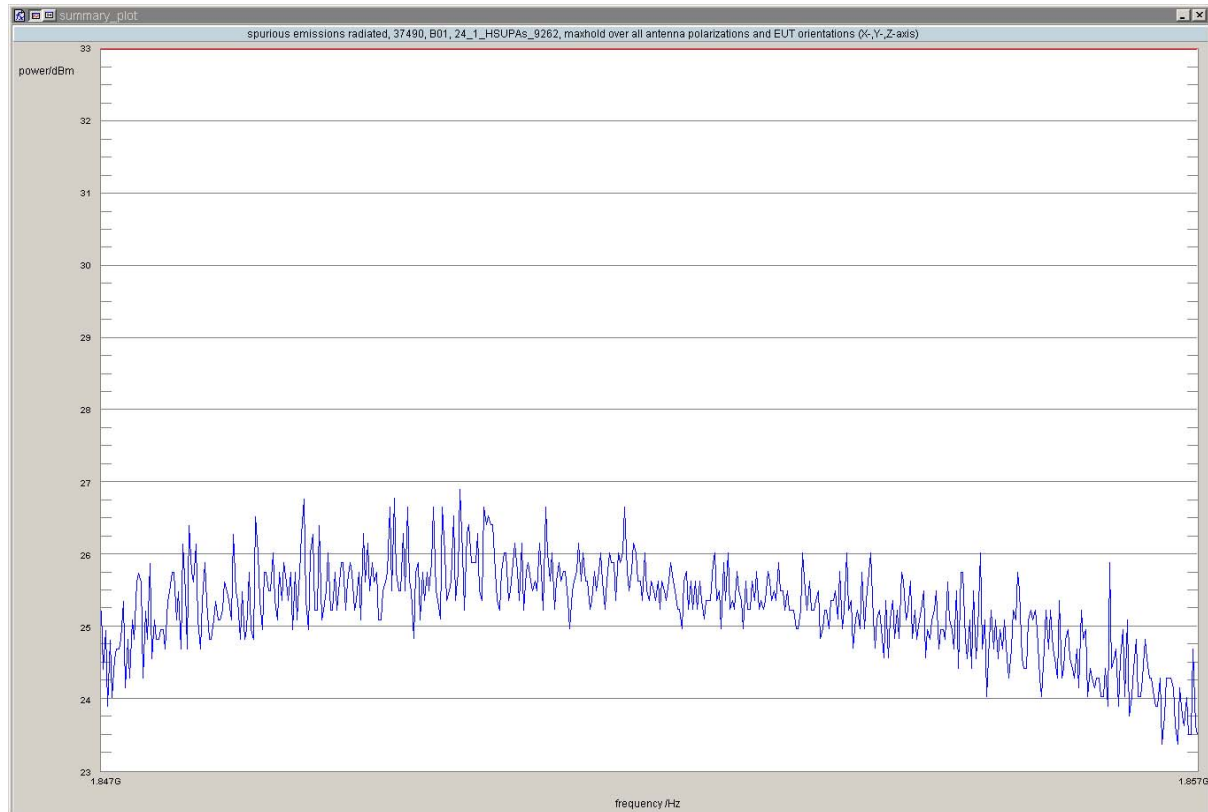

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1851	26.90	33.00	6.10	-30.0	horizontal	horizontal	passed
rms	maxhold	10000	1852	13.93	33.00	19.07	-30.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9400, Frequency = 1880MHz, Method = conducted**

Result: Passed

Setup No.: A01\_FCCcond2

Date of Test: 2011/07/18 11:42

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:


method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.61	21.61	19.47	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9400, Frequency = 1880MHz, Method = radiated**

Result: Passed  
Setup No.: B01\_PoP  
Date of Test: 2011/06/22 13:21  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24

#### Detailed Results:

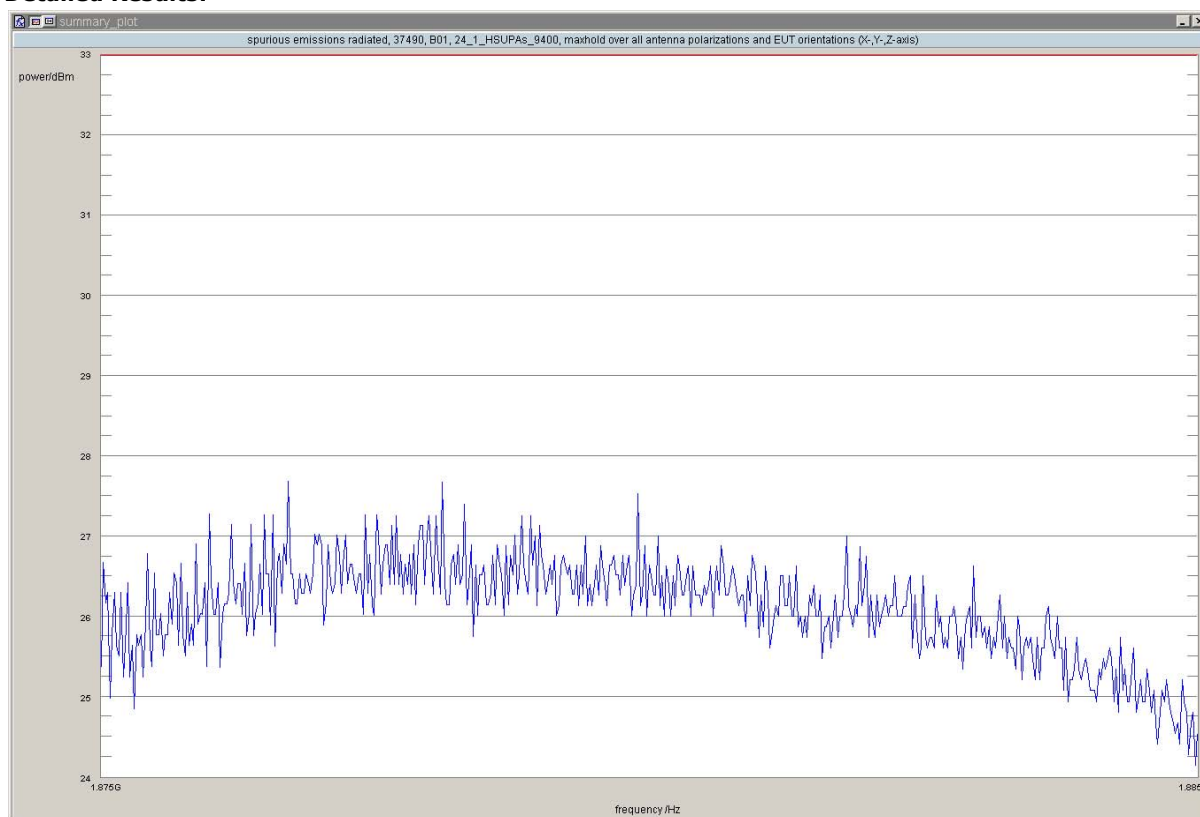

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1877	27.69	33.00	5.31	60.0	horizontal	horizontal	passed
rms	maxhold	10000	1879	16.79	33.00	16.21	60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

Result: Passed  
Setup No.: A01\_FCCcond2  
Date of Test: 2011/07/18 11:41  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24



### Detailed Results:

method	conducted value / dBm	value EIRP /dBm	value ERP /dBm	limit /dBm	verdict
rms	19.18	21.18	19.04	EIRP 33	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = HSUPA\_subtest\_5, Channel = 9538, Frequency = 1907.6MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/22 13:57

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

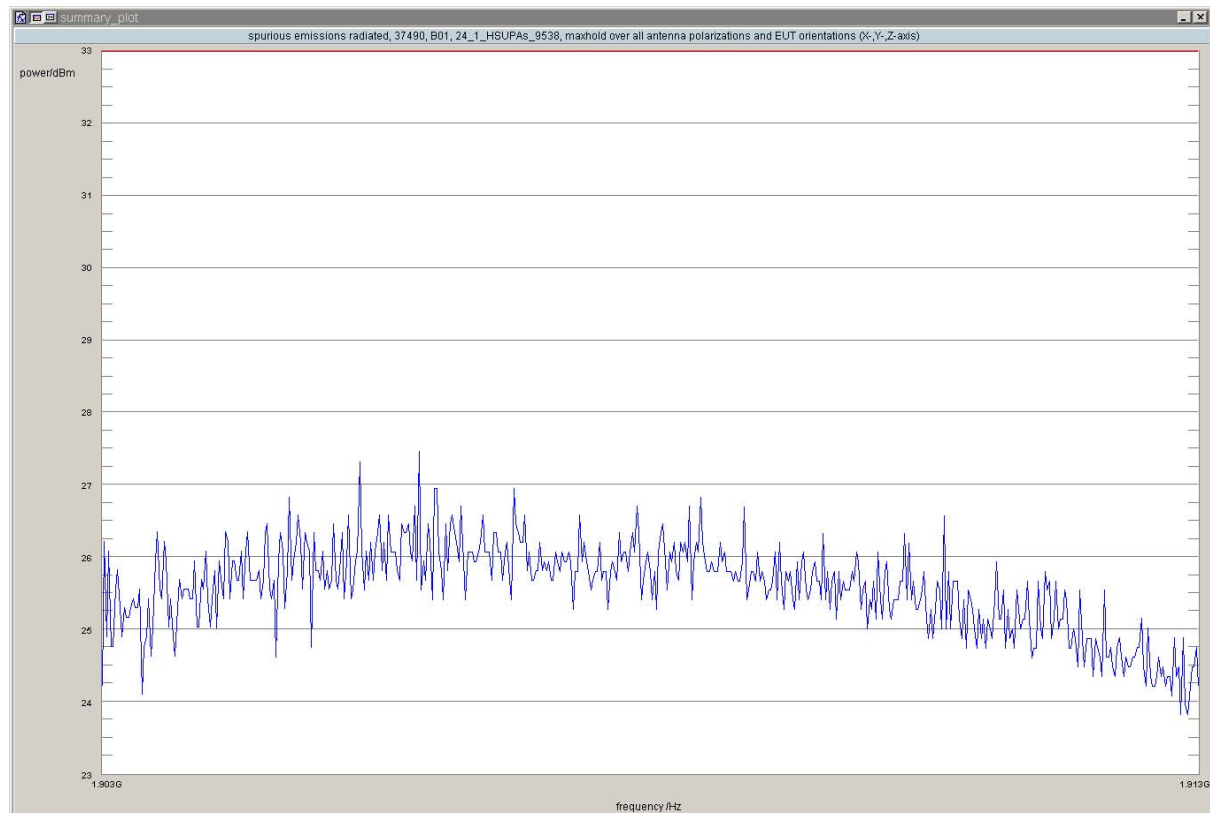

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1905	27.46	33.00	5.54	45.0	horizontal	horizontal	passed
rms	maxhold	10000	1907	14.64	33.00	18.36	45.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz, Method = conducted**

*Result:* Passed

*Setup No.:* A01\_FCCcond2

*Date of Test:* 2011/08/02 11:27

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

**Detailed Results:**

method	conducted value / dBm	verdict
rms	19.30	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz, Method = radiated**

*Result:* Passed


*Setup No.:* B01\_PoP

*Date of Test:* 2011/06/22 7:47

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

### Detailed Results:

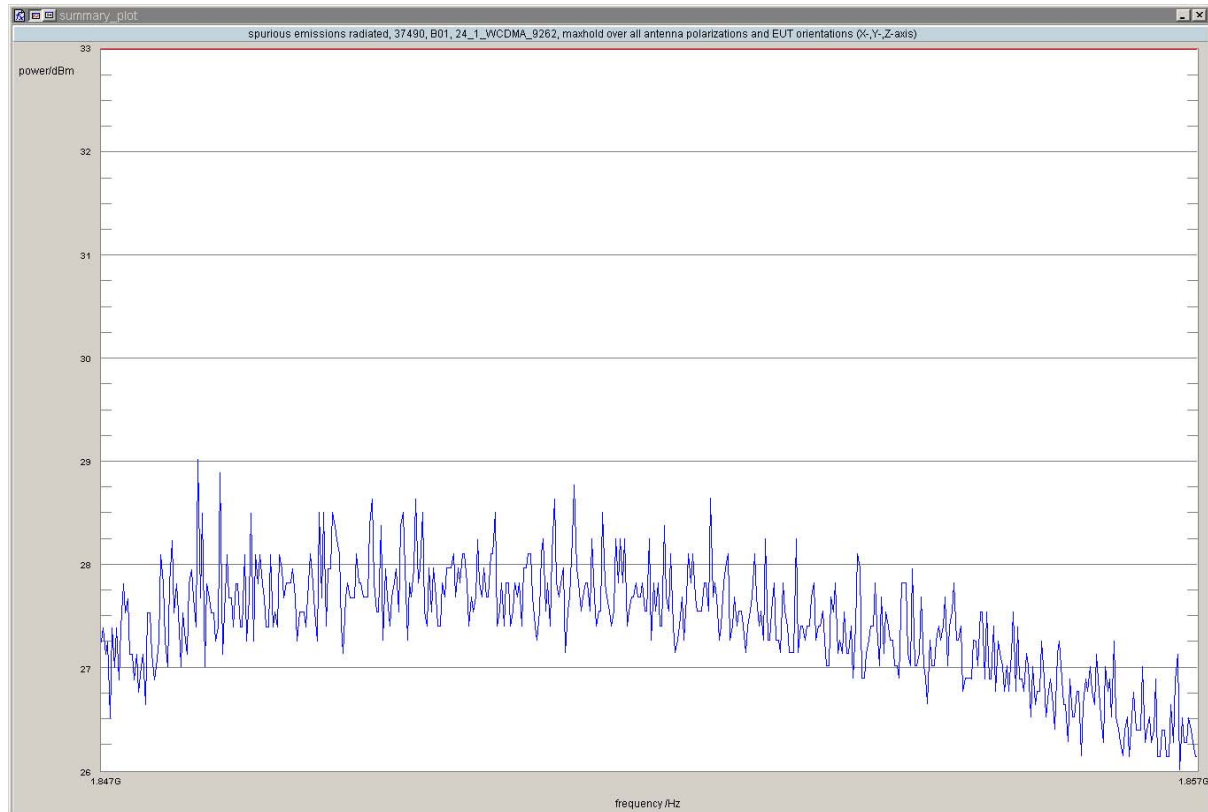

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1848	29.02	33.00	3.98	-60.0	horizontal	horizontal	passed
rms	maxhold	10000	1852	23.09	33.00	9.91	-60.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz, Method = conducted**

Result: Passed

Setup No.: A01\_FCCcond2

Date of Test: 2011/08/02 11:27

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

method	conducted value / dBm	verdict
rms	20.20	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/22 8:33

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

**Detailed Results:**

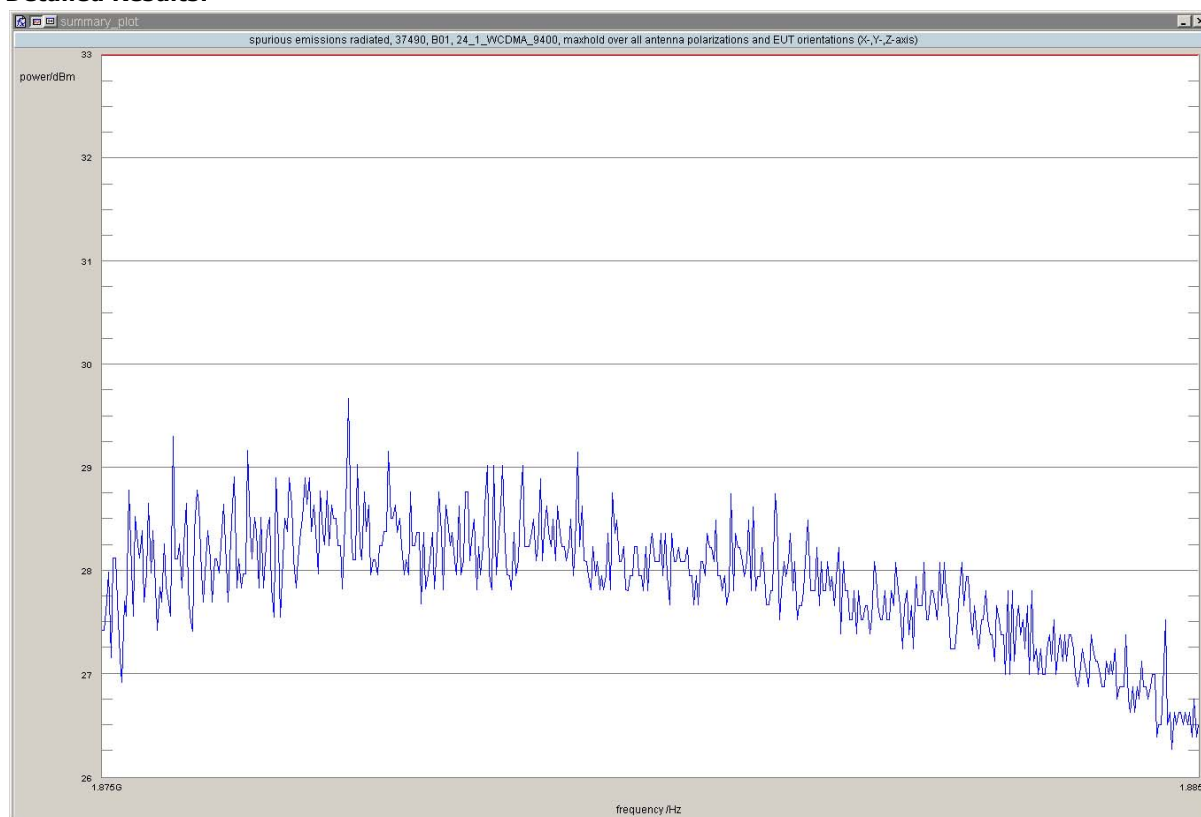

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1877	29.67	33.00	3.33	-45.0	horizontal	horizontal	passed
rms	maxhold	10000	1881	22.56	33.00	10.44	-45.0	horizontal	horizontal	passed

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz, Method = conducted**

Result: Passed

Setup No.: A01\_FCCcond2

Date of Test: 2011/08/02 11:26

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

method	conducted value / dBm	verdict
rms	19.70	passed

antenna gain = 2.00 dBi

**Test: 24.1; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz, Method = radiated**

Result: Passed


Setup No.: B01\_PoP

Date of Test: 2011/06/22 9:05

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

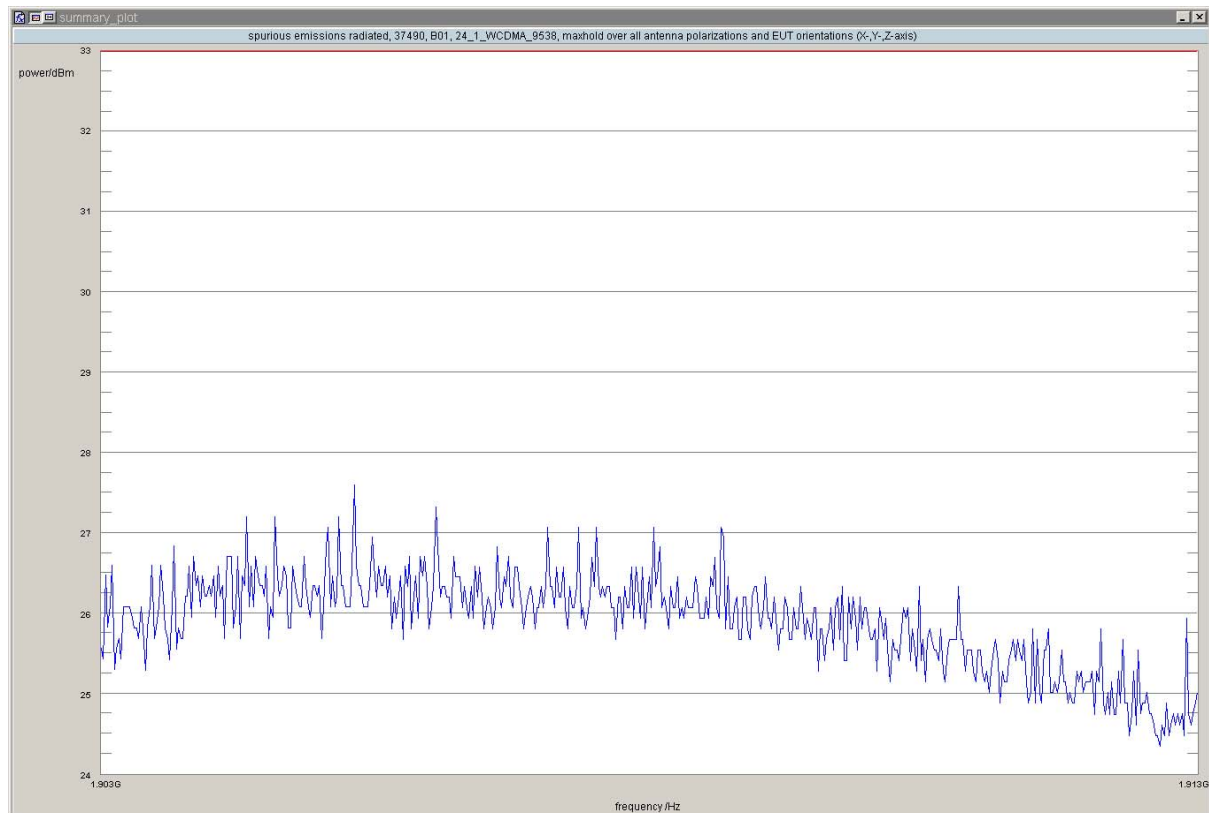


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	10000	1905	27.60	33.00	5.40	-45.0	horizontal	horizontal	passed
rms	maxhold	10000	1907	17.22	33.00	15.78	-45.0	horizontal	horizontal	passed

### 3.6.2 24.4 Field strength of spurious radiation §2.1053, §24.238

**Test: 24.4; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz**

Result: Passed  
Setup No.: B01\_rad  
Date of Test: 2011/10/20 12:23  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24

#### Detailed Results:

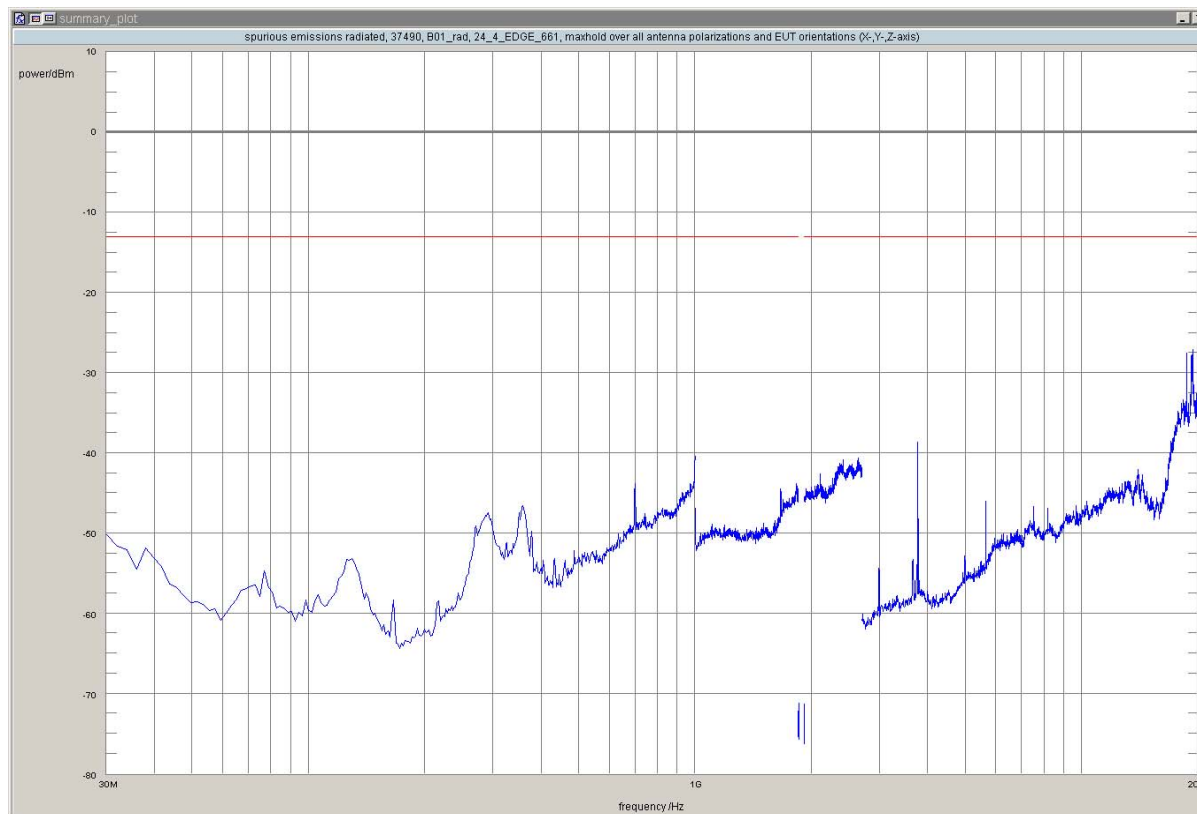

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	18653.3	-27.54	-13.00	14.54	0.0	horizontal	vertical	passed
peak	maxhold	1000	19214.4	-28.01	-13.00	15.01	90.0	horizontal	vertical	passed
peak	maxhold	1000	19326.7	-27.11	-13.00	14.11	-120.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

**Test: 24.4; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz**


Result: Passed  
Setup No.: B01\_rad  
Date of Test: 2011/07/29 20:05  
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES  
Test Specification: FCC part 2 and 24

### Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	2439.1	-9.44	-13.00	-3.56	90.0	horizontal	vertical	*
peak	maxhold	1000	18653.3	-22.16	-13.00	9.16	-120.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-20.97	-13.00	7.97	0.0	vertical	horizontal	passed
peak	maxhold	1000	19326.7	-19.98	-13.00	6.98	-135.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

\* the found emission is a intentional emission of the WLAN transmitter

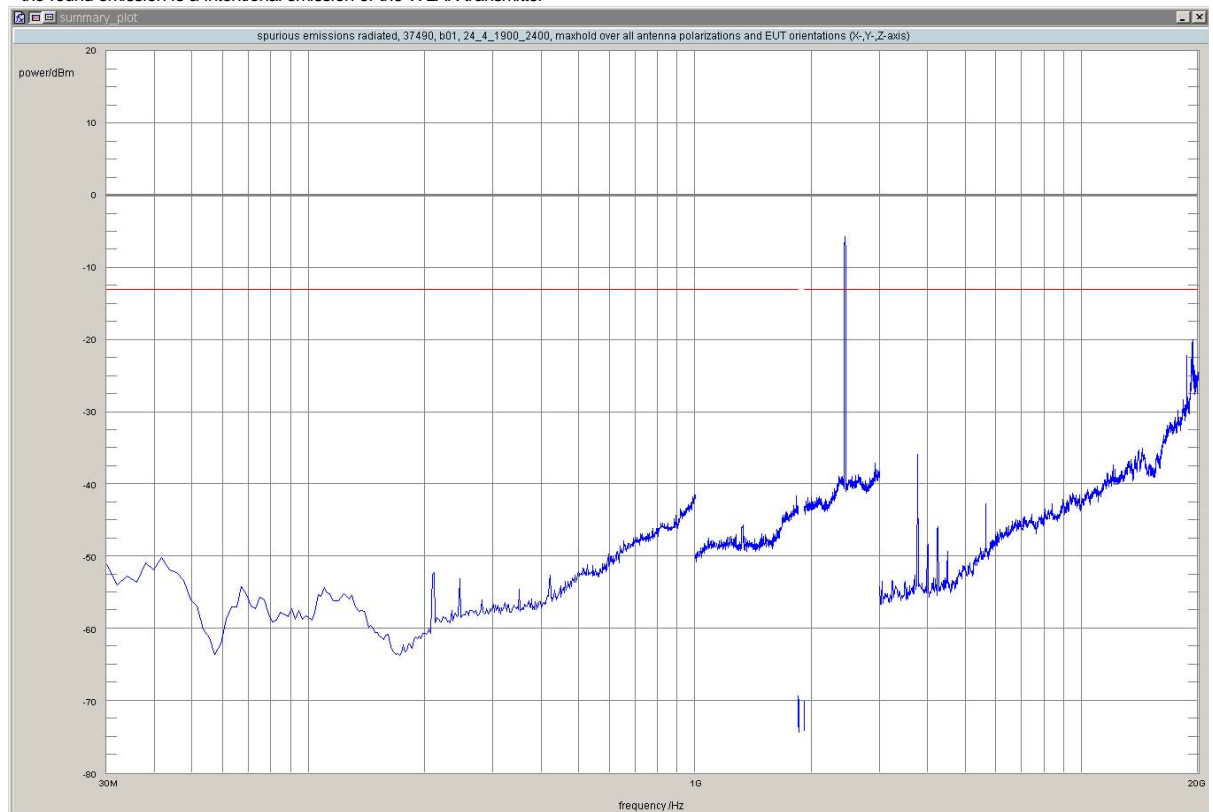

**Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz**

Result: Passed


Setup No.: B01\_rad

Date of Test: 2011/10/20 16:21

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

### Detailed Results:

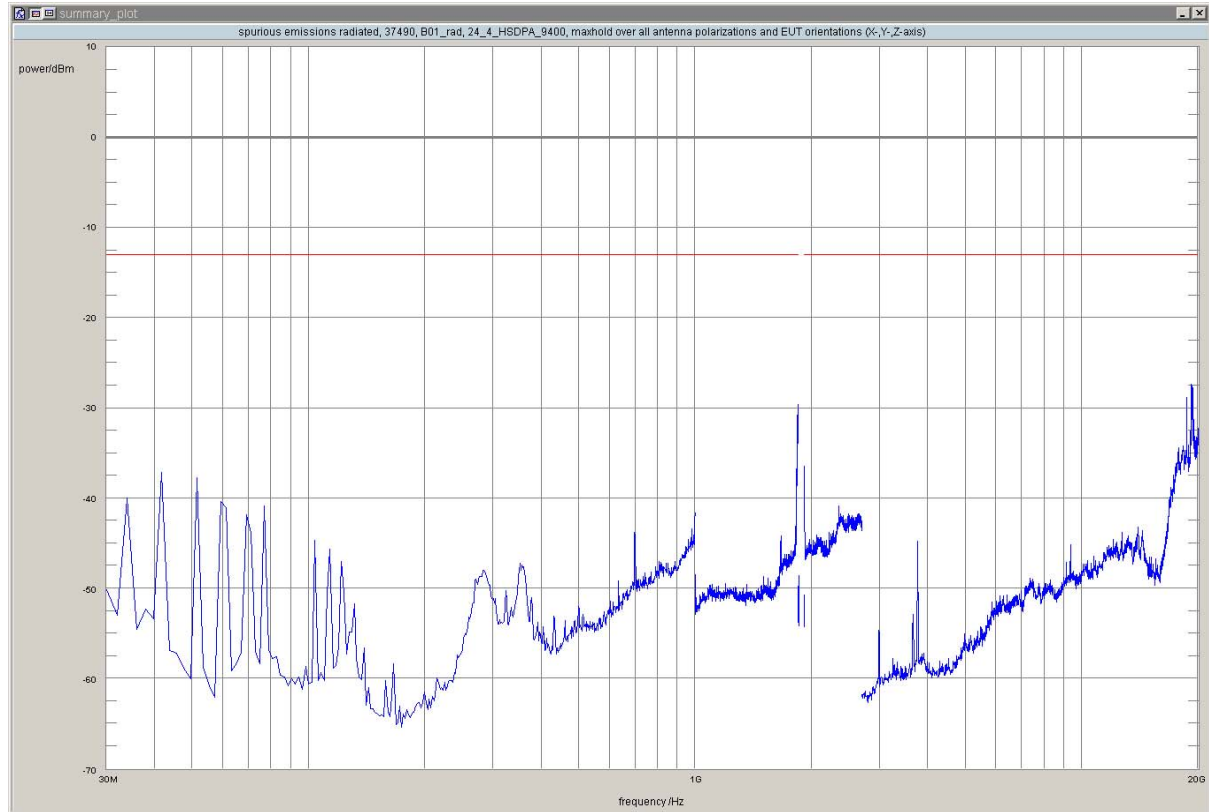

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	1838.8	-30.76	-13.00	17.76	-120.0	horizontal	horizontal	passed
peak	maxhold	1000	1842.2	-32.42	-13.00	19.42	90.0	horizontal	vertical	passed
peak	maxhold	1000	1849.0	-29.47	-13.00	16.47	-120.0	horizontal	horizontal	passed
peak	maxhold	1000	18653.3	-28.85	-13.00	15.85	135.0	vertical	vertical	passed
peak	maxhold	1000	19214.4	-27.38	-13.00	14.38	60.0	vertical	horizontal	passed
peak	maxhold	1000	19228.5	-27.65	-13.00	14.65	-135.0	horizontal	vertical	passed
peak	maxhold	1000	19312.6	-28.11	-13.00	15.11	120.0	horizontal	horizontal	passed
peak	maxhold	1000	19326.7	-27.71	-13.00	14.71	-90.0	vertical	vertical	passed
peak	maxhold	1000	19340.7	-28.16	-13.00	15.16	-180.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

**Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz**

*Result:* Passed

*Setup No.:* B01\_rad


*Date of Test:* 2011/10/20 17:38

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24



### Detailed Results:

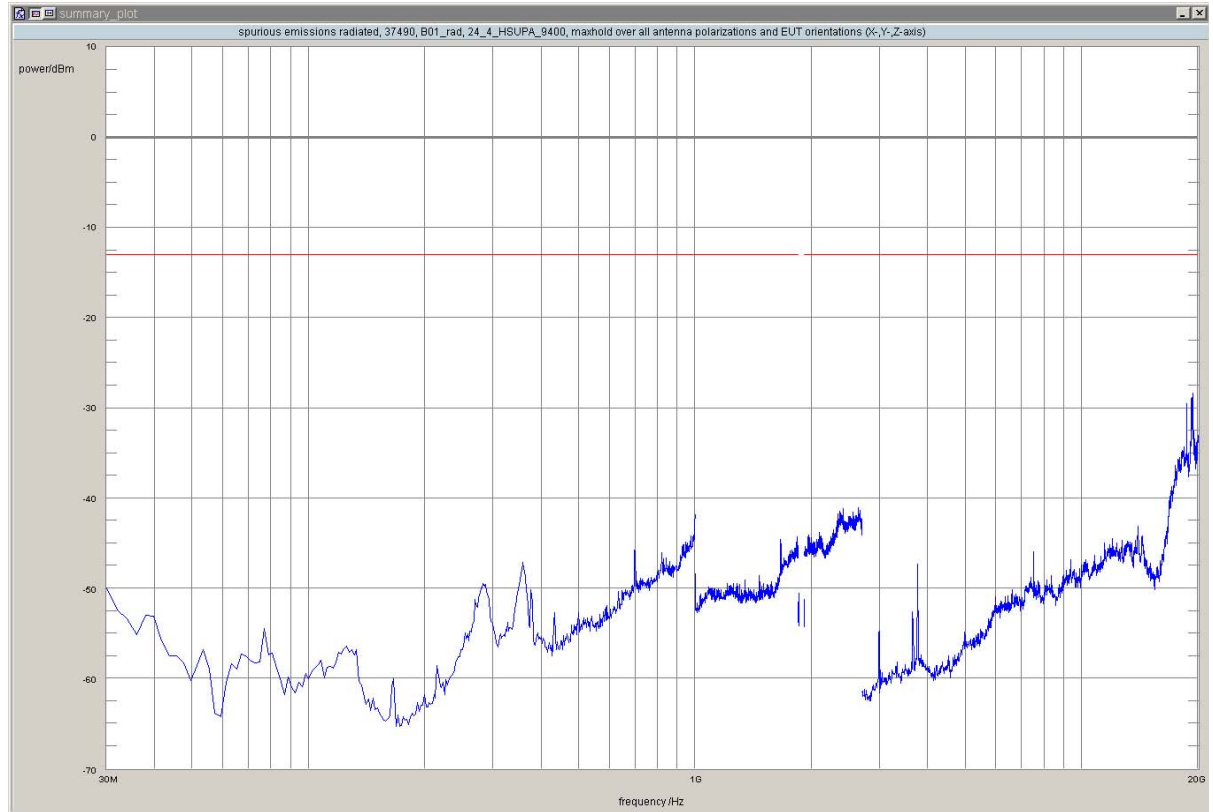

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	18653.3	-29.53	-13.00	16.53	-180.0	horizontal	vertical	passed
peak	maxhold	1000	19214.4	-29.04	-13.00	16.04	45.0	vertical	vertical	passed
peak	maxhold	1000	19228.5	-28.83	-13.00	15.83	120.0	vertical	horizontal	passed
peak	maxhold	1000	19312.6	-29.37	-13.00	16.37	135.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-28.38	-13.00	15.38	0.0	horizontal	vertical	passed
peak	maxhold	1000	19340.7	-28.91	-13.00	15.91	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

**Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz**

*Result:* Passed


*Setup No.:* B01\_rad

*Date of Test:* 2011/10/20 15:05

*Body:* FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

*Test Specification:* FCC part 2 and 24

# Detailed Results:

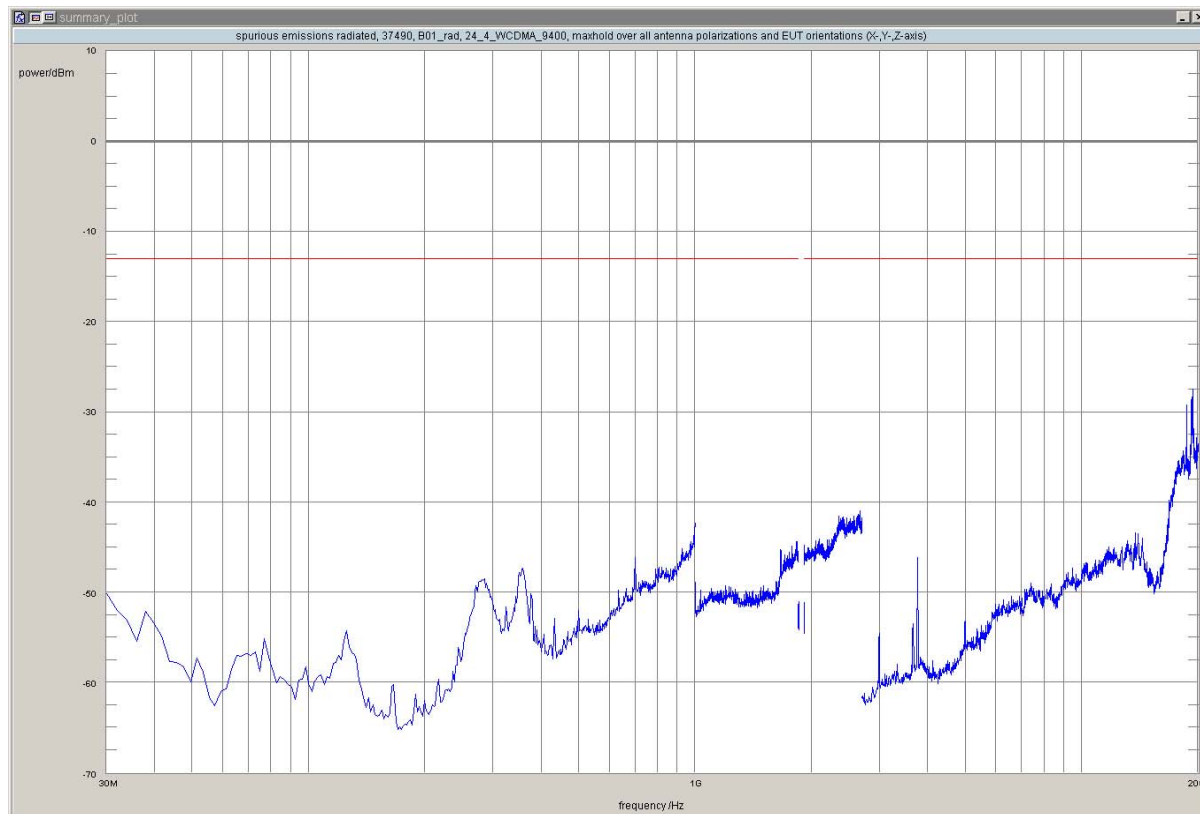

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	18653.3	-29.18	-13.00	16.18	-60.0	vertical	horizontal	passed
peak	maxhold	1000	19214.4	-28.64	-13.00	15.64	60.0	vertical	horizontal	passed
peak	maxhold	1000	19228.5	-29.14	-13.00	16.14	-180.0	vertical	vertical	passed
peak	maxhold	1000	19326.7	-27.41	-13.00	14.41	0.0	vertical	vertical	passed
peak	maxhold	1000	19340.7	-29.48	-13.00	16.48	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Frankonia
<b>Description:</b>	Anechoic Chamber for radiated testing
<b>Type:</b>	10.58x6.38x6 m <sup>3</sup>

#### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

#### Test Equipment Auxiliary Equipment for Radiated emissions

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Description:</b>	Equipment for emission measurements
<b>Serial Number:</b>	see single devices

#### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard Calibration		2008/10/27 2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/05/11 2011/11/10
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/05/11 2011/11/10
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/05/11 2011/11/10
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
	Path Calibration		2011/05/11 2011/11/10
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
	Calibration Details		Last Execution Next Execution
	Path Calibration		2011/05/11 2011/11/10
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Execution
	Standard Calibration		2009/04/16 2012/04/15
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Execution
	Standard Calibration		2009/04/28 2012/04/27
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
	Calibration Details		Last Execution Next Execution
	Path Calibration		2011/05/11 2011/11/10
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
	Calibration Details		Last Execution Next Execution
	Path Calibration		2011/05/11 2011/11/10
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
	Calibration Details		Last Execution Next Execution
	Path Calibration		2011/05/11 2011/11/10
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
	Calibration Details		Last Execution Next Execution
	Path Calibration		2011/05/11 2011/11/10
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Execution
	Standard Calibration		2009/05/27 2012/05/26
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Execution
	DKD calibration		2008/10/07 2011/10/06
Network Analyzer	E5071B	MY42200813	Agilent
	Calibration Details		Last Execution Next Execution
	Standard Calibration		2010/11/09 2011/11/09
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

## Test Equipment Auxiliary Test Equipment

<b>Lab ID:</b>	<b>Lab 1, Lab 2</b>
<b>Manufacturer:</b>	see single devices
<b>Description:</b>	Single Devices for various Test Equipment
<b>Type:</b>	various
<b>Serial Number:</b>	none

## Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
<i>Calibration Details</i>		<i>Last Execution Next Execution</i>	
Standard calibration		2009/10/07	2011/10/06
Customized calibration		2011/10/19	2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

## Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2

**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard Calibration		2008/08/14 2011/08/13
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03

## Test Equipment Emission measurement devices

**Lab ID:** **Lab 1**  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Personal Computer	Dell	30304832059	Dell
Power Sensor	NRV-Z1	836219/005	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Execution</i>
Standard Calibration			2009/10/20 2011/10/19
Powermeter	NRVS	836333/064	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Execution</i>
Standard calibration			2009/10/15 2011/10/14
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution Next Execution</i>
Standard Calibration			2009/12/03 2011/12/02

## Test Equipment Radio Lab Test Equipment

**Lab ID:** **Lab 2**  
**Description:** Radio Lab Test Equipment

### Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Coax Cable Huber&Suhner	Sucotest 2,0m		Rosenberger Micro-Coax
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Path Calibration		2011/01/10 2011/07/09
Power Sensor	NRV-Z1	836219/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard Calibration		2009/10/20 2011/10/19
Powermeter	NRVS	836333/064	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard calibration		2009/10/15 2011/10/14
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFL	2689/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard calibration		2010/06/23 2011/06/22
Signal Generator	SMY02	829309/018	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	standard calibration		2008/10/07 2011/10/06
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG



### Single Devices for Radio Lab Test Equipment (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard calibration		2011/02/10 2013/02/09
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Specific calibration		2010/03/16 2012/03/15
Vector Signal Generator	SMIQ 03B	837747/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Execution</i>
	Standard/DKD Calibration		2008/10/09 2011/10/08

## 4.2 Laboratory Environmental Conditions

<i>Laboratory</i>	<i>Date</i>	<i>Temperature</i>	<i>Humidity</i>	<i>Air Pressure</i>
Lab 1	2011/06/21	26 °C	40 %	1008 hPa
	2011/06/22	26 °C	40 %	1006 hPa
	2011/07/29	26 °C	40 %	1019 hPa
	2011/10/20	23 °C	36 %	1015 hPa
Lab 2	2011/07/12	26 °C	37 %	1008 hPa
	2011/07/18	26 °C	33 %	1009 hPa
	2011/08/02	26 °C	40 %	1016 hPa



---

Reference: MDE\_OPTI\_1101\_FCCf

acc. Title 47 CFR chapter I part 24 subpart E

## **5 Annex**

### **5.1 Additional Information for Report**



#### Summary of Test Results

---

---

The EUT complied with all performed tests as listed in the summary section of this report.

---

#### Technical Report Summary

---

---

#### Type of Authorization :

Certification for a GSM cellular radiotelephone device

#### Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

#### Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

#### Part 24, Subpart E - Broadband PCS

- § 24.232 Power and antenna height limits
- § 24.235 Frequency stability
- § 24.236 Field strength limits
- § 24.238 Emission limitations for Broadband PCS equipment

#### additional documents

ANSI TIA-603-C-2004

#### Description of Methods of Measurements

---

---

#### RF Power Output

---

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1046

#### Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
  - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
  - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a CMU200.

#### Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
  - 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a  $\lambda/2$  dipole).
  - 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
  - 5) The test procedure according to TIA-603-C-2004 has been considered.

#### Test Requirements / Limits

##### §2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

##### §24.232 Power and antenna height limits

(c) Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

---

#### Emission and Occupied Bandwidth

---

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1049

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
  - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
  - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
    - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth

acc. Title 47 CFR chapter I part 24 subpart E

- 5) The maximum spectral level of the modulated signal was recorded as the reference.
- 6) The emission bandwidth is measured as follows:  
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
- 7) The occupied bandwidth (99% Bandwidth) is measured as follows:  
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

#### Test Requirements / Limits

##### § 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

- (h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

---

#### Spurious emissions at antenna terminals

---

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1051

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.  
Important Settings:
  - Output Power: Maximum
  - Channel: please refer to the detailed results
- 4) Important Analyser Settings
  - [Resolution Bandwidth]:
    - a) [ $\geq 1\%$  of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,
    - b) otherwise [1 MHz]
    - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
  - Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 20 GHz (up to the 10th harmonic) during the call was established

#### Test Requirements / Limits

##### § 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

##### § 2.1057 Frequency spectrum to be investigated.

acc. Title 47 CFR chapter I part 24 subpart E

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

#### § 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

---

#### Field strength of spurious radiation

---

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1053

#### Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a  $\lambda/2$  dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 20 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case

acc. Title 47 CFR chapter I part 24 subpart E

peaks all orientations (X, Y, Z) of the EUT have been measured.

#### Test Requirements / Limits

##### § 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

(2) All equipment operating on frequencies higher than 25 MHz.

##### § 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

##### § 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dBµV/m (field strength) in a distance of 3 m.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

---

Frequency stability

---

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1055

#### Test Description

- 1) The EUT was placed inside a temperature chamber.
  - 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
  - 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.
  - 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Mid Channel
- 5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.
  - 6) This measurement procedure was performed for temperature variation from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  in increments of  $10^{\circ}\text{C}$ , if not otherwise stated in the detailed results.
- When the EUT did not operate at certain temperature levels, these measurements were left out.

#### Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
  - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}$  centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.
  - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
    - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
    - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
    - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

#### §24.235 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

7Layers interpretation of limit:

To ensure that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block following limit was used:

$\pm 2.5 \text{ ppm} = 4700 \text{ Hz}$  for a frequency of 1880.0 MHz

in accordance with FCC Part 22, Subpart H, §22.355, table C-1: Frequency tolerance for the carrier frequency of mobile transmitters in the Public Mobile Service in the frequency range 821 to 896 MHz.

---

Band edge compliance

---



Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §24.238

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.  
Important Settings:
  - Output Power: Maximum
  - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
  - Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

#### Test Requirements / Limits

§ 24.238 Effective radiated power limits

Refer to chapter "Field strength of spurious radiation".

---

Subtests HSDPA

---

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note 1: <math>\gamma_{ACK}</math>, <math>\gamma_{NACK}</math> and <math>\gamma_{CQI} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, <math>\gamma_{ACK}</math> and <math>\gamma_{NACK} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>, and <math>\gamma_{CQI} = 24/15</math> with <math>\beta_{hs} = 24/15 * \beta_c</math>.</p> <p>Note 3: CM = 1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> <p>Note 4: For subtest 2 the <math>\beta_c/\beta_d</math> ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to <math>\beta_c = 11/15</math> and <math>\beta_d = 15/15</math>.</p>							

---


Subtests HSUPA

---

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	2
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1


Subtest	Max UL Data Rate (kb/s)	$\beta_c/\beta_d$	$\beta_{hs}$	$\beta_{ed}$	CM
1	242.1	11/15	22/15	1309/225	1
2	161.3	6/15	12/15	94/75	3
3	524.7	15/9	30/15	47/15	2
4	197.6	2/15	4/15	56/75	3
5	299.6	15/15	30/15	134/15	1

## Setup Drawings

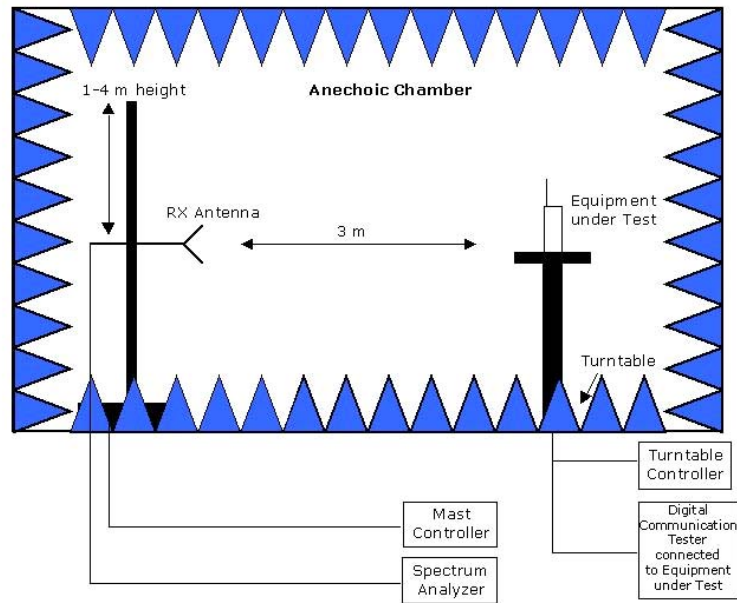


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Principle set-up for radiated measurements

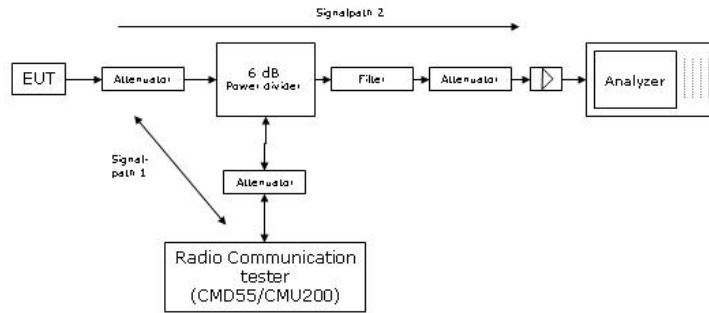

**Remark:** Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

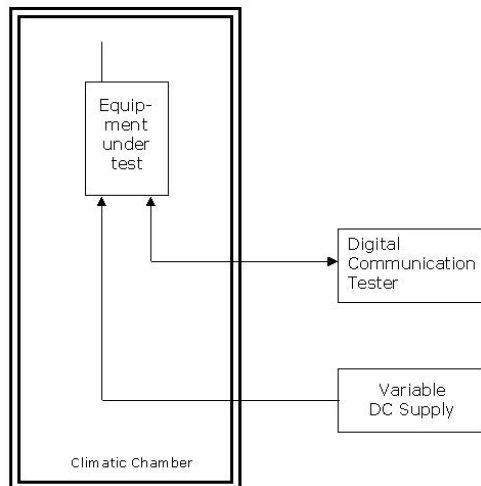

Principle set-up for tests under extreme test conditions

### Comparison RF conducted output power

EUT Mode	Frequency (MHz)	Channel	av/dBm (1TS) FCC ID: NCMOGI0653	av/dBm (1TS) FCC ID: NCMOGI0643
GPRS 1900	1850.2	512	28.3	28.7
	1880.0	661	28.7	28.9
	1909.8	810	28.8	28.8

EUT Mode	Frequency (MHz)	Channel	av/dBm (1TS) FCC ID: NCMOGI0653	av/dBm (1TS) FCC ID: NCMOGI0643
EDGE 1900	1850.2	512	25.7	25.6
	1880.0	661	25.5	25.3
	1909.8	810	25.8	25.5

EUT Mode	Frequency (MHz)	Channel	av/dBm FCC ID: NCMOGI0653	rms/dBm FCC ID: NCMOGI0643
WCDMA Band II	1850.2	9262	19.76	19.3
	1880.0	9400	19.77	20.2
	1909.8	9538	19.82	19.7

Mode	Sub-test	rms/dBm (FCC ID:NCMOGI0653) Channel			rms/dBm (FCC ID:NCMOGI0643) Channel		
		9262	9400	9538	9262	9400	9538
HSDPA	1	20.05	20.03	20.09	19.76	19.84	19.62
	2	19.64	19.63	19.67	19.06	19.40	19.07
	3	19.57	19.58	19.56	18.96	19.39	19.12
	4	19.64	19.59	19.68	19.01	19.43	19.08

Mode	Sub-test	rms/dBm (FCC ID:NCMOGI0653) Channel			rms/dBm (FCC ID:NCMOGI0643) Channel		
		9262	9400	9538	9262	9400	9538
HSUPA	1	19.78	19.72	19.74	19.09	19.14	18.82
	2	17.88	17.89	17.82	17.10	17.54	17.24
	3	18.89	18.81	18.85	17.87	18.52	18.04
	4	18.92	18.87	18.85	17.72	18.23	17.87
	5	19.49	19.45	19.47	19.13	19.61	19.18

## 6 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	3
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	4
2.3 OUT Features	5
2.4 Auxiliary Equipment	5
2.5 Setups used for Testing	6
3 Results	6
3.1 General	6
3.2 List of the Applicable Body	7
3.3 List of Test Specification	7
3.4 Summary	8
3.5 Detailed Footnotes	10
3.6 Detailed Results	11
3.6.1 24.1 RF Power Output §2.1046, §24.232	11
3.6.2 24.4 Field strength of spurious radiation §2.1053, §24.238	38
4 Test Equipment Details	43
4.1 List of Used Test Equipment	43
4.2 Laboratory Environmental Conditions	49
5 Annex	50
5.1 Additional Information for Report	50
6 Index	62