

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E

	OF
Product Name:	mIDentity 3G
Brand Name:	Option
Model Name:	GI0653
Model Difference:	N/A
FCC ID:	NCMOGI0653
Report No.:	EH/2010/90017
Issue Date:	Oct. 06, 2010
FCC Rule Part:	2 , 22H & 24E
Prepared for:	Option NV
	Gaston Geenslaan 14, 3001 Leuven, Belgium
Prepared by:	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is dovised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. | No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台上縣五殿工業區五工路 134 歲

www.tw.sgs.com



FCC ID: NCMOGI0653

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 2 of 79

VERIFICATION OF COMPLIANCE

Applicant:	Option NV
	Gaston Geenslaan 14, 3001 Leuven, Belgium
Product Name:	mIDentity 3G
Brand Name:	Option
Model No.:	GI0653
Model Difference:	N/A
FCC ID:	NCMOGI0653
File Number:	EH/2010/90017
Date of test:	Sep. 15, 2010 ~ Oct. 01, 2010
Date of EUT Received:	Sep. 15, 2010

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H, PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jason Whe	Date:	Oct. 06, 2010
-	Jason Wu / Asst. Supervisor		
Prepared By:	Alex Hsieh	Date:	Oct. 06, 2010
-	Alex Hsieh / Sr. Engineer		
Approved By:	ALNO HSieh	Date:	Oct. 06, 2010

Arno Hsieh /Asst. Supervisor



Version

Version No.	Date	Description
00	Oct. 06, 2010	Initial creation of document
01	Oct. 21, 2010	According to Option comments on Oct. 21, 2010
02	Oct. 25, 2010	According to Option comments on Oct. 25, 2010
03	Nov. 18, 2010	According to Option comments on Nov. 18, 2010



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 4 of 79

Table of Contents

1.	GEN	ERAL PRODUCT INFORMATION	6
	1.1.	Related Submittal(s) / Grant (s)	. 8
	1.2.	Test Methodology	. 8
	1.3.	Test Facility	. 8
	1.4.	Special Accessories	. 8
	1.5.	Equipment Modifications	. 8
2.	SYST	TEM TEST CONFIGURATION	9
	2.1.	EUT Configuration	. 9
	2.2.	EUT Exercise	. 9
	2.3.	Test Procedure	. 9
	2.4.	Measurement Equipment Used:	10
	2.5.	Configuration of Tested System	12
3.	SUM	MARY OF TEST RESULTS 1	13
4.	DES	CRIPTION OF TEST MODES 1	14
5.	RF P	OWER OUTPUT MEASUREMENT 1	15
	5.1	Standard Applicable:	15
	5.2	Test Set-up:	16
	5.3	Measurement Procedure:	16
	5.4	Measurement Equipment Used:	16
	5.5	Measurement Result:	17
6.	ERP,	EIRP MEASUREMENT	23
	6.1.	Standard Applicable:	23
	6.2.	Test SET-UP (Block Diagram of Configuration):	23
	6.3.	Measurement Procedure:	25
	6.4.	Measurement Equipment Used:	25
	6.5.	Measurement Result:	26
7.	99%	OCCUPIED BANDWIDTH MEASUREMENT	29
	7.1.	Standard Applicable:	29
	7.2.	Test Set-up:	29
	7.3.	Measurement Procedure:	29
	7.4.	Measurement Equipment Used:	29
	7.5.	Measurement Result:	30
8.	OUT	OF BAND EMISSION AT ANTENNA TERMINALS	41
	8.1.	Standard Applicable:	41
	8.2.	Test SET-UP:	
except This do (<u>www.s</u> ment is docum	in full, witho ocument is is gs.com/tern to be treate ent is advise	tated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reprodu tur prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 ssued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.thm</u>) and Terms and Conditions for Electronic Docum <u>ns e-document.thm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic d dd as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/serms</u> , and <u>conditions.thm</u> , and Terms and Conditions, Any holder of ad that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The C sibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台兆報五傑本系 134 號	ients locu- f this Com-



FCC ID: NCMOGI0653

	8.3.	Measurement Procedure:	
	8.4.	Measurement Equipment Used:	
	8.5.	Measurement Result:	43
9.	FIEL	D STRENGTH OF SPURIOUS RADIATION MEASUREMENT	55
	9.1.	Standard Applicable:	55
	9.2.	EUT Setup (Block Diagram of Configuration):	55
	9.3.	Measurement Procedure:	56
	9.4.	Measurement Equipment Used:	56
	9.5.	Measurement Result:	56
10.	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	75
	10.1.	Standard Applicable:	
	10.2.	Test Set-up:	75
	10.3.	Measurement Procedure:	75
	10.4.	Measurement Equipment Used:	75
	10.5.	Measurement Result:	76
11.	FRE	QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	
	11.1.	Standard Applicable:	
	11.2.	Test Set-up:	78
	11.3.	Measurement Procedure:	
	11.4.	Measurement Equipment Used:	78
	11.5.		



1. GENERAL PRODUCT INFORMATION

General:

Product Name	mIDentity 3G
Brand Name	Option
Model Name	GI0653
Model Difference	N/A
Power Supply	5 V from USB port

GSM and WCDMA:

	Operating Frequency	Rated Power		
	GPRS 850, Class 12 824 MHz– 849MHz		33 dBm	
Cellular Phone Standards Frequency Range and	EDGE 850, Class 12 824.2 MHz– 848.8 MHz		27 dBm	
Power:	GPRS 1900, Class 12	1850MHz – 1910MHz	30 dBm	
	EDGE 1900, Class 12	1850.2MHz – 1909.8MHz	26 dBm	
	WCDMA/HSUPA/HSDPA Band II	1852.4MHz – 1907.6MHz	21 dBm	
Hardware Version:	2.0.2.0			
Software Version:	N/A			
Type of Emission	GPRS 850: 245KGXW, GPRS 1900 :246KGXW EDGE 850: 246KG7W, EDGE 1900:244KG7W WCDMA Band II: 4M15F9W,HSUPA Band II: 4M14F9W			
IMEI:	004400013070006			



Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
GPRS 850	5Vdc	270
EDGE 850	5Vdc	220
GPRS 1900	5Vdc	230
EDGE 1900	5Vdc	210
WCDMA B2	5Vdc	350
HSUPA B2	5Vdc	300

This test report applies for GPRS/EDGE 850/1900, WCDMA/HSDPA/HSUPA band II.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>NCMOGI0653</u> filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules.

1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures document of TIA/EIA 603C and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

The Output power Procedure of KDB941225 (SAR Measurement Procedures for 3G devices, WCDMA / HSDPA) was used for EUT and Base station setting.

1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

All equipment is calibrated externally and traceable to SI (International System of Unit).

1.4. Special Accessories

Not available for this EUT intended for grant.

1.5. Equipment Modifications

Not available for this EUT intended for grant.



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 9 of 79

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 AC Power Line Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

2.3.3 Radiated Emissions (ERP/EIRP):

The EUT is a placed on as turn table which is 80 cm above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both Horizontal and Vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 2 of TIA/EIA 603C.



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 10 of 79

2.4. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2010	01/22/2012
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2010	05/13/2012
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2010	01/04/2011
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2010	01/04/2011
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2010	04/13/2012
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2010	02/04/2012
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2010	07/04/2011
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011
DC Power Supply	HP	6038A	2929A-07548	06/27/2010	06/26/2011
DC Power Supply	Topward	3303D	981327	10/26/2009	10/25/2010




Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 11 of 79

ERP, EIRP MEASUREMENT EQUIPMENT List 966 Chamber					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2012
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2010	07/09/2012
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2010	07/09/2012
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2010	01/21/2012
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012
Signal Generator	R&S	SMR40	100210	01/22/2010	01/21/2012
Signal Generator	Agilent	E4438C	MY45093613	06/11/2010	06/10/2011
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2009	11/29/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2010	05/12/2012
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010



2.5. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)



Remote Side



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Com- munication Tester	R&S	CMU200	102189	shielded	Un-shielded
2.	Notebook	IBM	T40	99HCYF4	N/A	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a)	RF Power Output	Compliant
§2.1046(a)		
§22.913(a)(2)	ERP/ EIRP measurement	Compliant
§24.232(c)		
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051	Out of Band Emissions at Antenna	
§22.917(a)	Terminals and	Compliant
§24.238(a)	Band Edge	
§2.1053		
§22.917(a)	Field Strength of Spurious Radiation	Compliant
§24.238(a)		
§2.1055(a)(1)		
§22.355	Frequency Stability vs. Temperature	Compliant
§24.235		
§2.1055(d)(2)		
§22.355	Frequency Stability vs. Voltage	Compliant
§24.235		

Max ERP/EIRP measurement result:

	dBm		W
GPRS 850 Band	27.94	ERP	0.622
GPRS 1900 Band	24.16	EIRP	0.261
EDGE 850 Band	25.69	ERP	0.371
EDGE 1900 Band	23.30	EIRP	0.214
WCDMA Band II	19.76	EIRP	0.095
HSUPA Band II	19.64	EIRP	0.092



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 14 of 79

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT in lie down position E2 mode for GPRS/EDGE and WCDMA Band II. were reported.



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 15 of 79

5. RF POWER OUTPUT MEASUREMENT

5.1 Standard Applicable:

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(c) Peak Power Measurement

3GPP Power limitation for HSDPA and HSUPA

Maximum Output Powers for HSDPA


Sub-test in ta- ble C.10.1.4	Power	Class 3	Power Class 4		
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)	
1	+24	+1.7/-3.7	+21	+2.7/-2.7	
2	+24	+1.7/-3.7	+21	+2.7/-2.7	
3	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7	
4	+23.5	+2.2/-3.7	+20.5	+3.2/-2.7	


Maximum Output Powers for HSUPA

Sub-test in table C.11.1.3	Power	Class 3	Power Class 4		
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)	
1	+24	+1.7/-6.7	+21	+2.7/-5.7	
2	+22	+3.7/-5.2	+19	+4.7/-4.2	
3	+23	+2.7/-5.2	+20	+3.7/-4.2	
4	+22	+3.7/-5.2	+19	+4.7/-4.2	
5	+24	+1.7/-6.7	+21	+2.7/-5.7	



5.2 Test Set-up:

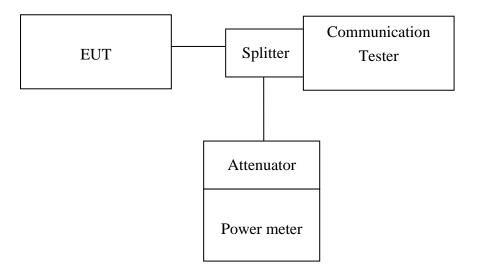



5.3 Measurement Procedure:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading. The Procedure of KDB941225(SAR Measurement Procedures for 3G devices, WCDMA/HSDPA) was used for EUT and Base station setting.RMC 12.2kps is used for this testing

5.4 Measurement Equipment Used:

Refer to section 2.4 in this report



5.5 Measurement Result:

5.1 RF Conducted Output Power

5.1.1.: GPRS/EDGE (GMSK; 8-PSK)

Result:

EUT Mode	Frequency (MHz)	СН	Peak Power (1TS) (dBm)	Peak Power (2TS) (dBm)	Peak Power (3TS) (dBm)	Peak Power (4TS) (dBm)
GPRS 850	824.2	128	32.30	28.80	27.00	25.70
	836.6	190	32.30	28.80	26.90	25.80
	848.8	251	32.60	29.30	26.90	25.70

EUT Mode	Frequency (MHz)	СН	Average Power (1TS) (dBm)	Average Power (2TS) (dBm)	Average Power (3TS) (dBm)	Average Power (4TS) (dBm)
GPRS 850	824.2	128	32.00	28.60	26.80	25.50
	836.6	190	32.00	28.60	26.70	25.60
	848.8	251	32.30	29.10	26.70	25.50

EUT Mode	Frequency (MHz)	СН	Peak Power (1TS) (dBm)	Peak Power (2TS) (dBm)	Peak Power (3TS) (dBm)	Peak Power (4TS) (dBm)
EDGE 850	824.2	128	30.20	29.50	27.60	26.30
	836.6	190	30.20	29.50	27.50	26.40
	848.8	251	30.30	29.60	27.60	26.50

EUT Mode	Frequency (MHz)	СН	Average Power (1TS) (dBm)	Average Power (2TS) (dBm)	Average Power (3TS) (dBm)	Average Power (4TS) (dBm)
EDGE 850	824.2	128	27.00	26.30	24.40	23.10
	836.6	190	27.00	26.30	24.30	23.20
	848.8	251	27.00	26.40	24.40	23.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.osm/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號

台灣檢驗科技股份有限公司 t



EUT Mode	Frequency (MHz)	СН	Peak Power (1TS) (dBm)	Peak Power (2TS) (dBm)	Peak Power (3TS) (dBm)	Peak Power (4TS) (dBm)
	1850.2	512	28.50	25.10	23.10	22.10
GPRS 1900	1880.0	661	28.70	25.20	23.10	21.80
	1909.8	810	29.00	25.10	23.20	22.00

EUT Mode	Frequency (MHz)	СН	Average Power (1TS) (dBm)	Average Power (2TS) (dBm)	Average Power (3TS) (dBm)	Average Power (4TS) (dBm)
GPRS 1900	1850.2	512	28.30	24.90	22.90	22.00
	1880.0	661	28.70	25.00	22.90	21.60
	1909.8	810	28.80	24.80	23.00	21.90

EUT Mode	Frequency (MHz)	СН	Peak Power (1TS) (dBm)	Peak Power (2TS) (dBm)	Peak Power (3TS) (dBm)	Peak Power (4TS) (dBm)
EDGE 1900	1850.2	512	29.00	28.00	26.30	25.00
	1880.0	661	28.90	27.90	26.00	24.90
	1909.8	810	29.20	27.90	25.90	24.60

EUT Mode	Frequency (MHz)	СН	Average Power (1TS) (dBm)	Average Power (2TS) (dBm)	Average Power (3TS) (dBm)	Average Power (4TS) (dBm)
EDGE 1900	1850.2	512	25.70	24.80	23.10	21.80
	1880.0	661	25.50	24.70	22.80	21.70
	1909.8	810	25.80	24.70	22.70	21.40



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 19 of 79

5.5.1.2: WCDMA mode

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.4.0 specification. The EUT supports power Class 4, which has a nominal maximum output power of 21 dBm (+2.7/-2.7). RMC 12.2kps is used for this testing.

Results:

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	Avg Power (dBm)
	1852.4	9262	23.24	19.76
WCDMA Band II	1880.0	9400	23.47	19.77
Duild II	1907.6	9538	23.29	19.82

Note: The results above reflect max power with all up bits.



5.5.13: HSDPA Release 6 mode

The following 4 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 4 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C10.1.4 & C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSDPA SUB-TEST Setting

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH(FOR HSDPA)

Sub-test	βc	βd	β _d (SF)	βc/βd	<mark>βнs</mark> (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)	RMC (Kbps)
1	2/15	15/15	64	2/15	4/15	0.0	0.0	12.2
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0	12.2
3	15/15	8/15	64	15/8	30/15	1.5	0.5	12.2
4	15/15	4/15	64	15/4	30/15	1.5	0.5	12.2

Note: The recommended HSDPA MPRs are implemented as per following sub-tests.

Results:	.	-				1
Mode	Sub-test	RMS	Power (d	Bm)	Power Class 4 Limita-	Comments
			Channel		tion (dBm)	
		9262	9400	9538		
HSDPA	1	20.05	20.03	20.09	18.3dBm – 23.7dBm	Pass
B2	2	19.64	19.63	19.67	18.3dBm – 23.7dBm	Pass
	3	19.57	19.58	19.56	17.8dBm – 23.7dBm	Pass
	4	19.64	19.59	19.68	17.8dBm – 23.7dBm	Pass



5.5.1.4: HSPA (HSDPA & HSUPA) Release 6 mode

The following 5 Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V8.4.0 specification. All TX power requirements for Power Class 4 were met according to table 5.2AA.5 and 5.2B.5 All UE channels and power ratio's are set according to table C11.1.3 in the 3GPP TS34.121-1 V8.4.0. RMC 12.2kps is used for this testing

HSPA SUB-TEST Setting

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH(FOR HSUPA)

Sub- test	β _c	βa	β _d (SF)	β_c/β_d	$\beta_{\rm HS}$	β _{ec}	β_{ed}	β _{ed} (SF)	$\begin{array}{c} \beta_{ed} \\ (Codes) \end{array}$	CM (dB)	MPR (dB)	AG Index	E-TFCI	RMC (Kbps)
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/225	4	1	1.0	0.0	20	75	12.2
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67	12.2
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed} 1: 47/15 β_{ed} 2: 47/15	4 4	2	2.0	1.0	15	92	12.2
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71	12.2
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81	12.2



Note: The recommended HSUPA are implemented as per following sub-tests. Results:

Mode	Sub-test	RMS	Power (d	Bm)	Power Class 4 Limita-	Comments
			Channel		tion (dBm)	
		9262	9400	9538		
HSUPA	1	19.78	19.72	19.74	15.3dBm – 23.7dBm	Pass
B2	2	17.88	17.89	17.82	14.8dBm – 23.7dBm	Pass
	3	18.89	18.81	18.85	15.8dBm – 23.7dBm	Pass
	4	18.92	18.87	18.85	14.8dBm - 23.7dBm	Pass
	5	19.49	19.45	19.47	15.3dBm – 23.7dBm	Pass

5.5.2 Maximum Power Reduction: PCS1900 band

PCL	0	1	2	3	4	5	6	7	8	
Output power (dBm)	28.3	28.3	28.4	28.4	26.8	25	23.1	21.1	18.9	
PCL	9	10	11	12	13	14	15	16	17	18
Output power (dBm)	16.8	15.4	13.2	11.5	9.4	7.4	5.6	3.6	1.6	-0.4

Note: The EUT output power was controlled by simulator. Set Communication Tester CMU200 PCL as above, and get the mobile phone output power reading.

WCDMA/HSDPA band II

The EUT output power was controlled by simulator. Set Communication Tester CMU200 function key "UE Power Control" and enter max rated power 21dBm. The EUT is going to be set to max output power to 21dBm. then record the read(see page 19 for measurement data). The min. power was measures by a function key "minimum power" then record the read. It is -52.5dBm. The power variation can be 0.1dB step by setting.



6. ERP, EIRP MEASUREMENT

6.1. Standard Applicable:


According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.


6.2. Test SET-UP (Block Diagram of Configuration):

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

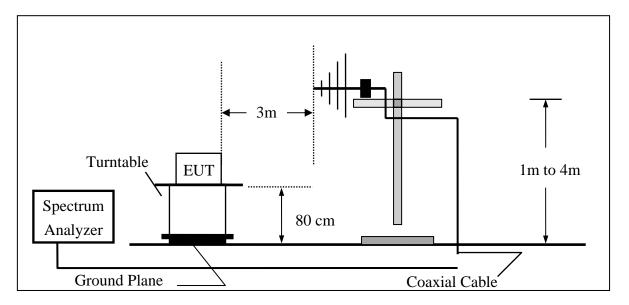




Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 24 of 79

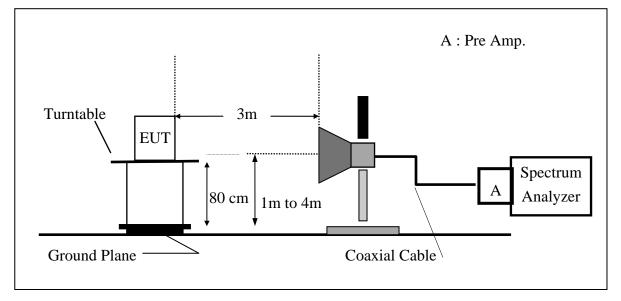

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

(C) Substituted Method Test Set-UP

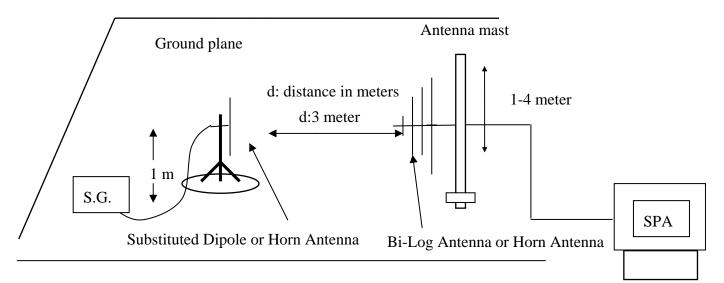



6.3. Measurement Procedure:

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1710-1755MHz and 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)

6.4. Measurement Equipment Used:

Refer to section 2.4 in this report



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 26 of 79

6.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	824.20	128		V	125.83	39.44	-7.87	3.62	27.94	38.45
	824.20	120	E2	Н	123.28	37.01	-7.87	3.62	25.51	38.45
GPRS 850	836.60	190		V	125.10	38.85	-7.88	3.65	27.32	38.45
UFK5 650	830.00	190	E2	Н	123.26	37.03	-7.88	3.65	25.50	38.45
	848.80	251		V	124.77	38.65	-7.88	3.68	27.09	38.45
	040.00	231	E2	Н	123.79	37.60	-7.88	3.68	26.04	38.45

Remark :

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1850.20	512		V	120.30	15.91	9.90	5.56	20.25	33.00
	1630.20	312	E2	Н	123.85	19.67	9.90	5.84	23.73	33.00
GPRS 1900	1880.00	661		V	120.41	16.05	9.99	5.61	20.43	33.00
GPK5 1900	1880.00	661	E2	Н	123.72	19.58	9.99	5.61	23.95	33.00
	1000.80	810		V	120.59	16.26	10.08	5.66	20.68	33.00
	1909.80	810	E2	Н	123.85	19.74	10.08	5.66	24.16	33.00

Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 27 of 79

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	824.20	128		V	123.73	37.34	-7.87	3.62	25.84	38.45
	824.20	120	E2	Н	121.28	35.01	-7.87	3.62	23.51	38.45
EDGE 850	836.60	190		V	123.47	37.22	-7.88	3.65	25.69	38.45
EDGE 850	830.00	190	E2	Н	121.49	35.26	-7.88	3.65	23.73	38.45
	848.80	251		V	123.04	36.92	-7.88	3.68	25.36	38.45
	040.00	231	E2	Н	121.94	35.75	-7.88	3.68	24.19	38.45

Remark :

(1) The RBW,VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1850.20	512	Ea	V	120.03	15.64	9.90	5.56	19.98	33.00
	1850.20	512	E2	Н	123.09	18.91	9.90	5.84	22.97	33.00
EDGE 1900	1880.00	661		V	119.46	15.10	9.99	5.61	19.48	33.00
EDGE 1900	1880.00	001	E2	Н	122.45	18.31	9.99	5.61	22.68	33.00
	1909.80	810		V	120.70	16.37	10.08	5.66	20.79	33.00
	1709.80	810	E2	Н	122.99	18.88	10.08	5.66	23.30	33.00

Remark :

(1) The RBW, VBW of SPA for frequency

RBW=300 KHz, VBW=1MHz



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 28 of 79

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.		SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1050.40	00.00	50	V	110.25	5.73	9.48	5.33	9.87	33.00
	1852.40	9262	E2	Н	118.68	14.35	9.90	5.84	18.41	33.00
WCDMA	1880.00	0400	E2	V	112.46	7.96	9.54	5.36	12.13	33.00
Band II	1880.00	9400	E2	Н	119.90	15.59	9.54	5.36	19.76	33.00
	1907.60	9538	E2	V	112.25	7.77	9.61	5.40	11.97	33.00
	1907.00	9330	E2	Н	119.35	15.06	9.61	5.40	19.27	33.00

Remark :

(1) The RBW, VBW of SPA for frequency

RBW=5MHz, VBW=8MHz

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1052.40	00.00		V	111.30	6.92	9.90	5.56	11.25	33.00
	1852.40	9262	E2	Н	118.70	14.52	9.90	5.84	18.58	33.00
HSUPA	1880.00	0400		V	111.17	6.81	9.99	5.61	11.19	33.00
Band II	1880.00	9400	9400 E2	Н	119.41	15.27	9.99	5.61	19.64	33.00
	1907.60 953	0529		V	110.77	6.44	10.07	5.66	10.85	33.00
	1907.00	9538	E2	Н	118.38	14.27	10.07	5.66	18.68	33.00

Remark :

(1) The RBW,VBW of SPA for frequency

RBW=5MHz, VBW=8MHz



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 29 of 79

7. 99% OCCUPIED BANDWIDTH MEASUREMENT

7.1. Standard Applicable:

According to §FCC 2.1049.

7.2. Test Set-up:

Refer to section 5.2 in this report

7.3. Measurement Procedure:

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4. Measurement Equipment Used:

Refer to section 2.4 in this report



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 30 of 79

7.5. Measurement Result:

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
GPRS 850	824.20	128	0.2410
	836.60	190	0.2453
	848.80	251	0.2438

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
GPRS 1900	1850.20	512	0.2457
	1880.00	661	0.2447
	1909.80	810	0.2447

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
EDGE 850	824.20	128	0.2430
	836.60	190	0.2455
	848.80	251	0.2430

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
EDGE 1900	1850.20	512	0.2428
	1880.00	661	0.2444
	1909.80	810	0.2444


EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
WCDMA II	1852.4	9262	4.1344
	1880.0	9400	4.1448
	1907.6	9538	4.1456



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 31 of 79

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
HSUPA II	1852.4	9296	4.1446
	1880.0	9400	4.1436
	1907.6	9538	4.1335


Figure 7-1: GPRS 850 Channel Low

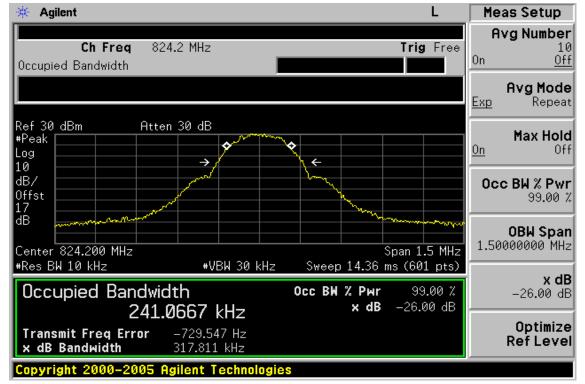




Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 32 of 79

Figure 7-2 GPRS 850 Channel Mid

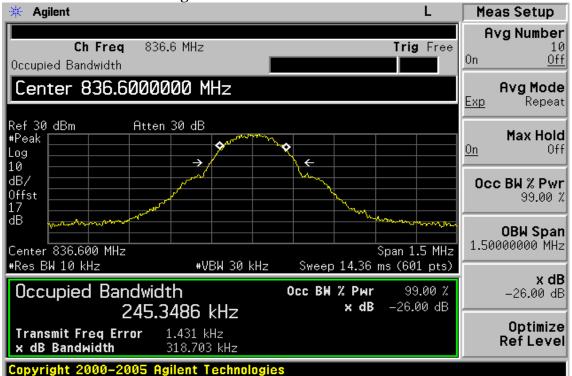

GPRS Figure 7-3: GPRS 850 Channel High

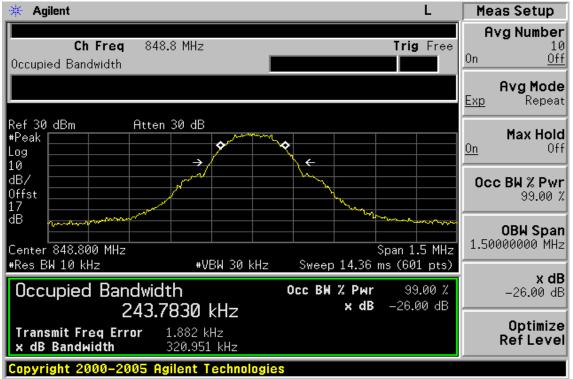



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 33 of 79

Figure 7-4: GPRS 1900 Channel Low

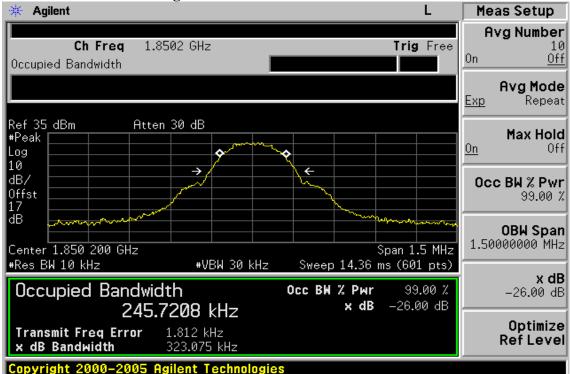


Figure 7-5 GPRS 1900 Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exence a parties to a transaction from exercising all their rights and obligations under the transaction documents.



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 34 of 79

Figure 7-6: GPRS 1900 Channel High


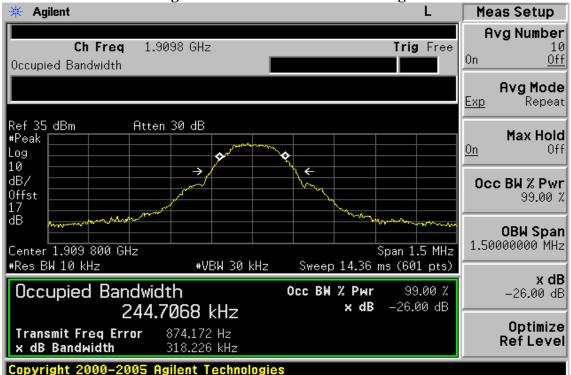


Figure 7-7: EDGE 850 Channel Low



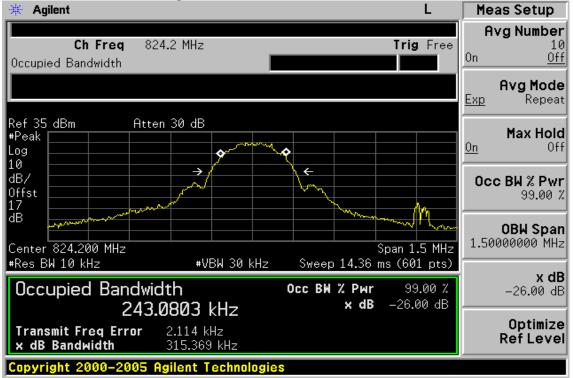

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 35 of 79

Figure 7-8 EDGE 850 Channel Mid

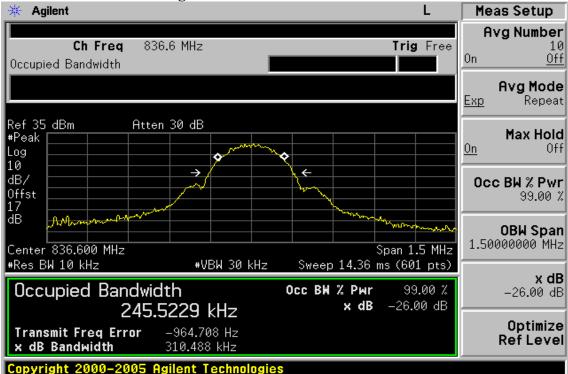


Figure 7-9 EDGE 850 Channel High





Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 36 of 79

Figure 7-10 EDGE 1900 Channel Low


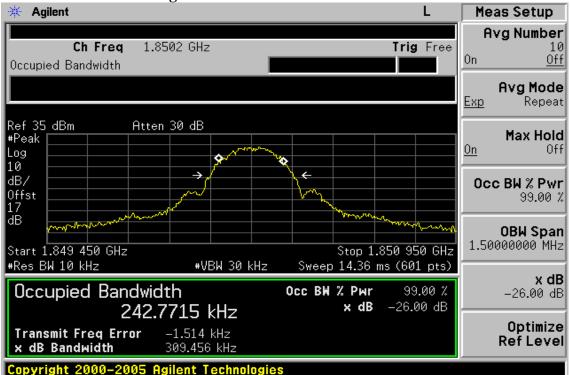


Figure 7-11 EDGE 1900 Channel Mid



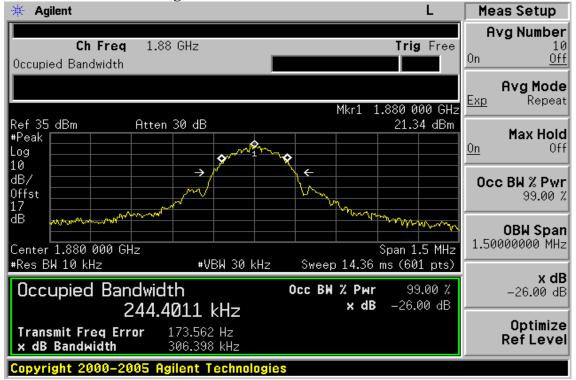

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 37 of 79

Figure 7-12 EDGE 1900 Channel High


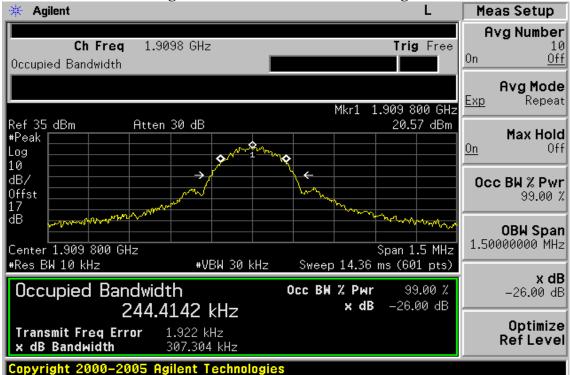


Figure 7-13 WCDMA II Channel Low



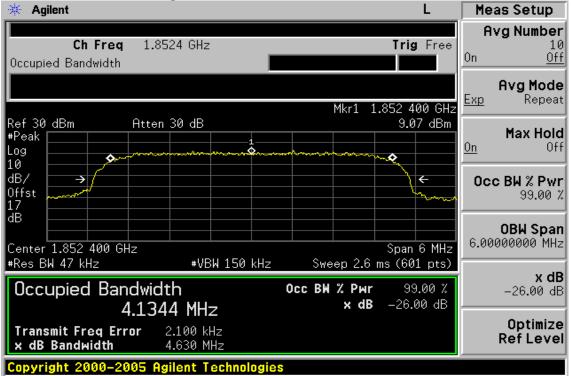

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 38 of 79

Figure 7-14 WCDMA II Channel Mid


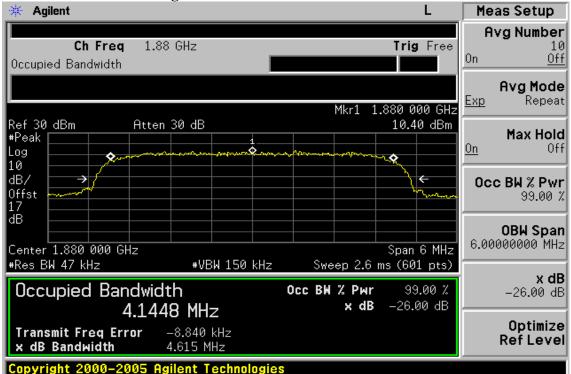


Figure 7-15 WCDMA II Channel High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are retained for 90 days only. This test report cannot be reproduced, (<u>www.sgs.com/terms and conditions</u>) are retained for 90 days only. This test report cannot be reproduced, (<u>www.sgs.com/terms and conditions</u>) or Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> [No.134. Wu Kung Road. Wuku Industrial Zone. Taipei County. Taiwan / <u>Atl. & A PB T</u> <u>\$ as 7.58</u>. 134 b

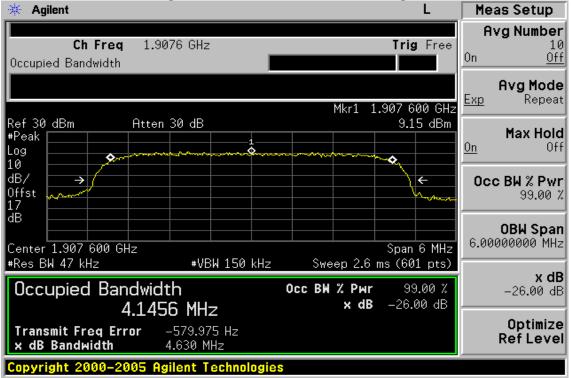

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 39 of 79

Figure 7-16 HSUPA II Channel Low


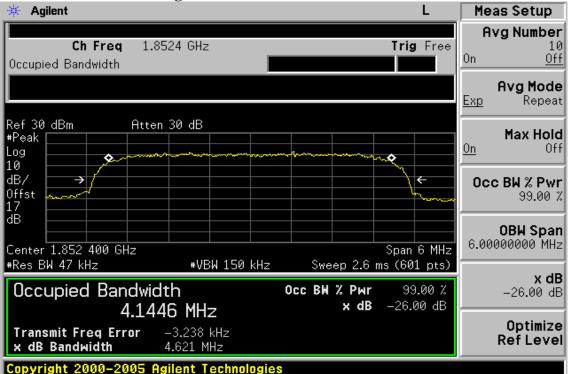


Figure 7-17 HSUPA II Channel Mid



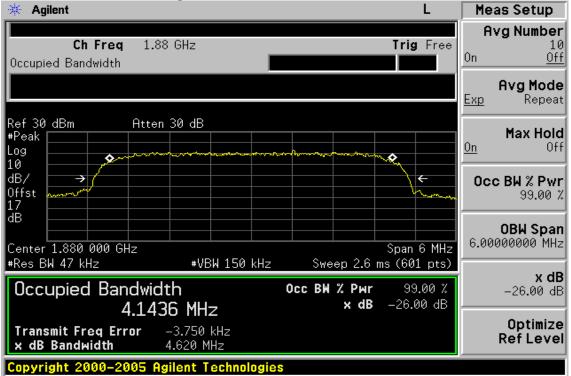

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 40 of 79

Agilent L Meas Setup 2<u>64</u> Avg Number Ch Freq 1.9076 GHz Trig Free 10 0n <u>Off</u> Occupied Bandwidth Avg Mode Repeat <u>Exp</u> Atten 30 dB Ref 30 dBm Max Hold #Peak <u>0n</u> Off Log Ô ٥ 10 dB/ ì 4 Occ BW % Pwr Offst 99.00 % dB 0BW Span 6.00000000 MHz Center 1.907 600 GHz Span 6 MHz #Res BW 47 kHz #VBW 150 kHz Sweep 2.6 ms (601 pts) x dB Occupied Bandwidth Occ BW % Pwr 99.00 % -26.00 dB x dB -26.00 dB 4.1335 MHz Optimize Transmit Freq Error -11.875 kHz **Ref Level** x dB Bandwidth 4.626 MHz Copyright 2000-2005 Agilent Technologies

Figure 7-18 HSUPA II Channel High

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 41 of 79

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS


8.1. Standard Applicable:

According to FCC §2.1051.

FCC \$22.917(a), \$24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

8.2. Test SET-UP:

Out of band emission

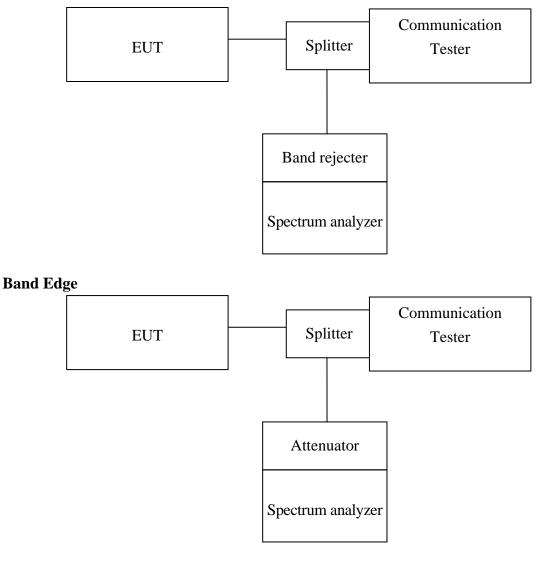



8.3. Measurement Procedure:

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

8.4. Measurement Equipment Used:


Refer to section 2.4 in this report




Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 43 of 79

8.5. Measurement Result:

Figure 8-1: Out of Band emission at antenna terminals– GPRS 850 Channel Lowest

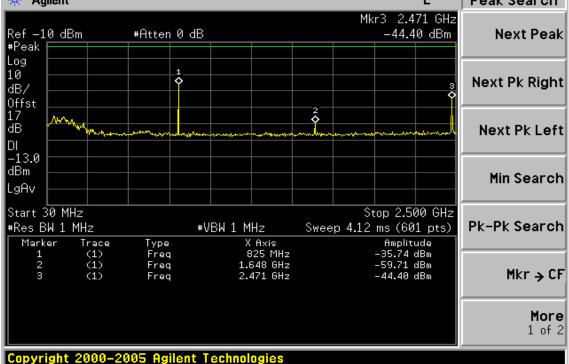

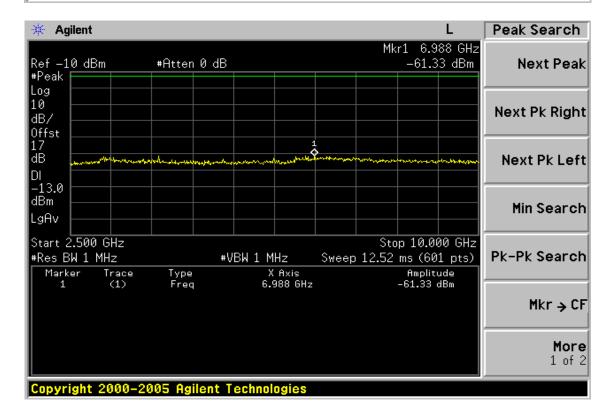

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is do be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

Member of SGS Group



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 44 of 79


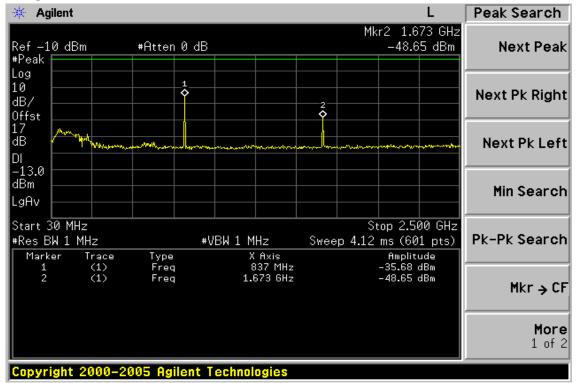


Figure 8-2: Out of Band emission at antenna terminals -GPRS 850 Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is do be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

Member of SGS Group

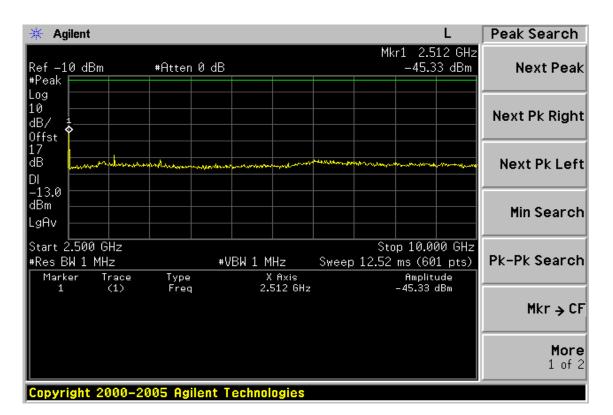

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 45 of 79


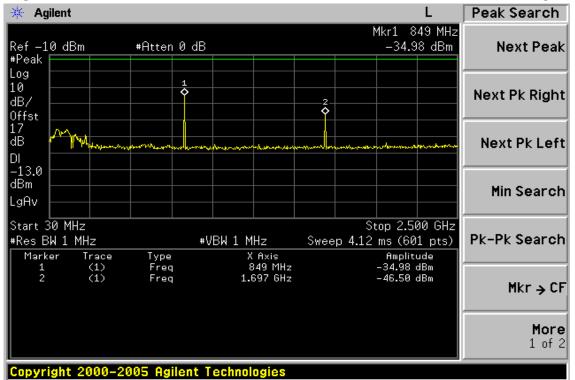


Figure 8-3: Out of Band emission at antenna terminals-GPRS 850 Channel Highest



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms and conditions, thm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sqs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SCG Taiwan Ltd</u> <u>UN 154</u> Wirk Jung Road Wirk undustrial Zome Tainei County. Taiwan / <u>cht was Test</u> <u>54</u> counted counted counted counted counted counted counted counted counted</u> counted counted counted</u> counted counted</u> counted counted counted</u> counted

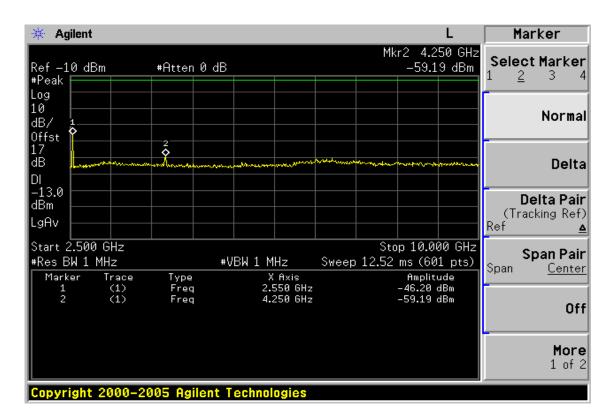


Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 46 of 79



Figure 8-4: Band edge emission at antenna terminals -GPRS 850 Channel Lowest

Figure 8-5: Band edge emission at antenna terminals –GPRS 850 Channel Highest

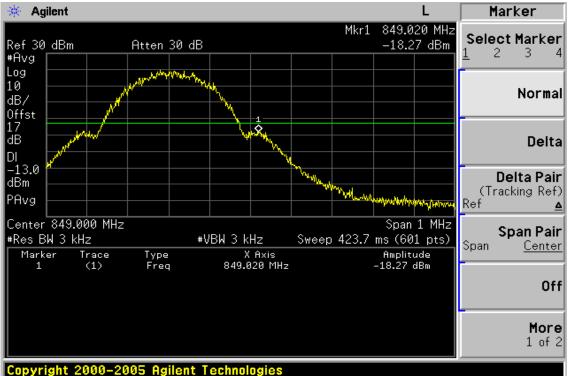



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 47 of 79


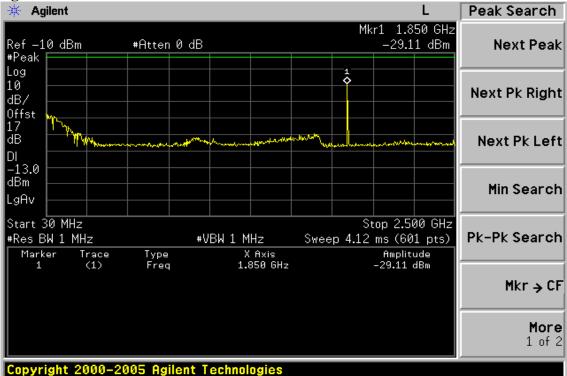


Figure 8-6: Out of Band emission at antenna terminals-GPRS 1900 Channel Lowest



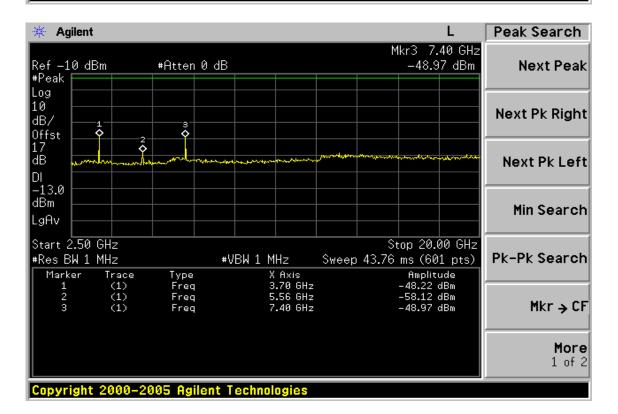

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 48 of 79


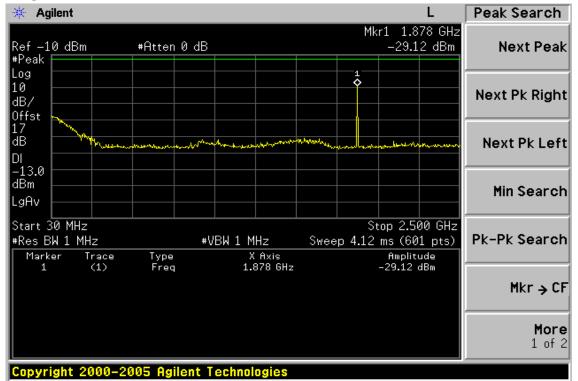


Figure 8-7: Out of Band emission at antenna terminals -GPRS 1900 Channel Mid



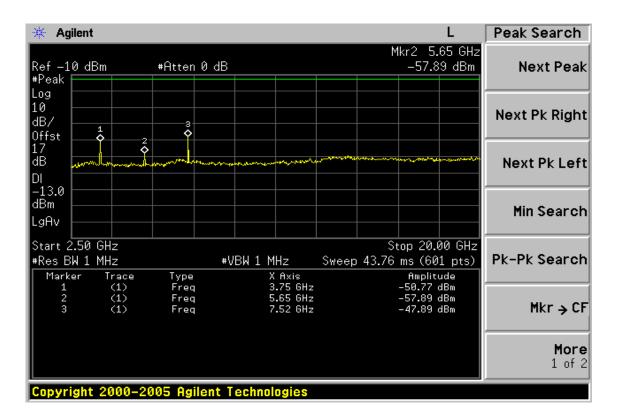

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 49 of 79


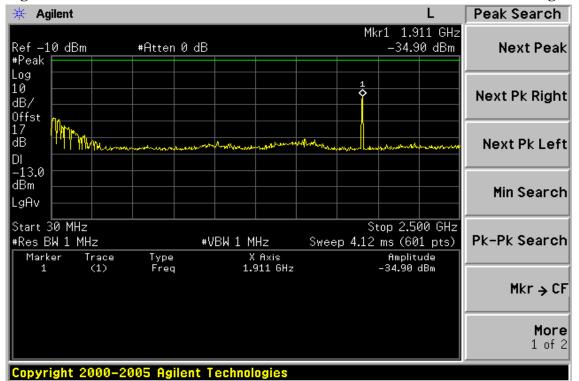


Figure 8-8: Out of Band emission at antenna terminals-GPRS 1900 Channel Highest



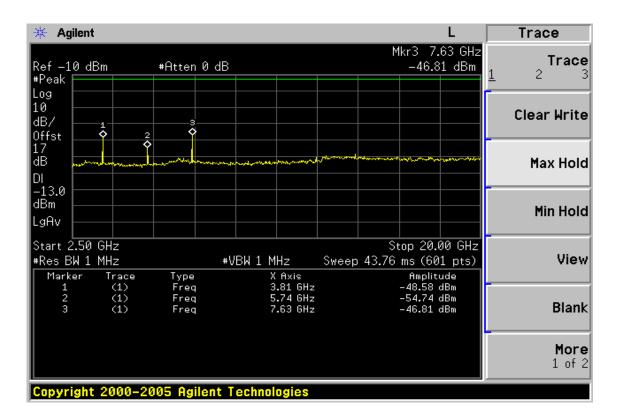

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 50 of 79


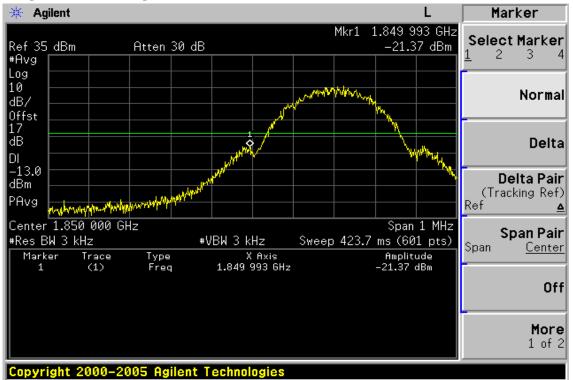


Figure 8-9: Bad edge emission at antenna terminals -GPRS 1900 Channel Lowest


Figure 8-10: Band edge emission at antenna terminals –GPRS 1900 Channel Highest




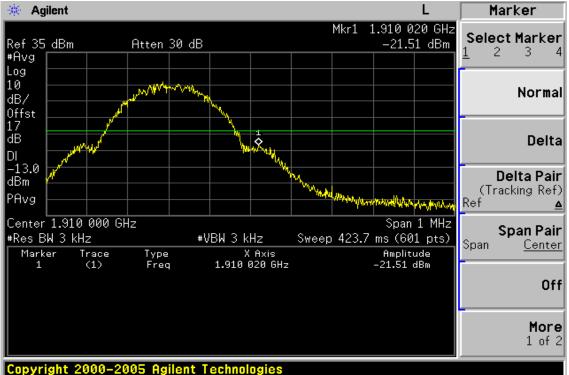

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 51 of 79



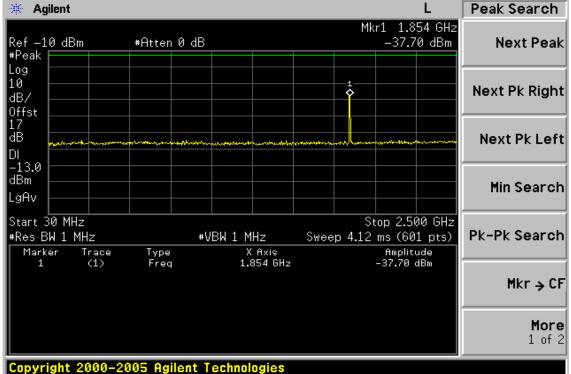

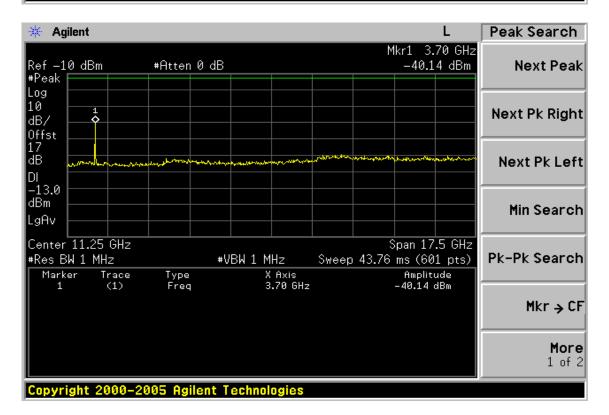



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 52 of 79


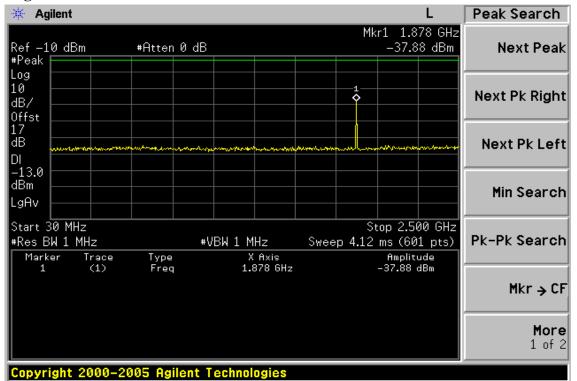


Figure 8-12: Out of Band emission at antenna terminals –WCDMA II Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is do be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號

Member of SGS Group

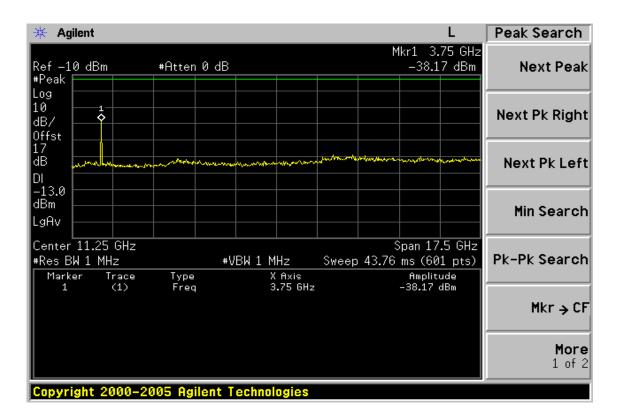

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 53 of 79


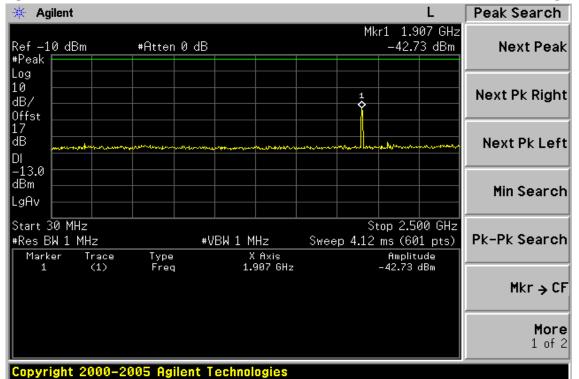


Figure 8-13: Out of Band emission at antenna terminals–WCDMA II Channel Highest



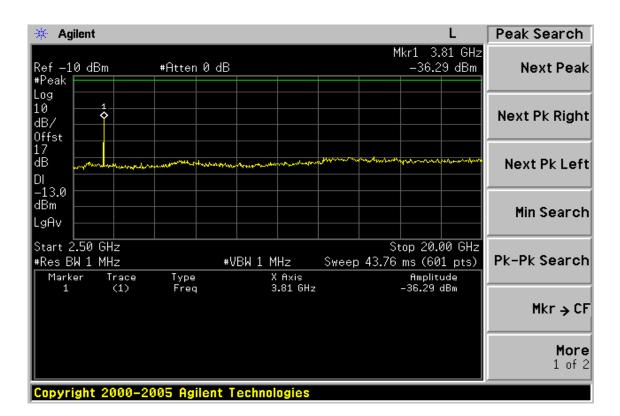

Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 54 of 79



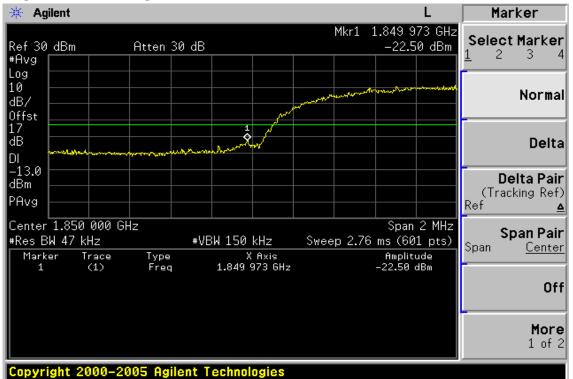


Figure 8-14: Bad edge emission at antenna terminals –WCDMA II Channel Lowest





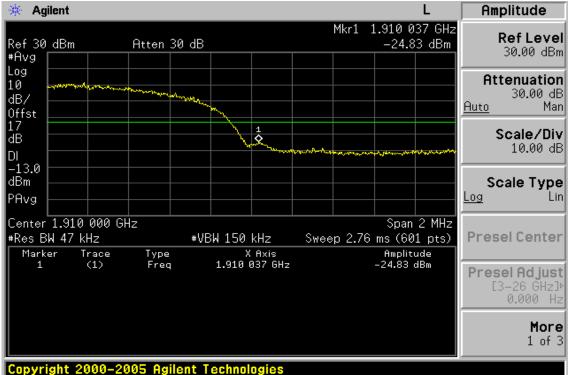


9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

9.1. Standard Applicable:

According to FCC §2.1053,

FCC 22.917(a), 24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)


9.2. EUT Setup (Block Diagram of Configuration):

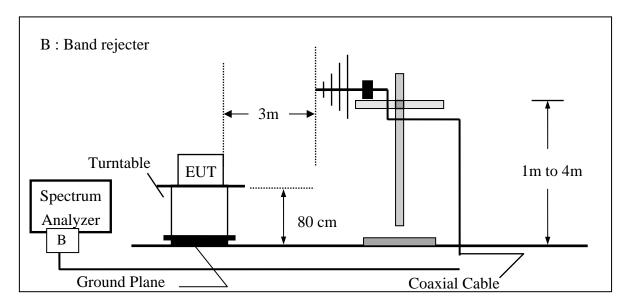

Radiated Emission Test Set-Up, Frequency Below 1000MHz



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 56 of 79

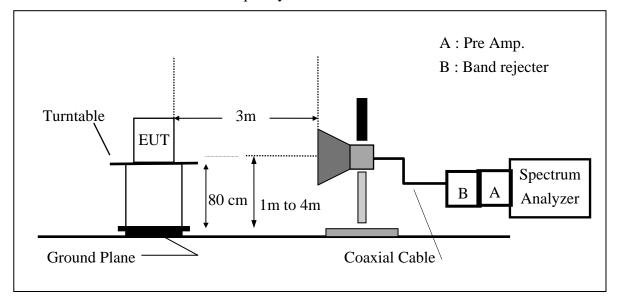

Radiated Emission Test Set-UP Frequency Over 1 GHz

9.3. Measurement Procedure:

The EUT was placed on a non-conductive; The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP= S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) – Cable Loss (dB)

9.4. Measurement Equipment Used:

Refer to section 2.4 in this report

9.5. Measurement Result:

Refer to attach tabular data sheets.



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 57 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 824.20 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	45.84	V	-57.09	-7.75	1.29	-66.13	-13.00	-53.13
232.73	50.16	V	-50.38	-7.87	1.89	-60.15	-13.00	-47.15
264.74	45.89	V	-53.52	-7.90	2.04	-63.46	-13.00	-50.46
337.49	43.14	V	-54.65	-7.71	2.31	-64.67	-13.00	-51.67
823.98	78.00	V	-8.39	-7.87	3.62	-19.89	-13.00	-6.89
1648.40	51.73	V	-52.85	9.29	5.23	-48.79	-13.00	-35.79
2472.60	48.46	V	-52.55	10.08	6.53	-49.00	-13.00	-36.00
3296.80	39.45	V	-59.42	12.17	7.71	-54.97	-13.00	-41.97
4121.00	36.88	V	-59.24	12.61	8.86	-55.49	-13.00	-42.49
4945.20		V		12.65	9.74		-13.00	
5769.40		V		13.55	10.54		-13.00	
6593.60		V		12.05	11.30		-13.00	
7417.80		V		11.49	12.10		-13.00	
8242.00		V		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 58 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 824.20 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
240.49	47.23	Н	-52.45	-7.88	1.94	-62.27	-13.00	-49.27
266.68	44.27	Н	-54.43	-7.90	2.05	-64.38	-13.00	-51.38
298.69	42.29	Н	-55.41	-7.92	2.17	-65.50	-13.00	-52.50
366.59	52.43	Н	-44.51	-7.65	2.41	-54.57	-13.00	-41.57
458.74	39.33	Н	-54.48	-7.70	2.68	-64.87	-13.00	-51.87
823.98	76.76	Н	-9.51	-7.87	3.62	-21.01	-13.00	-8.01
1648.40	52.07	Н	-52.33	9.29	5.23	-48.27	-13.00	-35.27
2472.60	48.69	Н	-52.22	10.08	6.53	-48.67	-13.00	-35.67
3296.80	35.95	Н	-63.15	12.17	7.71	-58.69	-13.00	-45.69
4121.00	35.23	Н	-61.02	12.61	8.86	-57.27	-13.00	-44.27
4945.20		Н		12.65	9.74		-13.00	
5769.40		Н		13.55	10.54		-13.00	
6593.60		Н		12.05	11.30		-13.00	
7417.80		Н		11.49	12.10		-13.00	
8242.00		Н		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 59 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 836.60 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	46.65	V	-56.28	-7.75	1.29	-65.32	-13.00	-52.32
240.49	49.89	V	-50.36	-7.88	1.94	-60.18	-13.00	-47.18
266.68	46.94	V	-52.40	-7.90	2.05	-62.35	-13.00	-49.35
337.49	42.86	V	-54.93	-7.71	2.31	-64.95	-13.00	-51.95
1673.20	45.95	V	-58.61	9.36	5.27	-54.51	-13.00	-41.51
2509.80	49.43	V	-51.35	10.09	6.58	-47.85	-13.00	-34.85
3346.40	42.30	V	-56.56	12.28	7.79	-52.08	-13.00	-39.08
4183.00	36.22	V	-59.67	12.62	8.93	-55.98	-13.00	-42.98
5019.60		V		12.67	9.81		-13.00	
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belongs to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 60 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 836.60 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
240.49	46.29	Н	-53.39	-7.88	1.94	-63.21	-13.00	-50.21
266.68	42.42	Н	-56.28	-7.90	2.05	-66.23	-13.00	-53.23
337.49	42.05	Н	-55.27	-7.71	2.31	-65.29	-13.00	-52.29
366.59	49.34	Н	-47.60	-7.65	2.41	-57.66	-13.00	-44.66
453.89	38.90	Н	-54.96	-7.70	2.67	-65.33	-13.00	-52.33
1673.20	52.82	Н	-51.56	9.36	5.27	-47.46	-13.00	-34.46
2509.80	49.04	Н	-51.66	10.09	6.58	-48.16	-13.00	-35.16
3346.40	38.22	Н	-60.84	12.28	7.79	-56.36	-13.00	-43.36
4183.00	36.30	Н	-59.73	12.62	8.93	-56.04	-13.00	-43.04
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	
8366.00		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 61 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 848.80 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	46.25	V	-56.68	-7.75	1.29	-65.72	-13.00	-52.72
240.49	49.93	V	-50.32	-7.88	1.94	-60.14	-13.00	-47.14
264.74	47.50	V	-51.91	-7.90	2.04	-61.85	-13.00	-48.85
337.49	42.26	V	-55.53	-7.71	2.31	-65.55	-13.00	-52.55
453.89	45.49	V	-48.46	-7.70	2.67	-58.83	-13.00	-45.83
849.03	78.31	V	-7.81	-7.88	3.68	-19.37	-13.00	-6.37
1697.60	47.62	V	-56.92	9.44	5.31	-52.79	-13.00	-39.79
2546.40	49.43	V	-51.21	10.20	6.63	-47.65	-13.00	-34.65
3395.20	41.43	V	-57.42	12.38	7.87	-52.91	-13.00	-39.91
4244.00		V		12.63	9.00		-13.00	
5092.80		V		12.74	9.88		-13.00	
5941.60		V		13.81	10.70		-13.00	
6790.40		V		11.86	11.48		-13.00	
7639.20		V		11.40	12.27		-13.00	
8488.00		V		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 62 of 79

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 848.80 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
240.49	46.71	Н	-52.97	-7.88	1.94	-62.79	-13.00	-49.79
300.63	44.81	Н	-52.84	-7.92	2.17	-62.93	-13.00	-49.93
337.49	41.71	Н	-55.61	-7.71	2.31	-65.63	-13.00	-52.63
366.59	46.69	Н	-50.25	-7.65	2.41	-60.31	-13.00	-47.31
849.00	77.20	Н	-8.99	-7.88	3.68	-20.55	-13.00	-7.55
1697.60	49.10	Н	-55.25	9.44	5.31	-51.12	-13.00	-38.12
2546.40	54.66	Н	-45.94	10.20	6.63	-42.38	-13.00	-29.38
3395.20	36.45	Н	-62.58	12.38	7.87	-58.06	-13.00	-45.06
4244.00	36.18	Н	-59.63	12.63	9.00	-56.01	-13.00	-43.01
5092.80		Н		12.74	9.88		-13.00	
5941.60		Н		13.81	10.70		-13.00	
6790.40		Н		11.86	11.48		-13.00	
7639.20		Н		11.40	12.27		-13.00	
8488.00		Н		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 63 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1850.20MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	52.88	V	-50.05	-7.75	1.29	-59.09	-13.00	-46.09
240.49	51.37	V	-48.88	-7.88	1.94	-58.70	-13.00	-45.70
266.68	47.75	V	-51.59	-7.90	2.05	-61.54	-13.00	-48.54
337.49	43.20	V	-54.59	-7.71	2.31	-64.61	-13.00	-51.61
1850.00	75.07	V	-29.32	9.90	5.56	-24.98	-13.00	-11.98
3700.40	48.76	V	-49.17	12.61	8.31	-44.87	-13.00	-31.87
5550.60	36.67	V	-54.17	13.23	10.33	-51.27	-13.00	-38.27
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 64 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1850.20MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	47.98	Н	-55.61	-7.75	1.29	-64.65	-13.00	-51.65
232.73	47.62	Н	-52.44	-7.87	1.89	-62.21	-13.00	-49.21
298.69	43.62	Н	-54.08	-7.92	2.17	-64.17	-13.00	-51.17
337.49	42.52	Н	-54.80	-7.71	2.31	-64.82	-13.00	-51.82
1850.00	77.17	Н	-27.01	9.90	5.56	-22.67	-13.00	-9.67
3700.40	36.32	Н	-61.72	12.61	8.31	-57.42	-13.00	-44.42
5550.60	34.80	Н	-56.25	13.23	10.33	-53.35	-13.00	-40.35
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

	30MHz - 80MHz: 5.04dB		
Measurement uncertainty	80MHz -1000MHz: 3.76dB		
	1GHz - 13GHz: 4.45dB		

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 65 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1880MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	52.46	V	-50.47	-7.75	1.29	-59.51	-13.00	-46.51
232.73	51.69	V	-48.85	-7.87	1.89	-58.62	-13.00	-45.62
298.69	43.77	V	-54.52	-7.92	2.17	-64.61	-13.00	-51.61
337.49	43.08	V	-54.71	-7.71	2.31	-64.73	-13.00	-51.73
3760.00	44.87	V	-52.79	12.60	8.39	-48.57	-13.00	-35.57
5640.00	36.14	V	-54.44	13.36	10.41	-51.49	-13.00	-38.49
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB	
Measurement uncertainty	80MHz -1000MHz: 3.76dB	
	1GHz - 13GHz: 4.45dB	

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 66 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1880MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	48.43	Н	-55.16	-7.75	1.29	-64.20	-13.00	-51.20
240.49	47.85	Н	-51.83	-7.88	1.94	-61.65	-13.00	-48.65
298.69	45.68	Н	-52.02	-7.92	2.17	-62.11	-13.00	-49.11
337.49	42.87	Н	-54.45	-7.71	2.31	-64.47	-13.00	-51.47
3760.00	36.23	Н	-61.54	12.60	8.39	-57.33	-13.00	-44.33
5640.00	39.60	Н	-51.15	13.36	10.41	-48.20	-13.00	-35.20
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 67 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1909.8 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	53.60	V	-49.33	-7.75	1.29	-58.37	-13.00	-45.37
240.49	50.99	V	-49.26	-7.88	1.94	-59.08	-13.00	-46.08
266.68	46.68	V	-52.66	-7.90	2.05	-62.61	-13.00	-49.61
337.49	43.25	V	-54.54	-7.71	2.31	-64.56	-13.00	-51.56
1910.00	74.92	V	-29.41	10.08	5.66	-24.99	-13.00	-11.99
3819.60	45.45	V	-51.94	12.60	8.47	-47.81	-13.00	-34.81
5729.40	35.72	V	-54.60	13.49	10.50	-51.60	-13.00	-38.60
7639.20		V		11.40	12.27		-13.00	
9549.00		V		11.95	13.74		-13.00	
11458.80		V		12.17	15.43		-13.00	
13368.60		V		12.97	16.82		-13.00	
15278.40		V		15.00	18.29		-13.00	
17188.20		V		14.47	19.52		-13.00	
19098.00		V		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 68 of 79

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1909.8 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	48.00	Н	-55.59	-7.75	1.29	-64.63	-13.00	-51.63
240.49	46.78	Н	-52.90	-7.88	1.94	-62.72	-13.00	-49.72
298.69	43.14	Н	-54.56	-7.92	2.17	-64.65	-13.00	-51.65
337.49	42.56	Н	-54.76	-7.71	2.31	-64.78	-13.00	-51.78
1910.01	77.02	Н	-27.09	10.08	5.66	-22.67	-13.00	-9.67
3819.60	36.51	Н	-61.00	12.60	8.47	-56.86	-13.00	-43.86
5729.40	45.27	Н	-45.18	13.49	10.50	-42.19	-13.00	-29.19
7639.20		Н		11.40	12.27		-13.00	
9549.00		Н		11.95	13.74		-13.00	
11458.80		Н		12.17	15.43		-13.00	
13368.60		Н		12.97	16.82		-13.00	
15278.40		Н		15.00	18.29		-13.00	
17188.20		Н		14.47	19.52		-13.00	
19098.00		Н		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 69 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1852.4MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
87.23	55.33	V	-47.95	-7.75	0.91	-56.61	-13.00	-43.61
182.29	40.68	V	-59.51	-7.83	1.67	-69.00	-13.00	-56.00
300.63	40.24	V	-58.00	-7.92	2.17	-68.09	-13.00	-55.09
400.54	43.07	V	-52.41	-7.66	2.51	-62.59	-13.00	-49.59
1850.00	63.11	V	-41.28	9.90	5.56	-36.94	-13.00	-23.94
3704.80	34.50	V	-63.41	12.61	8.31	-59.12	-13.00	-46.12
5557.20	33.59	V	-57.23	13.24	10.33	-54.33	-13.00	-41.33
7409.60		V		11.49	12.09		-13.00	
9262.00		V		11.92	13.51		-13.00	
11114.40		V		11.68	15.12		-13.00	
12966.80		V		13.62	16.61		-13.00	
14819.20		V		12.83	17.96		-13.00	
16671.60		V		15.87	19.15		-13.00	
18524.00		V		18.74	10.86		-13.00	

	30MHz - 80MHz: 5.04dB		
Measurement uncertainty	80MHz -1000MHz: 3.76dB		
	1GHz - 13GHz: 4.45dB		

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are to the initiation of drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五展工業 區五工路 134 號



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 70 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH Low E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1852.4MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	46.89	Н	-55.42	-7.77	1.39	-64.57	-13.00	-51.57
332.64	47.45	Н	-49.91	-7.74	2.29	-59.94	-13.00	-46.94
431.58	38.04	Н	-56.79	-7.69	2.60	-67.08	-13.00	-54.08
623.64	36.88	Н	-53.36	-7.80	3.09	-64.25	-13.00	-51.25
1850.00	71.50	Н	-32.68	9.90	5.56	-28.34	-13.00	-15.34
3704.80	34.20	Н	-63.82	12.61	8.31	-59.53	-13.00	-46.53
5557.20	33.41	Н	-57.62	13.24	10.33	-54.72	-13.00	-41.72
7409.60		Н		11.49	12.09		-13.00	
9262.00		Н		11.92	13.51		-13.00	
11114.40		Н		11.68	15.12		-13.00	
12966.80		Н		13.62	16.61		-13.00	
14819.20		Н		12.83	17.96		-13.00	
16671.60		Н		15.87	19.15		-13.00	
18524.00		Н		18.74	10.86		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 71 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1880MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
87.23	55.22	V	-48.06	-7.75	0.91	-56.72	-13.00	-43.72
177.44	39.44	V	-60.31	-7.82	1.66	-69.79	-13.00	-56.79
300.63	40.20	V	-58.04	-7.92	2.17	-68.13	-13.00	-55.13
349.13	40.69	V	-56.95	-7.64	2.36	-66.95	-13.00	-53.95
444.19	39.46	V	-54.65	-7.70	2.64	-64.99	-13.00	-51.99
3760.00	34.41	V	-63.25	12.60	8.39	-59.03	-13.00	-46.03
5640.00	33.56	V	-57.02	13.36	10.41	-54.07	-13.00	-41.07
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB		
Measurement uncertainty	80MHz -1000MHz: 3.76dB		
	1GHz - 13GHz: 4.45dB		

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 72 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH Mid E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1880MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
104.69	47.61	Н	-54.90	-7.76	1.38	-64.04	-13.00	-51.04
327.79	49.75	Н	-47.65	-7.76	2.28	-57.69	-13.00	-44.69
356.89	53.29	Н	-43.80	-7.64	2.38	-53.83	-13.00	-40.83
444.19	45.16	Н	-49.03	-7.70	2.64	-59.36	-13.00	-46.36
623.64	37.16	Н	-53.08	-7.80	3.09	-63.97	-13.00	-50.97
3760.00	35.41	Н	-62.36	12.60	8.39	-58.15	-13.00	-45.15
5640.00	33.27	Н	-57.48	13.36	10.41	-54.53	-13.00	-41.53
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB		
Measurement uncertainty	80MHz -1000MHz: 3.76dB		
	1GHz - 13GHz: 4.45dB		

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"---" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 73 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1907.6 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
87.23	54.57	V	-48.71	-7.75	0.91	-57.37	-13.00	-44.37
310.33	51.53	V	-46.59	-7.86	2.21	-56.66	-13.00	-43.66
332.64	42.05	V	-55.80	-7.74	2.29	-65.83	-13.00	-52.83
465.53	37.07	V	-56.93	-7.71	2.70	-67.33	-13.00	-54.33
667.29	36.12	V	-52.98	-7.83	3.20	-64.01	-13.00	-51.01
1910.00	63.74	V	-40.59	10.08	5.66	-36.17	-13.00	-23.17
3815.20	36.02	V	-61.39	12.60	8.46	-57.25	-13.00	-44.25
5722.80	33.78	V	-56.55	13.48	10.49	-53.56	-13.00	-40.56
7630.40		V		11.41	12.27		-13.00	
9538.00		V		11.95	13.73		-13.00	
11445.60		V		12.15	15.42		-13.00	
13353.20		V		13.00	16.81		-13.00	
15260.80		V		14.91	18.28		-13.00	
17168.40		V		14.53	19.50		-13.00	
19076.00		V		18.65	20.76		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

1 The emission behaviors belong to narrowband spurious emission.

2 Remark"----" means that the emission level is too low to be measured

3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) are to the initiation of drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台上縣五展工業 區五工路 134 號



Report No.: EH/2010/90017 Issue Date: Oct. 06, 2010 Page: 74 of 79

Radiated Spurious Emission Measurement Result: WCDMA II Mode

Operation Mode	: TX CH High E2 Mode	Test Date:	Oct. 01, 2010
Fundamental Frequency	: 1907.6 MHz	Test By:	Jason
Temperature	: 25°C	Pol:	Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
104.69	47.05	Н	-55.46	-7.76	1.38	-64.60	-13.00	-51.60
301.33	55.56	Н	-42.09	-7.91	2.18	-52.18	-13.00	-39.18
400.54	42.92	Н	-53.48	-7.66	2.51	-63.65	-13.00	-50.65
419.94	42.84	Н	-52.58	-7.68	2.57	-62.82	-13.00	-49.82
1910.00	69.16	Н	-34.95	10.08	5.66	-30.53	-13.00	-17.53
3815.20	38.71	Н	-58.82	12.60	8.46	-54.68	-13.00	-41.68
5722.80	32.87	Н	-57.60	13.48	10.49	-54.61	-13.00	-41.61
7630.40		Н		11.41	12.27		-13.00	
9538.00		Н		11.95	13.73		-13.00	
11445.60		Н		12.15	15.42		-13.00	
13353.20		Н		13.00	16.81		-13.00	
15260.80		Н		14.91	18.28		-13.00	
17168.40		Н		14.53	19.50		-13.00	
19076.00		Н		18.65	20.76		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"----" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:

4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dBd/dBi) - Cable loss (dB)



10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1. Standard Applicable:


According to FCC (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

10.2. Test Set-up:

Temperature Chamber

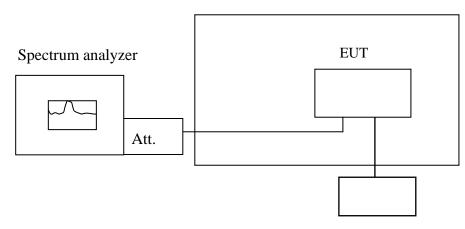

Variable DC Power Supply

Note: Measurement setup for testing on Antenna connector

10.3. Measurement Procedure:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25° C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30° C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10° C increased per stage until the highest temperature of $+50^{\circ}$ C reached.

10.4. Measurement Equipment Used:

Refer to section 2.4 in this report



10.5. Measurement Result:

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25°C					
	Limit	+/-2.5 ppm = 209	91 Hz		
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature (°C)	(MHz)	Della (HZ)	Lillint (HZ)	
3.7	-30	836.600002	4.00	2091	
3.7	-20	836.600014	-8.00	2091	
3.7	-10	836.600011	-5.00	2091	
3.7	0	836.600016	-10.00	2091	
3.7	10	836.600004	2.00	2091	
3.7	20	836.600006	0.00	2091	
3.7	30	836.599990	16.00	2091	
3.7	40	836.599991	15.00	2091	
3.7	50	836.600005	1.00	2091	

Refer	Reference Frequency: GPRS 1900 Mid Channel 1880 MHz @ 25°C					
	Limit	$\pm +/-2.5 \text{ ppm} = 470$	00 Hz			
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)		
Vdc	Temperature (°C)	(MHz)	Delta (IIZ)	Lillint (112)		
3.7	-30	1880.000051	-78.00	4700		
3.7	-20	1880.000055	-82.00	4700		
3.7	-10	1880.000059	-86.00	4700		
3.7	0	1880.000003	-30.00	4700		
3.7	10	1879.999987	-14.00	4700		
3.7	20	1879.999973	0.00	4700		
3.7	30	1879.999962	11.00	4700		
3.7	40	1880.000011	-38.00	4700		
3.7	50	1880.000006	-33.00	4700		

Note: The battery is rated 3.7V dc.



Reference Frequency: WCDMA II Mid Channel 1880 MHz					
	Limit	$\pm +/-2.5 \text{ ppm} = 470$	00 Hz		
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature ($^{\circ}$ C)	(MHz)	Delta (HZ)	Lillint (HZ)	
3.7	-30	1879.999996	2.00	4700	
3.7	-20	1879.999999	-1.00	4700	
3.7	-10	1879.999990	8.00	4700	
3.7	0	1879.999993	5.00	4700	
3.7	10	1879.999995	3.00	4700	
3.7	20	1879.999998	0.00	4700	
3.7	30	1879.999997	1.00	4700	
3.7	40	1880.000001	-3.00	4700	
3.7	50	1880.000004	-6.00	4700	

Note: The battery is rated 3.7V dc.



11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1. Standard Applicable:

According to FCC §2.1055(a) (1)

Frequency Tolerance: +/-2.5ppm for 850MHz band

+/-2.5ppm for 1900MHz band

11.2. Test Set-up:

Refer to section 10.2 in this report

11.3. Measurement Procedure:

Set chamber temperature to 25° C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4. Measurement Equipment Used:

Refer to section 2.4 in this report



11.5. Measurement Result:

Reference Frequency: GPRS 850 Mid Channel 836.6 MHz @ 25°C					
	Limit	: +/- 2.5 ppm = 209	91 Hz		
Power Supply	Environment	Frequency			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)	
4.26	25.00	836.599978	6.00	2091.00	
3.70	25.00	836.599984	0.00	2091.00	
3.50	25.00	836.599992	-8.00	2091.00	
3.20	25.00	826 500866	110.00	2001.00	
(End point)	25.00	836.599866	118.00	2091.00	

Reference Frequency: GPRS 1900 Mid Channel 1880 MHz @ 25°C					
	Limit	: +/- 2.5 ppm = 470)0 Hz		
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature (°C)	(MHz)	Delta (IIZ)	Linint (112)	
4.26	25	1879.999971	6.00	4700	
3.70	25	1879.999977	0.00	4700	
3.50	25	1879.999981	-4.00	4700	
3.20	25	1970 000651	226.00	4700	
(End point)	25	1879.999651	326.00	4700	

Reference Frequency: WCDMA II Mid Channel 1880 (ARFCN9400) MHz					
	Limit	: +/- 2.5 ppm = 470)0 Hz		
Power Supply	Environment	Frequency			
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)	
4.26	25	1879.999998	-2.00	4700	
3.70	25	1879.999996	0.00	4700	
3.50	25	1879.999991	5.00	4700	
3.20	25	1000 0000 40	50.00	4700	
(End point)	25	1880.000048	-50.00	4700	

Note: The battery is rated 3.7V dc.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責;同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltit</u>. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號