

TEST REPORT
No.: 2-20757077d/08

According to: FCC Regulations
2.1091

for
Option N.V.

GSM/EGPRS/FDD/WLAN Wireless Router GS0312
+
External Antenna Joymaxx CAF-6540FMXX





Laboratory Accreditation and Listings			
 Deutscher Akkreditierungs Rat DAT-P176/94-02	 FEDERAL COMMUNICATIONS COMMISSION FC USA Reg. No.: 99538 MRA US-EU 0003	 Industry Canada Reg. No.: IC 3465 IC 3465-1	 Reg. No.: R-2665, R-2666 C-2914, T-339
accredited according to DIN EN ISO/IEC 17025			
<p>CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.de • Internet: www.cetecom.com</p>			

Table of contents

1. SUMMARY OF TEST RESULTS	3
1.1. TESTS OVERVIEW	3
2. ADMINISTRATIVE DATA	4
2.1. Identification of the testing laboratory	4
2.2. Test location	4
2.3. Organizational items	4
2.4. Applicant’s details	4
2.5. Manufacturer’s details	4
3. EQUIPMENT UNDER TEST (EUT)	5
3.1. Additional declaration and description of main EUT	5
3.2. Configuration of cables used for testing	6
3.3. EUT: Type, S/N etc. and short descriptions used in this test report	7
3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	7
3.5. EUT set-ups	7
3.6. Additional declaration and description of EUT	8
3.7. EUT operating modes	9
3.8. Parameter Settings on mobile phone and base station CMU200	10
4. DESCRIPTION OF THE TEST SET-UPS	12
4.1. Test set-up for radiated measurements	12
5. MEASUREMENTS	13
5.1. Measurements: Radio Frequency Exposure Evaluation: Mobile Equipment	13
6. MEASUREMENT UNCERTAINTIES	17
7. INSTRUMENTS AND ANCILLARY	18
7.1. Used equipment “CTC”	18

Table of annex

Total pages

ANNEX 1: DOCUMENT 2_20757077B_08-A2.PDF EUT & SET-UP PHOTOS	4
---	---

1. Summary of test results

The test results apply exclusively to the test samples as presented in chapter 3.1. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

Following tests have been performed to show compliance with applicable FCC Part 2.1091 and FCC Part 1.1310 of the FCC CFR 47 Rules.

The device incorporates an already approved GSM/UMTS Module Type 0407. The tables below are showing the tests performed.

1.1. TESTS OVERVIEW

TEST CASES	PORT	REFERENCES & LIMITS			EUT set-up	EUT operating mode	Result
		FCC Standard	--	TEST LIMIT			
TX-Mode							
Radio frequency Exposure EVALUATION (MPE)	Cabinet	§1.1310 §2.1091		§1.1310 Table 1, Limits for General Population	1+2	1+2+3+ 4+5+6	Passed

.....
Dipl.-Ing. W. Richter
Responsible for testing laboratory



.....
CETECOM
Im Technologiepark
45210 Essen
Tel: +49 (0) 20 54 70 10 - 0
Fax: +49 (0) 20 54 70 10 - 207

.....
Dipl.-Ing. C. Lorenz
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Laboratory accreditations/Listings:	DAR-Registration No. DAT-P176/94-02 FCC-Registration No. 99538, MRA US-EU 0003 IC-Registration No. 3465 VCCI Registration No. R-2665,R-2666,C-2914,T-339
Responsible for testing laboratory:	Dipl.-Ing. W. Richter
Deputies:	Dipl.-Ing. H. Strehlow, D. Franke

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

2.3. Organizational items

Order No.:	20757077
Responsible for test report and project leader:	Dipl.-Ing. C. Lorenz
Receipt of EUT:	2008-11-01
Date(s) of test:	2008-11-05 to 2009-01-19
Date of report:	2009-01-21

Version of template:	08.08

2.4. Applicant's details

Applicant's name:	Option N.V.
Address:	Gastoon Geenslaan 14 3001 Leuven Belgium
Contact person:	Mr. Thomas Gulinck

2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

3. Equipment under test (EUT)

3.1. Additional declaration and description of main EUT

GSM/EGPRS functionality

Main function	GSM/GPRS/FDD/WLAN Wireless Router		
Type	GS0312		
GSM Frequency range	GSM 850: 824 – 849MHz (Uplink), 869-894MHz (Downlink) GSM1900: 1850-1910MHz (Uplink), 1930-1990MHz (Downlink)		
Type of modulation	GMSK/8-PSK		
Number of channels	GSM 850: 128 – 251, 125 channels GSM1900: 512 – 810, 300 channels		
EMISSION DESIGNATOR(S)	248KGXW (GSM) 248KG7W (EDGE)		
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector		
Main Internal Antenna Gain	<input type="checkbox"/> conducted: Max. xxx dBi gain at GSM850 <input checked="" type="checkbox"/> radiated: Max. -0.2 dBi gain at GSM1900 -0.4 dBi gain at GSM850 (values according internal Option document)		
MAX PEAK radiated Output Power: GSM 850	30.75 dBm (ERP) with internal antenna		
MAX PEAK Radiated Output Power: GSM 1900	32.47 dBm (EIRP) with external antenna		
FCC-ID	NCMOGS0312		
IC	2734A-GS0312		
Installed option	<input type="checkbox"/>		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering

WLAN-functionality

Main function	GSM/GPRS/FDD/WLAN Wireless Router		
Type	GS0312		
Frequency range	2400 – 2483.5 MHz		
Type of modulation	DSSS & OFDM		
Number of channels	11		
EMISSION DESIGNATOR(S)	--		
Antenna Type	Integrated PCB-Antenna, remark 1		
MAX Radiated EIRP	DSSS – Mode: 19.39 dBm, remark 1 OFDM – Mode: 17.39 dBm, remark 1		
FCC-ID	NCMOGS0312		
IC	2734A-GS0312		
Installed option	<input type="checkbox"/>		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering

Remark 1: Details can be found in test report **1-0345-07-03/08**, tests performed at CETECOM ICT Saarbrücken

FDD Band 2/4/5-functionality

Main function	GSM/GPRS/FDD/WLAN Wireless Router		
Type	GS0312		
TX-frequency range	FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990MHz (Downlink) FDD Band 4: 1712.4–1752.6 MHz (Uplink), 2110-2155MHz (Downlink) FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894MHz (Downlink)		
Type of modulation	FDD-Mode Release99: QPSK FDD Mode Release 5+6: 16QAM additionally		
Number of channels	FDD Band 2: UARFCN range 9262 – 9400 – 9538 FDD Band 4: UARFCN range 1312 – 1450 – 1513FDD Band 5: UARFCN range 4132 – 4183 – 4233		
EMISSION DESIGNATOR(S)	4M18F9W		
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector	Frequency range: GSM 850: 824 – 894 MHz GSM 1900: 1710-1990 MHz	
Main Internal Antenna Gain	<input type="checkbox"/> conducted: Max. xxx dBi gain at GSM850 <input checked="" type="checkbox"/> radiated: Max. -0.1 dBi gain at FDD Band 5 -0.2 dBi gain at FDD Band 2 0.5 dBi gain at FDD Band 4 (declared by customer)		
MAX radiated PEAK/RMS Output Power:			
FDD Band 2	30.76/ dBm with external antenna		
FDD Band 4:	29.39/ dBm with internal antenna		
FDD Band 5:	28.32/ dBm with external antenna		
FCC-ID	NCMOGS0312		
IC	2734A-GS0312		
Installed option	<input type="checkbox"/>		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering

3.2. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	Ethernet RJ45	unshielded	--	--	--

3.3. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	GSM/EGPRS/FDD/WLAN Wireless Router	GS0312	GT24878057 IMEI: 004401441050 289	2.2	R1A21
EUT B	External Antenna	Joymaxx CAF-6540FMXX	#1	2.2 dB gain	
EUT C	AC/DC Adapter	Phihong PSA15R-050P	P81900716A3	Input: AC100-240V AC Output: DC 5.0V 3.0A	--
EUT D	POTS Handset	Belgacom	#1	--	--

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	Notebook	Dell D610	CTC	--	Windows XP + Telnet program

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.5. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
Set. 1	EUT A + EUT B + EUT C + EUT D (+ AE 1)	External Antenna (EUT B) used for GSM/FDD signalling
Set. 2	EUT A + EUT C + EUT D + (AE 1)	Internal antenna from EUT A used

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.6. Additional declaration and description of EUT

(Applicant's declaration, = not selected, = selected)

EUT A		typical operating cycle. <input checked="" type="checkbox"/> < 0,5 sec. <input type="checkbox"/> :	typical use <input type="checkbox"/> portable use <input checked="" type="checkbox"/> fixed use	<input type="checkbox"/> table-top <input type="checkbox"/> floor-standing <input checked="" type="checkbox"/> not defined
Place of use? <input type="checkbox"/> vehicular use		<input checked="" type="checkbox"/> Residential, commercial and light industry <input type="checkbox"/> Industrial environment		
Power line: <input type="checkbox"/> AC _____Hz <input checked="" type="checkbox"/> 5V DC		<input type="checkbox"/> L1, <input type="checkbox"/> L2, <input type="checkbox"/> L3, <input type="checkbox"/> N <input type="checkbox"/> 12V, <input type="checkbox"/> 24V, <input type="checkbox"/> 230V, <input type="checkbox"/> 400V <input checked="" type="checkbox"/> provided by AC/DC Adapter (EUT C), powered by 110 V/60Hz AC	EUT-grounding: EUT-grounding: (in case of deviation during tests the single details are described on chapter 4) <input checked="" type="checkbox"/> none	
Other Ports		possible total cable length	Cable screen	connected during test
1. Ethernet line (RJ45)		<input type="checkbox"/> > 1m <input checked="" type="checkbox"/> > 2m <input type="checkbox"/> > 3m <input type="checkbox"/> :	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
2. POTS-line (analogue telephone line)		<input type="checkbox"/> > 1m <input checked="" type="checkbox"/> > 2m <input type="checkbox"/> > 3m <input type="checkbox"/> :	<input type="checkbox"/> screened <input checked="" type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
3. DC-Power line (from EUT)		<input type="checkbox"/> > 1m <input checked="" type="checkbox"/> > 2m <input type="checkbox"/> > 3m <input checked="" type="checkbox"/> : from AC/DC-Adapter	<input type="checkbox"/> screened <input checked="" type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
4. Antenna Line		<input type="checkbox"/> > 1m <input type="checkbox"/> > 2m <input type="checkbox"/> > 3m <input checked="" type="checkbox"/> : from External Antenna	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
5. USB-connector		<input type="checkbox"/> > 1m <input type="checkbox"/> > 2m <input type="checkbox"/> > 3m <input checked="" type="checkbox"/> : no lines specified	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamics microphones, etc.?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no
Is mounting position / usual operating position defined?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no

3.7. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	GSM 850 TCH mode Channels 128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 2	GSM 1900 TCH mode Channels 512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 3	FDD-Mode 2 Channels 9262/9400/9538 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 24dBm. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 4	FDD-Mode 4 Channels 1312/1450/1513 12.2 kbps RMC	
op. 5	FDD-Mode 5 Channels 4132/4183/4233 12.2 kbps RMC	
op. 6	WLAN TX-on	b-Mode, DSSS modulation scheme, 11MBit/s

*) EUT operating mode no. is used to simplify the test report.

3.8. Parameter Settings on mobile phone and base station CMU200

Following settings apply to the MS during the measurements in GSM/(E)GPRS-Mode only:

Parameter	Traffic Mode	Idle Mode
Traffic Channels mobile station (EUT)	GSM 850 TCH _{MS} = 128 / 192 / 251 GSM 1900 TCH _{MS} = 512 / 681 / 810	--
maximum power level (PCL)	GSM 850: PCL = 5 (2 Watt) GSM 1900: PCL = 0 (1 Watt)	--
Modulation	GSM: GMSK-Modulation Scheme EDGE: 8-PSK Modulation Scheme	--
DTX	off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Timeslot	3	
Hopping	off	
Timeslot (slot mode)	GSM-Mode: single GPRS-Mode: maximum allowed uplink slots no. according MS class	
MS slot class	Class 12	
Maximum data transmission rate, single time slot	GSM: 17,6 kBit/s Slot EDGE: 59,2 kBit/s Slot	
Speech transcoding (Traffic Mode)	Full rate Version 1	
Mode	BCCH and TCH	
BCCH – base station (CMU,CMD)		GSM 850: 180 GSM 1900: 651
TCH – base station (CMD, CMU)	auto	
Power level TCH – base station (used timeslot level)	- 70 dBm	
Power level BCCH – base station (control channel level)	- 80 dBm	
External attenuation RF/AF-Input/Output	Accord. calibration prior to measurements	
Mobile Country Code	310	310
BS_AG_BLKS_RES		0
Paging reorganisation		Off (0)
Signalling channel	Not applicable	SDCCH
Location Update		Auto
Cell access		Disabled (barred)

Following settings apply to the UE (EUT) during the measurements in **FDD-Mode** only:

Parameter	Traffic Mode	Idle Mode
UARFCN UE Uplink (EUT) (according TS34.108)	FDD 2 = 9262/ 9400/ 9538 FDD 5 = 4132/ 4183/ 4233 FDD 4 = 1312/ 1450/ 1513	--
UARFCN Node B (downlink) (according TS34.108)	FDD 2 = 9663/ 9800/ 9937 FDD 5 = 4358/ 4040/ 4457 FDD 4 = 1538/ 1675/ 1737	
UE power class	Class 3 (+24dBm) nominal	
HSDPA UE category/ HSUPA category	8/5	--
Maximum power	FDD 2/4/5: 12.2kbps RMC -> all TPC bits up ("1") HSDPA-mode = accord. Subtests 1,2,3,4 defined in 3GPP TS34.121 HSUPA mode = accord. Subtests 1,2,3,4,5 defined in 3GPP TS34.121	--
Modulation	12.2kbps RMC-mode: QPSK-Modulation Scheme HSDPA/HSUPA = QPSK and 16 QAM Modulation Scheme is applicable	--
Compression mode	Off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Maximum data transmission rate:	GSM: 17,6 kBit/s Slot EDGE: 59,2 kBit/s Slot FDD: according defined UE category	
Node B Downlink physical channels settings	According Table E.5.1/E.5.1A in 3GPP TS34.121	
External attenuation RF/AF-Input/Output	Accord. Set-up calibration prior to measurements	

Remark: For detailed additional FDD/HSDPA/HSUPA-mode settings pls. consult chapter 10 of test report 2_20757077B/08


4. Description of the test set-ups

4.1. Test set-up for radiated measurements

The maximum output power radiated values from the test device are measured first in a semi or fully anechoic room with the dimensions of 8.05m x 6.86m x 5.48m.

The EUT and accessories are placed on a non-conducting table of 0.8 meter height, positioned as typical use.

The EUT is powered 5V DC by a external AC/DC-supply with AC nominal voltage of 110V/60Hz. The signalling is performed from outside the chamber with a communication test center (CMU/Anritsu) by airlink.

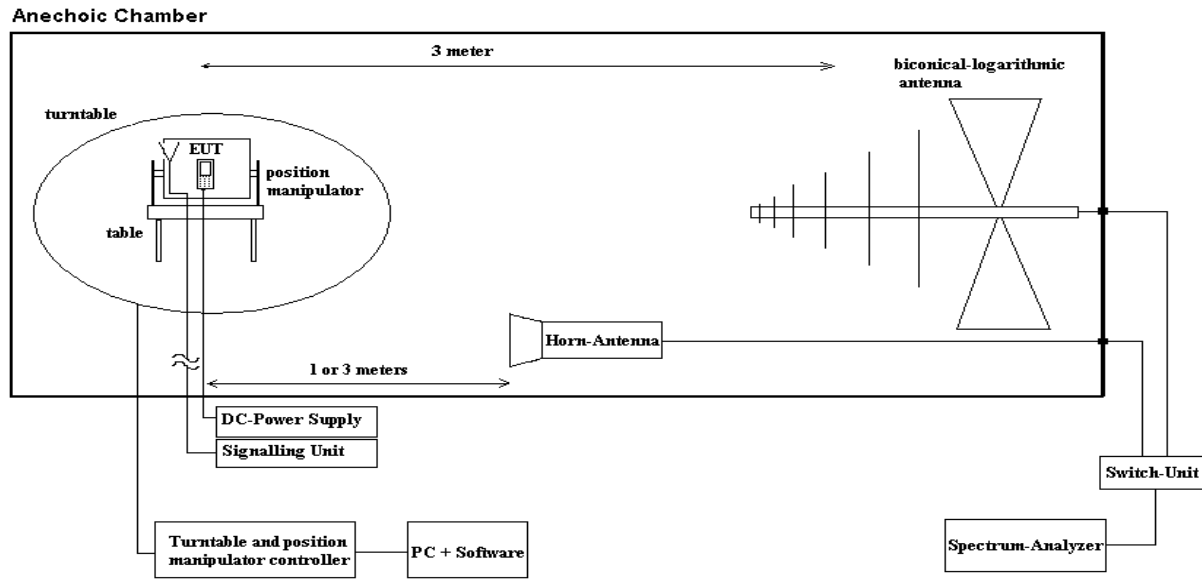

Schematic: schematic of anechoic chamber

5. Measurements

5.1. Measurements: Radio Frequency Exposure Evaluation: Mobile Equipment

References: §1.1310, § 2.1091

The criteria used for the evaluation of human exposure to radio frequency radiation is table 1 according §1.1310. As the mobile equipment is authorized under Part 22 (Subpart H) and Part 24 (Subpart E) of the FCC Rules, it is subject for evaluation of the RF exposure prior to equipment authorization.

§2.1091: Further information on evaluating compliance with these limits can be found in the FCC’s OST/OET Bulletin Number 65, “Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radiofrequency Radiation.”

For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits given in Table 1 of Appendix A.

§1.1310, Table 1: LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	² (100)	30
1.34–30	824/f	2.19/f	² (180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

Prediction of the power density in the far-field of one single radiating antenna can be made by following equation:

$$S = \frac{EIRP}{4\pi R^2}$$

Abbreviations:

- S: Power density (unit: mW/cm²)
- EIRP: Equivalent isotropically radiated power, determined within a separate measurement (unit: mW)
- R: distance to the center of the radiation of the antenna (unit: cm)

MEASUREMENT METHOD

The equipment ERP/EIRP power value was checked for 3 frequencies (lowest/middle/highest) within each operable band.

For the RF-exposure measurement, the radiated E(I)RP values were recorded first. Please see detailed E(I)RP measurement method and results in test report **B_2_20757077b/08** dated 2009-01-21.

Enclosed the maximum results for the radiated E(I)RP measurements:

Band	Channel no.	Channel Frequency [MHz]	Power-Values [dBm]		
			External antenna	Internal Antenna	
GSM 850	128	824.2	27.30	30.75	ERP-Value
	192	837.0	28.80	30.69	
	251	848.8	29.06	29.93	
GSM 1900	512	1850.2	29.33	28.13	EIRP-Value
	661	1880.0	31.44	27.74	
	810	1808.8	32.47	29.12	
FDD2	9262	1852.4	28.56	28.63	EIRP-Value
	9400	1880.0	29.80	28.31	
	9538	1907.6	30.76	25.93	
FDD4	1312	1712.4	28.53	29.39	EIRP-Value
	1450	1740.0	27.23	28.78	
	1513	1752.6	25.64	28.00	
FDD5	4132	826.4	28.17	27.31	ERP-Value
	4183	836.6	28.32	26.66	
	4233	846.6	27.40	25.08	

The worst-Case configuration (Internal Antenna/External Antenna), Operational band and the corresponding channel to determine the Worst-Case MPE-value are highlined. These values have been used for the measurement.

As the WLAN b/g mode can be operational at same time as the GSM/UMTS transmitter, it was decided to measure both transmitters turned on. This way the Worst-case configuration consisting of internal WLAN-Antenna and external WWAN-Antenna (TELSA-EUT B) could be tested against maximum generated RF-exposure.

From test report **1-0345-07-03/08** measured by CETECOM ICT Services GmH, the maximum output power for the WLAN mode and it's corresponding operation mode could be determined.

The maximum output power is generated on WLAN-b mode(DSSS), channel 1 at 2412 MHz with a radiated EIRP power of 19.39 dBm.

The measurements have been performed with a calibrated broadband field probe *Radisense III*. Enclosed the settings chosen:

Band	High (4MHz..4GHz)
Unit	mW/cm ²
Measurement mode	continuous
Axis	All E _{TOT} (x,y,z-axis)

The measurement field probe was situated at 20cm from the boundary of the equipment. The equipment was rotated to find the worst-case RF-exposure. The maximum found value was recorded for compliance demonstration.

MPE-Results

GSM850 WLAN b-mode ch. 1 Setup 2	RF-Exposure value [mW/ cm ²]	Limit [mW/cm ²]	Verdict
TCH Ch. 128	0.223	0.549@824.2MHz 1@2412MHz	Passed

GSM1900 WLAN b-mode ch. 1 Setup 1	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 810	0.213	0.565@848.8MHz 1@2412MHz	Passed

FDD2 WLAN g-mode, ch. 1 Setup 1	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 9538	0.751	1@1907.6MHz 1@2412MHz	Passed

FDD2 WLAN b-mode, ch. 1 Setup 2	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 9262	0.456	1@1852.4MHz 1@2412MHz	Passed

FDD4 WLAN b-mode ch. 1 Setup 2	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 1312	0.425	1@1712.4MHz 1@2412MHz	Passed

FDD4 WLAN b-mode ch. 1 Setup 1	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 1312	0.442	1@1712.4MHz 1@2412MHz	Passed

FDD5 WLAN b-mode ch. 1 Setup 1	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 4183	0.123	0.557@836.6MHz 1@2412MHz	Passed

FDD5 WLAN b-mode Ch. 1 Setup 2	RF-Exposure value [mW/ cm ²]	Limit [mW/ cm ²]	Verdict
TCH Ch. 4132	0.123	0.550@826.4MHz 1@2412MHz	Passed

Ambient environmental conditions

Temperature [°C]	22.5
Relative humidity [%]	33
Air pressure [hPa]	1018

Test equipment

Equipment (for reference numbers pls. see chapter 7 "List of equipment")
016, 378, 392, 460

6. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

Measurement	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks:
RF-Power Output conducted	9 kHz .. 20 GHz	1 dB	--
RF-Power Output radiated	30 MHz .. 4 GHz	3,17 dB	Substitution method
Conducted RF-emissions on antenna ports	9 kHz .. 20 GHz	1 dB	--
Radiated RF-emissions enclosure	150 kHz .. 30 MHz	5 dB	Magnetic field
	30 MHz .. 1 GHz	4,2 dB	E-Field
	1 GHz .. 18GHz	4.8 dB	E-Field
	1 GHz .. 20 GHz	3.17 dB	Substitution method
Occupied bandwidth	9 kHz .. 4 GHz	0,1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Emission bandwidth	9 kHz .. 4 GHz	0,1272 ppm (Delta Marker method)	Frequency error
		1 dB	Power
Frequency stability	9 kHz .. 20 GHz	0,0636 ppm	--
Conducted emissions on AC-mains port (U _{CISPR})	9 kHz .. 150 kHz	4 dB	--
	150 kHz .. 30 MHz	3.6 dB	

Table : measurement uncertainties, valid for conducted/radiated measurements

7. Instruments and Ancillary

7.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

7.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	emi test receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	signal generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	power meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Communication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT Firmware D2.87
053	audio analyzer	UPA3	860612/022	Firm. V 4.3
119	RT harmonics analyser/dig. flickermeter	B10	G60547	Firm.= V 3.1DHG
120	spectrum analyzer	FSEM 30	845538/011	Bios=2.1, Analyzer-Firmware= 3.30.3
140	signal generator	SMHU	831314/006	Firm.= 3.21
261	thermal power sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	power meter	NRV-S	825770/0010	Firm.= 2.6
263	signal generator	SMP 04	826190/0007	Firm.=3.21
264	spectrum analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
277	Vector-Networkanalyzer	ZVC	831363/0005	Bios= 3.3, Analyzer=3.52
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04,
298	Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f.
323	Communication Tester	CMD 55	825878/034	Firm.= 3.52 .22.01.99
331	climatic test chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	System-CTC-EMS-Conducted	System EMS Conducted	-	EMS-K1 Immunity Test-Software 1.20SR10
340	Communication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	power meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V4.6.1 + SW-Option K55
377	emi test receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	broadband RF field monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
383	signal generator	SME 03	842 828 /034	Firm.= 4.61
389	digital multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001,
420	System CTC CTIA-OTA	System CTC CTIA-OTA	-	EMQuest EMQ-100 Ver. 1.05
436	Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=4.53, Mess-Software=4.52
441	System CTC-SAR-EMI	System EMI field (SAR)	-	EMC 32 Version 6.10. 3. ESXS-K1 Version 2.20
442	System CTC-SAR-EMS	System EMS field (SAR)	-	EMS-K1 Immunity-Software 1.20SR10
443	System CTC-FAR-EMI-Spuri	System CTC-FAR-EMI-	-	Spuri 6.4a und Spuri 7.0
444	System CTC FAR-EMS	System EMS-Field (FAR)	-	EMS-K1 Immunity-Software 1.20SR10
460	Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=4.52/Messsoftware=4.51
489	emi test receiver	ESU40	1000-30	Firmware=3.93, Bios=V5.1-16-3, Specification=01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01

7.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	emi test receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	31.03.2009
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	31.03.2009
007	DC - LISN (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	31.03.2009
009	power meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	12 M	-	31.03.2009
012	signal generator (EMS-cond.)	SMY 01	839069/027	Rohde & Schwarz	36/12 M	-	31.03.2011
013	power meter (EMS cond.)	NRVD	839111/003	Rohde & Schwarz	12 M	-	31.03.2009
014	insertion unit (EMS cond.)	URV5-Z2	838519/029	Rohde & Schwarz	12 M	-	31.03.2009
015	insertion unit (EMS cond.)	URV5-Z4	838570/024	Rohde & Schwarz	12 M	-	31.03.2009
016	line impedance simulating network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.10.2010
017	Communication Tester	CMD 60 M	844365/014	Rohde & Schwarz	12 M	-	31.03.2009
020	horn antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2010
021	loop antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	31.03.2010
022	audio measurement amplifier	2636C	1537643	Brüel & Kjaer	12 M	-	31.03.2009
030	loop antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	31.03.2009
031	absorbing clamp	MDS-21	863325/015	Rohde & Schwarz	24/12 M	-	31.03.2009
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	12 M	-	31.03.2009
048	bicon. - log. antenna (SAR)	3143	1108	EMCO	36/12 M	-	30.04.2011
049	current clamp (injection)	F-120-2	48	FCC	12 M	-	31.03.2009
050	3-ph coupling-decoupling-netw. (Burst)	CDN 300	176	Schaffner	12 M	-	31.03.2009
051	VHF-current probe 20-300 MHz	ESV-Z1	872421	Rohde & Schwarz	12 M	-	31.03.2009
052	notch filter DECT	WRCB 1887,82/1889,55SS	12	Wainwright Industries	12 M	-	31.03.2009
053	audio analyzer	UPA3	860612/022	Rohde & Schwarz	36 M	-	31.03.2011
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	-	1a	30.04.2009
058	capacitive clamp (Burst)	IP 4	99	Hafely	-	4	
059	ferrite tube	FGZ 40 X 15 E	4225	Lüthi	36 M	-	31.03.2010
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
061	ferrite tube	FGZ 40 X 15 E	4250	Lüthi	36 M	-	31.03.2010
063	log.-per. antenna (Subst 1)	3146	860941/007	EMCO	36/12 M	-	31.10.2010
065	attenuator, (6 dB) 50 Ohm, 250W	AT 50-6-250	521057	BNOS Electronics	12 M	1b	30.04.2009
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-	5	Wainwright GmbH	12 M	-	31.03.2009
067	coupling decoupling-network	CDN801-M2/M3	272	Lüthi	12 M	-	31.03.2009
068	coupling decoupling-network	CDN 801-M5	95226	Lüthi	12 M	-	31.03.2009
069	EM - clamp	EM101	9535159	Lüthi	36 M	-	31.03.2009
070	ferrite tube	FTC101	4199	Lüthi	24/12 M	-	31.03.2010
071	biconical antenna (Subst 1)	HUF-Z2	863.029/010	Rohde & Schwarz	36/12 M	-	31.10.2010
072	coupling decoupling-network	CDN801-M2/M3	276	Lüthi	12 M	-	31.03.2009
079	4 wire T-network	EZ-10	862.939 / 011	Rohde & Schwarz	24/12 M	-	31.03.2009
083	AC - power supply, 0-10 A	EAC/MT 27010	910502096	EURO TEST	pre-m	2	
084	AC - power supply, 0-5 A	ELABO-8-34214	-	ELABO	pre-m	2	
085	AC - power supply, 0-10 A	R250	-	Schunterm.&Benningh.	pre-m	2	
086	DC - power supply, 0-10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0-5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	-	-	RWTÜV	pre-m	4	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
094	artificial head (No.1)	4905	1566990	Brüel & Kjaer	pre-m	2	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	12 M	-	31.03.2009
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	12 M	-	31.03.2009
110	USB-LWL-Converter	OLS-1	-	Extreme USB	-	4	
119	RT harmonics analyser/dig. flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2010
120	spectrum analyzer	FSEM 30	845538/011	Rohde & Schwarz	12 M	-	31.03.2009
121	notch filter GSM 1900	WRCB 1879,5/1880,5EE	15	Wainwright GmbH	12 M	-	31.03.2009
122	notch filter GSM 1800	WRCB 1747/1748	12	Wainwright GmbH	12 M	-	31.03.2009
123	biconical antenna (Subst 2)	HUF-Z2,	860941/007	Rohde & Schwarz	36/12 M	-	31.03.2010
131	RF-Current Probe	F-52	19	FCC	12 M	-	31.03.2009
132	log.-per. antenna (Subst 2)	HUF-Z3	860862/014	Rohde & Schwarz	36/12 M	-	31.03.2010
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36/12 M	-	31.03.2010
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	12 M	-	31.03.2009
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	12 M	-	31.03.2009
137	1000 Hz calibrator 94 dB SPL	4230 94 dB	1 594 698	Brüel & Kjaer	12 M	-	31.03.2009
140	signal generator	SMHU	831314/006	Rohde & Schwarz	24/12 M	-	31.03.2010
142	attenuator (6 dB) 2 W, 8 GHz	DGL N	-	Radiall	12 M	1b	30.04.2009
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
254	high pass GSM1800/1900/DECT	5HC 2600/12750-1.5KK	23042	Trilithic	12 M	-	31.03.2009
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	thermal power sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24/12 M	-	31.03.2010
262	power meter	NRV-S	825770/0010	Rohde & Schwarz	24/12 M	-	31.03.2010
263	signal generator	SMP 04	826190/0007	Rohde & Schwarz	36/12 M	-	31.03.2010
264	spectrum analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	31.03.2009
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24/12 M	-	31.03.2010
266	peak power sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24/12 M	-	31.03.2010
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	12 M	-	31.03.2009
268	AC/DC power supply	EA 3050-A	9823636	-	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator, (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
277	Vector-Networkanalyzer	ZVC	831363/0005	Rohde & Schwarz	12 M	-	31.03.2009
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
284	coupling decoupling network	CDN 801-M1	1661	Lüthi	12 M	-	31.03.2009
285	coupling decoupling network	CDN 801-S1	1642	Lüthi	12 M	-	31.03.2009
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	-	31.03.2009
289	bicon. - log. antenna (OATS)	CBL 6141	4107	Schaffner Chase	36/12 M	-	31.10.2010
290	notch filter GSM 900	WRCA 901.9/903.1SS	3RR	Wainwright GmbH	12 M	-	31.03.2009
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	-	31.03.2009
295	Racal Digital Radio Test Set	6103	1572	Racal	24/12 M	3	31.03.2009
298	Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	12 M	-	31.03.2009
299	audio microphone	134	-	Brüel & Kjaer	pre-m	2	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	31.03.2009
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	24/12 M	-	31.03.2010
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	24/12 M	-	31.03.2010
304	fix dipole antenna 1,6 GHz	EMCO 3125-307	9907-1001	ETS	24/12 M	-	31.03.2009
305	fix dipole antenna 1,8-2,0 GHz	EMCO 3125-306	9907-1001	ETS	24/12 M	-	31.03.2009
306	fix dipole antenna 2,45 GHz	EMCO 3125-308	9907-1001	ETS	24/12 M	-	31.03.2009
307	fix dipole antenna 3 GHz	EMCO 3125-309	9907-1001	ETS	24/12 M	-	31.03.2009
312	Switch unit	TS-RSP	1000147	R&S	12 M	1f	31.03.2009
317	1000 Hz calibrator 94 dB SPL	4230 94dB	1542286	Brüel & Kjaer	12 M	-	31.03.2009
323	Communication Tester	CMD 55	825878/034	Rohde & Schwarz	12 M	-	31.03.2009
331	climatic test chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	31.10.2009
335	System-CTC-EMS-Conducted	System EMS Conducted	-	Rohde & Schwarz	12 M	5	30.04.2009
340	Communication Tester	CMD 55	849709/037	Rohde & Schwarz	12 M	-	31.03.2009
341	digital multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2010
342	digital multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	12 M	-	31.03.2009
344	adaptor 150/50 Ohm	150/50	-	Krohne	12 M	-	31.03.2009
345	adaptor 150/50 Ohm	150/50	-	Krohne	12 M	-	31.03.2009
347	laboratory site	radio lab.	-	-	-	3	
348	laboratory site	EMI conducted	-	-	-	3	
349	car battery 12 V	car battery 12 V	without	-	-	3	
350	car battery 12 V	car battery 12 V	without	-	-	3	
354	DC - power supply 40A	NGPE 40/40	448	Rohde & Schwarz	24 M	-	31.03.2010
355	power meter	URV 5	891310/027	Rohde & Schwarz	12 M	-	31.03.2009
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24/12 M	-	31.03.2009
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24/12 M	-	31.03.2009
358	Power Amplifier 10 kHz-220MHz	AR75A220M1	15860	Amplifier Research	12 M	1b	30.04.2009
362	TOSM Calibration Kit 50 Ohm	ZV-Z21/ZV-Z11	without	Rohde&Schwarz	12 M	-	31.03.2009
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Rohde & Schwarz	24/12 M	-	31.03.2010
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	EM-Test	12 M	-	31.03.2009
367	audio measurement amplifier	2636	316832/001	Brüel & Kjaer	12 M	-	31.03.2009
369	insertion unit (SAR-EMS, Ch. A)	URV5-Z2	100301	Rohde & Schwarz	24/12 M	-	31.03.2010
370	insertion unit (SAR-EMS, Ch. B)	URV5-Z2	100302	Rohde & Schwarz	24/12 M	-	31.03.2009
371	Bluetooth Tester	CBT32	100153	R&S	12 M	-	31.03.2009
373	V-Network 5µH/50 Ohm	ESH3-Z6	100535	Rohde & Schwarz	other	-	31.03.2010
374	power amplifier 0,8-3 GHz	60S1G3	306528	Amplifier Research	-	1a	30.04.2009
375	directional coupler	DC7144M1	306498	Amplifier Research	-	1a	30.04.2009
376	horn antenna 6 GHz	BBHA9120 E	BBHA 9120 E 179	Schwarzbeck	12 M	-	31.03.2009
377	emi test receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	31.03.2009
378	broadband RF field monitor	RadiSense III	03D00013SNO-08	DARE B.V.	12 M	-	31.03.2009
383	signal generator	SME 03	842 828 /034	Rohde & Schwarz	36/12 M	-	31.03.2010
386	coupling decoupling network	CDN USB/p	19397	Schaffner	12 M	-	31.03.2009
387	coupling decoupling network	CDN L-801 M2	2051	Lüthi	12 M	-	31.03.2009
388	coupling decoupling network	CDN L-801 T2	1929	Lüthi	12 M	-	31.03.2009
389	digital multimeter	Keithley 2000	0583926	Keithley	24/12 M	-	31.03.2009
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	31.03.2009
394	power amplifier 80-1000 MHz	BLWA 0810-250/200	045610	Bonn-Elektronik	-	1a	30.04.2009
400	ferrite tube (>15 dB, EN 55022)	FTC 40 X 15 E	5559	Lüthi	12 M	-	31.03.2009
401	ferrite tube (>15 dB, EN 55022)	FTC 40 X 15 E	5560	Lüthi	12 M	-	31.03.2009
411	Test Cable Kit N 50 Ohm (male)	ZV-Z11	100200	R&S / Rosenberger	pre-m	2	
413	Quad-Ridge Horn Antenna	3164-04	00090667	ETS-Lindgren	12 M	1f	31.03.2009
414	Circularly polarized com. Antenna	3102	00033734	EMCO	-	3	
415	Antenna Position Controller	2090	00035634	ETS-Lindgren	-	4	
416	MAPS Positioner (light duty)	2010	-	ETS-Lindgren	-	4	
420	System CTC CTIA-OTA	System CTC CTIA-OTA	-	ETS-Lindgren/Cetecom	12 M	5	31.03.2009
429	MAPS-Positionier (medium duty)	2015	-	ETS-Lindgren	-	4	
430	Thermo-Hygrometer	H270	54476	Dostmann electronic	24 M	-	30.11.2009
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
432	pre-amplifier 100MHz-26GHz	JS4-00102600-38-5P	1030896	Miteq USA	12 M	-	31.03.2009
436	Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	31.03.2009
439	UltraLog-Antenna	HL 562	100248	Rohde + Schwarz	12 M	-	31.03.2009
441	System CTC-SAR-EMI	System EMI field (SAR)	-	ETS	12 M	5	30.06.2009
442	System CTC-SAR-EMS	System EMS field (SAR)	-	ETS-Lindgren/Cetecom	12 M	5	30.04.2009
443	System CTC-FAR-EMI-Spuri	System CTC-FAR-EMI-	-	ETS-Lindgren/Cetecom	12 M	5	30.04.2009
444	System CTC FAR-EMS	System EMS-Field (FAR)	-	ETS Lindgren/Cetecom	12 M	5	30.04.2009
448	notch filter WCDMA FDD II	WRCT 1850.0/2170.0-	5	Wainwright Instruments	12 M	1c	31.03.2009
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-	1	Wainwright Instruments	12 M	1c	31.03.2009
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
455	Oscilloscope	HP 54602B	US 350 336 45	Hawlett Packard	-	4	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
456	DC-Power supply 0-5A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
457	DC-Power supply, 0-5A	EA-3013 S	9624680	Elektro Automatik	pre-m	2	
459	DC -power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	31.03.2009
462	AF-Generator	MX-2020	-	Conrad	-	4	
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
464	Thermo-Hygro-Monitor	WS-9400	without	Europe Supplies Ltd.	24 M	-	30.11.2009
465	Thermo-Hygro-Monitor	WS-9400	without	Europe Supplies Ltd.	24 M	-	30.11.2009
466	digital multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2010
467	digital multimeter	Fluke 112	89680306	Fluke USA	24 M	-	31.03.2010
468	digital multimeter	Fluke 112	90090455	Fluke USA	24 M	-	31.03.2010
470	Thermo-Hygro-Monitor	WS-9400	-	distr. by Conrad	24 M	-	30.11.2009
476	Spectrum Analyzer	FSM	840500/004	Rohde & Schwarz	24/12 M	-	31.03.2009
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
482	filtermatrix	FilterMatrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-	1244554	Miteq	12 M	-	31.03.2009
487	NSA-Verification of CTC-SAR-EMI	System EMI field (SAR)	-	ETS	12 M	-	31.10.2009
489	emi test receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	31.03.2009
490	high pass 2,65 GHz>18GHz	6HC 2650/18000-3-KK	200709138	Trilithic	12 M	-	31.03.2009
491	ESD Simulator dito	ESD dito	dito307022	EM-Test	24 M	-	31.03.2009
494	power supply (GPIB)	Agilent 66332A	US 37474017	Agilent	24/12 M	-	31.03.2009
498	Power Supply	NGPE 40/40	402	Rohde & Schwarz	-	2	
500	industry Acoustic System	MO 2000 Set	100048	Sennheiser	-	4	
502	band reject filter	WRCG 1709/1786-	SN 9	Wainwright	-	-	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	-	-	
517	relais switc matrix	HF Relais Box Keithley	SE 04	-	-	-	
522	electronical load	EL 9000	-	ELV	-	-	
523	Digitalmultimeter	L4411A	MY46000154	Agilent	24 M	-	31.03.2009
524	Voltage Drop Simulator	VDS 200	0196-16	EM Test	18 M	-	31.03.2009
525	Koppelnetzwerk	CNA 200	1196-01	EM Test	18 M	-	31.03.2009
526	Burst Generator	EFT 200 A	0496-06	EM Test	18 M	-	31.03.2009
527	Micro Pulse Generator	MPG 200 B	0496-05	EM Test	18 M	-	31.03.2009
528	Load Dump Simulator	LD 200B	0496-06	EM Test	18 M	-	31.03.2009
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	-	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	2	-	
531	H-field system	Lackman System	without	Lackmann	-	2	
533	Impedance Stabilization Network	ISN T200A	25706	Teseq	12 M	-	29.04.2009
534	Impedance Stabilization Network	ISN T400A	24881	Teseq	12 M	-	29.04.2009
535	Impedance Stabilization Network	ISN T800	26321	Teseq	12 M	-	28.04.2009
536	Impedance Stabilization Network	ISN ST08	25867	Teseq	12 M	-	28.04.2009