



InterLab®

Final Report on

MO3311 / GTM501

HW: 4.3

SW: 0.19.2

Report Reference: MDE_OPTI_0720_Mauro_FCCb

Date: March 20, 2009

Test Laboratory:

7 layers AG
Borsigstr. 11
40880 Ratingen
Germany



DAT-P-192/99-01

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. Hans-Jürgen Meckelburg
René Schildknecht

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No:
DE 203159652
TAX No. 14 7/58 69/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Holger Leutfeld
Date Of Test Report: 2009/03/20
Date of first test: 2009/01/21
Date of last test: 2009/03/18

1.2 Applicant Data

Company Name: Option Wireless Germany GmbH
Street: Südstrasse 9
47475 Kamp-Lintfort
City: 47475 Kamp-Lintfort
Contact Person: Mr. Matthias Ruch
Function: Certification Engineer
Phone: +49 2842 92730-24
Fax: +49 2842 92730-01
Mobile: +49 172 3500321
E-Mail: M.Ruch@option.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01
Lab 2	Radio Lab	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01

1.4 Signature of the Testing Responsible



Dr. Michael Küppers
responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: M03311

Type / Model / Family: M03311 / GTM501
HW: 4.3
SW: 0.19.2

Product Category: Module

Manufacturer:
Company Name: see applicant

Parameter List:

Parameter name	Value
Parameter for Scope FCC_v2:	
AC Power Supply	220 (V)
Antenna gain	not specified (dBi)
DC Power Supply	12 (V)
highest channel	251 for GSM850, 810 for GSM1900
lowest channel	128 for GSM850, 512 for GSM1900
mid channel	190 for GSM850, 661 fro GSM1900

2.2 Detailed Description of OUT Samples

Sample : L05

<i>OUT Identifier</i>	MO3311		
<i>Sample Description</i>			
<i>Serial No.</i>	MA0L91D00C		
<i>HW Status</i>	4.2		
<i>SW Status</i>	0.14.1		
<i>Date of Receipt</i>	2009/01/21		
<i>Low Voltage</i>	3.2 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	21 °C

Sample : P05

<i>OUT Identifier</i>	MO3311		
<i>Sample Description</i>			
<i>Serial No.</i>	MA0L91E00X		
<i>HW Status</i>	4.2		
<i>SW Status</i>	0.14.1		
<i>Date of Receipt</i>	2009/01/21		
<i>Low Voltage</i>	3.0 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	3.6 V	<i>Normal Temp.</i>	21 °C

Sample : U06

<i>OUT Identifier</i>	MO3311		
<i>Sample Description</i>			
<i>Serial No.</i>	MA0I93B00X		
<i>HW Status</i>	4.3		
<i>SW Status</i>	0.19.2		
<i>Date of Receipt</i>	2009/03/10		
<i>Low Voltage</i>	3.2 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	21 °C

2.3 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 10					AC Adapter
AE 08					Interposer
AE 07					Test Antenna
AE 01	Cosi Board				Test Cradle
AE 09	Lifebook C1410	YK5T053779			Laptop

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
FCC22_L05			
<i>Sample: L05</i>		AE 10	AC Adapter
		AE 08	Interposer
		AE 07	Test Antenna
		AE 01	Test Cradle
		AE 09	Laptop
FCC22_P05			
<i>Sample: P05</i>		AE 10	AC Adapter
		AE 08	Interposer
		AE 07	Test Antenna
		AE 01	Test Cradle
		AE 09	Laptop
FCC22_U06			
<i>Sample: U06</i>		AE 10	AC Adapter
		AE 08	Interposer
		AE 07	Test Antenna
		AE 01	Test Cradle
		AE 09	Laptop

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART22PUBLIC MOBILE SERVICES	Part 22, Subpart H - Cellular Radiotelephone Service

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 22
<i>Date / Version</i>	2008/10/01 Version: 10-1-07 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 22 - PUBLIC MOBILE SERVICES

3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
22.1 RF Power Output §2.1046, §22.913					
22.1; Frequency Band = 850, Mode = EDGE, Channel = 128, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = 850, Mode = EDGE, Channel = 190, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = 850, Mode = EDGE, Channel = 251, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = 850, Mode = GSM, Channel = 128, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = 850, Mode = GSM, Channel = 190, Method = conducted	-	Passed	2009/01/21	Lab 2	FCC22_P05
22.1; Frequency Band = 850, Mode = GSM, Channel = 251, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05



Test Case Identifier / Name			Reference: MDE_OPTI_0720_Mauro_FCCb		
Test (condition)	Cat	Result	Date of Test	Lab Ref.	Setup
22.1 RF Power Output §2.1046, §22.913					
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Method = conducted	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.2 Frequency stability §2.1055					
22.2; Frequency Band = 850, Mode = EDGE	-	Passed	2009/02/20	Lab 2	FCC22_L05
22.2; Frequency Band = 850, Mode = GSM	-	Passed	2009/02/20	Lab 2	FCC22_L05
22.2; Frequency Band = FDD5, Mode = W-CDMA	-	Passed	2009/02/20	Lab 2	FCC22_L05
22.3 Spurious emissions at antenna terminals §2.1051, §22.917					
22.3; Frequency Band = 850, Mode = EDGE, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = 850, Mode = EDGE, Channel = 190	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = 850, Mode = EDGE, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = 850, Mode = GSM, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = 850, Mode = GSM, Channel = 190	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = 850, Mode = GSM, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233	-	Passed	2009/01/22	Lab 2	FCC22_P05



Test Case Identifier / Name			Reference: MDE_OPTI_0720_Mauro_FCCb		
Test (condition)	Cat	Result	Date of Test	Lab Ref.	Setup
22.4 Field strength of spurious radiation §2.1053, §22.917					
22.4; Frequency Band = 850, Mode = EDGE, Channel = 128	-	Passed	2009/03/17	Lab 1	FCC22_U06
22.4; Frequency Band = 850, Mode = EDGE, Channel = 190	-	Passed	2009/03/18	Lab 1	FCC22_U06
22.4; Frequency Band = 850, Mode = EDGE, Channel = 251	-	Passed	2009/03/18	Lab 1	FCC22_U06
22.4; Frequency Band = 850, Mode = GSM, Channel = 128	-	Passed	2009/03/16	Lab 1	FCC22_U06
22.4; Frequency Band = 850, Mode = GSM, Channel = 190	-	Passed	2009/03/16	Lab 1	FCC22_U06
22.4; Frequency Band = 850, Mode = GSM, Channel = 251	-	Passed	2009/03/16	Lab 1	FCC22_U06
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132	-	Passed	2009/03/18	Lab 1	FCC22_U06
		settings according to subtest 5 have been chosen as worst case			
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183	-	Passed	2009/03/18	Lab 1	FCC22_U06
		settings according to subtest 5 have been chosen as worst case			
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233	-	Passed	2009/03/18	Lab 1	FCC22_U06
		settings according to subtest 5 have been chosen as worst case			
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132	-	Passed	2009/03/18	Lab 1	FCC22_U06
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183	-	Passed	2009/03/18	Lab 1	FCC22_U06
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233	-	Passed	2009/03/18	Lab 1	FCC22_U06
22.5 Emission and Occupied Bandwidth §2.1049, §22.917					
22.5; Frequency Band = 850, Mode = EDGE, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = 850, Mode = EDGE, Channel = 190	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = 850, Mode = EDGE, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = 850, Mode = GSM, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = 850, Mode = GSM, Channel = 190	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = 850, Mode = GSM, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6 Band edge compliance §2.1053, §22.917					
22.6; Frequency Band = 850, Mode = EDGE, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6; Frequency Band = 850, Mode = EDGE, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6; Frequency Band = 850, Mode = GSM, Channel = 128	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6; Frequency Band = 850, Mode = GSM, Channel = 251	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132	-	Passed	2009/01/22	Lab 2	FCC22_P05
22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233	-	Passed	2009/01/22	Lab 2	FCC22_P05

3.5 Detailed Results

3.5.1 22.1 RF Power Output §2.1046, §22.913

Test: 22.1; Frequency Band = 850, Mode = EDGE, Channel = 128, Method = conducted

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 16:53

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	28.92	passed
average	maxhold	300	25.23	passed
rms	maxhold	300	25.78	passed

no external antenna gain is specified, the verdict is valid
for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = 850, Mode = EDGE, Channel = 190, Method = conducted

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 16:57

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	29.09	passed
average	maxhold	300	25.37	passed
rms	maxhold	300	25.82	passed

no external antenna gain is specified, the verdict is valid
for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = 850, Mode = EDGE, Channel = 251, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 16:52
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	29.06	passed
average	maxhold	300	25.37	passed
rms	maxhold	300	25.88	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = 850, Mode = GSM, Channel = 128, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 14:56
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	32.15	passed
average	maxhold	300	31.75	passed
rms	maxhold	300	31.79	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = 850, Mode = GSM, Channel = 190, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/21 14:56
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	32.09	passed
average	maxhold	300	31.70	passed
rms	maxhold	300	31.70	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = 850, Mode = GSM, Channel = 251, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:13
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	300	32.11	passed
average	maxhold	300	31.72	passed
rms	maxhold	300	31.74	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:16
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.20	passed
average	maxhold	10000	22.13	passed
rms	maxhold	10000	22.45	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:16
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.00	passed
average	maxhold	10000	22.79	passed
rms	maxhold	10000	22.95	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_1, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:16
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.72	passed
average	maxhold	10000	22.43	passed
rms	maxhold	10000	22.68	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:20
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.00	passed
average	maxhold	10000	20.04	passed
rms	maxhold	10000	20.79	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:20
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.39	passed
average	maxhold	10000	20.76	passed
rms	maxhold	10000	21.48	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_2, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:20
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	20.33	passed
rms	maxhold	10000	21.21	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	19.65	passed
rms	maxhold	10000	20.81	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.77	passed
average	maxhold	10000	20.28	passed
rms	maxhold	10000	20.95	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_3, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.63	passed
average	maxhold	10000	20.13	passed
rms	maxhold	10000	20.88	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:22
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	19.23	passed
rms	maxhold	10000	20.48	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	30.05	passed
average	maxhold	10000	19.70	passed
rms	maxhold	10000	20.95	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSDPA_subtest_4, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:22
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.39	passed
average	maxhold	10000	19.58	passed
rms	maxhold	10000	20.76	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.60	passed
average	maxhold	10000	20.34	passed
rms	maxhold	10000	20.75	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.20	passed
average	maxhold	10000	20.39	passed
rms	maxhold	10000	20.80	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_1, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.20	passed
average	maxhold	10000	20.20	passed
rms	maxhold	10000	20.56	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:59
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 25°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.14	passed
average	maxhold	10000	18.96	passed
rms	maxhold	10000	20.02	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 16:02
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 25°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	30.27	passed
average	maxhold	10000	19.71	passed
rms	maxhold	10000	20.77	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_2, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 16:04
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 25°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.51	passed
average	maxhold	10000	19.24	passed
rms	maxhold	10000	20.23	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 16:06
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 25°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	20.14	passed
rms	maxhold	10000	20.93	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	30.27	passed
average	maxhold	10000	20.16	passed
rms	maxhold	10000	20.95	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_3, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 16:13
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 25°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.77	passed
average	maxhold	10000	20.36	passed
rms	maxhold	10000	21.11	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.39	passed
average	maxhold	10000	19.37	passed
rms	maxhold	10000	20.71	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	19.49	passed
rms	maxhold	10000	20.72	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_4, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:21
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.90	passed
average	maxhold	10000	19.69	passed
rms	maxhold	10000	20.93	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:22
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.86	passed
average	maxhold	10000	20.93	passed
rms	maxhold	10000	21.31	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:22
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.34	passed
average	maxhold	10000	20.59	passed
rms	maxhold	10000	20.97	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = HSUPA_subtest_5, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:22
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.47	passed
average	maxhold	10000	20.72	passed
rms	maxhold	10000	21.06	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.72	passed
average	maxhold	10000	22.36	passed
rms	maxhold	10000	22.53	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	29.14	passed
average	maxhold	10000	22.83	passed
rms	maxhold	10000	22.99	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

Test: 22.1; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Method = conducted

Result: Passed
Setup No.: FCC22_P05
Date of Test: 2009/01/22 15:15
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

detector	trace	resolution bandwidth /kHz	conducted peak value /dBm	verdict
peak	maxhold	10000	28.72	passed
average	maxhold	10000	22.61	passed
rms	maxhold	10000	22.85	passed

no external antenna gain is specified, the verdict is valid
 for external antenna gains matching the MPE calculation

3.5.2 22.2 Frequency stability §2.1055

Test: 22.2; Frequency Band = 850, Mode = EDGE

Result: Passed

Setup No.: FCC22_L05

Date of Test: 2009/02/20 14:27

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 23°C

Air Pressure: 1027hPa

Rel. Humidity: 33%

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-10	0	normal	2095,5	-6	-17	passed
-10	5			-4	-15	passed
-10	10			-3	-13	passed
0	0	normal	2095,5	-5	-16	passed
0	5			-2	-11	passed
0	10			-3	-13	passed
10	0	normal	2095,5	4	12	passed
10	5			-4	-13	passed
10	10			-6	-14	passed
20	0	high = normal	2095,5	-2	-14	passed
20	5			-2	-15	passed
20	10			2	12	passed
20	0	low	2095,5	-5	-14	passed
20	5			-3	-14	passed
20	10			1	11	passed
30	0	normal	2095,5	-6	-15	passed
30	5			-7	-19	passed
30	10			-3	-15	passed
40	0	normal	2095,5	-6	-16	passed
40	5			-5	-18	passed
40	10			1	16	passed
50	0	normal	2095,5	-8	-17	passed
50	5			-10	-23	passed
50	10			-1	13	passed

Test: 22.2; Frequency Band = 850, Mode = GSM

Result: Passed
Setup No.: FCC22_L05
Date of Test: 2009/02/20 14:26
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 23°C
Air Pressure: 1027hPa
Rel. Humidity: 33%

Detailed Results:

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-10	0	normal	2095,5	1	11	passed
-10	5			-3	-11	passed
-10	10			-1	12	passed
0	0	normal	2095,5	1	14	passed
0	5			1	11	passed
0	10			4	15	passed
10	0	normal	2095,5	3	16	passed
10	5			5	15	passed
10	10			2	16	passed
20	0	high = normal	2095,5	1	-13	passed
20	5			1	15	passed
20	10			-1	-11	passed
20	0	low	2095,5	-1	-9	passed
20	5			3	14	passed
20	10			1	12	passed
30	0	normal	2095,5	-2	-10	passed
30	5			-2	-12	passed
30	10			-3	-14	passed
40	0	normal	2095,5	-6	-16	passed
40	5			-4	-16	passed
40	10			-5	-15	passed
50	0	normal	2095,5	-5	-14	passed
50	5			1	16	passed
50	10			-4	-12	passed

Test: 22.2; Frequency Band = FDD5, Mode = W-CDMA

Result: Passed
Setup No.: FCC22_L05
Date of Test: 2009/02/20 14:27
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 23°C
Air Pressure: 1027hPa
Rel. Humidity: 33%

Detailed Results:


Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-10	0	normal	2095.5	-3	-11	passed
-10	5			-3	-18	passed
-10	10			-3	-25	passed
0	0	normal	2095.5	-3	34	passed
0	5			-4	-19	passed
0	10			-3	-20	passed
10	0	normal	2095.5	-4	-16	passed
10	5			-3	-15	passed
10	10			-3	-24	passed
20	0	high = normal	2095.5	-4	-12	passed
20	5			-2	23	passed
20	10			-3	25	passed
20	0	low	2095.5	-3	-18	passed
20	5			-3	-17	passed
20	10			-3	-19	passed
30	0	normal	2095.5	-5	-18	passed
30	5			-4	-30	passed
30	10			-3	33	passed
40	0	normal	2095.5	-3	-21	passed
40	5			-3	21	passed
40	10			-6	-33	passed
50	0	normal	2095.5	-4	-13	passed
50	5			-4	-29	passed
50	10			-3	-18	passed

3.5.3 22.3 Spurious emissions at antenna terminals §2.1051, §22.917

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 128

<i>Result:</i>	Passed
<i>Setup No.:</i>	FCC22_P05
<i>Date of Test:</i>	2009/01/22 15:17
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22
<i>Test Equipment Environmental Conditions</i>	
<i>Temperature:</i>	24°C
<i>Air Pressure:</i>	1003hPa
<i>Rel. Humidity:</i>	33%

Detailed Results:

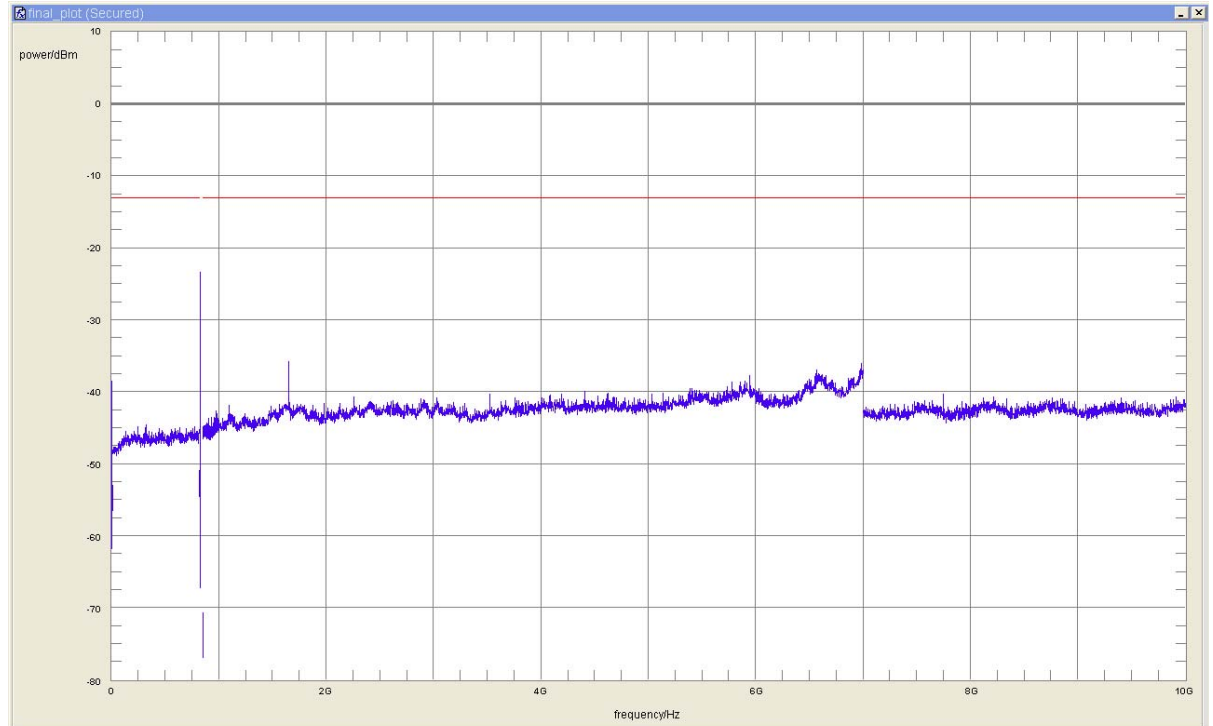

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	100	823.00	-33.0	20.0	-13.0	passed
peak	maxhold	3	823.9639	-23.4	10.4	-13.0	passed
peak	maxhold	3	823.9920	-24.6	11.6	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 190

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

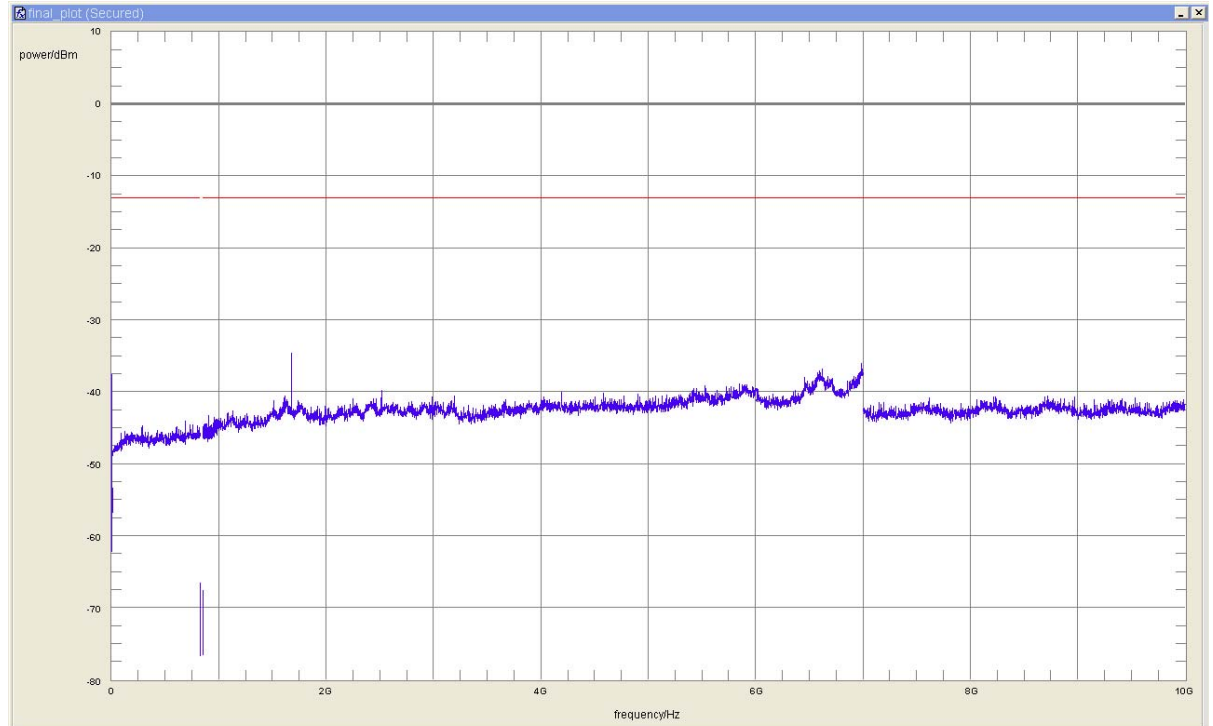

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	1673.347	-34.64	21.64	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17


Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1003hPa
Rel. Humidity: 33%

Detailed Results:

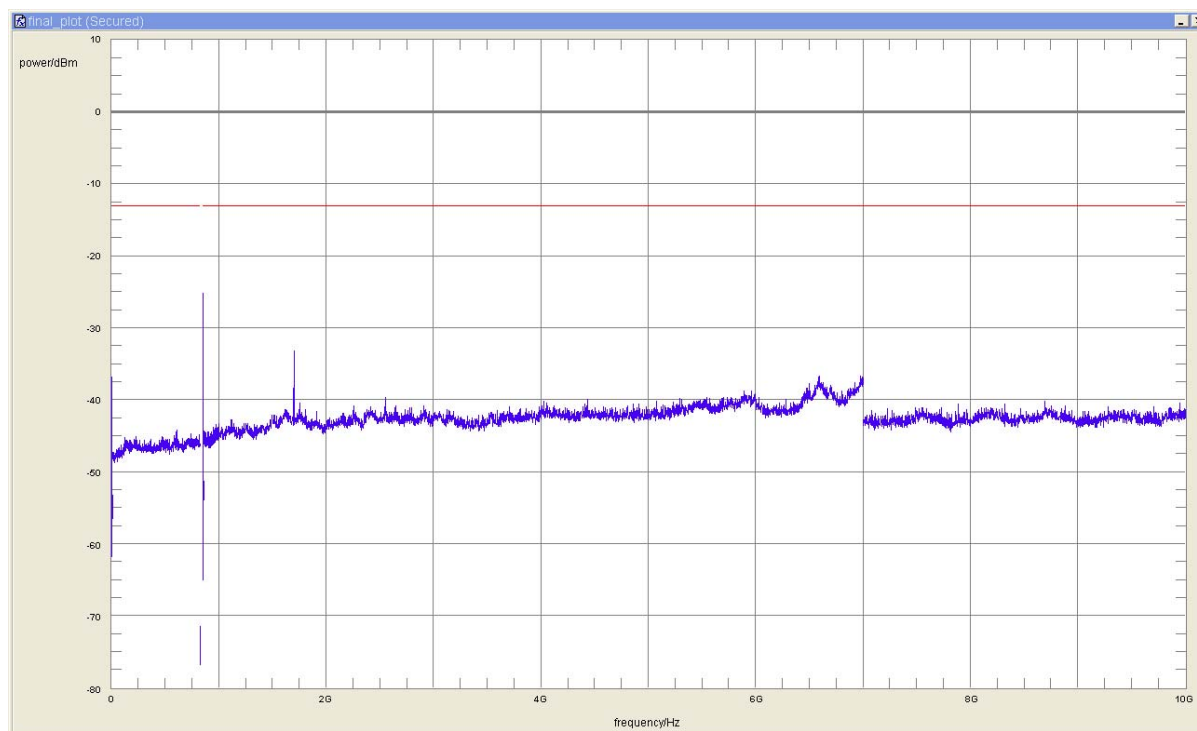

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.0040	-25.2	12.2	-13.0	passed
peak	maxhold	3	849.0220	-25.3	12.3	-13.0	passed
peak	maxhold	3	849.0341	-25.4	12.4	-13.0	passed
peak	maxhold	100	850.00	-28.6	15.6	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 128

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 11:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

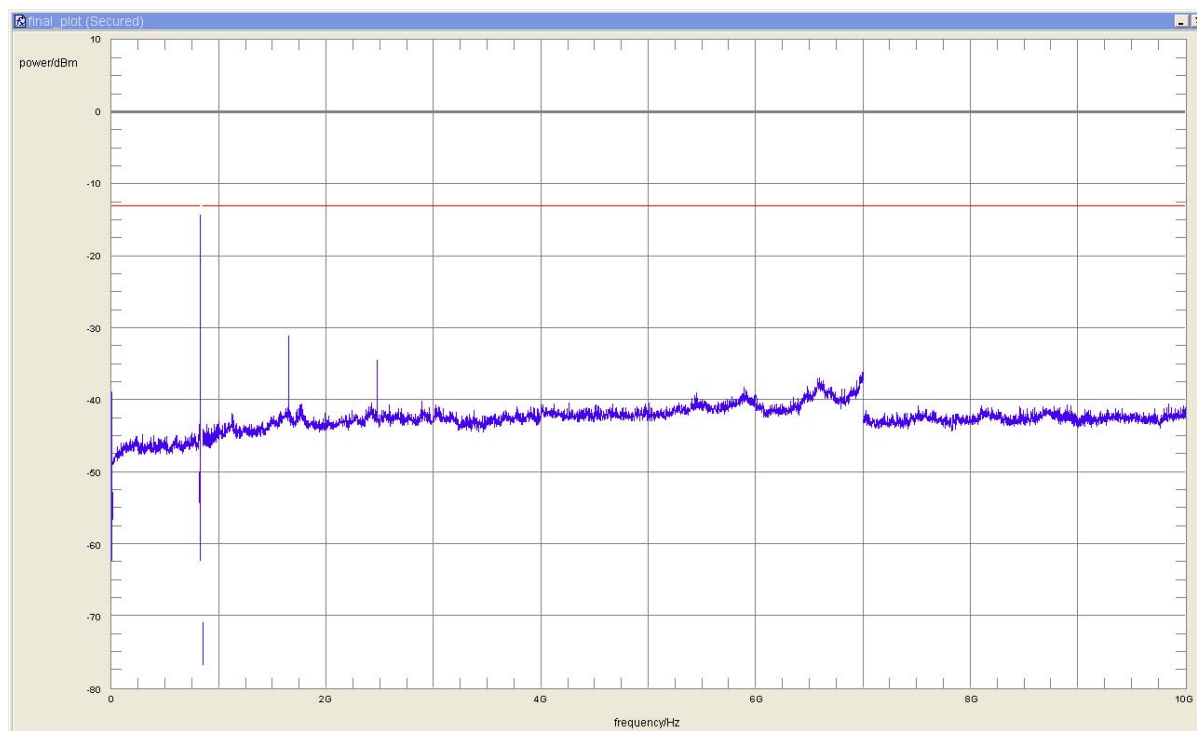

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	823.9018	-28.7	15.7	-13.0	passed
peak	maxhold	3	823.9259	-24.0	11.0	-13.0	passed
peak	maxhold	3	823.9519	-21.1	8.1	-13.0	passed
peak	maxhold	3	823.9840	-14.3	1.3	-13.0	passed
peak	maxhold	3	823.9980	-14.7	1.7	-13.0	passed
peak	maxhold	1000	1649.3	-31.1	18.1	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 190

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

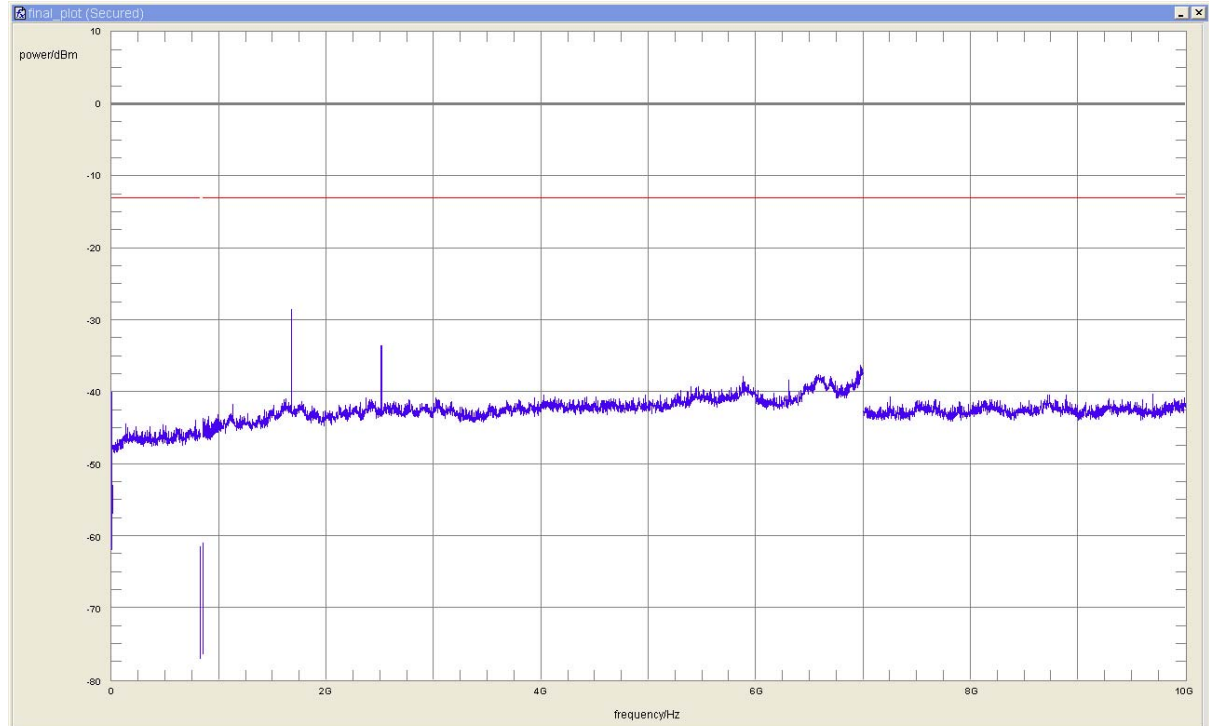

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	1673.3	-28.5	15.5	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

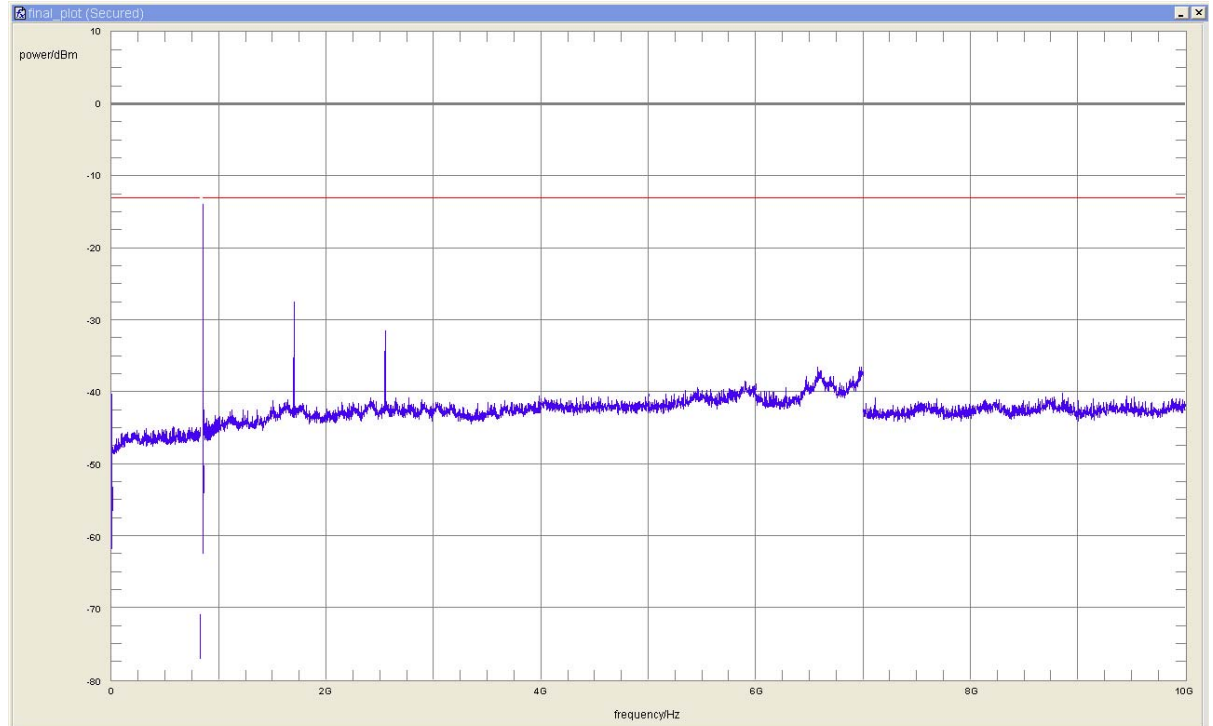

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.0160	-14.0	1.0	-13.0	passed
peak	maxhold	1000	1699.4	-27.5	14.5	-13.0	passed
peak	maxhold	1000	2547.1	-31.6	18.6	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

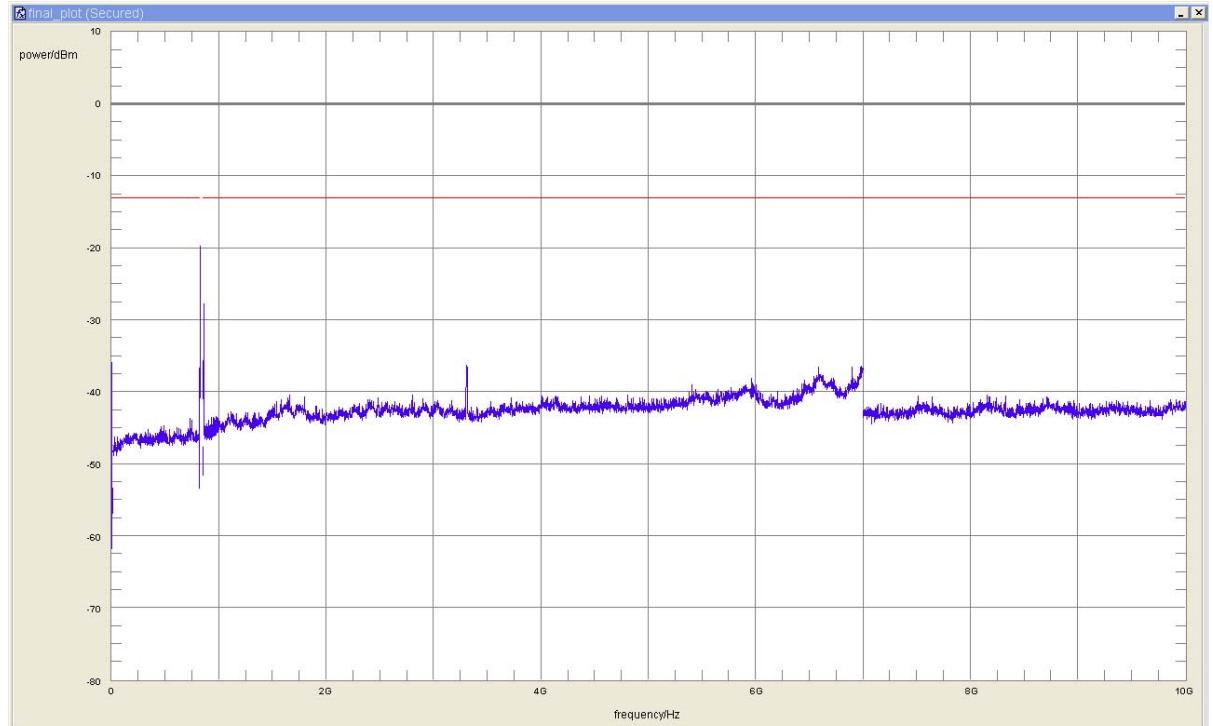

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	100	822.93	-27.4	14.4	-13.0	passed
peak	maxhold	50	824.00	-19.6	6.6	-13.0	passed
peak	maxhold	1000	856.0	-27.8	14.8	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

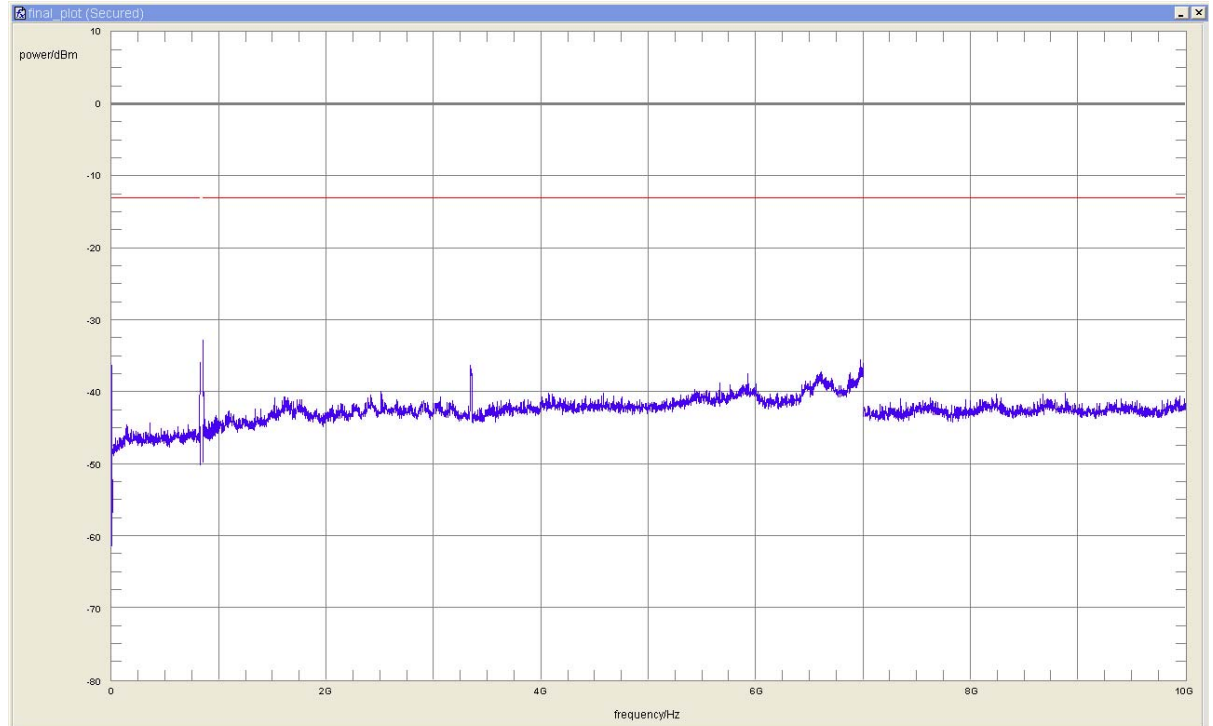

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	850.0	-32.8	19.8	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:17

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

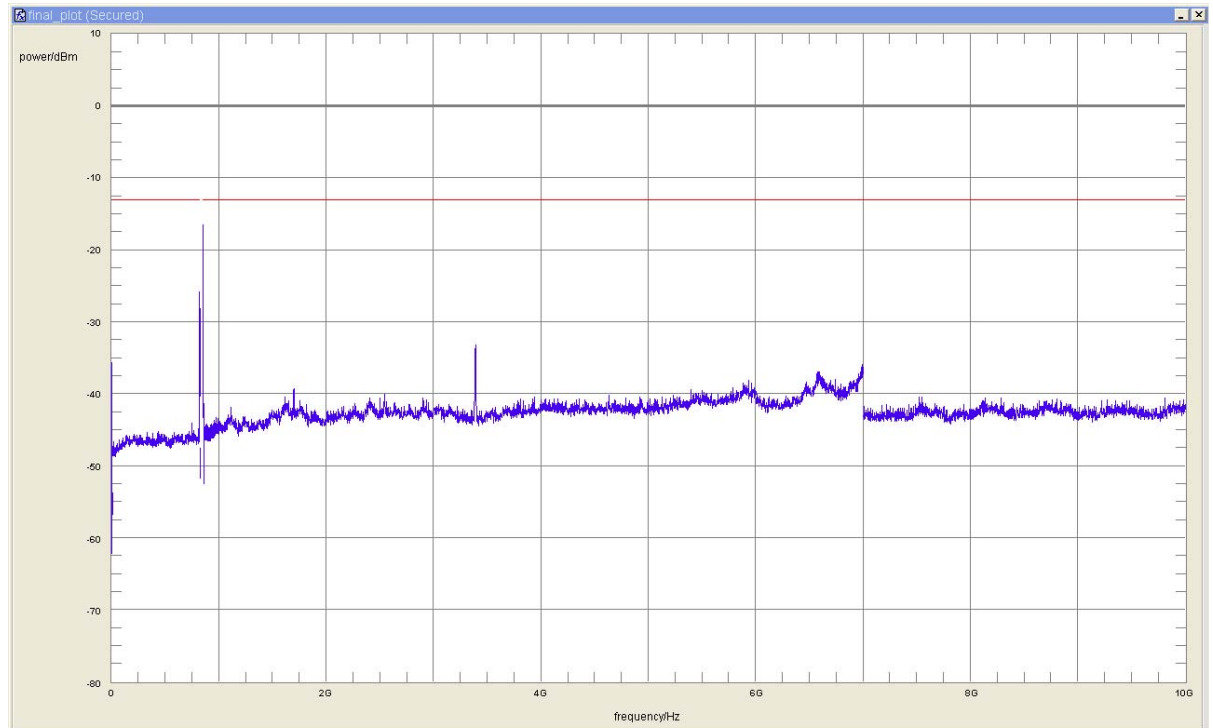

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	818.1	-25.9	12.9	-13.0	passed
peak	maxhold	50	849.00	-16.5	3.5	-13.0	passed
peak	maxhold	100	850.02	-28.1	15.1	-13.0	passed

no further values have been found with a margin of less than 20 dB

3.5.4 22.4 Field strength of spurious radiation §2.1053, §22.917

Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 128

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/17 6:51
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 25°C
Air Pressure: 1033hPa
Rel. Humidity: 33%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
824.0	-25.3	12.3	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 190

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/18 6:29
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1035hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
-	-	-	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = 850, Mode = EDGE, Channel = 251

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/18 6:32
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1036hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
849.0	-25.9	12.9	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 128

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/16 4:00
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 23°C
Air Pressure: 1030hPa
Rel. Humidity: 33%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
824	-18.00	5.0	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 190

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/16 7:31
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1030hPa
Rel. Humidity: 33%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
-	-	-	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = 850, Mode = GSM, Channel = 251

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/16 10:32
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1030hPa
Rel. Humidity: 33%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
849	-19.12	6.1	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132

Result: Passed
 settings according to subtest 5 have been chosen as worst case
Setup No.: FCC22_U06
Date of Test: 2009/03/18 12:11
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22
Test Equipment Environmental Conditions
Temperature: 24°C
Air Pressure: 1035hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
			-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183

Result: Passed
settings according to subtest 5 have been chosen as worst case

Setup No.: FCC22_U06

Date of Test: 2009/03/18 13:53

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1035hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
-	-	-	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233

Result: Passed
settings according to subtest 5 have been chosen as worst case

Setup No.: FCC22_U06

Date of Test: 2009/03/18 15:48

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 24°C
Air Pressure: 1035hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
818.0	-30.3	17.3	-13.0	Passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132

Result: Passed

Setup No.: FCC22_U06

Date of Test: 2009/03/18 22:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 26°C
Air Pressure: 1031hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
		-13.0	-13.0	Failed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/18 22:19
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
		-13.0	-13.0	Failed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233

Result: Passed
Setup No.: FCC22_U06
Date of Test: 2009/03/18 22:24
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Test Equipment Environmental Conditions

Temperature: 26°C
Air Pressure: 1031hPa
Rel. Humidity: 30%

Detailed Results:

frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
818.0	-29.5	16.5	-13.0	Passed

no further values have been found with a margin of less than 20 dB




3.5.5 22.5 Emission and Occupied Bandwidth §2.1049, §22.917


Test: 22.5; Frequency Band = 850, Mode = EDGE, Channel = 128

<i>Result:</i>	Passed
<i>Setup No.:</i>	FCC22_P05
<i>Date of Test:</i>	2009/01/22 11:18
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22
<i>Test Equipment Environmental Conditions</i>	
<i>Temperature:</i>	24°C
<i>Air Pressure:</i>	1003hPa
<i>Rel. Humidity:</i>	33%

Detailed Results:

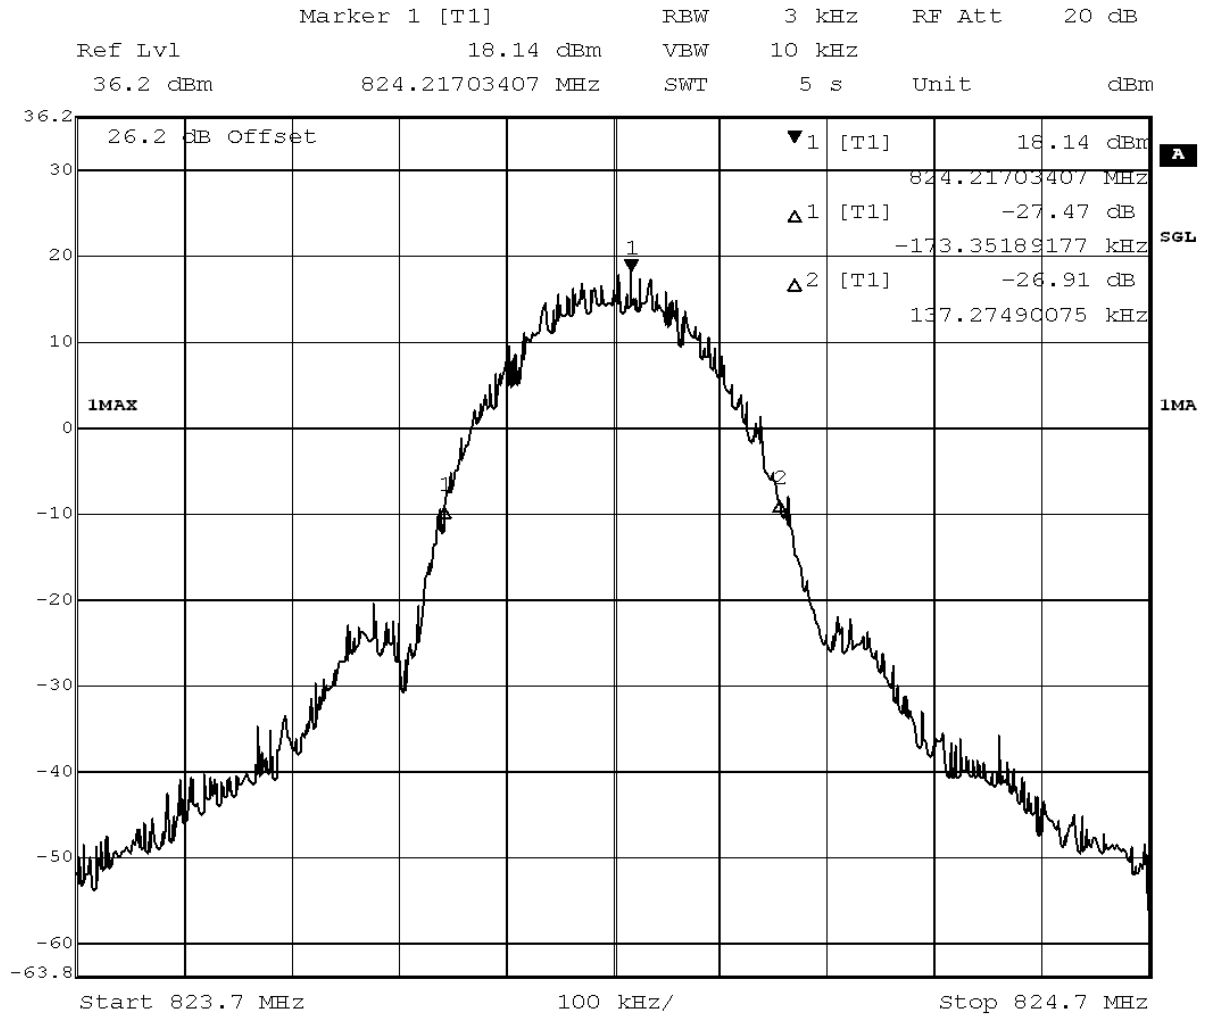

Title: bandwidth measurement
Comment A: 37330, EDGE850, 26dB bandwidth,
channel 128 (824.2MHz)
Date: 22.JAN.2009 12:30:11

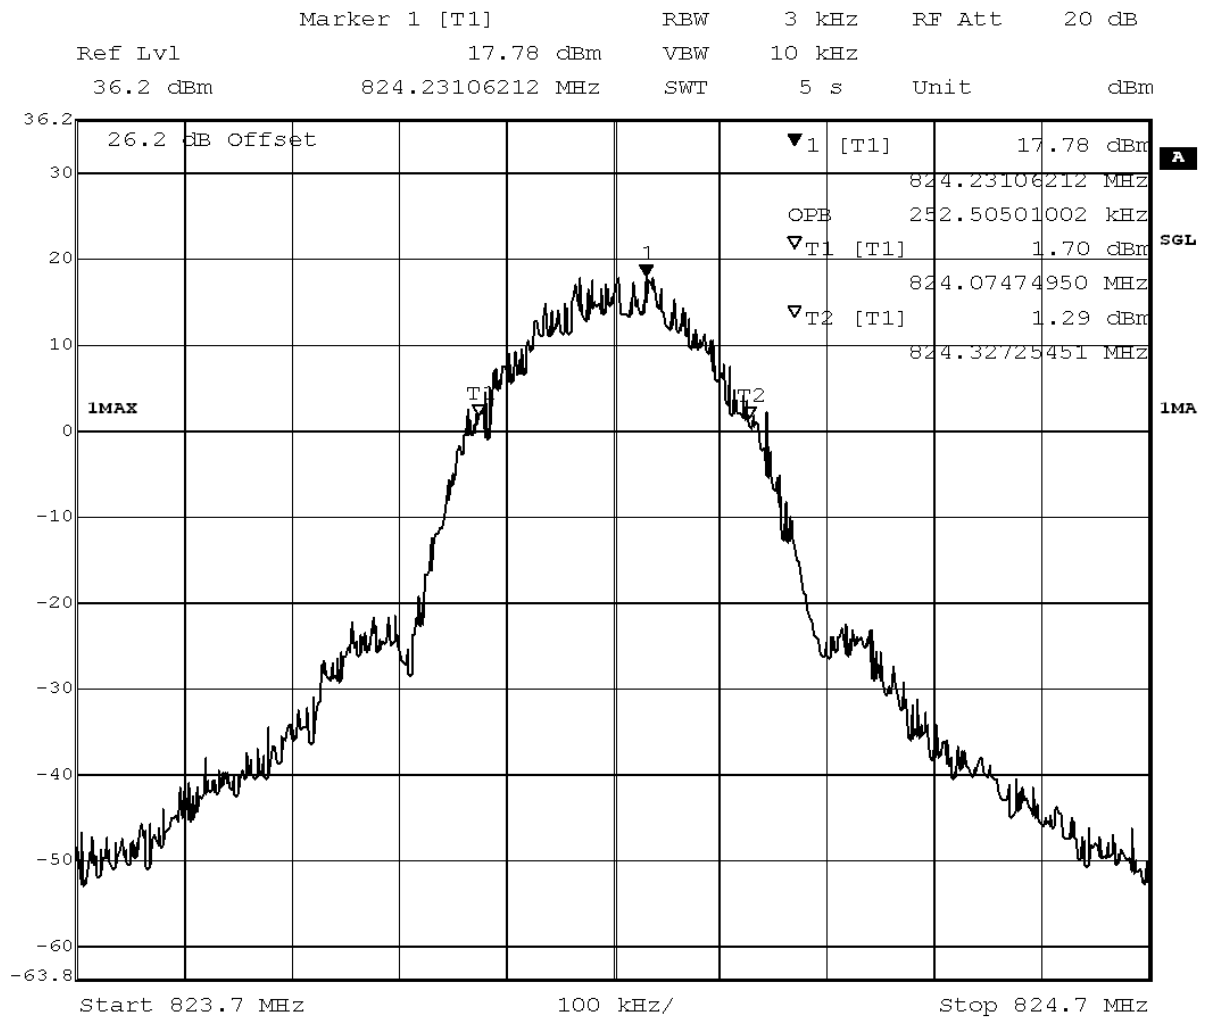

Title: bandwidth measurement
Comment A: 37330, EDGE850, occupied bandwidth (99%),
channel 128 (824.2MHz)
Date: 22.JAN.2009 12:30:31



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	310.6	passed
peak	maxhold	3	99% bandwidth	252.5	passed

Test: 22.5; Frequency Band = 850, Mode = EDGE, Channel = 190

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

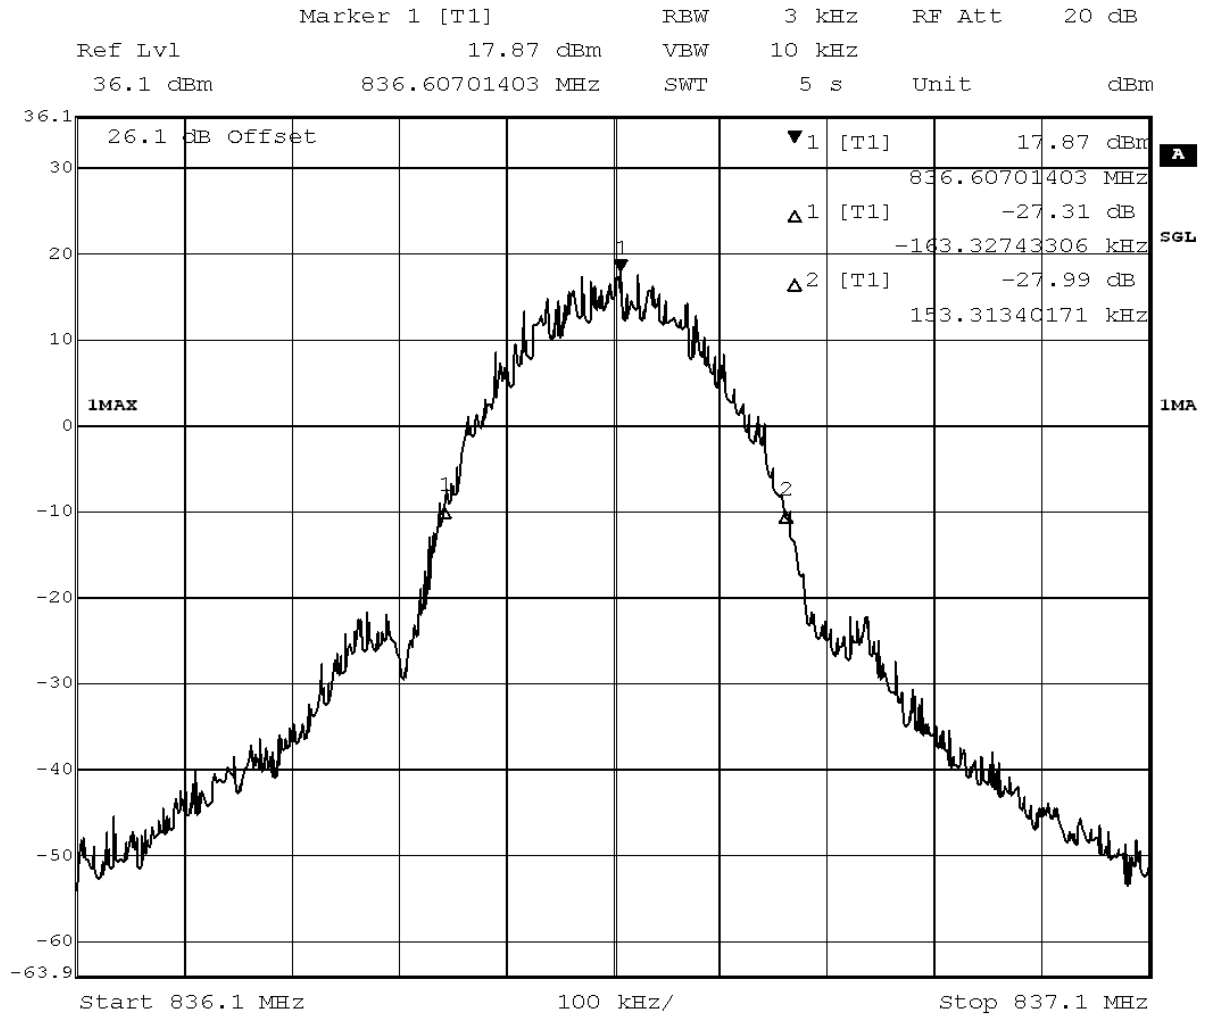

Title: bandwidth measurement
Comment A: 37330, EDGE850, 26dB bandwidth,
channel 190 (836.6MHz)
Date: 22.JAN.2009 12:45:38

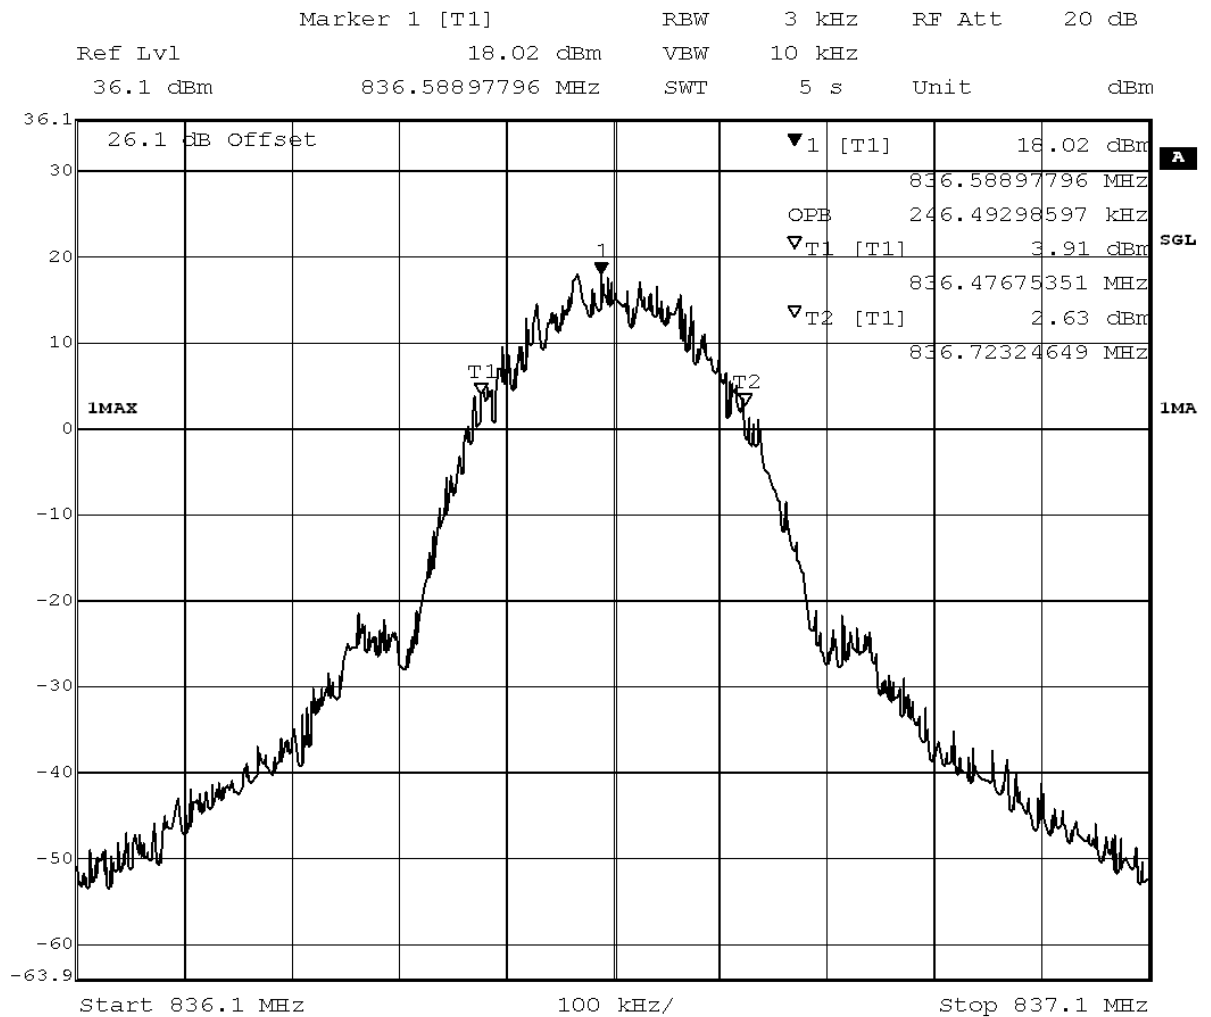

Title: bandwidth measurement

Comment A: 37330, EDGE850, occupied bandwidth (99%),
channel 190 (836.6MHz)

Date: 22.JAN.2009 12:45:57



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	316.6	passed
peak	maxhold	3	99% bandwidth	246.5	passed

Test: 22.5; Frequency Band = 850, Mode = EDGE, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

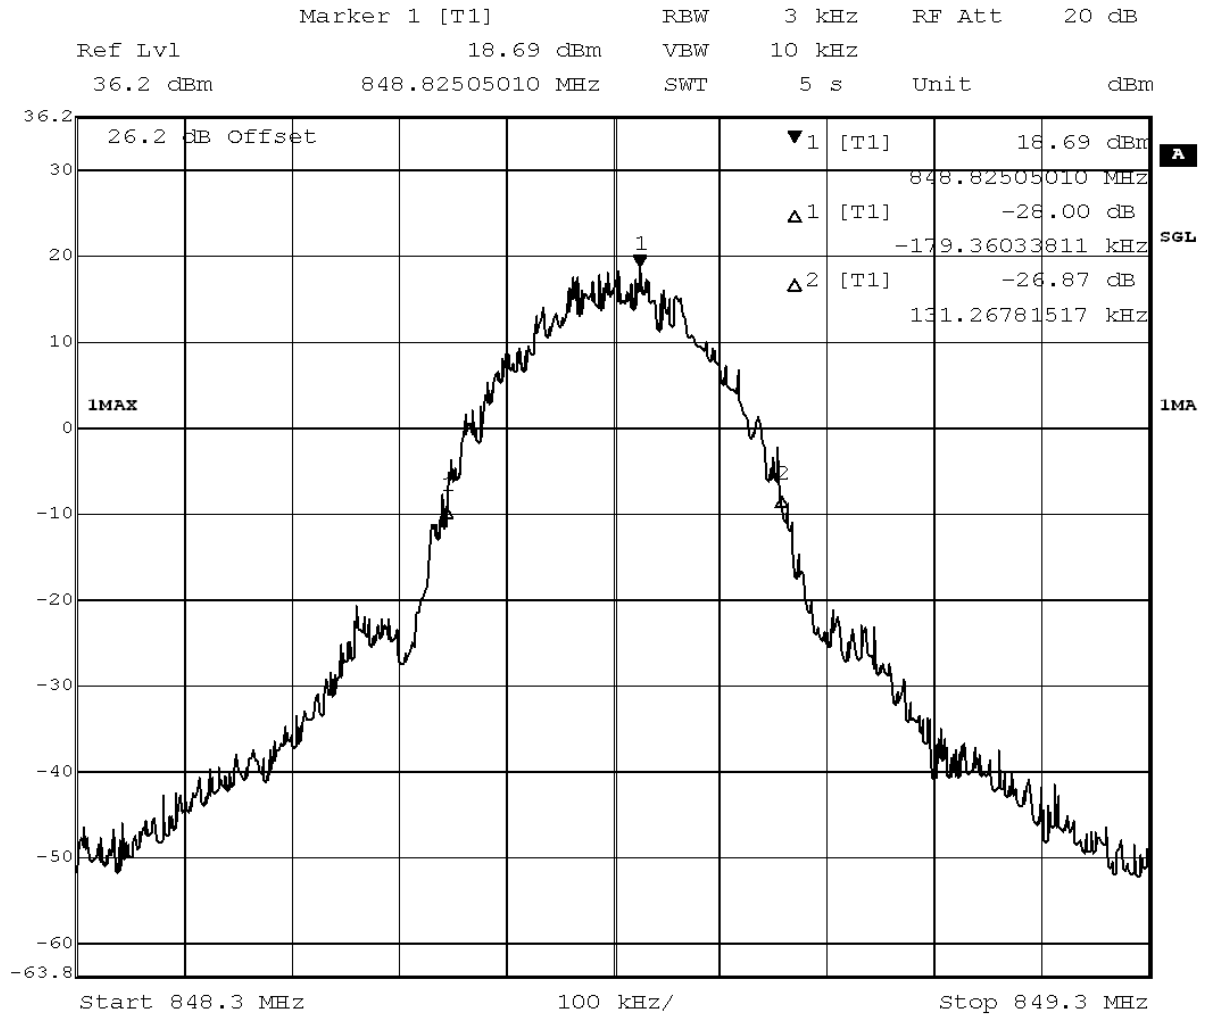

Title: bandwidth measurement
Comment A: 37330, EDGE850, 26dB bandwidth,
channel 251 (848.8MHz)
Date: 22.JAN.2009 12:38:56

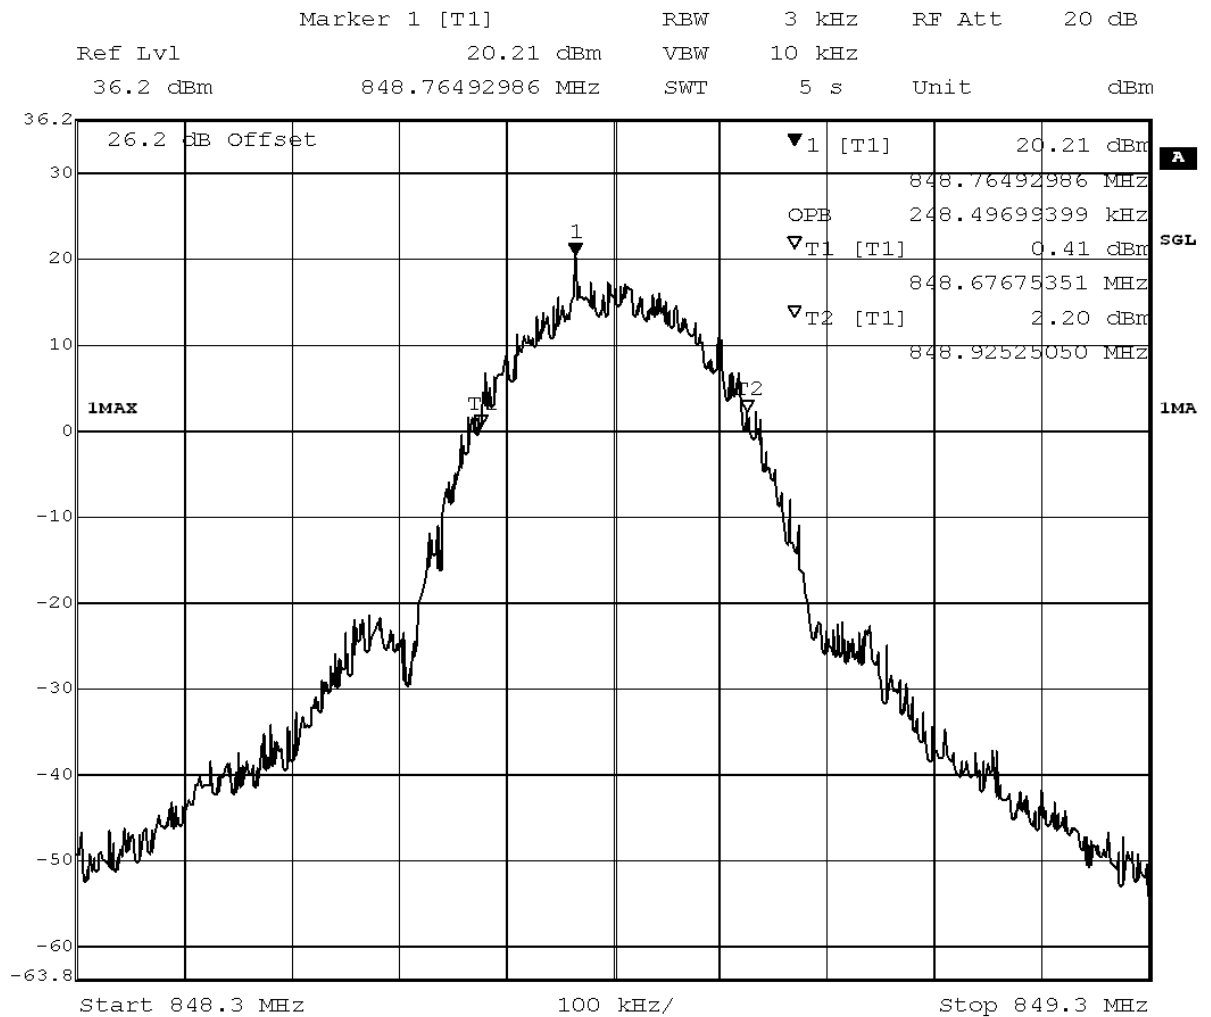

Title: bandwidth measurement
Comment A: 37330, EDGE850, occupied bandwidth (99%),
channel 251 (848.8MHz)
Date: 22.JAN.2009 12:39:15



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	310.6	passed
peak	maxhold	3	99% bandwidth	248.5	passed

Test: 22.5; Frequency Band = 850, Mode = GSM, Channel = 128

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

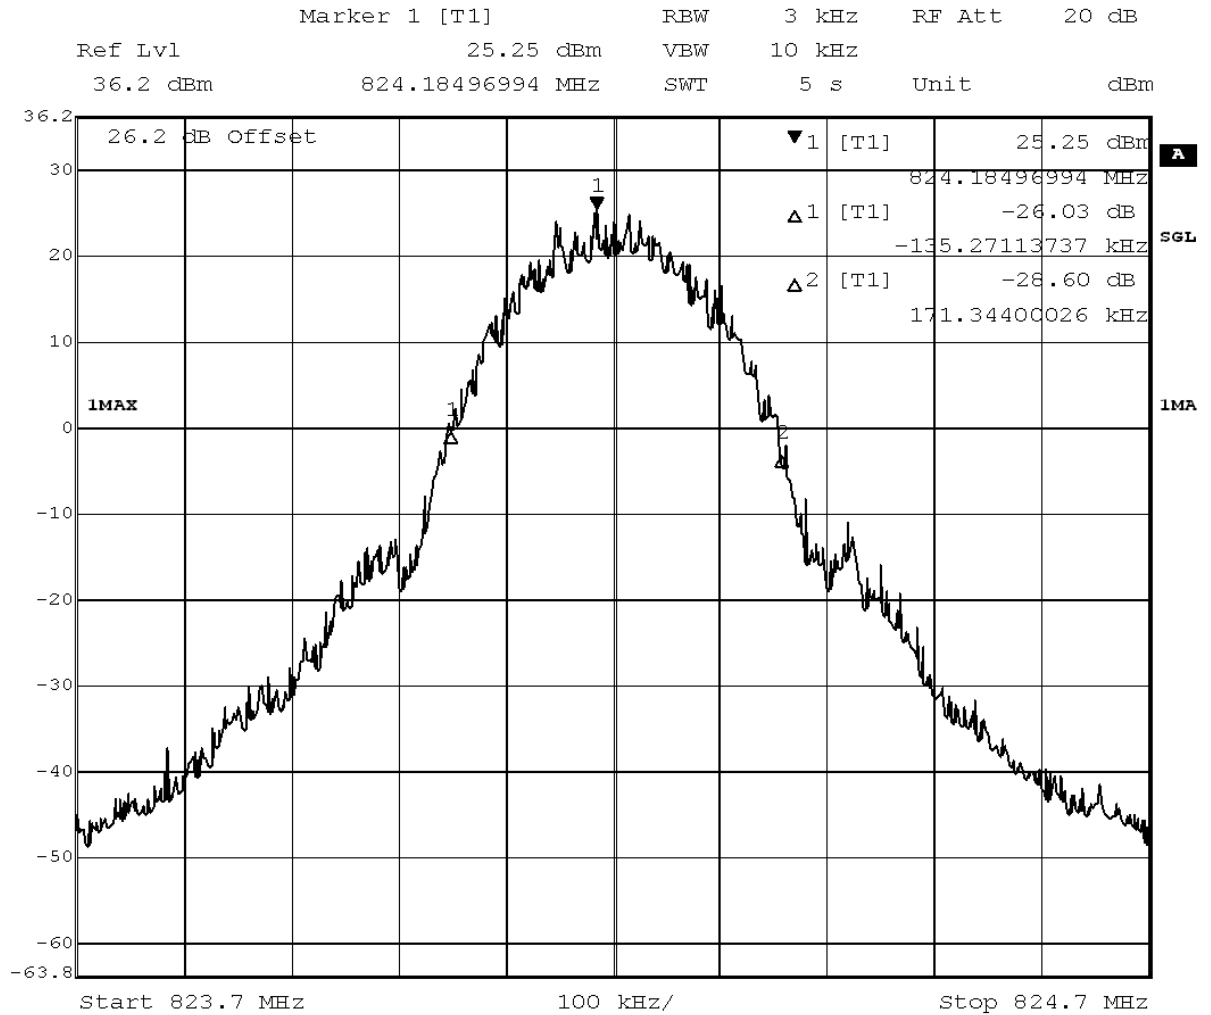

Title: bandwidth measurement
Comment A: 37330, GSM850, 26dB bandwidth, channel 128
(824.2MHz)
Date: 22.JAN.2009 12:11:07

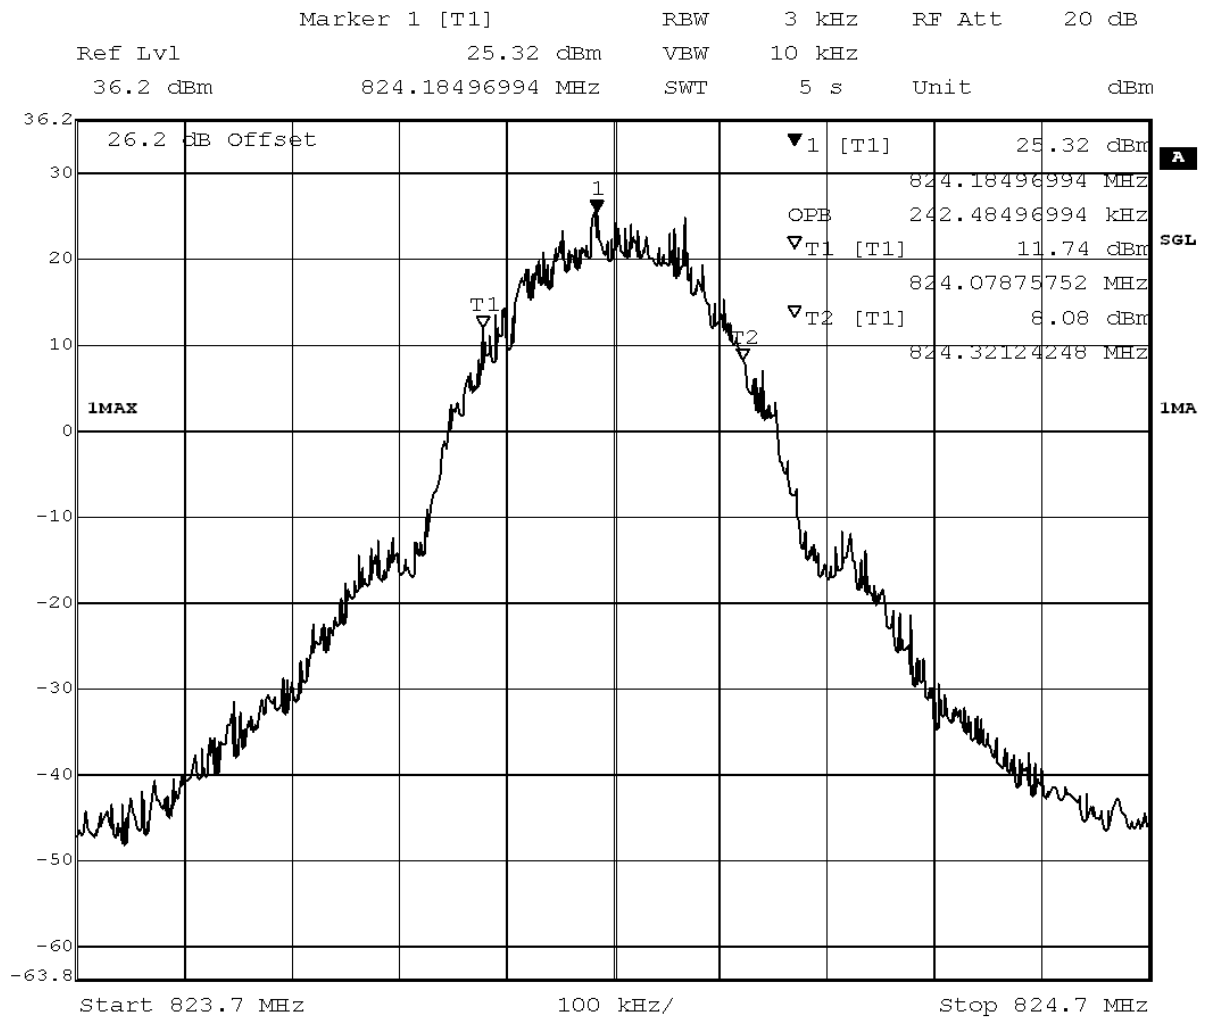

Title: bandwidth measurement
 Comment A: 37330, GSM850, occupied bandwidth (99%),
 channel 128 (824.2MHz)
 Date: 22.JAN.2009 12:11:27



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	306.6	passed
peak	maxhold	3	99% bandwidth	242.5	passed

Test: 22.5; Frequency Band = 850, Mode = GSM, Channel = 190

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

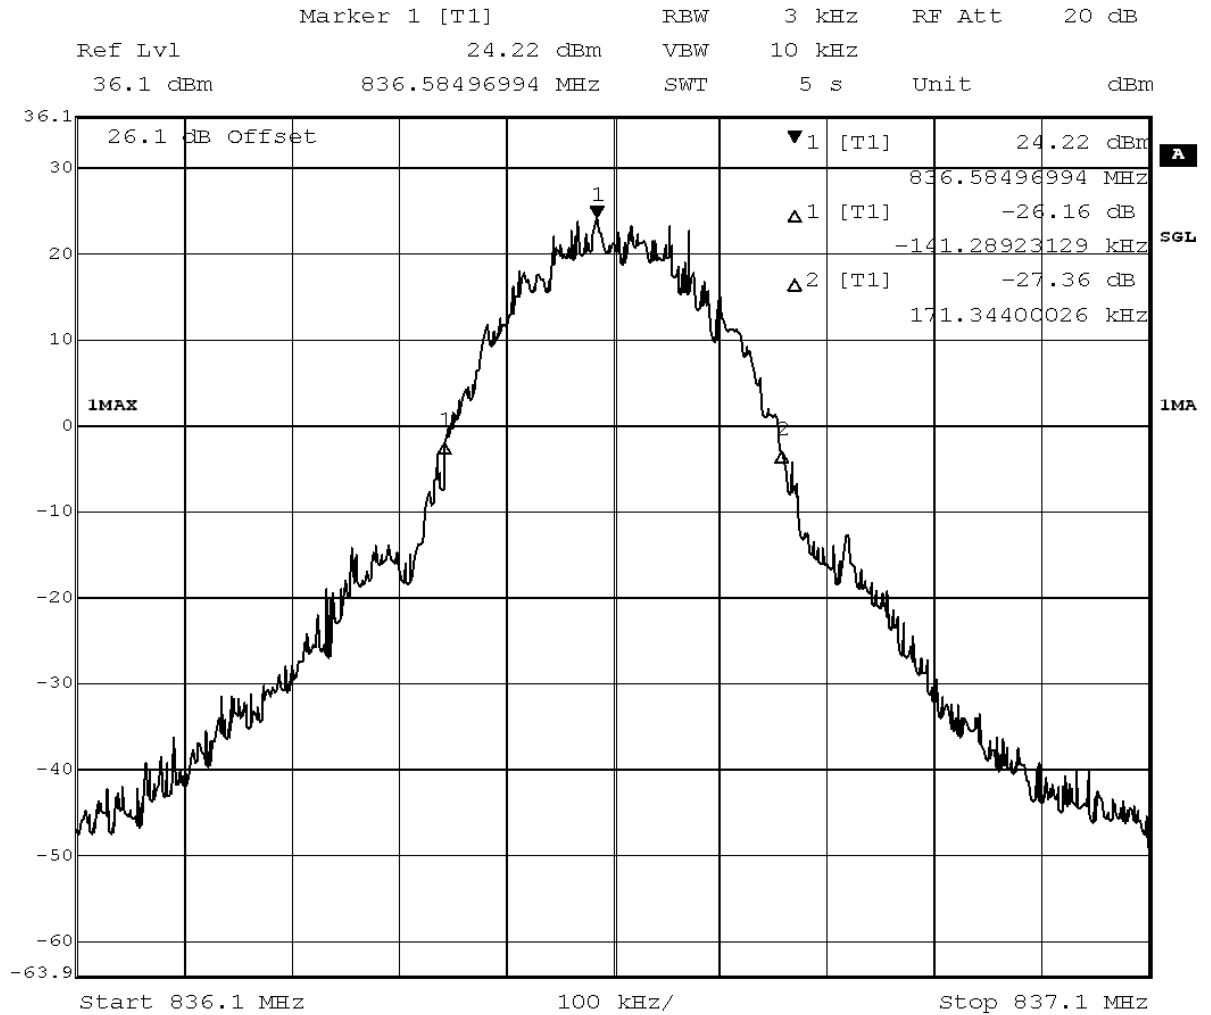

Title: bandwidth measurement
Comment A: 37330, GSM850, 26dB bandwidth, channel 190
(836.6MHz)
Date: 22.JAN.2009 12:00:32

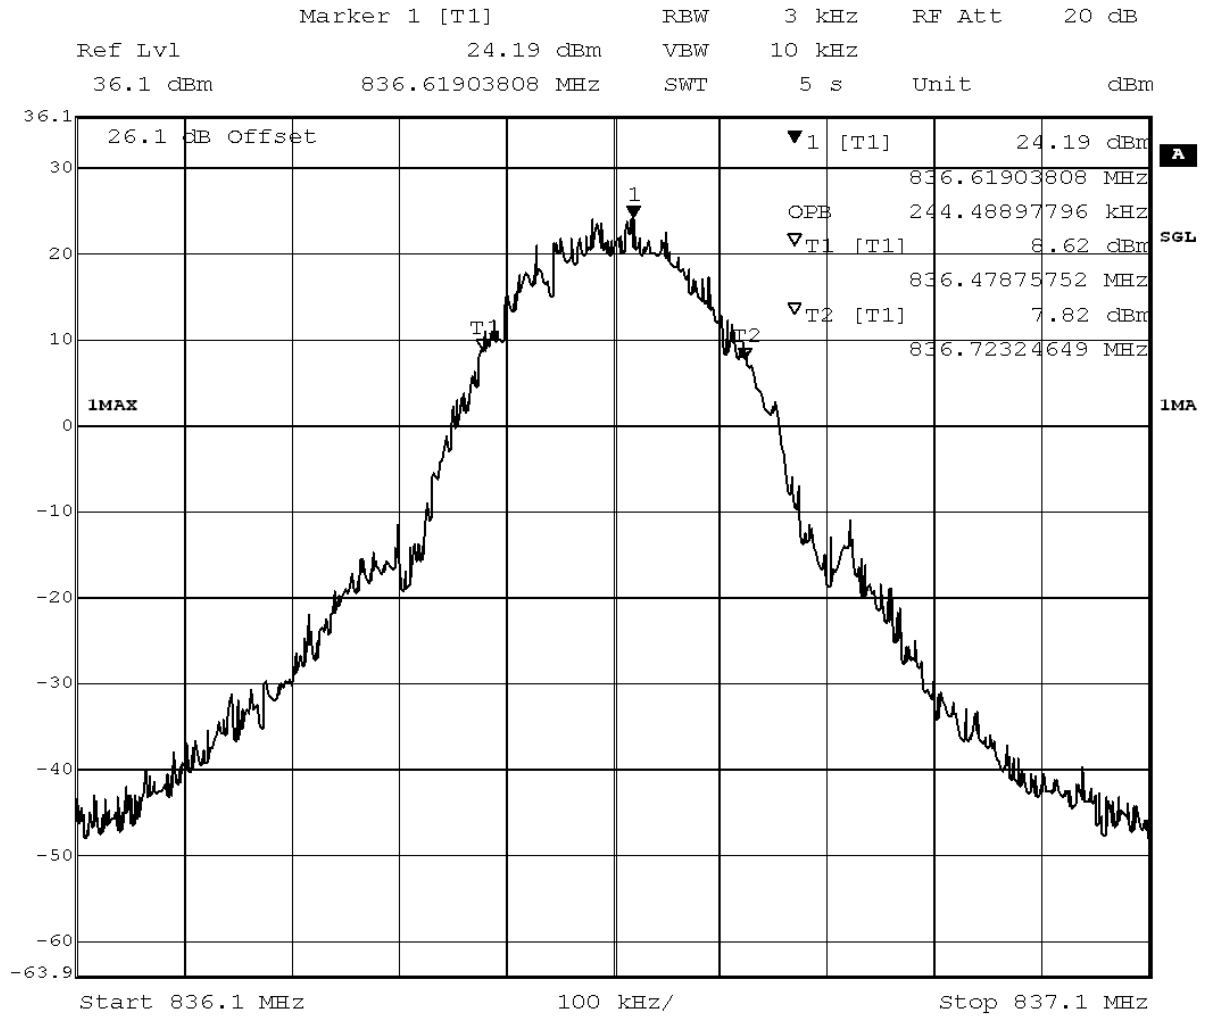

Title: bandwidth measurement

Comment A: 37330, GSM850, occupied bandwidth (99%),
channel 190 (836.6MHz)

Date: 22.JAN.2009 12:00:51



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	312.6	passed
peak	maxhold	3	99% bandwidth	244.5	passed

Test: 22.5; Frequency Band = 850, Mode = GSM, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%


Detailed Results:

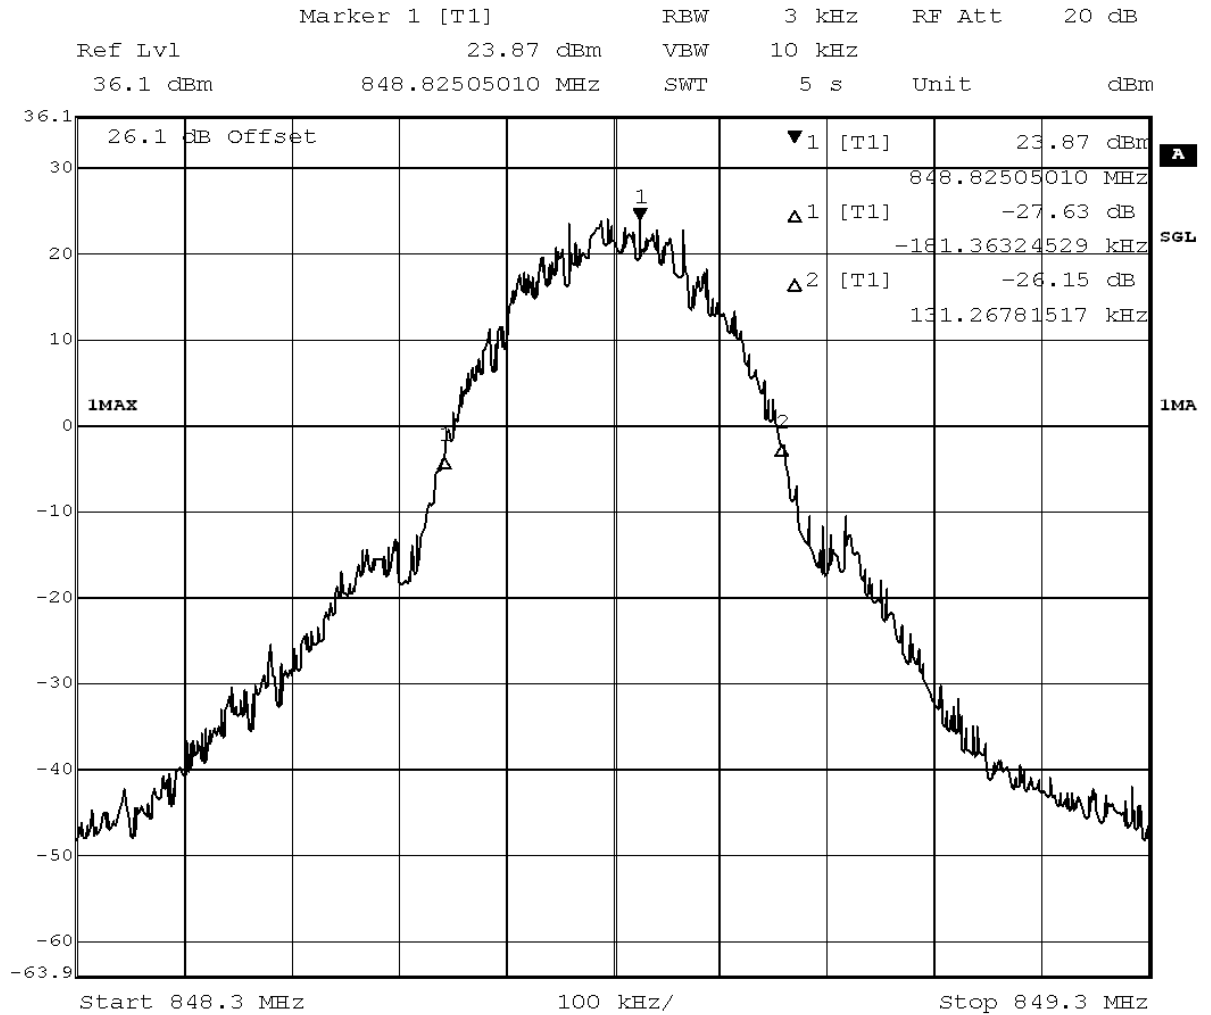

Title: bandwidth measurement

Comment A: 37330, GSM850, 26dB bandwidth, channel 251
(848.8MHz)

Date: 22.JAN.2009 12:19:18

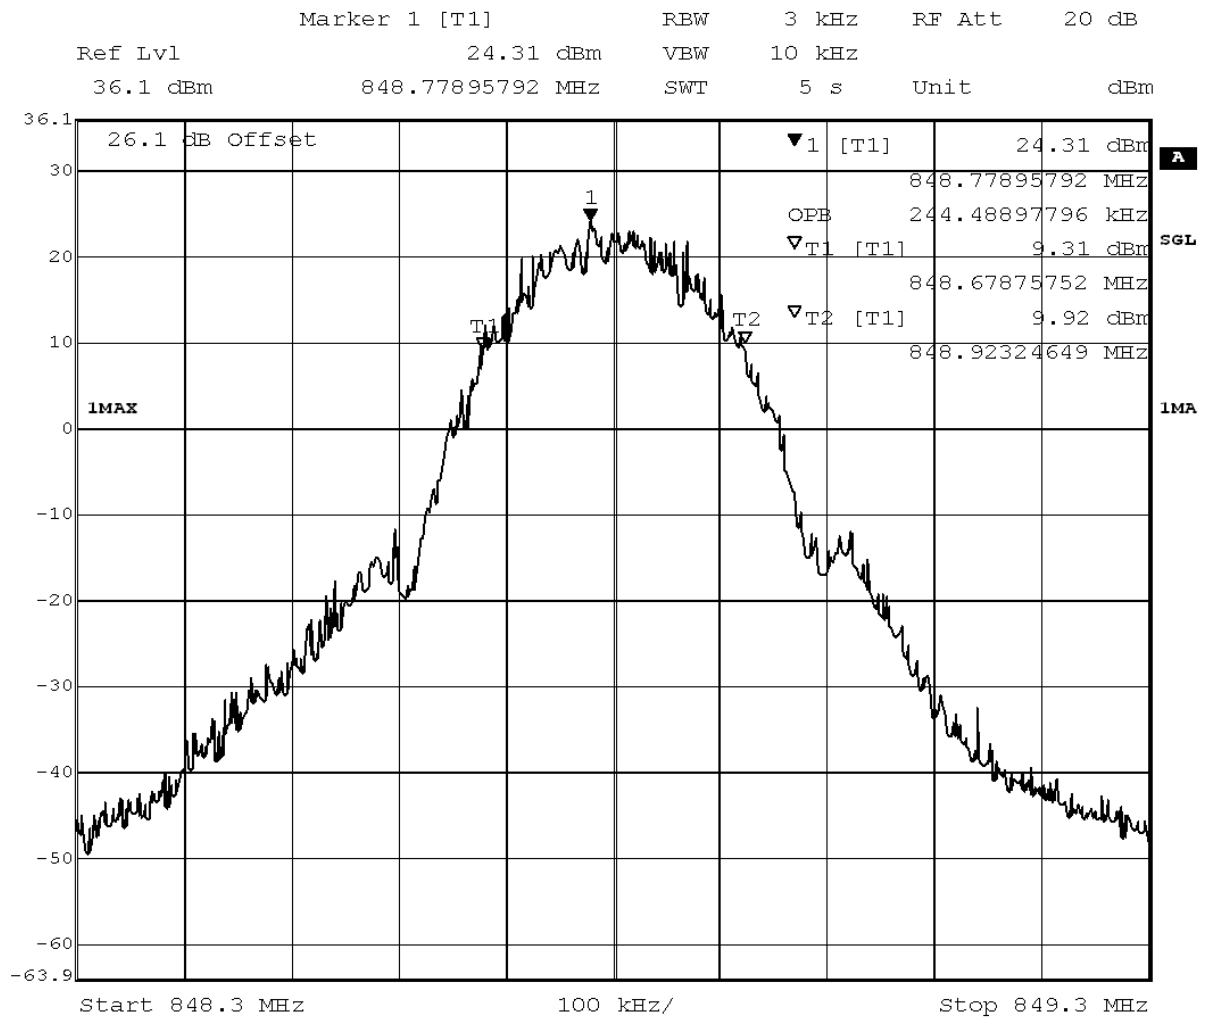

Title: bandwidth measurement
Comment A: 37330, GSM850, occupied bandwidth (99%),
channel 251 (848.8MHz)
Date: 22.JAN.2009 12:19:38



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	3	-26dB bandwidth	312.6	passed
peak	maxhold	3	99% bandwidth	244.5	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

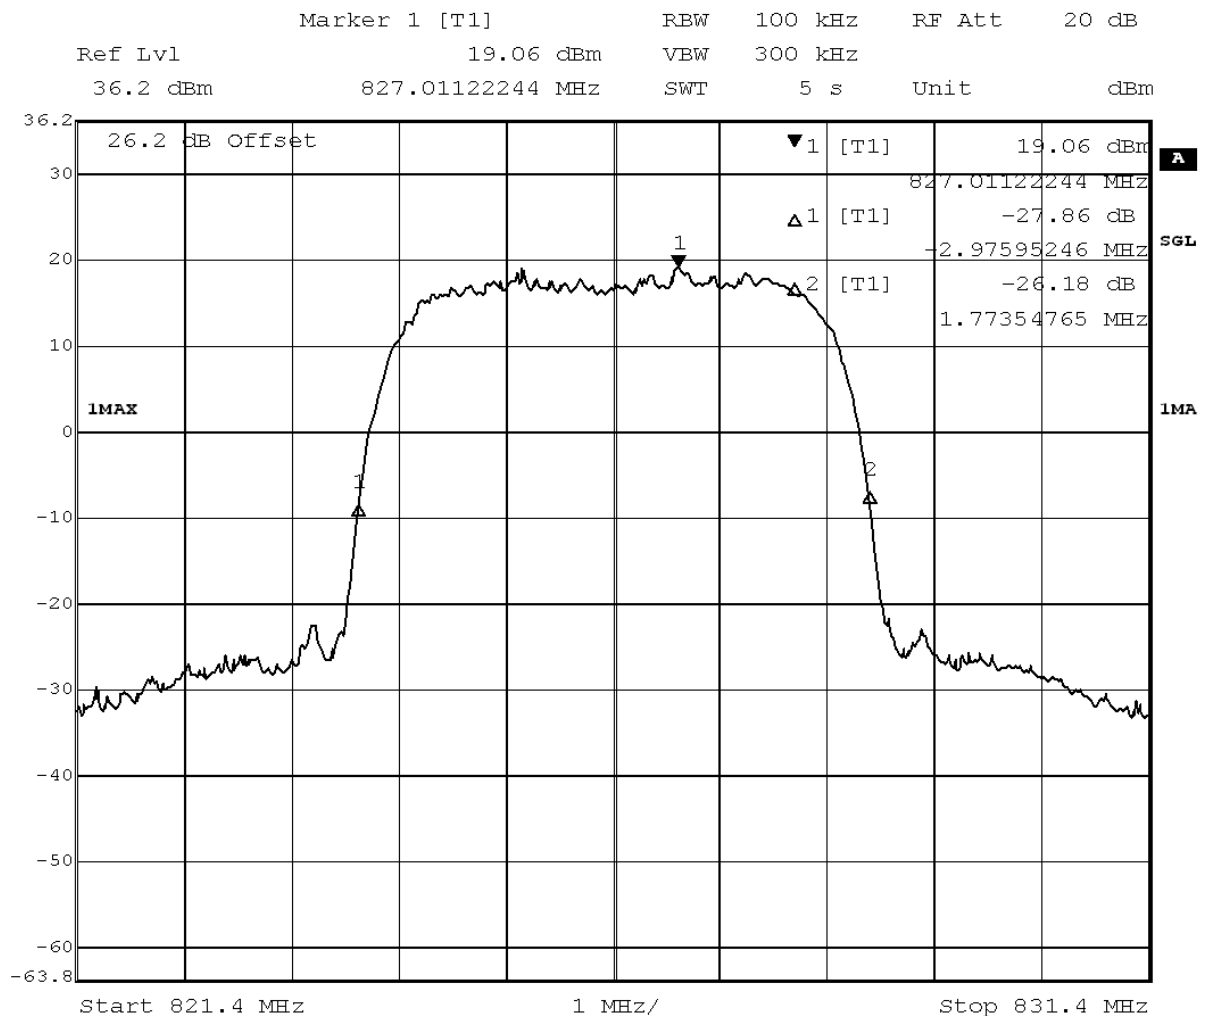

```
Title:      bandwidth measurement
Comment A:  37330, FDD V, 26dB bandwidth,
            channel 4132 (826.4MHz)
Date:      22.JAN.2009 13:03:59
```

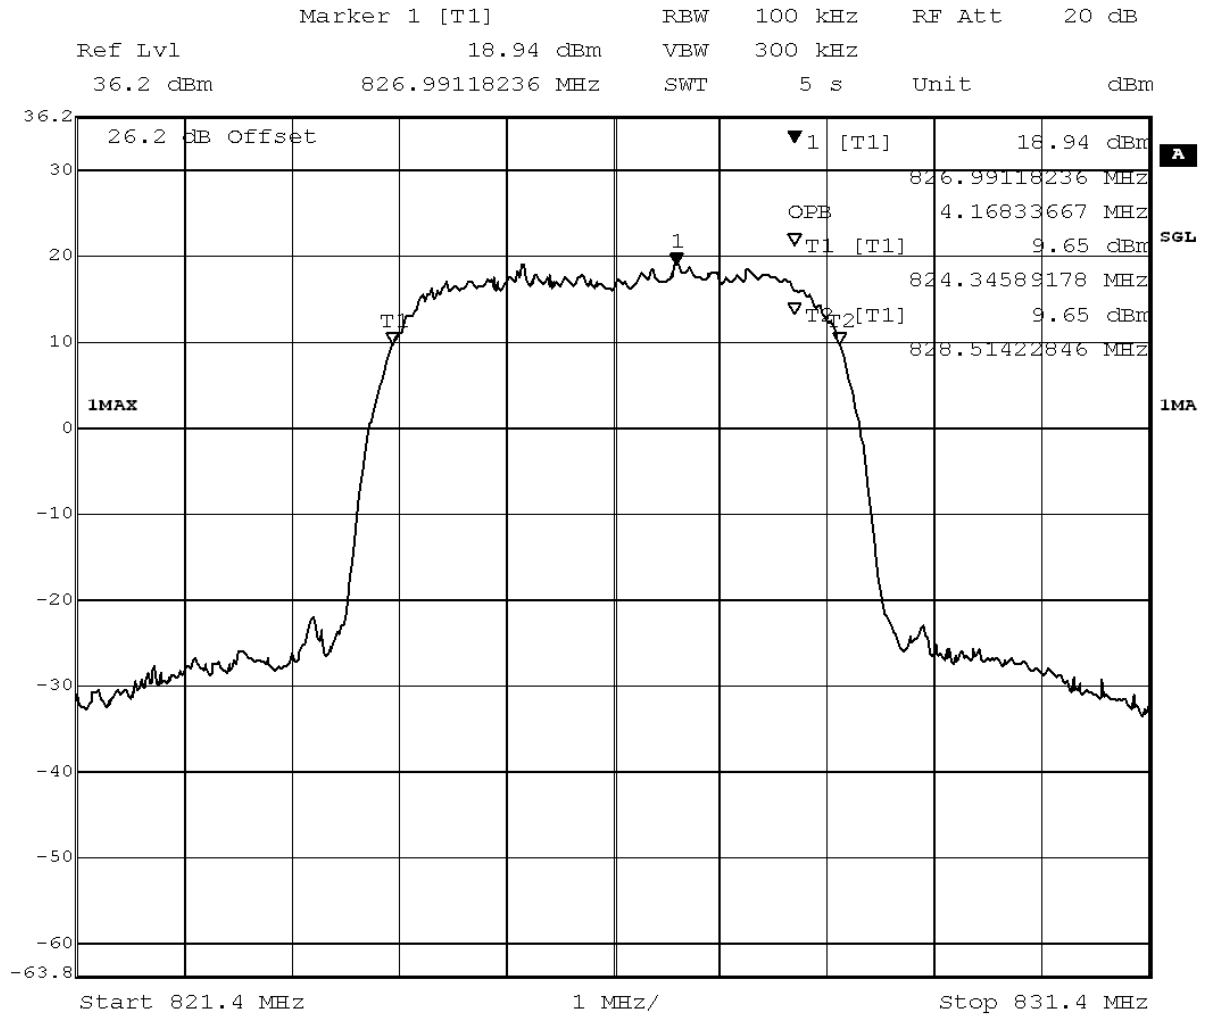

Title: bandwidth measurement

Comment A: 37330, FDD V, occupied bandwidth (99%),
channel 4132 (826.4MHz)

Date: 22.JAN.2009 13:04:19



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4749.5	passed
peak	maxhold	100	99% bandwidth	4168.3	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:18

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

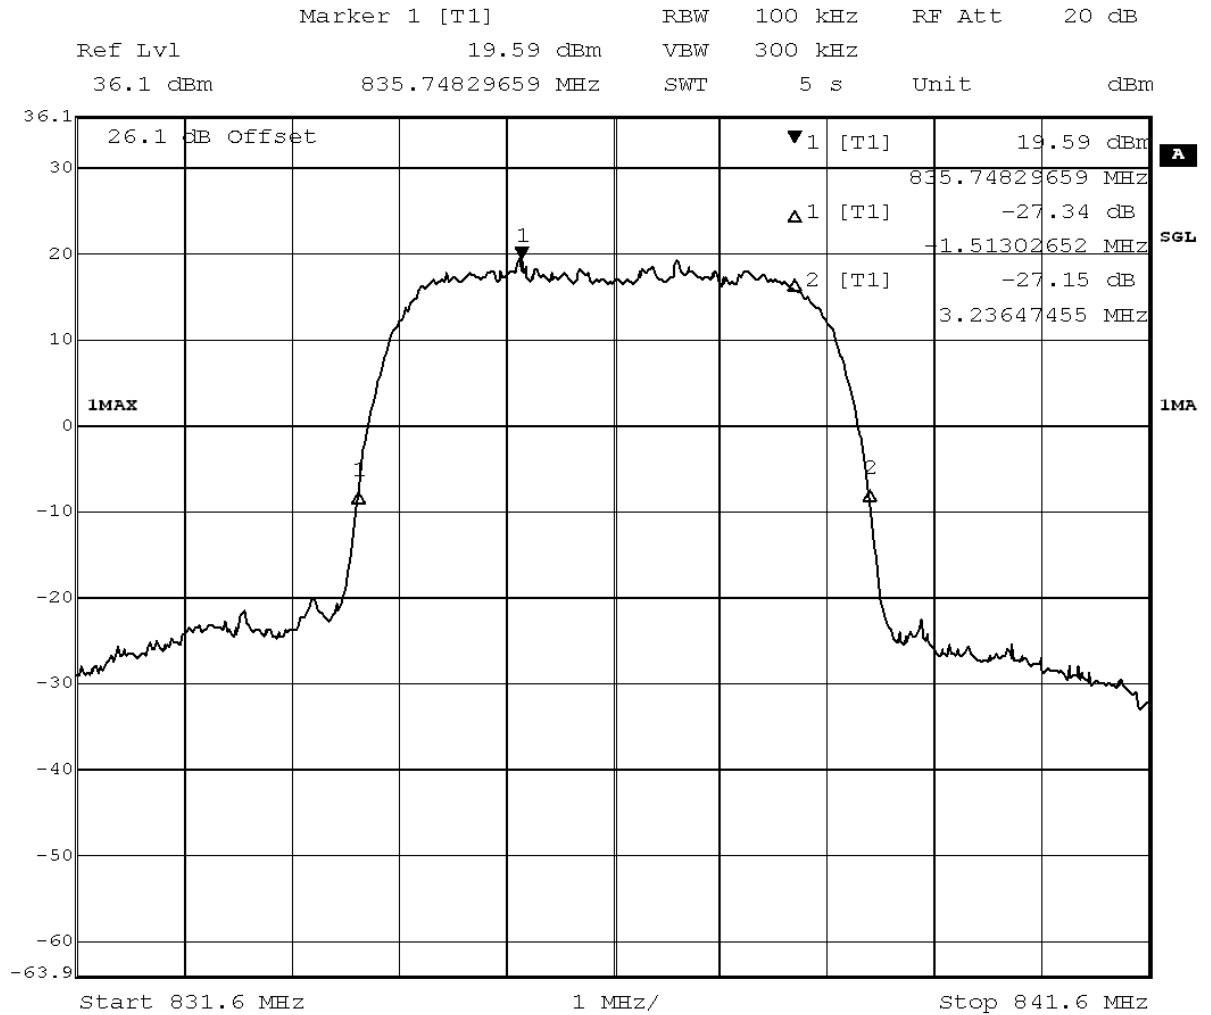

Title: bandwidth measurement
Comment A: 37330, FDD V, 26dB bandwidth,
channel 4183 (836.6MHz)
Date: 22.JAN.2009 13:32:05

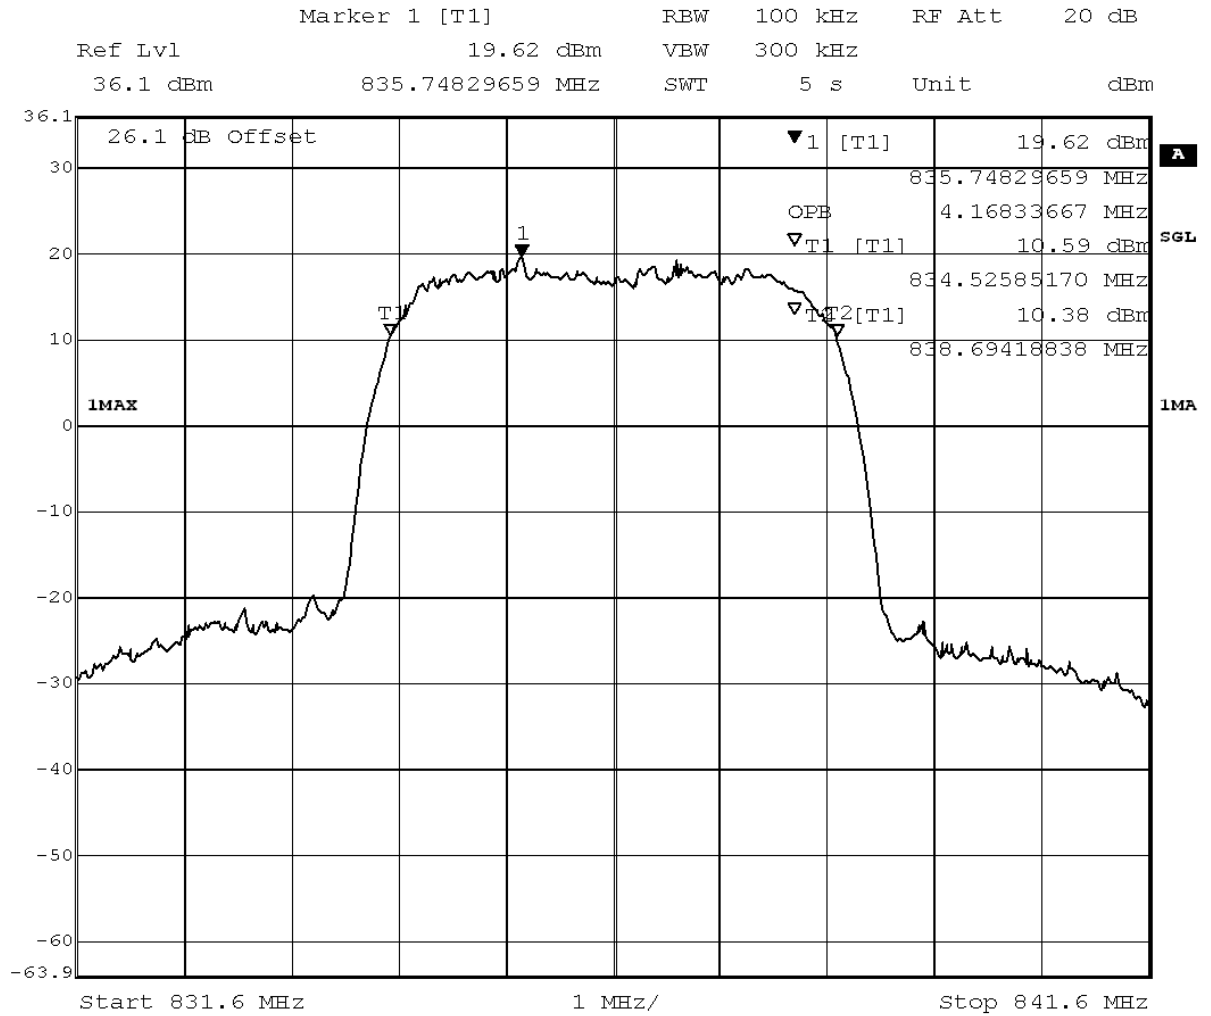

Title: bandwidth measurement

Comment A: 37330, FDD V, occupied bandwidth (99%),
channel 4183 (836.6MHz)

Date: 22.JAN.2009 13:32:25



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4749.5	passed
peak	maxhold	100	99% bandwidth	4168.3	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C


Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

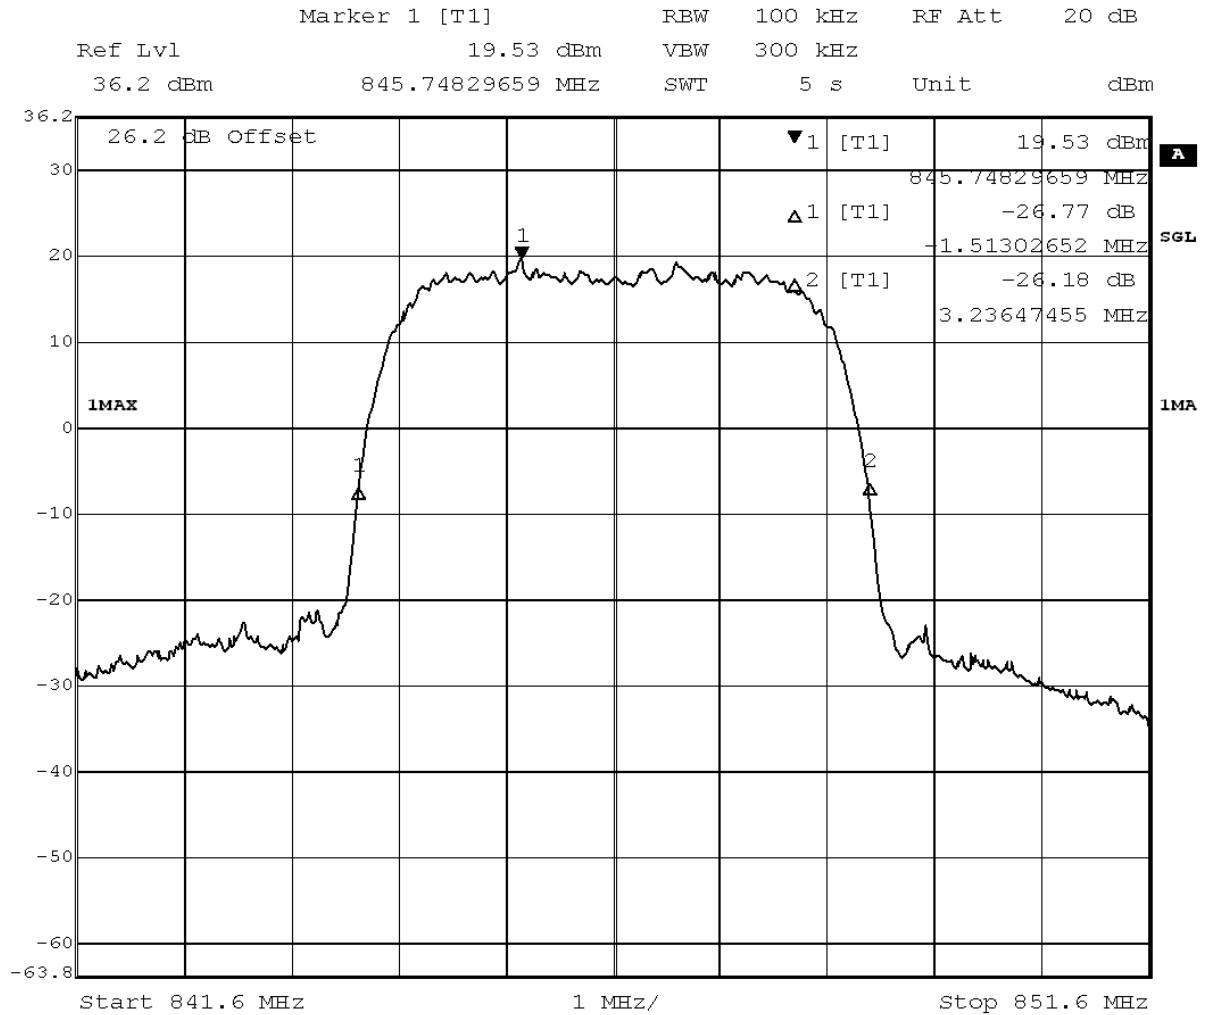

Title: bandwidth measurement
Comment A: 37330, FDD V, 26dB bandwidth,
channel 4233 (846.6MHz)
Date: 22.JAN.2009 13:38:10

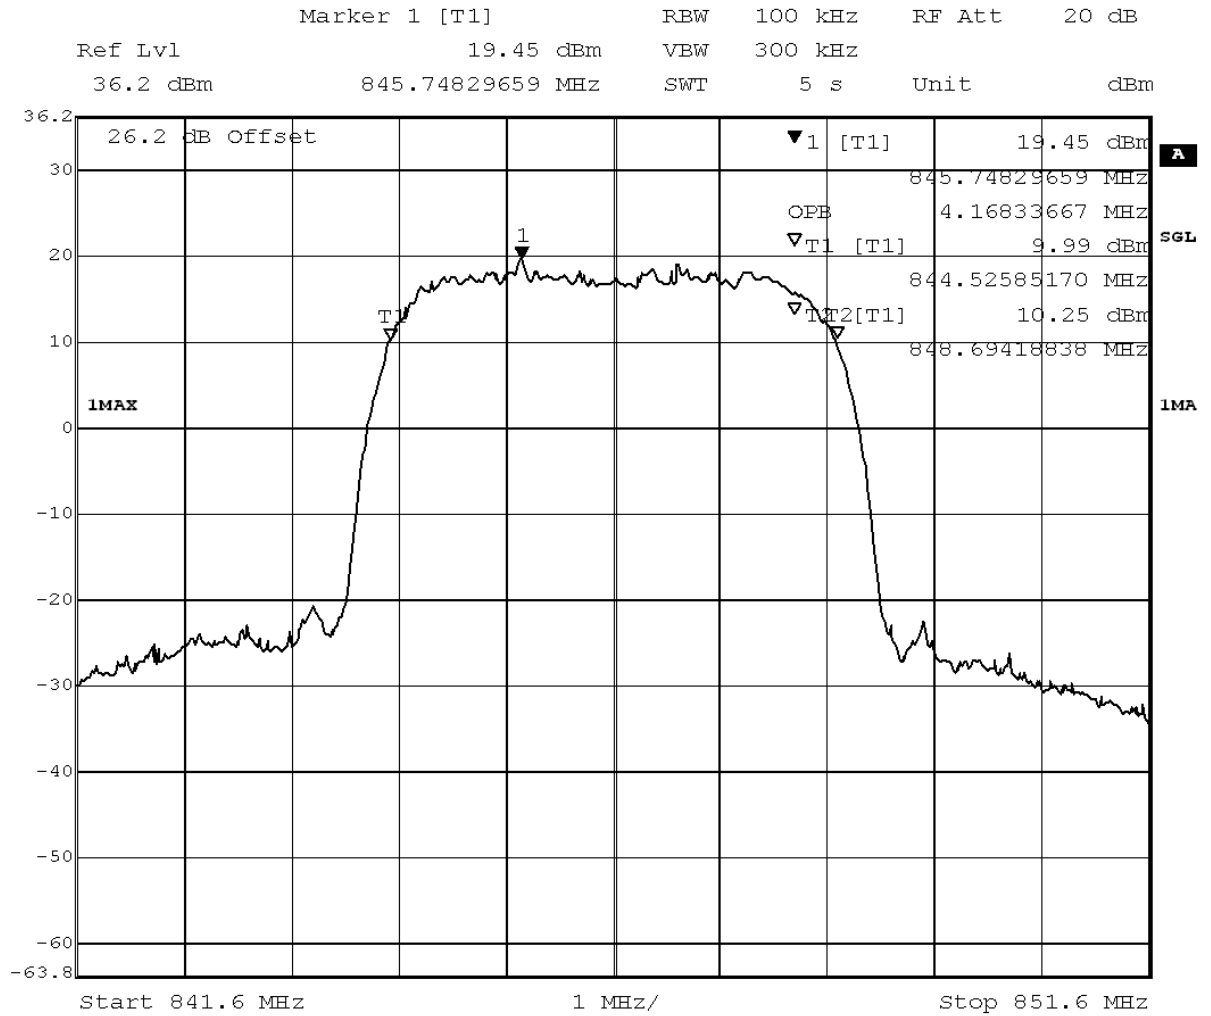

Title: bandwidth measurement

Comment A: 37330, FDD V, occupied bandwidth (99%),
channel 4233 (846.6MHz)

Date: 22.JAN.2009 13:38:30

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4749.5	passed
peak	maxhold	100	99% bandwidth	4168.3	passed




3.5.6 22.6 Band edge compliance §2.1053, §22.917

Test: 22.6; Frequency Band = 850, Mode = EDGE, Channel = 128

<i>Result:</i>	Passed
<i>Setup No.:</i>	FCC22_P05
<i>Date of Test:</i>	2009/01/22 15:19
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22
<i>Test Equipment Environmental Conditions</i>	
<i>Temperature:</i>	24°C
<i>Air Pressure:</i>	1003hPa
<i>Rel. Humidity:</i>	33%

Detailed Results:

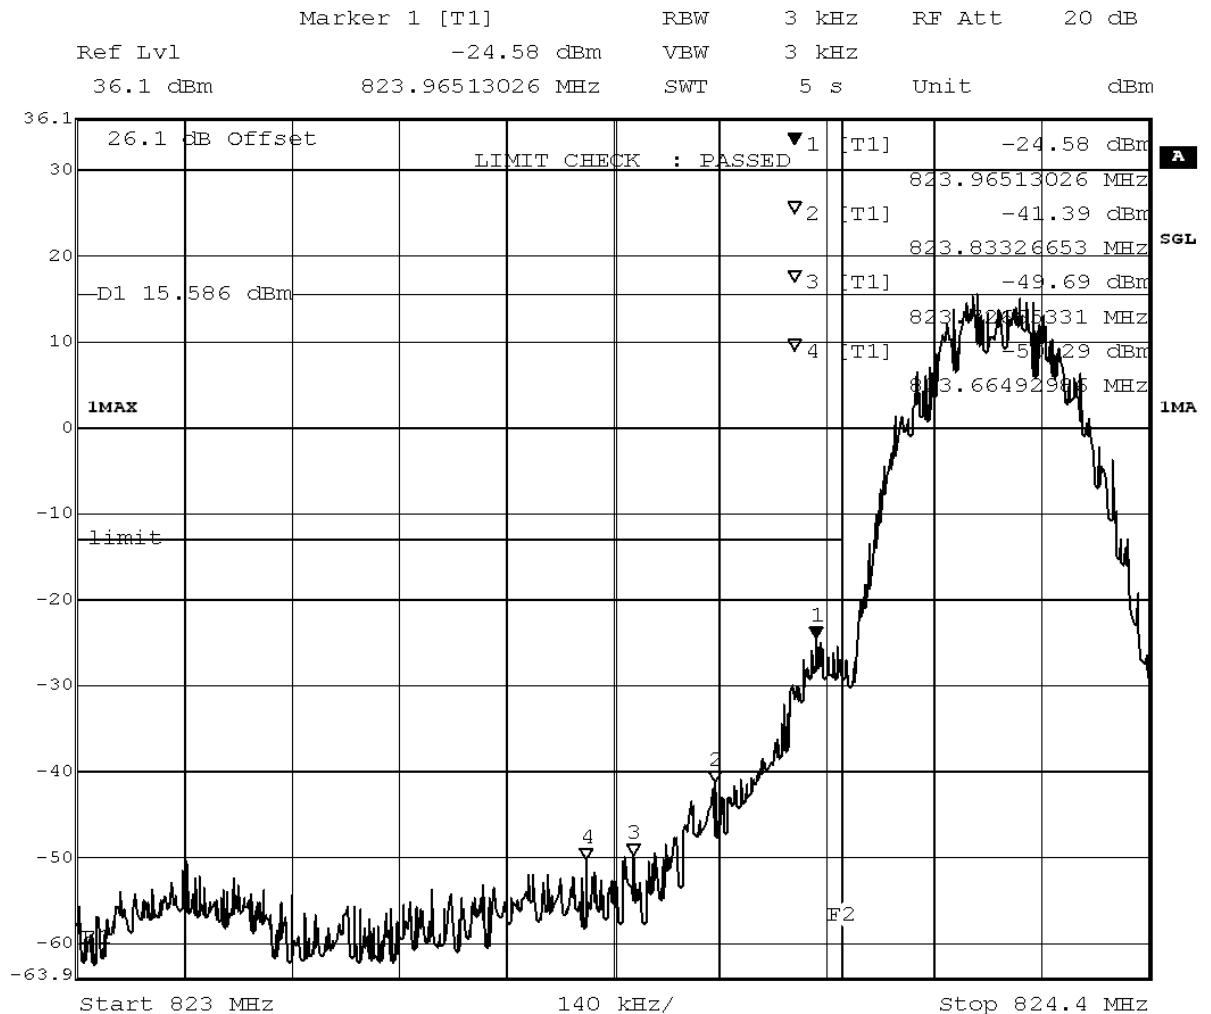

Title: band edge compliance measurement
Comment A: 37330, EDGE850, band edge compliance,
channel 128 (824.2MHz)
Date: 22.JAN.2009 12:30:54



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	823.965	-24.58	11.58	-13	passed
average	maxhold	3	823.974	-28.34	15.34	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = 850, Mode = EDGE, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

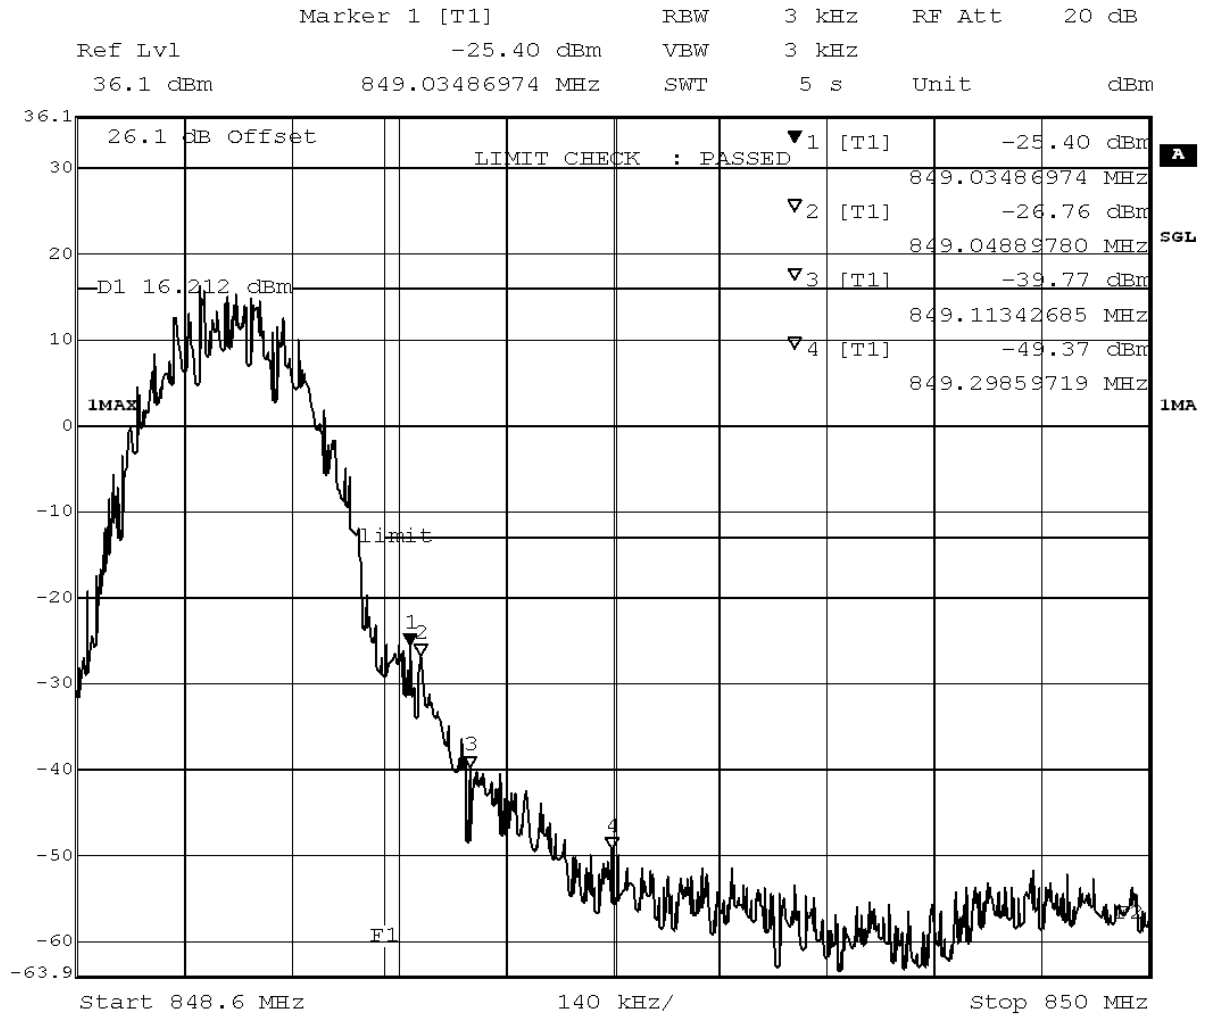

Title: band edge compliance measurement
Comment A: 37330, EDGE850, band edge compliance,
channel 251 (848.8MHz)
Date: 22.JAN.2009 12:39:39



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.035	-25.40	12.40	-13	passed
peak	maxhold	3	849.049	-26.76	13.76	-13	passed
average	maxhold	3	849.038	-30.52	17.52	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = 850, Mode = GSM, Channel = 128

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

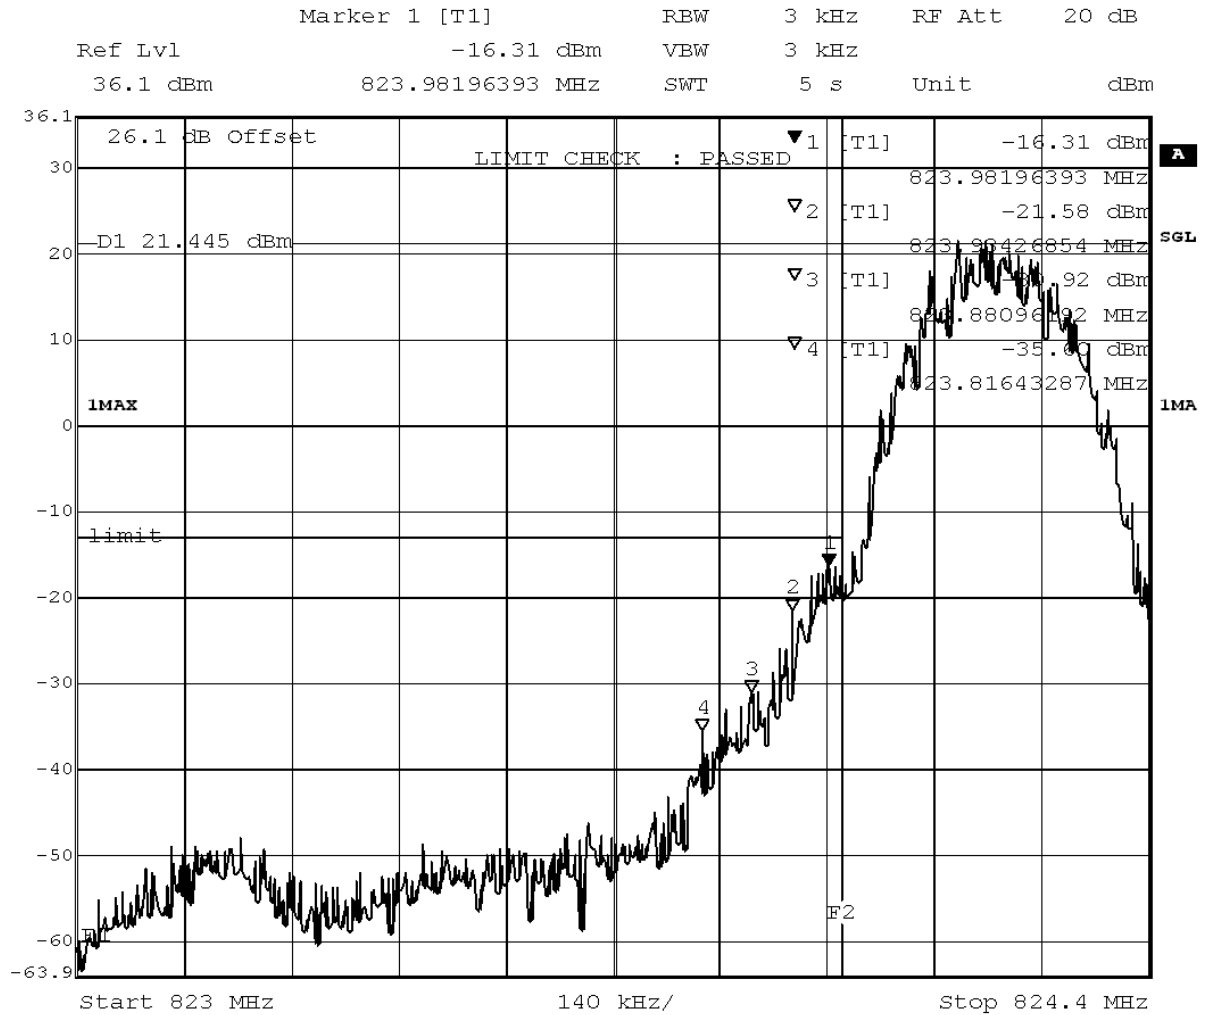

Title: band edge compliance measurement
 Comment A: 37330, GSM850, band edge compliance,
 channel 128 (824.2MHz)
 Date: 22.JAN.2009 12:11:51

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	823.881	-30.92	17.92	-13	passed
peak	maxhold	3	823.934	-21.58	8.58	-13	passed
peak	maxhold	3	823.982	-16.31	3.31	-13	passed
average	maxhold	3	823.917	-29.36	16.36	-13	passed
average	maxhold	3	823.965	-18.33	5.33	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = 850, Mode = GSM, Channel = 251

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

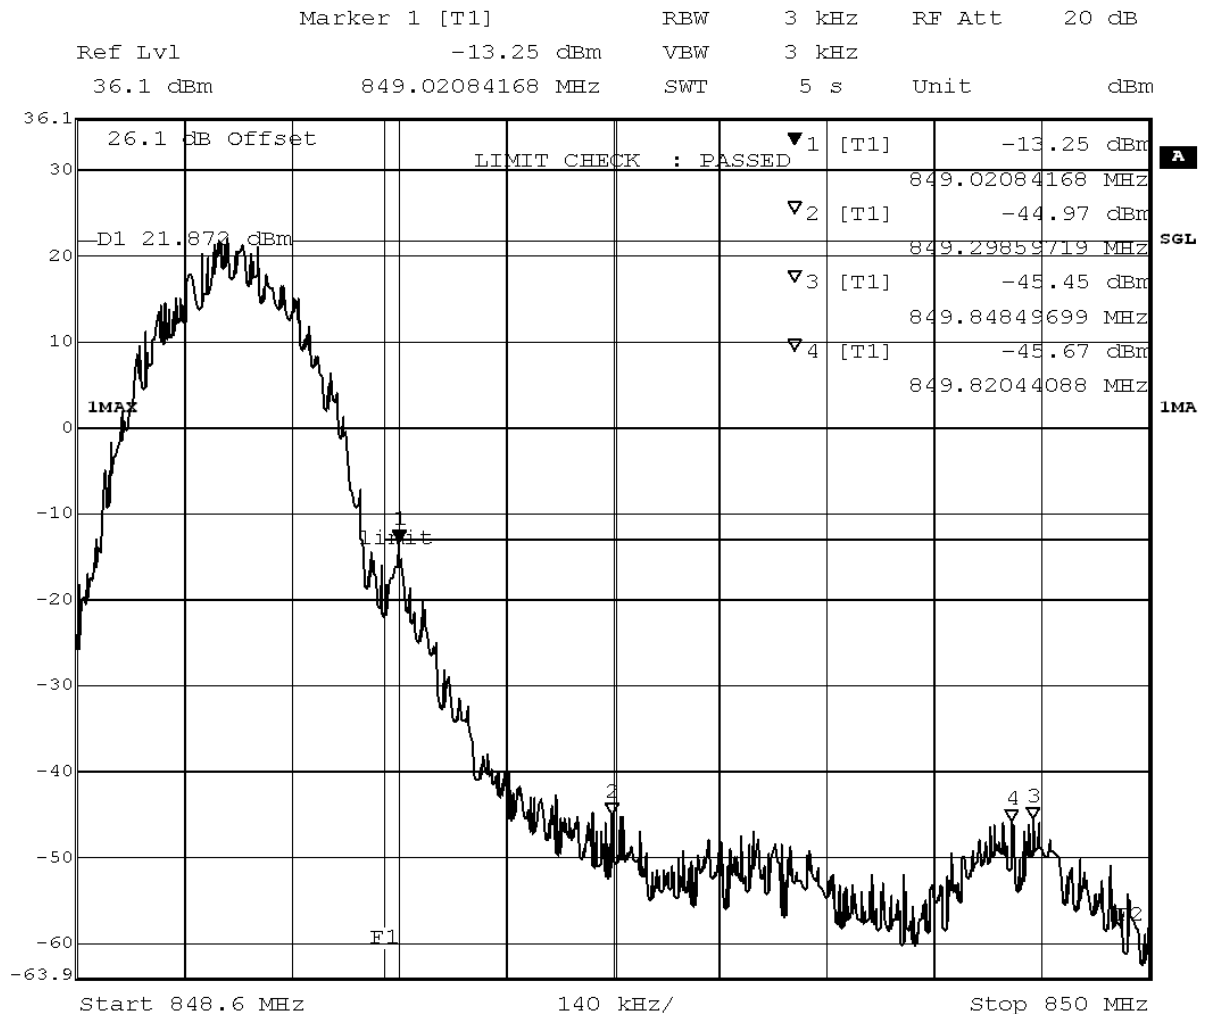

Title: band edge compliance measurement
Comment A: 37330, GSM850, band edge compliance,
channel 251 (848.8MHz)
Date: 22.JAN.2009 12:20:01



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.021	-13.25	0.25	-13	passed
average	maxhold	3	849.024	-18.88	5.88	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:19

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

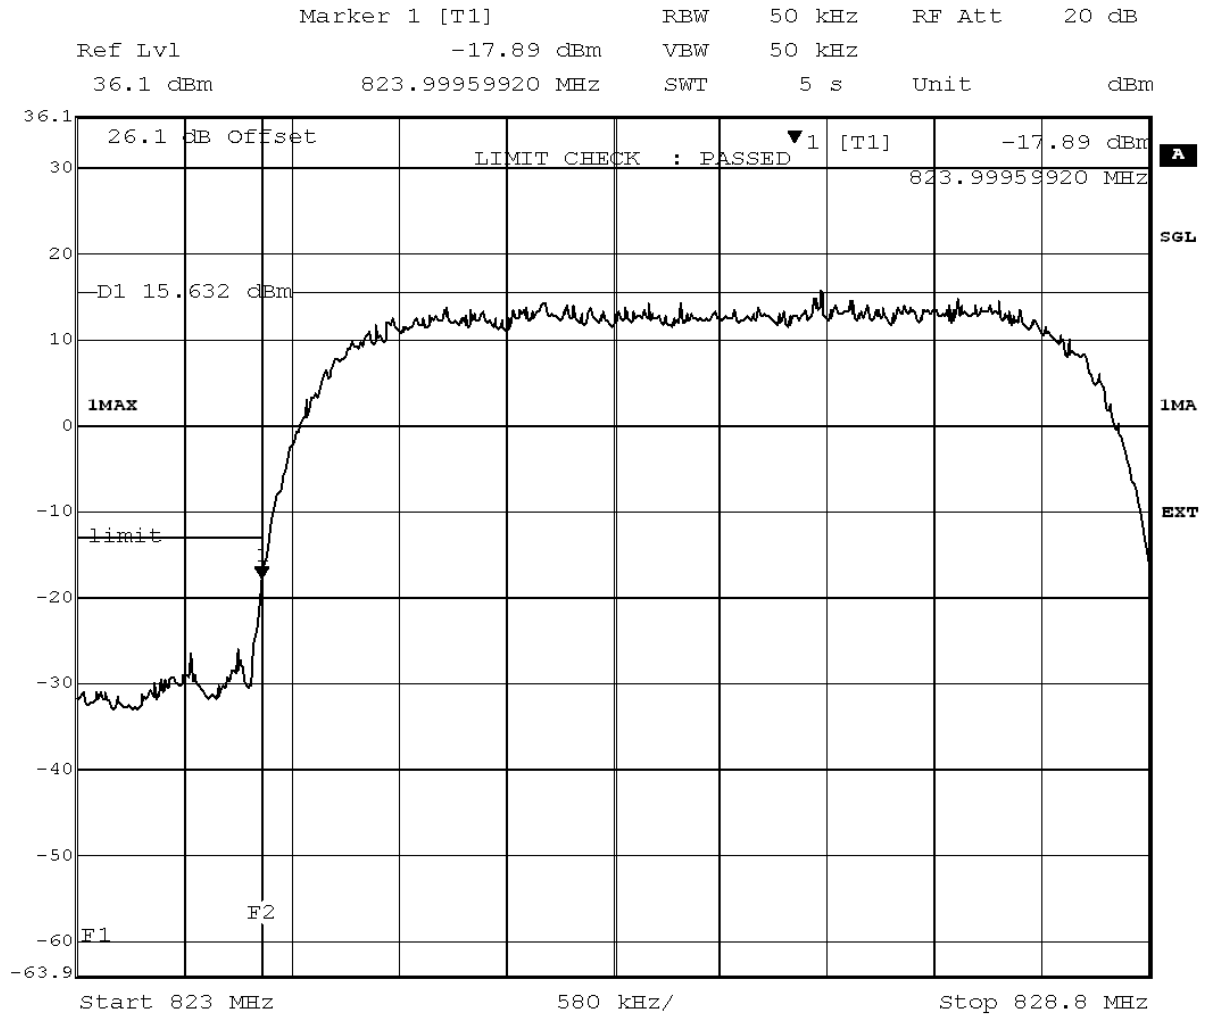

Title: band edge compliance measurement
Comment A: 37330, FDD V, band edge compliance,
channel 4132 (826.4MHz)
Date: 22.JAN.2009 14:44:02



Reference: MDE_OPTI_0720_Mauro_FCCb

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	824.000	-17.89	4.89	-13	passed
average	maxhold	50	823.593	-31.17	18.17	-13	passed
average	maxhold	50	824.000	-25.31	12.31	-13	passed
rms	maxhold	50	824.000	-21.51	8.51	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233

Result: Passed

Setup No.: FCC22_P05

Date of Test: 2009/01/22 15:20

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22


Test Equipment Environmental Conditions

Temperature: 24°C

Air Pressure: 1003hPa

Rel. Humidity: 33%

Detailed Results:

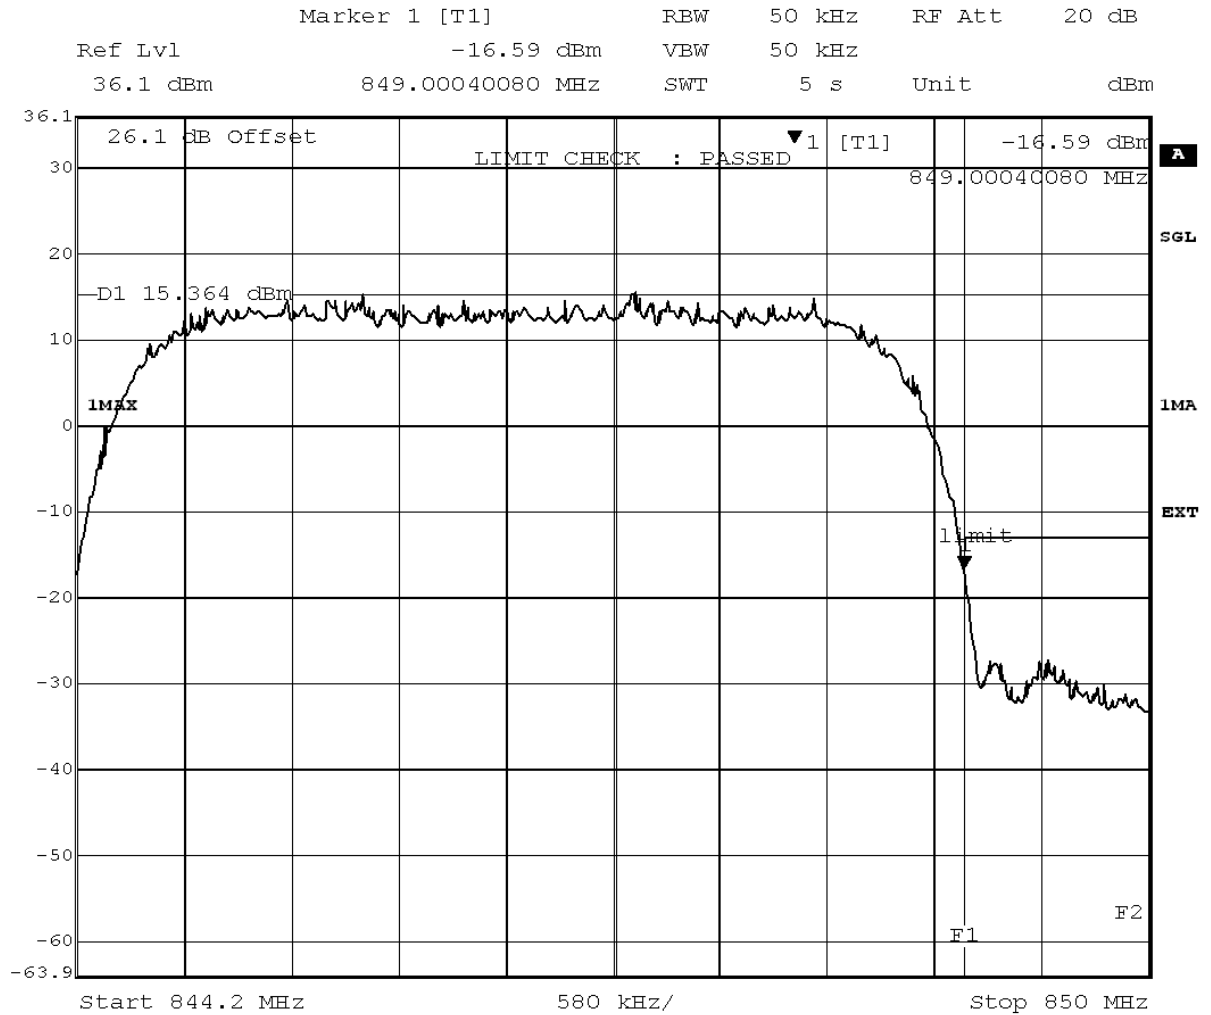


Title: band edge compliance measurement
Comment A: 37330, FDD V, band edge compliance,
channel 4233 (846.6MHz)
Date: 22.JAN.2009 14:41:50

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	849.000	-16.59	3.59	-13	passed
average	maxhold	50	849.000	-17.67	4.67	-13	passed
average	maxhold	50	849.407	-30.22	17.22	-13	passed
rms	maxhold	50	849.000	-15.77	2.77	-13	passed
rms	maxhold	50	849.582	-30.84	17.84	-13	passed


no further values have been found by test instrument with a margin of less than 20 dB

4 Annex

4.1 Additional Information for OUT Description

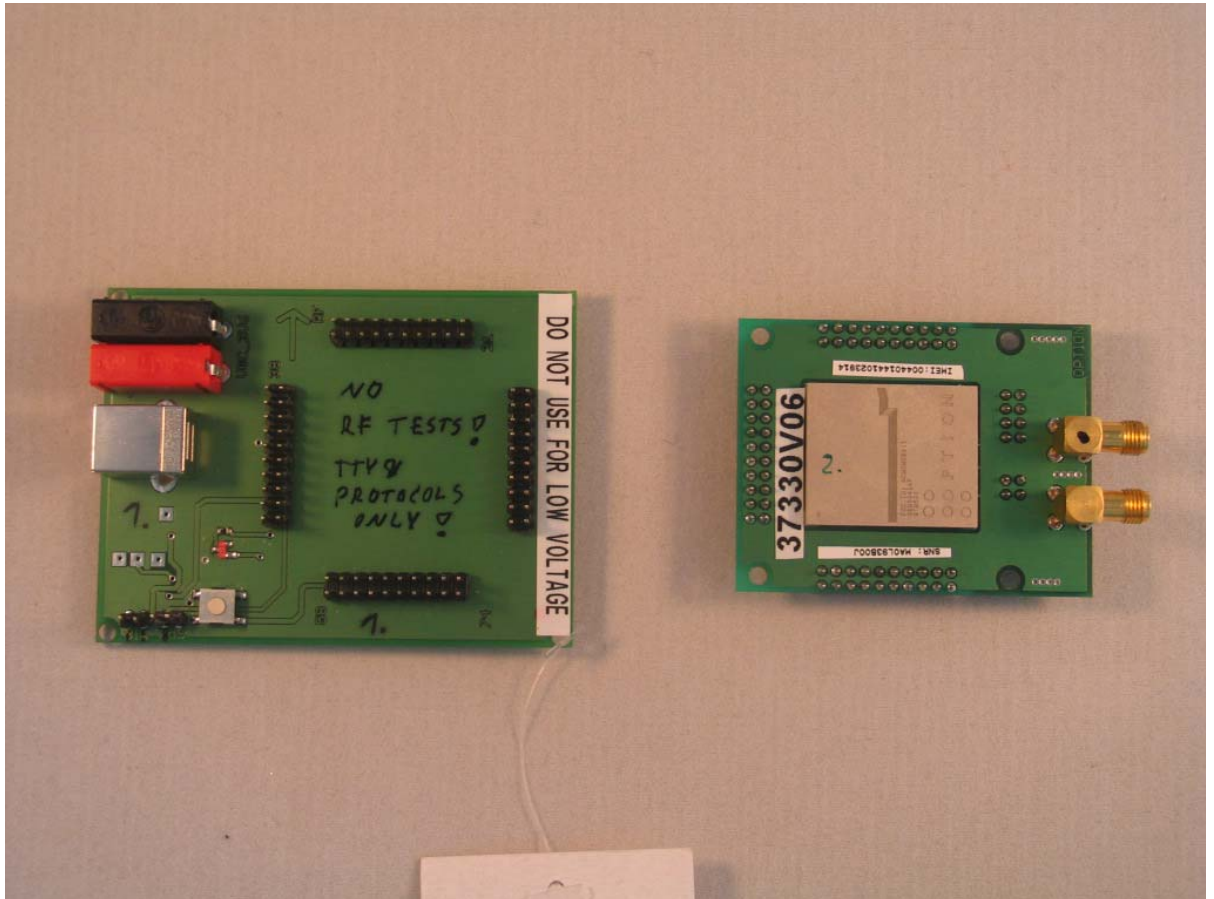

front view

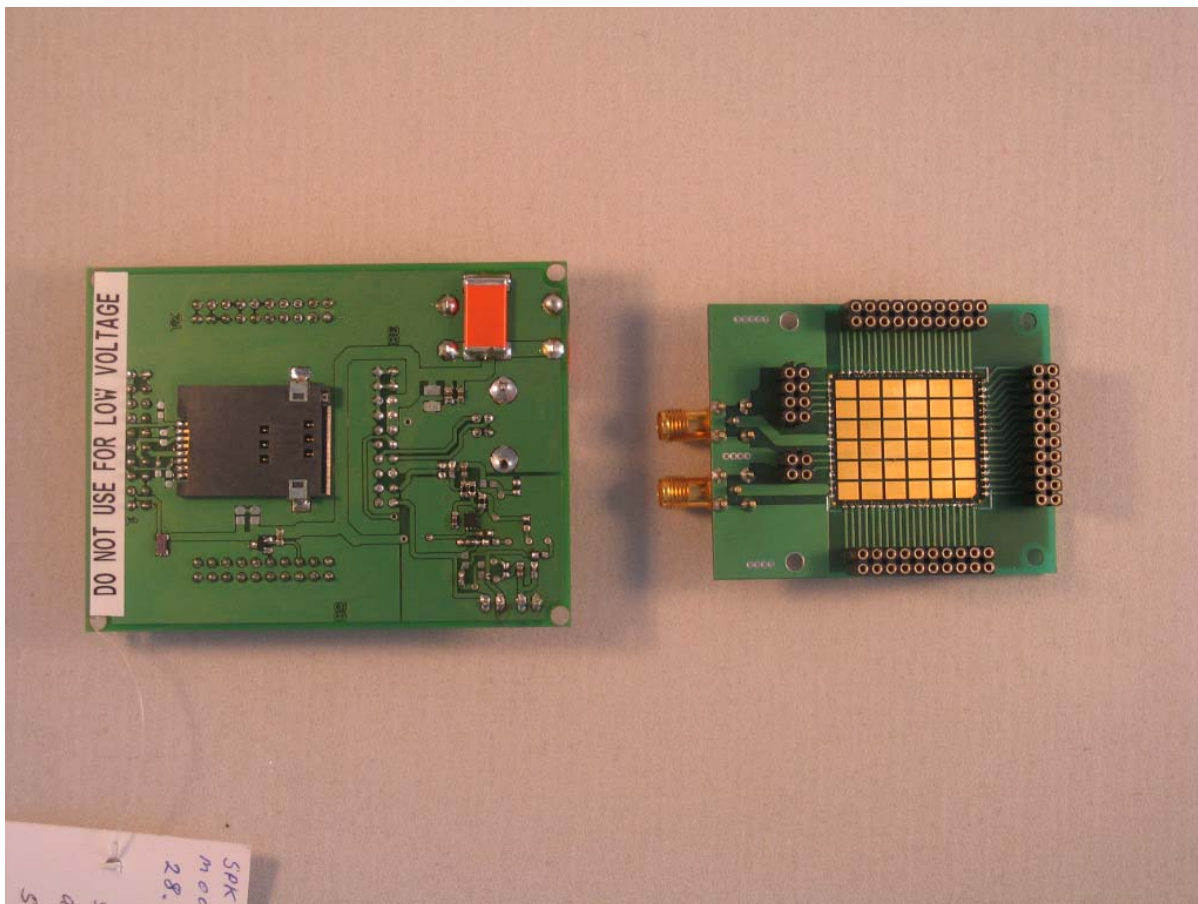

back view

4.2 Additional Information for Report



setup for conducted testing



Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 22, Subpart C – Operational and Technical Requirements

§ 22.355 Frequency tolerance

Part 22, Subpart H – Cellular Radiotelephone Service

- § 22.913 Effective radiated power limits
- § 22.917 Emission limitations for cellular equipment

Description of Methods of Measurements

RF Power Output

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1046

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to

correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Channel (Frequency): please refer to the detailed results

4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§22.913 Effective radiated power limits

(a)(2) Maximum ERP. ... The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Emission and Occupied Bandwidth

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1049

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth

5) The maximum spectral level of the modulated signal was recorded as the reference.

6) The emission bandwidth is measured as follows:

the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.

7) The occupied bandwidth (99% Bandwidth) is measured as follows:

the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits

§ 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings
 - [Resolution Bandwidth]:
 - a) [$\geq 1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the PCS-Band,
 - b) otherwise [100 kHz] (or [1 MHz] for accelerated sweep times)
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
 - Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
 - 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 10 GHz (up to the 10th harmonic) during the call was established

Test Requirements / Limits

§ 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

- (a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
- (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
 - (c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.
 - (d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

- (a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- Remark of the test laboratory: This is calculated to be -13 dBm.
- (b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].
- (d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel : please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 10 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value

need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1055

Test Description

- 1) The EUT was placed inside a temperature chamber.
 - 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
 - 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.
 - 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Mid Channel
- 5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.
 - 6) This measurement procedure was performed for temperature variation from -30°C to +50°C in increments of 10°C, if not otherwise stated in the detailed results.
- When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and

stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§22.355 Frequency tolerance

...the carrier frequency of each transmitter in the Public Mobile Service must be maintained within the tolerances given in table C-1 of this section.

Table C-1.- Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile up to 3 watts (ppm)	Mobile above 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

For the mid channel (836.6 MHz) the frequency tolerance is 2.5 ppm (2091.5 Hz).

Band edge compliance

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §22.913

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results


4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits

§ 22.917 Emission limitations for cellular equipment

Refer to chapter "Field strength of spurious radiation".

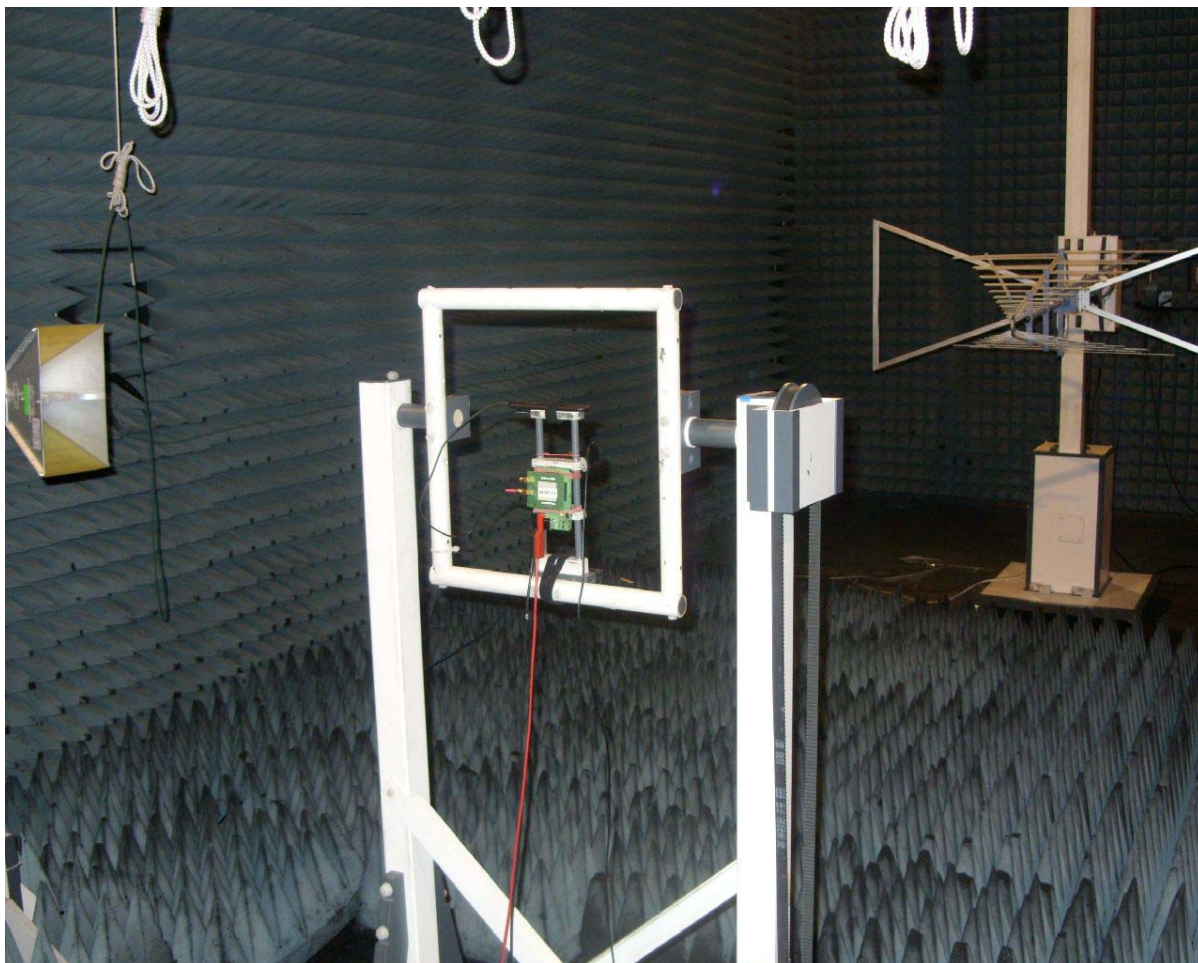

setup for radiated testing

Subtests HSDPA


Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note 1: $?_{ACK}, ?_{NACK}$ and $?_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, $?_{ACK}$ and $?_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $?_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.</p> <p>Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> <p>Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.</p>							

Subtests HSUPA

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	2
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1


Subtest	Max UL Data Rate (kb/s)	β_c/β_d	β_{hs}	β_{ed}	CM	Power Class 3 limit
1	242.1	11/15	22/15	1309/225	1	24 (+1.7/-3.7 dB)
2	161.3	6/15	12/15	94/75	3	22 (+3.7/-3.7 dB)
3	524.7	15/9	30/15	47/15	2	23 (+2.7/-3.7 dB)
4	197.6	2/15	4/15	56/75	3	22 (+3.7/-3.7 dB)
5	299.6	15/15	30/15	134/15	1	24 (+1.7/-3.7 dB)

Setup Drawings

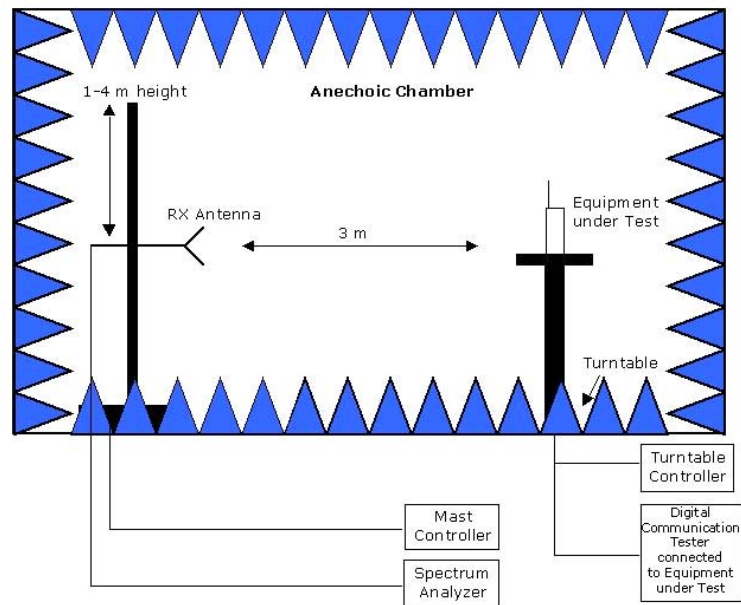


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Principle set-up for radiated measurements

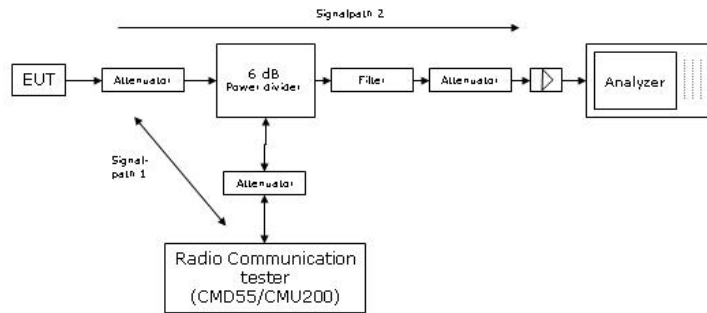

Remark: Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

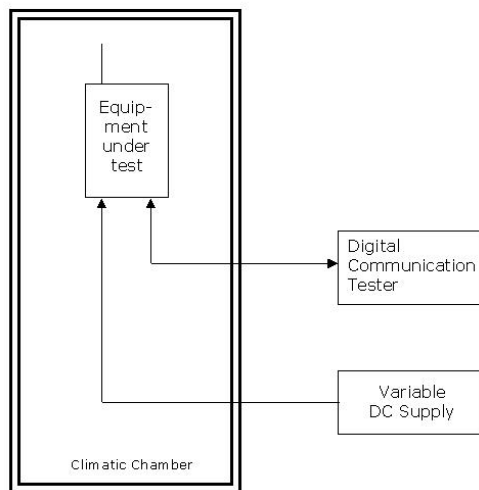

Principle set-up for tests under extreme test conditions

Test Equipment

EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz	07.10.08	06.10.11
Signalling Unit for Bluetooth	PTW60	100004	Rohde & Schwarz	-	N/A *)
Universal Radio Communication Tester	CMU200	102366	Rohde & Schwarz	16.02.09	15.02.11
Universal Radio Communication Tester	CMU200	837983/052	Rohde & Schwarz	01.12.08	30.11.11
Signalling Unit for Bluetooth	CBT	100589	Rohde & Schwarz	14.08.08	N/A *)
Signalling Unit for GPS	SMU200	100912	Rohde & Schwarz	28.10.08	N/A *)

*) N/A – only used for signalling

EMI Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz	06.12.07	05.12.09
Signal Generator	SMR 20	846834/008	Rohde & Schwarz	05.12.07	04.12.09
AC Power Source	6404	64040000B04	Croma ATE INC.	01.06.08	31.05.11

EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel	-	-
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	27.10.08	26.10.13
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32	849785	Miteq	12.11.08	11.05.09
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35	896037	Miteq	12.11.08	11.05.09
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42	619368	Miteq	12.11.08	11.05.09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 W38.01-2	Kabel Kusch	12.11.08	11.05.09
Cable "ESI to Horn Antenna"	UFB311A UFB293C	W18.02-2 W38.02-2	Rosenberger-Microcoax	12.11.08	11.05.09
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz	12.05.06	11.05.09
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz	20.01.04	N/A – spare antenna
High Pass Filter	5HC3500/127 50-1.2-KK	200035008	Trilithic	12.11.08	11.05.09
High Pass Filter	5HC2700/127 50-1.5-KK	9942012	Trilithic	12.11.08	11.05.09
High Pass Filter	4HC1600/127 50-1.5-KK	9942011	Trilithic	12.11.08	11.05.09
High Pass Filter	WHKX 7.0/18G-8SS	9	Wainwright	12.11.08	11.05.09
KUEP pre amplifier	Kuep 00304000	001	7 layers AG	-	N/A – spare antenna
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz	17.05.06	16.05.09
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz	07.10.08	06.10.11
Pyramidal Horn Antenna 26.5 GHz	Model 3160-09	9910-1184	EMCO	28.02.08	N/A (Stand. Gain Horn)
Pyramidal Horn Antenna 40 GHz	Model 3160-10	00086675	EMCO	18.12.07	N/A (Stand. Gain Horn)

EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner	12.11.08	11.05.09
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz	13.10.08	12.10.11
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz	-	-
Four-Line Network	ENY41	838119/004	Rohde & Schwarz	06.03.08	05.03.11

Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel	-	-
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel	-	-
Digital Multimeter	177	86670383	Fluke	01.08.08	31.07.10
Digital Oscilloscope	TDS 784C	B021311	Tektronix	-	-
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis	-	-
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis	-	-
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz	-	-
Notch Filter ultra stable	WRCA800/960 -6E	24	Wainwright	-	-
Temperature Chamber	VT 4002	58566002150010	Vötsch	13.03.09	12.03.10
Temperature Chamber	KWP 120/70	59226012190010	Weiss	13.03.09	12.03.10
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz	06.10.08	05.10.11
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	836722/011	Rohde & Schwarz	06.10.08	05.10.11
Signal Analyzer 20 Hz to 26.5 GHz	FSIQ26	840061/005	Rohde & Schwarz	02.10.08	01.10.11

Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Air Compressor (pneumatic)			Atlas Copco	-	-
Controller	MCU	1520506	Maturo GmbH	-	-
EMC Camera	CE-CAM/1		CE-SYS	-	-
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi	-	-
Filter ISDN	B84312-C110-E1		Siemens & Matsushita	-	-
Filter telephone systems / modem	B84312-C40-B1		Siemens & Matsushita	-	-
Filter Universal 1A	B84312-C30-H3		Siemens & Matsushita	-	-
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia	-	-
Turntable	DS 420S	420/573/99	HD GmbH, H.Deisel	-	-
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H.Deisel	-	-
ThermoHygro Datalogger 12	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH	05.08.08	04.08.09
ThermoAirpressure Datalogger 13	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10

7 layers InterLab Bluetooth RF Test Solution - Setup C – Bluetooth BDR and EDR RF Conformance Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Power Meter	NRVD	832025/059	Rohde & Schwarz	17.06.08	16.06.09
Power Sensor A	NRV-Z1	832279/013	Rohde & Schwarz	18.06.08	17.06.09
Power Supply	E3632A	MY40003776	Agilent	-	-
Power Supply	PS-2403D	-	Conrad	-	-
Power Supply	NGSM 32/10	2725	Rohde & Schwarz	28.04.08	27.04.09
Rubidium Frequency Normal	MFS	002	Datum GmbH	18.06.08	17.06.09
Signal Analyzer FSQ26	FSQ26	832695/007	Rohde & Schwarz	23.08.07	22.08.09
Signal Generator	SMP 03	833680/003	Rohde & Schwarz	04.07.06	03.07.09
Signal Generator	SMI03B	832870/017	Rohde & Schwarz	24.05.07	23.05.10
Signal Switching Unit	TOCT	030106	7 layers Inc.	-	-
Signalling Unit	CBT	100302	Rohde & Schwarz	07.05.08	06.05.09
ThermoHygro Datalogger 04	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Temperature Chamber	KWP 120/70	59226012190010	Weiss	29.02.08	28.02.09

5 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	2
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	4
2.3 Auxiliary Equipment	5
2.4 Setups used for Testing	5
3 Results	6
3.1 General	6
3.2 List of the Applicable Body	6
3.3 List of Test Specification	6
3.4 Summary	7
3.5 Detailed Results	10
3.5.1 22.1 RF Power Output §2.1046, §22.913	10
3.5.2 22.2 Frequency stability §2.1055	28
3.5.3 22.3 Spurious emissions at antenna terminals §2.1051, §22.917	31
3.5.4 22.4 Field strength of spurious radiation §2.1053, §22.917	41
3.5.5 22.5 Emission and Occupied Bandwidth §2.1049, §22.917	46
3.5.6 22.6 Band edge compliance §2.1053, §22.917	74
4 Annex	87
4.1 Additional Information for OUT Description	87
4.2 Additional Information for Report	89
5 Index	103