

9 August, 2001

Chris Gustaf
Trango Systems
9939 Via Pasar
San Diego, CA 92126

Dear Mr. Gustaf,

Enclosed is the report for the Data Transceiver, model M5800SB-AP-60. Please check it thoroughly for discrepancies. This is an official copy of this report complete with the original Acme Testing staff signatures, which should be retained by you as the official record of testing, as it may be required for future verification of compliance. The FCC Rules require that you, as the "Responsible Party" keep this data for a period of three years after the last date of production or sale of this equipment. Please be aware that our internal controls require us to keep a historical copy of your report on file for three years only, after which time it will be destroyed.

Thank you for your business. We look forward to working with you when you next require testing services.


Yours Sincerely,

Harry H. Hodes
Principal Engineer
President/CEO

The following are samples of what the FCC expects to see displayed prominently in your users manual and/or on your FCC ID label (more information can be found in the CFR 47):

§ 15.19 Labelling requirements.

The following is a sample of the statement that must appear on the FCC ID Label that will be place on your product:

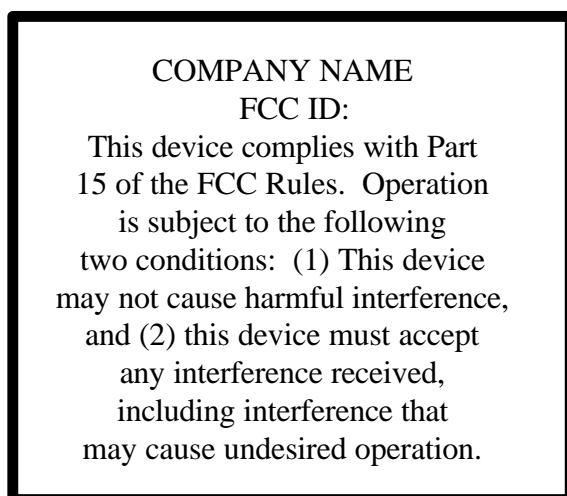

For devices that are so small that a label can not be affixed upon the product the FCC states: "When the device is so small or for such use that it is not practicable to place the statement specified in this section on it, the information required by these paragraphs shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. **However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.**

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

PLEASE NOTE: INFORMATION TO THIS EFFECT MUST APPEAR IN THE MANUAL OR THE FCC WILL DENY YOUR APPLICATION FOR EQUIPMENT AUTHORIZATION!!!!

REPORT OF MEASUREMENTS
PART 15C (15.247) – INTENTIONAL RADIATOR

DEVICE: DATA TRANSCEIVER

MODEL: M5800SB-AP-60

MANUFACTURER: TRANGO SYSTEMS

ADDRESS: 9939 VIA PASAR
SAN DIEGO, CA 92126

WORK ORDER: 01-EMC-032801

1. GENERAL	4
1.1 DOCUMENT HISTORY.....	4
1.2 PURPOSE.....	5
1.3 MANUFACTURER	5
1.4 TEST LOCATION.....	5
1.5 ACCREDITATIONS AND LISTINGS	5
2. TEST RESULTS SUMMARY.....	6
3. DESCRIPTION OF EQUIPMENT AND PERIPHERALS.....	7
3.1 EQUIPMENT UNDER TEST (EUT).....	7
3.2 EUT PERIPHERALS AND SUPPORT EQUIPMENT	7
3.3 THE MODE OF OPERATION DURING TESTS	7
3.4 MODIFICATIONS REQUIRED FOR EMISSIONS COMPLIANCE.....	7
3.5 DESCRIPTION OF INTERFACE CABLES.....	8
4. ANTENNA REQUIREMENT	9
4.1 REGULATION.....	9
4.2 TEST RESULTS.....	9
5. AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
5.1 TEST EQUIPMENT	10
5.2 PURPOSE.....	10
5.3 TEST PROCEDURES	10
5.4 TEST RESULTS.....	11
6. 6 DB BANDWIDTH	13
6.1 REGULATION.....	13
6.2 TEST EQUIPMENT	13
6.3 TEST PROCEDURES	13
6.4 TEST RESULTS.....	13
7. POWER OUTPUT.....	16
7.1 REGULATION.....	16
7.2 TEST EQUIPMENT	16
7.3 TEST PROCEDURES	16
7.4 TEST RESULTS.....	16
8. CONDUCTED SPURIOUS EMISSIONS	19
8.1 REGULATION.....	19
8.2 TEST EQUIPMENT	19
8.3 TEST PROCEDURES	19
8.4 TEST RESULTS.....	19

9. PROCESS GAIN.....	26
9.1 REGULATION.....	26
9.2 TEST RESULTS.....	26
10. RADIATED SPURIOUS EMISSIONS.....	27
10.1 REGULATION.....	27
10.2 TEST EQUIPMENT	27
10.3 TEST PROCEDURES	28
10.4 TEST RESULTS.....	29
10.5 TEST SETUP PHOTOGRAPHS	30
11. PEAK POWER SPECTRAL DENSITY	31
11.1 REGULATION.....	31
11.2 TEST EQUIPMENT	31
11.3 TEST PROCEDURES	31
11.4 TEST RESULTS.....	31
12. INFORMATIVE INFORMATION	41
13. ANNEX A.1 DIGITAL DEVICE CONDUCTED EMISSIONS	34
13.1 TEST EQUIPMENT	34
13.2 PURPOSE.....	34
13.3 TEST PROCEDURES	34
13.4 TEST RESULTS.....	35
14. ANNEX A.2 DIGITAL DEVICE RADIATED EMISSIONS.....	37
14.1 TEST EQUIPMENT	37
14.2 PURPOSE.....	38
14.3 TEST PROCEDURES	38
14.4 TEST RESULTS.....	38
14.5 TEST SETUP PHOTOGRAPHS	40
15. MISCELLANEOUS COMMENTS AND NOTES.....	43
16. LIST OF ATTACHMENTS	43

1. General

1.1 Document History

REVISION	DATE	COMMENTS
-	21 May 2001	Initial Release, Harry H. Hodes

Note: Acme Testing Co. hereby makes the following statements so as to conform with Chapter 10 (Test Reports) Requirement of ANSI C63.4:1992 “Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”:

- The units described in this report were received at Acme Testing Co.’s facilities on 01 May & 10 July 2001. Testing was performed on the units described in this report on 01, 02 & 03 May, 10, 15, 18 & 23 July 2001.
- The Test Results reported herein apply only to the Units actually tested, and to substantially identical Units.
- This test report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government, or any other foreign government.

This document is the property of Acme Testing, Co., and shall not be reproduced, except in full, without prior written approval of Acme Testing Co. However, all ownership rights are hereby returned unconditionally to Trango Systems, and approval is hereby granted to Trango Systems and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Acme Testing Co.

1.2 Purpose

The purpose of this report is to present data that demonstrates compliance of the Trango Systems Model M5800SB-AP-60 Data Transceiver to the FCC regulations for spread spectrum unlicensed devices operating under Section 15.247 of Title 47 of the United States Code of Federal Regulations.

Note: A change was made to the chassis and to the power supply circuitry of the EUT. These changes affect the radiation pattern and the conducted disturbance presented to the AC Mains power distribution network, but not the functionality of the transceiver's internal circuitry. Based on engineering judgment, new testing was performed to determine the Radiated Harmonic signal strengths and levels of AC Power Line Conducted Emissions. This testing ensured that the changes made to the chassis and power supply did not result in a non-compliant product. This report includes data that were recorded on 21 May 2001 and which were previously documented in Report Number 2001095. The following sections from Report Number 2001095 are included in this report: 6 DB Bandwidth, Power Output, Conducted Spurious Emissions, Process Gain, and Peak Power Spectral Density.

1.3 Manufacturer

Company Name: Trango Systems
Contact: Chris Gustaf
Street Address: 9939 Via Pasar
City/State/Zip: San Diego, CA 92126
Telephone: 858 621-2700
Fax: 858 621-2722
Web: www.trangosys.com

1.4 Test location

Laboratory: Test Site #1
Street Address: 2002 Valley Highway
Mailing Address: PO Box 3
City/State/Zip: Acme WA 98220-0003
Telephone: 888 226-3837
Fax: 360 595-2722
E-mail: acmetest@acmetesting.com
Web: www.acmetesting.com

1.5 Accreditations and Listings

Acme Testing Co.'s test facilities are accredited by A2LA for a specific scope of accreditation which includes the tests detailed herein, under Certificate Numbers: 0829-01 (Acme, WA), and 0829-02 (Plummer, ID). Acme Testing Co.'s test facilities that are used to perform radiated and conducted emissions are currently registered with the Federal Communications Commission under registration numbers: 90420 (Acme, WA), and 96502 (Plummer, ID). In addition, Acme Testing Co.'s test facilities are also registered with the Industry Canada under registration numbers: IC3251 (Acme, WA), and IC3618 (Plummer, ID).

2. Test Results Summary

Summary of Test Results
Data Transceiver, Model M5800SB-AP-60

Requirement	CFR Section	Test Result
AC Emissions < 48 dBuV	15.207	PASS
6 dB BW > 500 kHz	15.247(a)	PASS
Max Output Power < 1 W	15.247(a)	PASS
Conducted Spurious > -20 dBc	15.247(c)	PASS
Radiated Spurs < Limits in Section 15.209	15.205(b)	PASS
Power Density < 8dBm in 3 kHz BW	15.247(d)	PASS

The signed original of this report, supplied to the client, represents the only “official” copy. Retention of any additional copies (electronic or non-electronic media) is at Acme Testing’s discretion to meet internal requirements only. The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units, and meet the requirements of the specifications referenced herein.

Consistent with Industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) is factored into the “Correction Factor” documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known Industry Standards and Regulations.

The measurements contained in this report were made in accordance with the referenced standards and all applicable Public Notices received prior to the date of testing. Acme Testing assumes responsibility only for the accuracy and completeness of this data as it pertains to the sample tested.

TEST PERFORMED BY:

Andrew K. Pace
EMC Engineer

Date of Issuance

REVIEWED AND APPROVED BY:

Harry H. Hodes
President/CEO
Principal EMC Engineer

Date of Issuance

3. Description of Equipment and Peripherals

3.1 Equipment Under Test (EUT)

Device: Data Transceiver
Model Number: M5800SB-AP-60
Serial Number: None
FCC ID: None
Power: 120 V/60 Hz
Grounding: None
Size of EUT: 8 in x 3 in x 13 in

3.2 EUT Peripherals and Support Equipment

Device	Manufacturer	Model Number	FCC ID	Serial Number
Junction Box	Trango Systems	None	None	None
Laptop Computer	IBM Corporation	2626-2E9	ANOKAJIPENC	78-DFNF5 96/12

3.3 The Mode of Operation During Tests

The transceiver was operated in a test configuration. That is, a laptop computer containing test code was connected to the EUT via a serial cable. Depending on the characteristic being tested, the following settings were modified in software:

1. The transceiver could be set to one of three channels, $f_c = 5736, 5776, \text{ or } 5836 \text{ MHz}$;
2. Modulation could be turned on or off;
3. The polarization of the transmitted signal could be set to horizontal or vertical;

With those settings in place, the laptop was then used to turn on the transceiver with whatever setting-changes that had been made in place. If modulation was turned on, the laptop was used to transmit packet data to the EUT serially. This packet data was then transmitted by the EUT in the form of a direct sequence spread spectrum signal on the chosen channel and with the chosen polarization.

3.4 Modifications Required for Emissions Compliance

1. None.

3.5 Description of Interface Cables

EUT/Junction Box

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	0.6 m	No

EUT/Laptop Computer

Shielded	Unshielded	Flat	Round	Length	Ferrite
No	Yes	Yes	No	1 m	No

ARRANGEMENT OF INTERFACE CABLES: All interface cables were positioned for worst case maximum emissions within the manner assumed to be a typical operation condition (please reference photographs).

4. Antenna requirement

4.1 Regulation

(47CFR 15.203) An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators, which in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.2 Test Results

The M5800SB-AP-60 incorporates an integral patch antenna.

5. AC Power Line Conducted Emissions Tests

Test Requirement: CFR 47, Part 15C, 15.247

Test Procedure: ANSI C63.4:1992

Date of Test: 10 July 2001

Laboratory: Test Site #1 (Acme, WA)

5.1 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Line Conduction Test Site: Acme Testing Co., Test Site Number 1, Calibrated: 1 December 2000, Calibration due Date: 1 December 2001
- ⇒ Line Impedance Stabilization Network: EMCO 3825/2, Serial Number 9002-1601, Calibrated: 2 January 2001, Calibration due Date: 2 January 2002

5.2 Purpose

The purpose of this test was to evaluate the level of conducted noise the EUT imposed on the AC mains.

5.3 Test Procedures

The EUT was placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that was placed above the groundplane. The EUT was connected to a dedicated LISN. The LISN was bonded to the groundplane.

Prescan tests were performed to determine the “worst case” mode of operation. With the EUT operating in “worst case” mode, final conducted measurements were taken. Conducted measurements were made on each current carrying conductor with respect to ground.

Conducted Emissions Test Characteristics


Frequency range	0.45 MHz - 30.0 MHz
Test instrumentation resolution bandwidth	9 kHz
Lines Tested	Line 1/Line 2

5.4 Test Results

A summary of the 6 (six) highest amplitude conducted emissions is listed below.


FCC RULES 47CFR PART 15C, SUBPART 15.247, CLASS B
CONDUCTED EMISSIONS (0.45 MHZ TO 30 MHZ) 60 Hz/120 VAC
LINE 1

PEAK #	FREQ. (MHz)	AMPL (dB μ V)
1	0.4557	45.8
2	0.5621	41.7
3	0.7139	37.9
4	0.7635	34.7
5	1.513	30.6

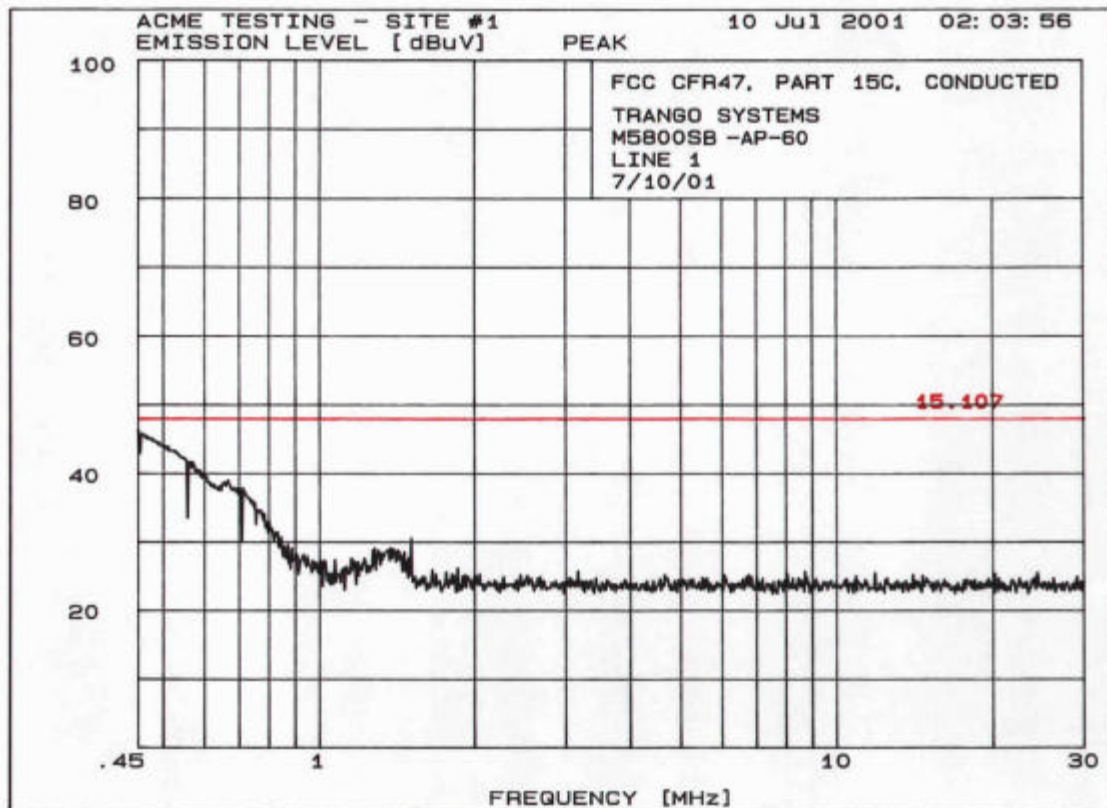

FCC RULES 47CFR PART 15C, SUBPART 15.247, CLASS B
CONDUCTED EMISSIONS (0.45 MHZ TO 30 MHZ) 60 Hz/120 VAC
LINE 2

PEAK #	FREQ. (MHz)	AMPL (dBμV)
1	0.4752	48.0
2	0.7079	43.5
3	0.7603	41.9
4	0.8408	36.8
5	1.037	35.3
6	1.279	35.4

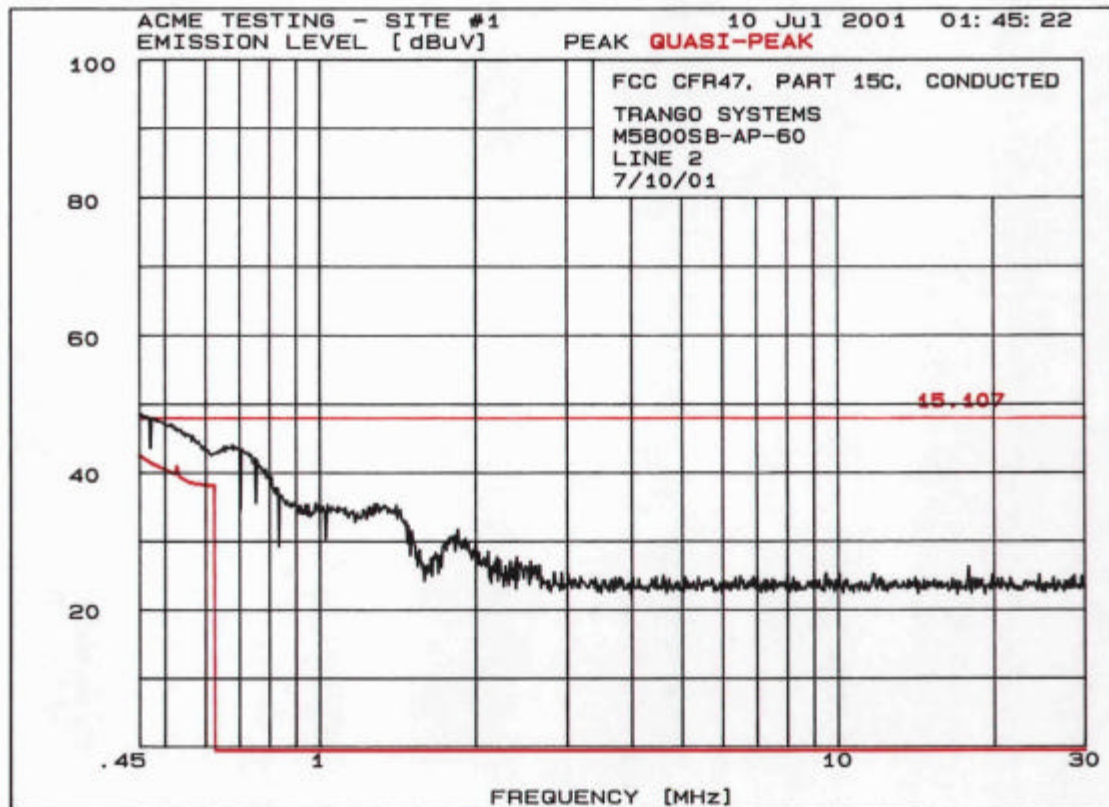

6. 6 dB Bandwidth

6.1 Regulation

(47 CFR 15.247(a2)) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment

⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001



⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001


6.3 Test Procedures

The RF output of the EUT was connected to the RF input port of the RF preselector through a 20 dB pad. The following measurements were made with a RBW = 100 kHz and VBW = 300 KHz.

6.4 Test Results

- ⇒ The measured 6 dB bandwidth at channel 1 is 11.04 MHz.
- ⇒ The measured 6 dB bandwidth at channel 3 is 10.30 MHz.
- ⇒ The measured 6 dB bandwidth at channel 6 is 8.72 MHz.

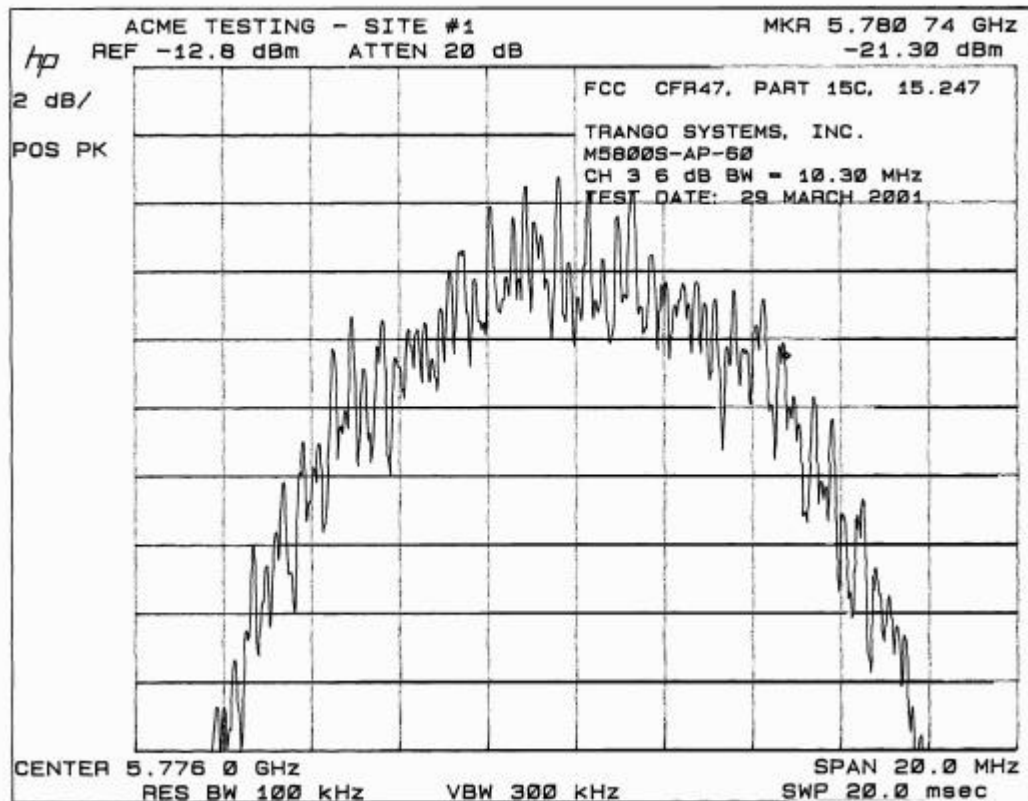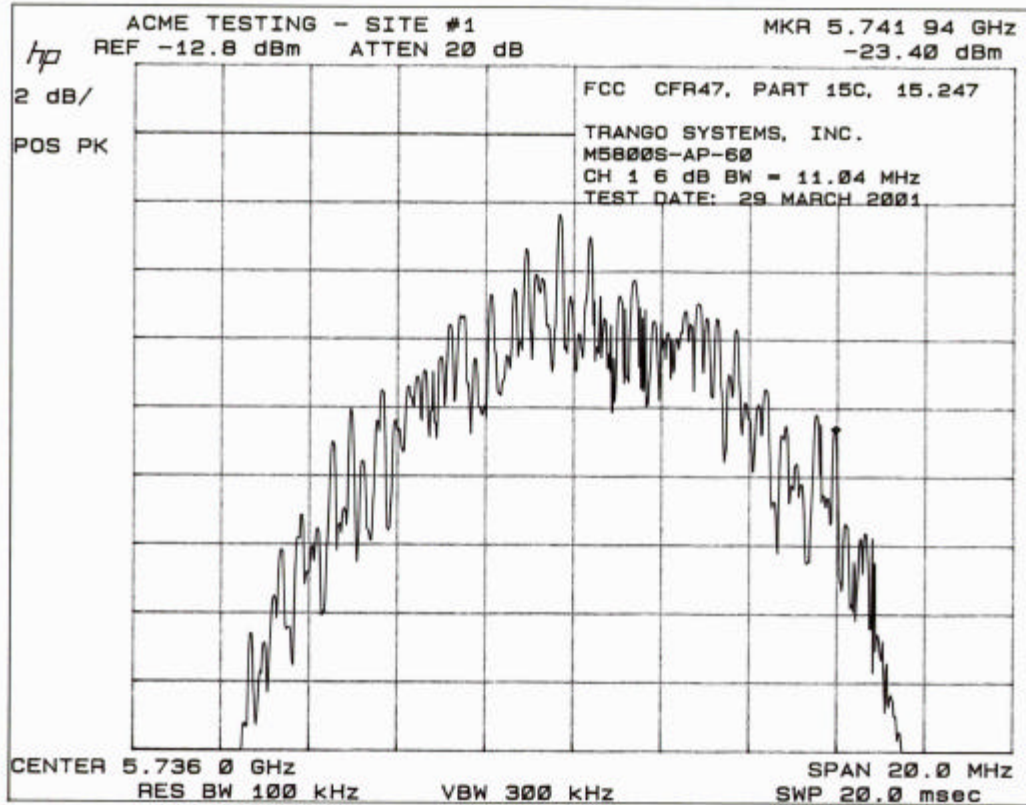

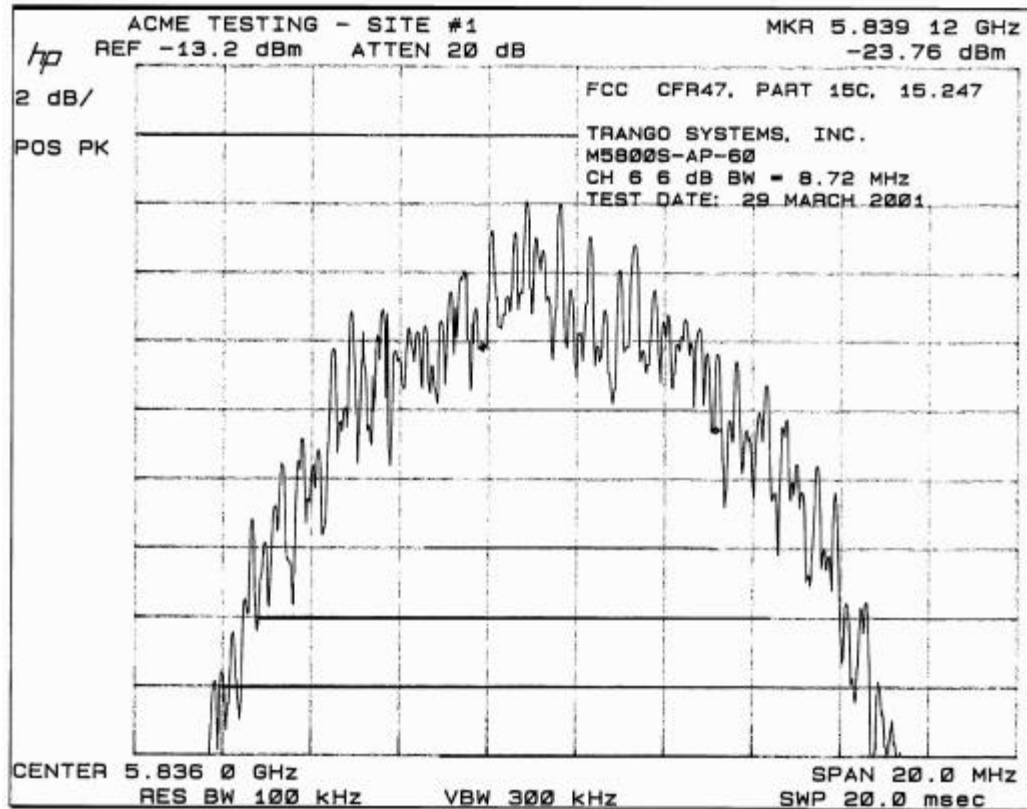

7. Power Output

7.1 Regulation

15.247(b1) The maximum peak output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band and for all direct sequence systems: 1 watt.

7.2 Test Equipment



- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001


7.3 Test Procedures

The modulated RF output of the EUT was connected to the RF input port of the RF preselector. The following measurements were made with a RBW = 3 MHz and VBW = 3 MHz.

7.4 Test Results

- ⇒ Measured maximum Peak Envelope Power for channel 1 was 15.7 dBm.
- ⇒ Measured maximum Peak Envelope Power for channel 3 was 17.0 dBm.
- ⇒ Measured maximum Peak Envelope Power for channel 6 was 17.4 dBm.

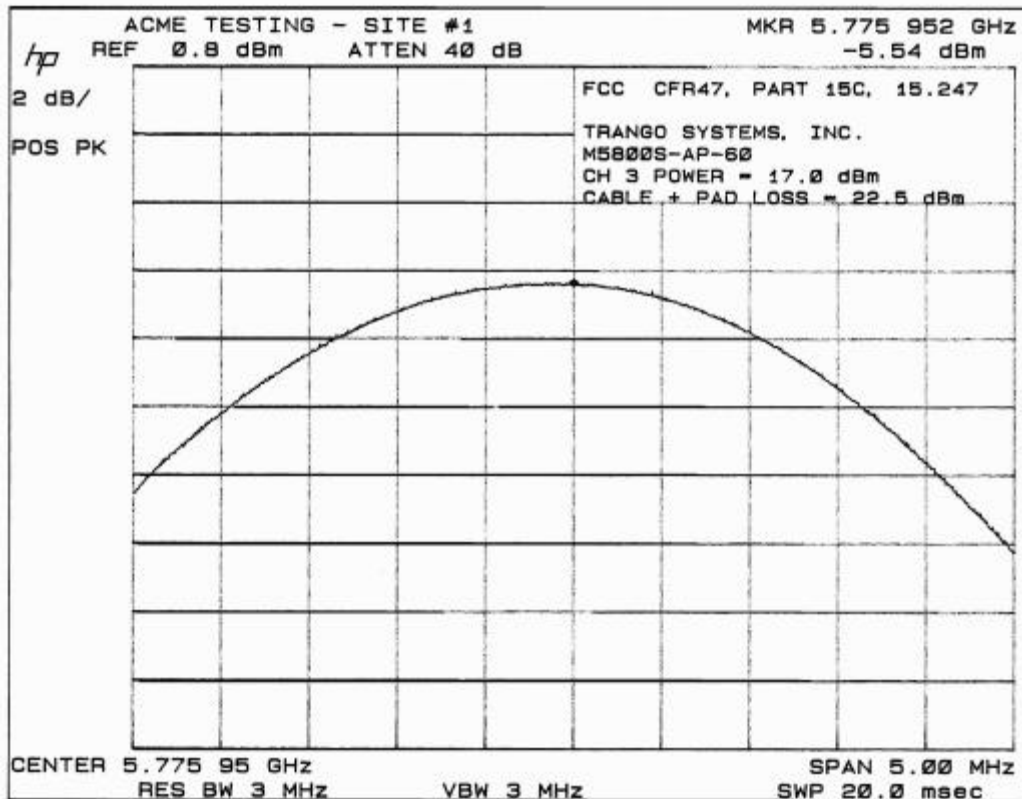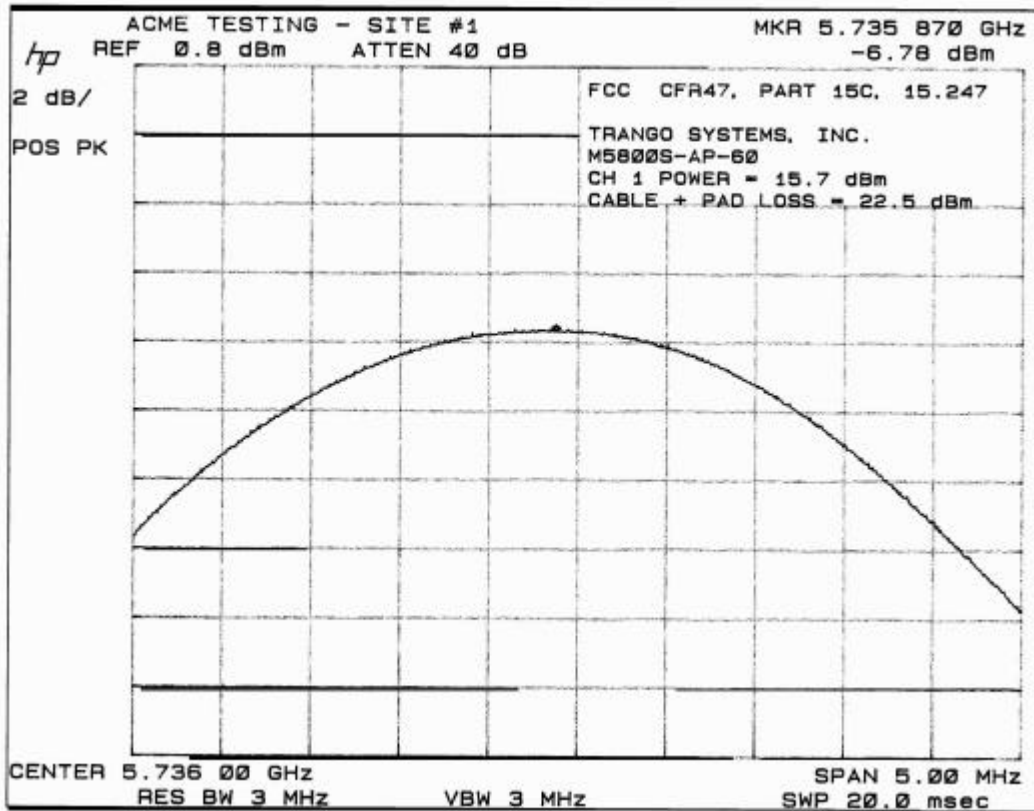

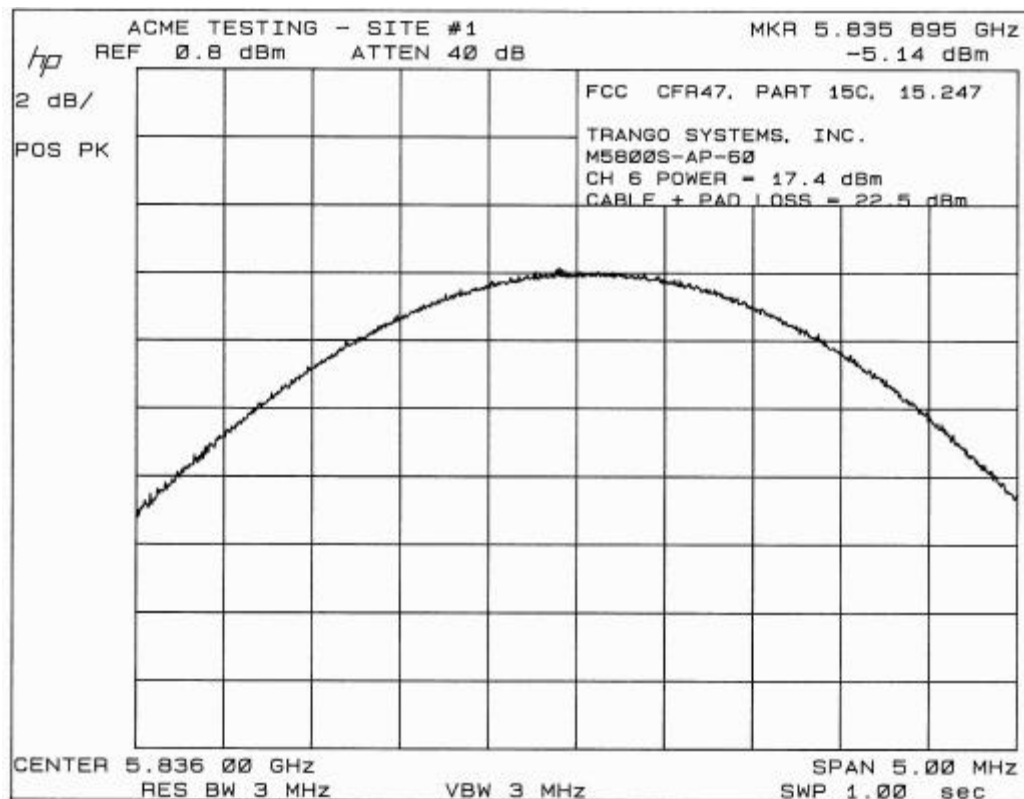

8. Conducted Spurious Emissions

8.1 Regulation

(47CFR 15.247 I) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.2 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ 2 – 8 GHZ Amplifier: HP 11975A, Serial Number 2304A 00257, Calibrated: 30 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970K, Serial Number 3003A 05538, Calibrated: 29 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970A, Serial Number 2332A 020123, Calibrated 3 April 2001, Calibration due Date 3 April 2002



8.3 Test Procedures


The RF output of the EUT was connected to the RF input port of the RF Preselector. The following measurements were made with a RBW = 100 kHz and VBW = 300 kHz.

8.4 Test Results



No out of band conducted emissions were detected within 40 dB of the carrier power. The noise floor of the Detection System was -65 dBc from 30 MHz to 2.4 GHz, -60 dBc from 2.4 GHz to 12.5 GHz, -55 dBc from 12.5 GHz to 18 GHz, -50 dBc from 18 GHz to 22 GHz, and -40 dBc from 22 GHz to 24 GHz.


CHANNEL 1 CONDUCTED SPURS

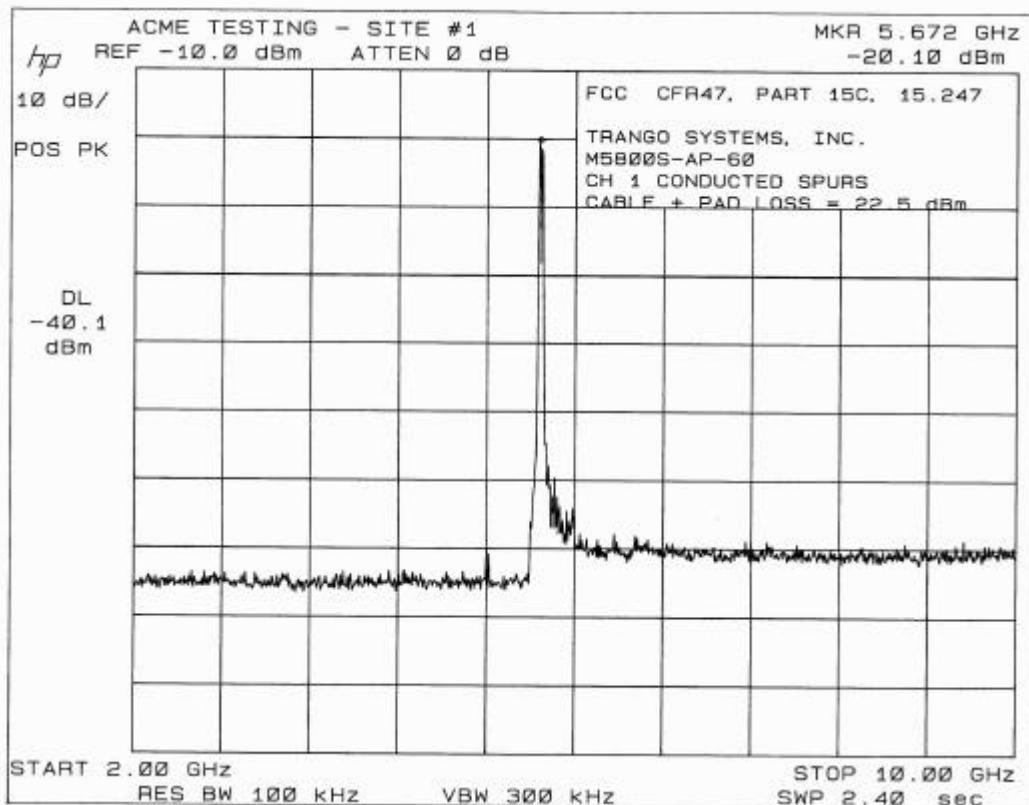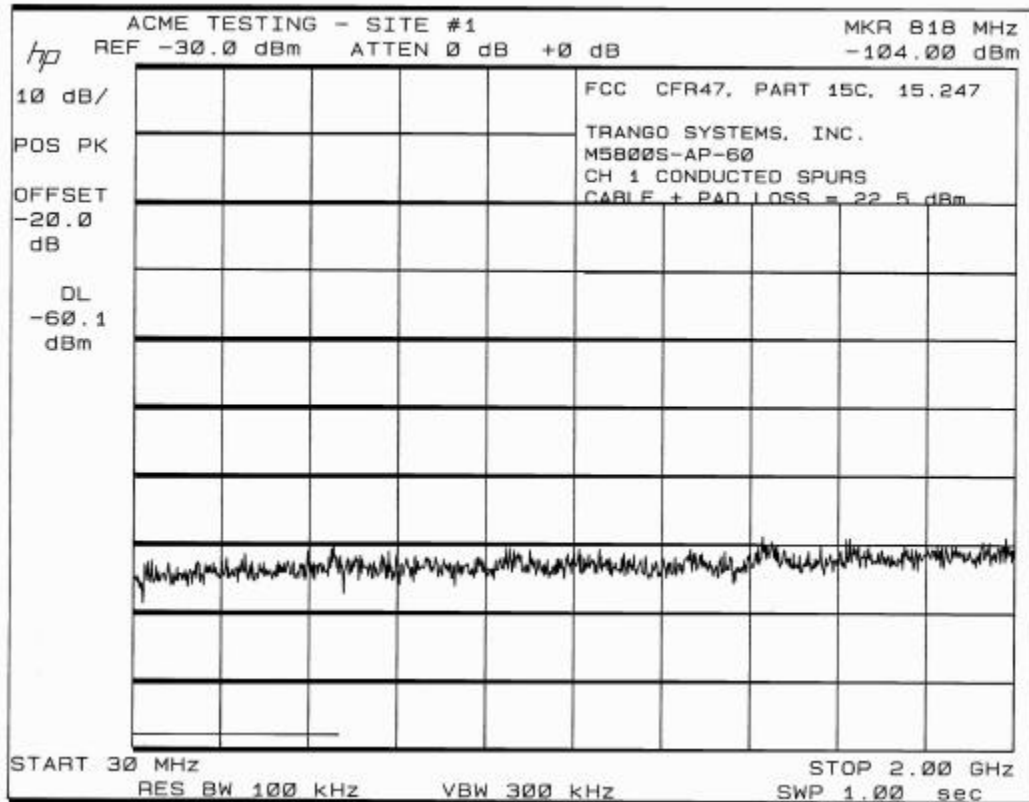


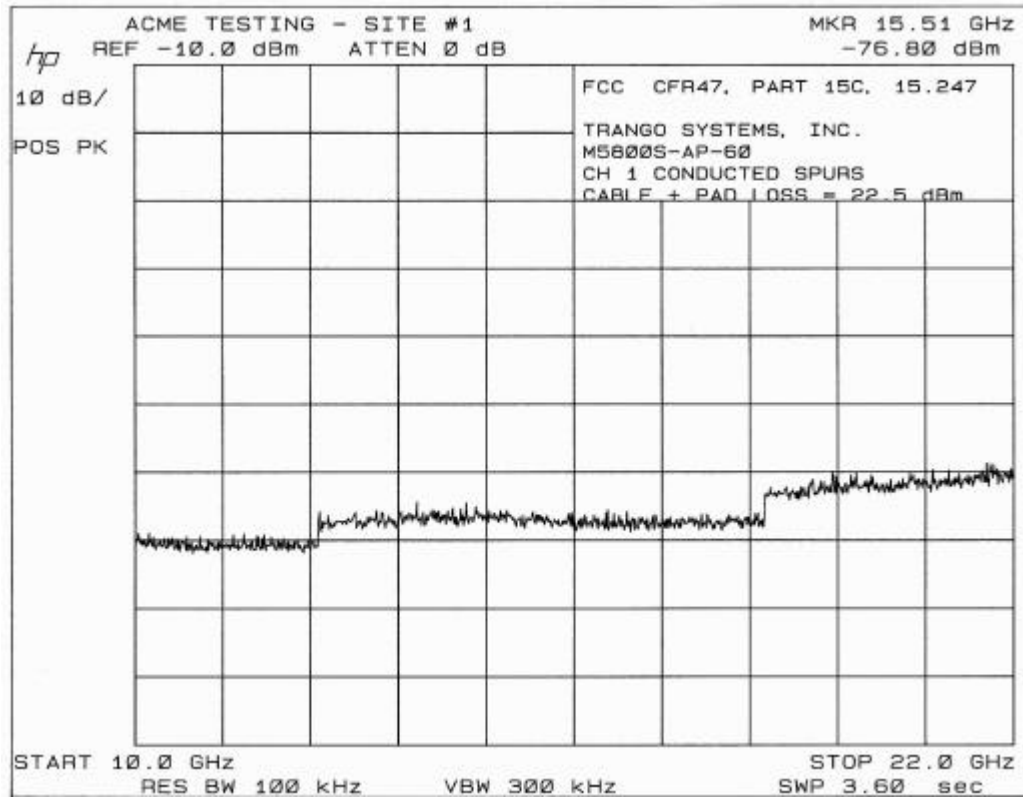



CHANNEL 3 CONDUCTED SPURS

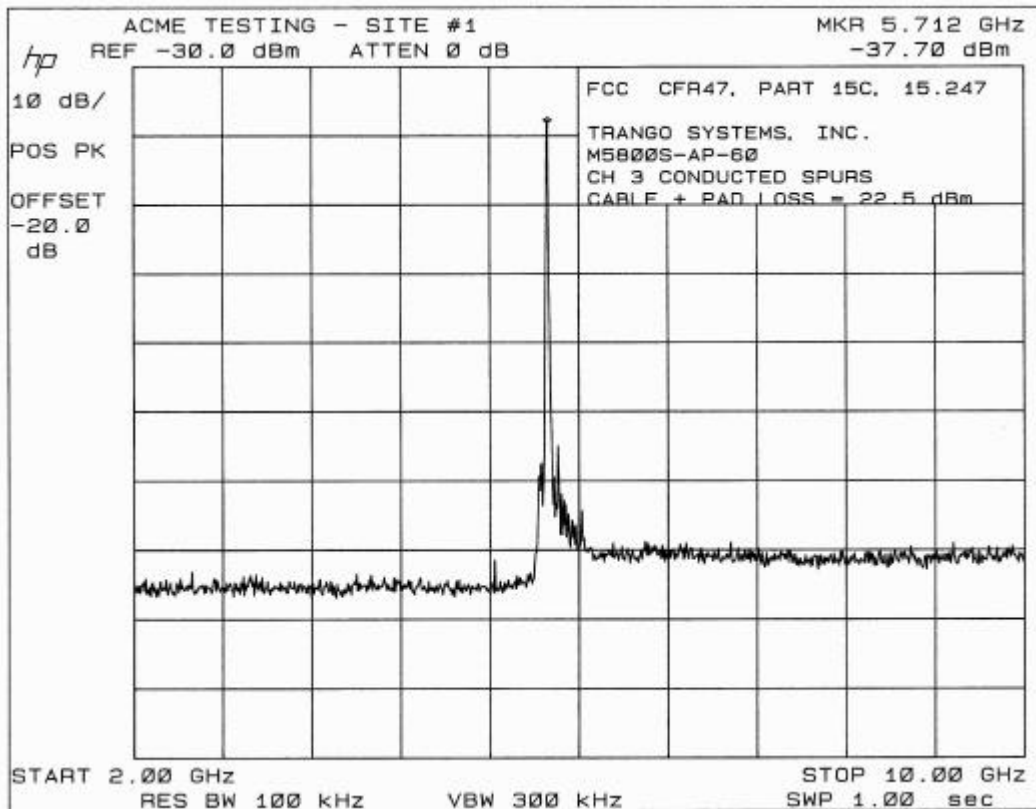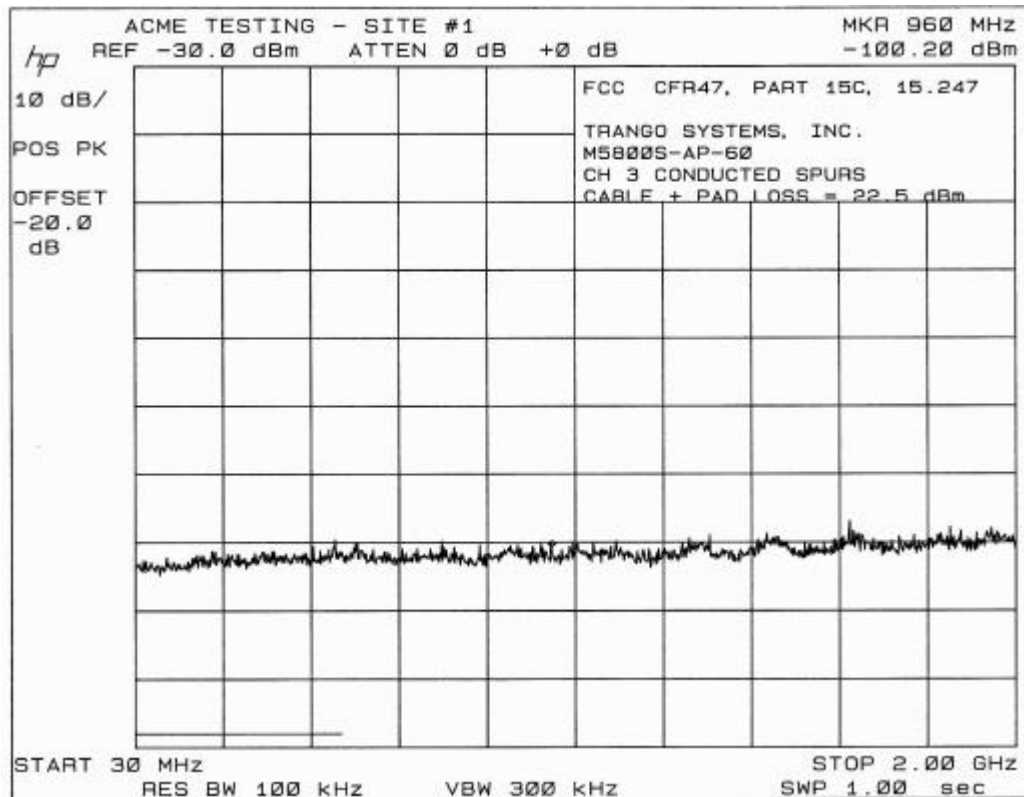

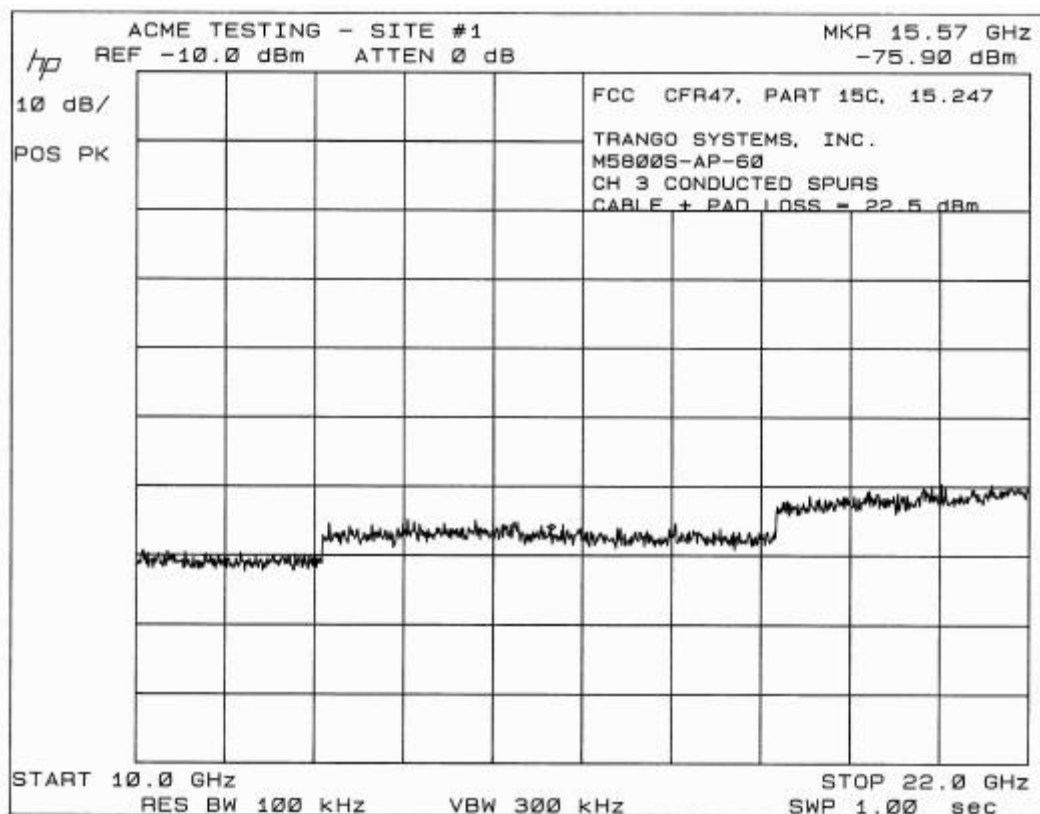

CHANNEL 6 CONDUCTED SPURS

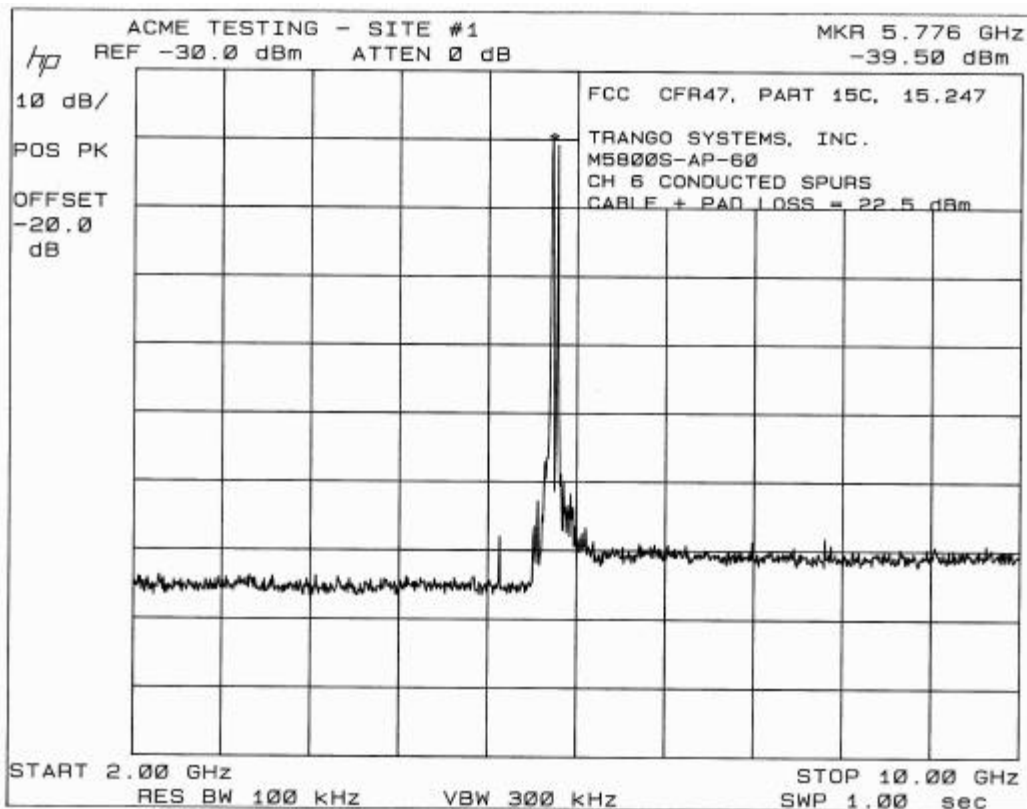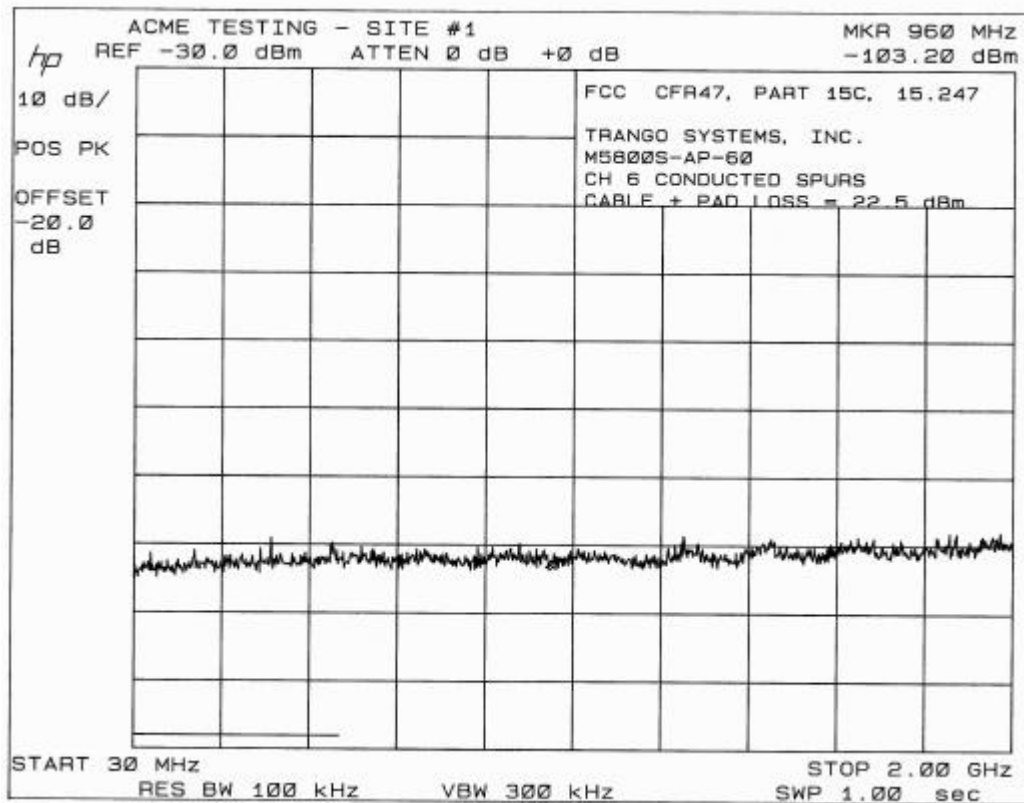

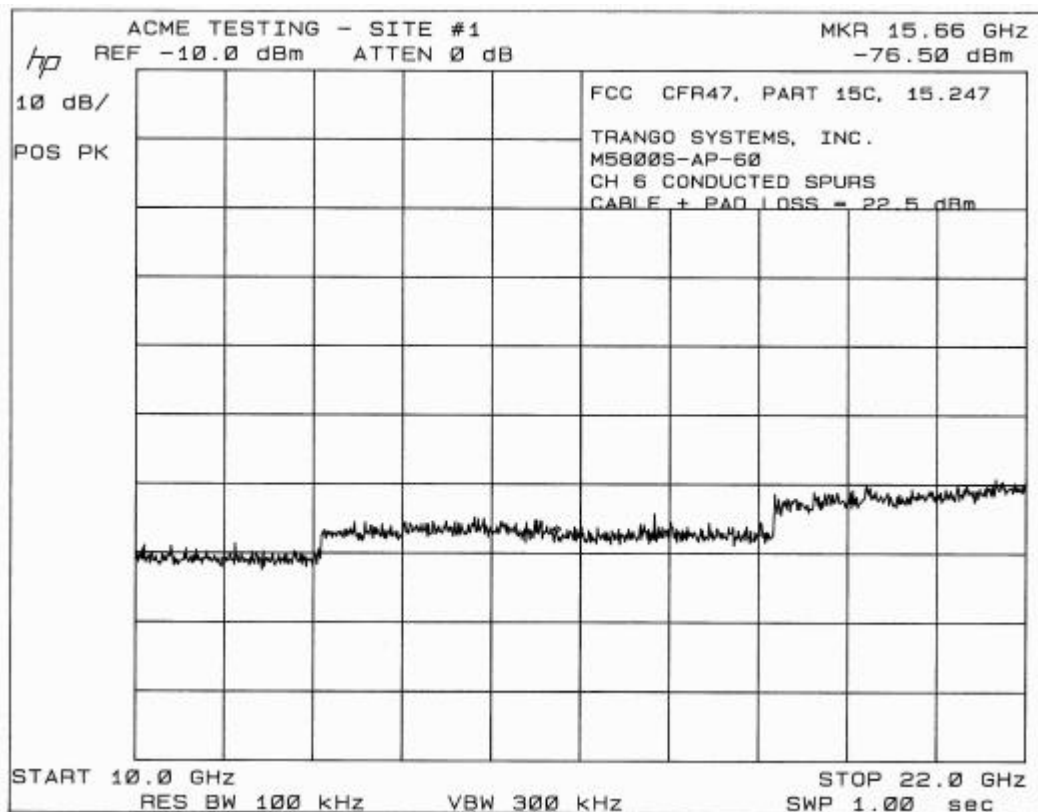

9. Process Gain

9.1 Regulation

(47 CFR 15.247e) The processing gain of a direct sequence system shall be at least 10 dB. The processing gain represents the improvement to the received signal-to-noise ratio, after filtering to the information bandwidth, from the spreading/dispersing function.

9.2 Test Results

Both the M5800SB-SU-EXT and M5800SB-AP-60 systems use the Prism chipset for Modulation/Demodulation/Spreading of the data – The calculations and explanation were written specifically for this chipset by the manufacturer of the chipset, Intersil. Attached is the tabulated test data showing the packet error rate (PER) and the corresponding frequency at which the measurement was made. A total of 340 points were taken, each being recorded for 1 minute. The results of the test show that more than 80% of the packets had a PER of less than 8% satisfying the 15.247e requirement for >10 dB process gain. Since the circuit design and test program is identical on the M5800S-SU-EXT and M5800SB-AP-60 this data can be applied to both applications.

The *intersil PRISM II radio Jamming Margin Test* has been attached to this document for review.

10. Radiated Spurious Emissions

10.1 Regulation

(47 CFR 15.247 I) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.2 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Open Area Test Site: Acme Testing Co., Test Site Number 1, Calibrated: 1 December 2000, Calibration due Date: 1 December 2001
- ⇒ EUT Turntable Position Controller: Rothenbuhler Engineering, Custom, No Calibration Required
- ⇒ Antenna Mast: Compliance Design, Model M100/200, No Calibration Required
- ⇒ Double Ridge Guide Horn Antenna: EMCO 3115, Serial Number 9807-5534, Calibrated: 5 January 2001, Calibration due Date: 5 January 2002
- ⇒ 2 – 8 GHZ Amplifier: HP 11975A, Serial Number 2304A 00257, Calibrated: 30 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970K, Serial Number 3003A 05538, Calibrated: 29 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970A, Serial Number 2332A 020123, Calibrated 3 April 2001, Calibration due Date 3 April 2002
- ⇒ Pyramidal Horn: EMCO 3160-10, Serial Number 9708-1055, No Calibration Required
- ⇒ Pyramidal Horn: EMCO 3160-09, Serial Number 9701-1071, No Calibration Required
- ⇒ Precision Attenuator Set: Weinschel AS-18, Serial Number 665, No Calibration Required
- ⇒ 1 GHz to 26 GHz Preamplifier: Hewlett Packard HP8449B/H02, Serial Number 2933A00198, Calibrated: 03 May 2001, Calibration Due Date: 03 May 2003

10.3 Test Procedures

The EUT was placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that sits on a flush mounted metal turntable.

Prescan tests were performed to determine the “worst case” mode of operation. With the EUT operating in “worst case” mode, emissions from the unit are maximized by manipulating the system cables, and by adjusting the polarization and height of the receive antenna, and by rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions.

Radiated Emissions Test Characteristics

Frequency range	30 MHz – 40000 MHz 15.205 RESTRICTED BANDS ONLY
Test distance	3 m (30 MHz – 26,500 MHz) 10 cm (26,500 MHz – 40,000 MHz)
Test instrumentation resolution bandwidth	120 kHz (30 MHz – 1000 MHz) 1 MHz (1000 MHz – 40,000 MHz)
Receive antenna scan height	1 m – 4 m
Receive antenna polarization	Vertical/Horizontal

10.4 Test Results**VERTICAL**

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS dBuV/m	dLIM dB	MODE		HGT cm	AZM deg		
1	5737.4	-	112.6	-	PK	V	100	359	3.2	Channel 1
2	5777.4	-	107.9	-	PK	V	100	359	3.3	Channel 2
3	5837.4	-	106.4	-	PK	V	100	359	3.5	Channel 3
4	11471.9	74.0	65.0	-9.0	PK	V	100	359	9.7	Channel 1
5	11472.0	54.0	50.4	-3.6	AVG	V	100	359	9.7	Channel 1
6	11551.3	54.0	51.3	-2.7	AVG	V	100	359	10.1	Channel 2
7	11551.9	74.0	65.8	-8.2	PK	V	100	359	10.1	Channel 2
8	11671.9	74.0	62.6	-11.4	PK	V	100	359	10.6	Channel 3
9	11672.8	54.0	51.1	-2.9	AVG	V	100	359	10.6	Channel 3
10	22944.0	54.0	30.0	-24.0	PK	V	100	1	0	Channel 1
11	23104.0	54.0	30.8	-23.2	PK	V	100	1	0	Channel 2
12	23344.0	54.0	30.4	-23.6	PK	V	100	1	0	Channel 3
13	28686.0	54.0	39.9	-14.0	PK	V	100	1	0	Channel 1
14	28880.0	54.0	39.3	-14.7	PK	V	100	1	0	Channel 2
15	29179.5	54.0	39.7	-14.3	PK	V	100	1	0	Channel 3
16	34416.0	54.0	39.9	-14.1	PK	V	100	1	0	Channel 1
17	34655.8	54.0	39.0	-15.0	PK	V	100	1	0	Channel 2
18	35015.8	54.0	39.3	-14.7	PK	V	100	1	0	Channel 3

HORIZONTAL

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS dBuV/m	dLIM dB	MODE		HGT cm	AZM deg		
1	5737.5	-	113.9	-	PK	H	100	359	3.2	Channel 1
2	5777.5	-	108.9	-	PK	H	100	359	3.3	Channel 2
3	5837.6	-	99.6	-	PK	H	100	359	3.5	Channel 3
4	11471.2	54.0	50.5	-3.5	AVG	H	100	359	9.7	Channel 1
5	11471.9	74.0	66.5	-7.5	PK	H	100	359	9.7	Channel 1
6	11551.6	54.0	51.4	-2.6	AVG	H	100	359	10.1	Channel 2
7	11552.0	74.0	66.3	-7.7	PK	H	100	359	10.1	Channel 2
8	11671.9	74.0	62.3	-11.7	PK	H	100	359	10.6	Channel 3
9	11672.8	54.0	51.1	-2.9	AVG	H	100	359	10.6	Channel 3
10	22944.0	54.0	30.0	-24.0	PK	H	100	1	0	Channel 1
11	23104.0	54.0	30.8	-23.2	PK	H	100	1	0	Channel 2
12	23344.0	54.0	30.4	-23.6	PK	H	100	1	0	Channel 3
13	28686.0	54.0	39.9	-14.1	PK	H	100	1	0	Channel 1
14	28880.0	54.0	39.3	-14.7	PK	H	100	1	0	Channel 2
15	29179.5	54.0	39.7	-14.3	PK	H	100	1	0	Channel 3
16	34416.0	54.0	39.9	-14.1	PK	H	100	1	0	Channel 1
17	34655.8	54.0	39.0	-15.0	PK	H	100	1	0	Channel 2
18	35015.8	54.0	39.3	-14.7	PK	H	100	1	0	Channel 3

10.5 Test Setup Photographs



11. Peak Power Spectral Density

11.1 Regulation

(47CFR 15.247) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Test Equipment

⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

11.3 Test Procedures



The RF output of the EUT was connected to the RF input port of the RF Preselector through a 10 dB pad. The following measurements were made with a RBW = 3 kHz, VBW = 10 kHz and Sweep Time = 666 seconds.


11.4 Test Results

Maximum peak power spectral density of channel 1 is -9.3 dBm.

Maximum peak power spectral density of channel 3 is -7.8 dBm.

Maximum peak power spectral density of channel 6 is -8.7 dBm.

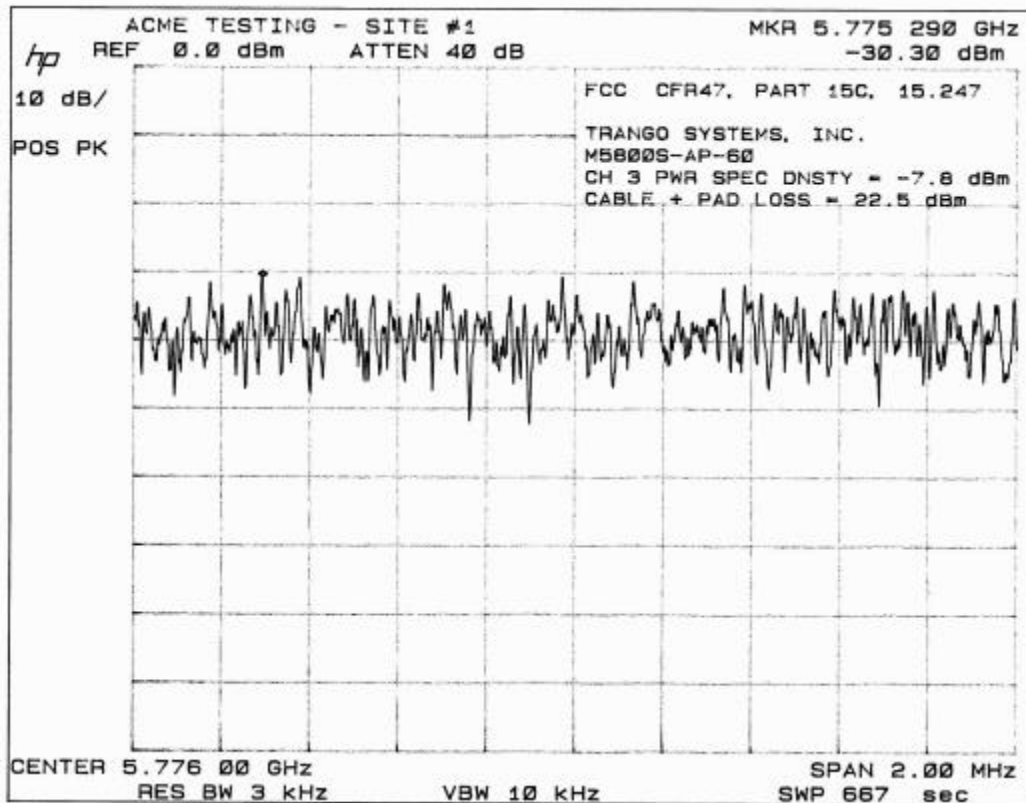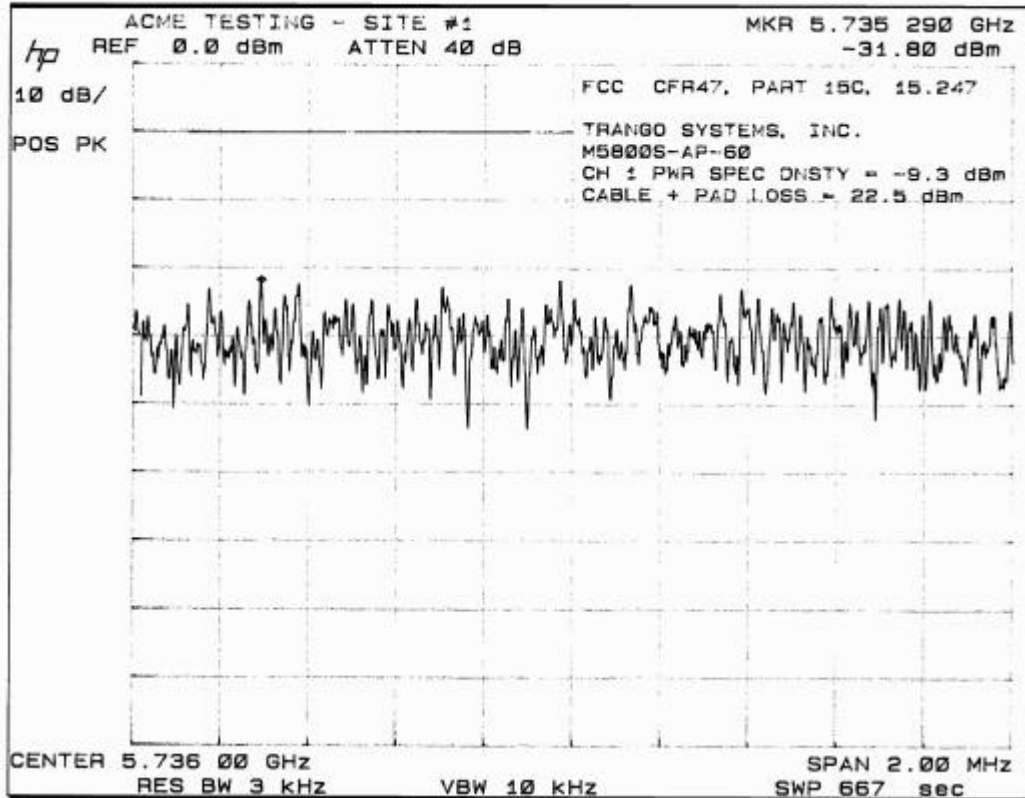

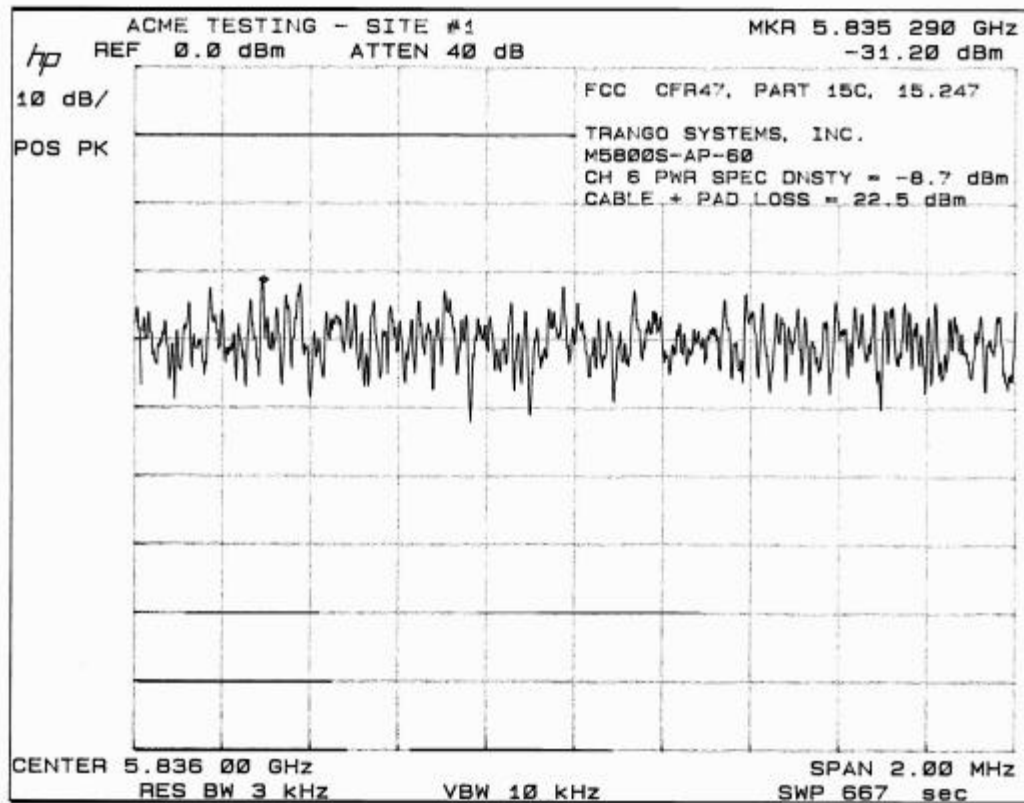

12. Annex A.1 Digital Device Conducted Emissions

Test Requirement: CFR 47, Part 15B, 15.107

Test Procedure: ANSI C63.4:1992

Date of Test: 10 July 2001

Laboratory: Test Site #1 (Acme, WA)

12.1 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Line Conduction Test Site: Acme Testing Co., Test Site Number 1, Calibrated: 1 December 2000, Calibration due Date: 1 December 2001
- ⇒ Line Impedance Stabilization Network: EMCO 3825/2, Serial Number 9002-1601, Calibrated: 2 January 2001, Calibration due Date: 2 January 2002

12.2 Purpose

The purpose of this test was to evaluate the level of conducted noise the EUT imposed on the AC Mains, and to show that the EUT is compliant to the Class B Limits of 47CFR Part 15, Section 15.107.

12.3 Test Procedures

The EUT was placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that was placed above the groundplane. The EUT was connected to a dedicated LISN. The LISN was bonded to the groundplane.

Prescan tests were performed to determine the “worst case” mode of operation. With the EUT operating in “worst case” mode, final conducted measurements were taken. Conducted measurements were made on each current carrying conductor with respect to ground.

Conducted Emissions Test Characteristics


Frequency range	0.45 MHz - 30.0 MHz
Test instrumentation resolution bandwidth	9 kHz
Lines Tested	Line 1/Line 2

12.4 Test Results

A summary of the 6 (six) highest amplitude conducted emissions is listed below.


FCC RULES 47CFR PART 15B, SUBPART B, SECTION 15.247, CLASS B
CONDUCTED EMISSIONS (0.45 MHZ TO 30 MHZ) 60 Hz/120 VAC
LINE 1

PEAK #	FREQ. (MHz)	AMPL (dB μ V)
1	0.4557	45.8
2	0.5621	41.7
3	0.7139	37.9
4	0.7635	34.7
5	1.513	30.6

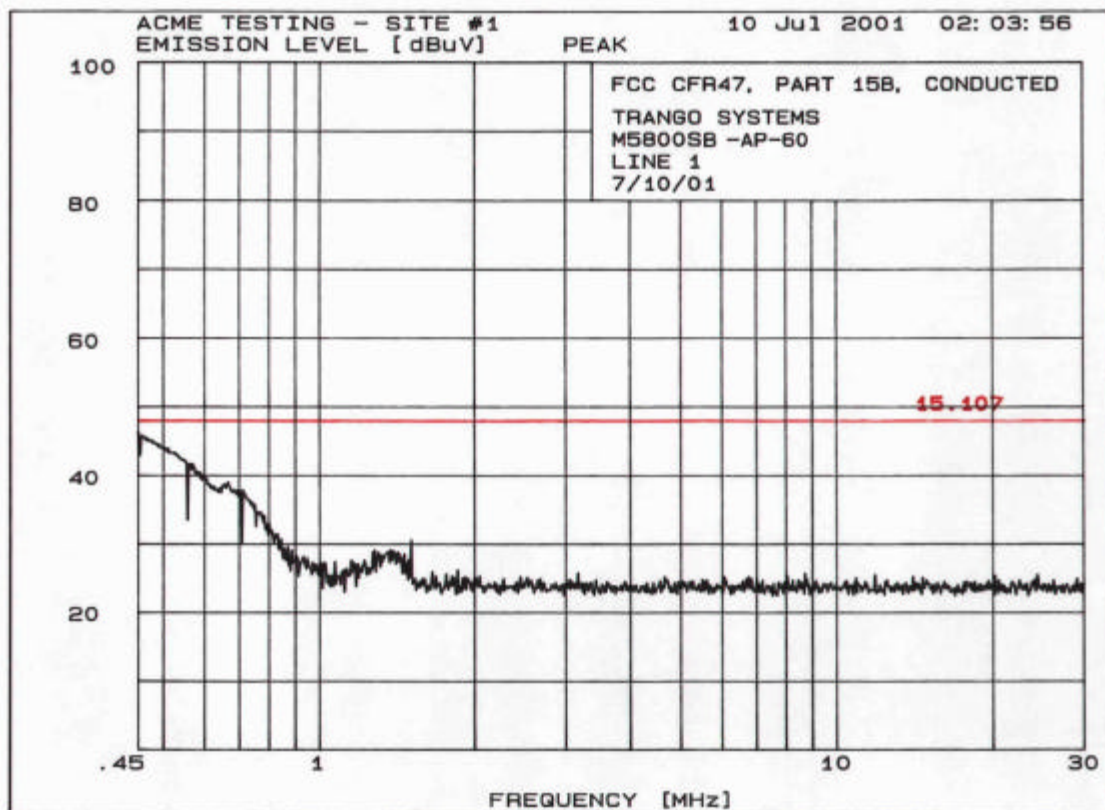

FCC RULES 47CFR PART 15B, SUBPART B, SECTION 15.247, CLASS B
CONDUCTED EMISSIONS (0.45 MHz TO 30 MHz) 60 Hz/120 VAC
LINE 2

PEAK #	FREQ. (MHz)	AMPL (dBμV)
1	0.4752	48.0
2	0.7079	43.5
3	0.7603	41.9
4	0.8408	36.8
5	1.037	35.3
6	1.279	35.4

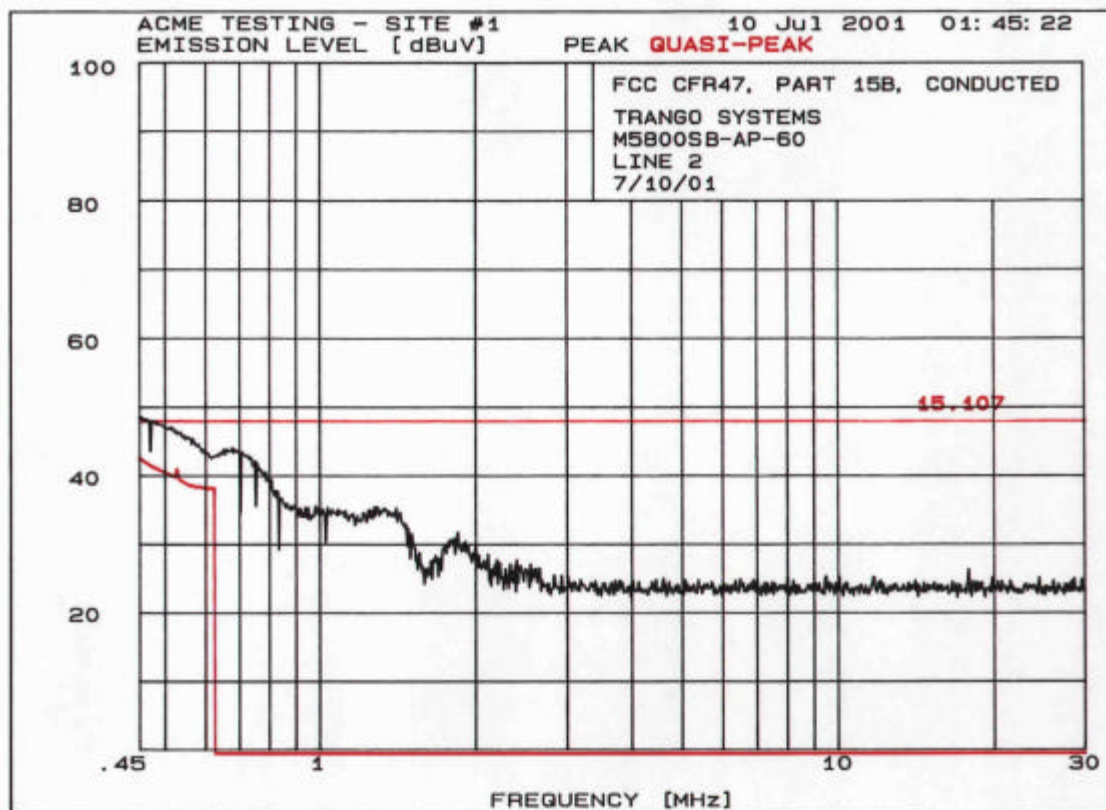

13. Annex A.2 Digital Device Radiated Emissions

Test Requirement: FCC Rules: 47CFR, Part 15, Subpart B

Test Procedure: ANSI C63.4 – 1992

Date of Test: 01 May 2001

Laboratory: Test Site #2 (Acme, WA)

13.1 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Open Area Test Site: Acme Testing Co., Test Site Number 1, Calibrated: 1 December 2000, Calibration due Date: 1 December 2001
- ⇒ EUT Turntable Position Controller: Rothenbuhler Engineering, Custom, No Calibration Required
- ⇒ Antenna Mast: Compliance Design, model M100/200, No Calibration Required
- ⇒ Double Ridge Guide Horn Antenna: EMCO 3115, Serial Number 9807-5534, Calibrated: 5 January 2001, Calibration due Date: 5 January 2002
- ⇒ 2 – 8 GHZ Amplifier: HP 11975A, Serial Number 2304A 00257, Calibrated: 30 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970K, Serial Number 3003A 05538, Calibrated: 29 March 2001, Calibration due Date: 30 March 2002
- ⇒ Harmonic Mixer: HP 11970A, Serial Number 2332A 020123, Calibrated 3 April 2001, Calibration due Date 3 April 2002
- ⇒ Pyramidal Horn: EMCO 3160-10, Serial Number 9708-1055, No Calibration Required
- ⇒ Pyramidal Horn: EMCO 3160-09, Serial Number 9701-1071, No Calibration Required
- ⇒ Precision Attenuator Set: Weinschel AS-18, Serial Number 665, No Calibration Required
- ⇒ 1 GHz to 26 GHz Preamplifier: Hewlett Packard HP8449B/H02, Serial Number 2933A00198, Calibrated: 03 May 2001, Calibration Due Date: 03 May 2003

13.2 Purpose

The purpose of this test was to show that the radiated electromagnetic interference characteristics of the EUT are compliant to the class B limits shown in 47 CFR 15.109.

13.3 Test Procedures

The EUT was placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that was placed directly onto a flush mounted turn table.

Prescan tests were performed to determine the “worst-case” mode of operation. With the EUT operating in “worst-case” mode, emissions from the unit were maximized by manipulating the cables, and by adjusting the polarization and height of the receive antenna and rotating the EUT on the turntable.

Radiated Emissions Test Characteristics



Frequency range	30 MHz - 1000 MHz
Test distance	3 m
Test instrumentation resolution bandwidth	120 kHz
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/Horizontal

13.4 Test Results

FCC RULES: 47CFR PART 15 SUBPART B CLASS B
(30 MHz – 1000 MHz) 60 Hz/120 VAC (CISPR LIMITS)

No	EMISSION	SPEC LIMIT	MEASUREMENTS				SITE		CORR FACTOR
	FREQUENCY MHz		ABS	dLIM	MODE	POL	HGT cm	AZM deg	
1	68.473	40.0	26.9	-13.1	PK	V	100	359	7.5
2	109.233	43.5	33.9	-9.6	PK	V	100	359	11.8
3	126.686	43.5	33.9	-9.6	PK	V	100	359	14.3
4	213.753	43.5	34.7	-8.8	PK	V	100	260	11.2

Only the 4 (four) highest amplitude radiated emissions are listed above.

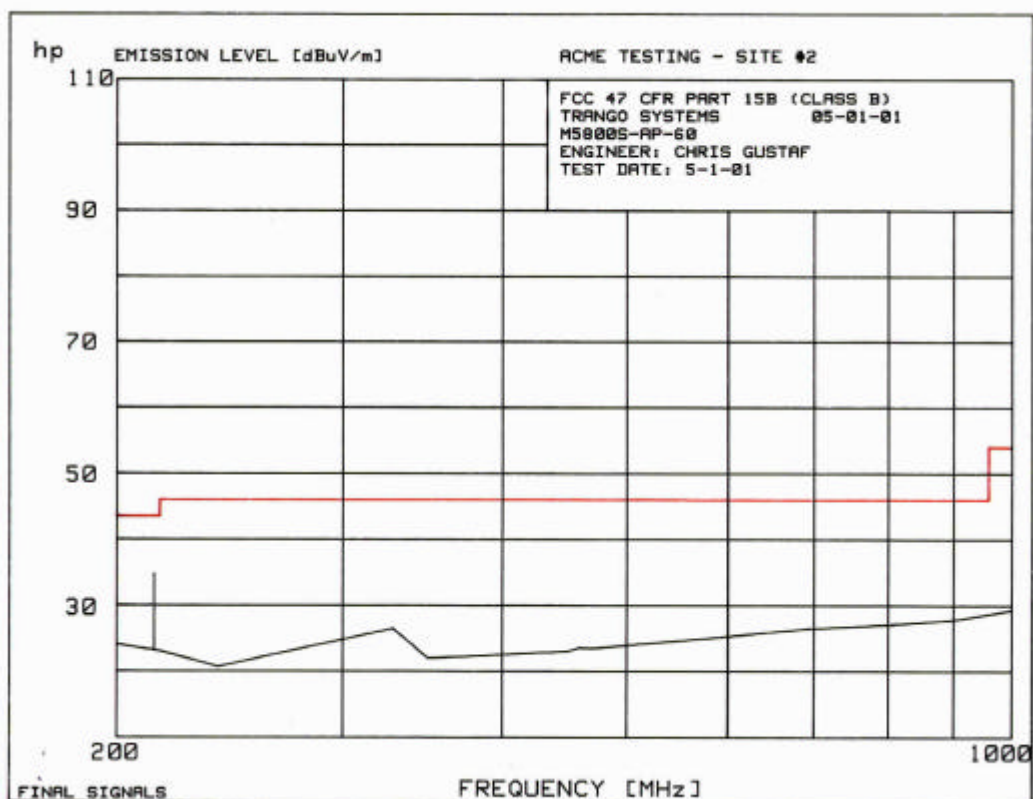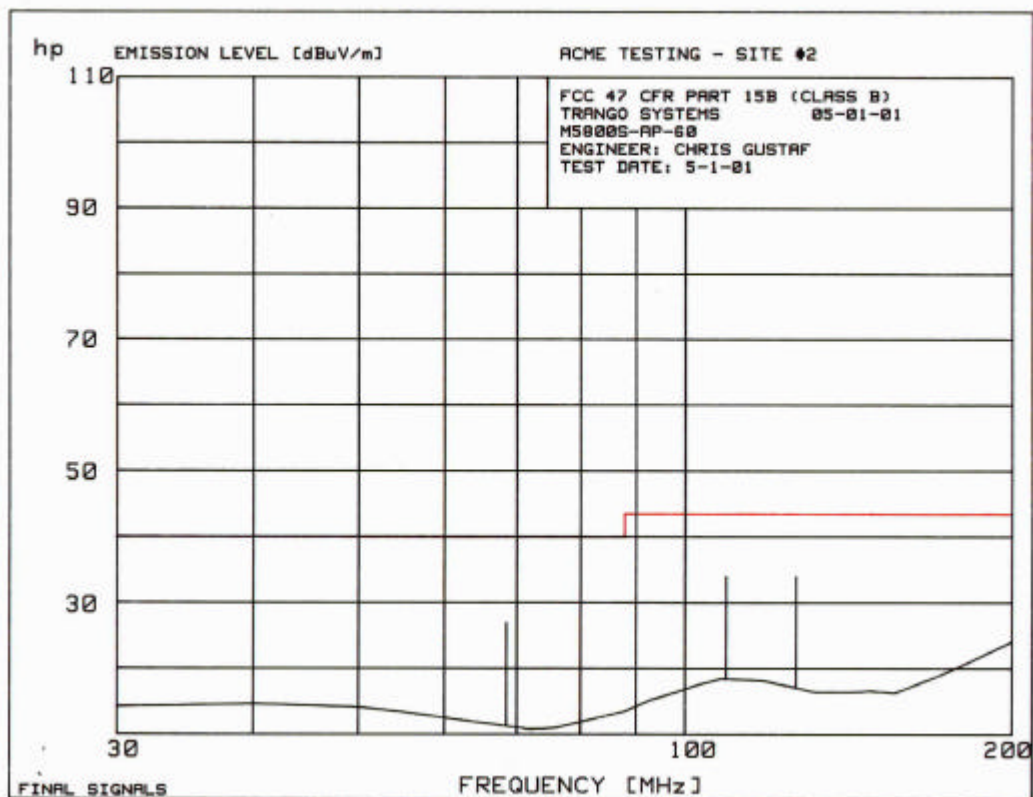

13.5 Test Setup Photographs



14. Informative Information



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 (EN45001)

ACME TESTING
2002 Valley Highway
Acme, WA 98220-0003
Steve Fitzgerald Phone: 360 595 2785

ELECTRICAL (EMC)

Valid to: November 30, 2001

Certificate Number: 0829-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC) tests:

Radiated & Conducted Emissions
Immunity
Voltage sags
Harmonics
Flicker

On the following materials and products:

Electrical and electronic equipment for information technology, industrial, scientific, and medical applications; residential service; receivers; and licensed and unlicensed transmitters.

Using the following standards:

U.S. Code of Federal Regulations (CFR) 47, FCC Method Parts 15 (using ANSI C63.4-1992), 18 & 90
CISPR: 11; 13; 14 (excluding click measurements); 22 (including Amendments 1 and 2)
CNS: 13439; 13438
EN: 50081-1; 50081-2; 50082-1; 50082-2; 55011; 55013; 55014-1 (excluding click measurements); 55014-2; 55022; 55103-1; 55103-2; 60601-1-2; 60945 (sections 9 & 10 only); 61000-4-2; 61000-4-3; 61000-4-4; 61000-4-5 (single phase only, excluding 10/700 surge testing); 61000-4-6; 61000-4-8; 61000-4-11; 61000-3-2; 61000-3-3
AS/NZS: 3548, 2064.1/2, 4251.1, 4252.1
IEC: 801-2; 801-3; 801-4; 801-5; 1000-4-2; 1000-4-3; 1000-4-4; 1000-4-5; 1000-4-6
ENV: 50140; 50204
ICES-003 Issue 2 Revision 1
RSS-210 Issue 2
Bellcore GR-1089-CORE (Sections 2 through 3.2.4)

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974



Laboratory Division
7435 Oakland Mills Road
Columbia, MD. 21046

November 22, 1999

Registration Number: 90420

Acme Testing Company
P.O. Box 3
2002 Valley Highway
Acme, WA 98220-0003

Attention: Paul Slavens


Re: Measurement facility located at Acme, Sites 1 & 2
3, 10 & 30 meter sites
Date of Listing: November 22, 1999

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, E-Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips
Electronics Engineer

15. Miscellaneous Comments and Notes

1. None

16. List of Attachments

1. The *intersil PRISM II radio Jamming Margin Test* document (8).