

RF Test Report

Applicant : Edimax Technology Co., Ltd.
Product Type : Indoor Air Quality Detector
Trade Name : EDIMAX
Model Number : AI-2002W
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Feb. 12, 2018
Test Period : Mar. 09 ~ Mar. 14, 2018
Issue Date : Mar. 27, 2018

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Mar. 21, 2018	Initial Issue	Nina Lin
01	Mar. 27, 2018	Revised report information	Nina Lin

Verification of Compliance

Issued Date: Mar. 27, 2018

Applicant : Edimax Technology Co., Ltd.
Product Type : Indoor Air Quality Detector
Trade Name : EDIMAX
Model Number : AI-2002W
FCC ID : NDD9520021801
EUT Rated Voltage : DC 12V, 1A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)



TABLE OF CONTENTS

1	General Information	5
2	EUT Description.....	7
3	Test Methodology.....	8
	3.1. Mode of Operation.....	8
	3.2. EUT Exercise Software	13
	3.3. Configuration of Test System Details.....	14
	3.4. Test Instruments	15
	3.5. Test Site Environment.....	15
4	Measurement Procedure.....	16
	4.1. AC Power Line Conducted Emission Measurement.....	16
	4.2. Radiated Emission Measurement.....	18
	4.3. Maximum Conducted Output Power Measurement.....	23
	4.4. 6dB RF Bandwidth Measurement.....	24
	4.5. Maximum Power Spectral Density Measurement	25
	4.6. Out of Band Conducted Emissions Measurement.....	26
	4.7. Antenna Measurement	27
5	Test Results	28
	Annex A. AC Power Line Conducted Emission Test Results	28
	Annex B. Conducted Test Results	30
	Annex C. Radiated Emission Test Results.....	54



1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

Standard	Description
CFR47, Part 15, Subpart C §15.247	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v04	GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247



1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150kHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	



2 EUT Description

Applicant	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan			
Manufacturer	Edimax Technology Co., Ltd. No.278, Xinhua 1st Rd., Neihu Dist., Taipei City, Taiwan			
Product Type	Indoor Air Quality Detector			
Trade Name	EDIMAX			
Model Number	AI-2002W			
FCC ID	NDD9520021801			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 / 800 GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20MHz	Up to 11Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20MHz	Up to 54Mbps
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2462	OFDM	20MHz	Up to 72.2Mbps
IEEE 802.11n 2.4GHz 40MHz	2422 ~ 2452	OFDM	40MHz	Up to 150Mbps
Antenna information	Type		Max. Gain (dBi)	
	embedded antenna		4.2	
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +40 °C			

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.156
IEEE 802.11g	0.248
IEEE 802.11n 2.4GHz 20MHz	0.231
IEEE 802.11n 2.4GHz 40MHz	0.245

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in TX mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0
Mode 2	V
Mode 3	V
Mode 4	V
Mode 5	V

Test Mode	Antenna Delivery	Data Rate	Test Channel
Mode 2	1TX	1M	1, 6, 11
Mode 3	1TX	6M	1, 6, 11
Mode 4	1TX	6.5M	1, 6, 11
Mode 5	1TX	13.5M	3, 6, 9

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412	12.460	12.540	0.994	0.028	0.010
Mode 3	2412	2.080	2.190	0.950	0.224	0.481
Mode 4	2412	1.940	2.050	0.946	0.240	0.515
Mode 5	2422	0.970	1.080	0.898	0.467	1.031





Duty Cycle Graphs



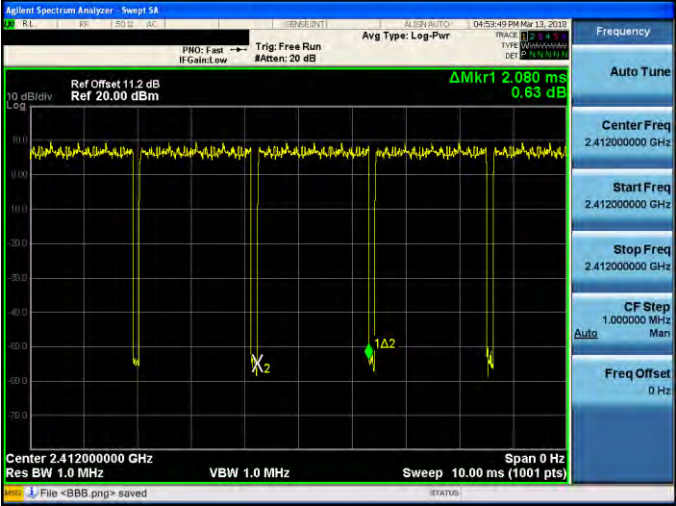

Mode 3: IEEE 802.11g Continuous TX Mode	
On time	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.412000000 GHz, Res BW 1.0 MHz, VBW 1.0 MHz, Sweep 10.00 ms (1001 pts)</p> <p>Ref Offset 11.2 dB, Ref 20.00 dBm, ΔMkr1 2.080 ms, 0.63 dB</p>
On+off time	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.412000000 GHz, Res BW 1.0 MHz, VBW 1.0 MHz, Sweep 10.00 ms (1001 pts)</p> <p>Ref Offset 11.2 dB, Ref 20.00 dBm, ΔMkr1 2.190 ms, 1.15 dB</p>

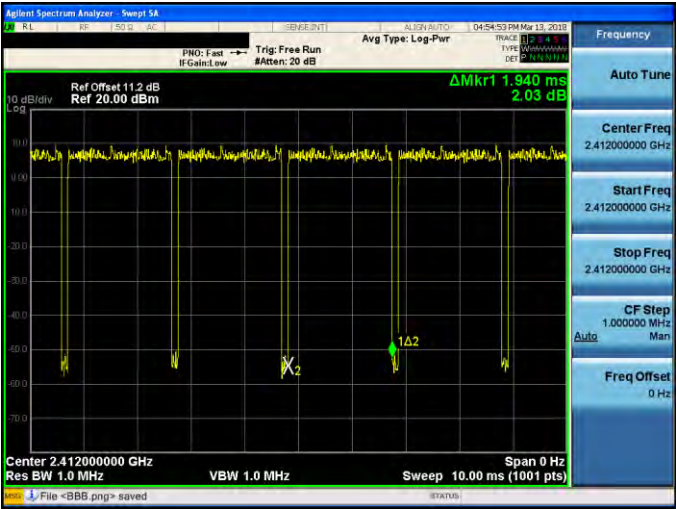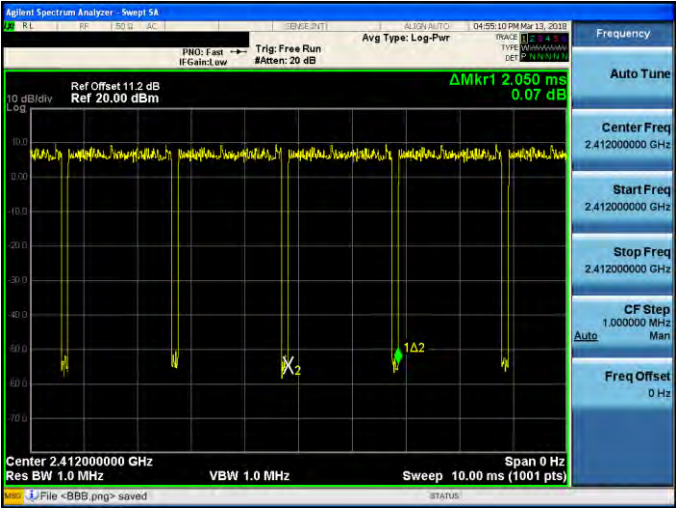

Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode	
On time	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.940 ms 2.03 dB</p> <p>Center 2.412000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Frequency</p> <ul style="list-style-type: none">Auto TuneCenter Freq 2.412000000 GHzStart Freq 2.412000000 GHzStop Freq 2.412000000 GHzCF Step 1.000000 MHzFreq Offset 0 Hz
On+off time	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>ΔMkr1 2.050 ms 0.07 dB</p> <p>Center 2.412000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Frequency</p> <ul style="list-style-type: none">Auto TuneCenter Freq 2.412000000 GHzStart Freq 2.412000000 GHzStop Freq 2.412000000 GHzCF Step 1.000000 MHzFreq Offset 0 Hz

Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX Mode	
On time	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm ΔMkr1 970.0 μs -1.19 dB</p> <p>Center 2.422000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Frequency: 2.422000000 GHz</p>
On+off time	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm ΔMkr1 1.080 ms -1.72 dB</p> <p>Center 2.422000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Frequency: 2.422000000 GHz</p>




3.2. EUT Exercise Software

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function
4.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

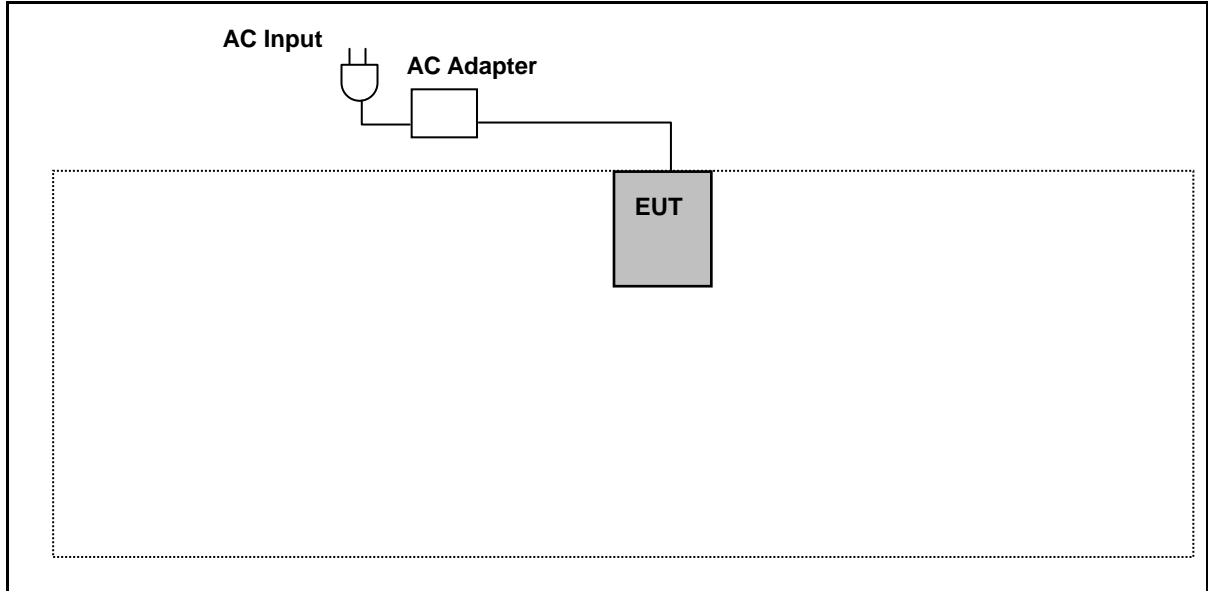

Radiated Emissions

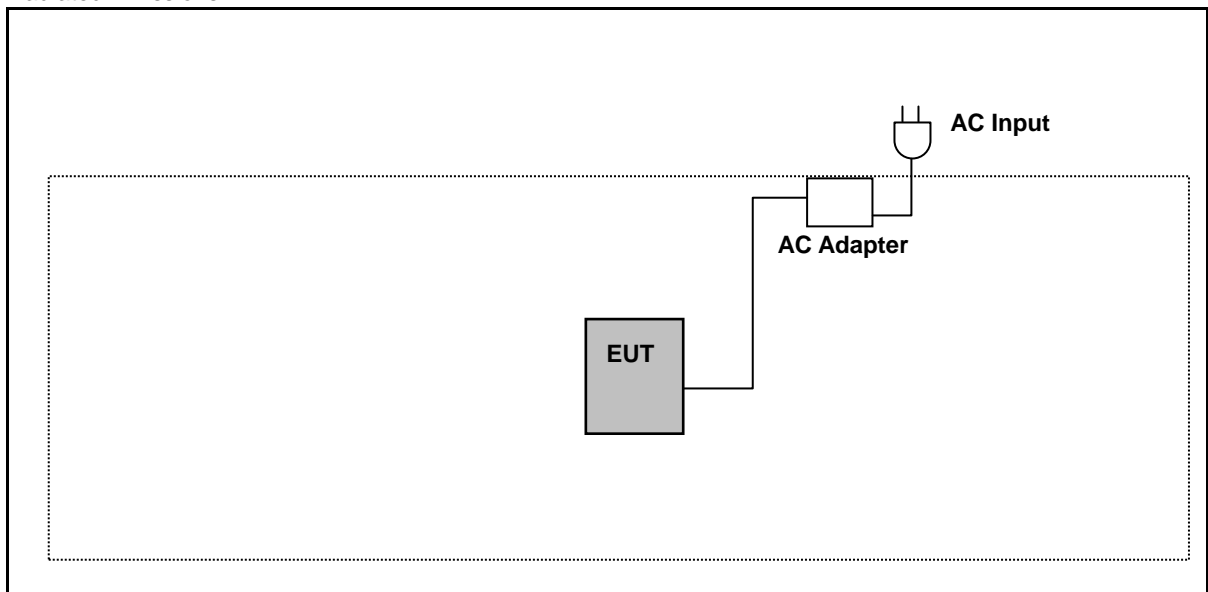



3.4. Test Instruments

For Conducted Emission

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/18/2017	1 year
LISN	R&S	ENV216	101040	04/01/2017	1 year
LISN	R&S	ENV216	101041	03/15/2017	1 year

For Radiated Emissions

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10Hz~44GHz)	Agilent	N9010A	MY52221312	01/15/2018	1 year
Pre Amplifier (1~26.5GHz)	Agilent	8449B	3008A02237	10/16/2017	1 year
Pre Amplifier (100KHz~1.3GHz)	Agilent	8447D	2944A11119	01/10/2018	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/26/2017	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/20/2017	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/19/2017	1 year

For Conducted

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	ML2495A	1126022	08/28/2017	1 year
Power Meter	Anritsu	ML2495A	1135009	08/28/2017	1 year
Spectrum Analyzer (20Hz~26.5GHz)	Agilent	N9020A	US47520902	09/21/2017	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

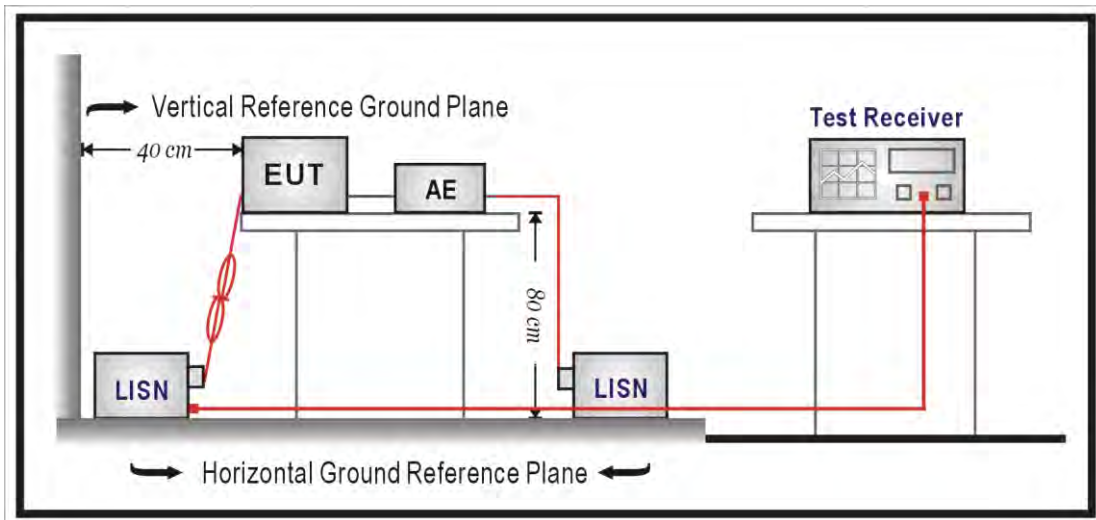

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega // 50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega // 50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9kHz ~ 30MHz

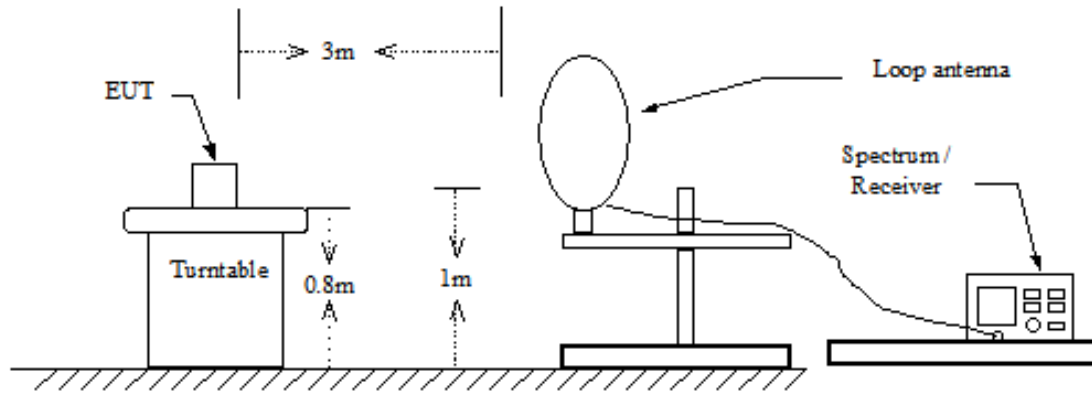

Below 1GHz

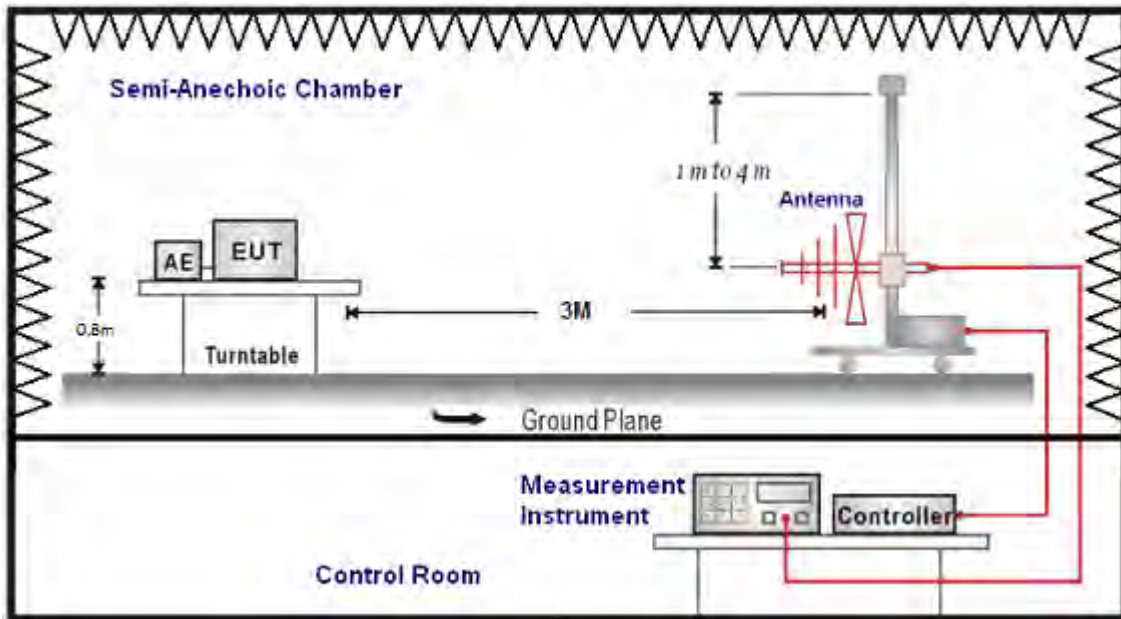

Above 1GHz

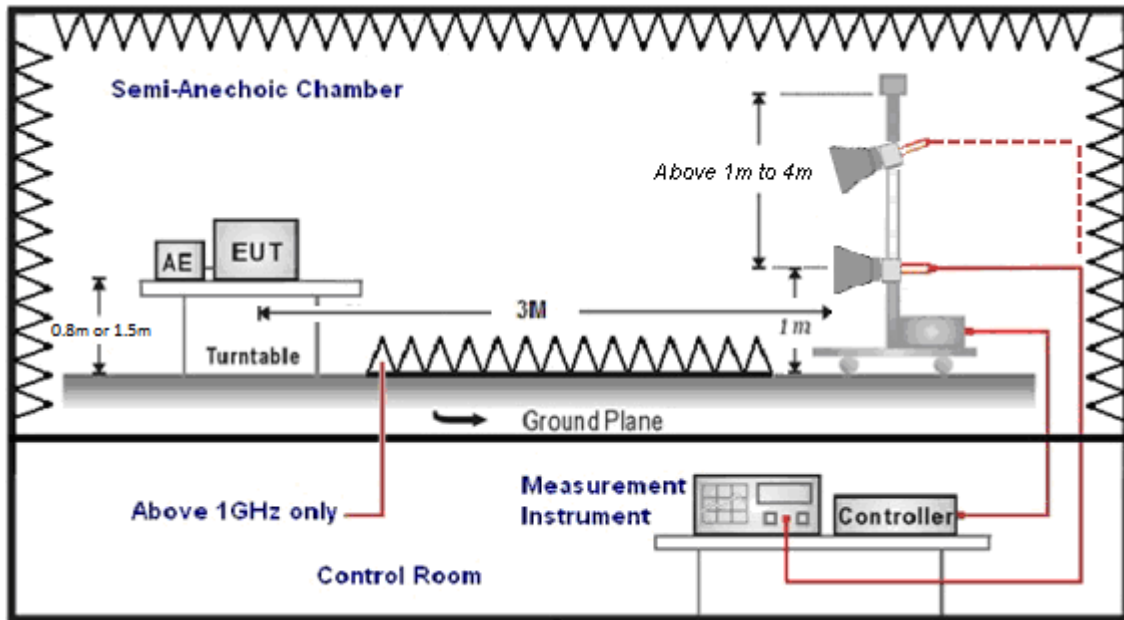



■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Test Setup

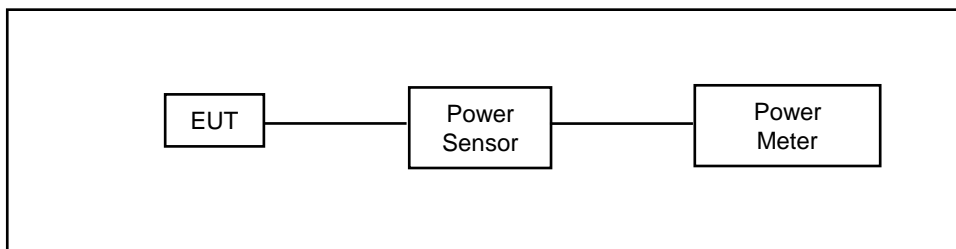

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.3 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

4.4. 6dB RF Bandwidth Measurement

■ Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

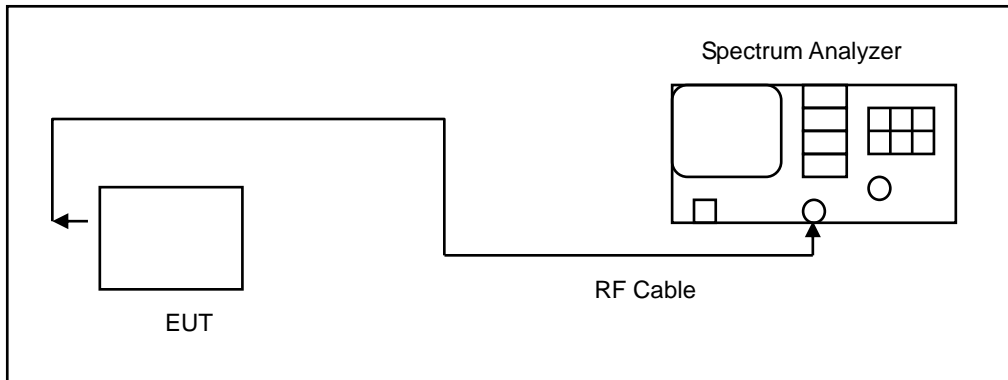

■ Test Procedure

The EUT tested to DTS test procedure of KDB 558074 D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Spectral Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

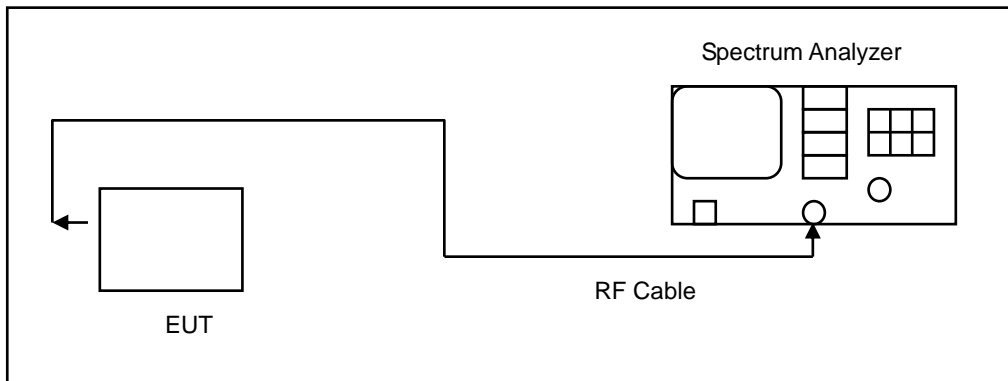

■ Test Procedure

The EUT tested to DTS test procedure of KDB 558074 D01 section 10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

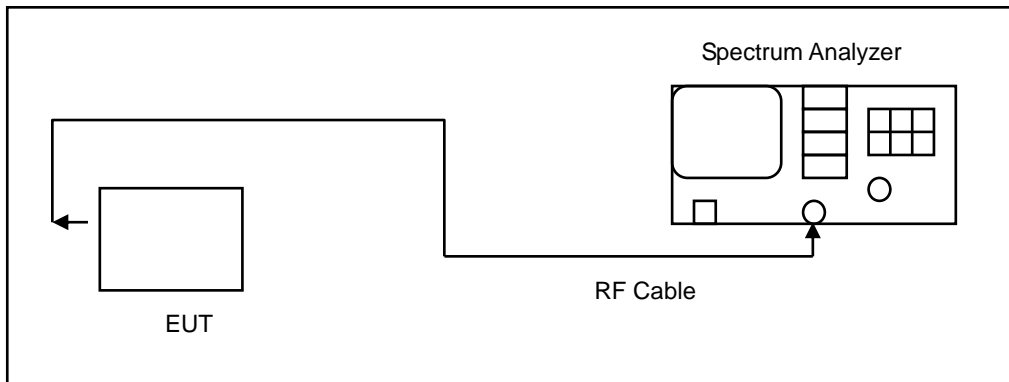

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.



4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Antenna Description


See section 2 – antenna information.



5 Test Results

Annex A. AC Power Line Conducted Emission Test Results

Standard:	FCC Part 15.247	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Line:	L1		
Description:			

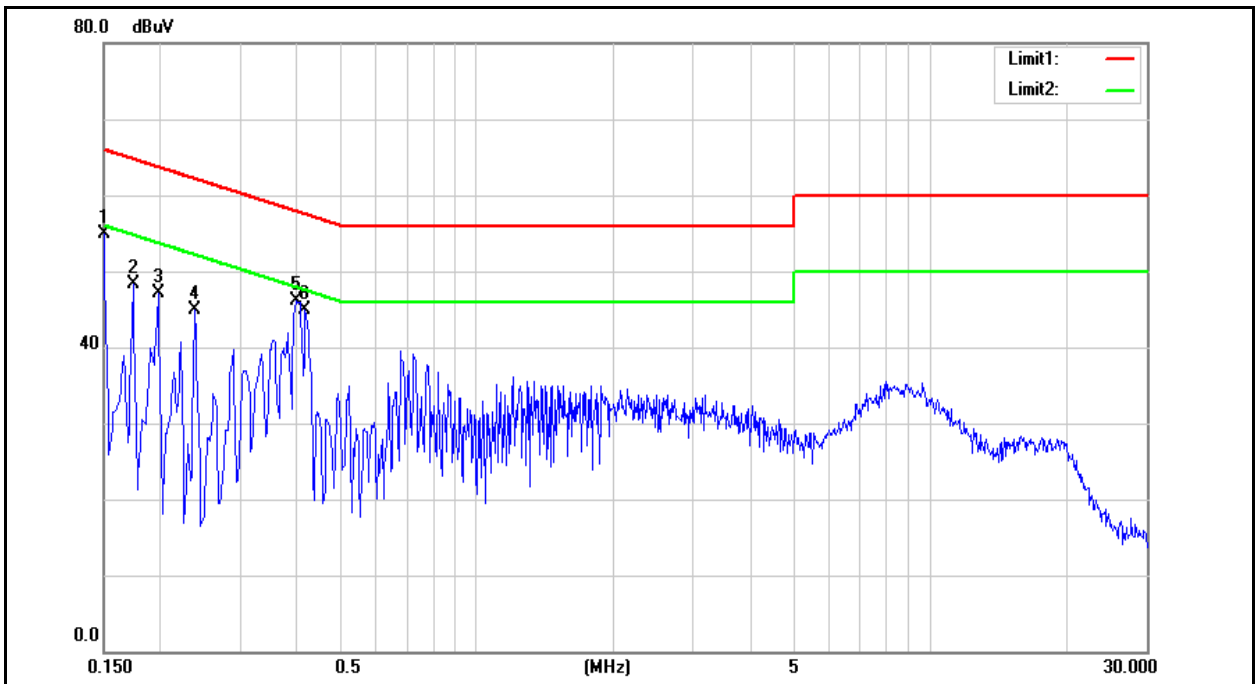


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	38.29	14.20	9.53	47.82	23.73	66.00	56.00	-18.18	-32.27	Pass
2	0.1740	33.39	11.80	9.54	42.93	21.34	64.77	54.77	-21.84	-33.43	Pass
3	0.1980	30.53	10.91	9.53	40.06	20.44	63.69	53.69	-23.63	-33.25	Pass
4	0.2380	27.73	9.36	9.53	37.26	18.89	62.17	52.17	-24.91	-33.28	Pass
5	0.3980	35.11	26.70	9.54	44.65	36.24	57.90	47.90	-13.25	-11.66	Pass
6	0.4180	33.67	24.99	9.54	43.21	34.53	57.49	47.49	-14.28	-12.96	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15.247	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Line:	N		
Description:			

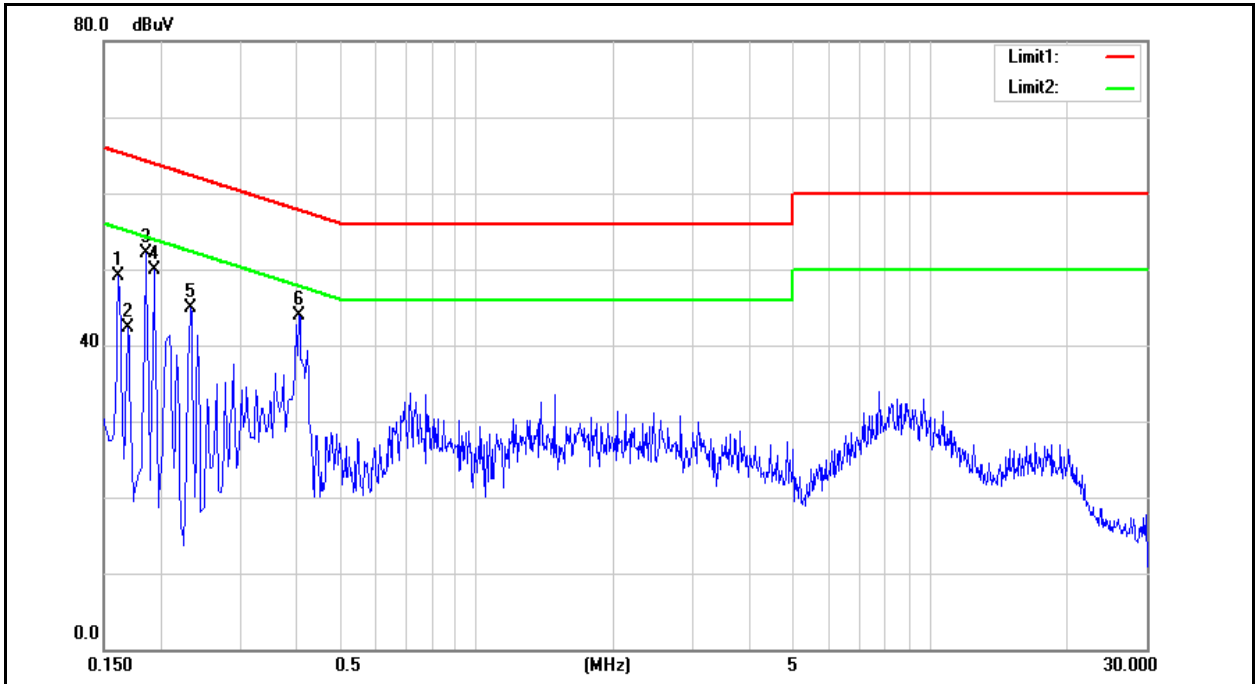

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	36.71	16.90	9.63	46.34	26.53	65.36	55.36	-19.02	-28.83	Pass
2	0.1700	35.06	11.93	9.63	44.69	21.56	64.96	54.96	-20.27	-33.40	Pass
3	0.1860	34.16	14.40	9.63	43.79	24.03	64.21	54.21	-20.42	-30.18	Pass
4	0.1940	32.18	9.18	9.63	41.81	18.81	63.86	53.86	-22.05	-35.05	Pass
5	0.2340	27.84	8.81	9.63	37.47	18.44	62.31	52.31	-24.84	-33.87	Pass
6	0.4060	29.63	20.79	9.64	39.27	30.43	57.73	47.73	-18.46	-17.30	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	1	2412.0	19.63	0.092	21.70	0.148	< 30
		2437.0	19.57	0.091	21.92	0.156	< 30
		2462.0	19.17	0.083	21.55	0.143	< 30
	2	2437.0	19.52	0.090	21.85	0.153	< 30
	5.5	2437.0	19.47	0.089	21.78	0.151	< 30
	11	2437.0	19.44	0.088	21.71	0.148	< 30
Mode 3	6	2412.0	15.71	0.037	23.83	0.242	< 30
		2437.0	15.83	0.038	23.71	0.235	< 30
		2462.0	15.95	0.039	23.95	0.248	< 30
	9	2437.0	15.80	0.038	23.66	0.232	< 30
	12	2437.0	15.75	0.038	23.62	0.230	< 30
	18	2437.0	15.71	0.037	23.58	0.228	< 30
	24	2437.0	15.67	0.037	23.52	0.225	< 30
	36	2437.0	15.63	0.037	23.47	0.222	< 30
	48	2437.0	15.60	0.036	23.42	0.220	< 30
	54	2437.0	15.55	0.036	23.40	0.219	< 30

Note: The relevant measured result has the offset with cable loss already.



Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 4	6.5M	2412.0	15.53	0.036	23.48	0.223	< 30
		2437.0	15.79	0.038	23.57	0.228	< 30
		2462.0	15.94	0.039	23.64	0.231	< 30
	14.4M	2437.0	15.75	0.038	23.51	0.224	< 30
	21.7M	2437.0	15.72	0.037	23.46	0.222	< 30
	28.9M	2437.0	15.67	0.037	23.43	0.220	< 30
	43.3M	2437.0	15.62	0.036	23.39	0.218	< 30
	57.8M	2437.0	15.59	0.036	23.35	0.216	< 30
	65M	2437.0	15.55	0.036	23.30	0.214	< 30
72.2M	2437.0	15.50	0.035	23.27	0.212	< 30	
Mode 5	13.5M	2422.0	15.71	0.037	23.89	0.245	< 30
		2437.0	15.32	0.034	23.43	0.220	< 30
		2452.0	15.27	0.034	23.48	0.223	< 30
	30M	2437.0	15.28	0.034	23.40	0.219	< 30
	45M	2437.0	15.24	0.033	23.35	0.216	< 30
	60M	2437.0	15.21	0.033	23.31	0.214	< 30
	90M	2437.0	15.17	0.033	23.25	0.211	< 30
	120M	2437.0	15.12	0.033	23.18	0.208	< 30
	135M	2437.0	15.09	0.032	23.13	0.206	< 30
150M	2437.0	15.04	0.032	23.08	0.203	< 30	

Note: The relevant measured result has the offset with cable loss already.

**6dB RF Bandwidth Measurement**

Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 2	2412.0	10050	> 500
	2437.0	9109	> 500
	2462.0	10050	> 500
Mode 3	2412.0	16590	> 500
	2437.0	16580	> 500
	2462.0	16590	> 500
Mode 4	2412.0	17760	> 500
	2437.0	17800	> 500
	2462.0	17790	> 500
Mode 5	2422.0	36500	> 500
	2437.0	36500	> 500
	2452.0	36510	> 500



■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX Mode	
CH01	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.508 MHz Total Power 25.8 dBm</p> <p>Transmit Freq Error -75.847 kHz OBW Power 99.00 % x dB Bandwidth 10.05 MHz x dB -6.00 dB</p> <p>File <BBB.png> saved</p>
CH06	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.624 MHz Total Power 26.1 dBm</p> <p>Transmit Freq Error -92.153 kHz OBW Power 99.00 % x dB Bandwidth 9.109 MHz x dB -6.00 dB</p> <p>File <BBB.png> saved</p>
CH11	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.657 MHz Total Power 26.0 dBm</p> <p>Transmit Freq Error -113.82 kHz OBW Power 99.00 % x dB Bandwidth 10.05 MHz x dB -6.00 dB</p> <p>File <BBB.png> saved</p>



Mode 3: IEEE 802.11g Continuous TX Mode	
CH01	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.480 MHz Total Power: 21.2 dBm</p> <p>Transmit Freq Error: -57.030 kHz OBW Power: 99.00 % x dB Bandwidth: 16.59 MHz x dB: -6.00 dB</p> <p>Frequency: 2.41200000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
CH06	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.492 MHz Total Power: 22.2 dBm</p> <p>Transmit Freq Error: -52.057 kHz OBW Power: 99.00 % x dB Bandwidth: 16.58 MHz x dB: -6.00 dB</p> <p>Frequency: 2.437000000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
CH11	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Gain: 1.00 #Att: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.494 MHz Total Power: 22.4 dBm</p> <p>Transmit Freq Error: -50.127 kHz OBW Power: 99.00 % x dB Bandwidth: 16.59 MHz x dB: -6.00 dB</p> <p>Frequency: 2.462000000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>



Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode	
CH01	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Gain: 1.0 #Att: 20 dB</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.671 MHz Total Power: 21.8 dBm</p> <p>Transmit Freq Error: -35.623 kHz OBW Power: 99.00 % x dB Bandwidth: 17.76 MHz x dB: -6.00 dB</p> <p>Frequency: 2.41200000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
CH06	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Gain: 1.0 #Att: 20 dB</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.702 MHz Total Power: 22.6 dBm</p> <p>Transmit Freq Error: -34.891 kHz OBW Power: 99.00 % x dB Bandwidth: 17.80 MHz x dB: -6.00 dB</p> <p>Frequency: 2.437000000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
CH11	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Gain: 1.0 #Att: 20 dB</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.691 MHz Total Power: 22.1 dBm</p> <p>Transmit Freq Error: -41.738 kHz OBW Power: 99.00 % x dB Bandwidth: 17.79 MHz x dB: -6.00 dB</p> <p>Frequency: 2.462000000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>






Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX Mode	
CH03	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 36.185 MHz Total Power 22.6 dBm</p> <p>Transmit Freq Error -60.556 kHz OBW Power 99.00 % x dB Bandwidth 36.50 MHz x dB -6.00 dB</p> <p>Frequency: 2.42200000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>
CH06	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 36.142 MHz Total Power 22.2 dBm</p> <p>Transmit Freq Error -59.981 kHz OBW Power 99.00 % x dB Bandwidth 36.50 MHz x dB -6.00 dB</p> <p>Frequency: 2.43700000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>
CH09	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 11.2 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 36.144 MHz Total Power 21.7 dBm</p> <p>Transmit Freq Error -49.209 kHz OBW Power 99.00 % x dB Bandwidth 36.51 MHz x dB -6.00 dB</p> <p>Frequency: 2.45200000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>

**Maximum Power Spectral Density Measurement**

Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)	Limit (dBm/3KHz)
Mode 2	2412.0	-11.385	< 8
	2437.0	-10.721	< 8
	2462.0	-11.061	< 8
Mode 3	2412.0	-13.095	< 8
	2437.0	-12.597	< 8
	2462.0	-11.851	< 8
Mode 4	2412.0	-12.082	< 8
	2437.0	-11.202	< 8
	2462.0	-11.419	< 8
Mode 5	2422.0	-13.202	< 8
	2437.0	-13.543	< 8
	2452.0	-12.838	< 8




■ Test Graphs

Mode 2: IEEE 802.11b Continuous TX Mode	
CH01	
CH06	
CH11	

Mode 3: IEEE 802.11g Continuous TX Mode	
CH01	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 10.00 dBm</p> <p>Mkr1 2.411 025 GHz -13.095 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 25.00 MHz Sweep 2.636 s (1001 pts)</p> <p>File <BBB.png> saved</p>
CH06	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 10.00 dBm</p> <p>Mkr1 2.440 400 GHz -12.597 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 25.00 MHz Sweep 2.636 s (1001 pts)</p> <p>File <BBB.png> saved</p>
CH11	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.2 dB Ref 10.00 dBm</p> <p>Mkr1 2.457 575 GHz -11.851 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 25.00 MHz Sweep 2.636 s (1001 pts)</p> <p>File <BBB.png> saved</p>

Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX Mode	
<p>CH01</p>	
<p>CH06</p>	
<p>CH11</p>	



Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX Mode	
CH03	
CH06	
CH09	



Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2: IEEE 802.11b Continuous TX mode	
2412 MHz	
2437 MHz	
2462 MHz	



Mode 3: IEEE 802.11g Continuous TX mode

2412 MHz



2437 MHz



2462 MHz





Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode

2412 MHz



2437 MHz



2462 MHz





Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode

2422 MHz



2437 MHz



2452 MHz





Out of Band Conducted Emissions


Mode 2: IEEE 802.11b Continuous TX mode

<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Sweep SA Ref Offset 11.2 dB Ref 20.00 dBm Mkr1 2.412 0 GHz 8.725 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts) MFR MODE: TRIG SOL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 2 N 1 f 2.412 0 GHz 8.725 dBm 3 4 5 6 7 8 9 10 11</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Sweep SA Ref Offset 11.2 dB Ref 20.00 dBm Mkr1 2.437 0 GHz 8.732 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts) MFR MODE: TRIG SOL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 2 N 1 f 2.437 0 GHz 8.732 dBm 3 4 5 6 7 8 9 10 11</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Sweep SA Ref Offset 11.2 dB Ref 20.00 dBm Mkr1 2.462 0 GHz 8.363 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts) MFR MODE: TRIG SOL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 2 N 1 f 2.462 0 GHz 8.363 dBm 3 4 5 6 7 8 9 10 11</p>




Mode 3: IEEE 802.11g Continuous TX mode


2412 MHz

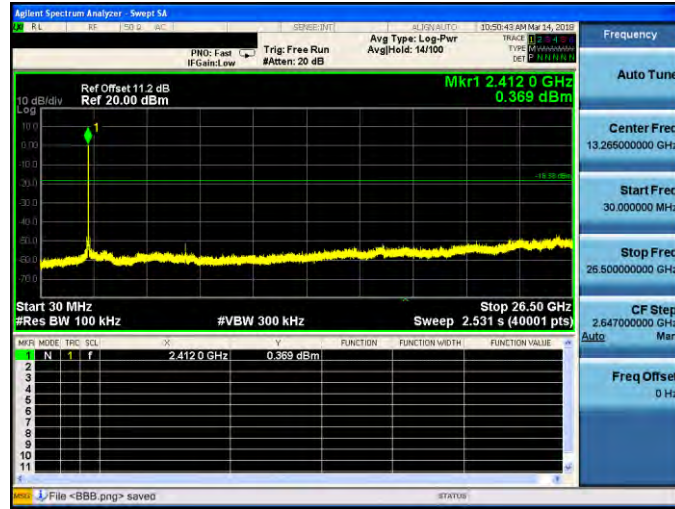

2437 MHz

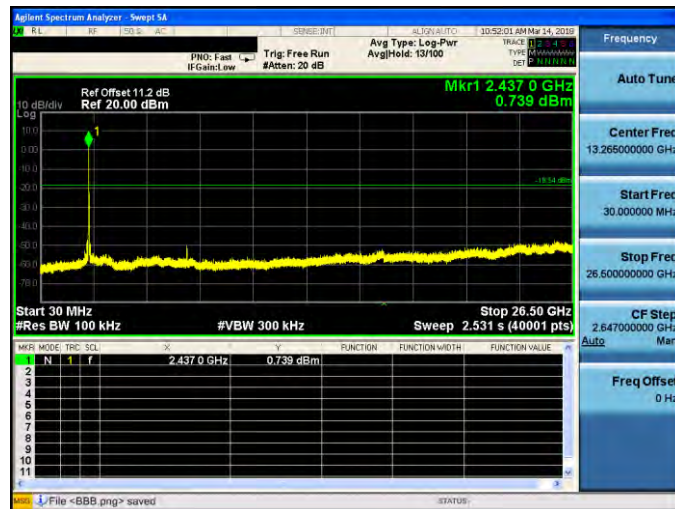


2462 MHz

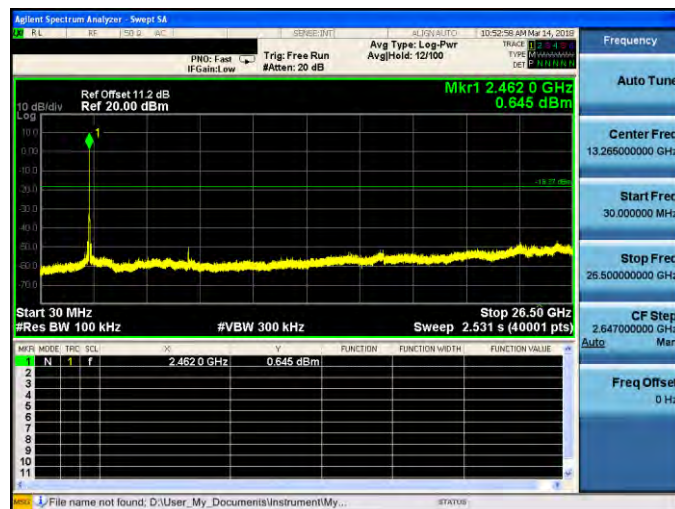




Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode


2412 MHz

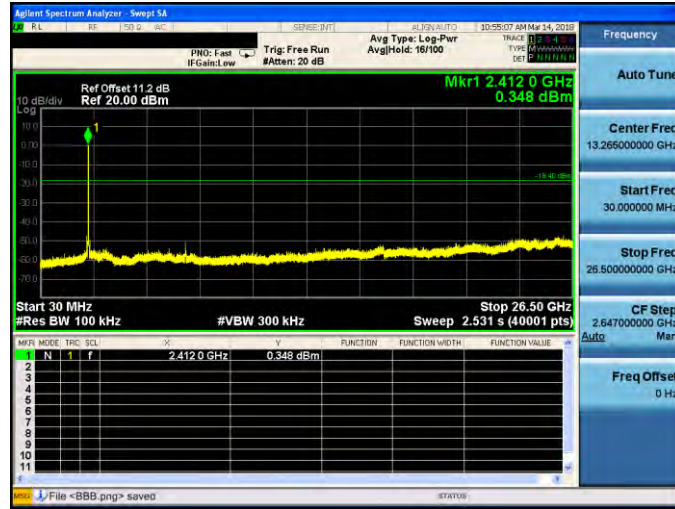

2437 MHz

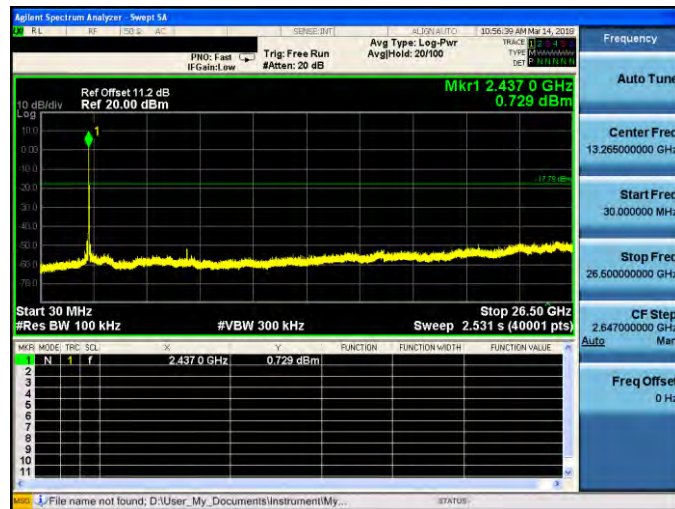


2462 MHz

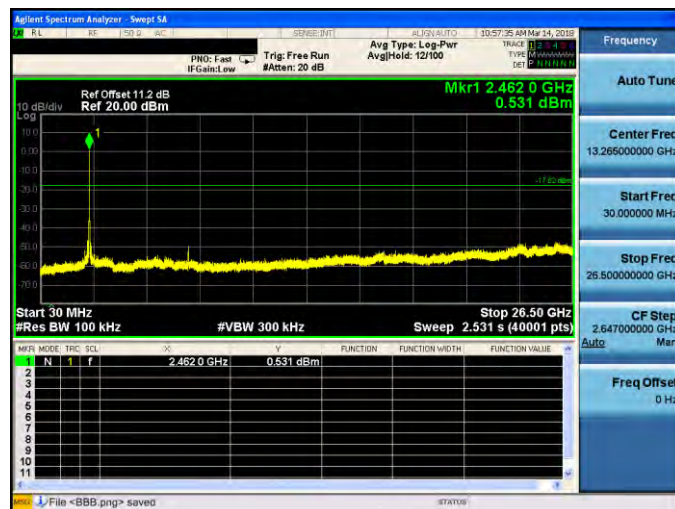




Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode


2422 MHz

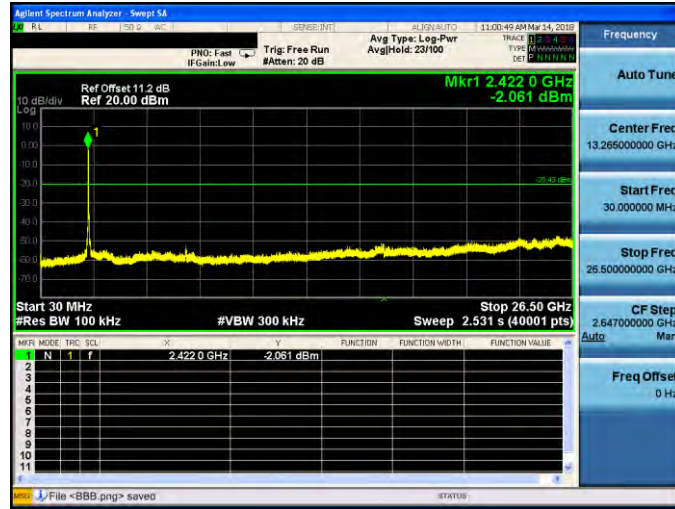

2437 MHz

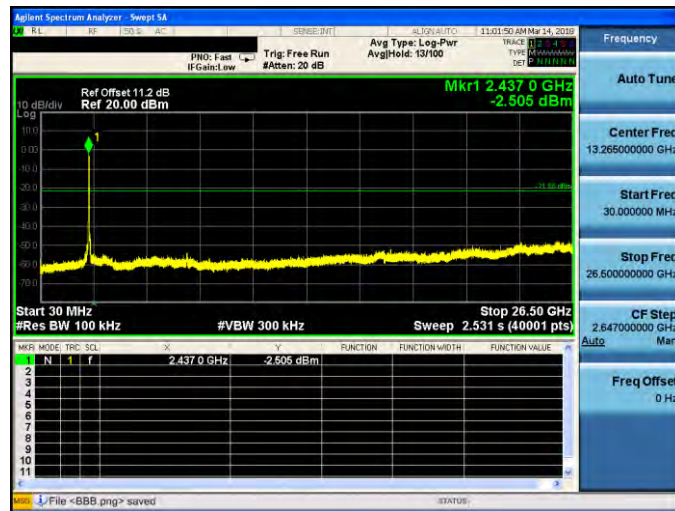


2452 MHz

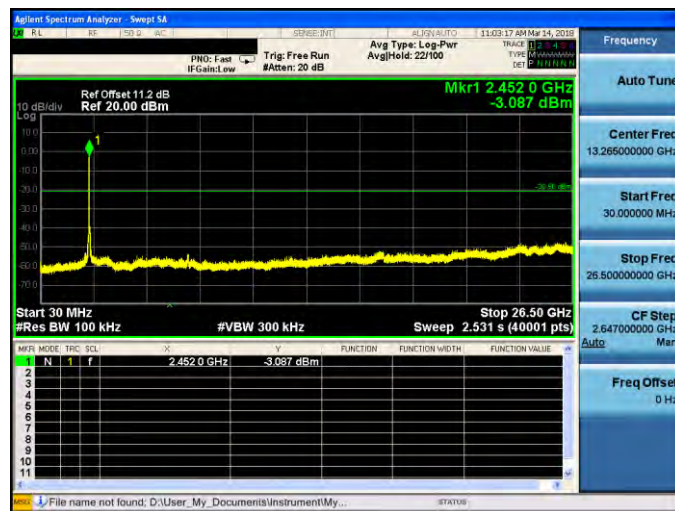


Conducted Band Edge

Mode 2: IEEE 802.11b Continuous TX mode

2412 MHz

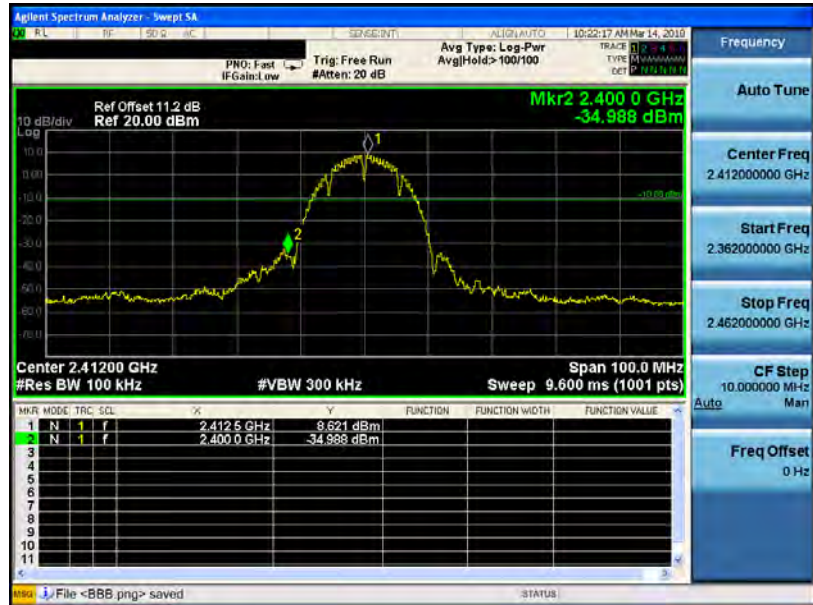


2462 MHz

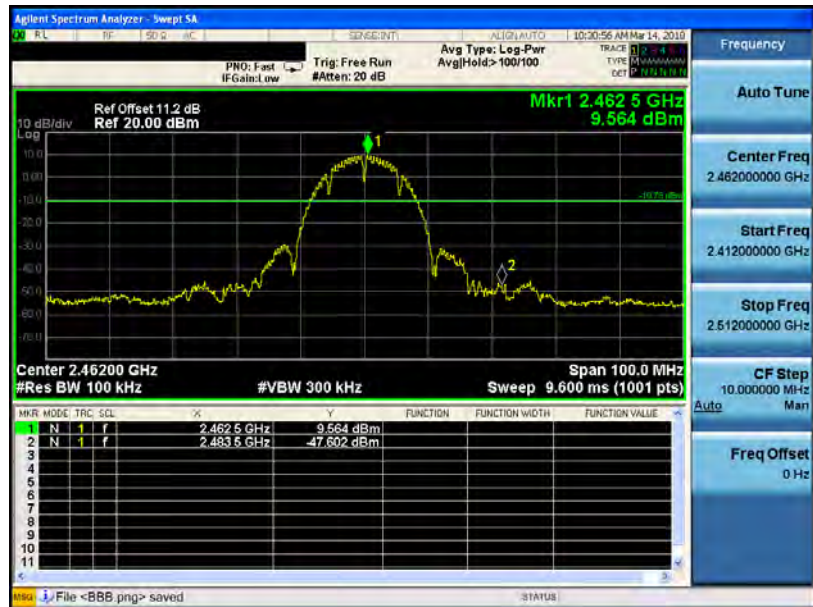


Mode 3: IEEE 802.11g Continuous TX mode

2412 MHz

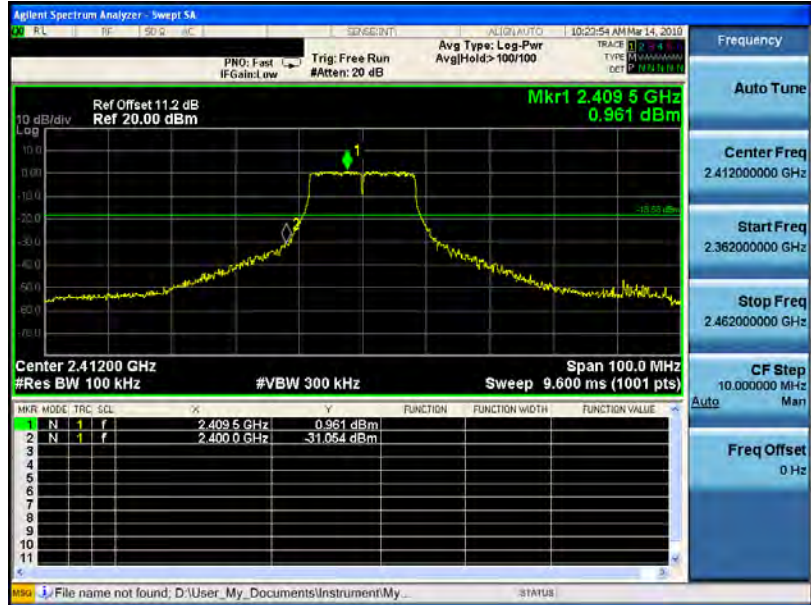


2462 MHz

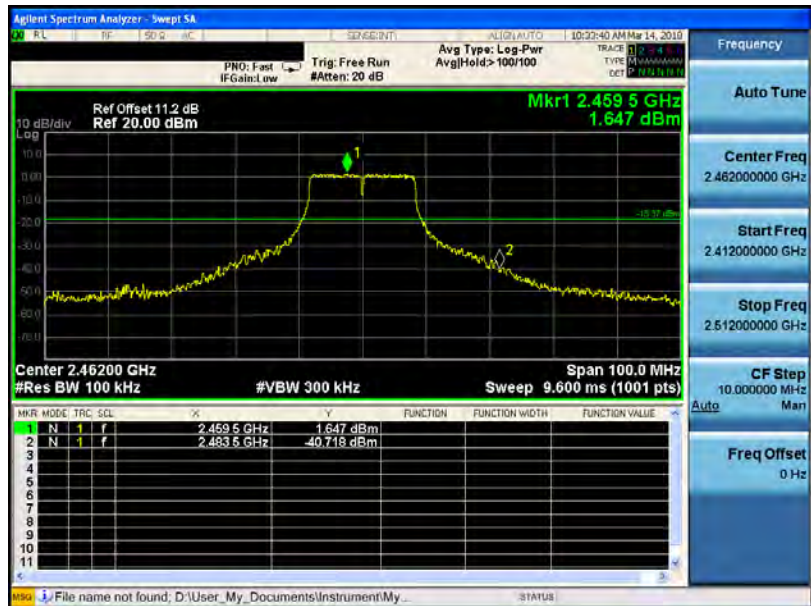


Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode

2412 MHz

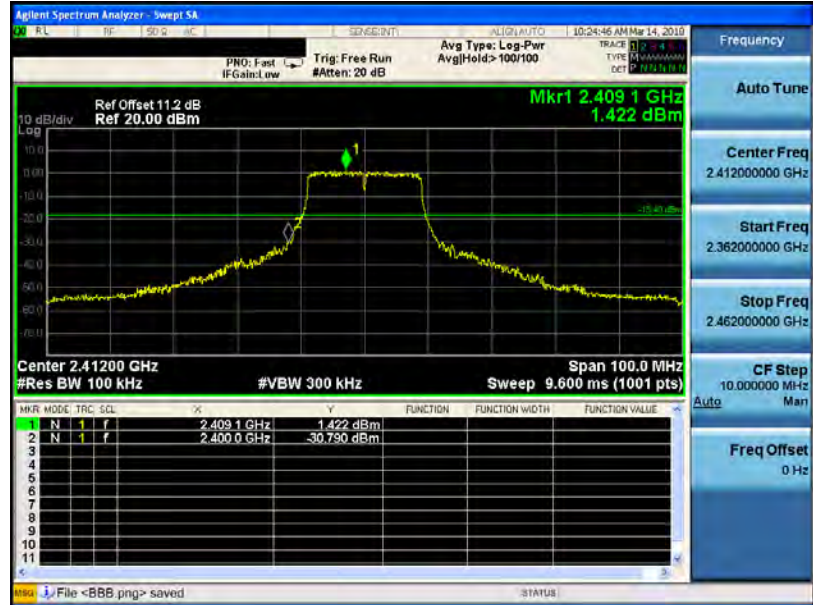


2462 MHz

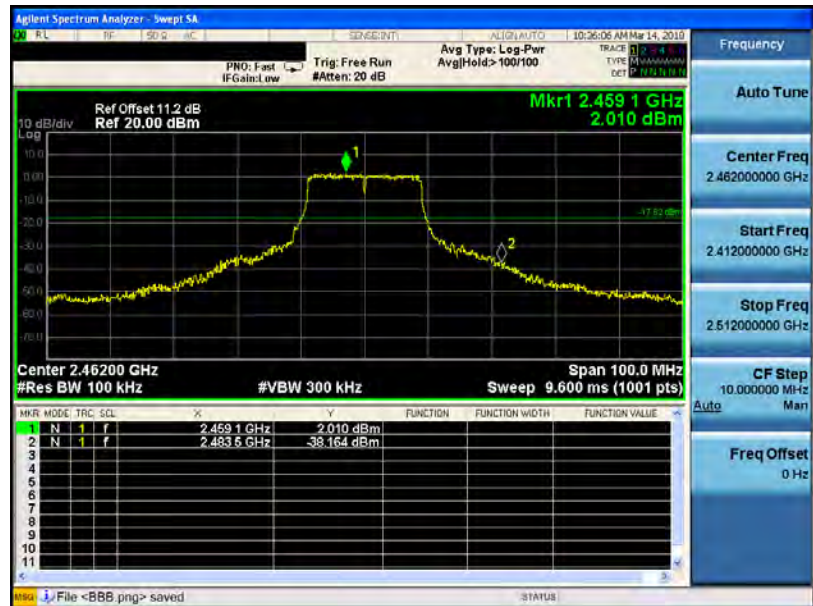




Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode

2422 MHz

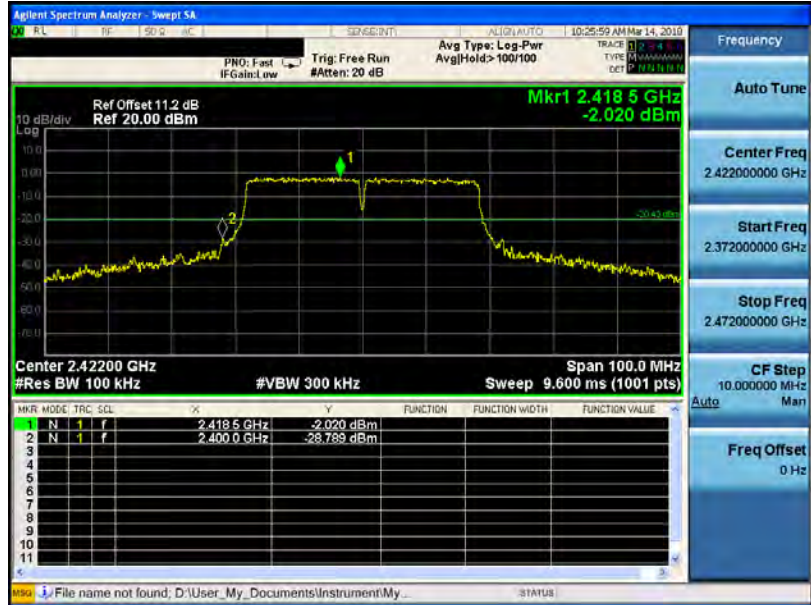

2452 MHz

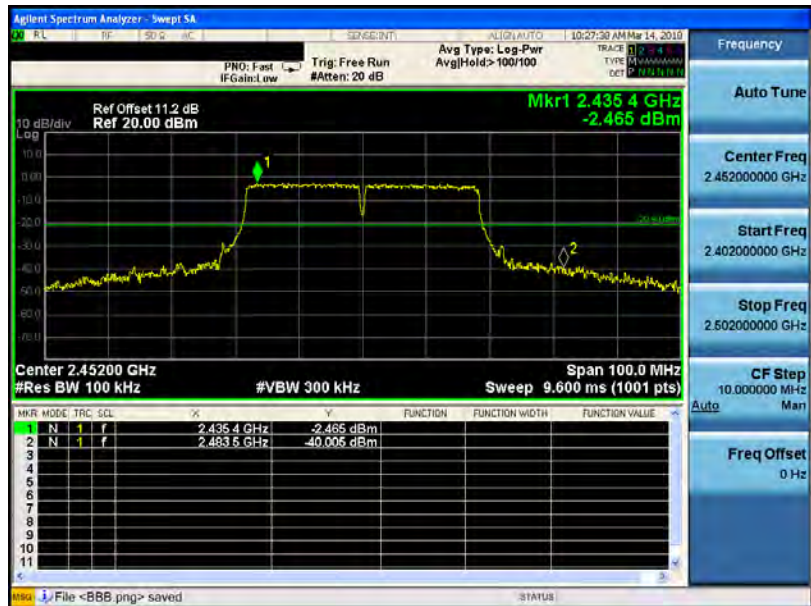



Annex C. Radiated Emission Test Results

Harmonic

Below 1GHz


Standard:		FCC Part 15.247		Test Distance:		3m	
Test item:		Harmonic		Power:		AC 120V/60Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
243.4000	32.18	-5.38	26.80	46.00	-19.20	QP	H
328.7600	33.00	-2.65	30.35	46.00	-15.65	QP	H
391.8100	31.32	-1.33	29.99	46.00	-16.01	QP	H
513.0600	29.97	0.91	30.88	46.00	-15.12	QP	H
688.6300	26.43	4.39	30.82	46.00	-15.18	QP	H
786.6000	25.72	6.33	32.05	46.00	-13.95	QP	H
120.2100	32.63	-7.90	24.73	43.50	-18.77	QP	V
224.9700	31.60	-6.47	25.13	46.00	-20.87	QP	V
390.8400	33.21	-1.35	31.86	46.00	-14.14	QP	V
512.0900	28.48	0.89	29.37	46.00	-16.63	QP	V
586.7800	26.38	2.54	28.92	46.00	-17.08	QP	V
662.4400	27.09	3.84	30.93	46.00	-15.07	QP	V

- Note:
1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



Above 1GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

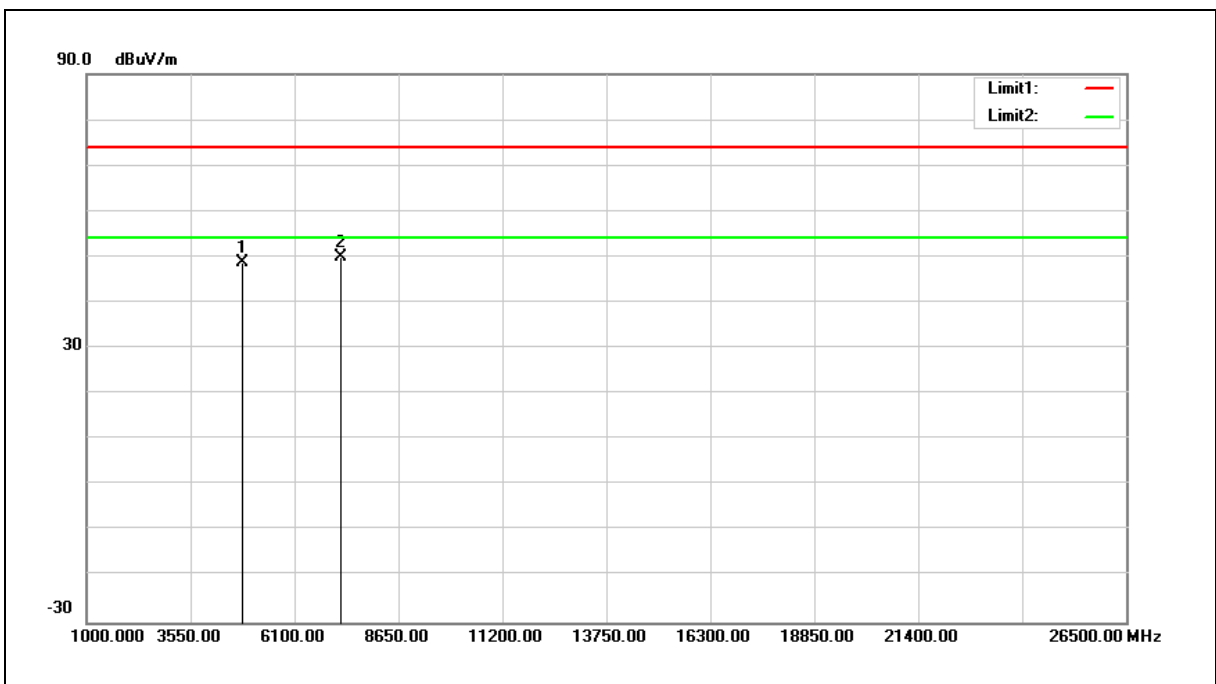

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	43.69	4.99	48.68	74.00	-25.32	peak
2	7236.000	38.66	11.27	49.93	74.00	-24.07	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

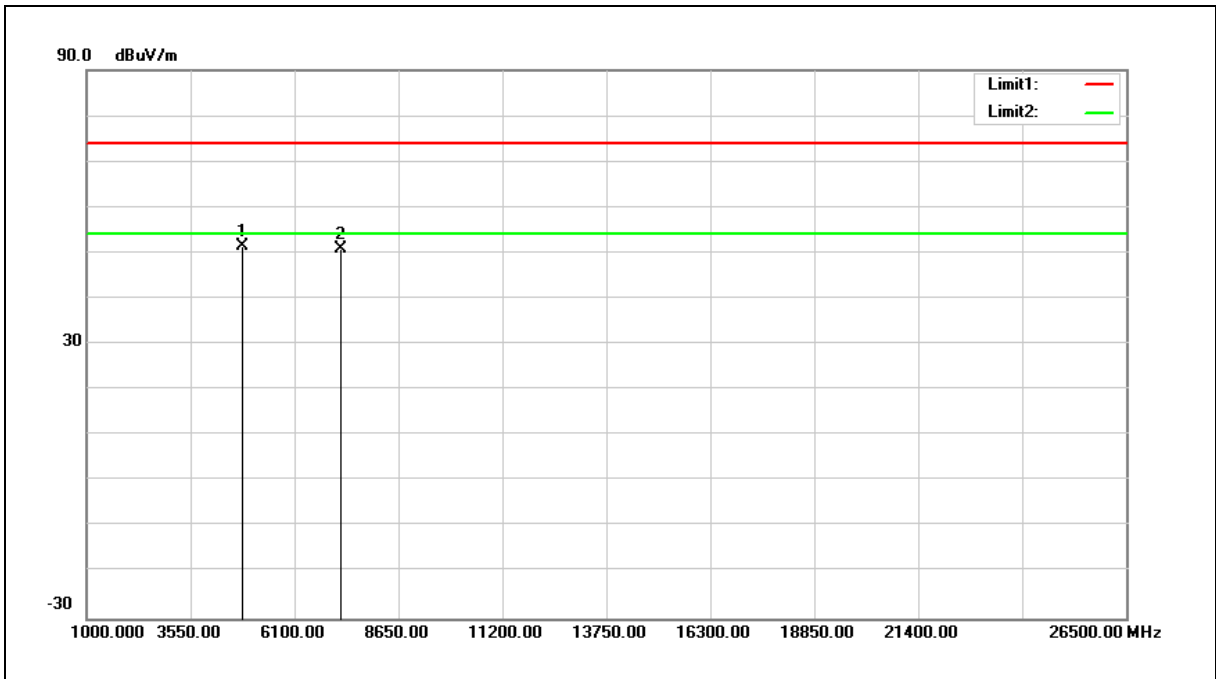


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	46.46	4.99	51.45	74.00	-22.55	peak
2	7236.000	39.66	11.27	50.93	74.00	-23.07	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

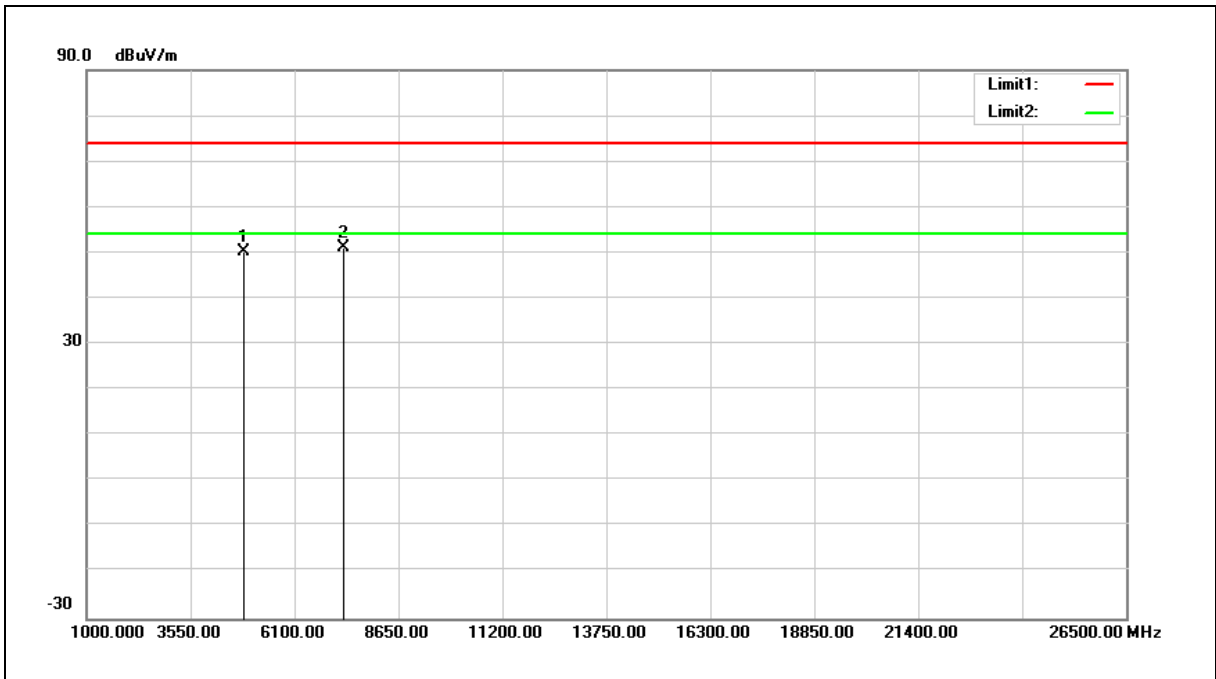


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	45.09	5.15	50.24	74.00	-23.76	peak
2	7311.000	39.74	11.46	51.20	74.00	-22.80	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

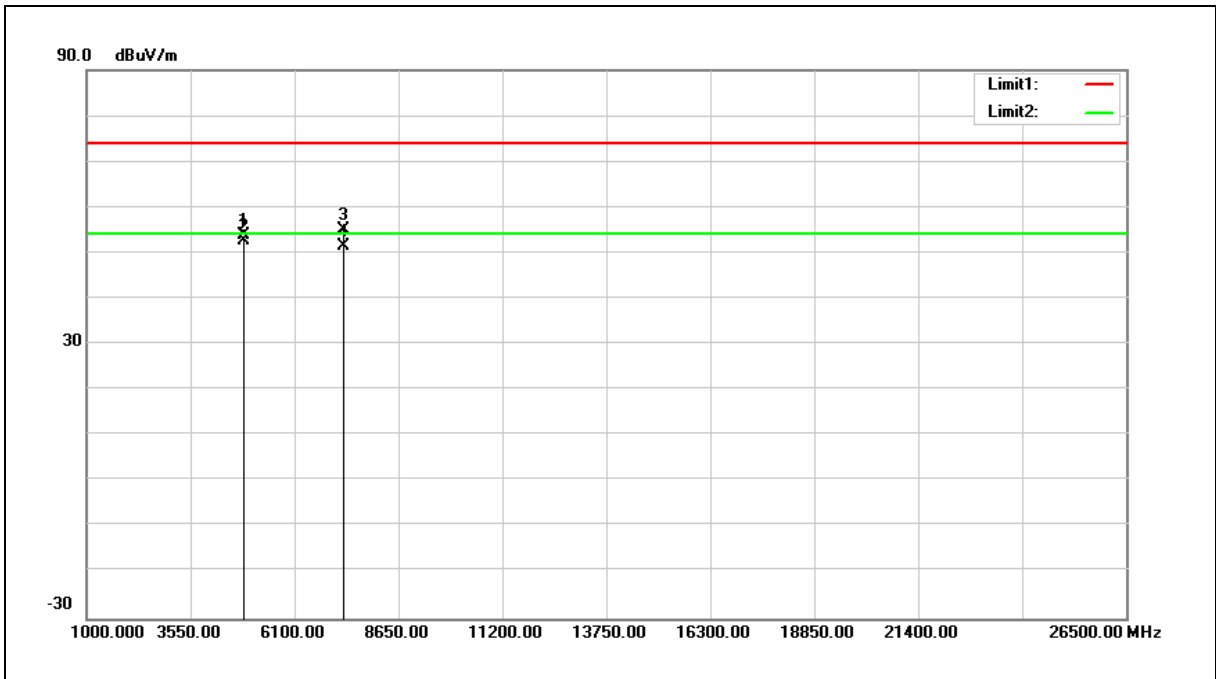

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.81	5.15	53.96	74.00	-20.04	peak
2	4874.000	47.38	5.15	52.53	54.00	-1.47	AVG
3	7311.000	43.50	11.46	54.96	74.00	-19.04	peak
4	7311.000	39.99	11.46	51.45	54.00	-2.55	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

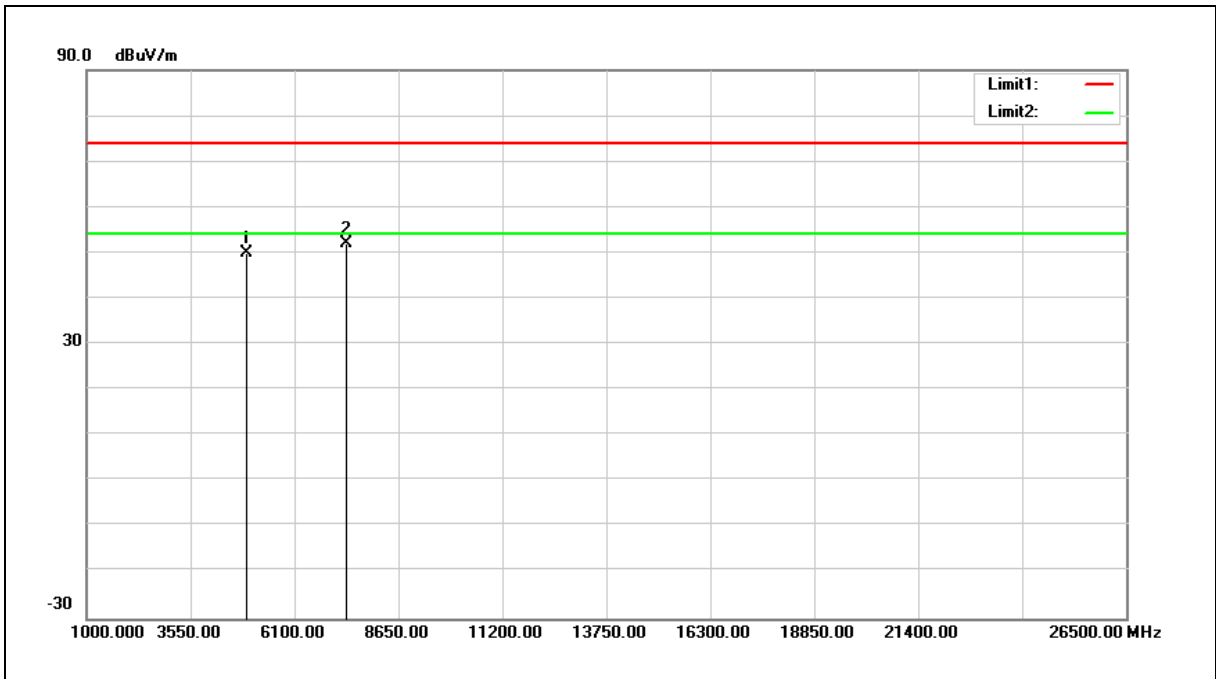

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	44.51	5.31	49.82	74.00	-24.18	peak
2	7386.000	40.29	11.66	51.95	74.00	-22.05	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

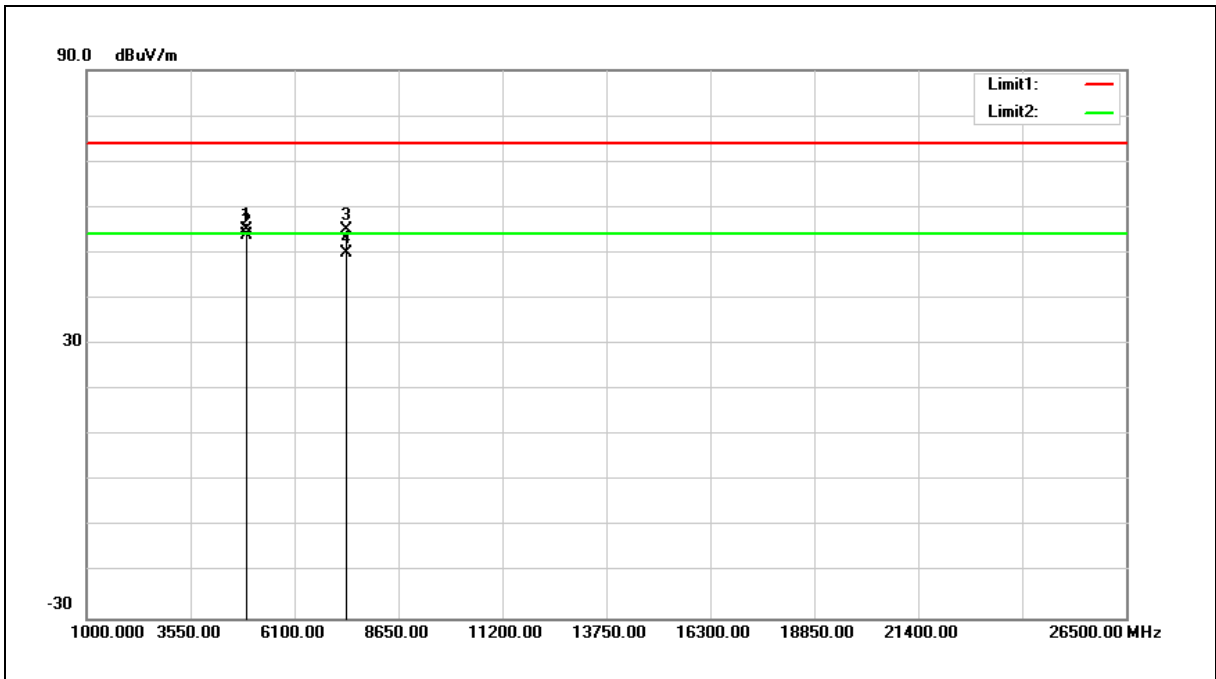

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	49.87	5.31	55.18	74.00	-18.82	peak
2	4924.000	48.58	5.31	53.89	54.00	-0.11	AVG
3	7386.000	43.46	11.66	55.12	74.00	-18.88	peak
4	7386.000	38.30	11.66	49.96	54.00	-4.04	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

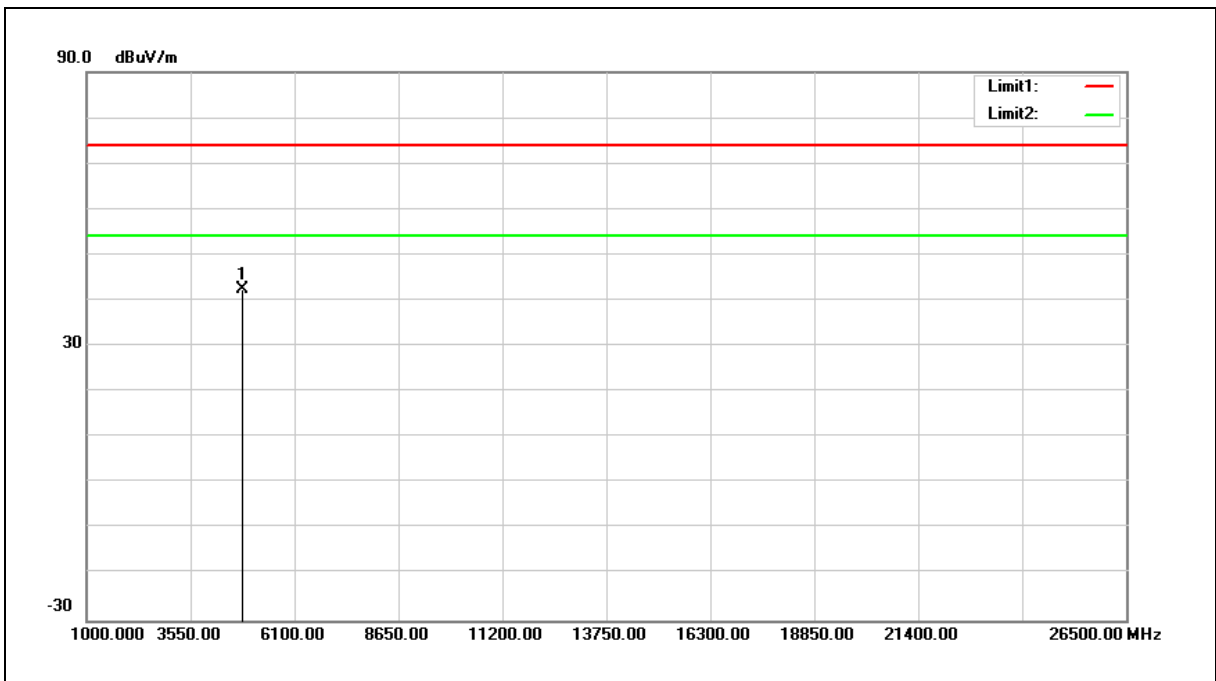

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.50	4.99	42.49	74.00	-31.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

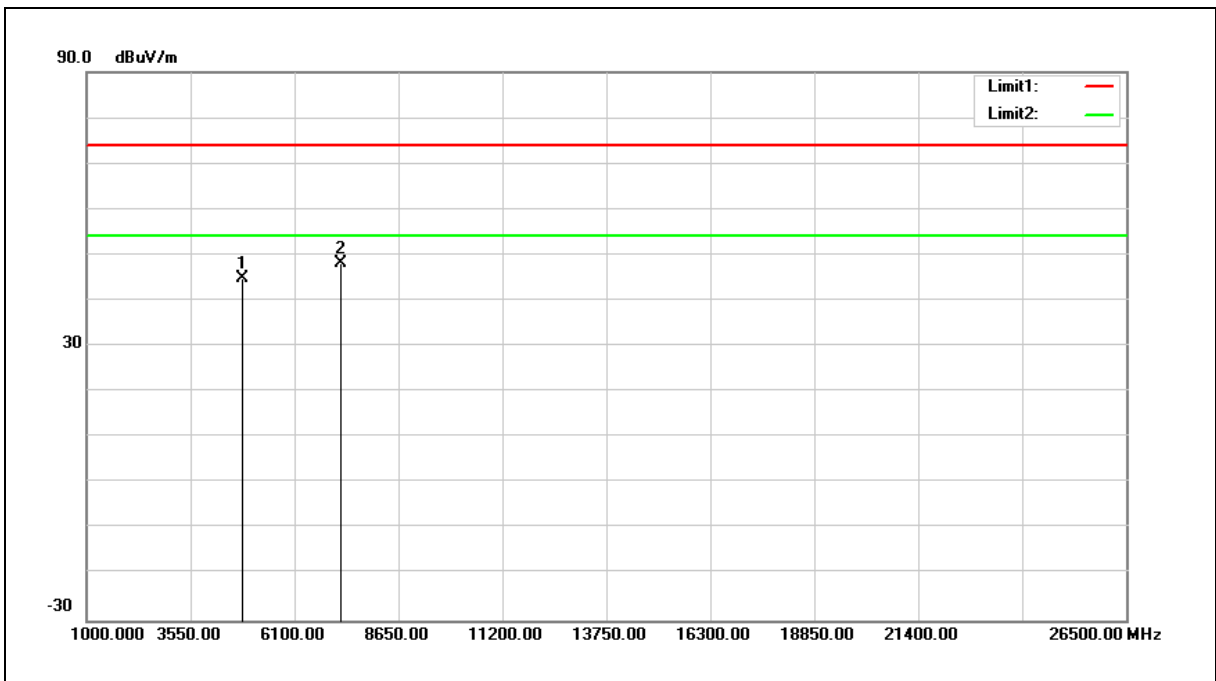

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	39.90	4.99	44.89	74.00	-29.11	peak
2	7236.000	36.77	11.27	48.04	74.00	-25.96	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

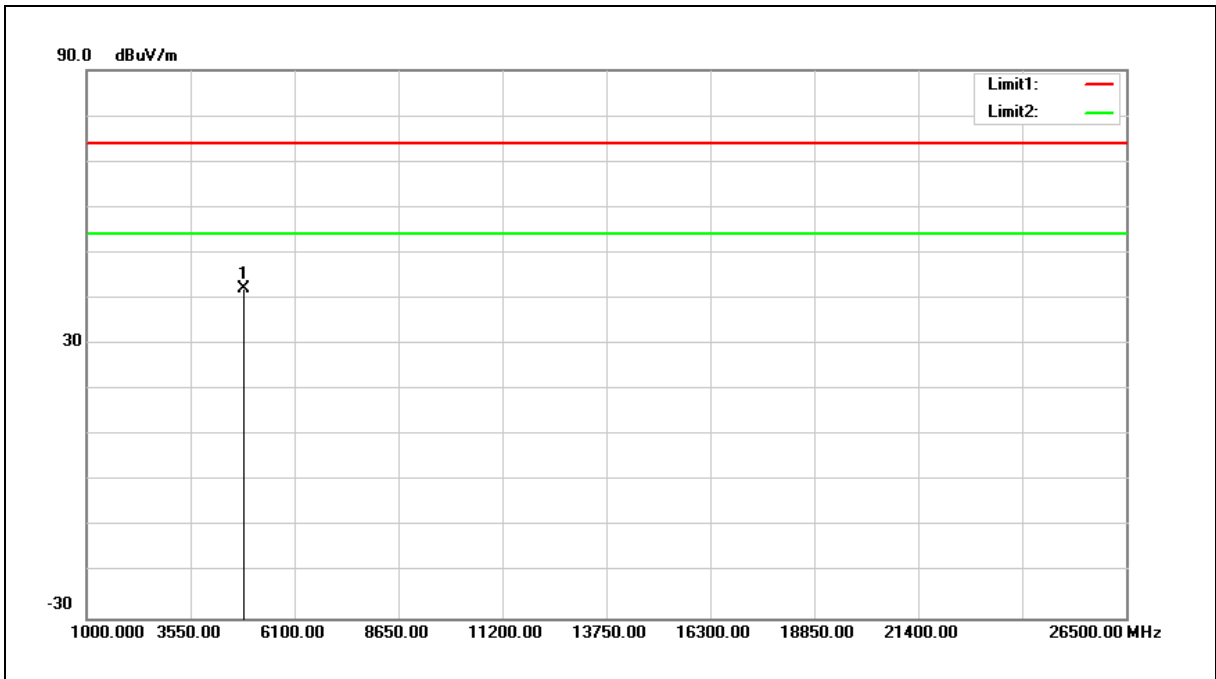

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.04	5.15	42.19	74.00	-31.81	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

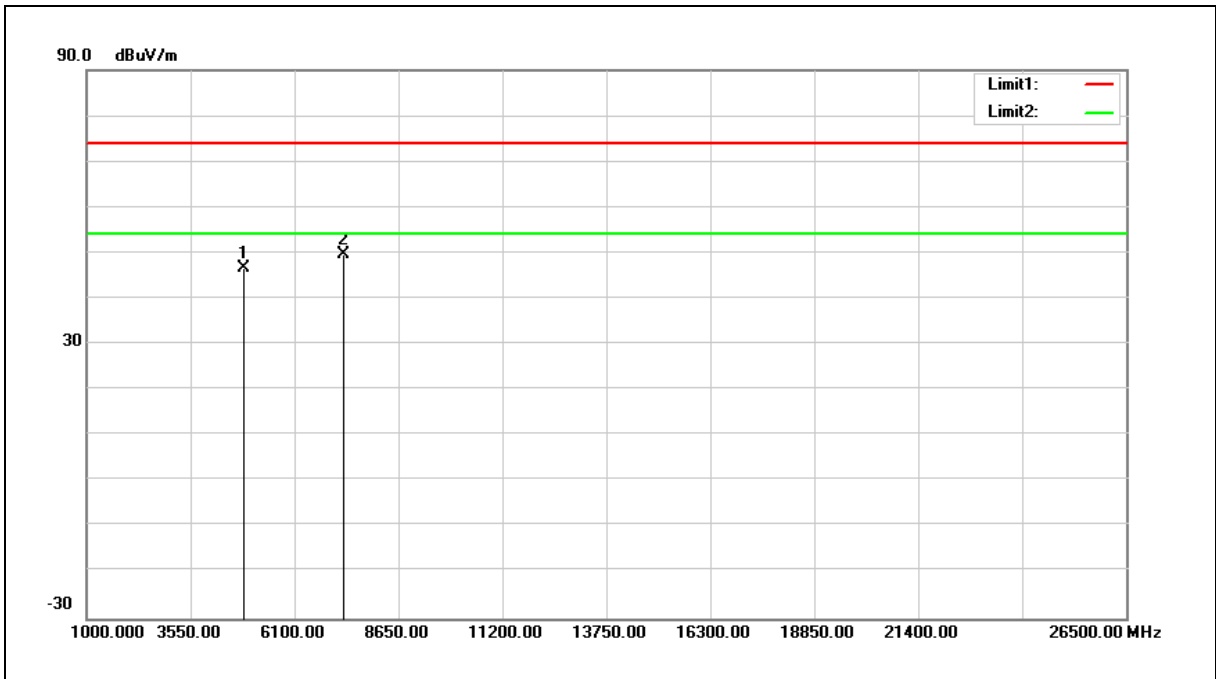

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	41.38	5.15	46.53	74.00	-27.47	peak
2	7311.000	38.26	11.46	49.72	74.00	-24.28	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

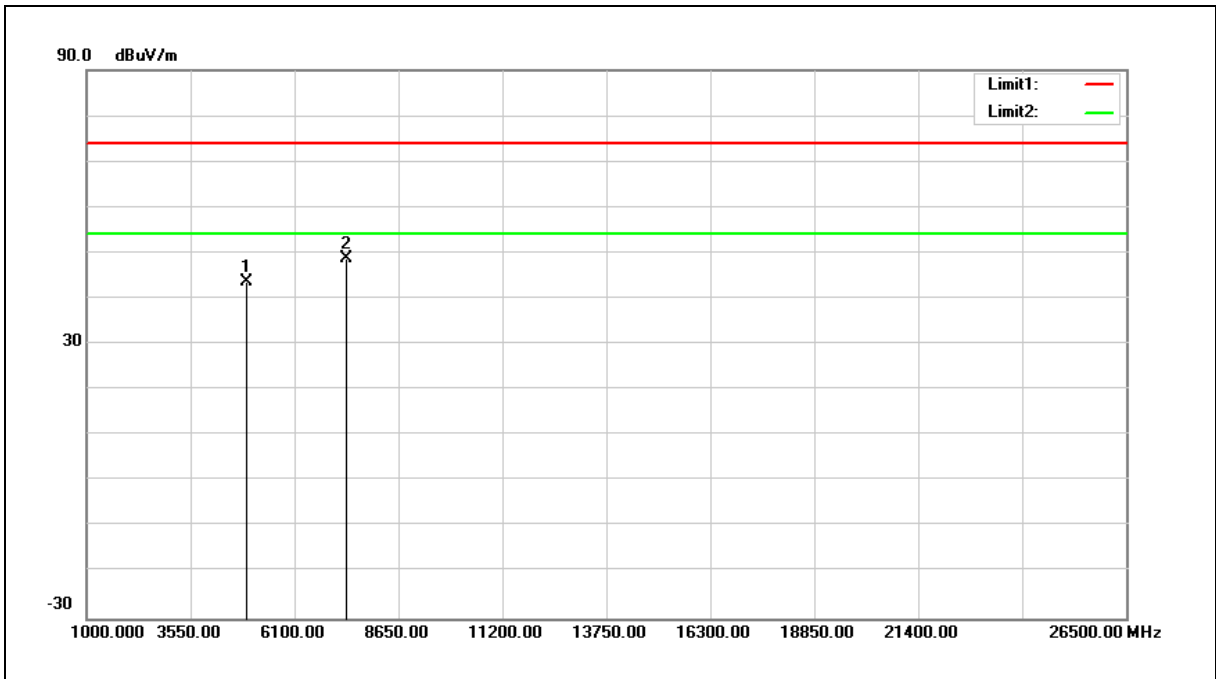

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.28	5.31	43.59	74.00	-30.41	peak
2	7386.000	37.04	11.66	48.70	74.00	-25.30	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

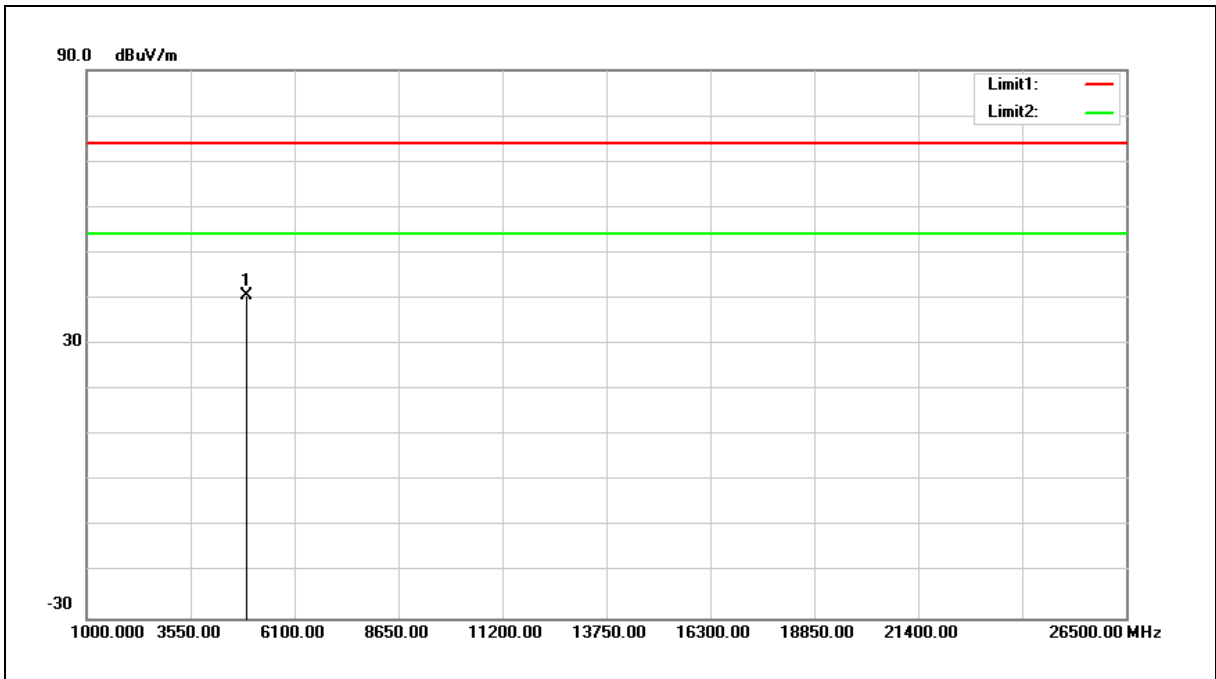

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.41	5.31	40.72	74.00	-33.28	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

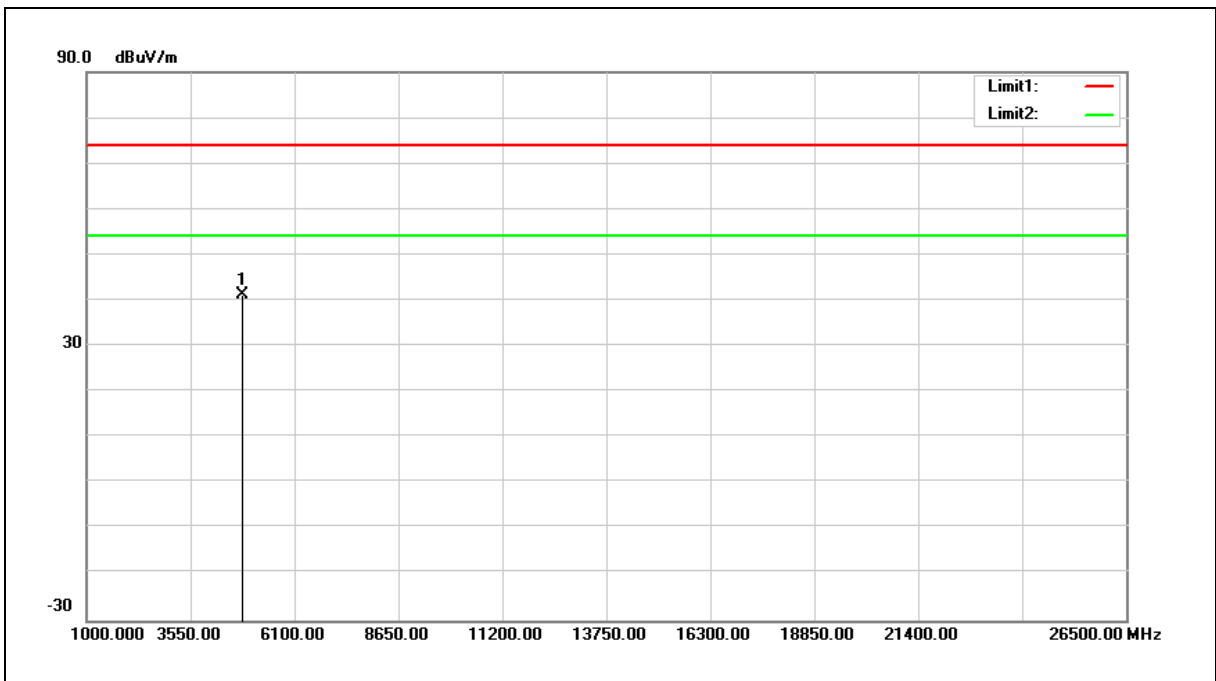

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.39	4.99	41.38	74.00	-32.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

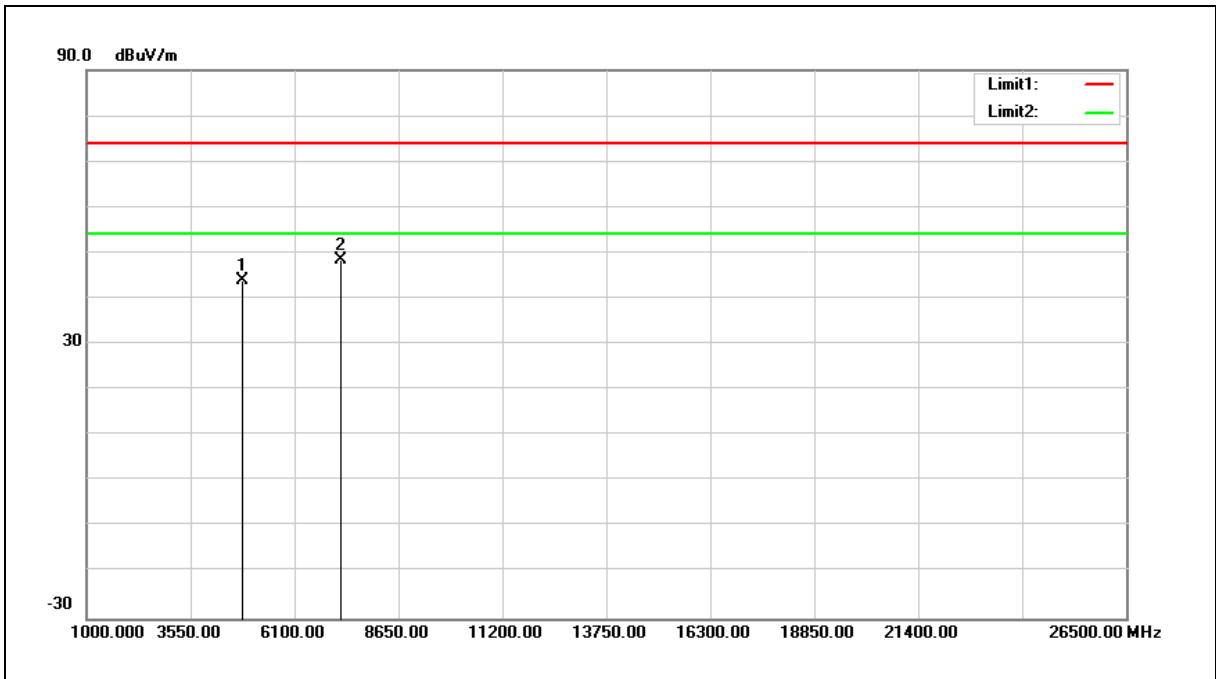

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.91	4.99	43.90	74.00	-30.10	peak
2	7236.000	37.06	11.27	48.33	74.00	-25.67	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

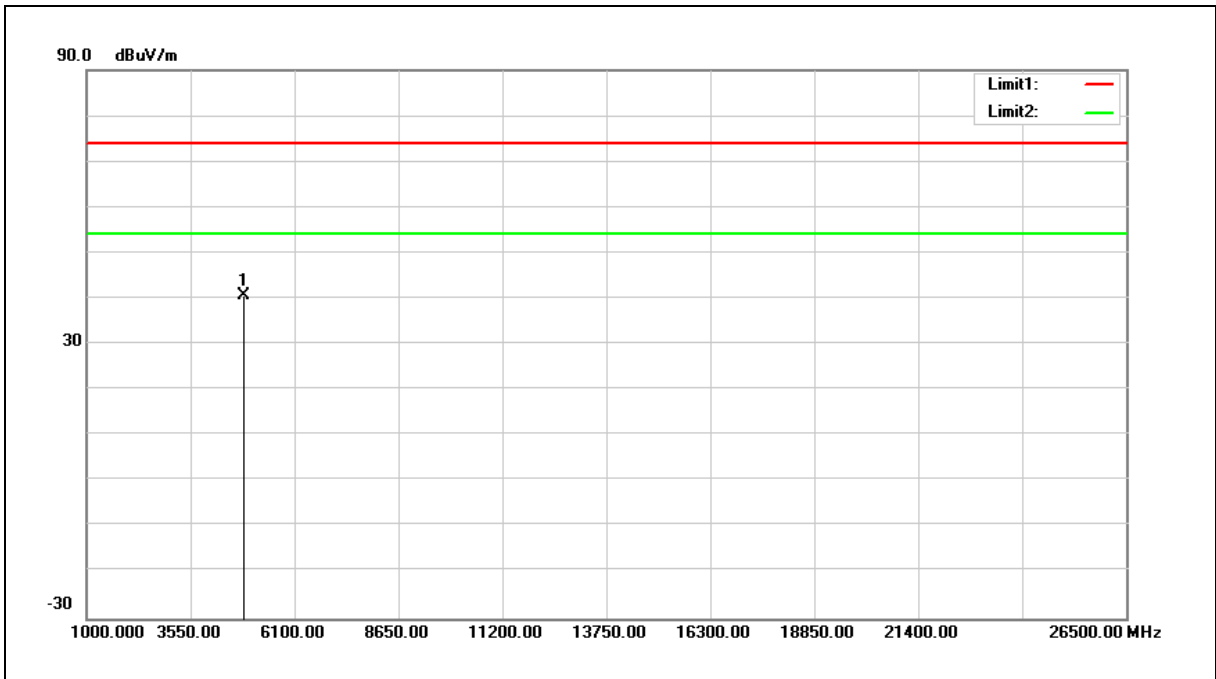

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.58	5.15	40.73	74.00	-33.27	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

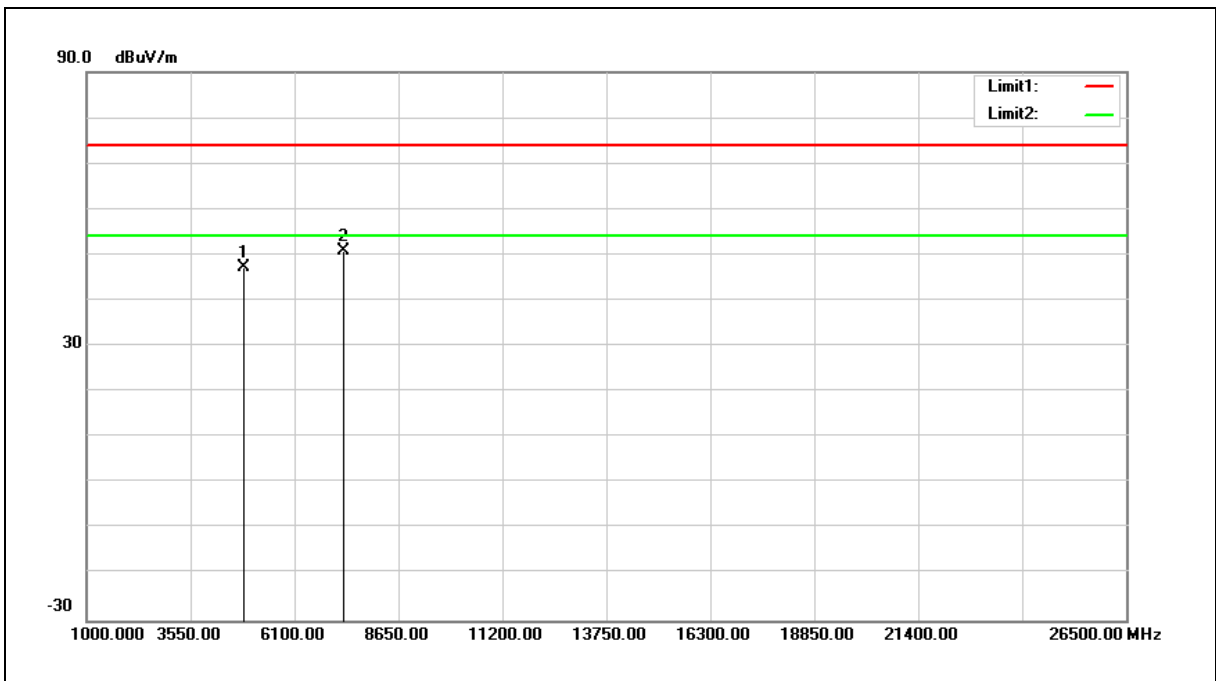


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	42.12	5.15	47.27	74.00	-26.73	peak
2	7311.000	39.30	11.46	50.76	74.00	-23.24	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

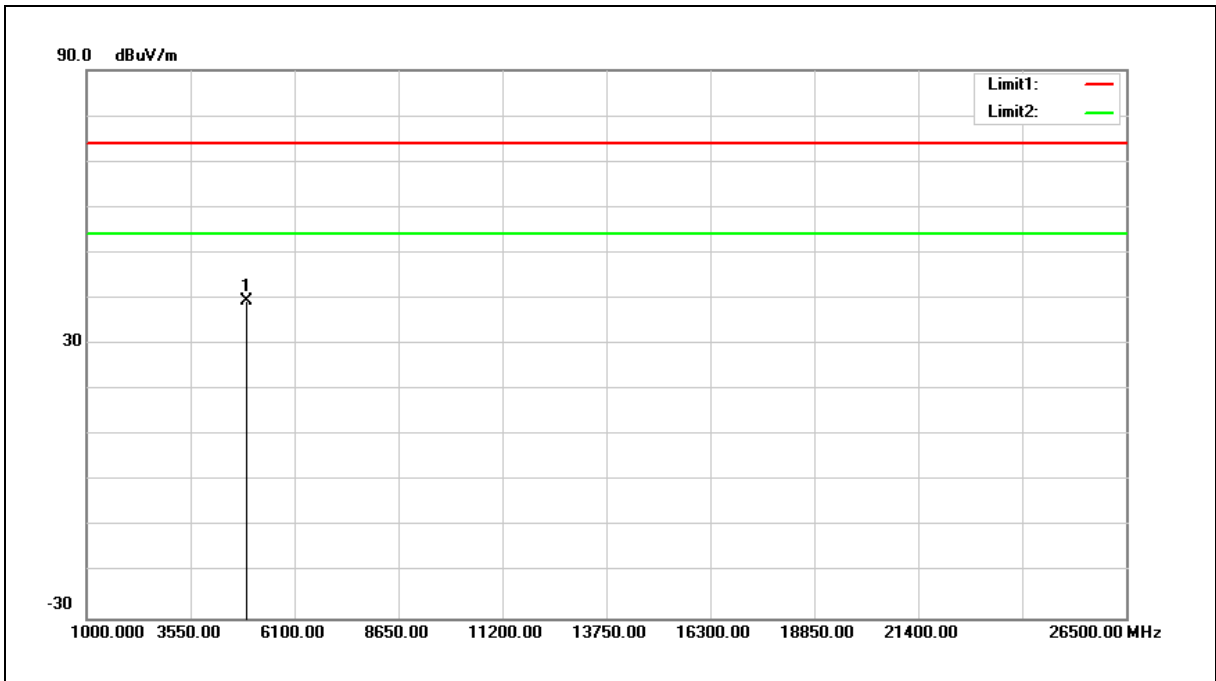

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.03	5.31	39.34	74.00	-34.66	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

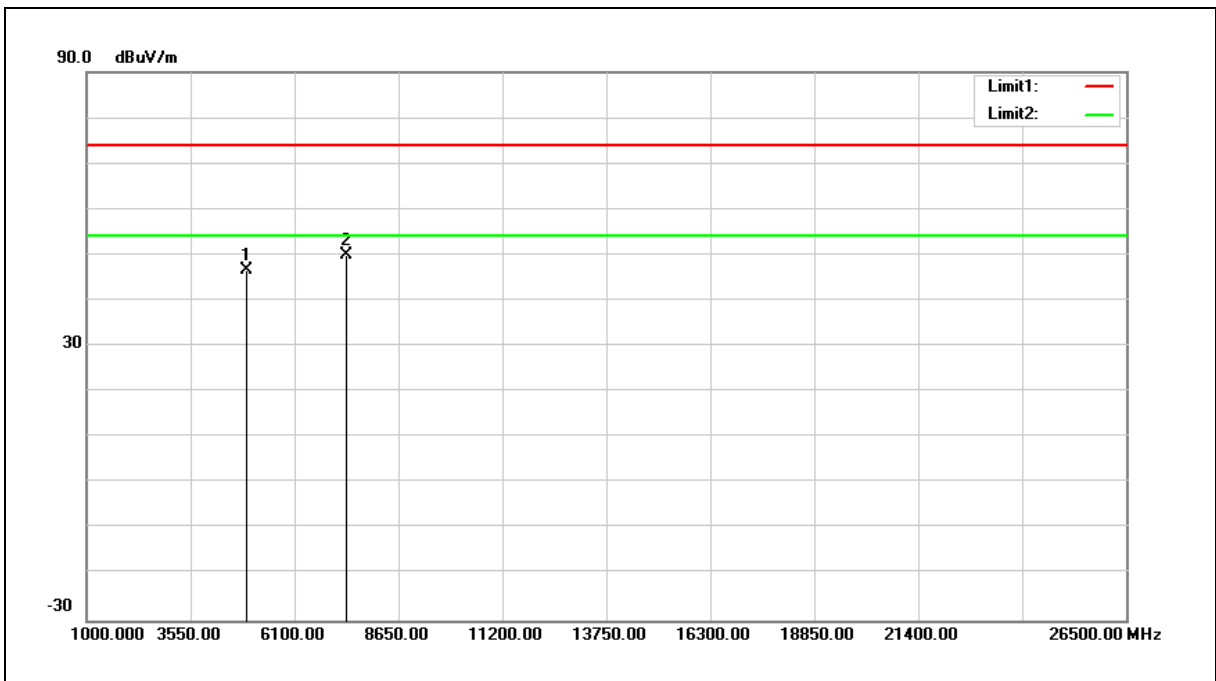

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	41.35	5.31	46.66	74.00	-27.34	peak
2	7386.000	38.38	11.66	50.04	74.00	-23.96	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

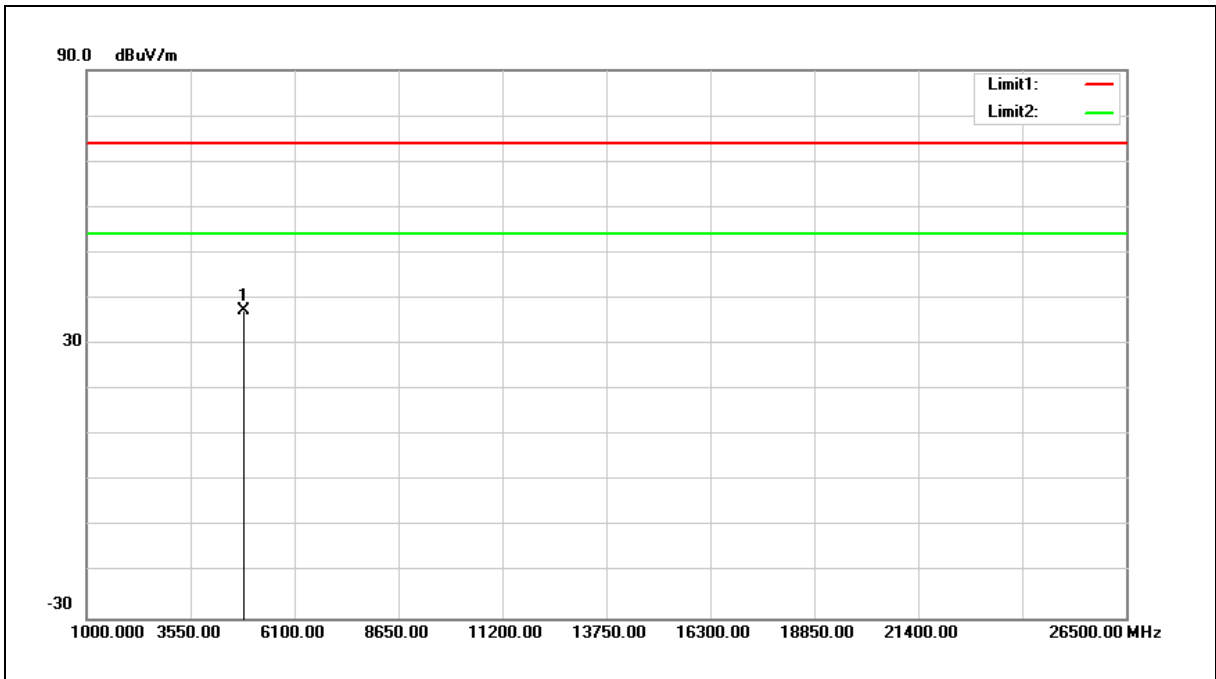

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.34	5.06	37.40	74.00	-36.60	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

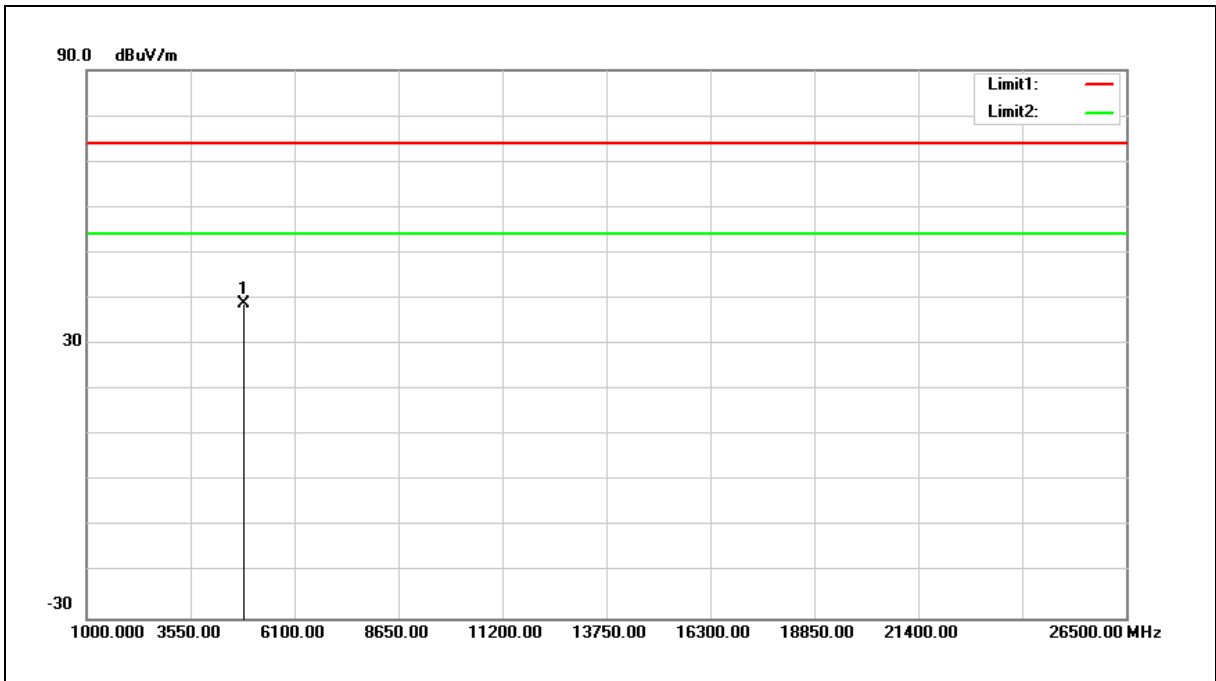

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	33.70	5.06	38.76	74.00	-35.24	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

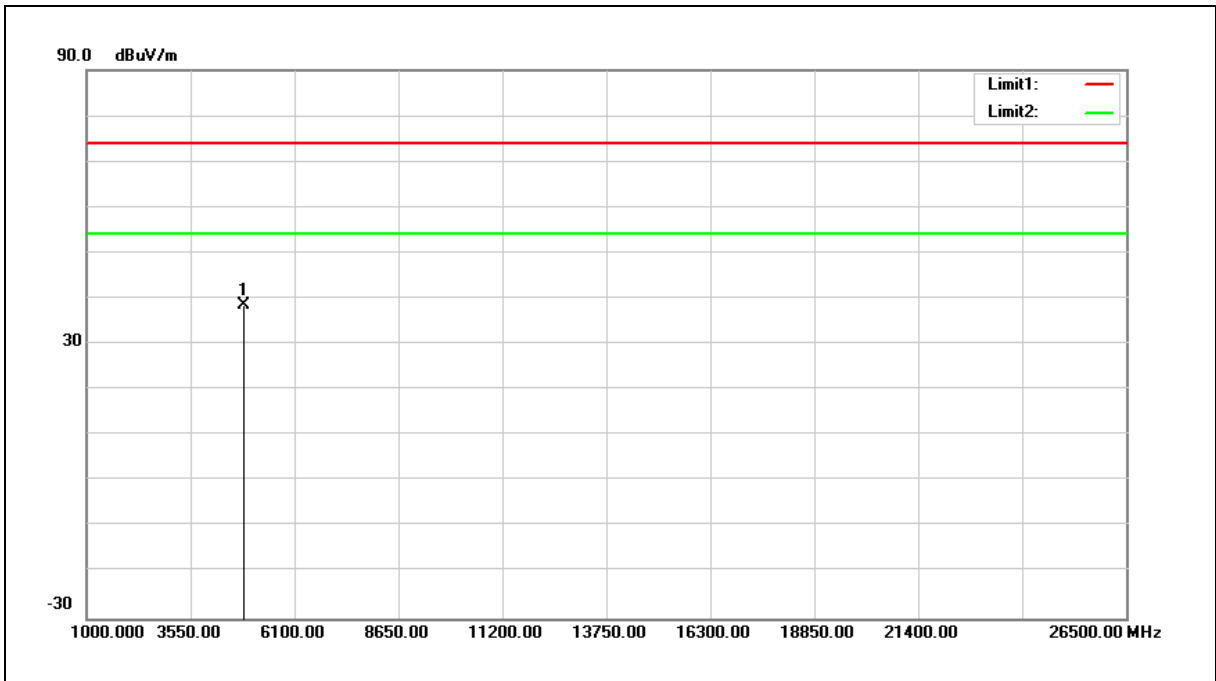

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	33.53	5.15	38.68	74.00	-35.32	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

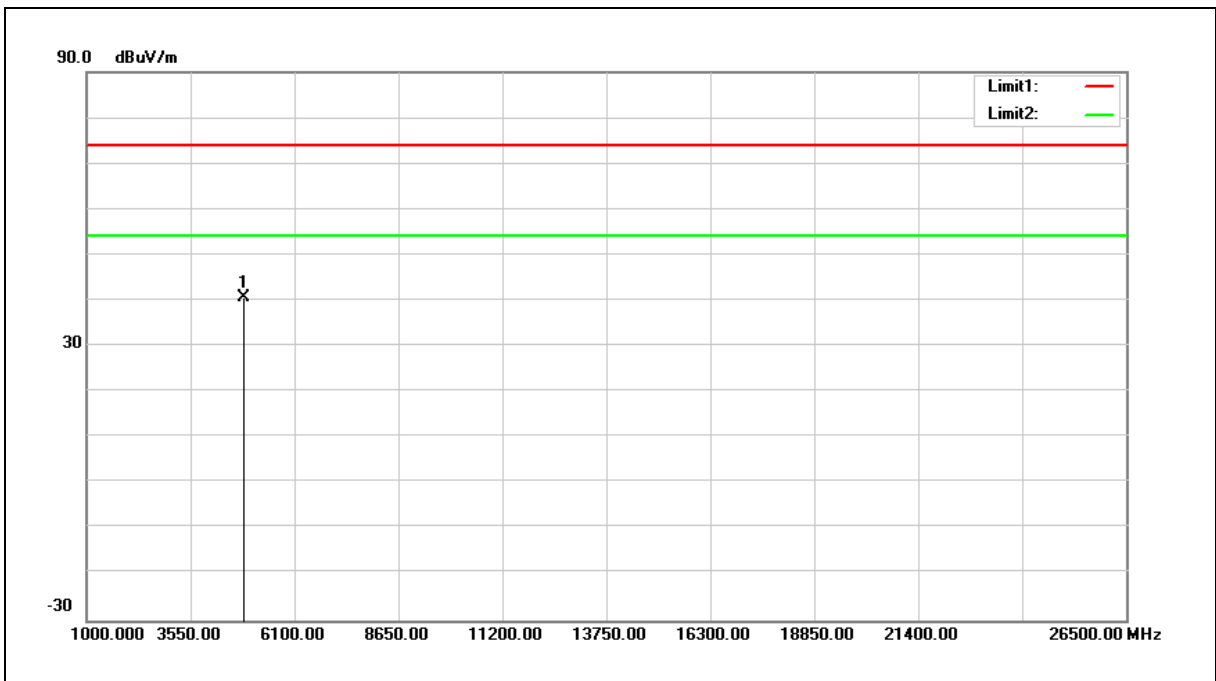

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.45	5.15	40.60	74.00	-33.40	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

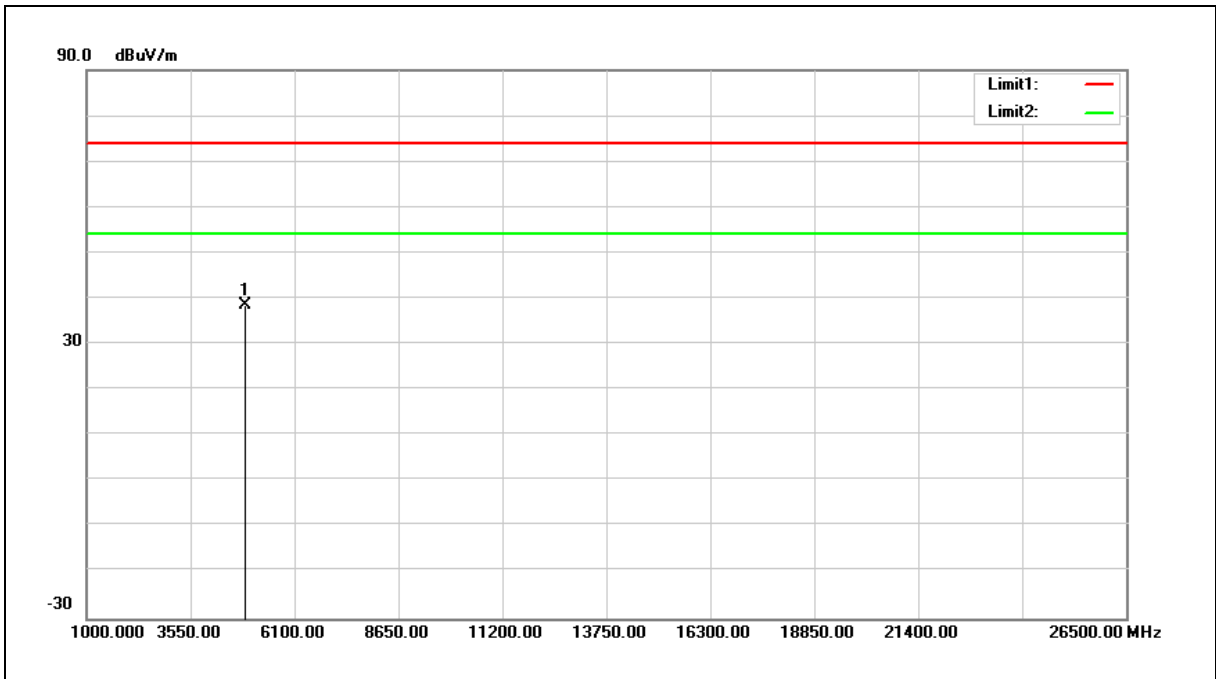

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.37	5.25	38.62	74.00	-35.38	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

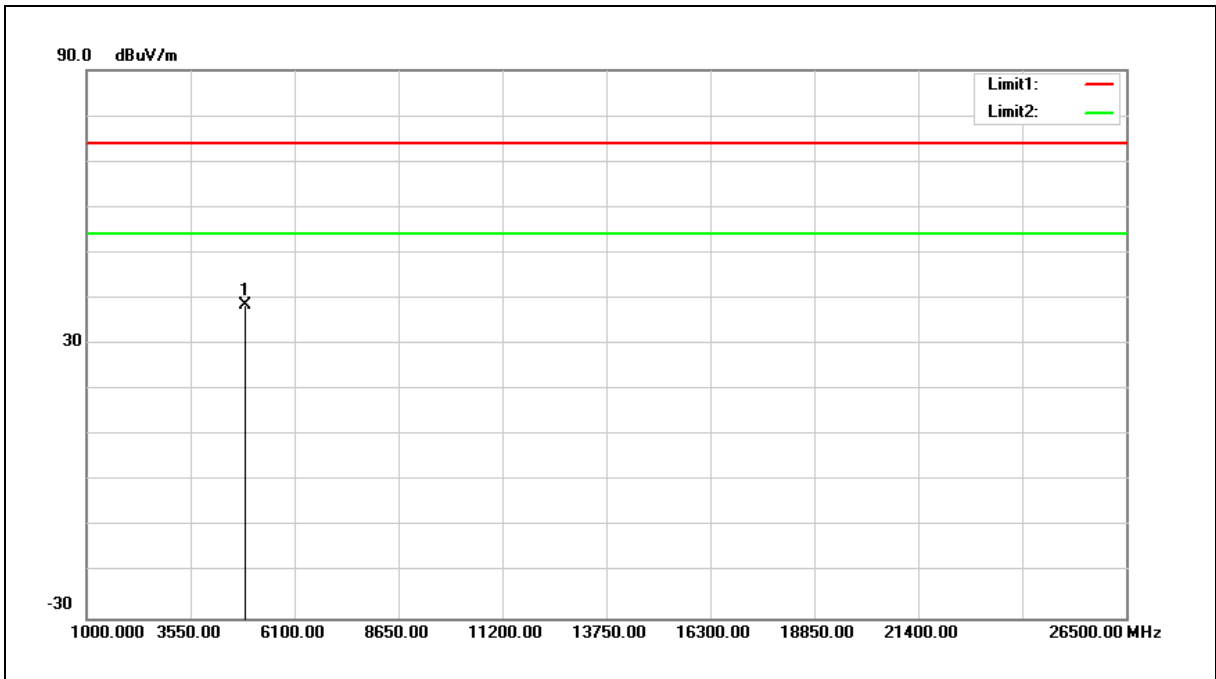

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.19	5.25	38.44	74.00	-35.56	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

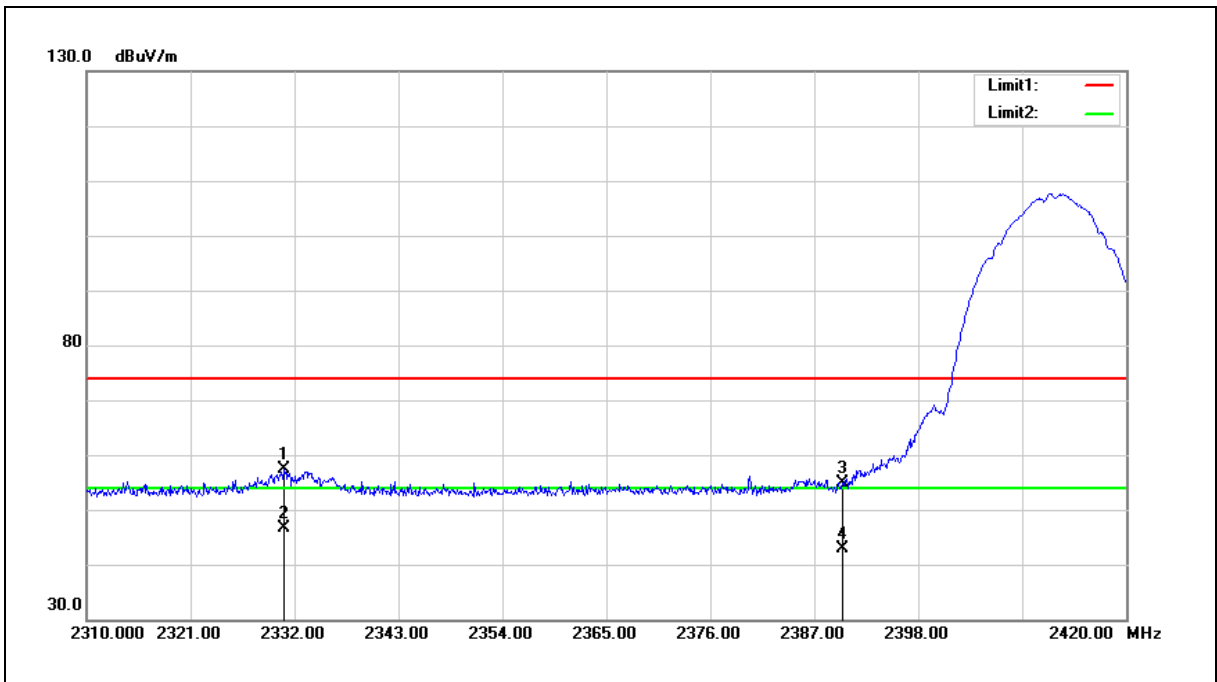

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2330.900	59.44	-2.05	57.39	74.00	-16.61	peak
2	2330.900	48.67	-2.05	46.62	54.00	-7.38	AVG
3	2390.000	56.74	-1.84	54.90	74.00	-19.10	peak
4	2390.000	44.60	-1.84	42.76	54.00	-11.24	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

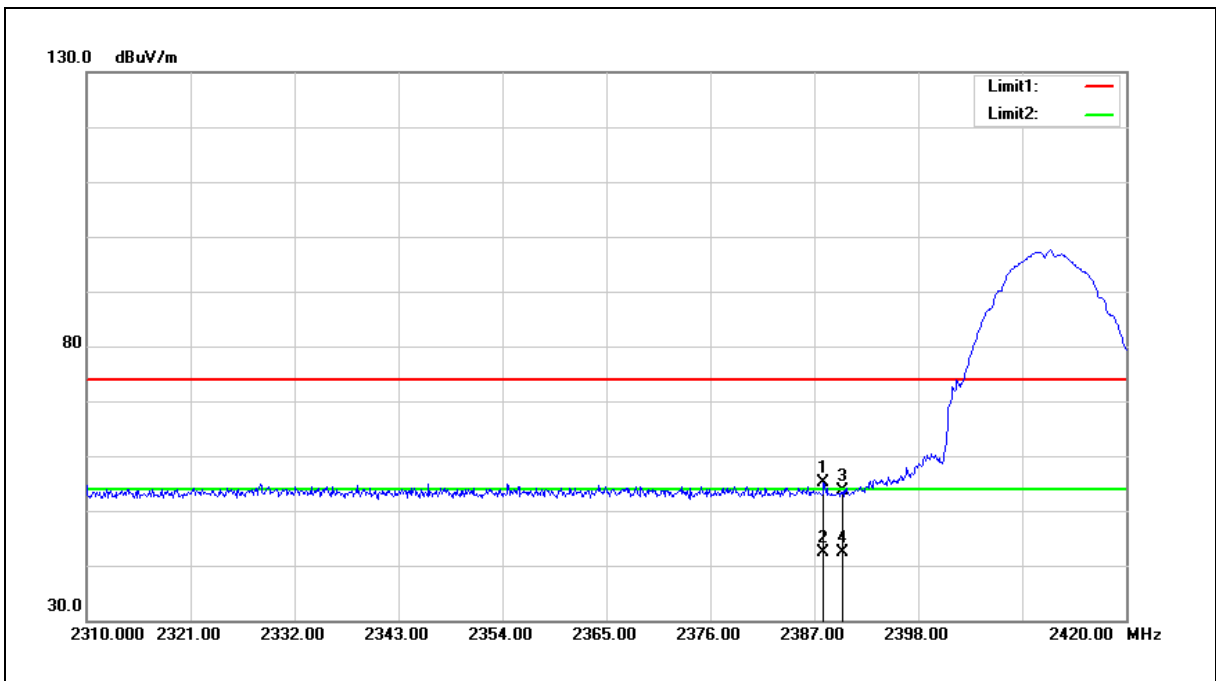

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.990	56.89	-1.83	55.06	74.00	-18.94	peak
2	2387.990	44.21	-1.83	42.38	54.00	-11.62	AVG
3	2390.000	55.57	-1.84	53.73	74.00	-20.27	peak
4	2390.000	44.13	-1.84	42.29	54.00	-11.71	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

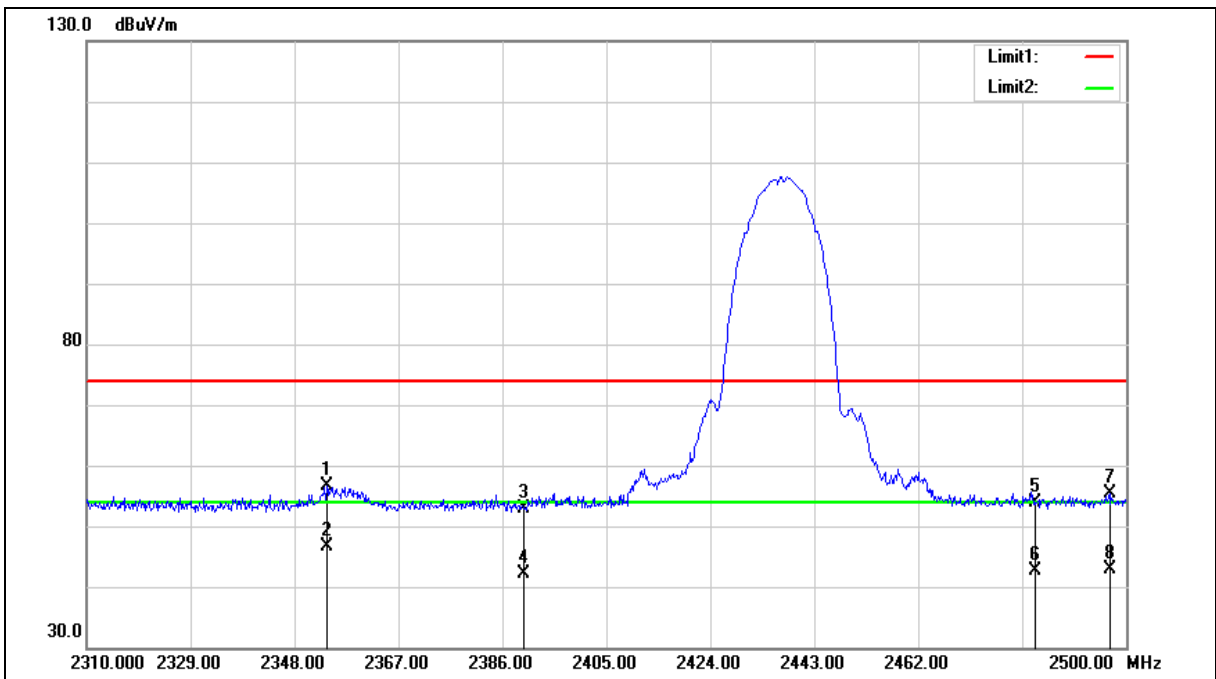



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.890	58.63	-1.97	56.66	74.00	-17.34	peak
2	2353.890	48.52	-1.97	46.55	54.00	-7.45	AVG
3	2390.000	54.66	-1.84	52.82	74.00	-21.18	peak
4	2390.000	43.95	-1.84	42.11	54.00	-11.89	AVG
5	2483.500	55.32	-1.47	53.85	74.00	-20.15	peak
6	2483.500	44.18	-1.47	42.71	54.00	-11.29	AVG
7	2496.960	56.70	-1.41	55.29	74.00	-18.71	peak
8	2496.960	44.20	-1.41	42.79	54.00	-11.21	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

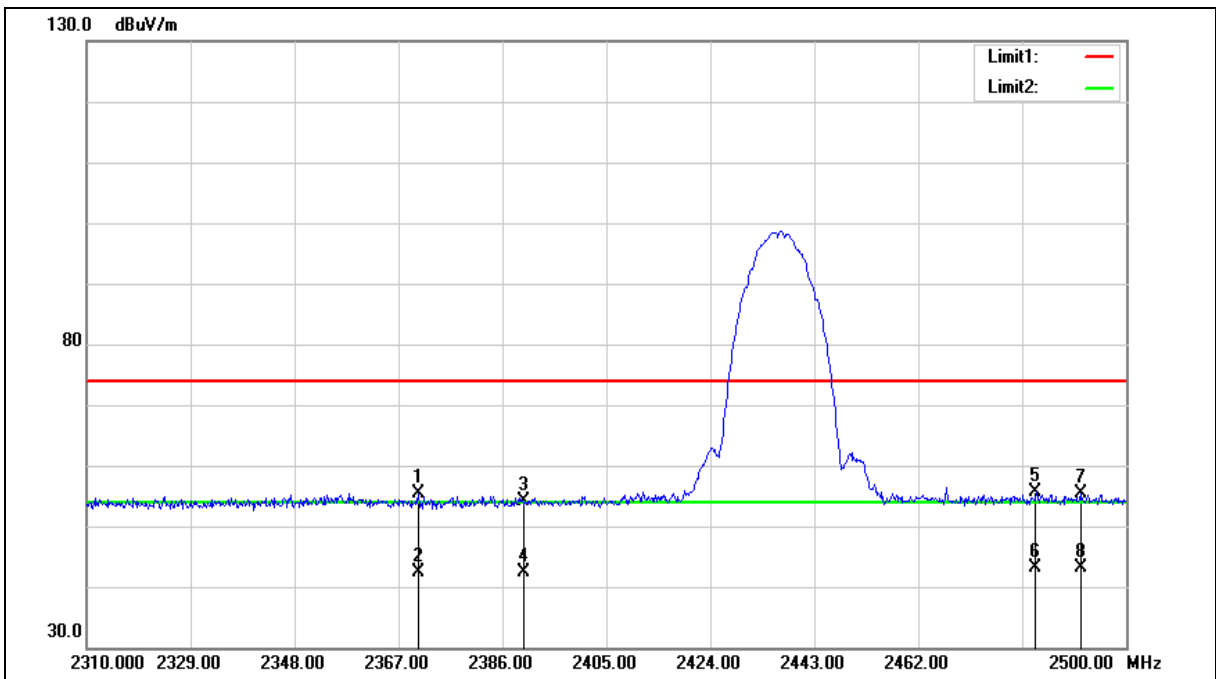



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.610	57.38	-1.90	55.48	74.00	-18.52	peak
2	2370.610	44.31	-1.90	42.41	54.00	-11.59	AVG
3	2390.000	55.89	-1.84	54.05	74.00	-19.95	peak
4	2390.000	44.22	-1.84	42.38	54.00	-11.62	AVG
5	2483.500	57.18	-1.47	55.71	74.00	-18.29	peak
6	2483.500	44.49	-1.47	43.02	54.00	-10.98	AVG
7	2491.640	56.87	-1.43	55.44	74.00	-18.56	peak
8	2491.640	44.54	-1.43	43.11	54.00	-10.89	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

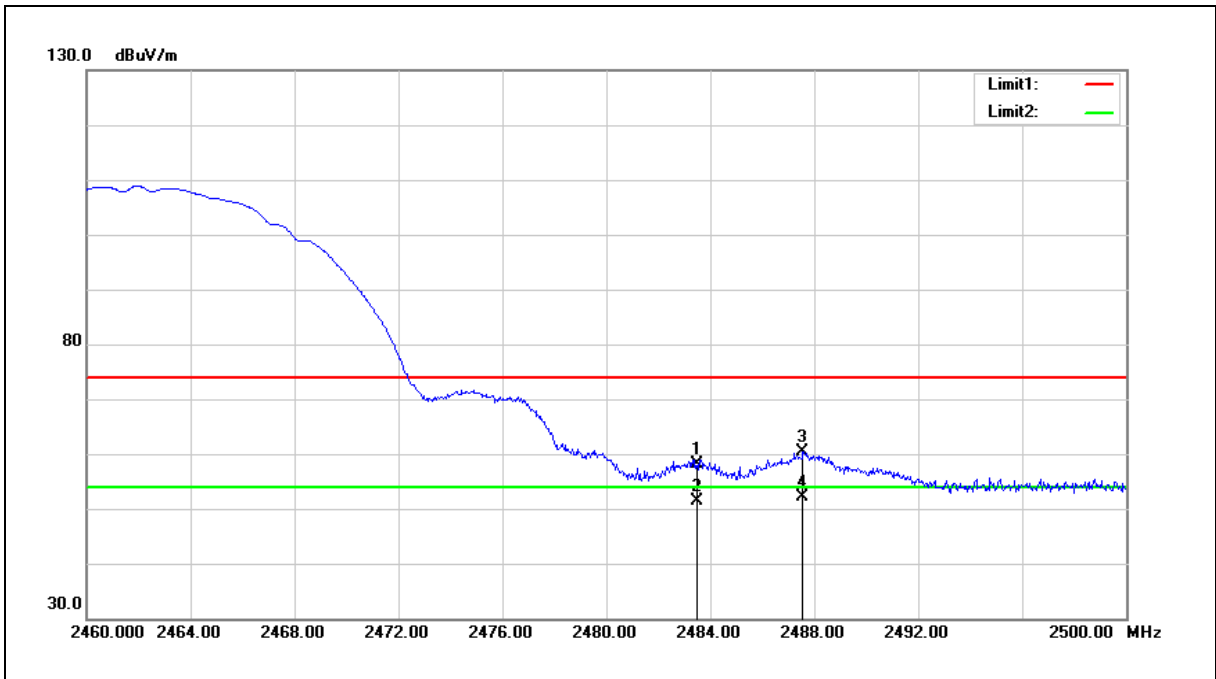


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.57	-1.47	58.10	74.00	-15.90	peak
2	2483.500	52.78	-1.47	51.31	54.00	-2.69	AVG
3	2487.560	61.88	-1.44	60.44	74.00	-13.56	peak
4	2487.560	53.47	-1.44	52.03	54.00	-1.97	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

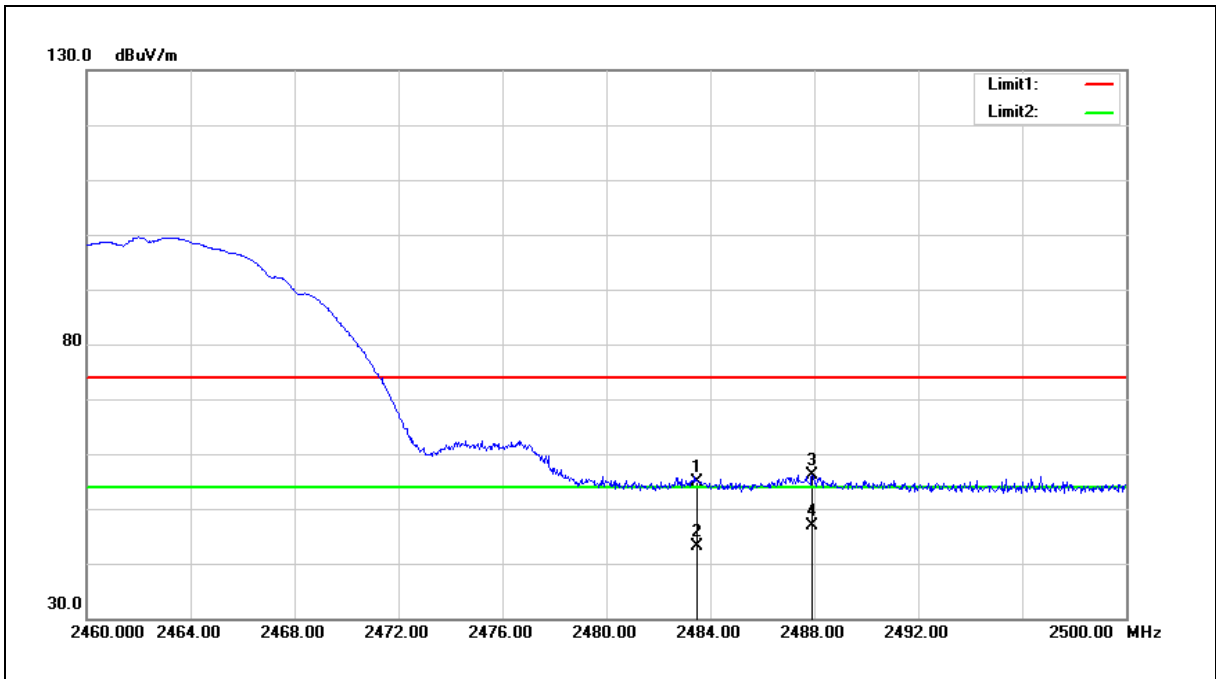

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.24	-1.47	54.77	74.00	-19.23	peak
2	2483.500	44.66	-1.47	43.19	54.00	-10.81	AVG
3	2487.920	57.55	-1.44	56.11	74.00	-17.89	peak
4	2487.920	48.32	-1.44	46.88	54.00	-7.12	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

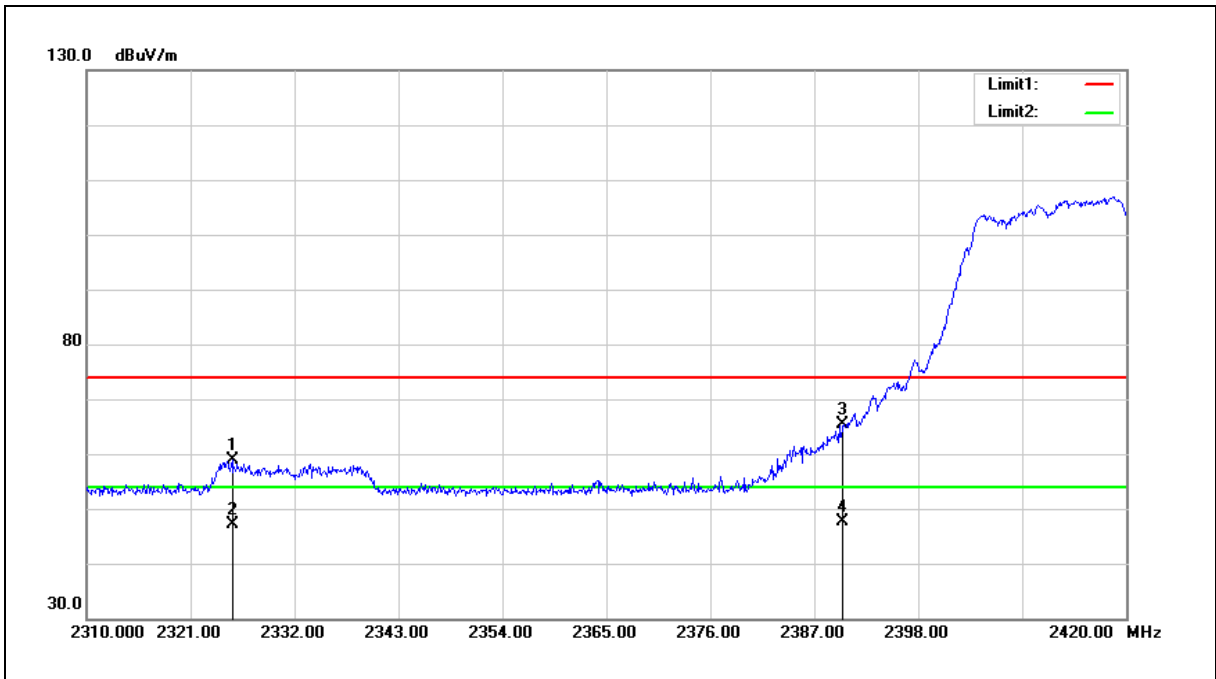

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2325.400	60.88	-2.08	58.80	74.00	-15.20	peak
2	2325.400	49.11	-2.08	47.03	54.00	-6.97	AVG
3	2390.000	67.10	-1.84	65.26	74.00	-8.74	peak
4	2390.000	49.46	-1.84	47.62	54.00	-6.38	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

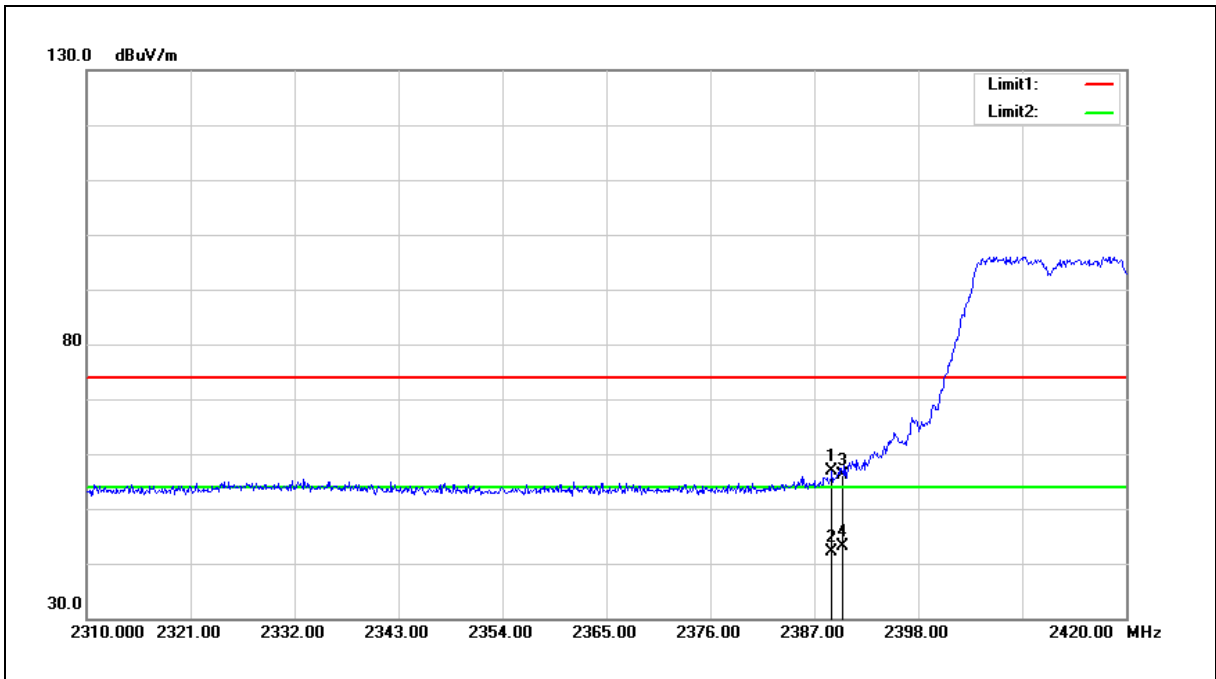

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.870	58.67	-1.83	56.84	74.00	-17.16	peak
2	2388.870	44.04	-1.83	42.21	54.00	-11.79	AVG
3	2390.000	58.09	-1.84	56.25	74.00	-17.75	peak
4	2390.000	44.99	-1.84	43.15	54.00	-10.85	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

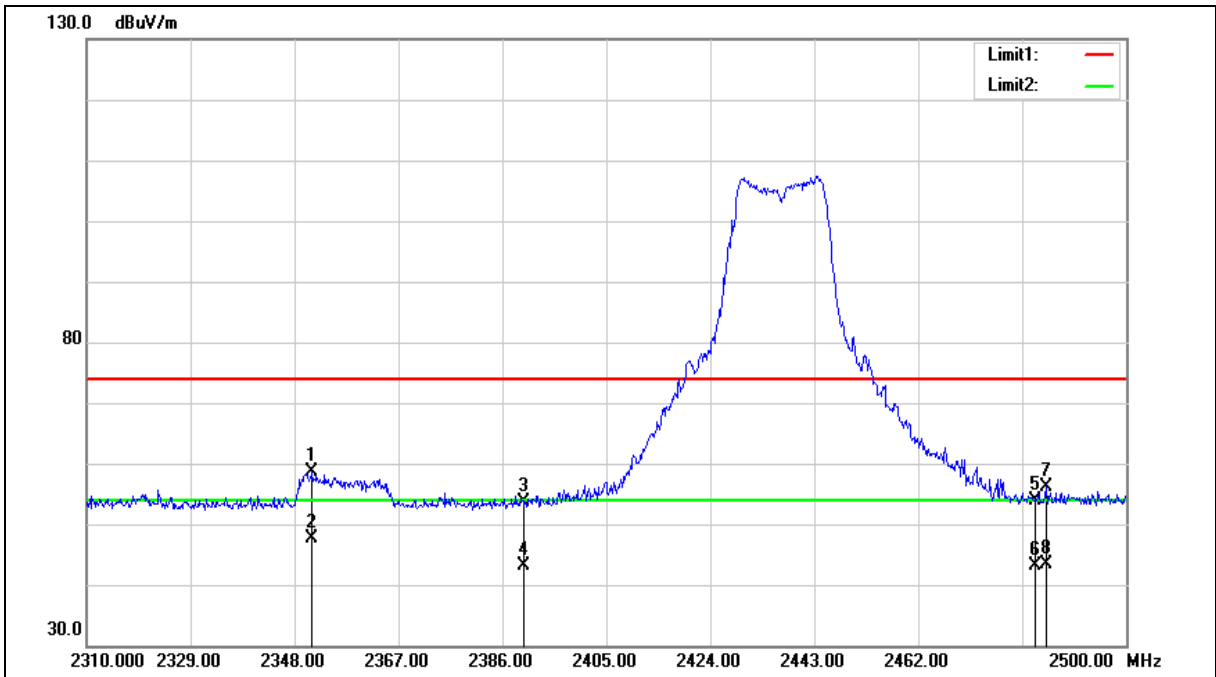



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.230	60.55	-1.98	58.57	74.00	-15.43	peak
2	2351.230	49.60	-1.98	47.62	54.00	-6.38	AVG
3	2390.000	55.57	-1.84	53.73	74.00	-20.27	peak
4	2390.000	44.98	-1.84	43.14	54.00	-10.86	AVG
5	2483.500	55.39	-1.47	53.92	74.00	-20.08	peak
6	2483.500	44.70	-1.47	43.23	54.00	-10.77	AVG
7	2485.370	57.60	-1.46	56.14	74.00	-17.86	peak
8	2485.370	44.73	-1.46	43.27	54.00	-10.73	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

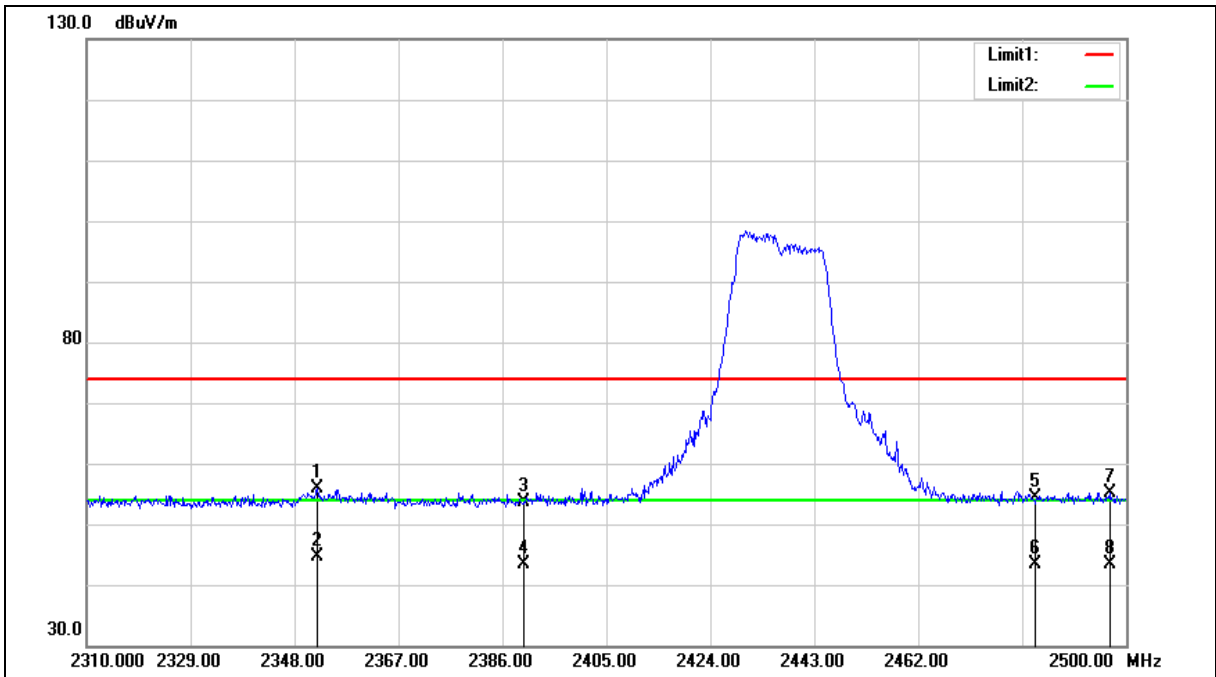



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2352.180	57.79	-1.97	55.82	74.00	-18.18	peak
2	2352.180	46.54	-1.97	44.57	54.00	-9.43	AVG
3	2390.000	55.58	-1.84	53.74	74.00	-20.26	peak
4	2390.000	45.22	-1.84	43.38	54.00	-10.62	AVG
5	2483.500	55.76	-1.47	54.29	74.00	-19.71	peak
6	2483.500	44.89	-1.47	43.42	54.00	-10.58	AVG
7	2497.150	56.59	-1.41	55.18	74.00	-18.82	peak
8	2497.150	44.80	-1.41	43.39	54.00	-10.61	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

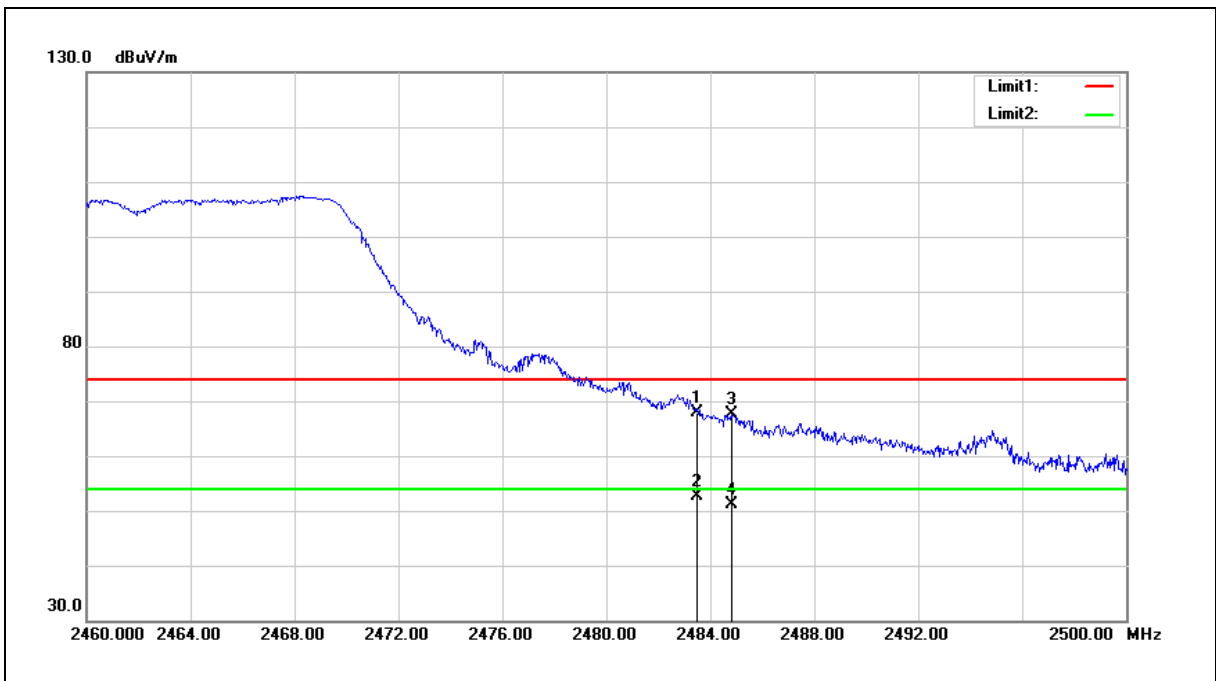

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	69.31	-1.47	67.84	74.00	-6.16	peak
2	2483.500	53.98	-1.47	52.51	54.00	-1.49	AVG
3	2484.800	69.08	-1.46	67.62	74.00	-6.38	peak
4	2484.800	52.66	-1.46	51.20	54.00	-2.80	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

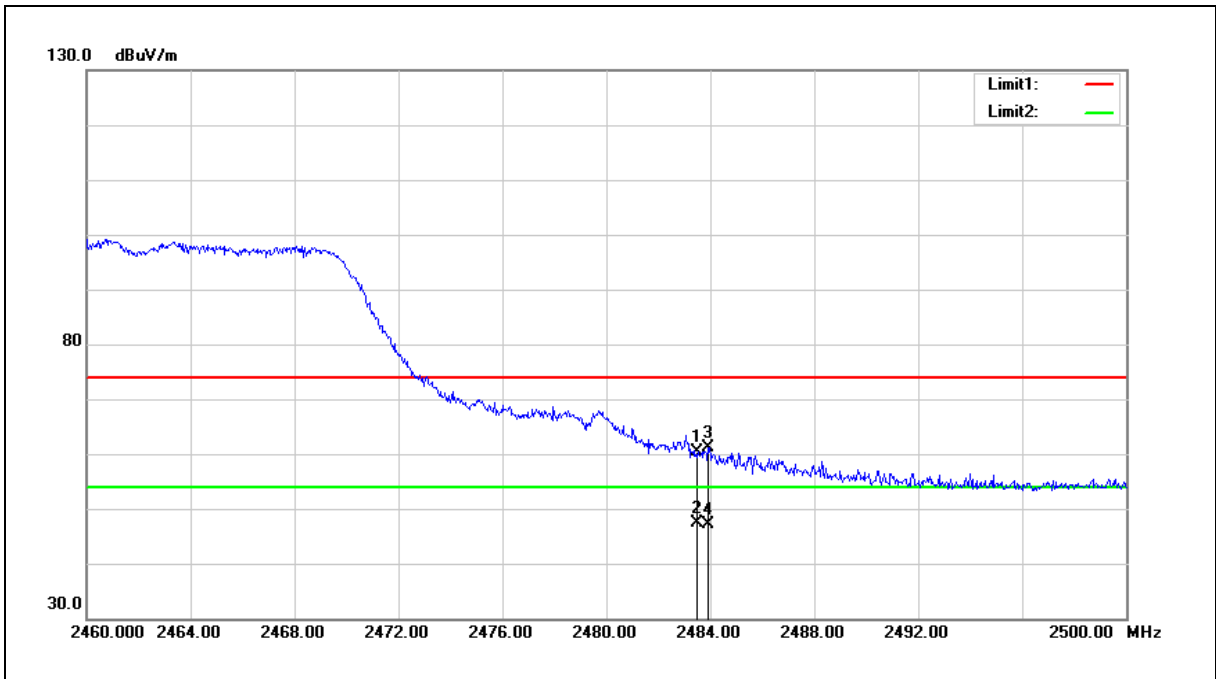

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.76	-1.47	60.29	74.00	-13.71	peak
2	2483.500	48.89	-1.47	47.42	54.00	-6.58	AVG
3	2483.920	62.56	-1.47	61.09	74.00	-12.91	peak
4	2483.920	48.70	-1.47	47.23	54.00	-6.77	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

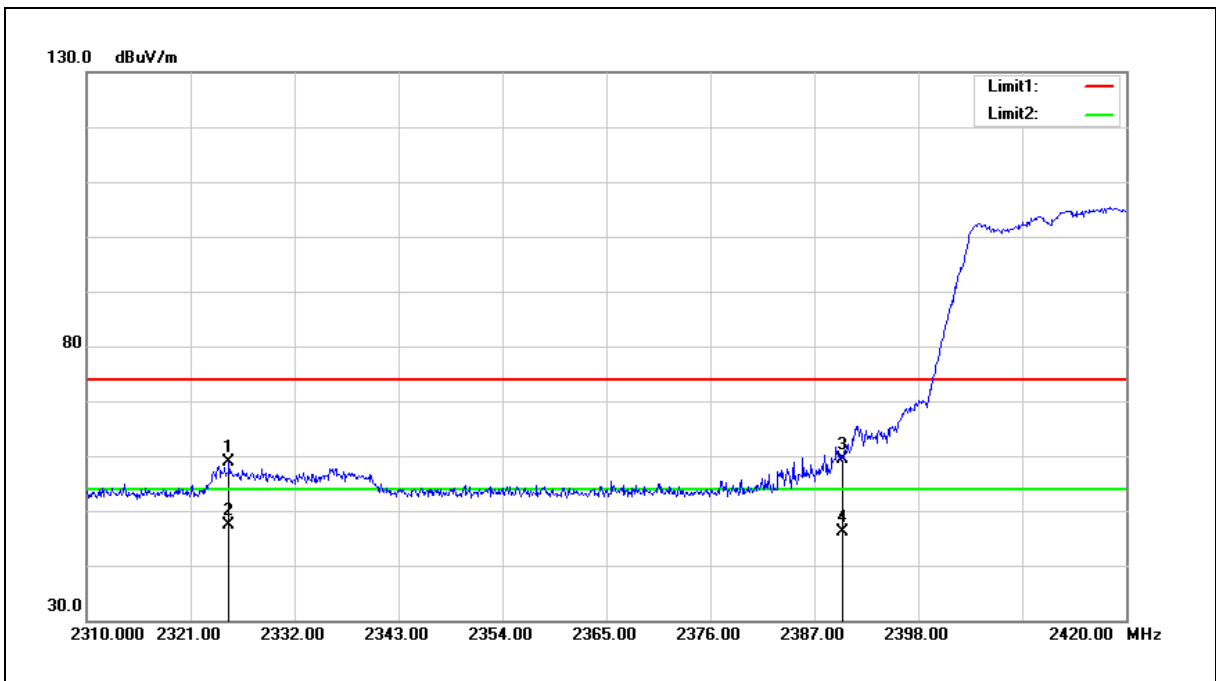

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2325.070	60.92	-2.08	58.84	74.00	-15.16	peak
2	2325.070	49.41	-2.08	47.33	54.00	-6.67	AVG
3	2390.000	61.26	-1.84	59.42	74.00	-14.58	peak
4	2390.000	47.91	-1.84	46.07	54.00	-7.93	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

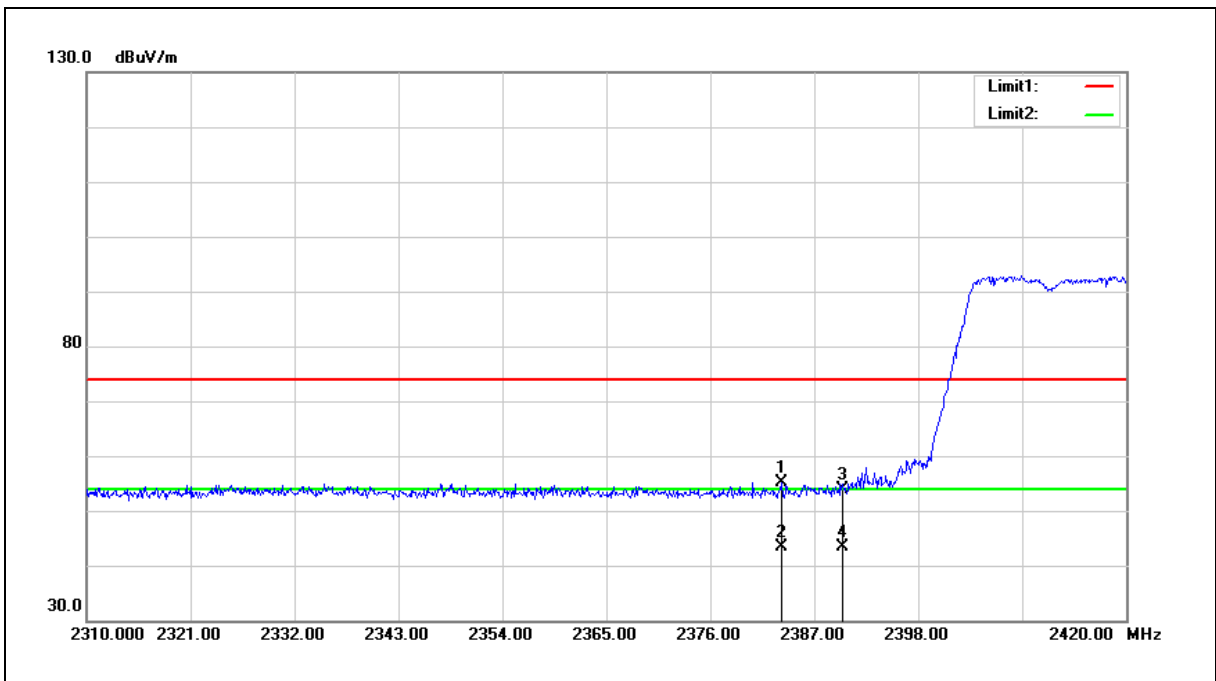

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.590	57.08	-1.85	55.23	74.00	-18.77	peak
2	2383.590	45.15	-1.85	43.30	54.00	-10.70	AVG
3	2390.000	55.67	-1.84	53.83	74.00	-20.17	peak
4	2390.000	45.23	-1.84	43.39	54.00	-10.61	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

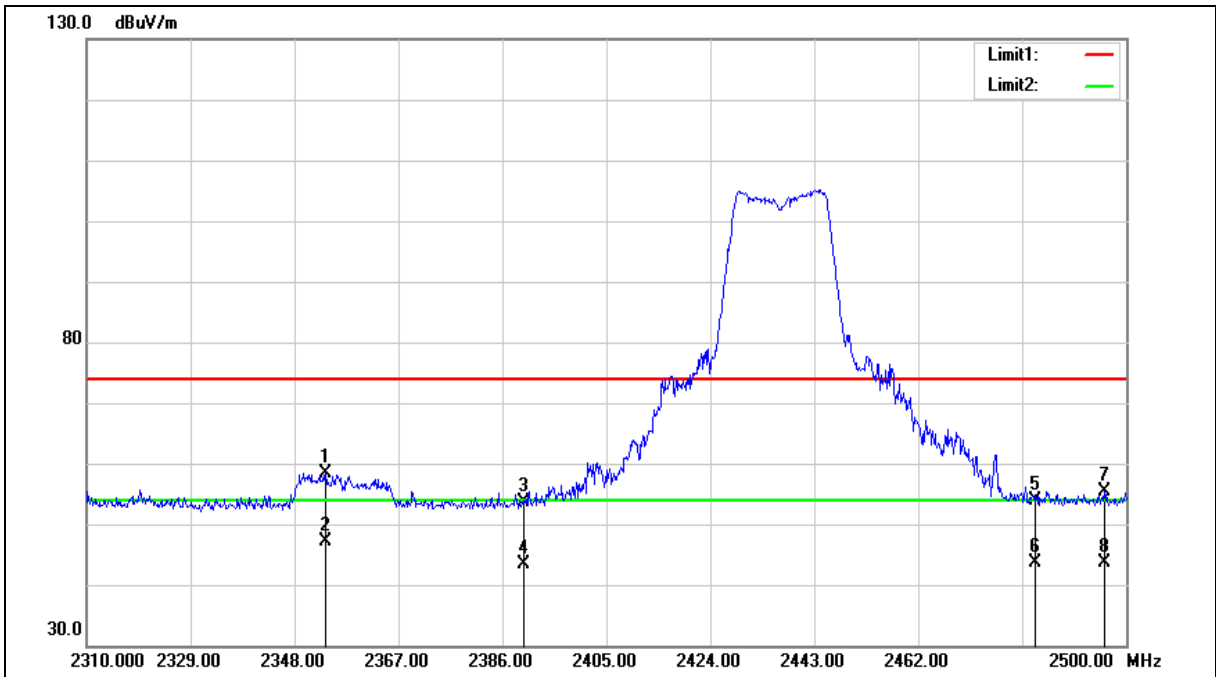



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.700	60.43	-1.97	58.46	74.00	-15.54	peak
2	2353.700	49.05	-1.97	47.08	54.00	-6.92	AVG
3	2390.000	55.55	-1.84	53.71	74.00	-20.29	peak
4	2390.000	45.10	-1.84	43.26	54.00	-10.74	AVG
5	2483.500	55.47	-1.47	54.00	74.00	-20.00	peak
6	2483.500	45.08	-1.47	43.61	54.00	-10.39	AVG
7	2496.010	56.82	-1.41	55.41	74.00	-18.59	peak
8	2496.010	44.99	-1.41	43.58	54.00	-10.42	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

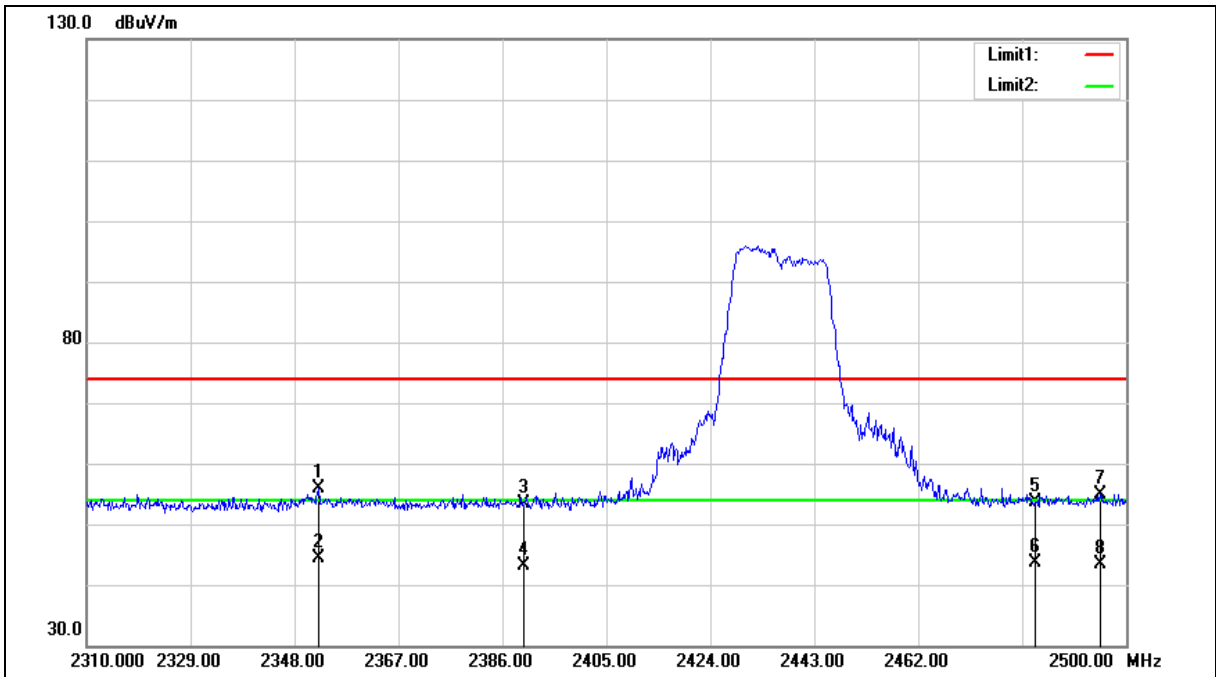



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2352.370	57.74	-1.97	55.77	74.00	-18.23	peak
2	2352.370	46.29	-1.97	44.32	54.00	-9.68	AVG
3	2390.000	55.31	-1.84	53.47	74.00	-20.53	peak
4	2390.000	45.08	-1.84	43.24	54.00	-10.76	AVG
5	2483.500	55.21	-1.47	53.74	74.00	-20.26	peak
6	2483.500	44.99	-1.47	43.52	54.00	-10.48	AVG
7	2495.250	56.28	-1.42	54.86	74.00	-19.14	peak
8	2495.250	44.91	-1.42	43.49	54.00	-10.51	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

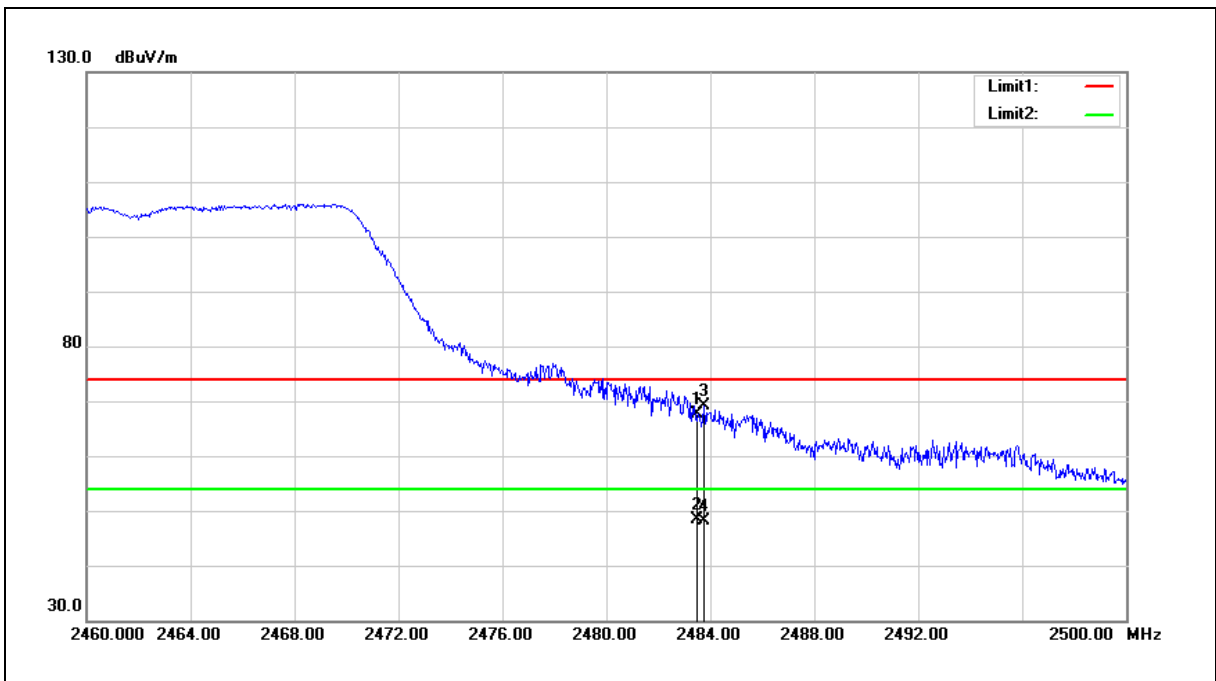

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	69.19	-1.47	67.72	74.00	-6.28	peak
2	2483.500	49.86	-1.47	48.39	54.00	-5.61	AVG
3	2483.760	70.60	-1.47	69.13	74.00	-4.87	peak
4	2483.760	49.69	-1.47	48.22	54.00	-5.78	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

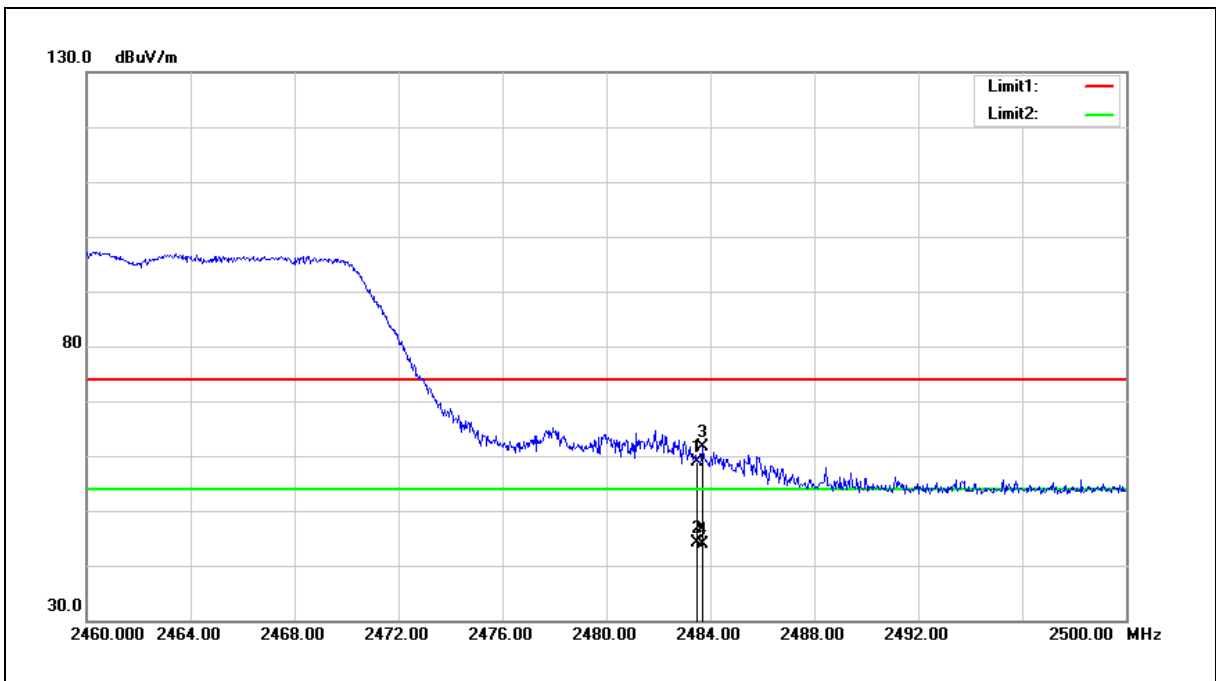

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.29	-1.47	58.82	74.00	-15.18	peak
2	2483.500	45.58	-1.47	44.11	54.00	-9.89	AVG
3	2483.680	63.13	-1.47	61.66	74.00	-12.34	peak
4	2483.680	45.33	-1.47	43.86	54.00	-10.14	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

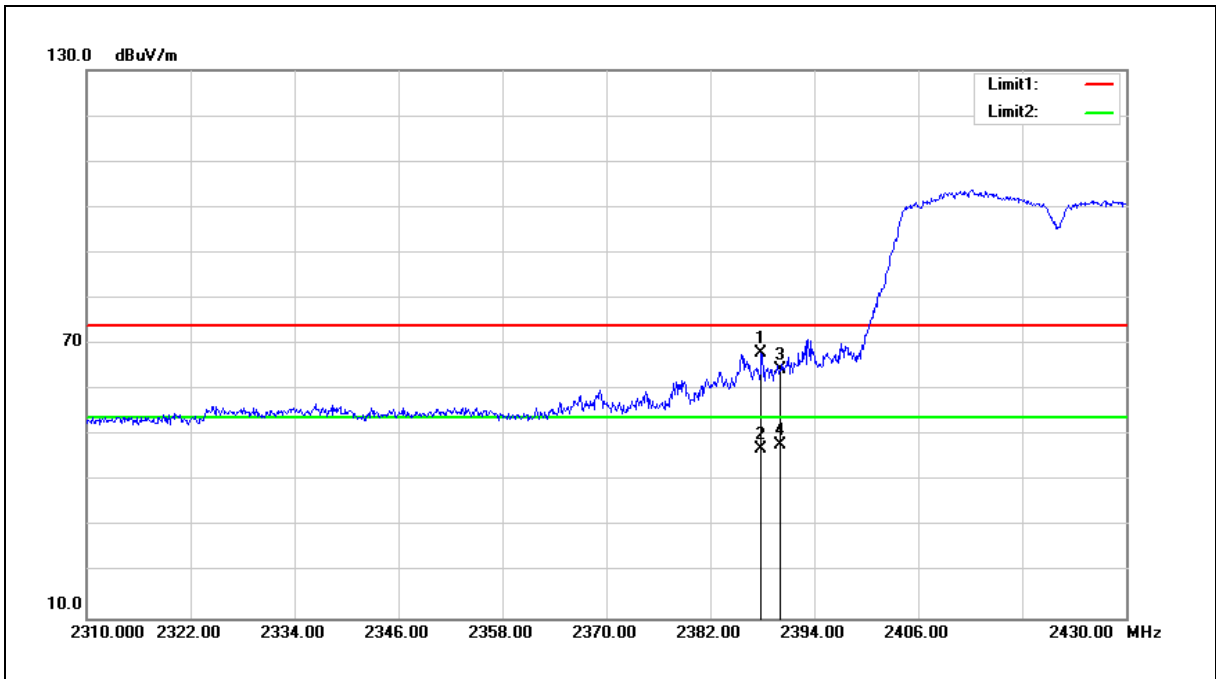

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.880	69.89	-1.83	68.06	74.00	-5.94	peak
2	2387.880	48.77	-1.83	46.94	54.00	-7.06	AVG
3	2390.000	66.33	-1.84	64.49	74.00	-9.51	peak
4	2390.000	49.89	-1.84	48.05	54.00	-5.95	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

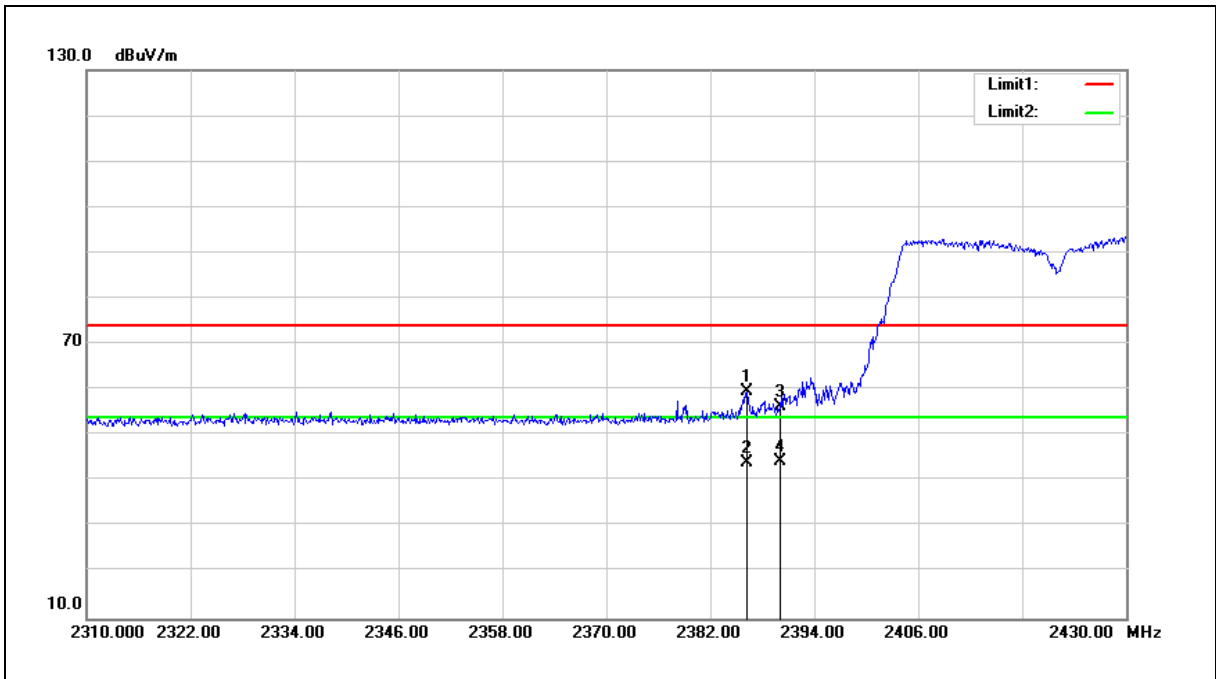

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.200	61.37	-1.84	59.53	74.00	-14.47	peak
2	2386.200	46.02	-1.84	44.18	54.00	-9.82	AVG
3	2390.000	58.09	-1.84	56.25	74.00	-17.75	peak
4	2390.000	46.16	-1.84	44.32	54.00	-9.68	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

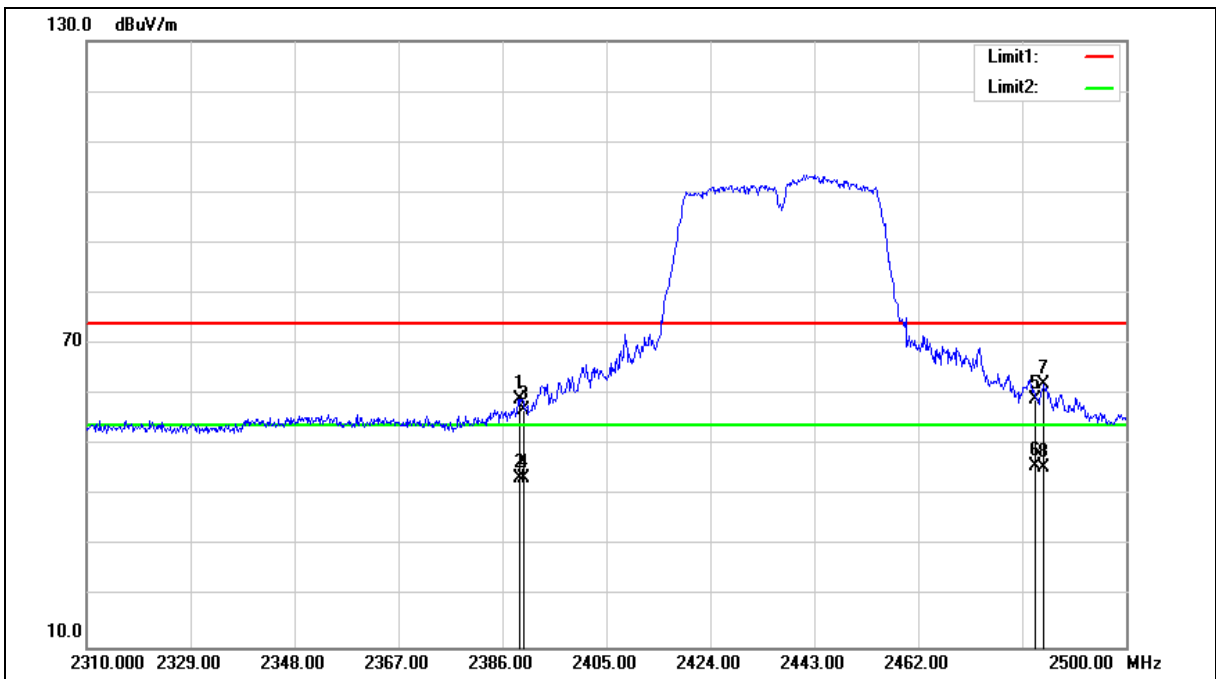



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	61.00	-1.84	59.16	74.00	-14.84	peak
2	2389.040	45.33	-1.84	43.49	54.00	-10.51	AVG
3	2390.000	58.74	-1.84	56.90	74.00	-17.10	peak
4	2390.000	45.42	-1.84	43.58	54.00	-10.42	AVG
5	2483.500	60.51	-1.47	59.04	74.00	-14.96	peak
6	2483.500	47.23	-1.47	45.76	54.00	-8.24	AVG
7	2484.990	63.48	-1.46	62.02	74.00	-11.98	peak
8	2484.990	46.98	-1.46	45.52	54.00	-8.48	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

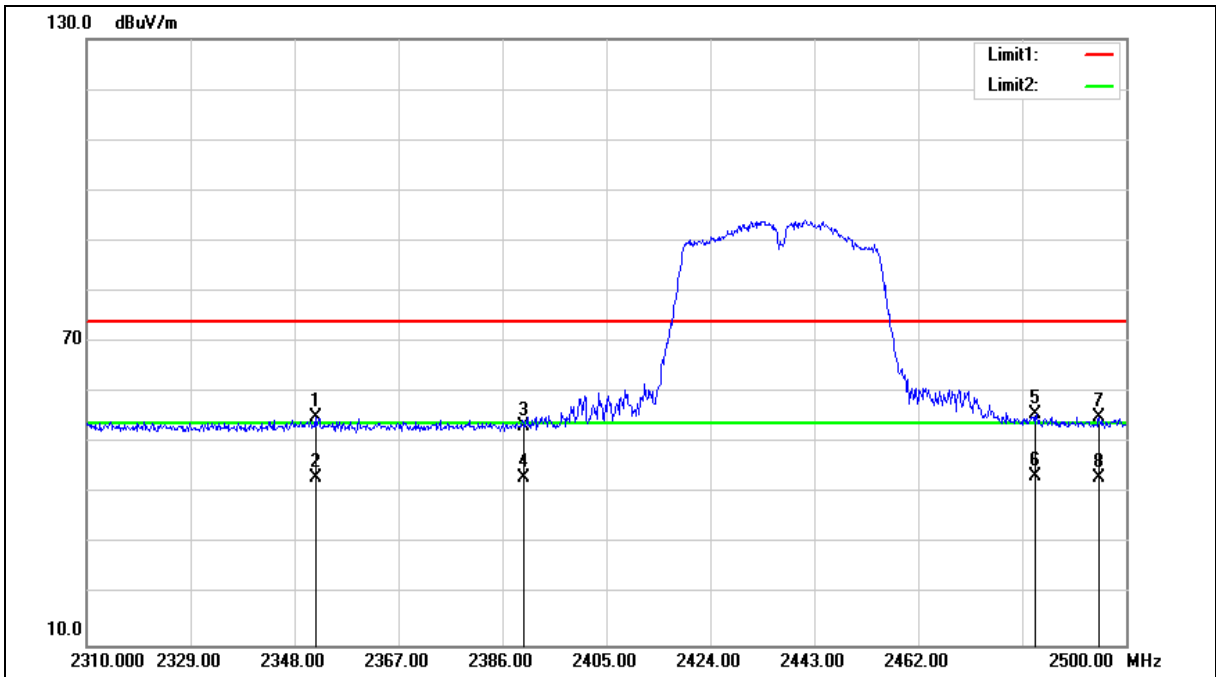



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.800	57.12	-1.97	55.15	74.00	-18.85	peak
2	2351.800	45.18	-1.97	43.21	54.00	-10.79	AVG
3	2390.000	55.15	-1.84	53.31	74.00	-20.69	peak
4	2390.000	45.10	-1.84	43.26	54.00	-10.74	AVG
5	2483.500	57.21	-1.47	55.74	74.00	-18.26	peak
6	2483.500	44.80	-1.47	43.33	54.00	-10.67	AVG
7	2495.060	56.68	-1.42	55.26	74.00	-18.74	peak
8	2495.060	44.72	-1.42	43.30	54.00	-10.70	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

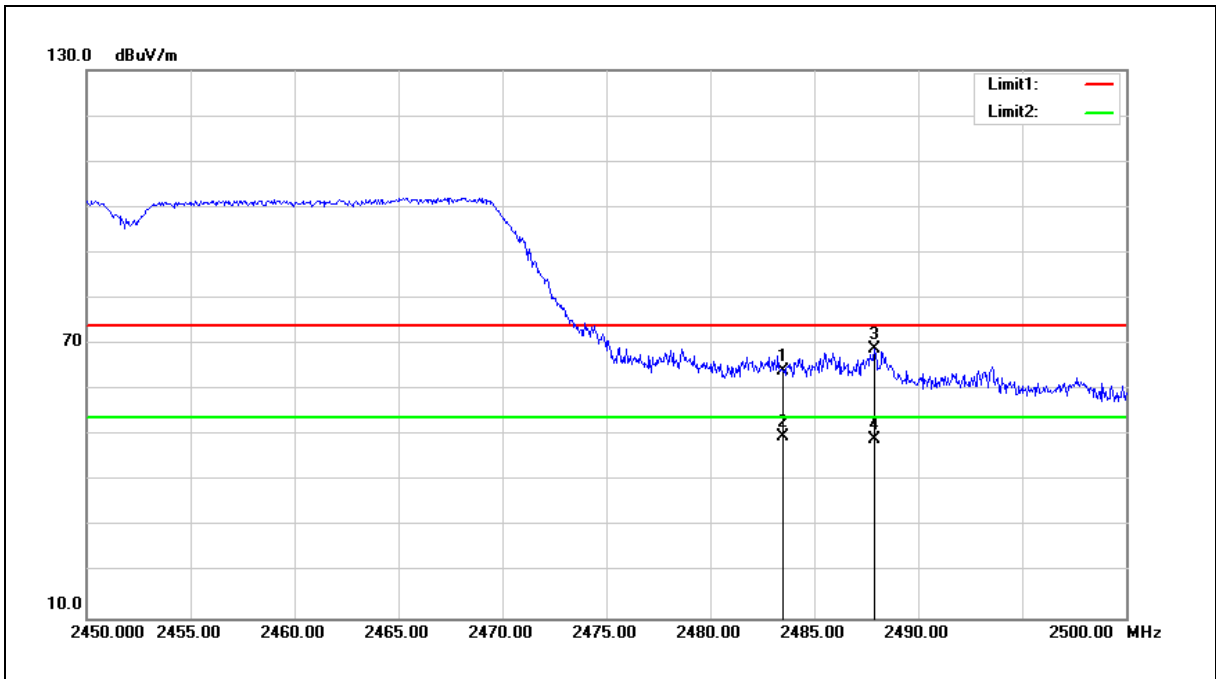

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	65.62	-1.47	64.15	74.00	-9.85	peak
2	2483.500	51.20	-1.47	49.73	54.00	-4.27	AVG
3	2487.900	70.26	-1.44	68.82	74.00	-5.18	peak
4	2487.900	50.58	-1.44	49.14	54.00	-4.86	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

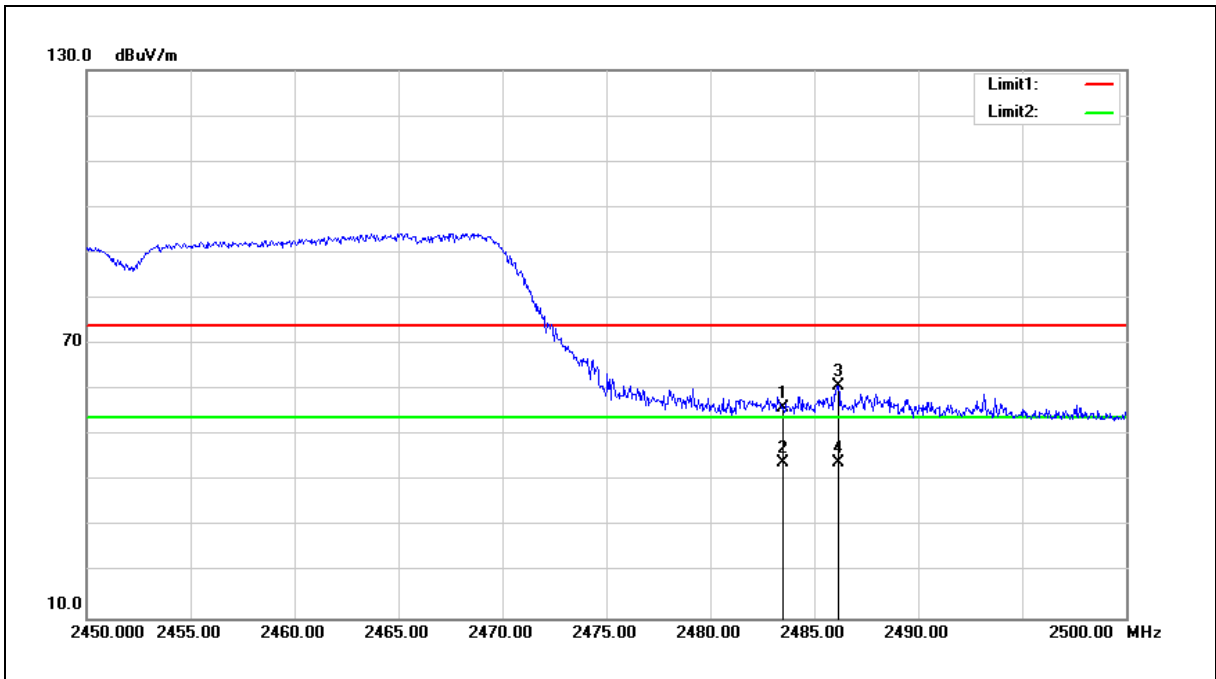

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.58	-1.47	56.11	74.00	-17.89	peak
2	2483.500	45.59	-1.47	44.12	54.00	-9.88	AVG
3	2486.150	62.35	-1.46	60.89	74.00	-13.11	peak
4	2486.150	45.65	-1.46	44.19	54.00	-9.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.