


FCC Radio Test Report


FCC ID: NDD9562881417


This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1410C136
Equipment : AC600 Multi-Function Dual-Band Wi-Fi Router
Model Name : BR-6208ACL; BR-6288ACL
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Address : No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park,
New Taipei City, Taiwan

Date of Receipt : Oct. 24, 2014
Date of Test : Oct. 24, 2014~Nov. 26, 2014
Issued Date : Nov. 27, 2014
Tested by : BTL Inc.

Testing Engineer : 
(Josh Lin)

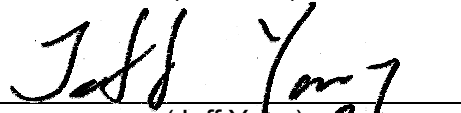Technical Manager : 
(Jeff Yang)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20

Table of Contents	Page
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	21
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	22
7.1 APPLIED PROCEDURES / LIMIT	22
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY TEST	23
8.1 APPLIED PROCEDURES / LIMIT	23
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	26
ATTACHMENT A - CONDUCTED EMISSION	30
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	33
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	35
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	38
ATTACHMENT E - BANDWIDTH	87
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	96
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	98
ATTACHMENT H - POWER SPECTRAL DENSITY	115

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1410C136	Original Issue.	Nov. 27, 2014

1. CERTIFICATION

Equipment : AC600 Multi-Function Dual-Band Wi-Fi Router
Brand Name : EDIMAX
Model Name : BR-6208ACL; BR-6288ACL
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Date of Test : Oct. 24, 2014~Nov. 26, 2014
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1410C136) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2013			
Standard(s)	Section	Test Item	Judgment
FCC			
15.207		Conducted Emission	PASS
15.247(d)		Antenna conducted Spurious Emission	PASS
15.247(a)(2)		6dB Bandwidth	PASS
15.247(b)(3)		Peak Output Power	PASS
15.247(e)		Power Spectral Density	PASS
15.203		Antenna Requirement	PASS
15.209/15.205		Transmitter Radiated Emissions	PASS

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C02: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U,(dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AC600 Multi-Function Dual-Band Wi-Fi Router	
Brand Name	EDIMAX	
Model Name	BR-6208ACL; BR-6288ACL	
Model Difference	Only differ in model name.	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps
	Output Power (Max.)	802.11b: 17.43dBm 802.11g: 23.80dBm 802.11n(20MHz):23.15dBm 802.11n(40MHz): 23.32dBm
Power Source	DC voltage supplied from AC/DC adapter. Brand/Model: AMIGO/ AMS47-0501200FU	
Power Rating	I/P: AC 100-240V~50/60Hz 0.2A O/P: DC 5V/1.2A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain	Note
1	LYNwave	ALO140-221030-000000	Printed	N/A	3.50	TX/RX

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : BPSK (6Mbps)
802.11n HT40 mode : BPSK (13.5Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	RTL819x 2.3		
Frequency (MHz)	2412	2437	2462
802.11b	41	40	37
802.11g	52	51	50
802.11n (20MHz)	50	49	48
Frequency	2422	2437	2452
802.11n (40MHz)	51	50	49

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

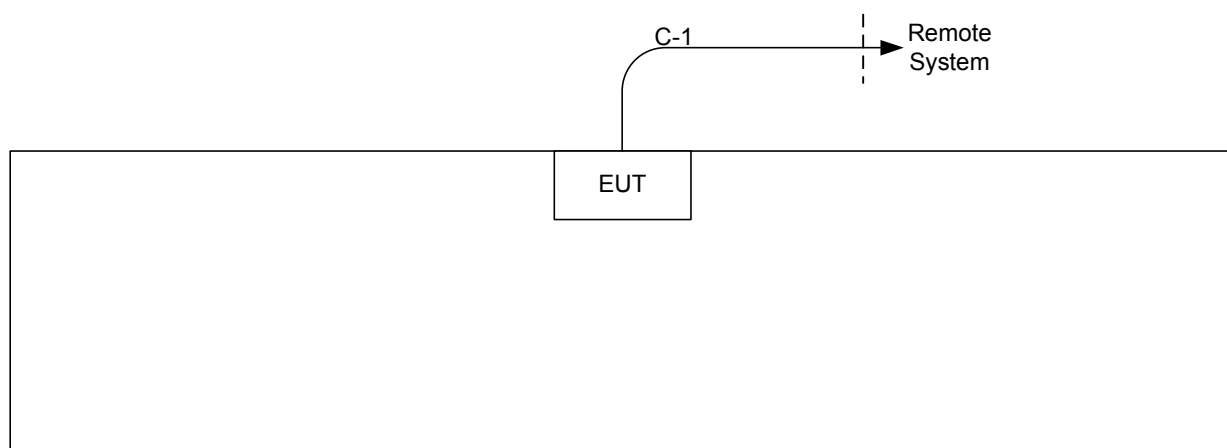

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	RJ-45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

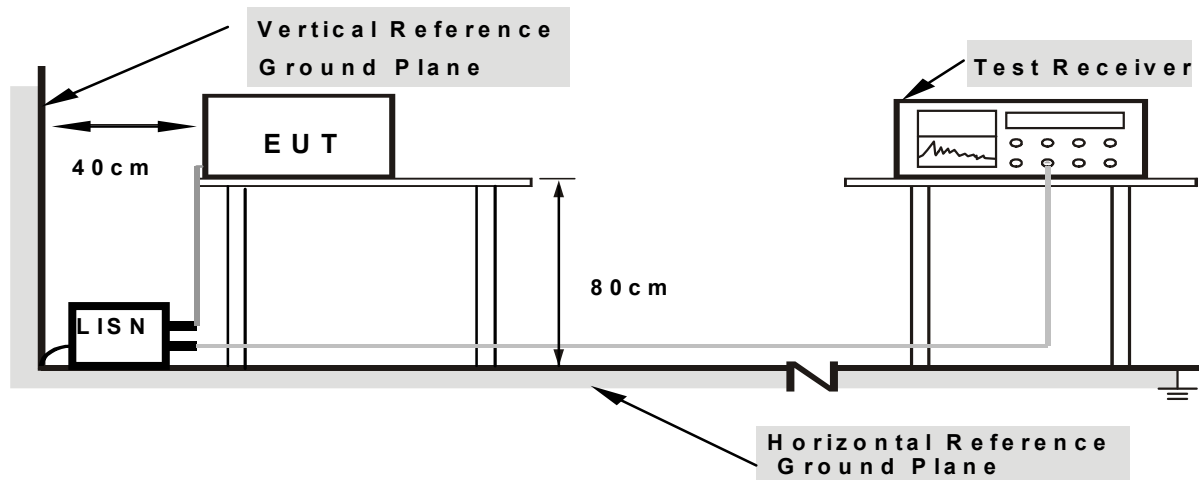

Note: 1.Support units were connected to second LISN .
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

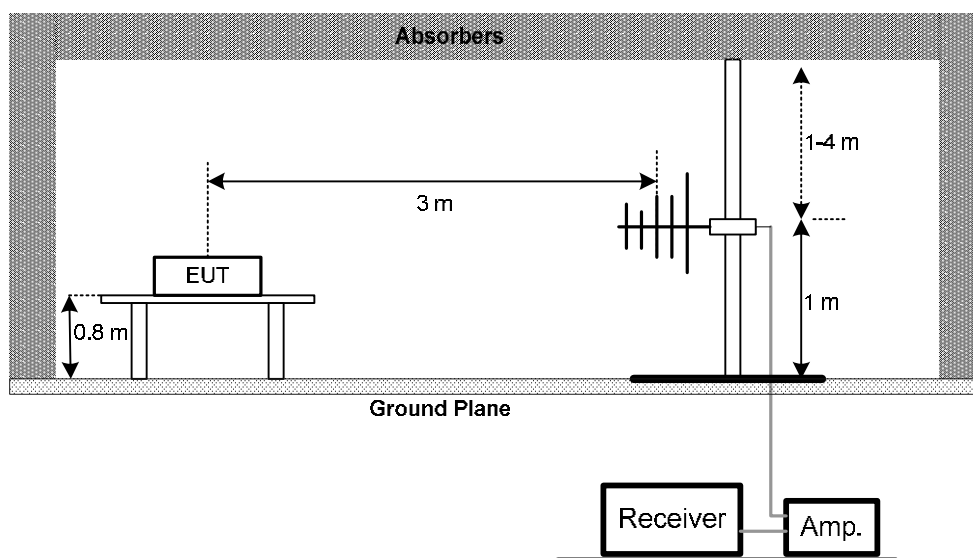

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

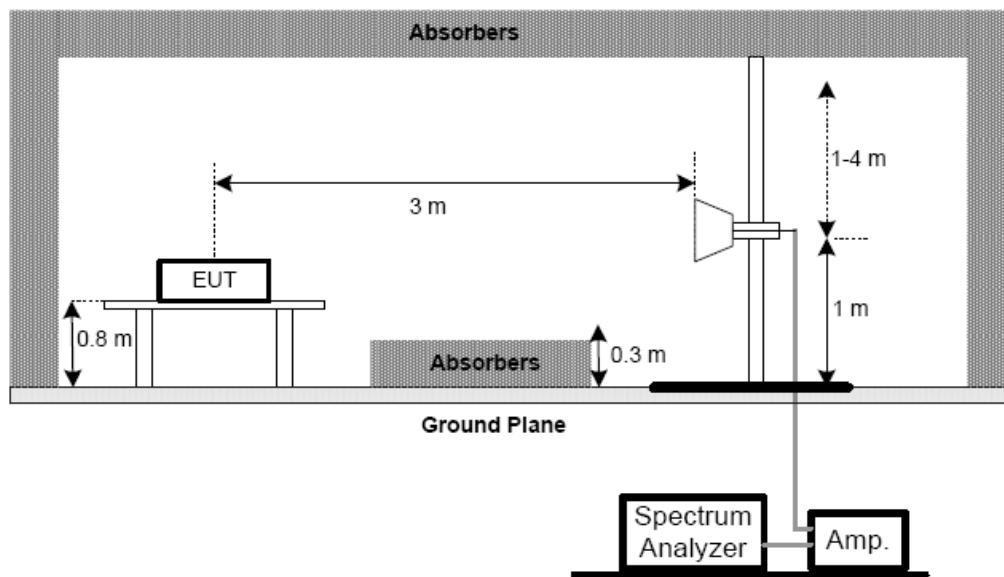

(C) For radiated emissions below 30MHz

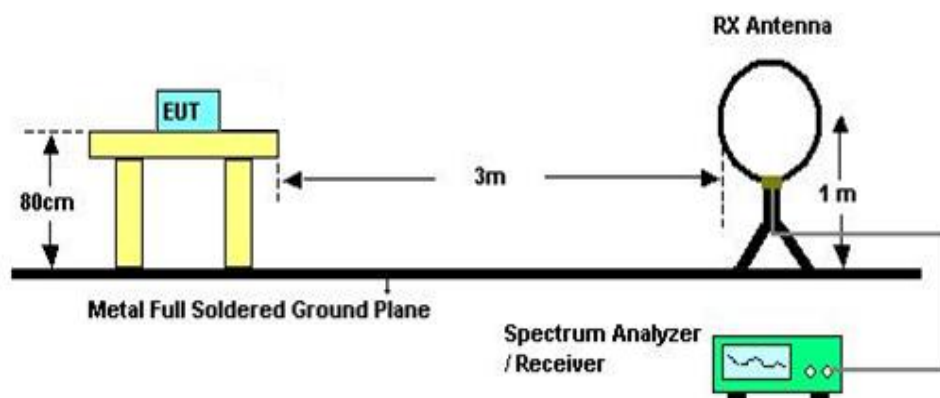

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

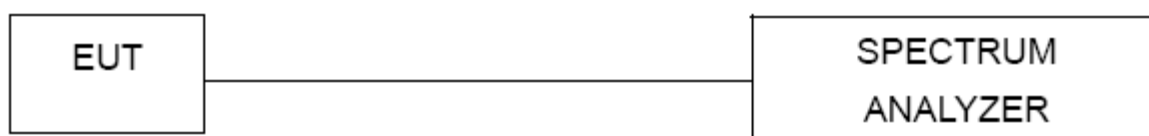

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

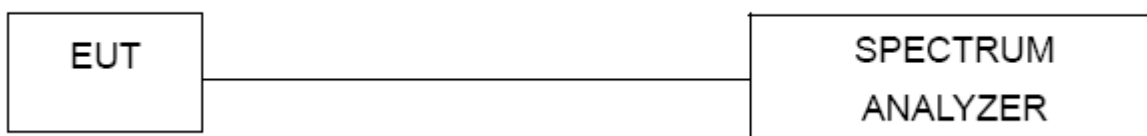

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101050	Jan. 15, 2015
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 15, 2015
3	EMI Test Receiver	R&S	ESCI	100082	Apr. 13, 2015
4	Measurement Software	EZ	EZ EMC (Version NB-02A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Oct. 27, 2015
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Jan. 13, 2015
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2015
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2015
5	Microflex Cable	EMC	S104-SMA	10m	May. 15, 2015
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2015
7	Test Cable	LMR	LMR-400	10m	May. 14, 2015
8	Test Cable	LMR	LMR-400	3m	May. 14, 2015
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2015
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jul. 10, 2015
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 22, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Oct. 27, 2015

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 08, 2015
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Aug. 08, 2015


Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Oct. 27, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Oct. 27, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.



10. EUT TEST PHOTO

Conducted Measurement Photos

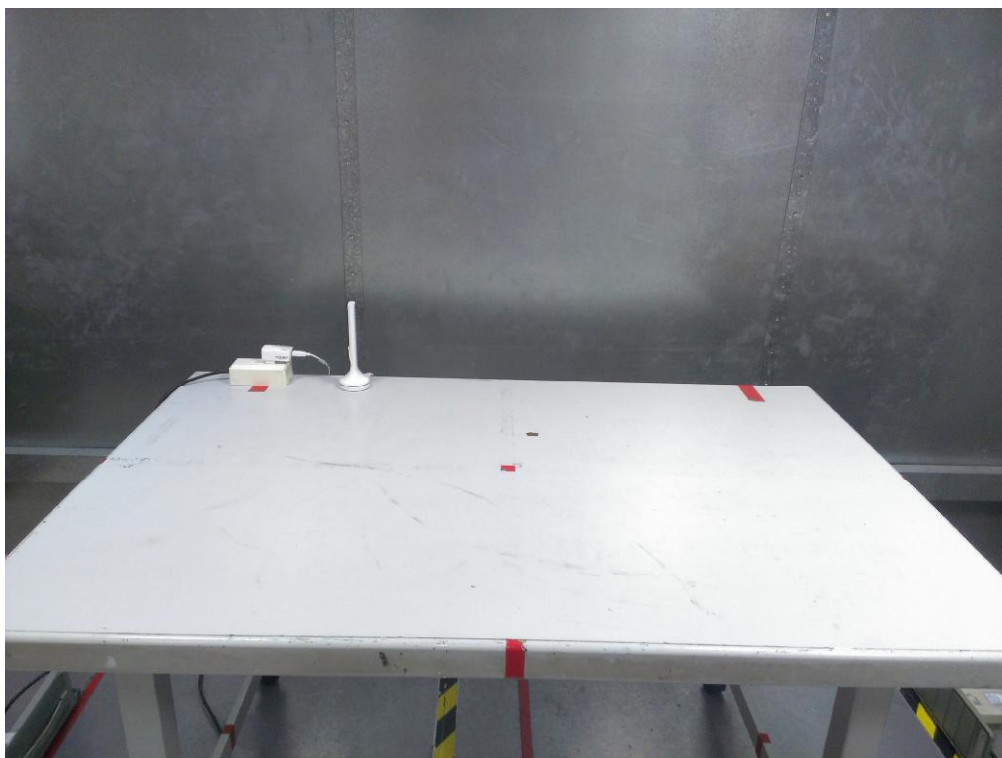



Radiated Measurement Photos

9KHz to 30MHz

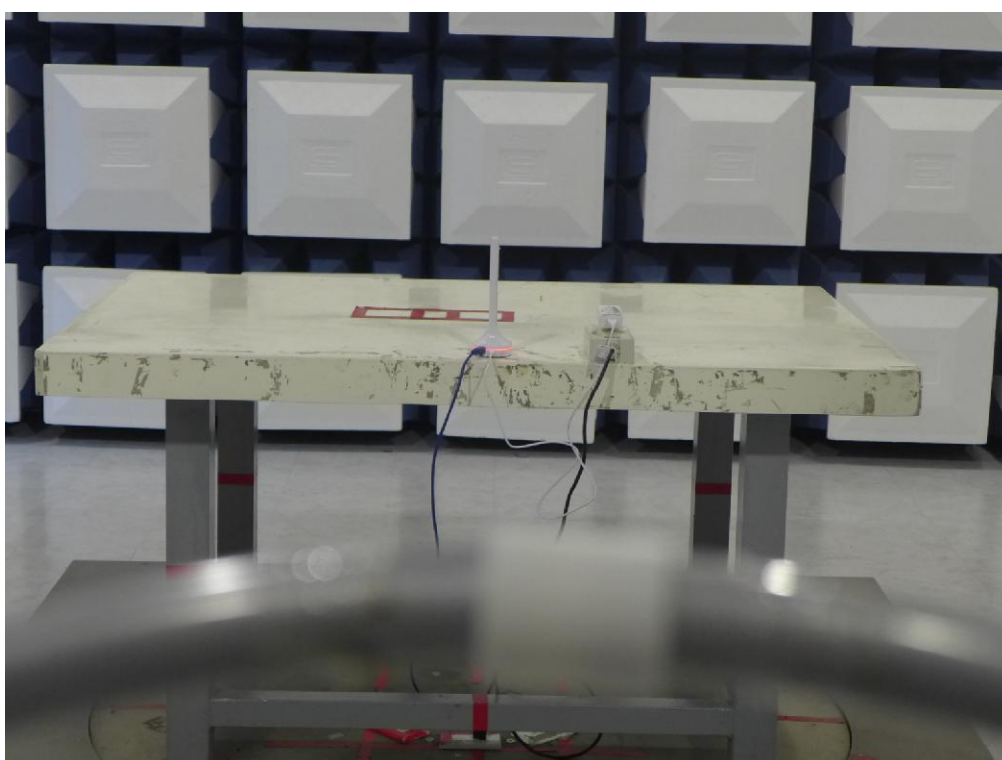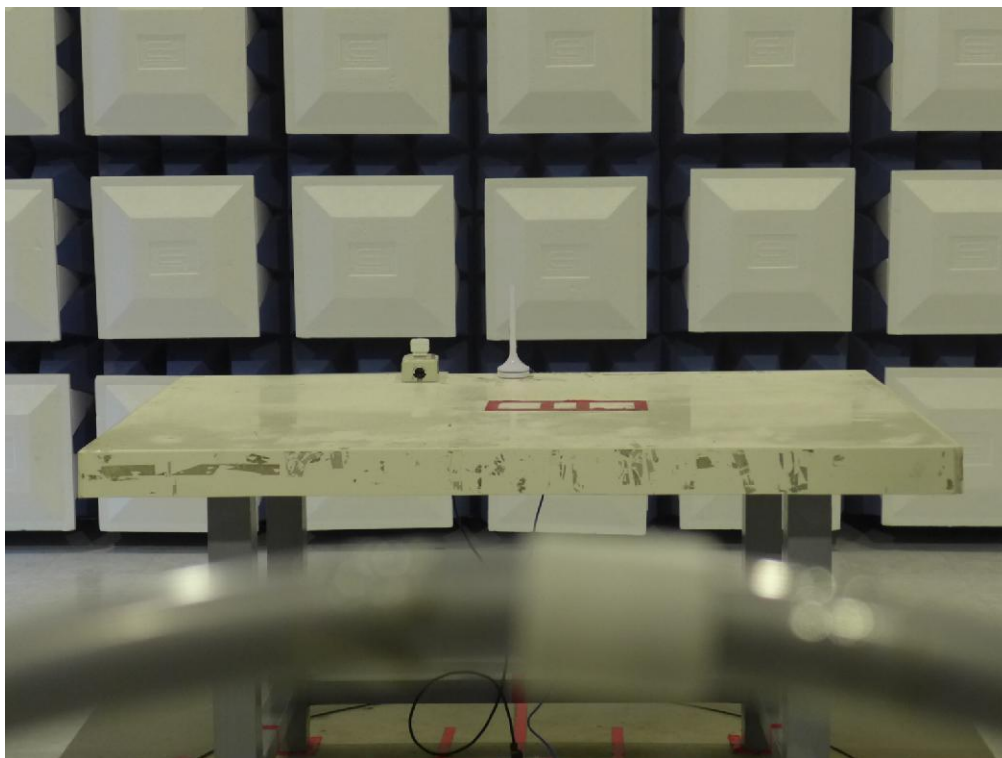



Radiated Measurement Photos

30MHz to 1000MHz

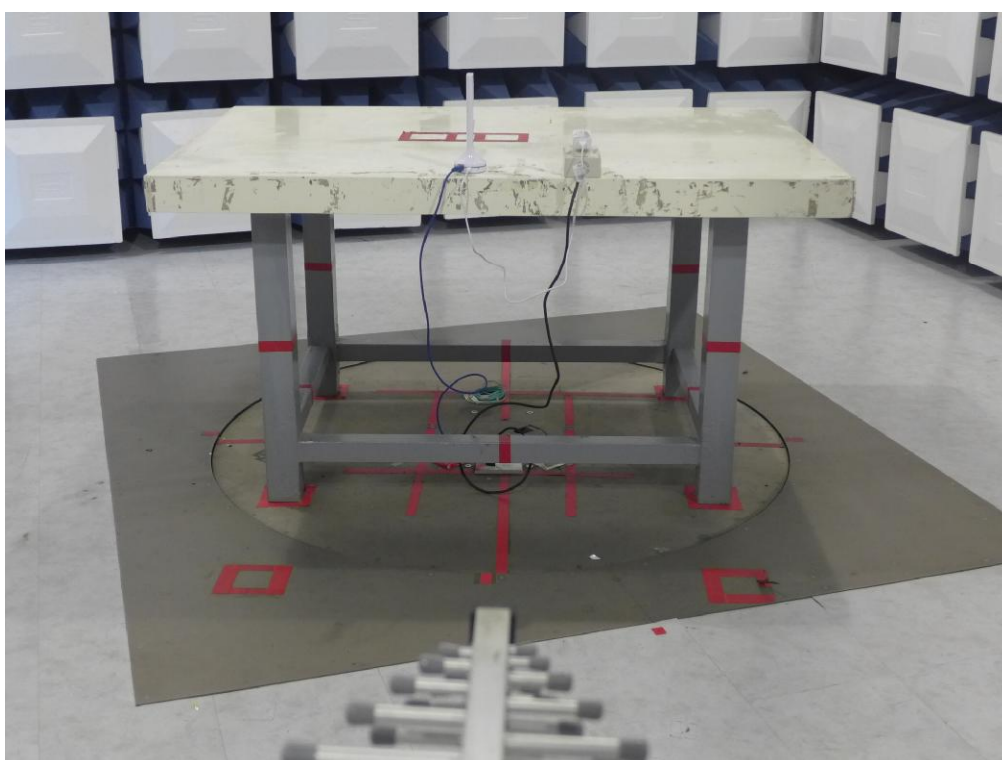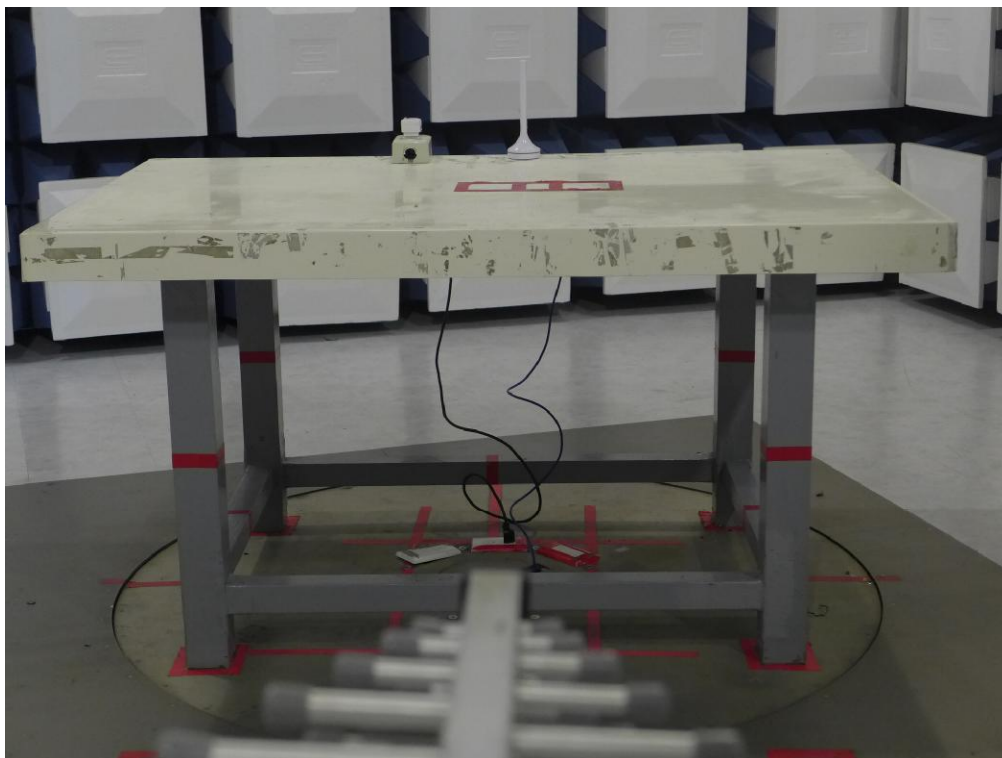

Radiated Measurement Photos


Above 1000MHz

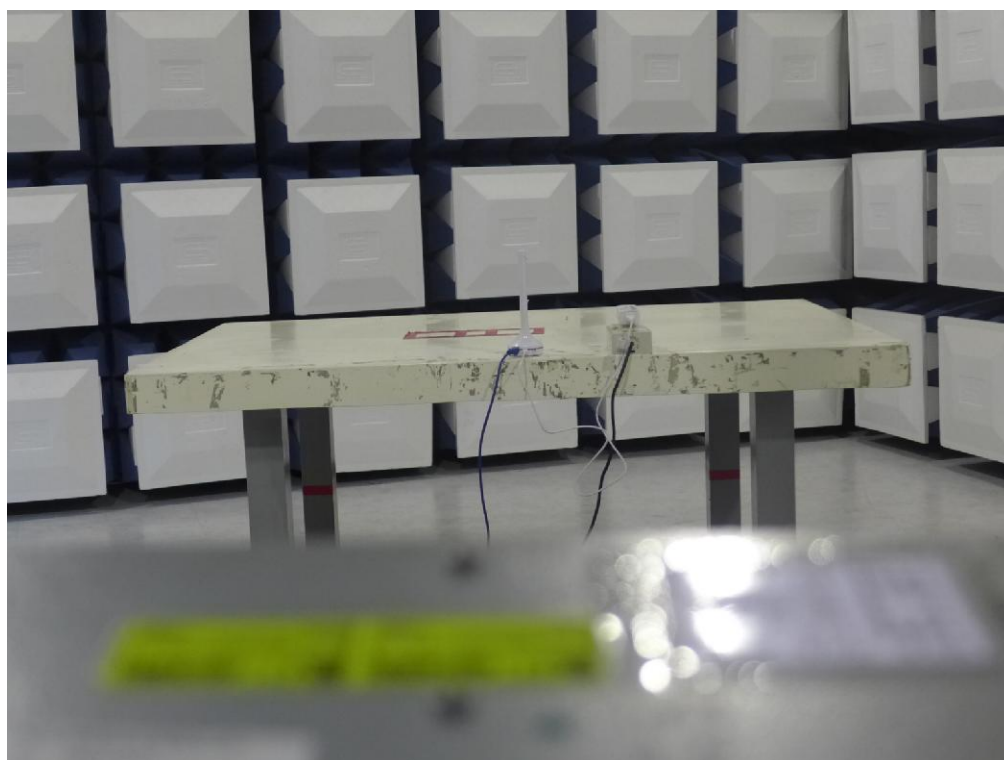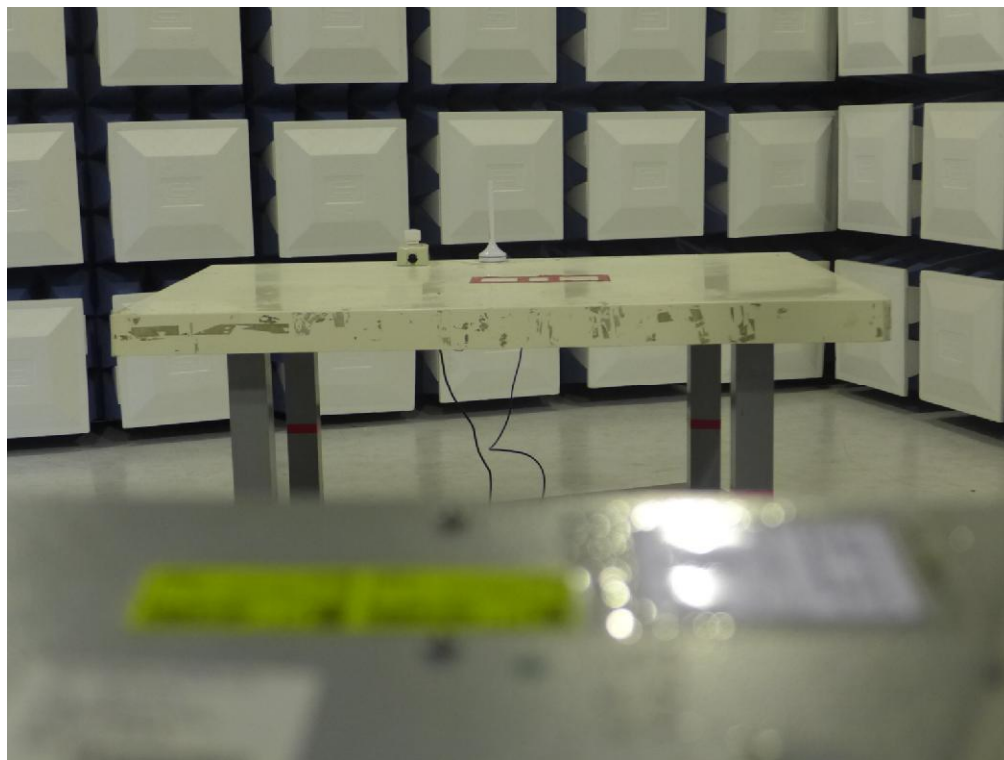

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX MODE


Line

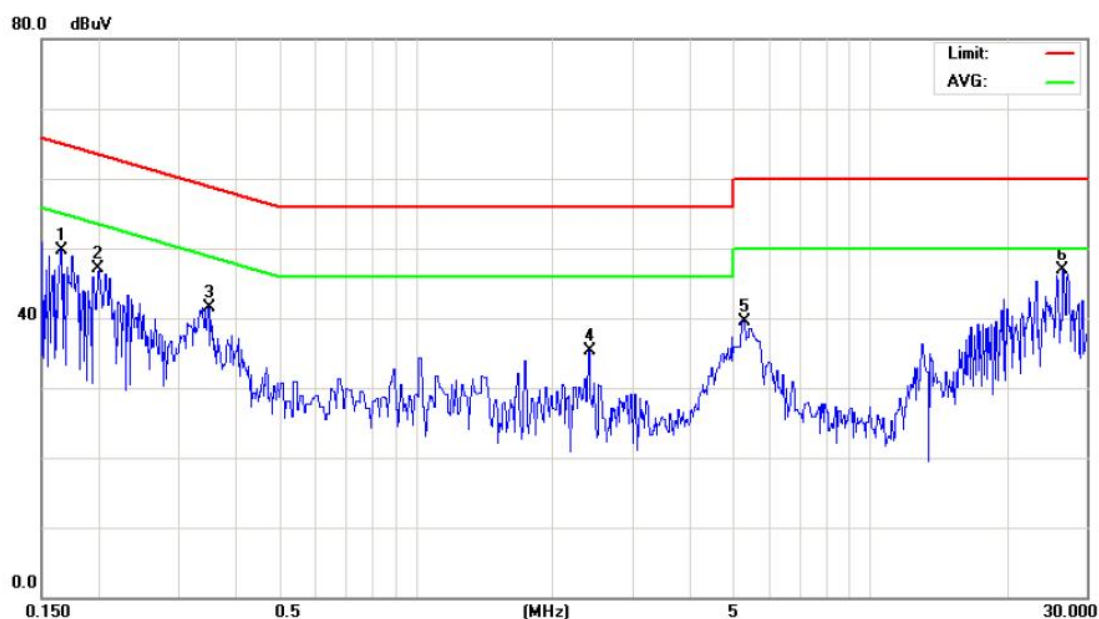

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1654	40.13	9.61	49.74	65.18	-15.44	peak	
2		0.1997	37.45	9.60	47.05	63.62	-16.57	peak	
3		0.3488	31.94	9.61	41.55	58.99	-17.44	peak	
4		2.3990	25.64	9.72	35.36	56.00	-20.64	peak	
5		5.3000	29.68	9.83	39.51	60.00	-20.49	peak	
6	*	26.5000	36.94	9.90	46.84	60.00	-13.16	peak	

Test Mode : TX MODE

Neutral

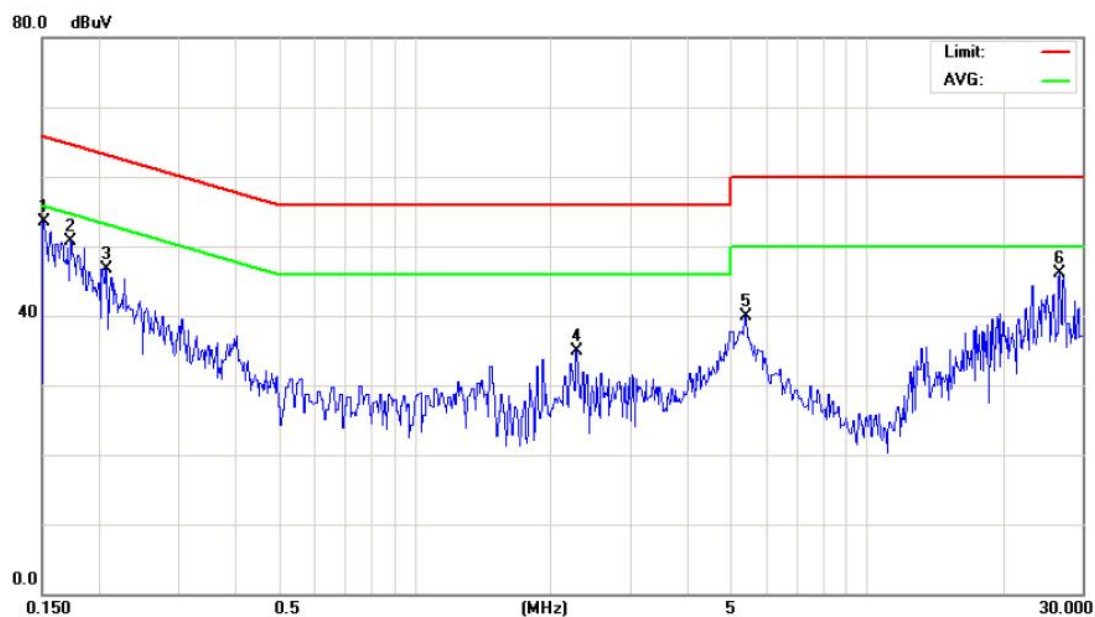

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1514	43.83	9.60	53.43	65.92	-12.49	peak	
2		0.1731	41.12	9.60	50.72	64.81	-14.09	peak	
3		0.2074	37.12	9.60	46.72	63.30	-16.58	peak	
4		2.2730	25.17	9.71	34.88	56.00	-21.12	peak	
5		5.4000	29.98	9.83	39.81	60.00	-20.19	peak	
6		26.6500	36.17	9.93	46.10	60.00	-13.90	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode


Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0120	0°	44.43	22.35	66.78	126.02	-59.24	PEAK
0.0120	0°	31.14	22.35	53.49	126.02	-72.53	AV
0.0256	0°	42.37	22.01	64.38	119.44	-55.06	PEAK
0.0256	0°	28.97	22.01	50.98	119.44	-68.46	AV
0.0394	0°	34.59	21.67	56.26	115.69	-59.44	PEAK
0.0394	0°	24.37	21.67	46.04	115.69	-69.66	AV
0.0625	0°	35.19	21.20	56.39	111.69	-55.30	PEAK
0.0625	0°	24.59	21.20	45.79	111.69	-65.90	AV
0.2562	0°	34.87	20.44	55.31	99.43	-44.12	PEAK
0.2562	0°	22.51	20.44	42.95	99.43	-56.48	AV
1.3300	0°	37.54	20.27	57.81	65.13	-7.32	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0141	90°	45.51	22.30	67.81	124.62	-56.81	PEAK
0.0141	90°	32.54	22.30	54.84	124.62	-69.78	AV
0.0251	90°	43.28	22.02	65.30	119.61	-54.31	PEAK
0.0251	90°	31.41	22.02	53.43	119.61	-66.18	AV
0.0392	90°	33.61	21.67	55.28	115.74	-60.46	PEAK
0.0392	90°	22.84	21.67	44.51	115.74	-71.23	AV
0.0625	90°	36.75	21.20	57.95	111.69	-53.74	PEAK
0.0625	90°	22.66	21.20	43.86	111.69	-67.83	AV
0.2683	90°	32.54	20.43	52.97	99.03	-46.06	PEAK
0.2683	90°	22.51	20.43	42.94	99.03	-56.09	AV
1.2440	90°	38.38	20.36	58.74	65.71	-6.97	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX B MODE CHANNEL 06


Vertical

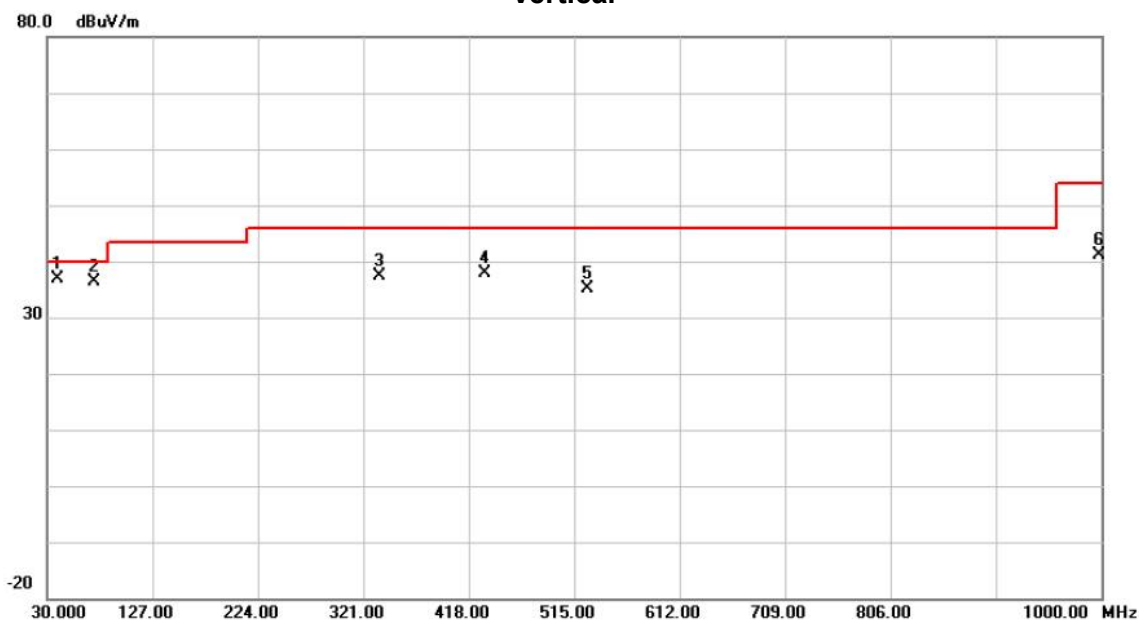

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	39.7000	51.02	-14.25	36.77	40.00	-3.23	peak	
2		73.6500	53.21	-16.93	36.28	40.00	-3.72	peak	
3		335.5500	49.89	-12.57	37.32	46.00	-8.68	peak	
4		432.5500	47.96	-10.16	37.80	46.00	-8.20	peak	
5		527.1250	43.84	-8.59	35.25	46.00	-10.75	peak	
6		997.5750	42.41	-1.30	41.11	54.00	-12.89	peak	

Test Mode: TX B MODE CHANNEL 06

Horizontal

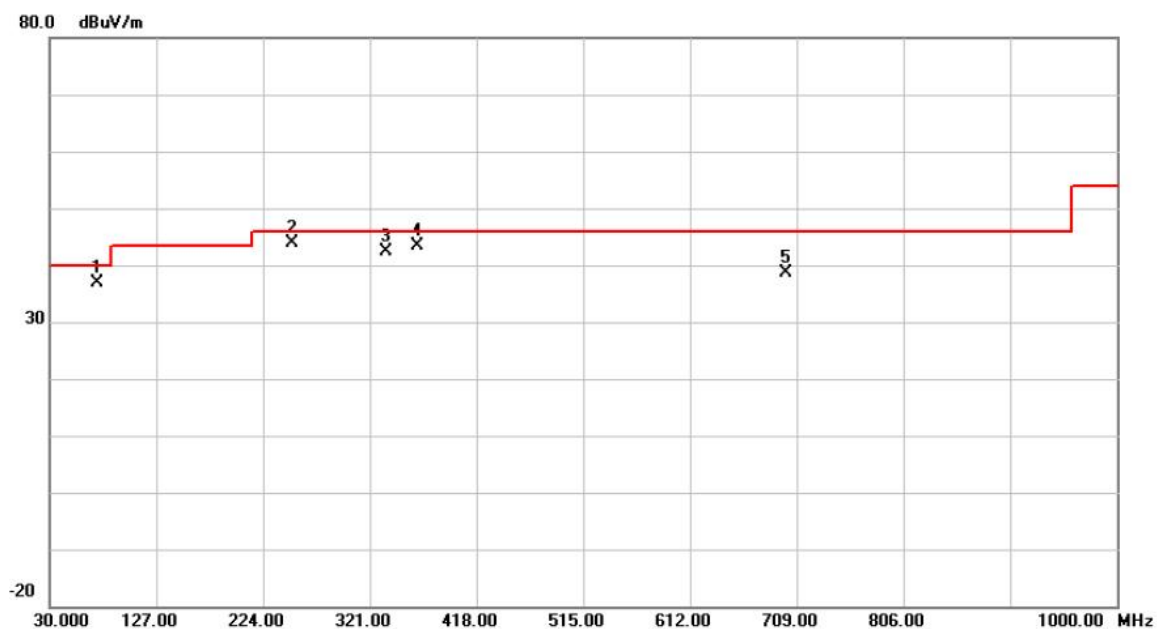

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		73.6500	53.90	-16.93	36.97	40.00	-3.03	peak	
2	*	250.6750	59.01	-15.10	43.91	46.00	-2.09	peak	
3		335.5500	55.00	-12.57	42.43	46.00	-3.57	peak	
4		364.6500	55.45	-11.97	43.48	46.00	-2.52	peak	
5		699.3000	44.02	-5.44	38.58	46.00	-7.42	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.985	43.98	6.78	50.76	74.00	-23.24	peak	
2		4823.985	36.04	6.78	42.82	54.00	-11.18	AVG	
3		7236.170	41.75	15.17	56.92	74.00	-17.08	peak	
4	*	7236.170	30.93	15.17	46.10	54.00	-7.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

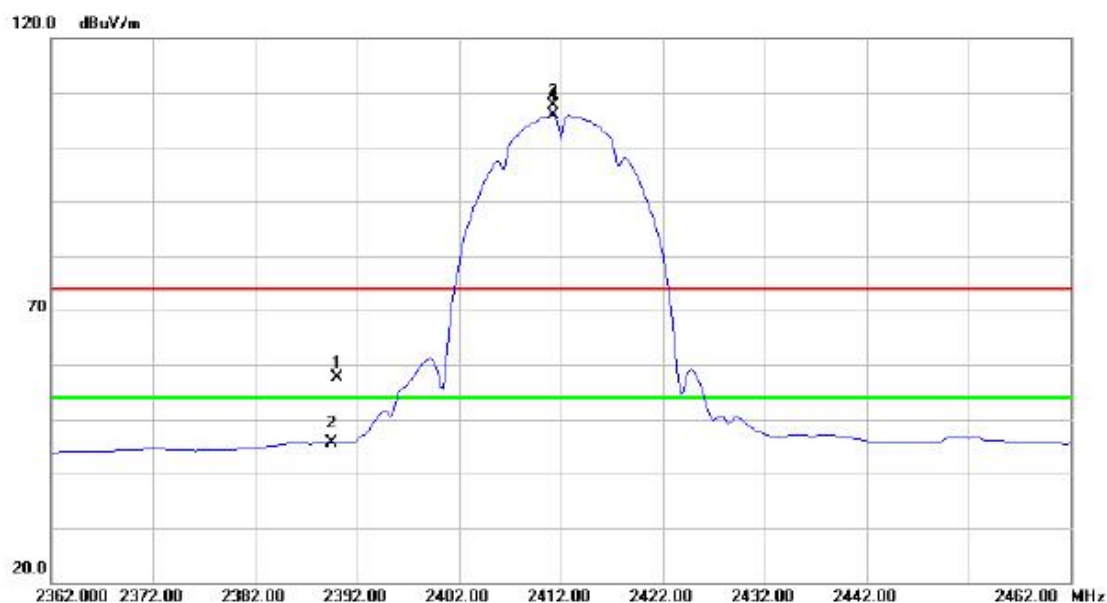

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	26.54	31.02	57.56	74.00	-16.44	peak	
2		2390.000	14.64	31.02	45.66	54.00	-8.34	AVG	
3	X	2411.250	76.63	31.12	107.75	74.00	33.75	peak	No Limit
4	*	2411.250	74.75	31.12	105.87	54.00	51.87	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal

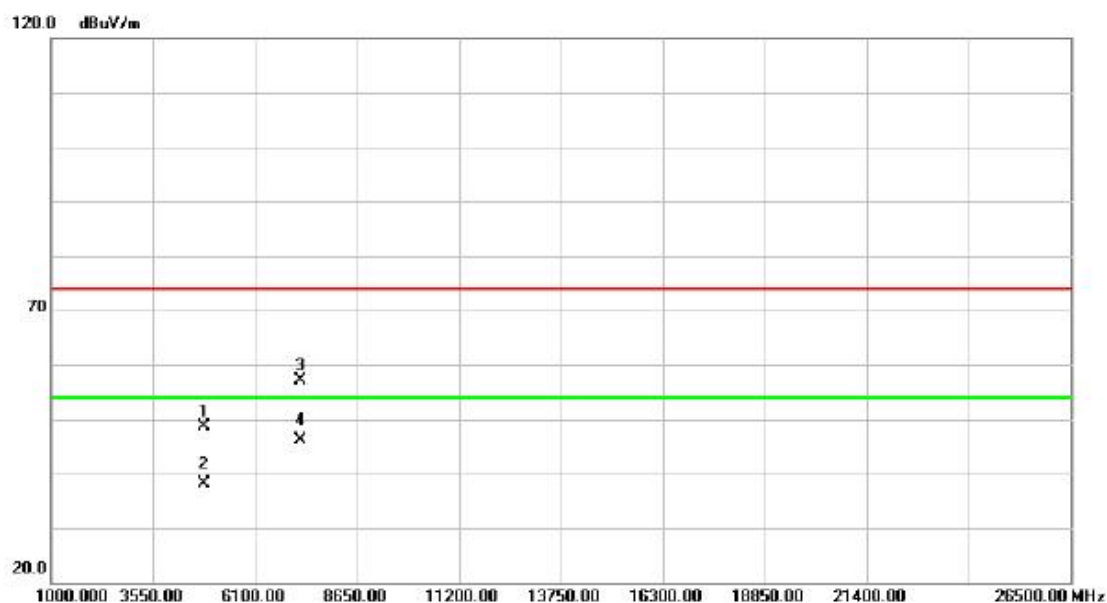

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.005	41.76	6.78	48.54	74.00	-25.46	peak	
2		4824.005	31.39	6.78	38.17	54.00	-15.83	AVG	
3		7236.035	41.91	15.17	57.08	74.00	-16.92	peak	
4	*	7236.035	30.88	15.17	46.05	54.00	-7.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

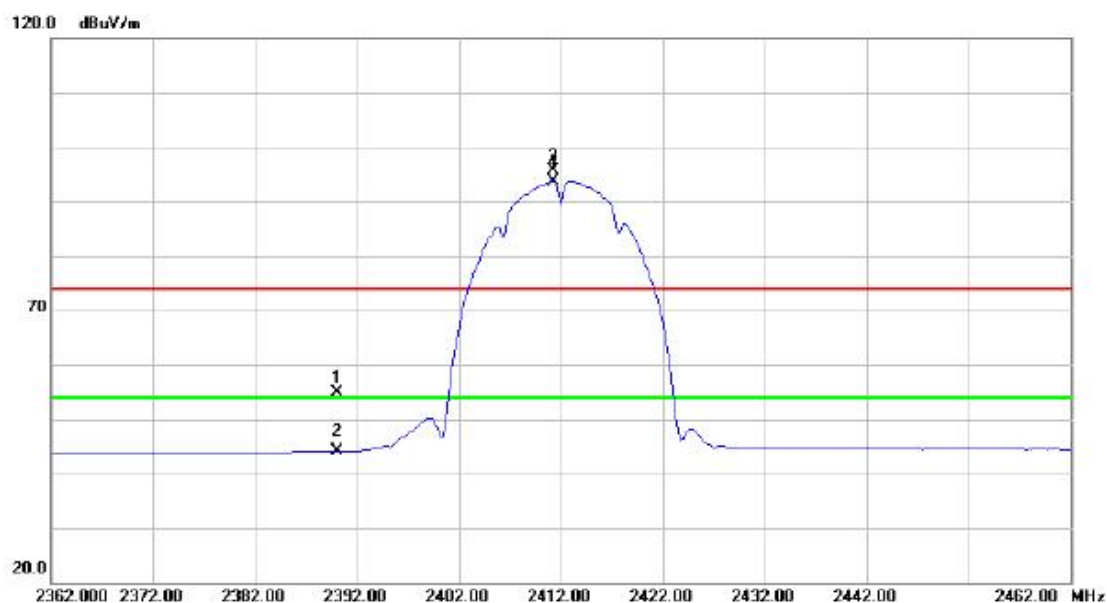

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.85	31.02	54.87	74.00	-19.13	peak	
2		2390.000	13.09	31.02	44.11	54.00	-9.89	AVG	
3	X	2411.250	64.43	31.12	95.55	74.00	21.55	peak	No Limit
4	*	2411.250	62.53	31.12	93.65	54.00	39.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.985	45.40	6.78	52.18	74.00	-21.82	peak	
2		4873.985	39.54	6.78	46.32	54.00	-7.68	AVG	
3		7311.180	41.31	15.57	56.88	74.00	-17.12	peak	
4	*	7311.180	30.85	15.57	46.42	54.00	-7.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

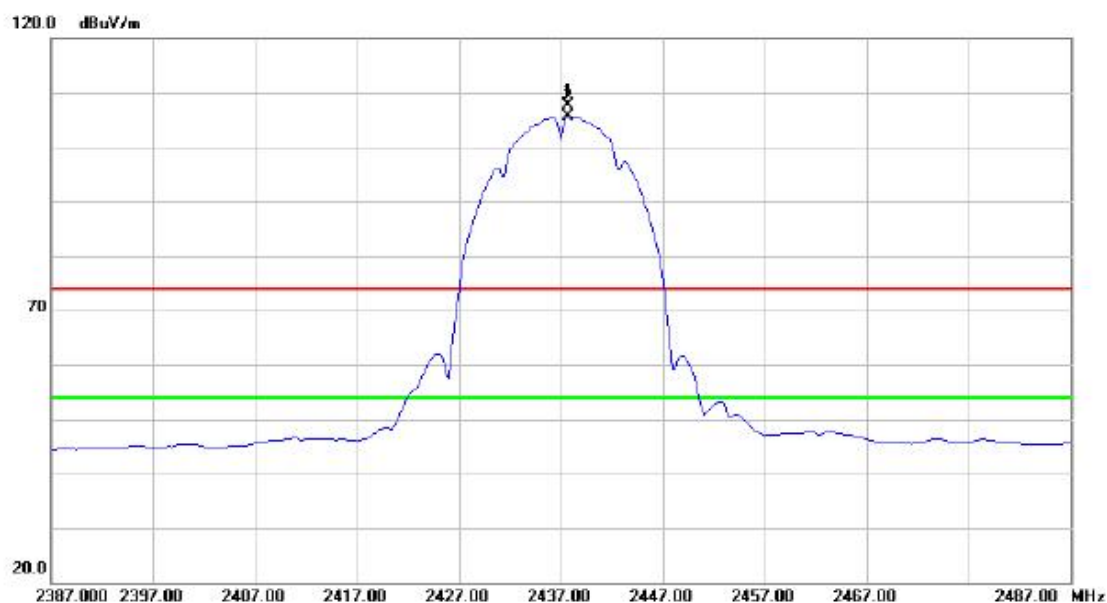

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.750	76.27	31.25	107.52	74.00	33.52	peak	No Limit
2	*	2437.750	74.35	31.25	105.60	54.00	51.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

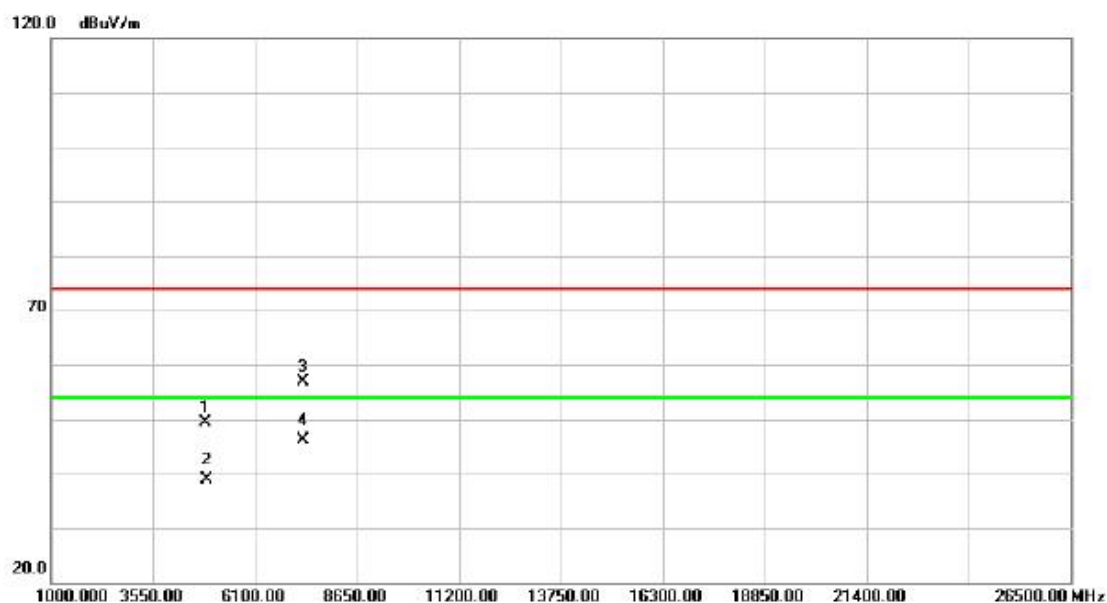

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.065	42.52	6.78	49.30	74.00	-24.70	peak	
2		4874.065	32.09	6.78	38.87	54.00	-15.13	AVG	
3		7311.050	41.20	15.57	56.77	74.00	-17.23	peak	
4	*	7311.050	30.67	15.57	46.24	54.00	-7.76	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

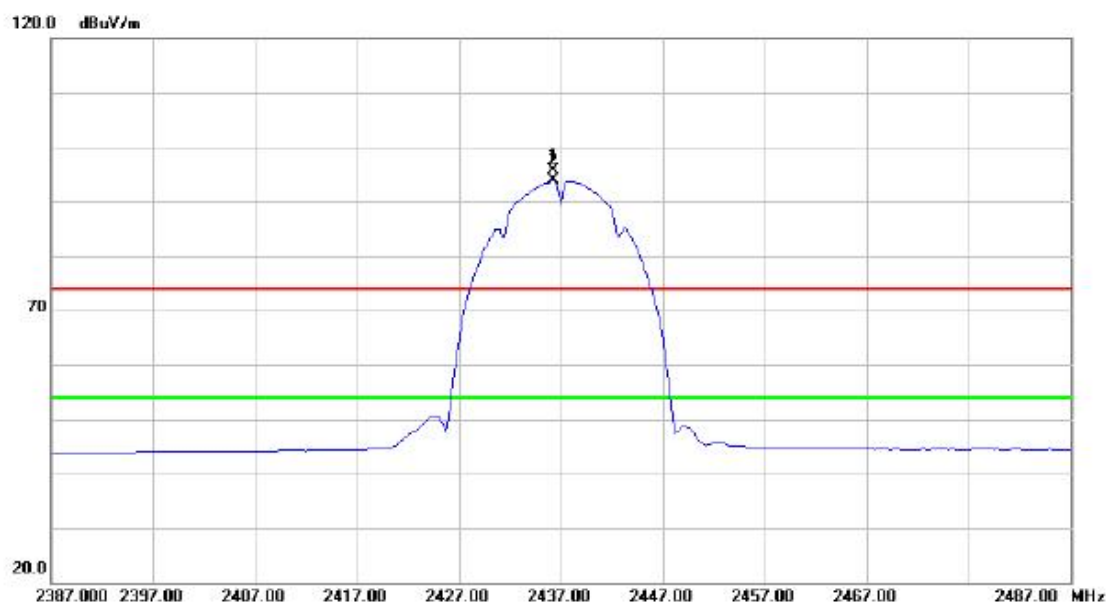

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2436.250	64.43	31.24	95.67	74.00	21.67	peak	No Limit
2	*	2436.250	62.55	31.24	93.79	54.00	39.79	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

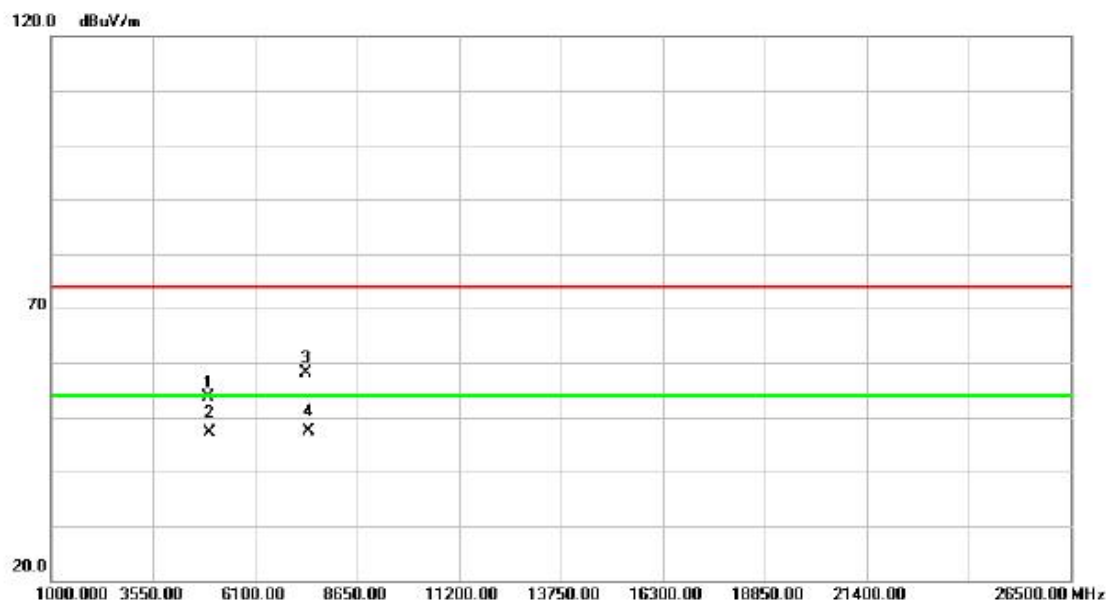

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	46.77	6.77	53.54	74.00	-20.46	peak	
2		4924.000	40.46	6.77	47.23	54.00	-6.77	AVG	
3		7386.040	42.22	15.98	58.20	74.00	-15.80	peak	
4	*	7386.040	31.49	15.98	47.47	54.00	-6.53	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

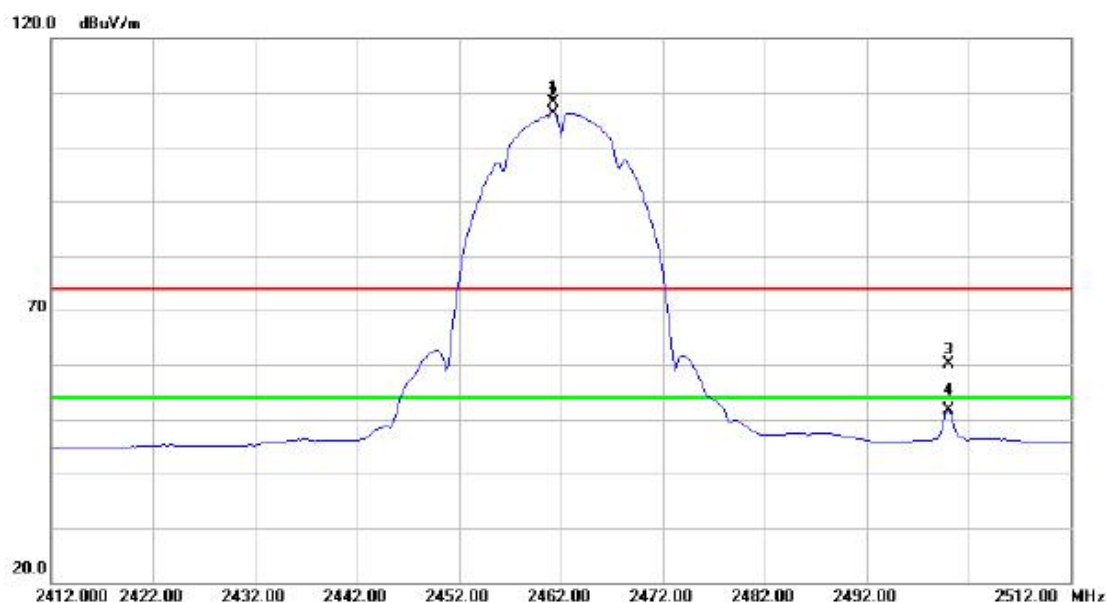

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.250	76.79	31.36	108.15	74.00	34.15	peak	No Limit
2	*	2461.250	74.89	31.36	106.25	54.00	52.25	AVG	No Limit
3		2500.000	28.68	31.54	60.22	74.00	-13.78	peak	
4		2500.000	20.14	31.54	51.68	54.00	-2.32	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

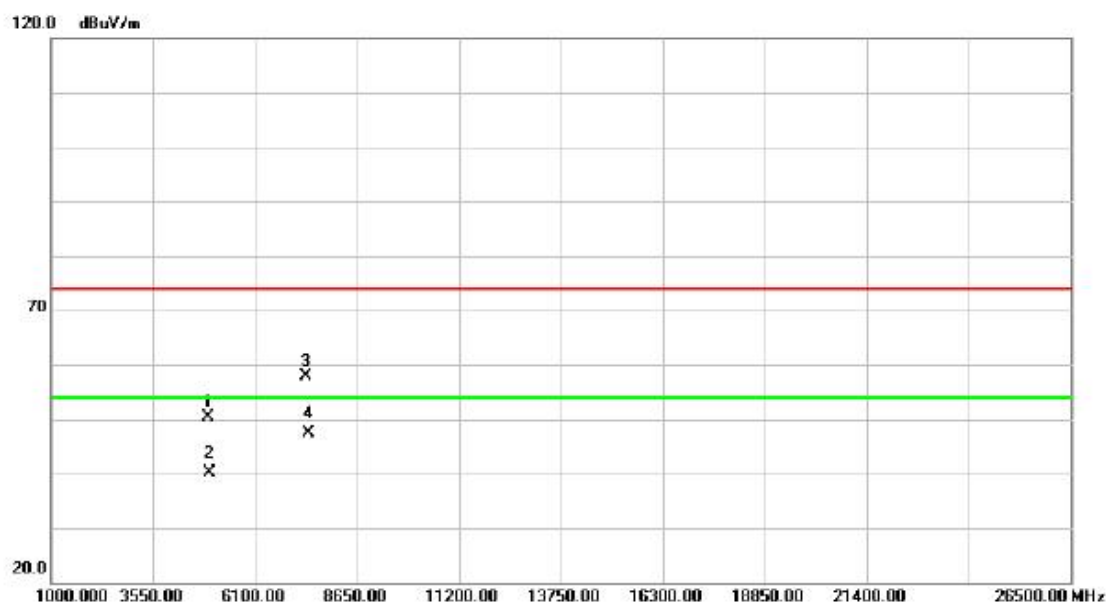

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.980	43.53	6.77	50.30	74.00	-23.70	peak	
2		4923.980	33.39	6.77	40.16	54.00	-13.84	AVG	
3		7386.085	41.89	15.98	57.87	74.00	-16.13	peak	
4	*	7386.085	31.43	15.98	47.41	54.00	-6.59	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

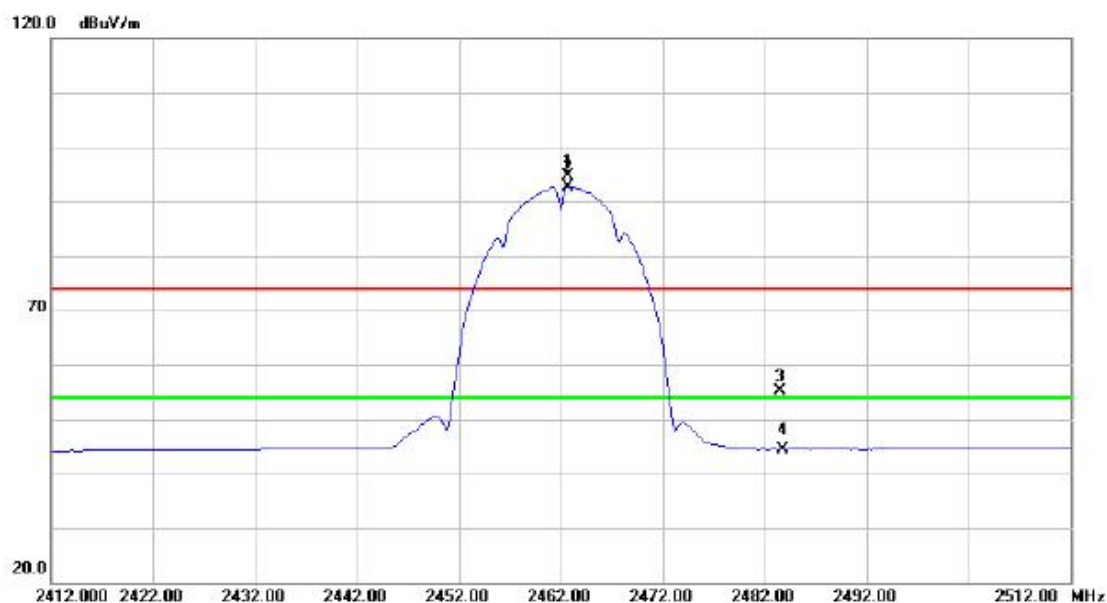

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.750	63.27	31.36	94.63	74.00	20.63	peak	No Limit
2	*	2462.750	61.32	31.36	92.68	54.00	38.68	AVG	No Limit
3		2483.500	23.79	31.46	55.25	74.00	-18.75	peak	
4		2483.500	13.03	31.46	44.49	54.00	-9.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

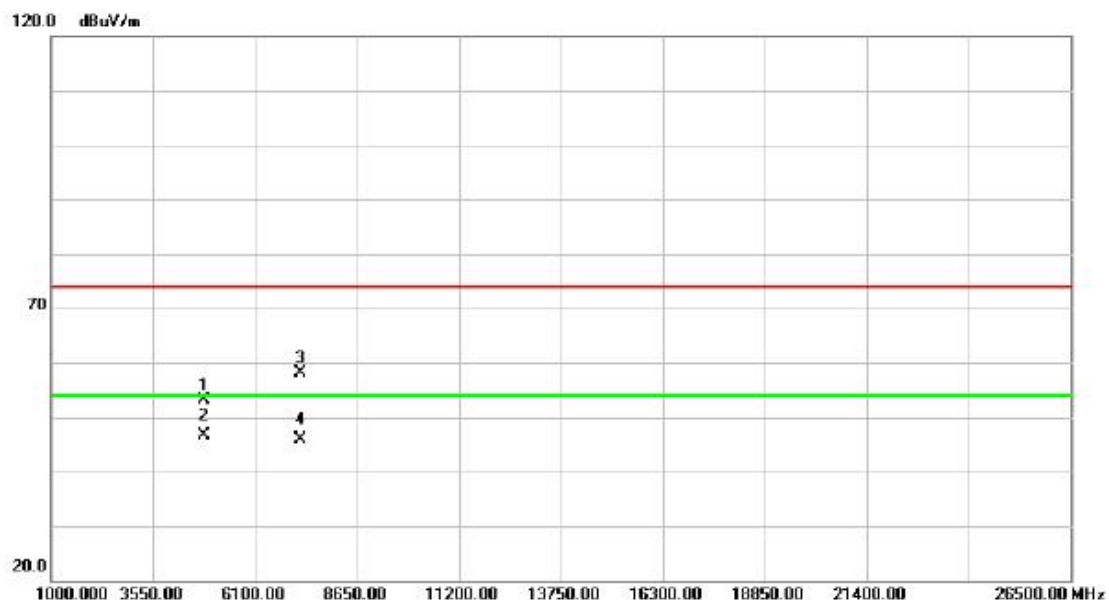

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4823.995	46.30	6.78	53.08	74.00	-20.92	peak	
2	*	4823.995	39.87	6.78	46.65	54.00	-7.35	AVG	
3		7236.005	42.90	15.17	58.07	74.00	-15.93	peak	
4		7236.005	30.81	15.17	45.98	54.00	-8.02	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

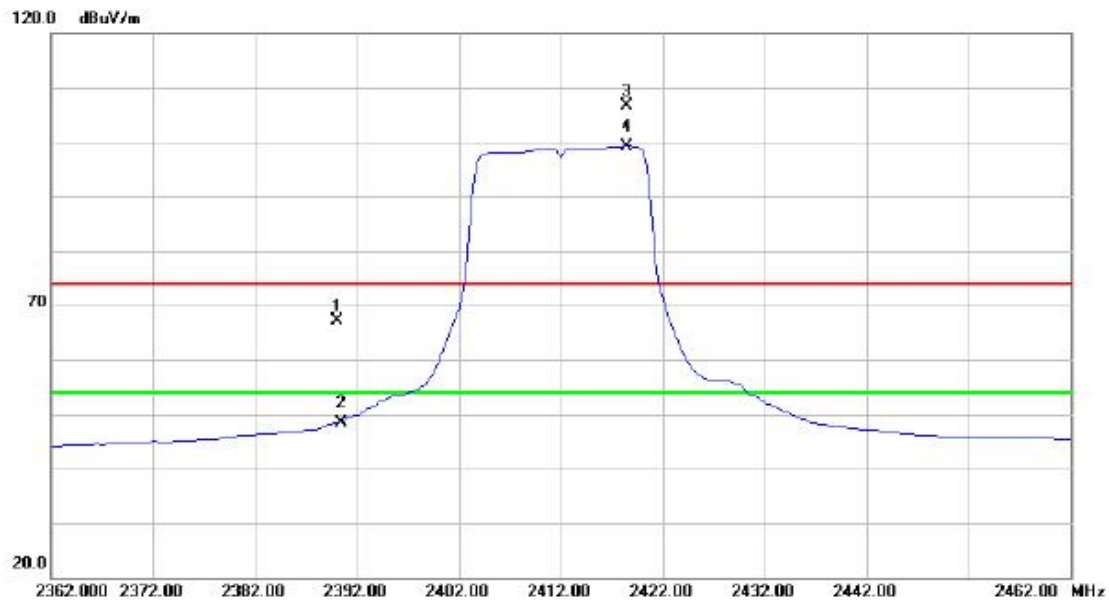

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	36.10	31.02	67.12	74.00	-6.88	peak	
2		2390.000	17.43	31.02	48.45	54.00	-5.55	AVG	
3	X	2418.500	75.42	31.15	106.57	74.00	32.57	peak	No Limit
4	*	2418.500	68.10	31.15	99.25	54.00	45.25	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

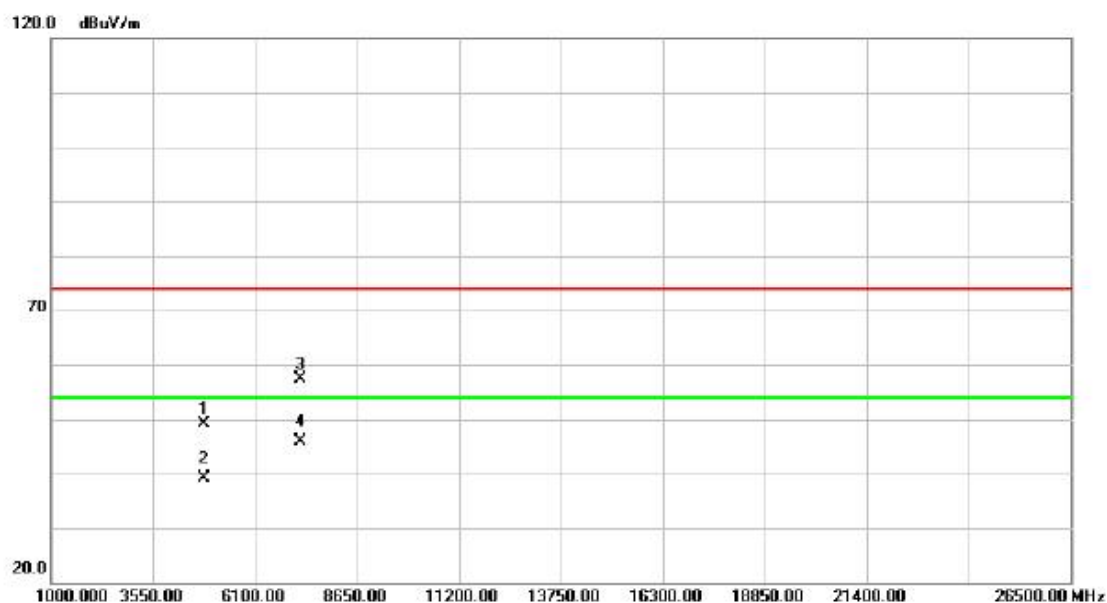

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.015	42.33	6.78	49.11	74.00	-24.89	peak	
2		4824.015	32.41	6.78	39.19	54.00	-14.81	AVG	
3		7235.855	42.22	15.17	57.39	74.00	-16.61	peak	
4	*	7235.855	30.82	15.17	45.99	54.00	-8.01	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

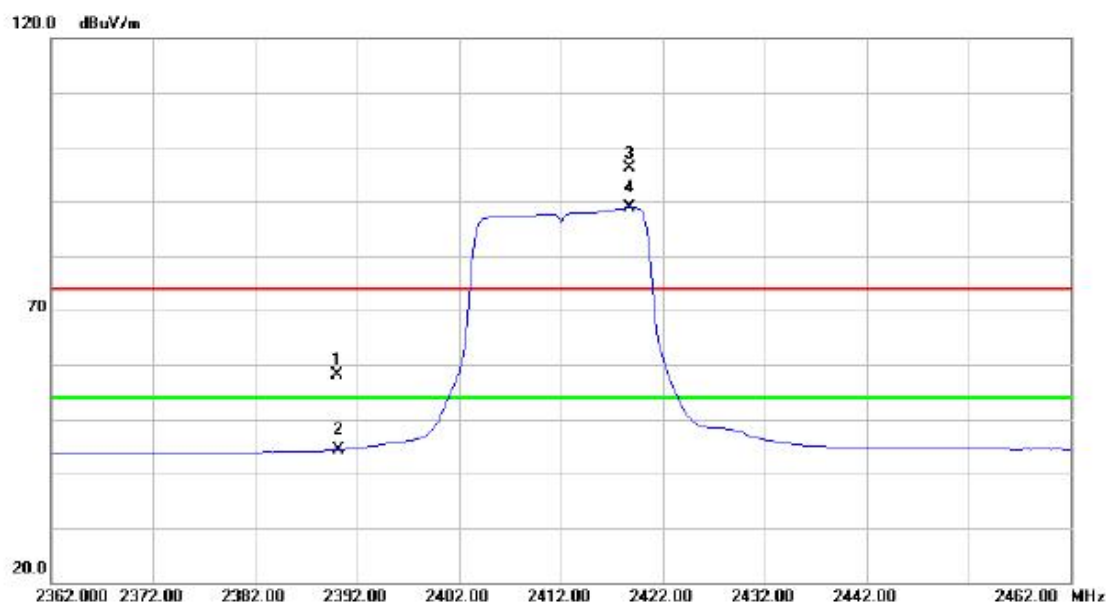

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	27.20	31.02	58.22	74.00	-15.78	peak	
2		2390.000	13.33	31.02	44.35	54.00	-9.65	AVG	
3	X	2418.750	65.10	31.15	96.25	74.00	22.25	peak	No Limit
4	*	2418.750	57.63	31.15	88.78	54.00	34.78	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.962	46.54	6.78	53.32	74.00	-20.68	peak	
2	*	4873.962	41.14	6.78	47.92	54.00	-6.08	AVG	
3		7311.025	41.23	15.57	56.80	74.00	-17.20	peak	
4		7311.025	30.72	15.57	46.29	54.00	-7.71	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

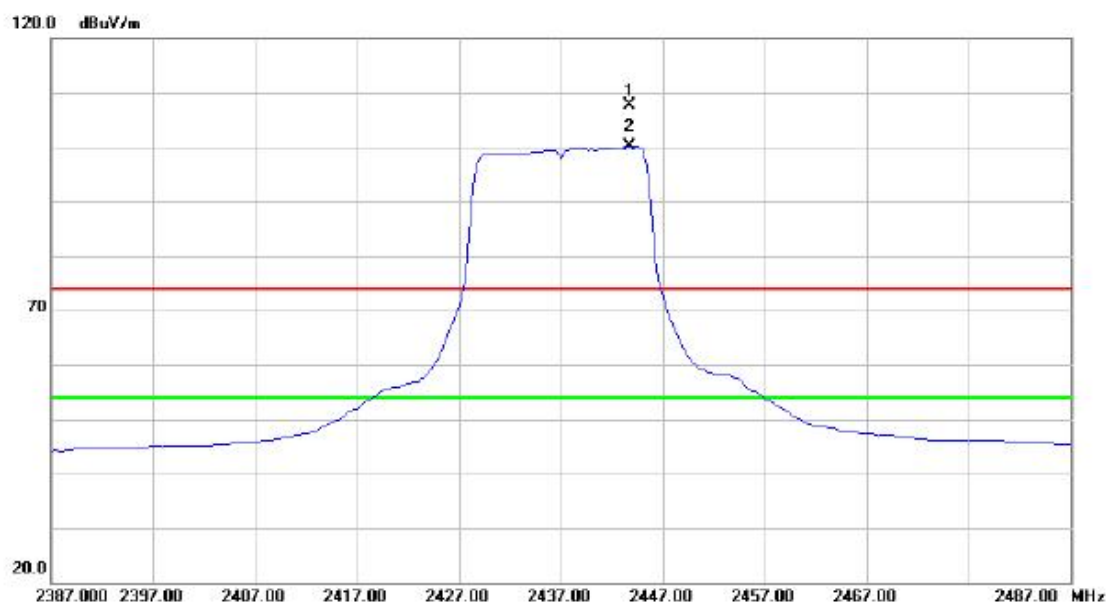

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2443.750	76.30	31.28	107.58	74.00	33.58	peak	No Limit
2	*	2443.750	68.84	31.28	100.12	54.00	46.12	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

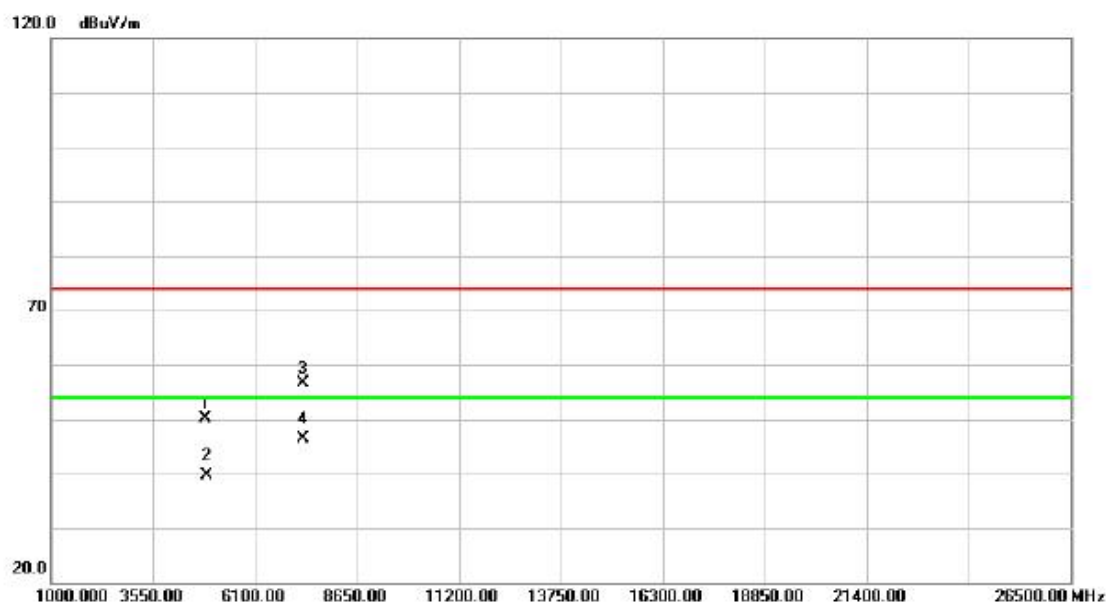

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4873.975	43.27	6.78	50.05	74.00	-23.95	peak	
2		4873.975	32.73	6.78	39.51	54.00	-14.49	AVG	
3		7311.200	40.99	15.57	56.56	74.00	-17.44	peak	
4	*	7311.200	30.75	15.57	46.32	54.00	-7.68	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

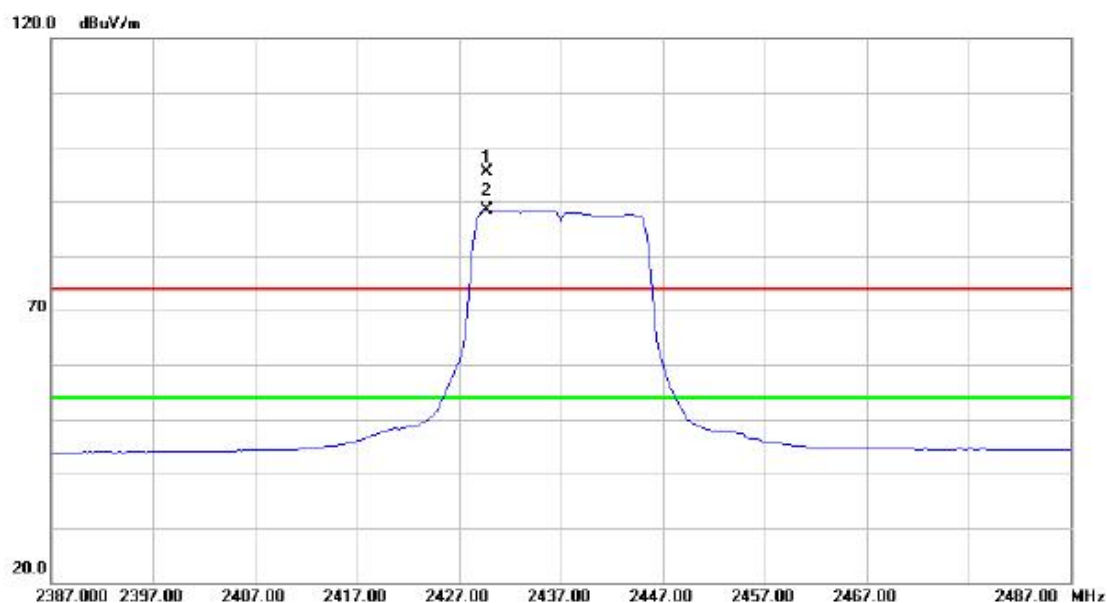

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2429.750	64.27	31.21	95.48	74.00	21.48	peak	No Limit
2	*	2429.750	57.16	31.21	88.37	54.00	34.37	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	46.64	6.77	53.41	74.00	-20.59	peak	
2		4924.000	40.04	6.77	46.81	54.00	-7.19	AVG	
3		7385.780	42.89	15.98	58.87	74.00	-15.13	peak	
4	*	7385.780	31.38	15.98	47.36	54.00	-6.64	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

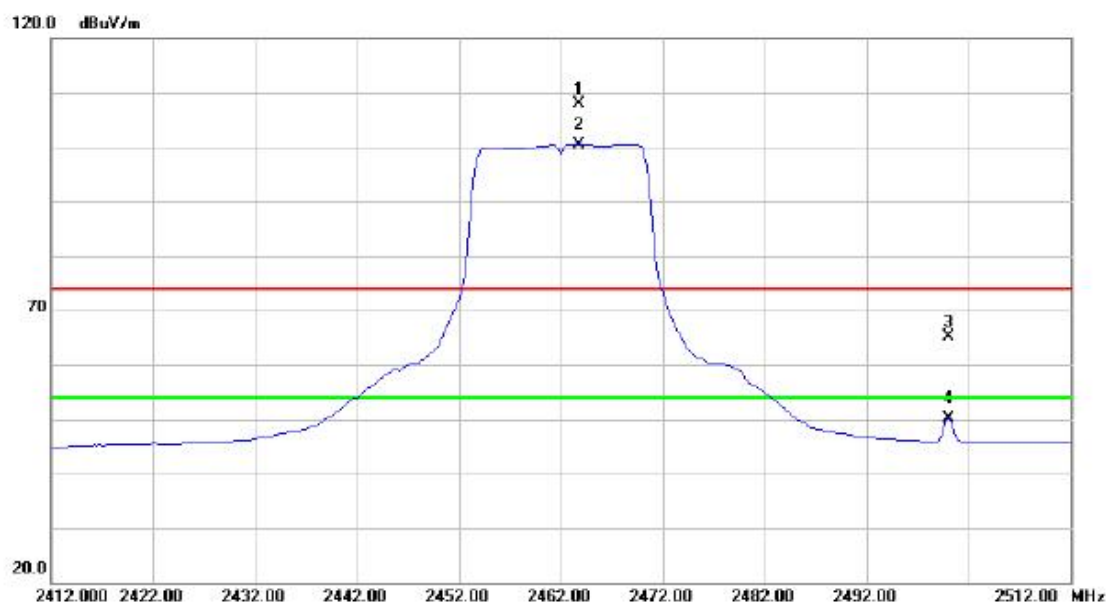

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.750	76.50	31.37	107.87	74.00	33.87	peak	No Limit
2	*	2463.750	69.07	31.37	100.44	54.00	46.44	AVG	No Limit
3		2500.000	33.50	31.54	65.04	74.00	-8.96	peak	
4		2500.000	18.68	31.54	50.22	54.00	-3.78	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

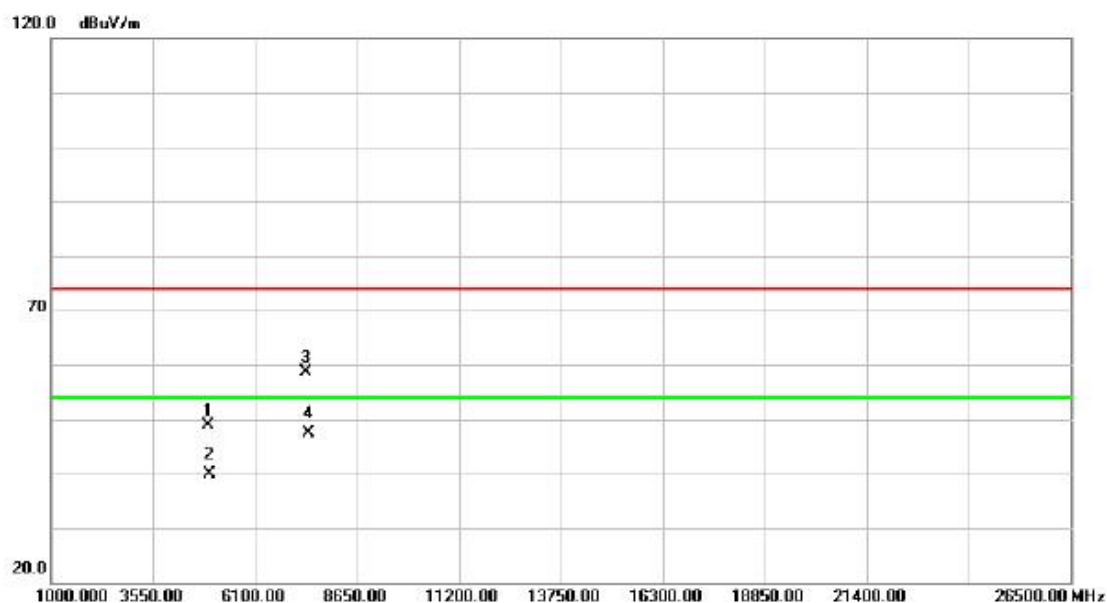

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.980	42.04	6.77	48.81	74.00	-25.19	peak	
2		4923.980	33.15	6.77	39.92	54.00	-14.08	AVG	
3		7386.555	42.75	15.98	58.73	74.00	-15.27	peak	
4	*	7386.555	31.30	15.98	47.28	54.00	-6.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

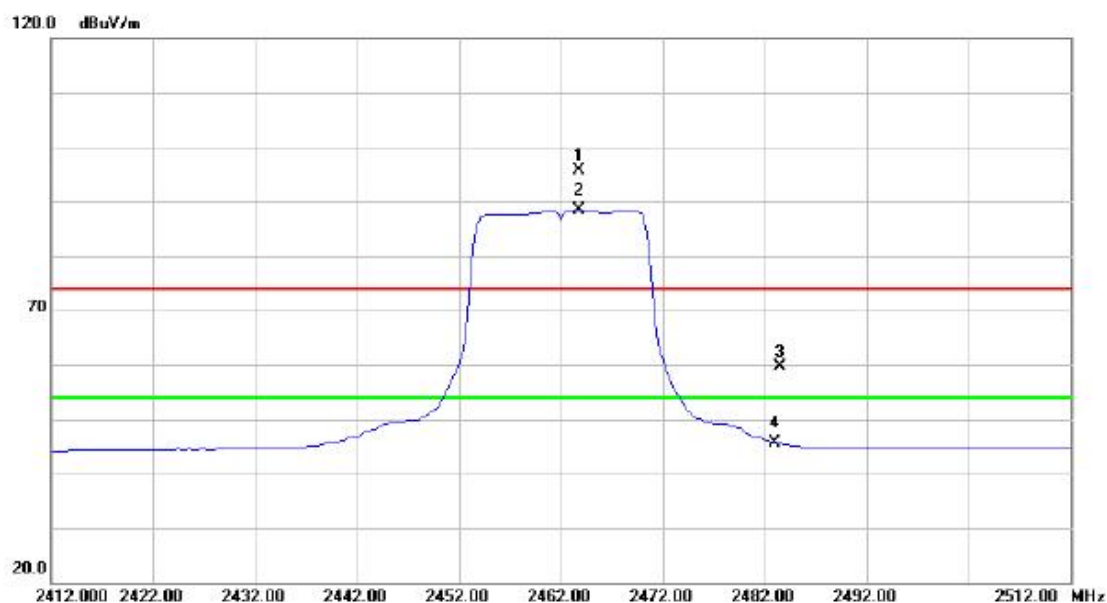

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.750	64.30	31.37	95.67	74.00	21.67	peak	No Limit
2	*	2463.750	56.94	31.37	88.31	54.00	34.31	AVG	No Limit
3		2483.500	28.20	31.46	59.66	74.00	-14.34	peak	
4		2483.500	14.08	31.46	45.54	54.00	-8.46	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

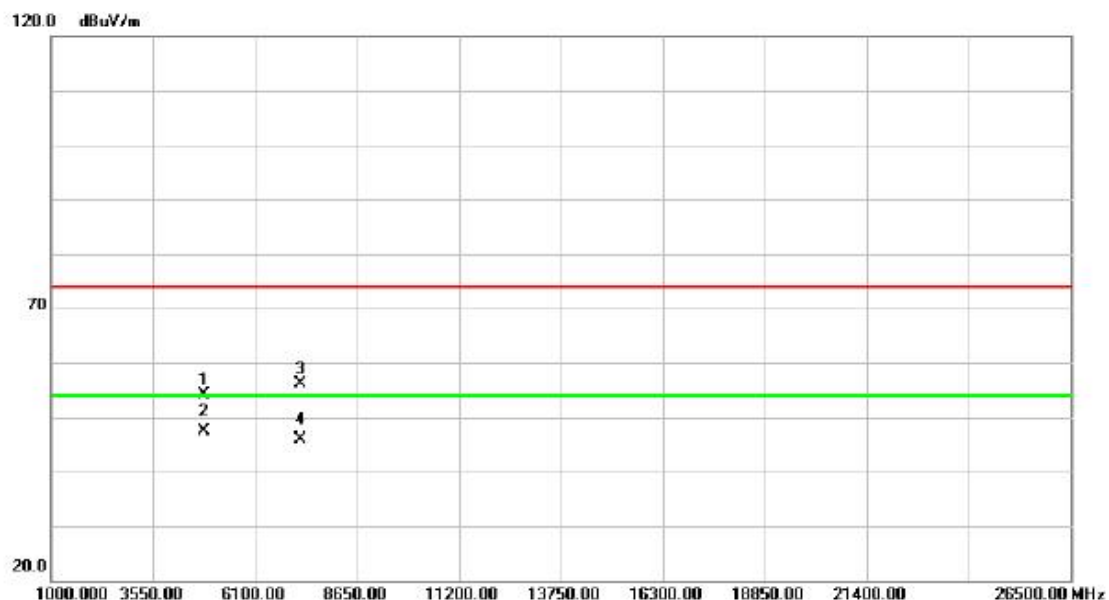

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4823.995	47.25	6.78	54.03	74.00	-19.97	peak	
2	*	4823.995	40.71	6.78	47.49	54.00	-6.51	AVG	
3		7236.020	40.88	15.17	56.05	74.00	-17.95	peak	
4		7236.020	30.74	15.17	45.91	54.00	-8.09	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

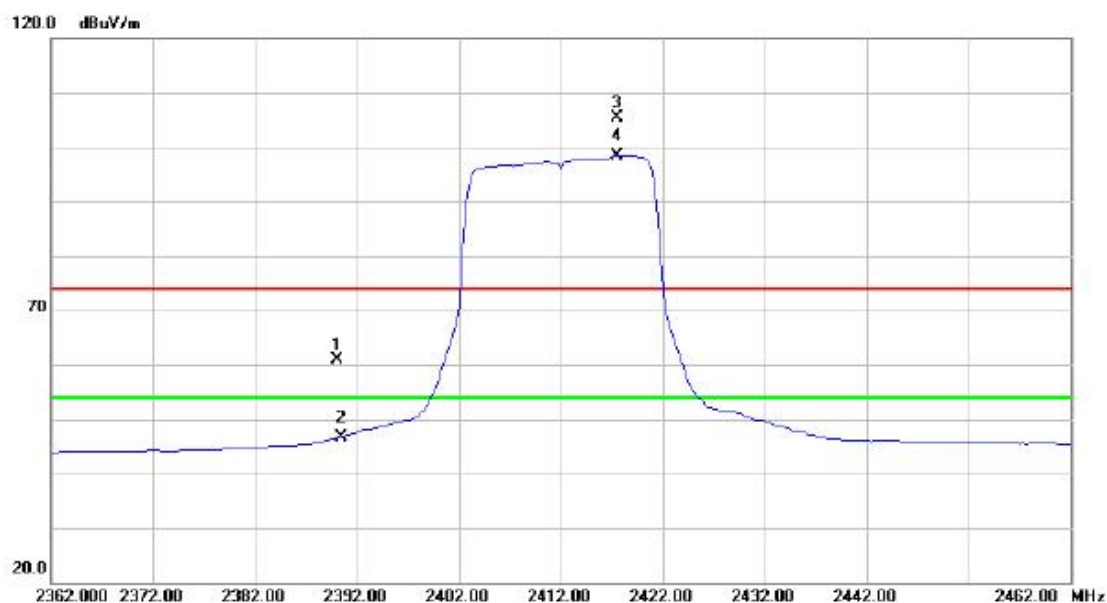

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	29.75	31.02	60.77	74.00	-13.23	peak	
2		2390.000	15.56	31.02	46.58	54.00	-7.42	AVG	
3	X	2417.500	74.19	31.15	105.34	74.00	31.34	peak	No Limit
4	*	2417.500	67.21	31.15	98.36	54.00	44.36	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

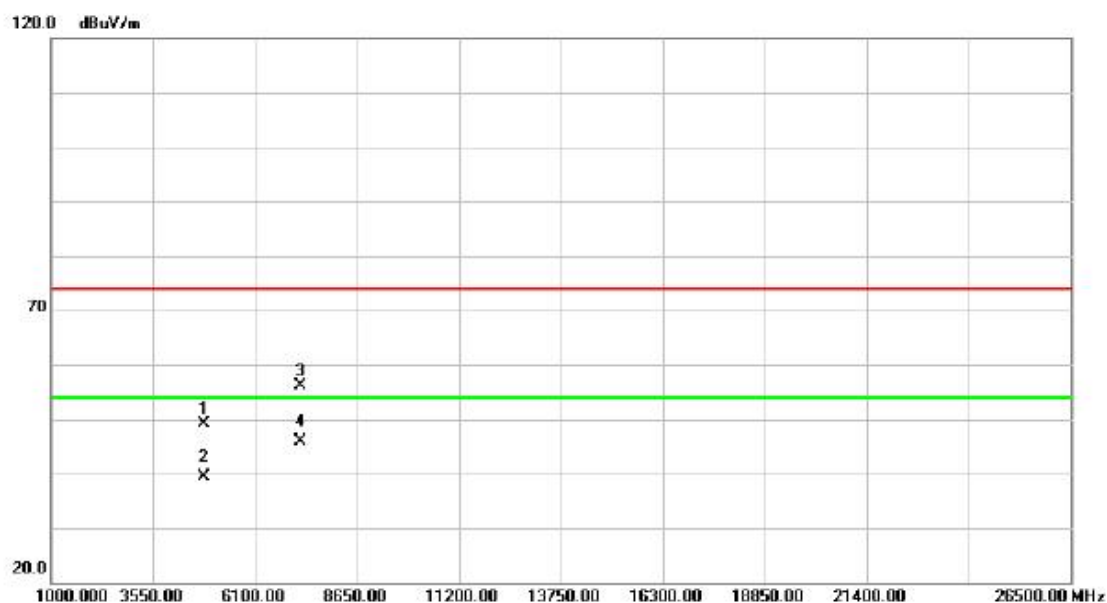

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.025	42.38	6.78	49.16	74.00	-24.84	peak	
2		4824.025	32.51	6.78	39.29	54.00	-14.71	AVG	
3		7235.880	40.94	15.17	56.11	74.00	-17.89	peak	
4	*	7235.880	30.74	15.17	45.91	54.00	-8.09	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

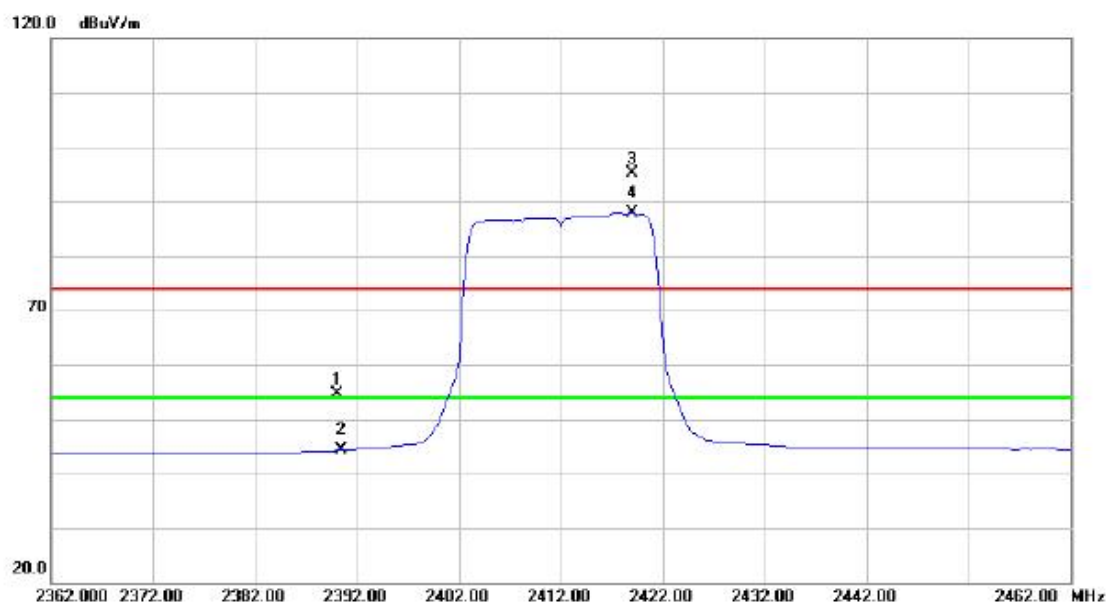

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	23.62	31.02	54.64	74.00	-19.36	peak	
2		2390.000	13.26	31.02	44.28	54.00	-9.72	AVG	
3	X	2419.000	63.94	31.15	95.09	74.00	21.09	peak	No Limit
4	*	2419.000	56.66	31.15	87.81	54.00	33.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

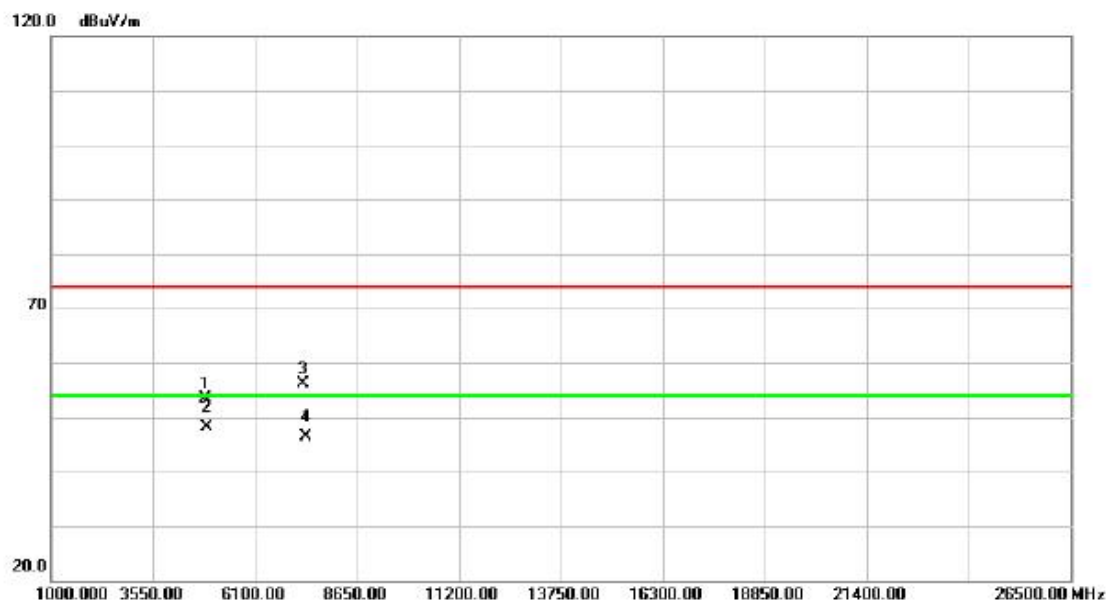

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.015	46.62	6.78	53.40	74.00	-20.60	peak	
2	*	4874.015	41.33	6.78	48.11	54.00	-5.89	AVG	
3		7311.445	40.61	15.58	56.19	74.00	-17.81	peak	
4		7311.445	30.68	15.58	46.26	54.00	-7.74	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

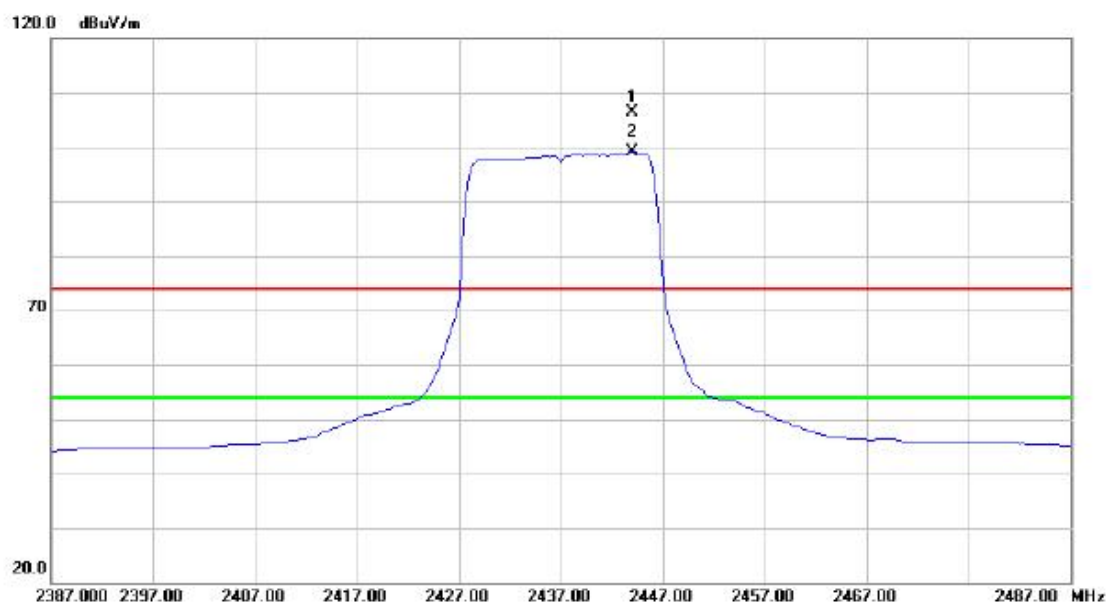

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2444.000	75.20	31.28	106.48	74.00	32.48	peak	No Limit
2	*	2444.000	67.82	31.28	99.10	54.00	45.10	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

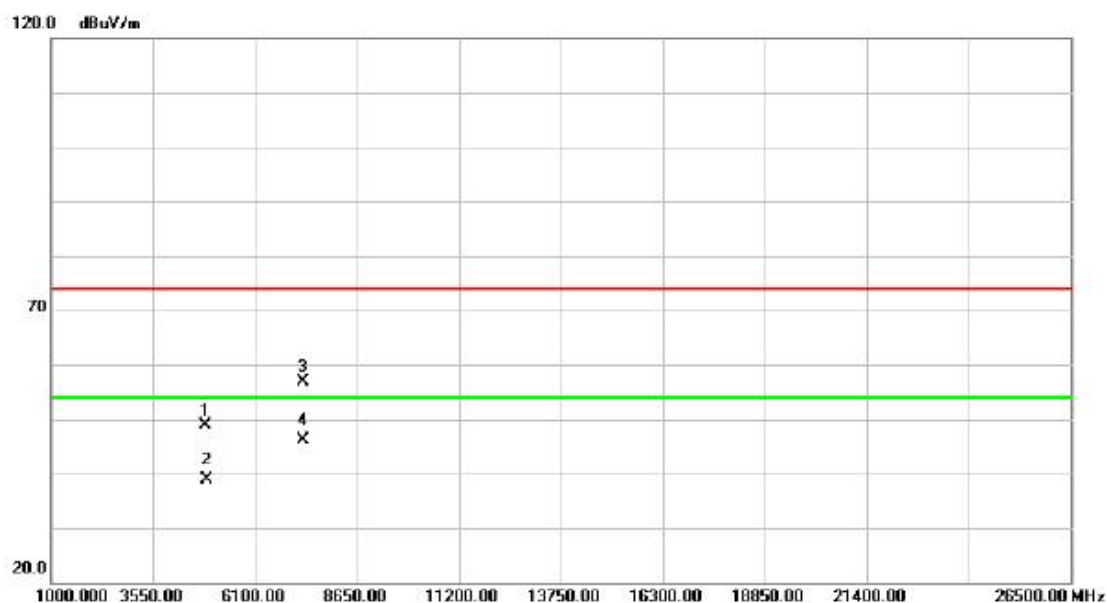

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.900	42.10	6.78	48.88	74.00	-25.12	peak	
2		4873.900	32.19	6.78	38.97	54.00	-15.03	AVG	
3		7311.245	41.21	15.57	56.78	74.00	-17.22	peak	
4	*	7311.245	30.68	15.57	46.25	54.00	-7.75	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

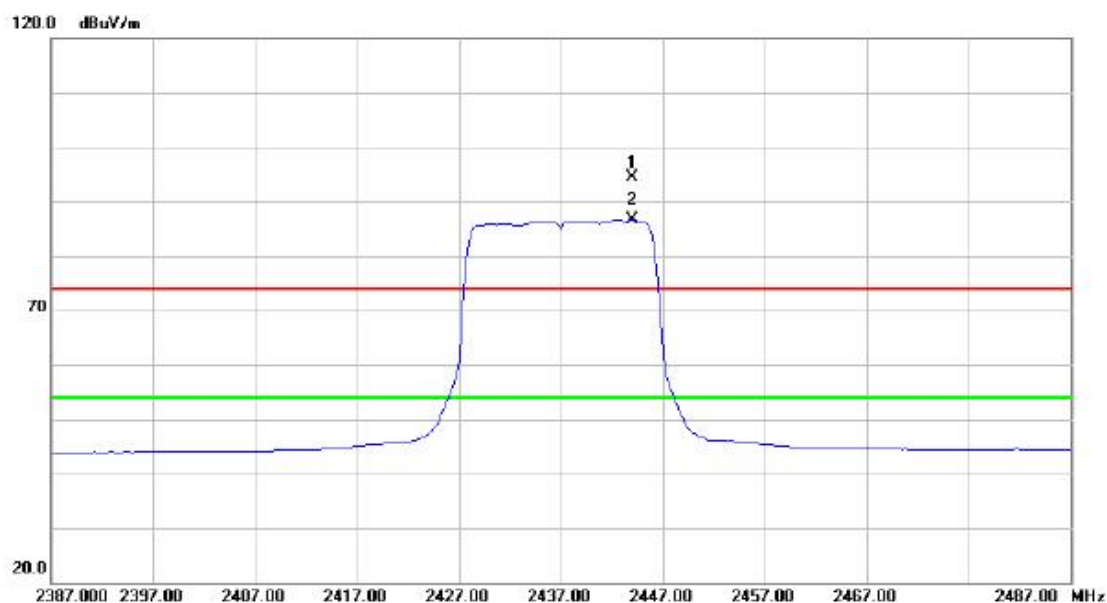

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2444.000	63.12	31.28	94.40	74.00	20.40	peak	No Limit
2	*	2444.000	55.30	31.28	86.58	54.00	32.58	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

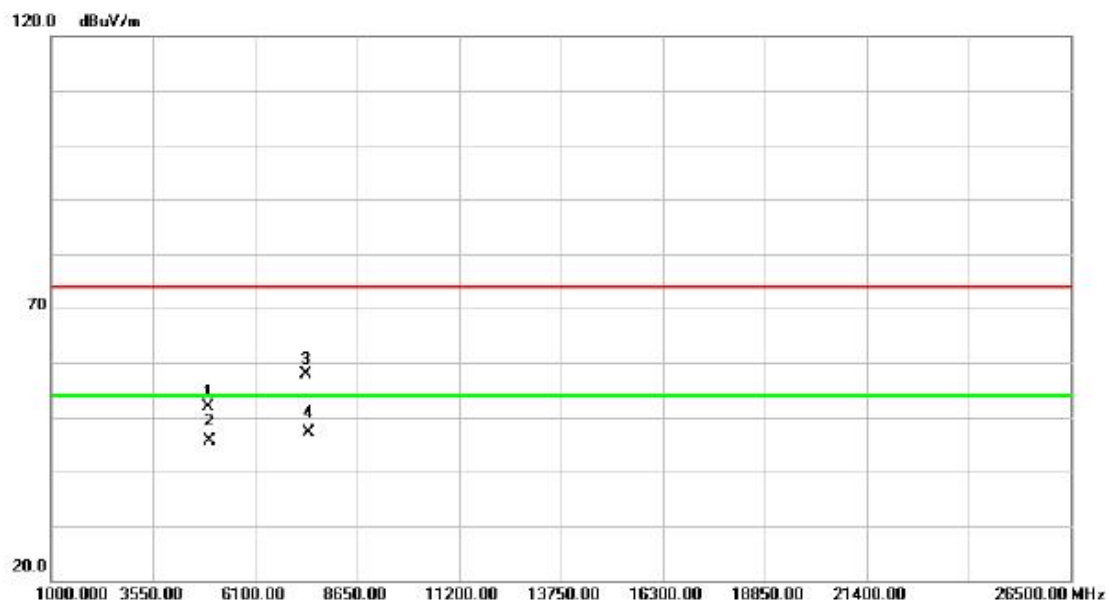

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.005	45.17	6.77	51.94	74.00	-22.06	peak	
2		4924.005	38.86	6.77	45.63	54.00	-8.37	AVG	
3		7386.170	41.95	15.98	57.93	74.00	-16.07	peak	
4	*	7386.170	31.12	15.98	47.10	54.00	-6.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

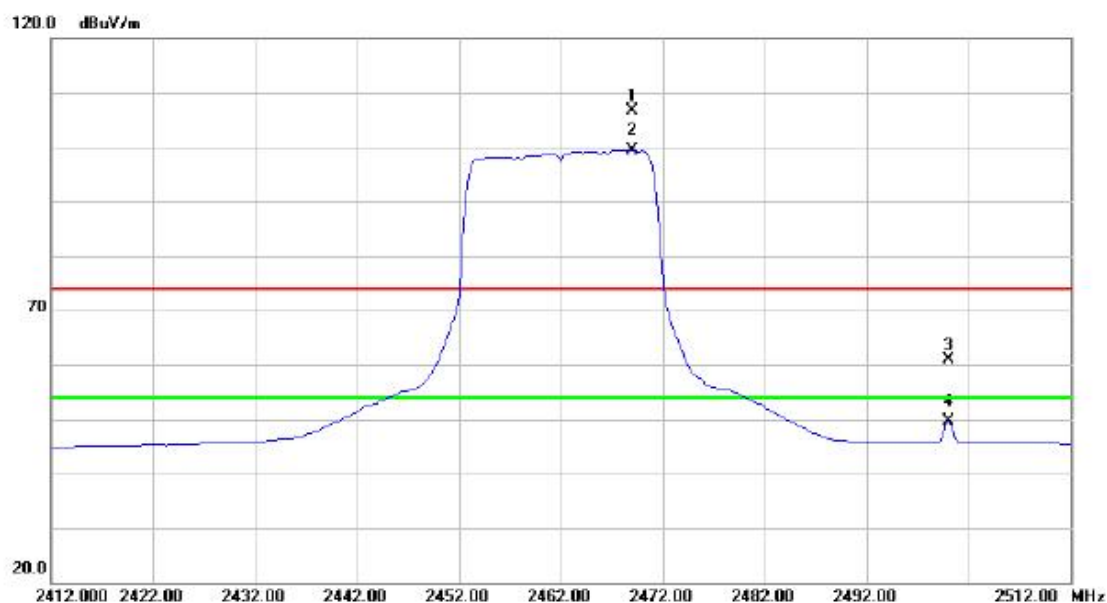

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2469.000	75.25	31.39	106.64	74.00	32.64	peak	No Limit
2	*	2469.000	68.01	31.39	99.40	54.00	45.40	AVG	No Limit
3		2500.000	29.35	31.54	60.89	74.00	-13.11	peak	
4		2500.000	18.07	31.54	49.61	54.00	-4.39	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

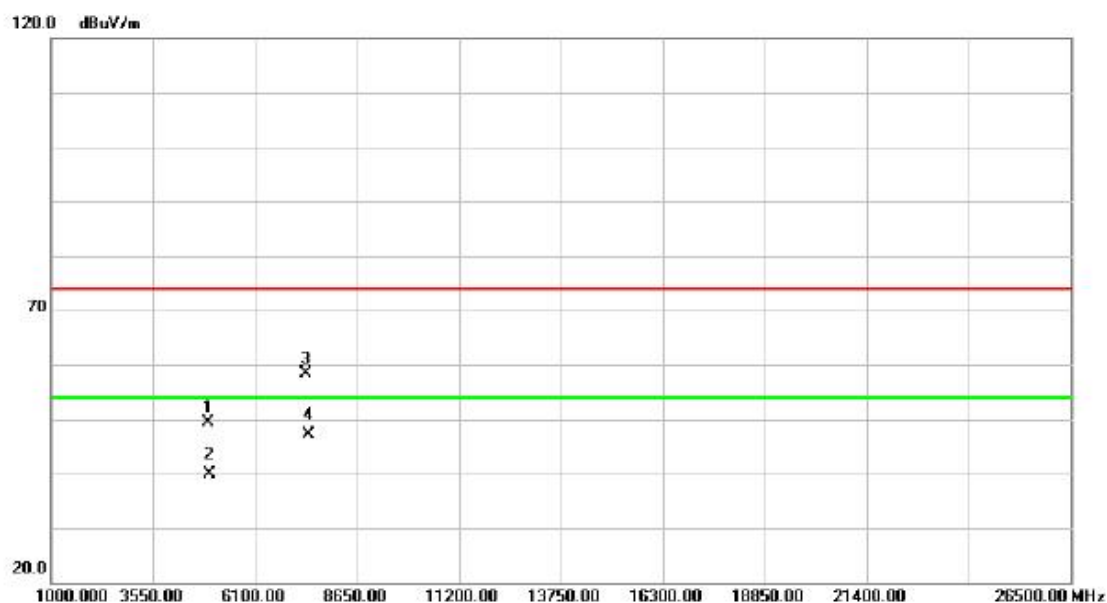

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		4923.910	42.52	6.77	49.29	74.00	-24.71	peak	
2		4923.910	33.13	6.77	39.90	54.00	-14.10	AVG	
3		7386.140	42.38	15.98	58.36	74.00	-15.64	peak	
4	*	7386.140	31.07	15.98	47.05	54.00	-6.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

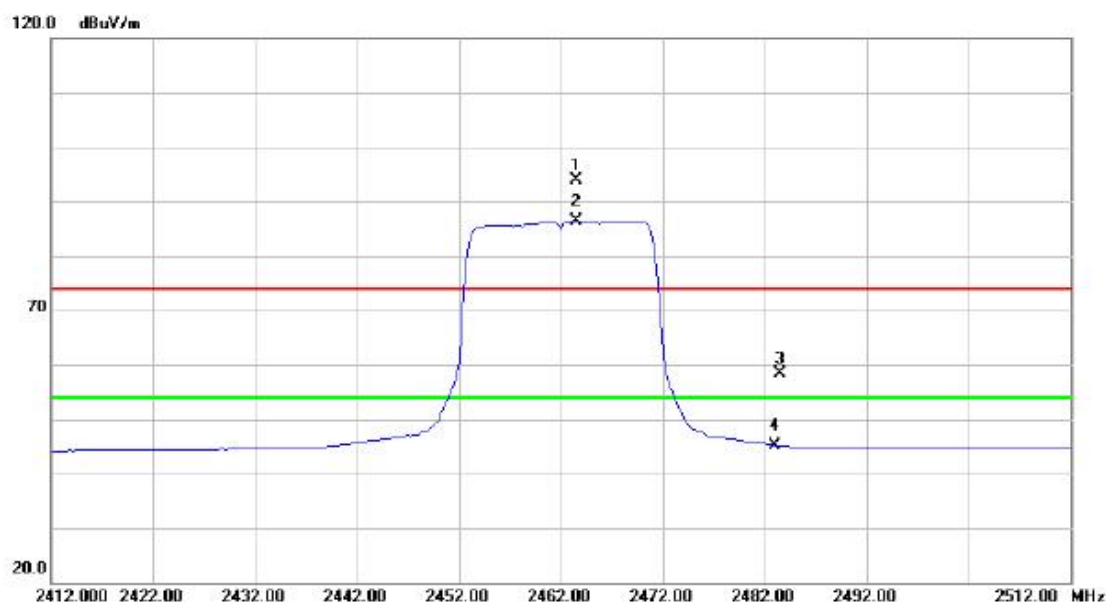

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.500	62.48	31.37	93.85	74.00	19.85	peak	No Limit
2	*	2463.500	55.13	31.37	86.50	54.00	32.50	AVG	No Limit
3		2483.500	26.85	31.46	58.31	74.00	-15.69	peak	
4		2483.500	13.68	31.46	45.14	54.00	-8.86	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4844.000	35.34	6.78	42.12	54.00	-11.88	AVG	
2		4844.000	44.32	6.78	51.10	74.00	-22.90	peak	
3	*	7268.500	31.26	15.35	46.61	54.00	-7.39	AVG	
4		7268.500	41.93	15.35	57.28	74.00	-16.72	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

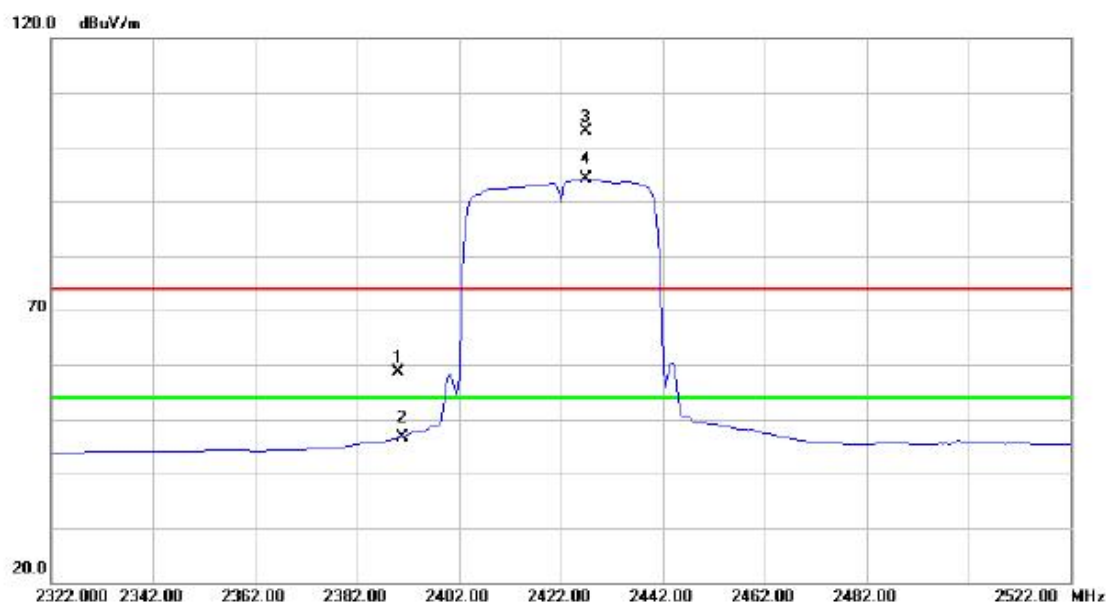

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	27.59	31.02	58.61	74.00	-15.39	peak	
2		2390.000	15.50	31.02	46.52	54.00	-7.48	AVG	
3	X	2427.000	71.67	31.19	102.86	74.00	28.86	peak	No Limit
4	*	2427.000	62.84	31.19	94.03	54.00	40.03	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Horizontal

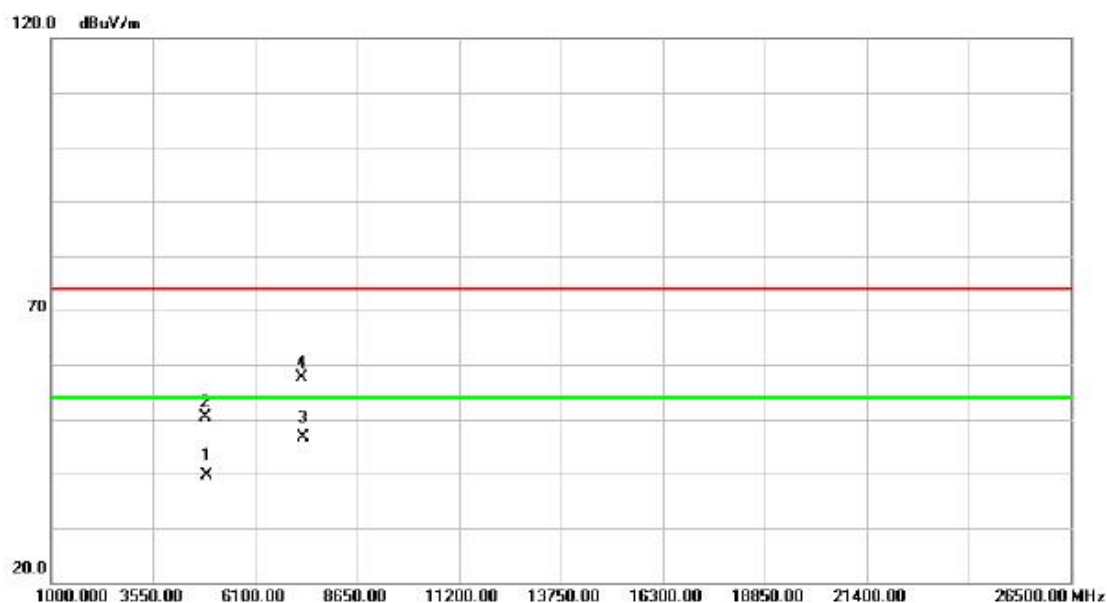

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4843.988	32.87	6.78	39.65	54.00	-14.35	AVG	
2		4843.988	43.54	6.78	50.32	74.00	-23.68	peak	
3	*	7267.587	31.16	15.35	46.51	54.00	-7.49	AVG	
4		7267.587	42.25	15.35	57.60	74.00	-16.40	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

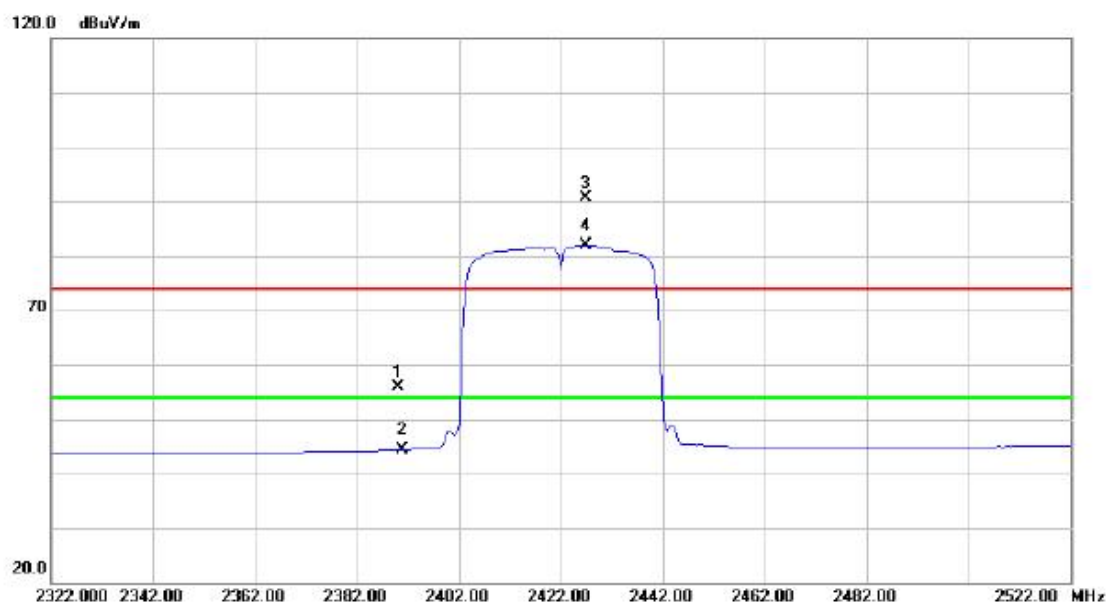

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	24.95	31.02	55.97	74.00	-18.03	peak	
2		2390.000	13.33	31.02	44.35	54.00	-9.65	AVG	
3	X	2427.000	59.56	31.19	90.75	74.00	16.75	peak	No Limit
4	*	2427.000	50.76	31.19	81.95	54.00	27.95	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.913	31.84	6.78	38.62	54.00	-15.38	AVG	
2		4873.913	42.10	6.78	48.88	74.00	-25.12	peak	
3	*	7308.600	31.35	15.56	46.91	54.00	-7.09	AVG	
4		7308.600	42.57	15.56	58.13	74.00	-15.87	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

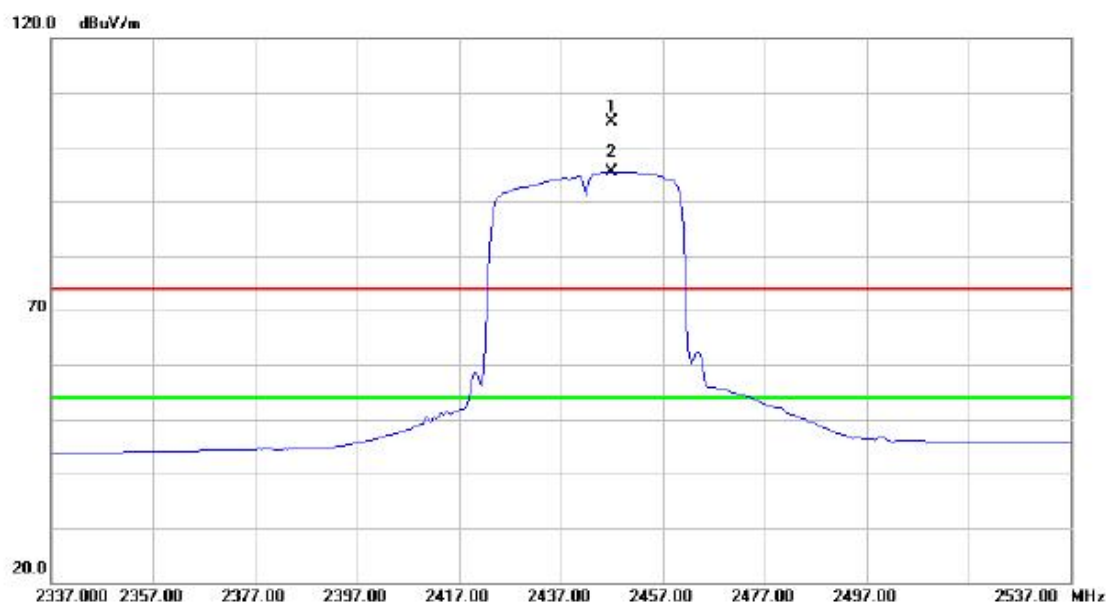

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2447.000	73.30	31.29	104.59	74.00	30.59	peak	No Limit
2	*	2447.000	64.12	31.29	95.41	54.00	41.41	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

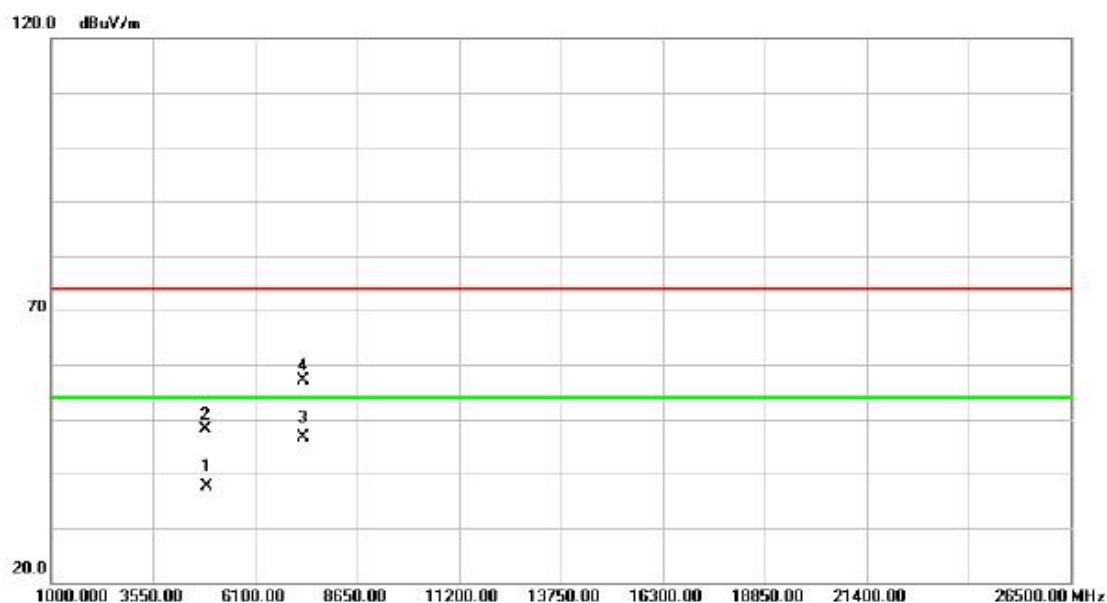

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4871.975	30.82	6.78	37.60	54.00	-16.40	AVG	
2		4871.975	41.26	6.78	48.04	74.00	-25.96	peak	
3	*	7308.825	30.96	15.57	46.53	54.00	-7.47	AVG	
4		7308.825	41.68	15.57	57.25	74.00	-16.75	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

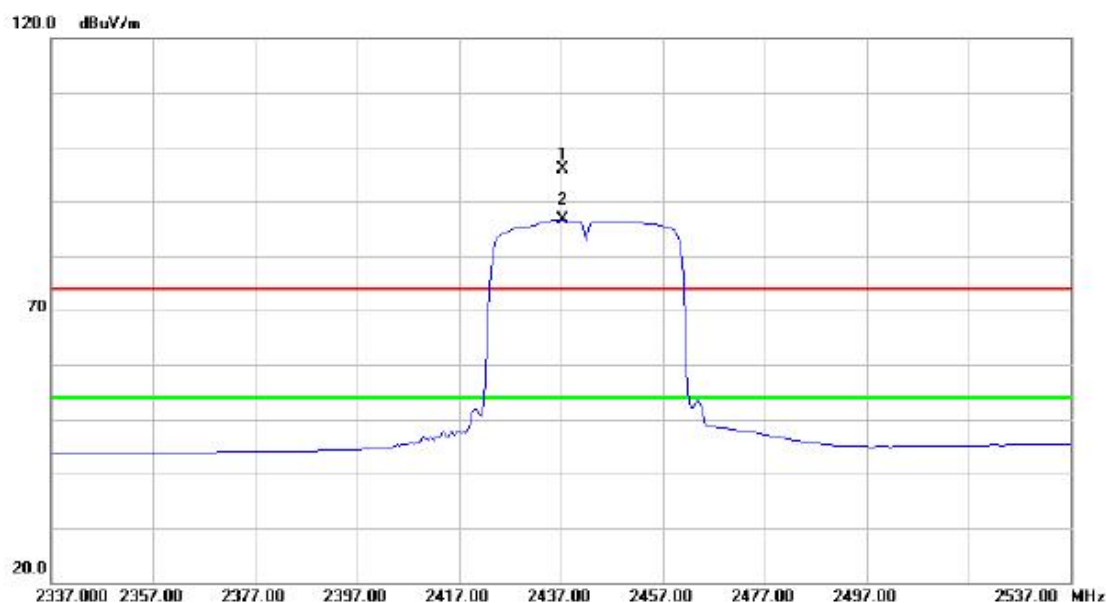

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.500	64.53	31.25	95.78	74.00	21.78	peak	No Limit
2	*	2437.500	55.45	31.25	86.70	54.00	32.70	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

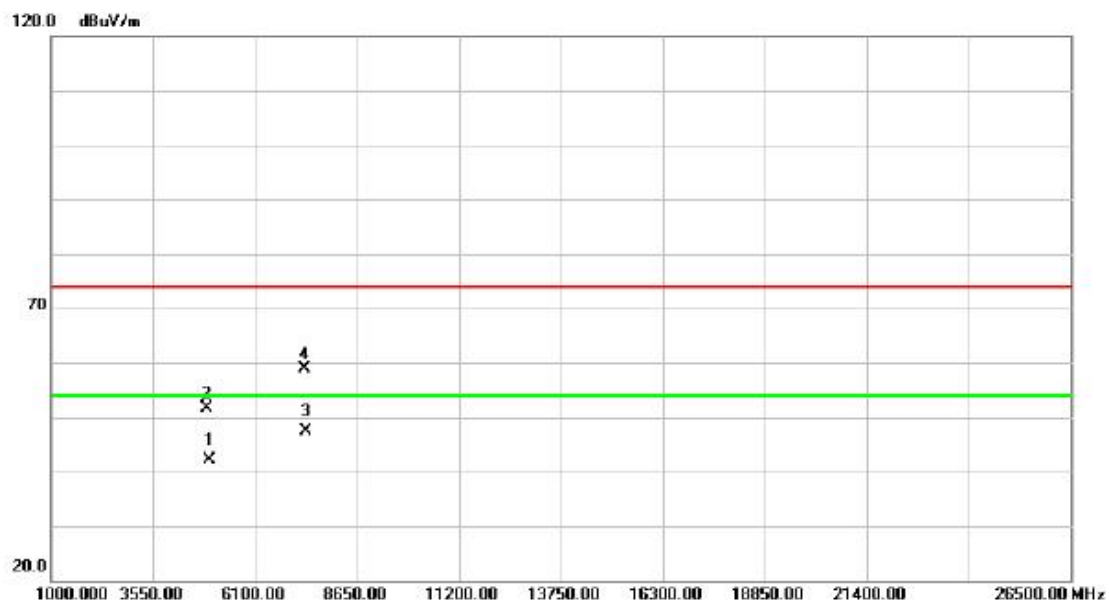

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4904.025	35.24	6.77	42.01	54.00	-11.99	AVG	
2		4904.025	44.79	6.77	51.56	74.00	-22.44	peak	
3	*	7353.887	31.49	15.81	47.30	54.00	-6.70	AVG	
4		7353.887	42.99	15.81	58.80	74.00	-15.20	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

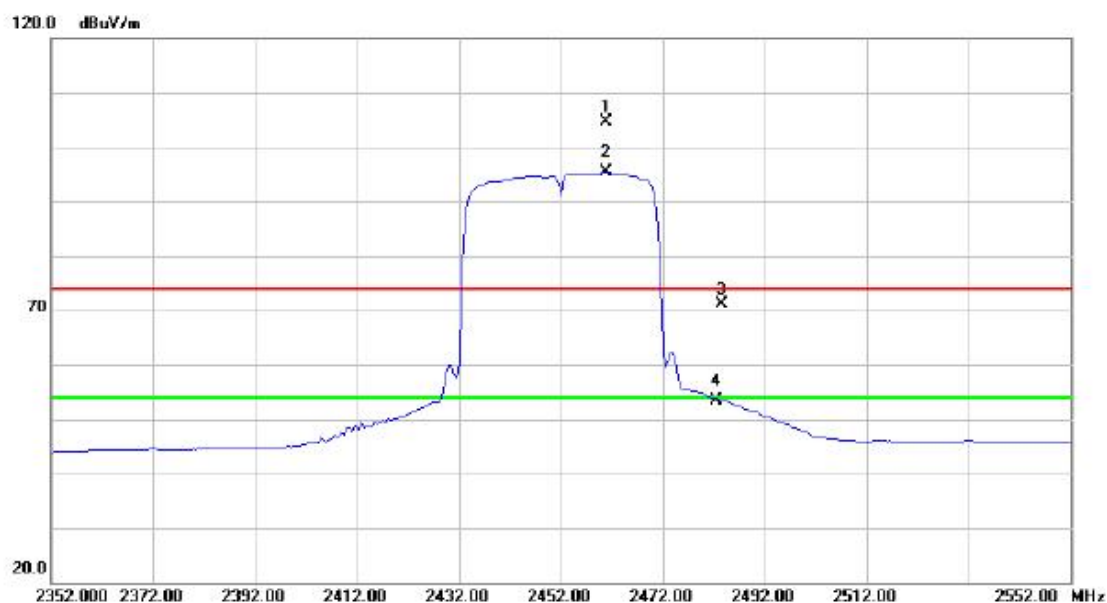

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.000	73.22	31.36	104.58	74.00	30.58	peak	No Limit
2	*	2461.000	63.95	31.36	95.31	54.00	41.31	AVG	No Limit
3		2483.500	39.73	31.46	71.19	74.00	-2.81	peak	
4		2483.500	22.01	31.46	53.47	54.00	-0.53	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Horizontal

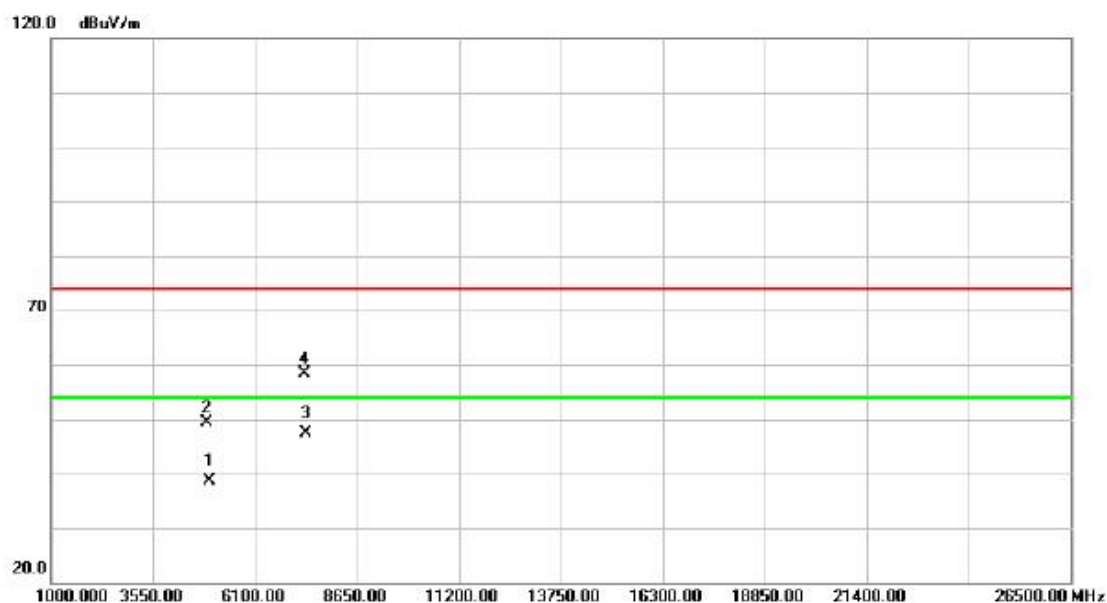

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4903.925	31.78	6.77	38.55	54.00	-15.45	AVG	
2		4903.925	42.57	6.77	49.34	74.00	-24.66	peak	
3	*	7353.950	31.46	15.81	47.27	54.00	-6.73	AVG	
4		7353.950	42.55	15.81	58.36	74.00	-15.64	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

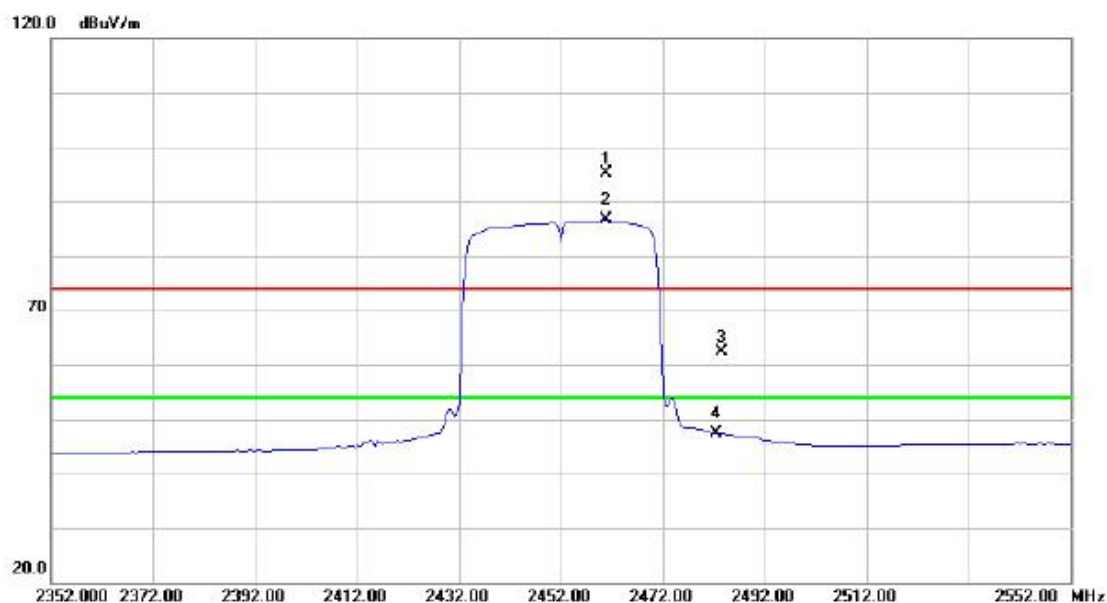


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.000	63.70	31.36	95.06	74.00	21.06	peak	No Limit
2	*	2461.000	55.19	31.36	86.55	54.00	32.55	AVG	No Limit
3		2483.500	30.80	31.46	62.26	74.00	-11.74	peak	
4		2483.500	15.87	31.46	47.33	54.00	-6.67	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.12	15.35	500	Complies
2437	10.12	15.30	500	Complies
2462	10.12	15.25	500	Complies

TX CH01

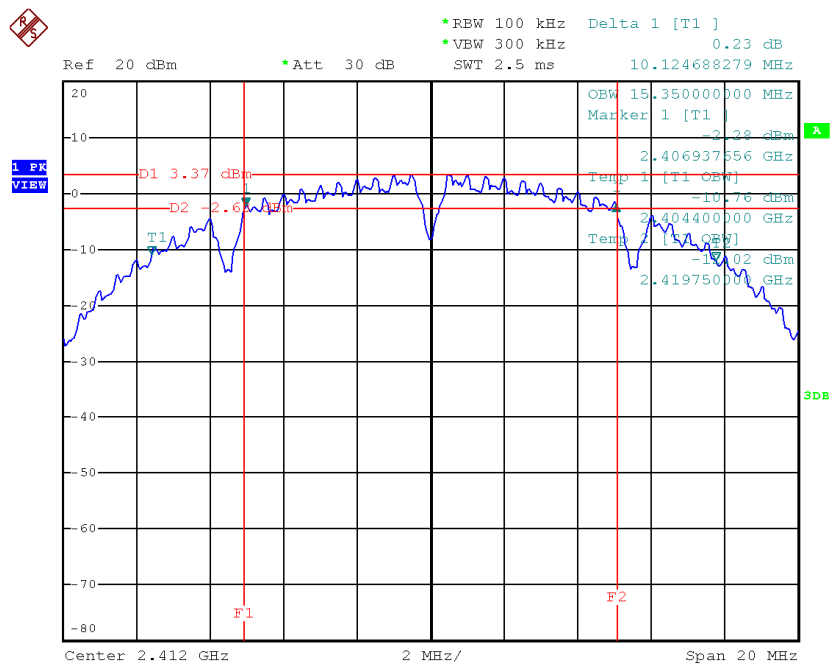


Date: 20.NOV.2014 21:35:06

TX CH06

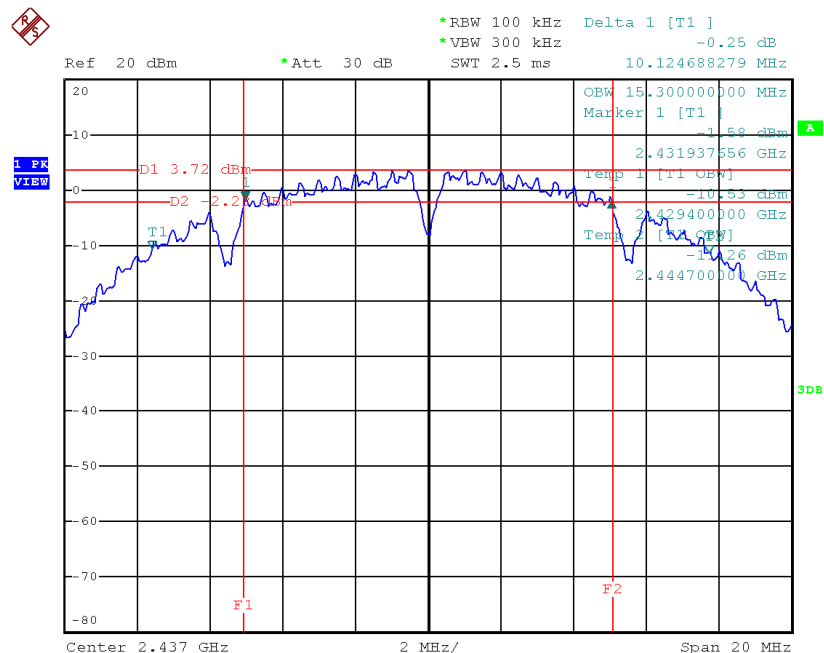

Date: 20.NOV.2014 21:40:42

TX CH11

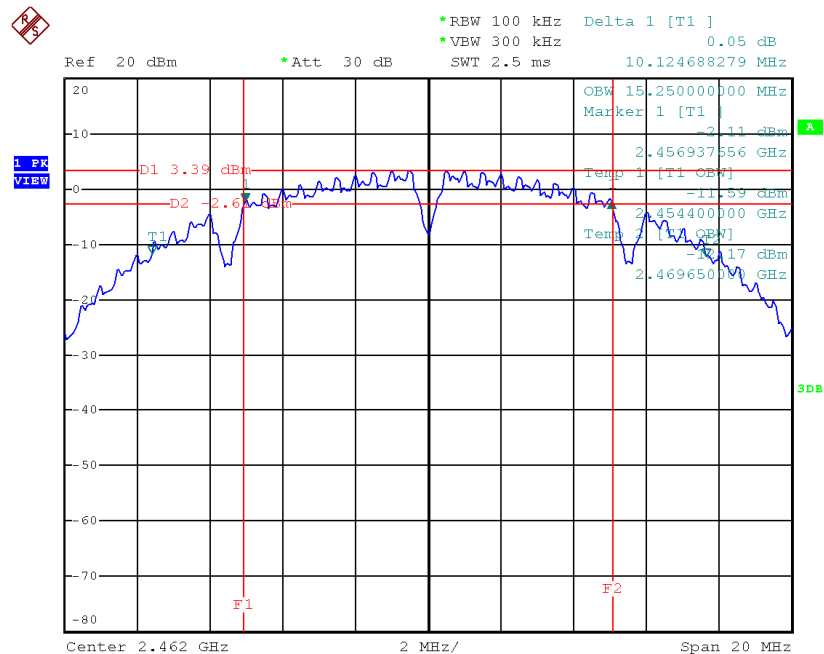


Date: 20.NOV.2014 21:47:23

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.61	16.50	500	Complies
2437	16.61	16.50	500	Complies
2462	16.61	16.50	500	Complies

TX CH01

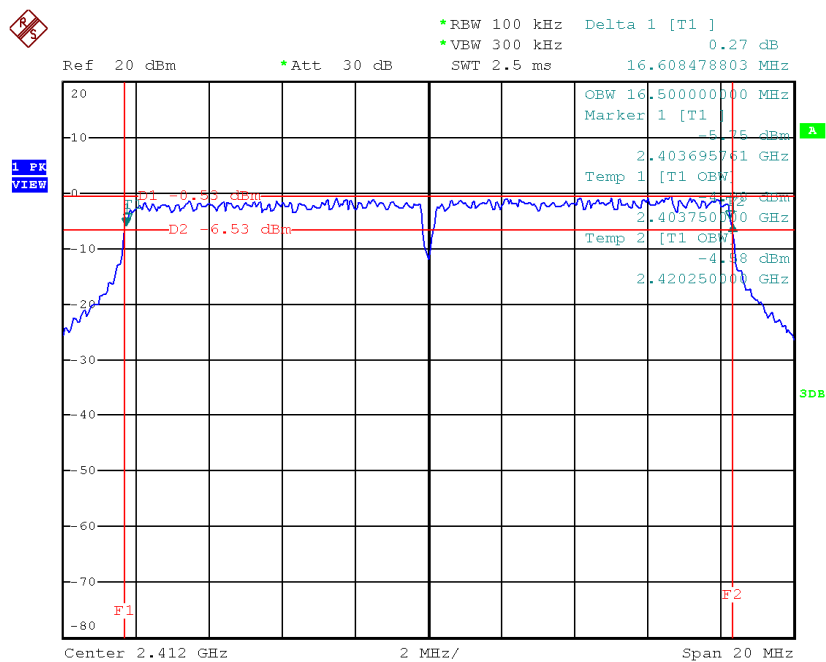


Date: 20.NOV.2014 21:36:07

TX CH06

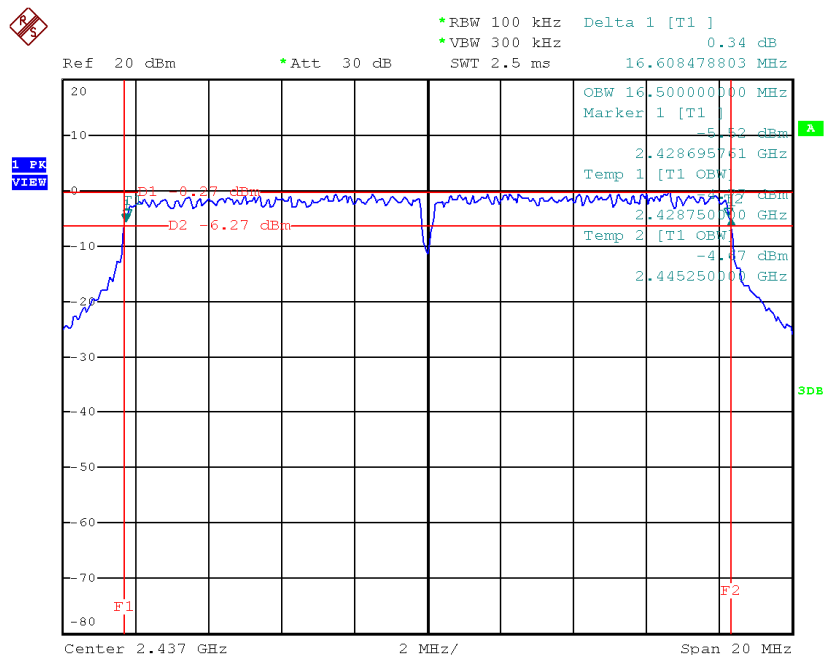

Date: 20.NOV.2014 21:41:45

TX CH11

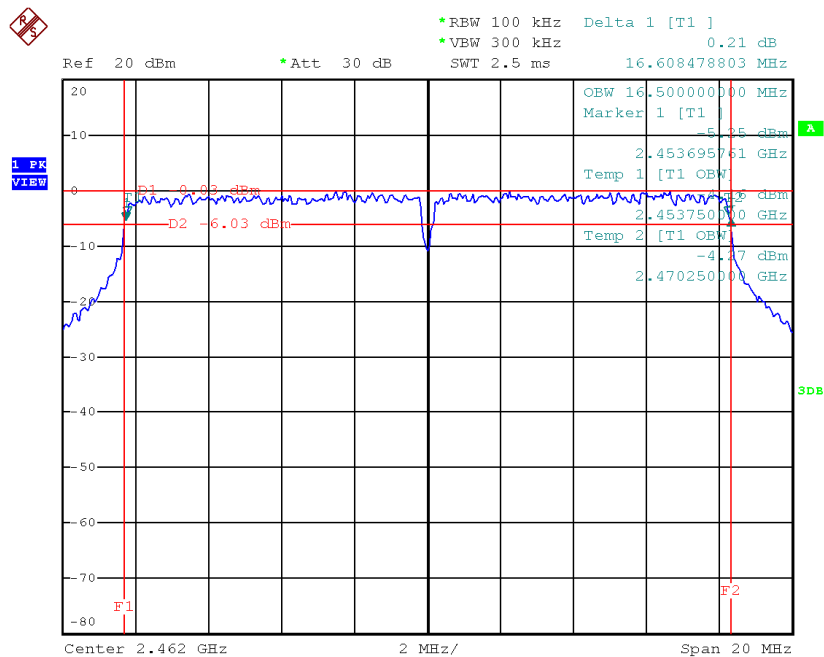


Date: 20.NOV.2014 21:48:20

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.71	17.70	500	Complies
2437	17.86	17.65	500	Complies
2462	17.81	17.70	500	Complies

TX CH01

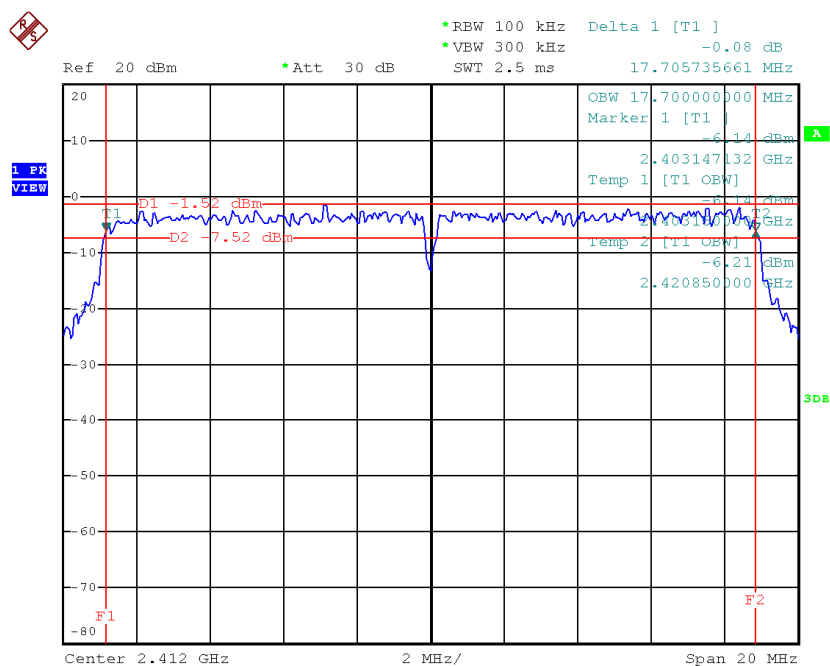


Date: 20.NOV.2014 21:36:50

TX CH06

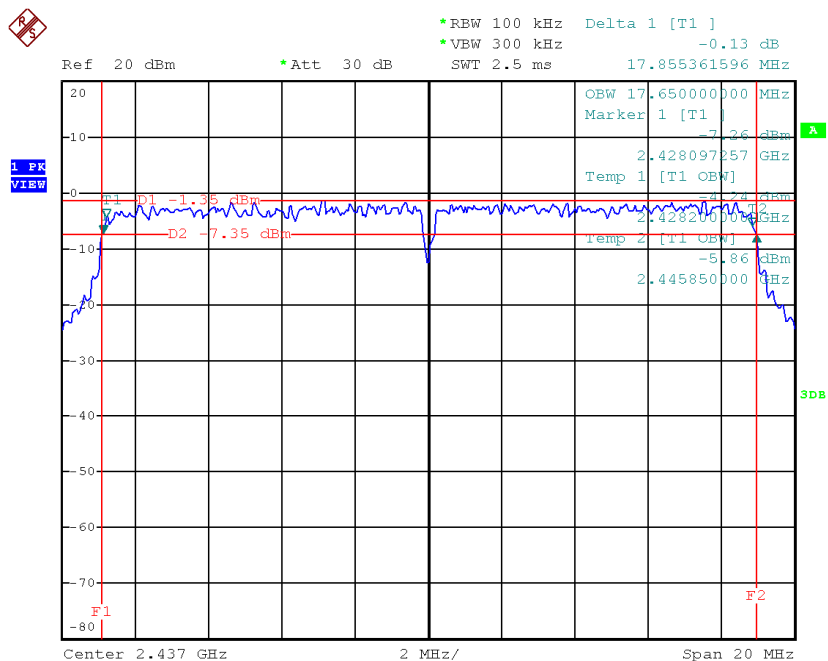

Date: 20.NOV.2014 21:43:09

TX CH11

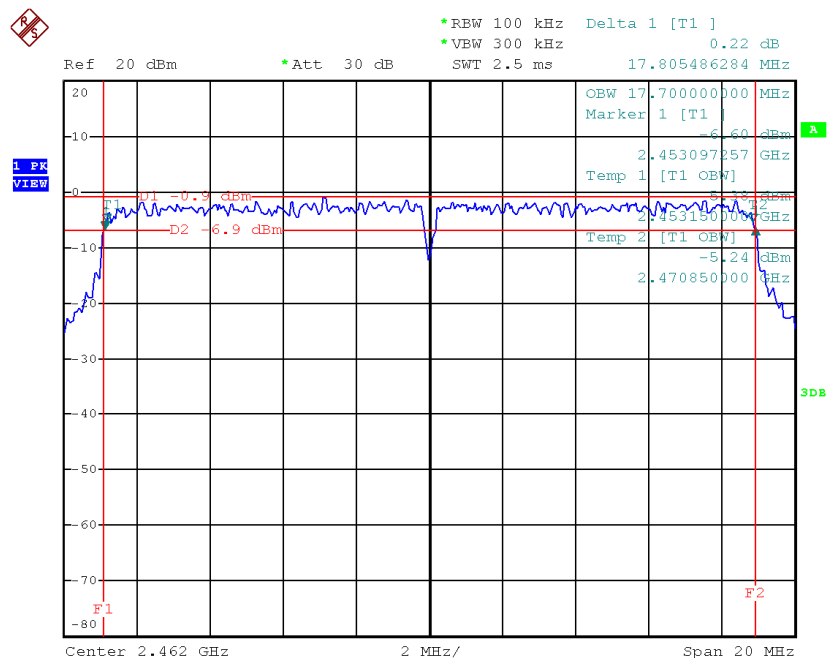


Date: 20.NOV.2014 21:49:08

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.52	36.00	500	Complies
2437	36.46	36.00	500	Complies
2452	36.48	36.00	500	Complies

TX CH03

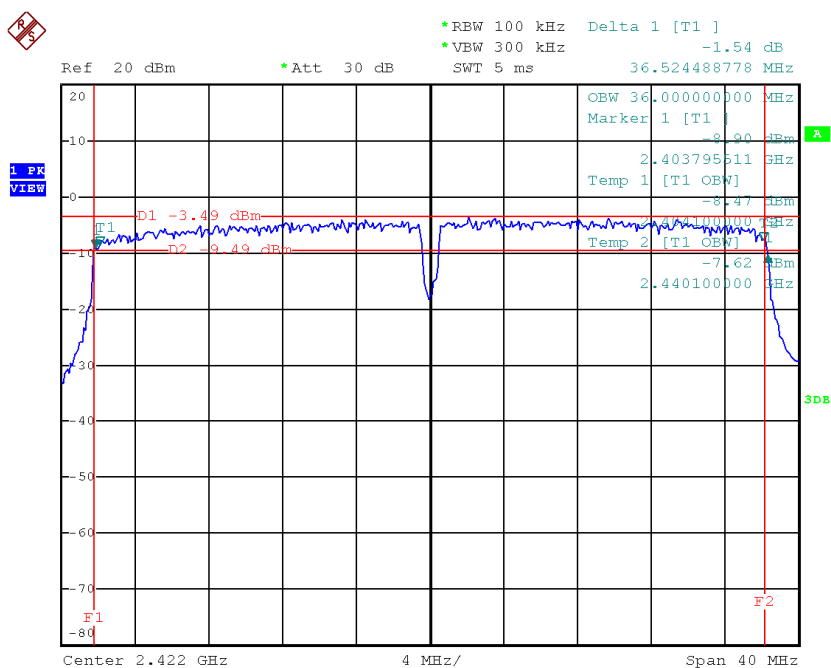


Date: 20.NOV.2014 21:38:56

TX CH06

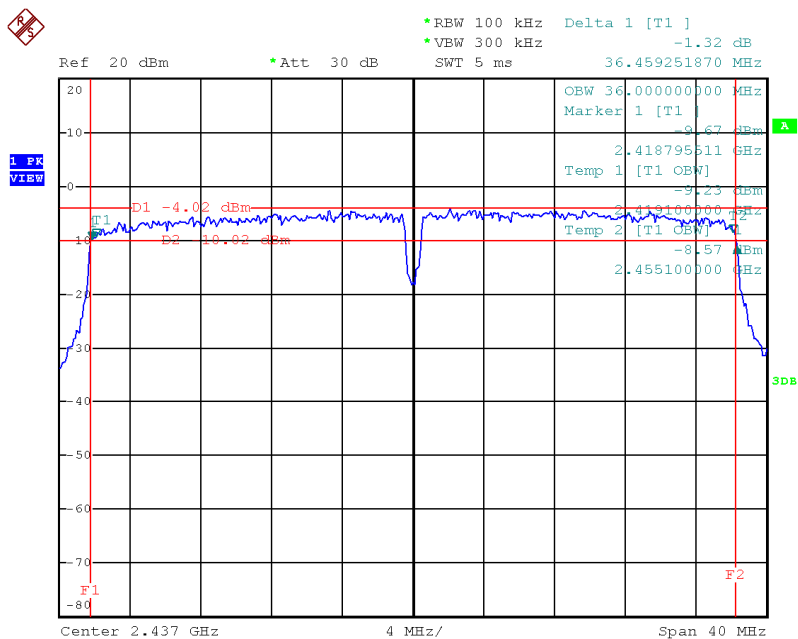

Date: 20.NOV.2014 21:44:53

TX CH09

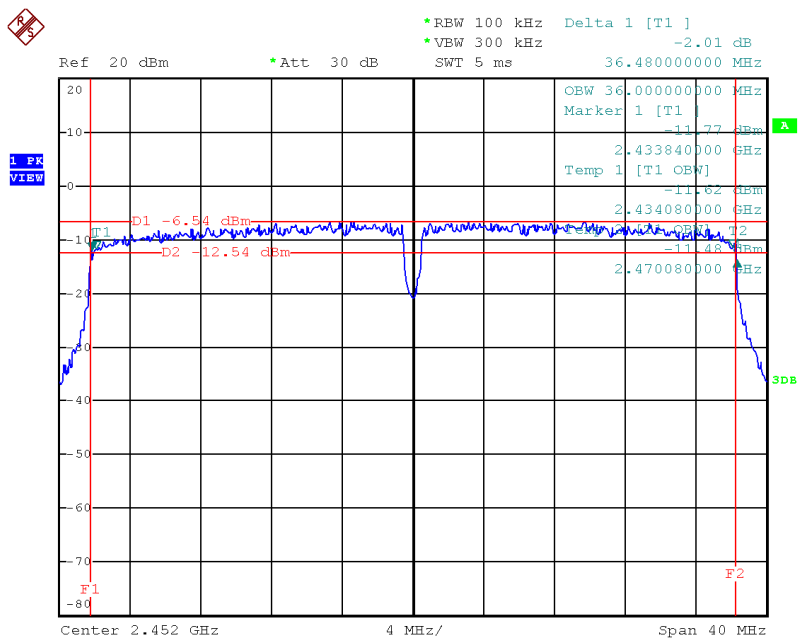

Date: 21.NOV.2014 20:03:12

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.35	0.05	30.00	1.00	Complies
2437	17.38	0.05	30.00	1.00	Complies
2462	17.43	0.06	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.74	0.24	30.00	1.00	Complies
2437	23.80	0.24	30.00	1.00	Complies
2462	23.75	0.24	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.06	0.20	30.00	1.00	Complies
2437	23.15	0.21	30.00	1.00	Complies
2462	23.08	0.20	30.00	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	23.32	0.21	30.00	1.00	Complies
2437	23.12	0.21	30.00	1.00	Complies
2452	23.15	0.21	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode :	TX B Mode
--------------------	------------------

TX B mode CH01

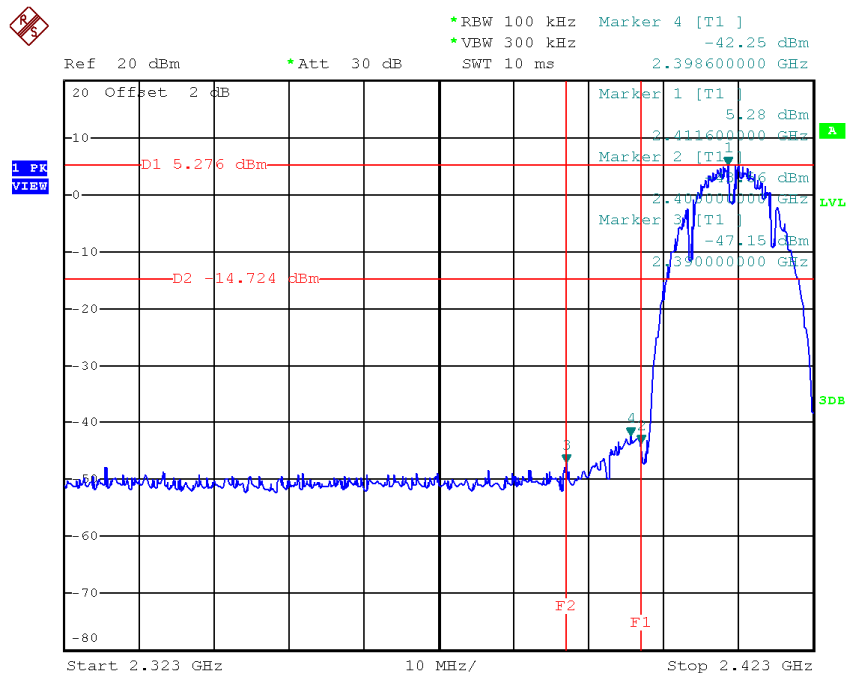


Date: 20.NOV.2014 21:01:55

TX B mode CH11

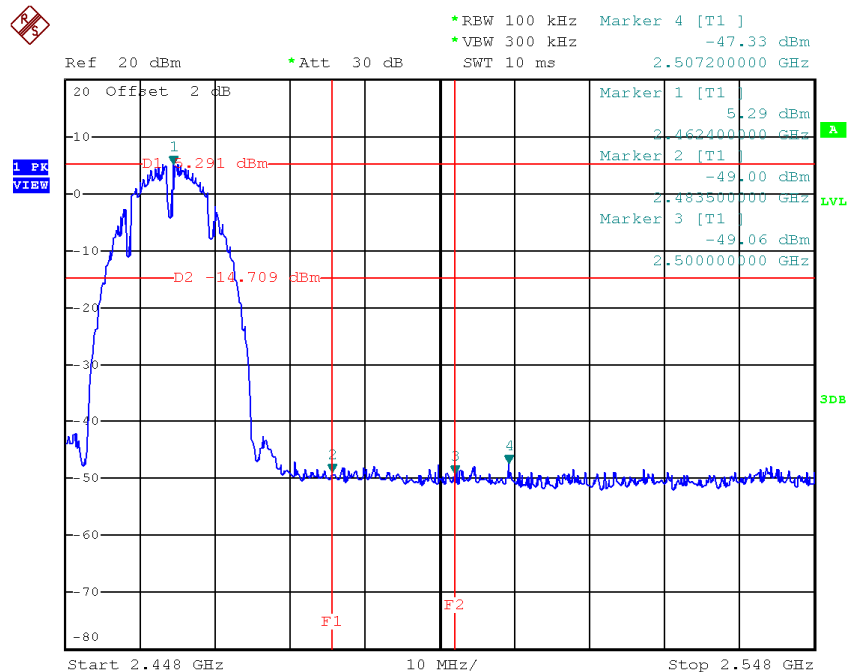


Date: 20.NOV.2014 21:05:50

TX B mode CH01 (10 Harmonic of the frequency)

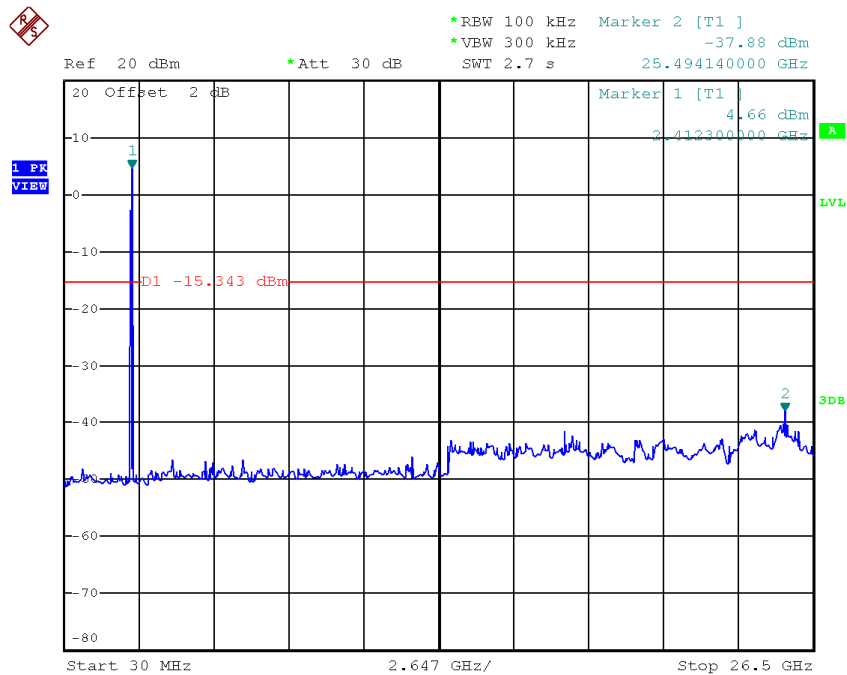


Date: 20.NOV.2014 21:01:29

TX B mode CH06 (10 Harmonic of the frequency)

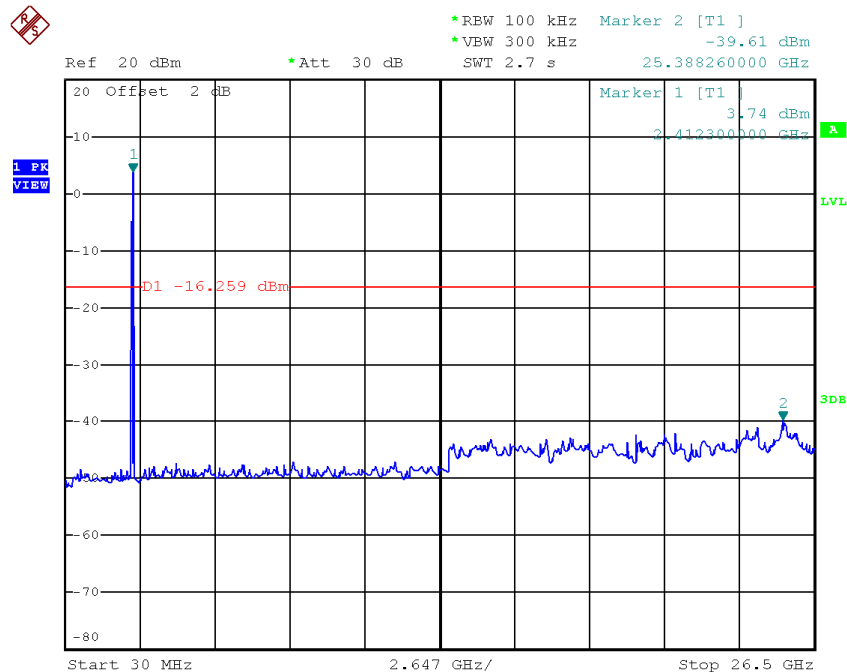

Date: 20.NOV.2014 21:03:32


TX B mode CH11 (10 Harmonic of the frequency)

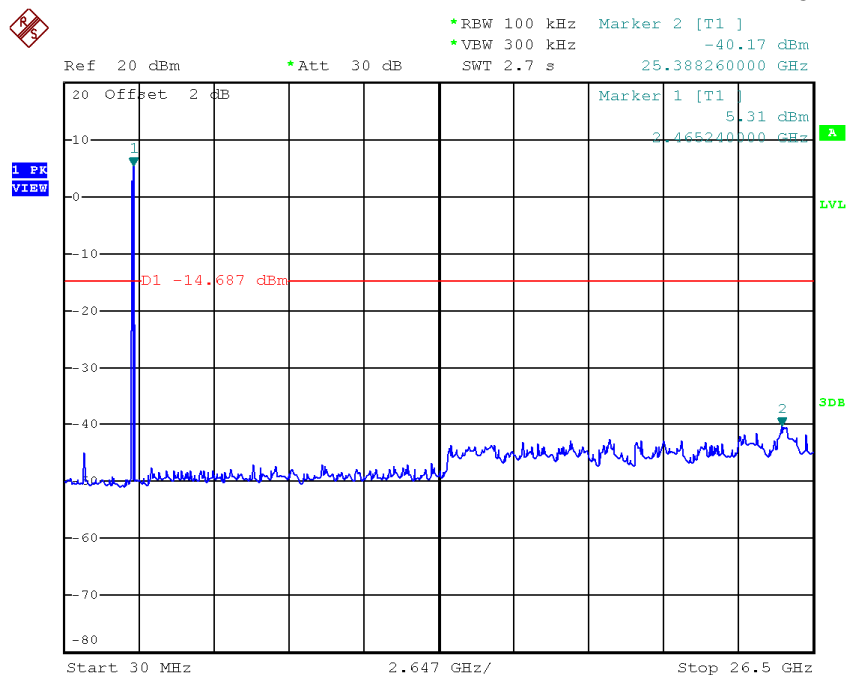

Date: 20.NOV.2014 21:05:24


Test Mode :	TX G Mode
--------------------	------------------

TX G mode CH01

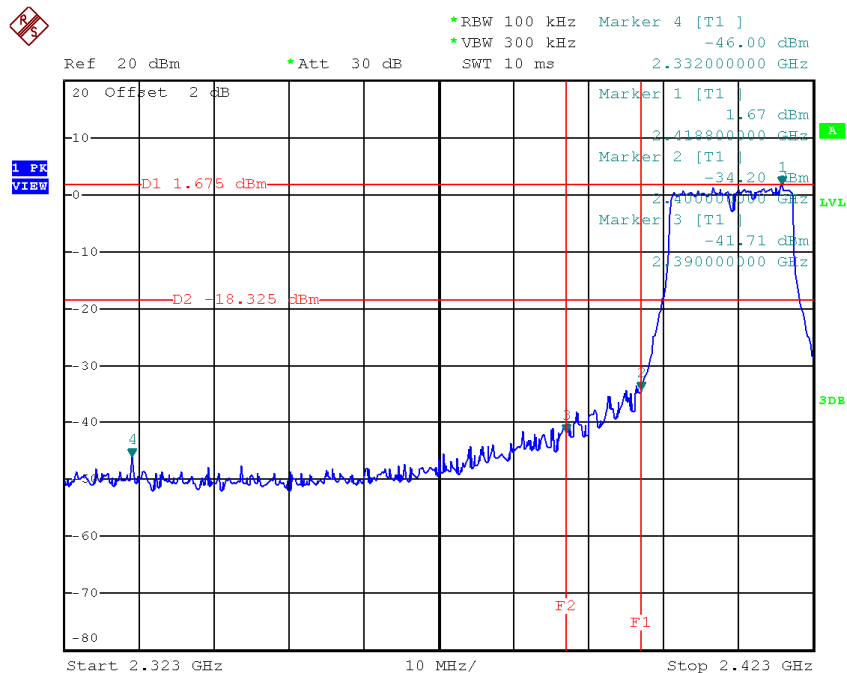


Date: 20.NOV.2014 21:07:10

TX G mode CH11

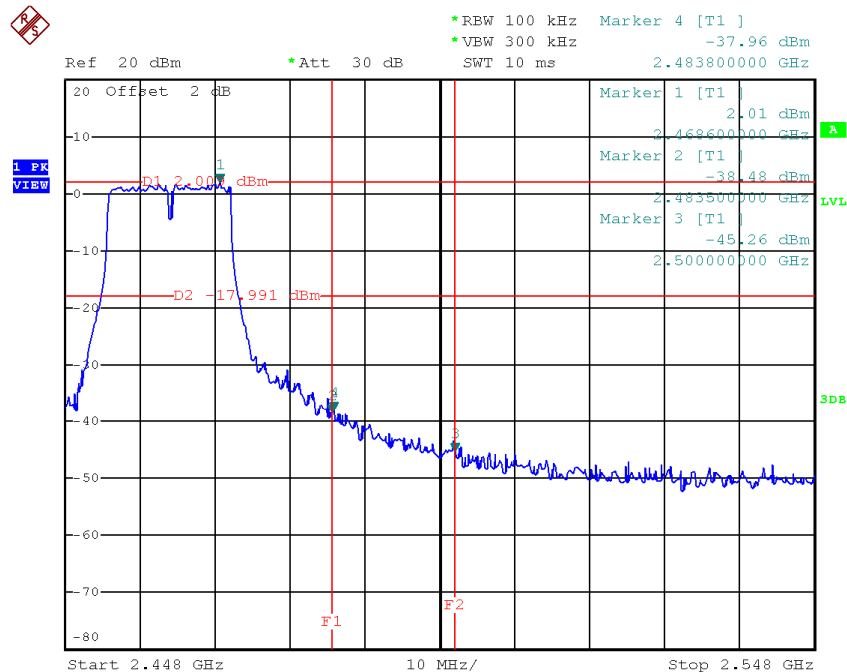


Date: 20.NOV.2014 21:09:16

TX G mode CH01 (10 Harmonic of the frequency)

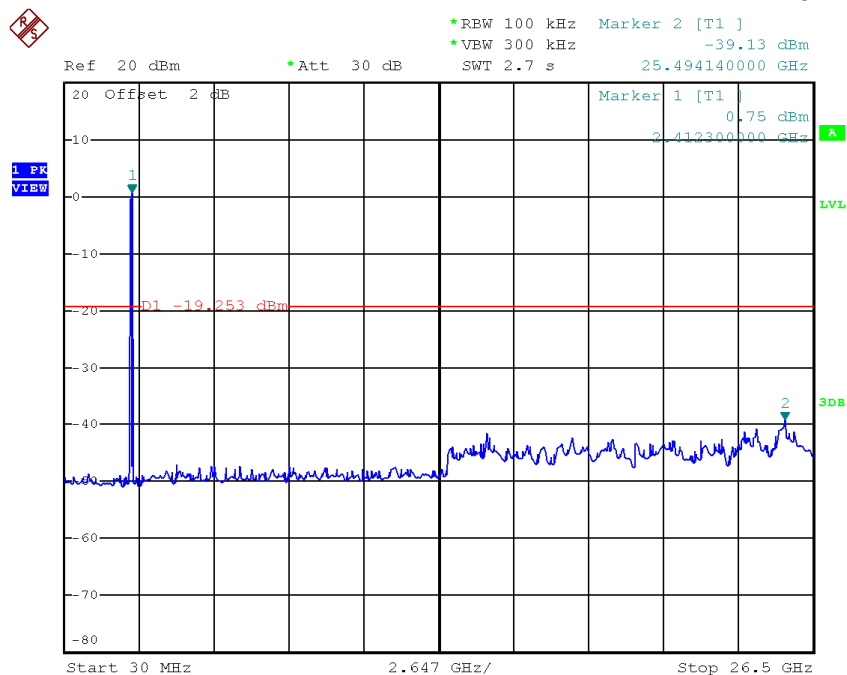


Date: 20.NOV.2014 21:07:02

TX G mode CH06 (10 Harmonic of the frequency)

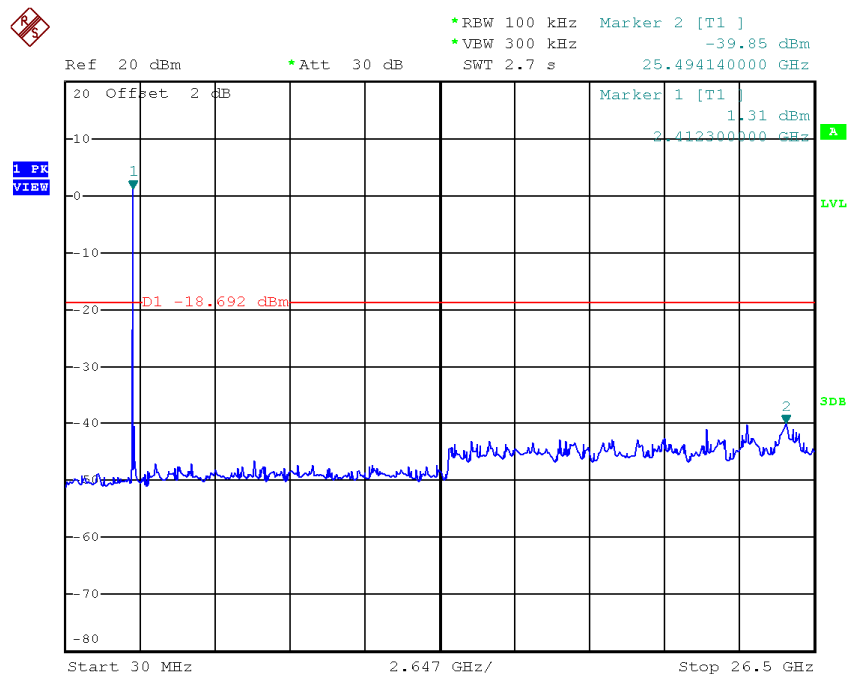

Date: 20.NOV.2014 21:08:02


TX G mode CH11 (10 Harmonic of the frequency)

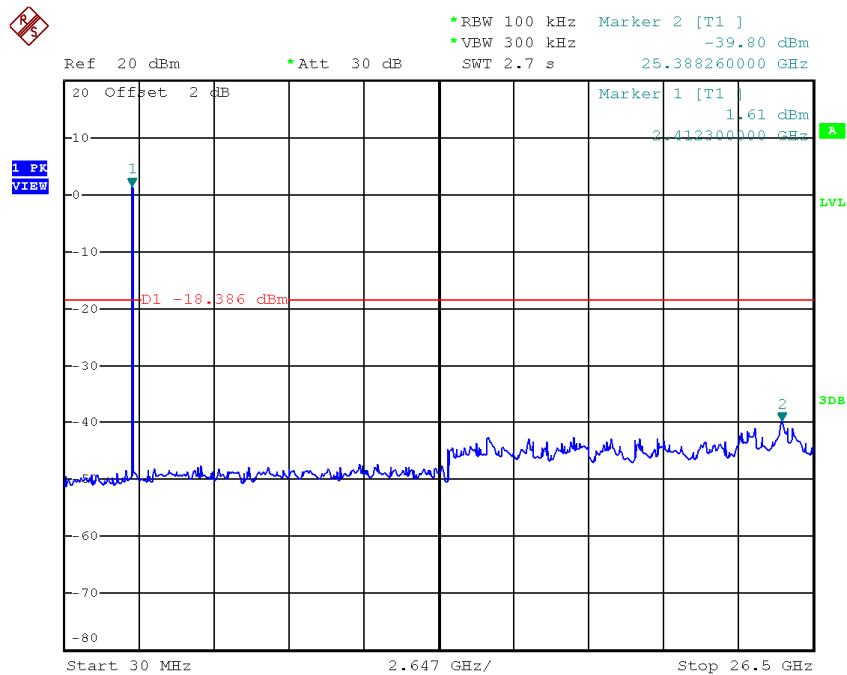

Date: 20.NOV.2014 21:08:50


Test Mode :	TX N-20M Mode
--------------------	----------------------

TX HT20 mode CH01

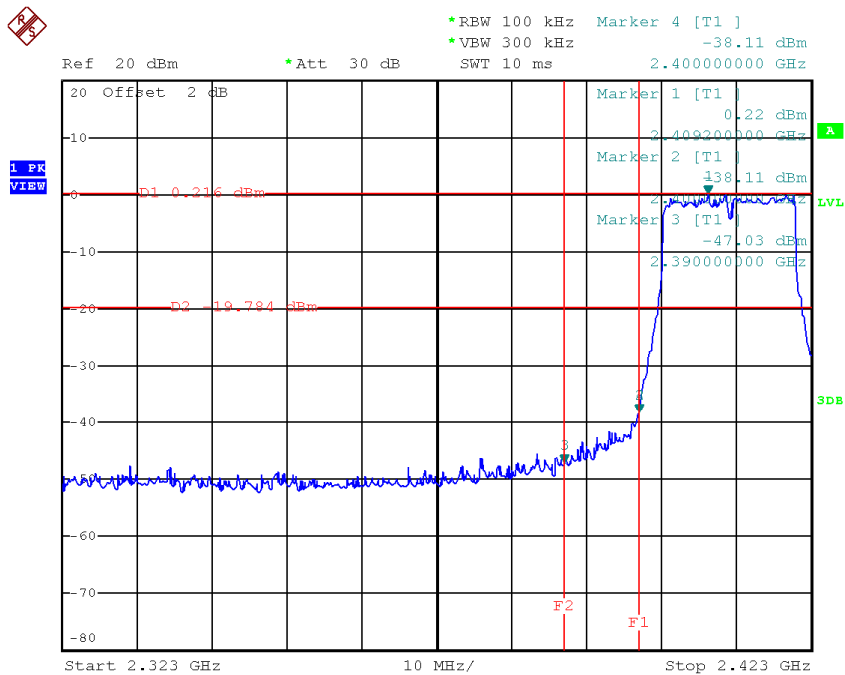


Date: 20.NOV.2014 21:11:10

TX HT20 mode CH11

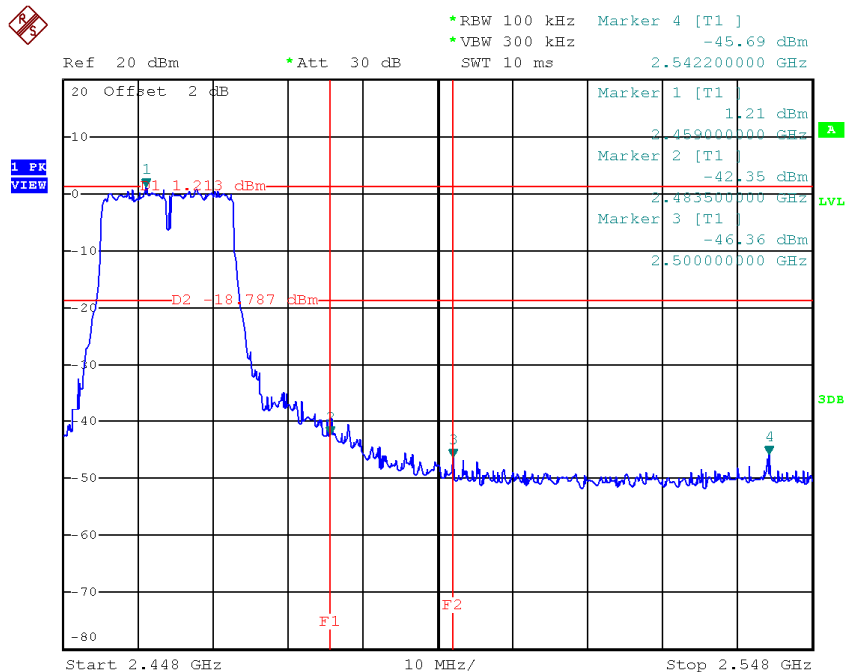


Date: 20.NOV.2014 21:12:55

TX HT20 mode CH01 (10 Harmonic of the frequency)

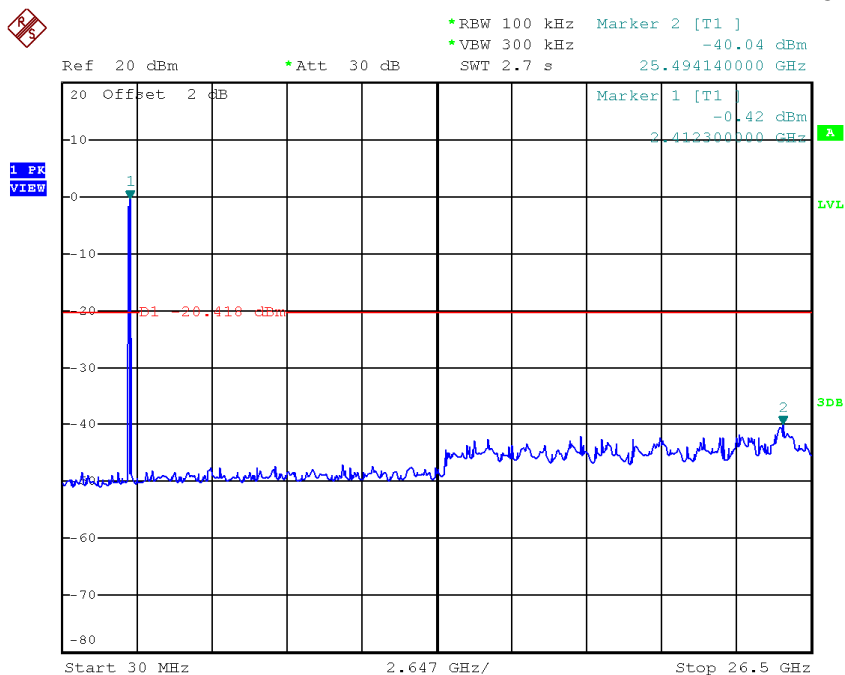


Date: 20.NOV.2014 21:10:27

TX HT20 mode CH06 (10 Harmonic of the frequency)

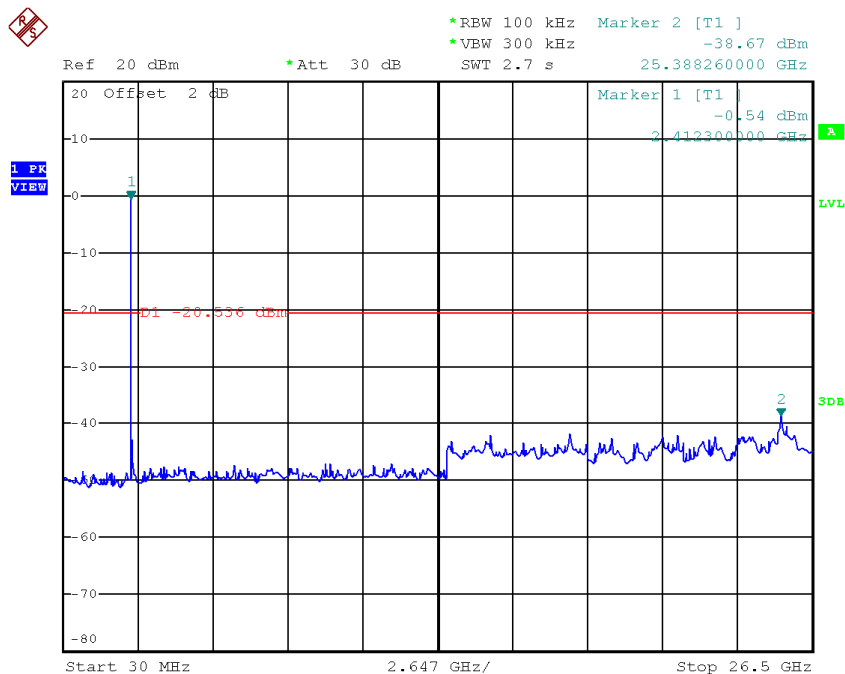

Date: 20.NOV.2014 21:11:57


TX HT20 mode CH11 (10 Harmonic of the frequency)

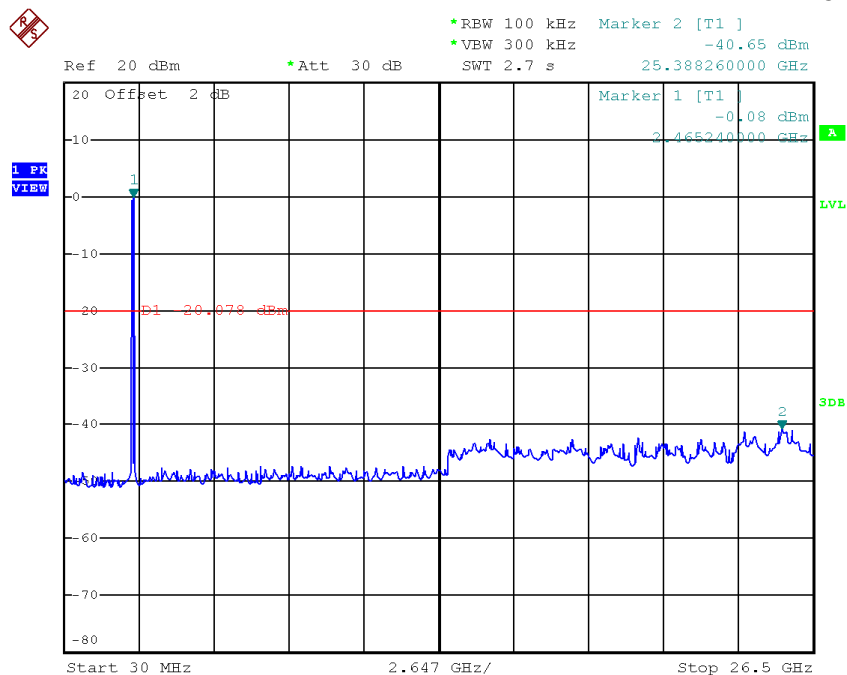

Date: 20.NOV.2014 21:12:46


Test Mode :	TX N-40M Mode
--------------------	----------------------

TX HT40 mode CH03

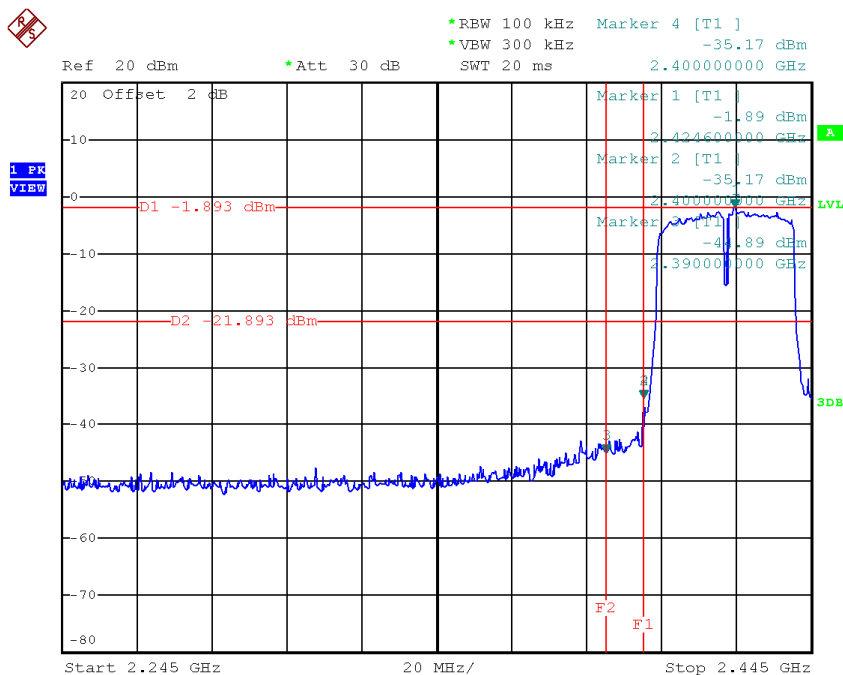


Date: 20.NOV.2014 21:15:02

TX HT40 mode CH09

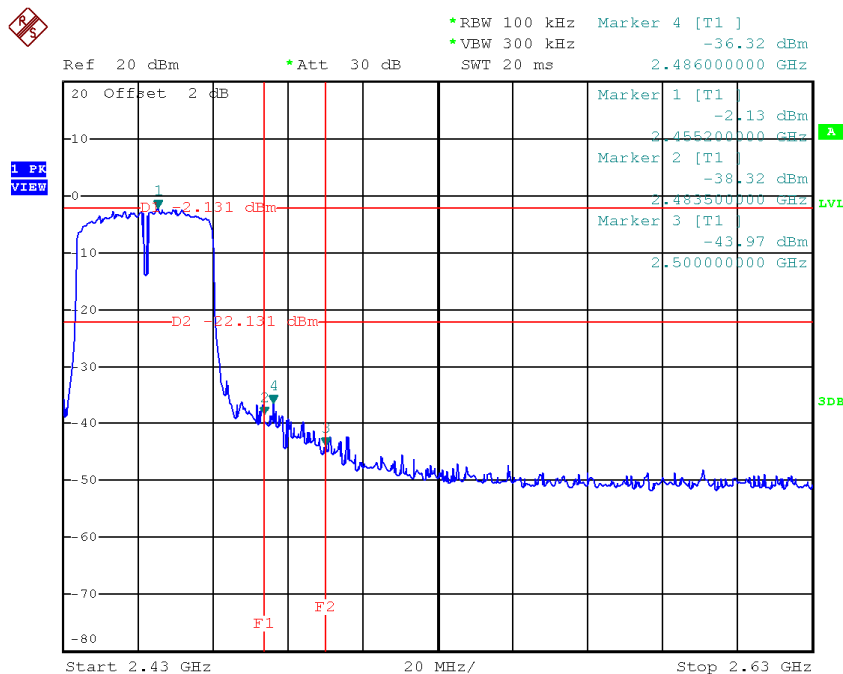


Date: 20.NOV.2014 21:17:12

TX HT40 mode CH03 (10 Harmonic of the frequency)

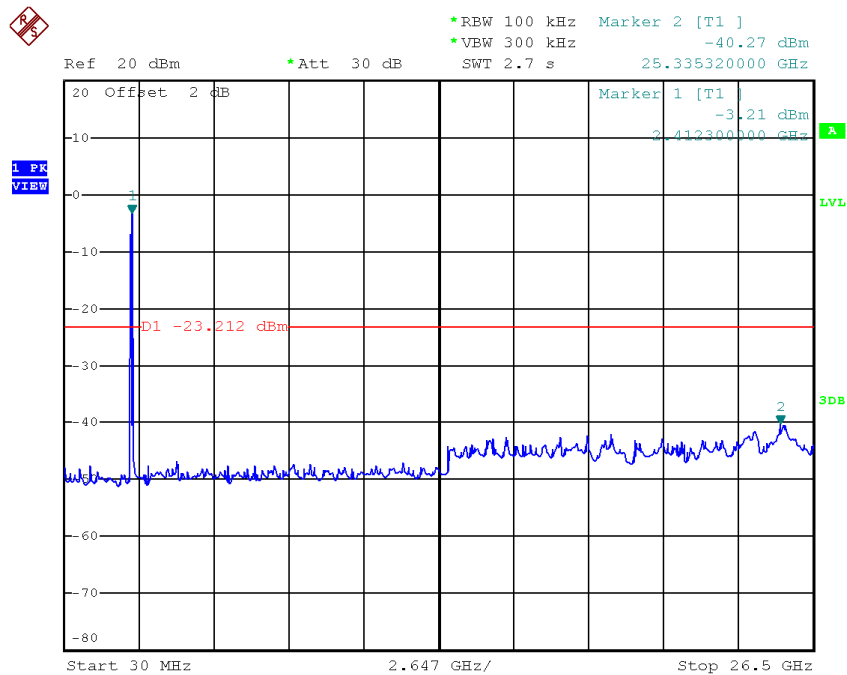


Date: 20.NOV.2014 21:14:19

TX HT40 mode CH06 (10 Harmonic of the frequency)

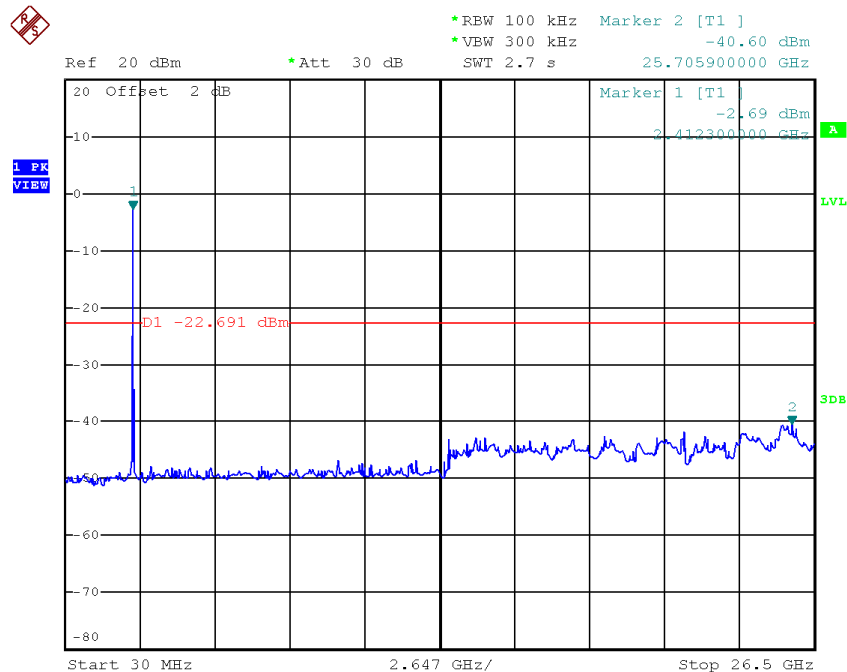

Date: 20.NOV.2014 21:15:59

TX HT40 mode CH09 (10 Harmonic of the frequency)

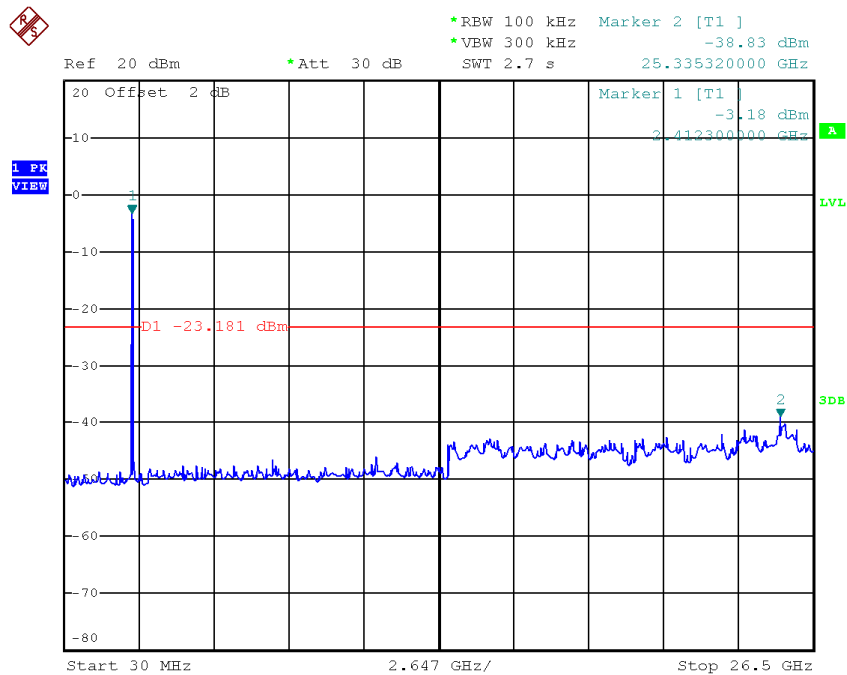


Date: 20.NOV.2014 21:16:47

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-14.68	0.03	8.00	Complies
2437	-16.05	0.02	8.00	Complies
2462	-14.73	0.03	8.00	Complies

TX CH01

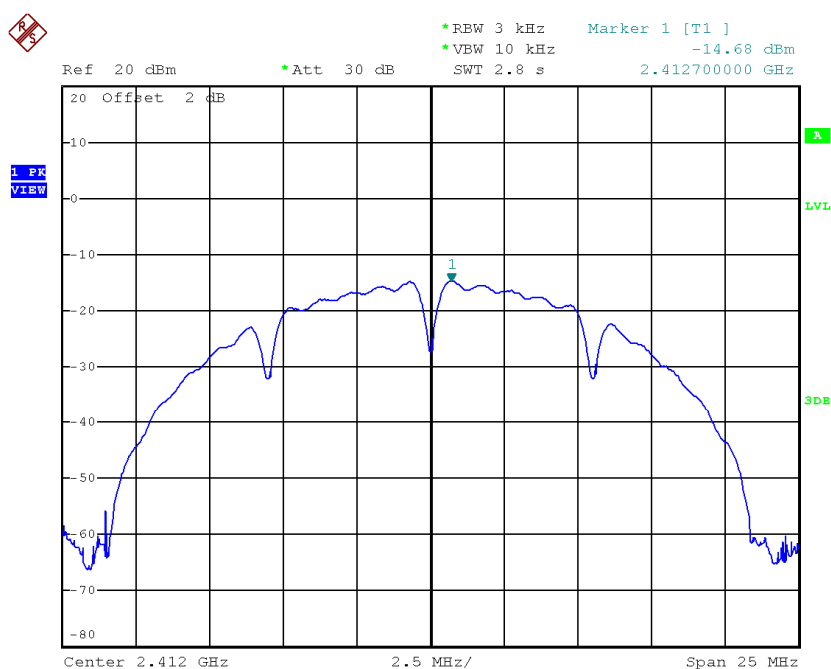


Date: 20.NOV.2014 21:02:05

TX CH06

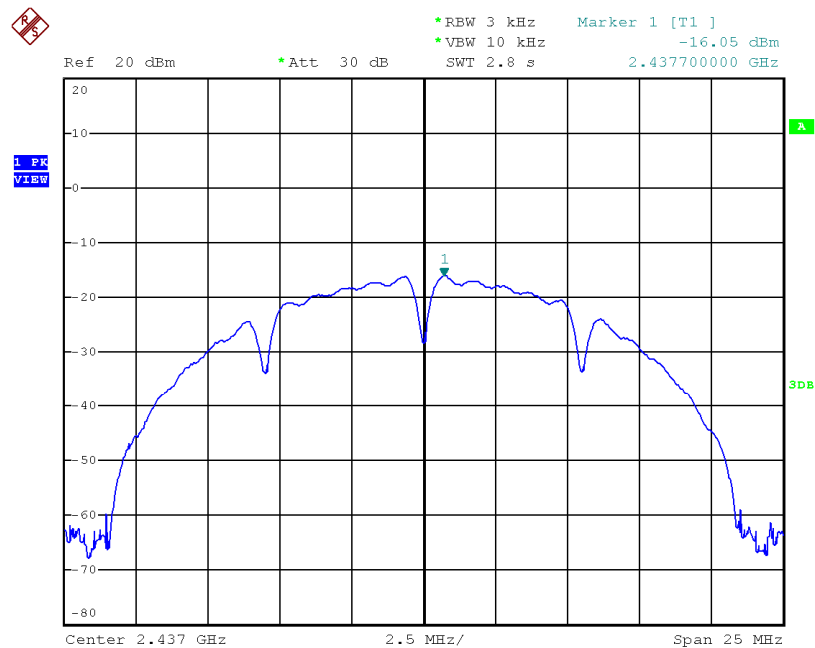

Date: 20.NOV.2014 21:25:43

TX CH11

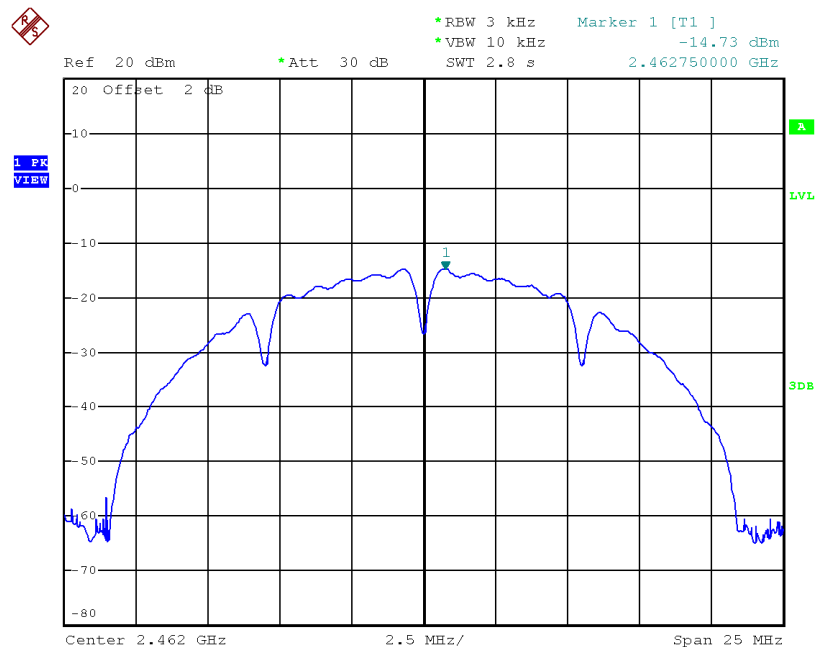


Date: 20.NOV.2014 21:06:00

Test Mode :TX G Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-12.87	0.05	8.00	Complies
2437	-14.54	0.04	8.00	Complies
2462	-12.05	0.06	8.00	Complies

TX CH01

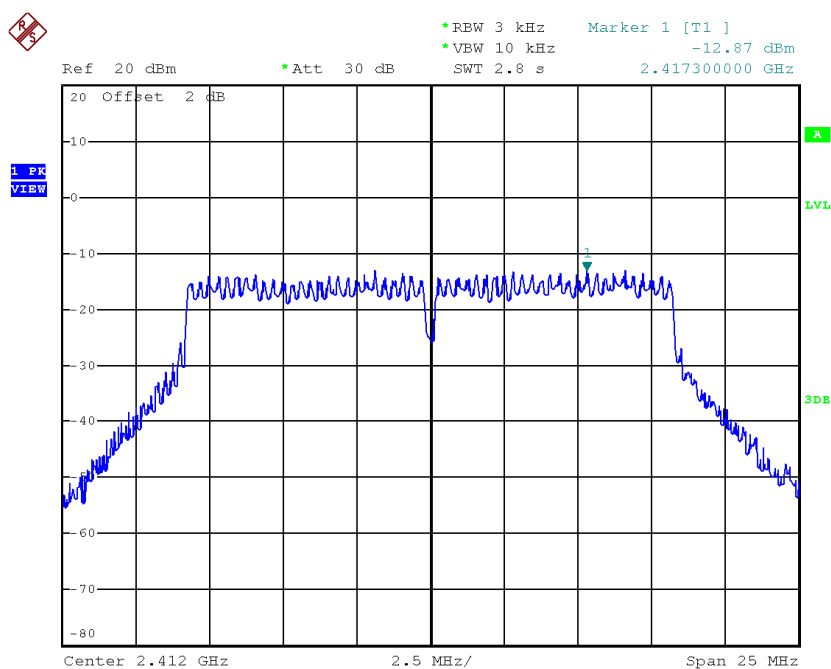


Date: 20.NOV.2014 21:07:20

TX CH06

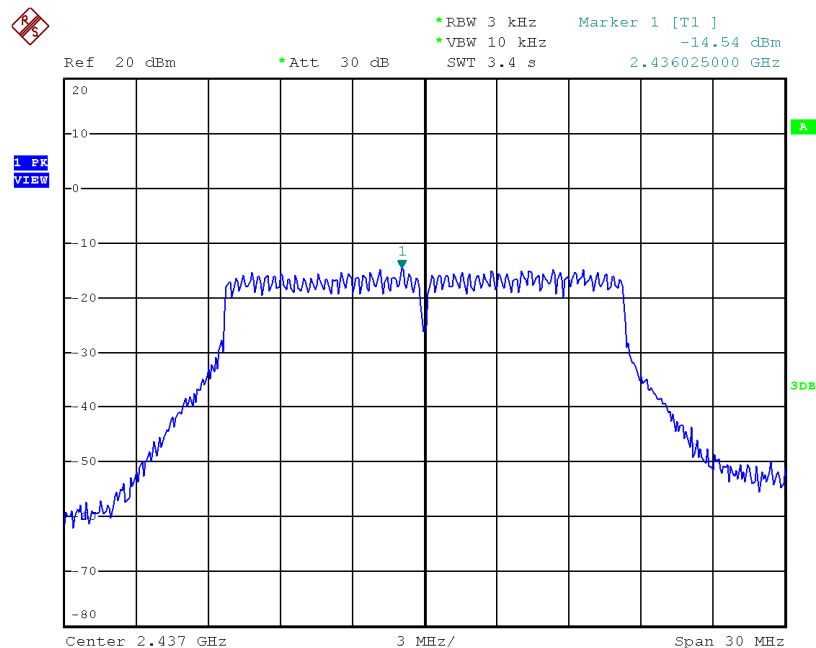

Date: 20.NOV.2014 21:42:21

TX CH11

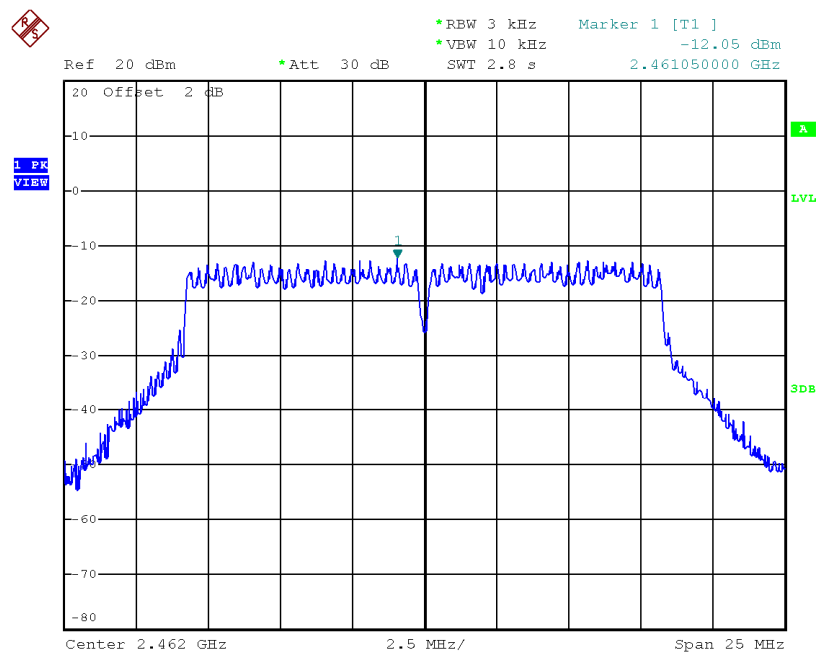


Date: 20.NOV.2014 21:09:26

Test Mode : TX N-20M Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.99	0.04	8.00	Complies
2437	-13.16	0.05	8.00	Complies
2462	-13.37	0.05	8.00	Complies

TX CH01

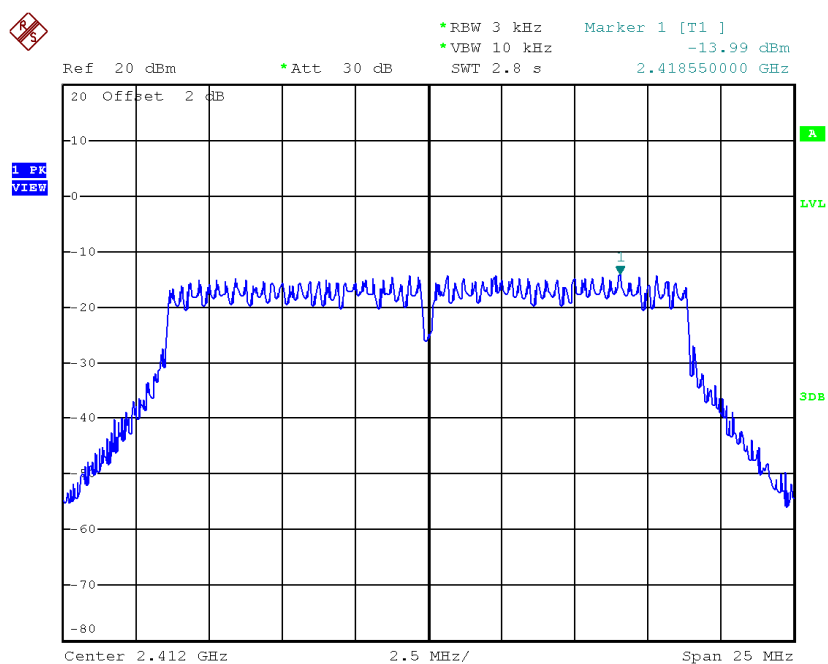


Date: 20.NOV.2014 21:11:20

TX CH06

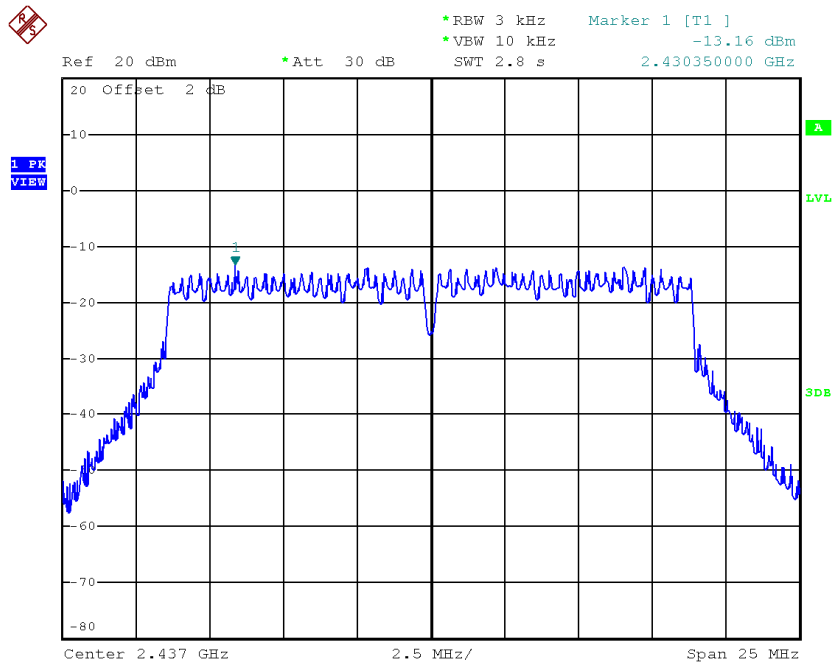

Date: 20.NOV.2014 21:12:07

TX CH11

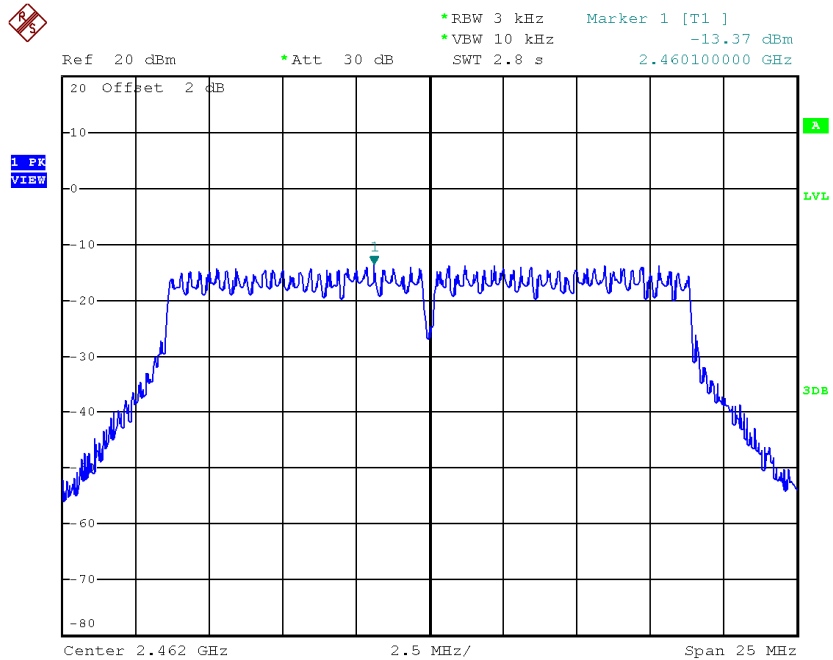


Date: 20.NOV.2014 21:13:04

Test Mode : TX N-40M Mode_CH03/06/09


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-14.02	0.04	8.00	Complies
2437	-16.08	0.02	8.00	Complies
2452	-16.11	0.02	8.00	Complies

TX CH03

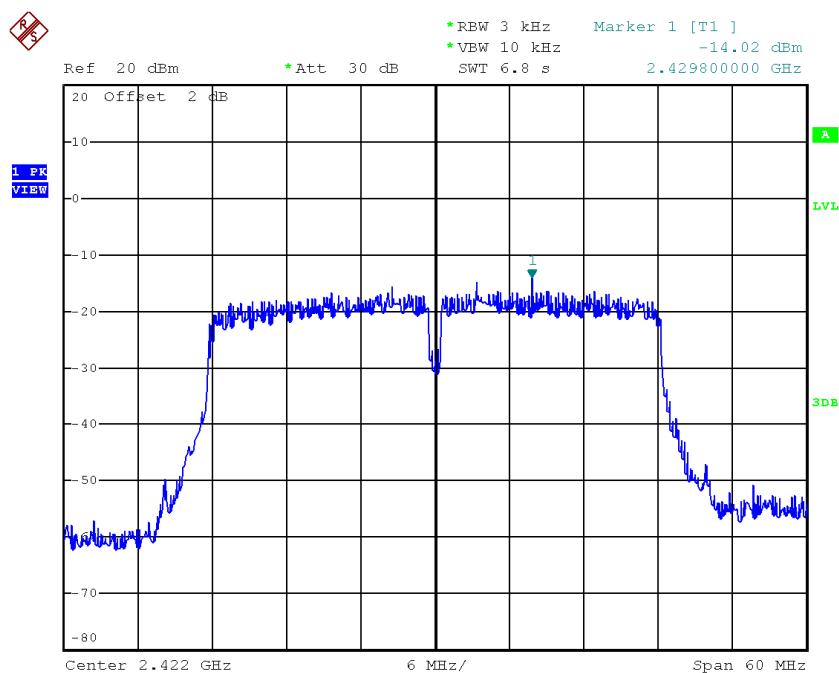


Date: 20.NOV.2014 21:15:14

TX CH06

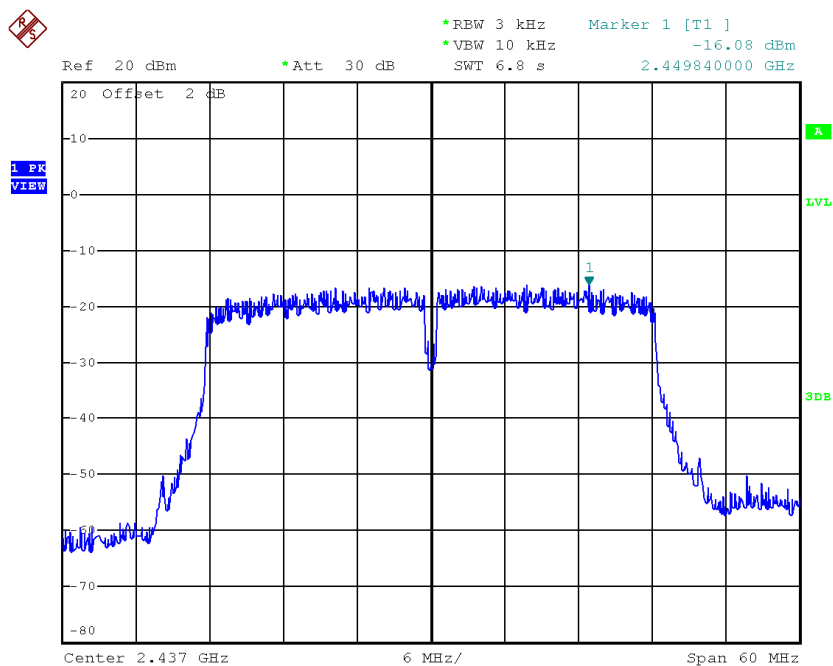

Date: 20.NOV.2014 21:16:11

TX CH09

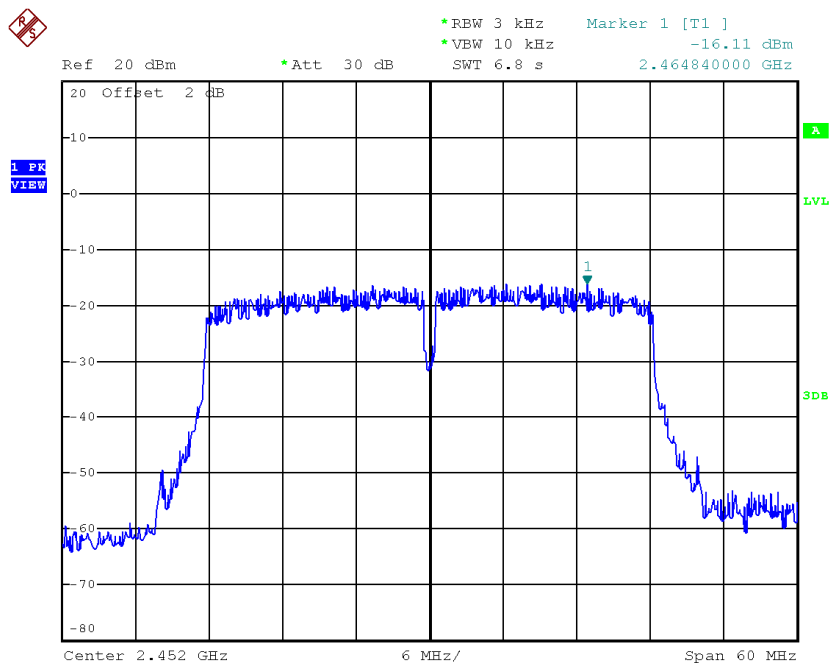

Date: 20.NOV.2014 21:17:25