

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

**Equipment** : 300N Wireless LAN Concurrent  
Dual Band Gigabit Router  
**Model No.** : BR-6475ND, GR-475ND, EW-7475PDD  
**Brand Name** : EDIMAX  
**Filing Type** : New Application  
**Applicant** : EDIMAX TECHNOLOGY CO., LTD.  
**Manufacturer** : No.3, Wu Chuan 3rd Road, Wu-Ku  
Industrial Park. Taipei Hsien, Taiwan  
**FCC ID** : NDD9564751027  
**Received Date** : Jan. 13, 2011  
**Final Test Date** : May 20, 2011  
**Multiple Listing** : Please refer to section 2.2

## Statement

**Test result included is only for the 802.11a/n (5150~5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International Inc.***

*No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.*

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details ..... 3

2.2 Table for Multiple Listing ..... 3

2.3 Accessories ..... 3

2.4 Table for Filed Antenna ..... 3

2.5 Table for Carrier Frequencies ..... 4

2.6 Table for Test Modes ..... 5

2.7 Table for Testing Locations ..... 5

2.8 Table for Supporting Units ..... 5

2.9 Table for Parameters of Test Software Setting ..... 6

2.10 EUT Operation during Test ..... 6

2.11 Test Configuration ..... 7

**3 TEST RESULT ..... 10**

3.1 AC Power Line Conducted Emissions Measurement ..... 10

3.2 99% Occupied Bandwidth Measurement ..... 16

3.3 Maximum Conducted Output Power Measurement ..... 26

3.4 Power Spectral Density Measurement ..... 29

3.5 Peak Excursion Measurement ..... 40

3.6 Radiated Emissions Measurement ..... 50

3.7 Band Edge and Fundamental Emissions Measurement ..... 74

3.8 Frequency Stability Measurement ..... 78

3.9 Antenna Requirements ..... 81

**4 LIST OF MEASURING EQUIPMENTS ..... 82**

**5 TEST LOCATION ..... 84**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 85**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE ..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B9**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C14**



# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : 300N Wireless LAN Concurrent Dual  
Band Gigabit Router  
Model No. : BR-6475ND, GR-475ND, EW-7475PDD  
Brand Name : EDIMAX  
Applicant : EDIMAX TECHNOLOGY CO., LTD.  
No.3, Wu Chuan 3rd Road, Wu-Ku Industrial  
Park. Taipei Hsien, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 13, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

## **SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	1.95 dB
3.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
3.3	15.407(a)	Maximum Conducted Output Power	Complies	0.01 dB
3.4	15.407(a)	Power Spectral Density	Complies	0.39 dB
3.5	15.407(a)	Peak Excursion	Complies	5.92 dB
3.6	15.407(b)	Radiated Emissions	Complies	1.90 dB
3.7	15.407(b)	Band Edge Emissions	Complies	1.18 dB
3.8	15.407(g)	Frequency Stability	Complies	-
3.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2 GENERAL INFORMATION

### 2.1 Product Details

The differences between EUTs are the appearance and the connector of antennas. Both of EUTs can be supplied the electricity (power) by adapter or POE. Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the specifications or user's manual.

Items	Description
Power Type	Power from adaptert
Modulation	See the below table for IEEE 802.11n
Data Rate (Mbps)	
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Frequency Range	5150~5250MHz
Channel Band Width (99%)	802.11a : 17.07 MHz 802.11n : MCS 8 (20MHz) : 17.60 MHz ; MCS 8 (40MHz) : 35.80 MHz
Conducted Output Power	802.11a : 14.85 dBm 802.11n : MCS 8 (20MHz) : 14.19 dBm ; MCS 8 (40MHz) : 16.99 dBm

### 2.2 Table for Multiple Listing

Brand and models that are exactly the same EUT, products with different models only because of market segmentation.

No.	Brand Name	Model Name
1	Edimax	BR-6475ND, GR-475ND, EW-7475PDD
2	Intellient	525039
3	SMC	SMCE21011 V2

### 2.3 Accessories

Power	Brand	Model	Rating
Switching Adapter	DVE	DSA-12GX-12 FUS 120120	INPUT : 100-240V ~ 50/60Hz 0.3A OUTPUT : +12V 1A

### 2.4 Table for Filed Antenna

#### Antenna & Bandwidth

Antenna Mode	Two Chain	
Bandwidth Mode	20 MHz	40 MHz
802.11n (5150~5250MHz)	V	V

#### Antenna Type 1

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
A	Dipole Antenna (white)	Reversed-SMA	3.00	TX / RX
B	Dipole Antenna (white)	Reversed-SMA	3.00	TX / RX

#### Antenna Type 2

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
A	Dipole Antenna (black)	Fixed on Board	3.00	TX / RX
B	Dipole Antenna (black)	Fixed on Board	3.00	TX / RX

Note: IEEE 802.11n used two antennas for signal transmitting and receiving.  
(2T2R Spatial Multiplexing MIMO configuration)  
Directional gain = Gain + 10 log(N) dBi = 3 + 10 log(2) = 6 dBi

**IEEE 802.11n Modulation Scheme**

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Data rate(Mbps)	
									800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

**2.5 Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency (20MHz)	Channel No.	Frequency (40MHz)
5150~5250 MHz Band 1	36	5180 MHz	38	5190 MHz
	40	5200 MHz	46	5230 MHz
	44	5220 MHz	-	-
	48	5240 MHz	-	-

**2.6 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission Radiated Emission Below 1GHz	Adapter Mode / POE Mode	Auto	-	-
Max. Conducted Output Power 26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	11a Band 1/BPSK	6Mbps	36/40/48	A/B A+B
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Radiated Emission Above 1GHz Fundamental Emissions	11a Band 1/BPSK	6Mbps	36/40/48	A
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Band Edge Emission	11a Band 1/BPSK	6Mbps	36/48	A
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/48	A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	

**2.7 Table for Testing Locations**

Test Site No.	Site Category	Location
CO01-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

**2.8 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID
(USB) Mouse	Microsoft	1004	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
Notebook	DELL	D505	DoC
iPod nano	Apple	A1199	N/A
POE	D-Link	DWL-P200	N/A
Notebook (Remote workstation)	DELL	E5500	DoC

**2.9 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For Single Chain:  
Power Parameters of IEEE 802.11a**

Test Software Version	RT3x9x QA		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	9	11	0F

**For Two Chain:  
Power Parameters of IEEE 802.11n Ant. A+Ant. B**

Test Software Version	RT3x9x QA		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n(20MHz)	08/08	08/08	08/08
Frequency	5190 MHz	5230 MHz	-
IEEE 802.11n(40MHz)	03/03	0E/0E	-

**2.10 EUT Operation during Test**

An executive program, "EMCTEST.EXE" under Win XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The NB sends "H" messages to the panel and displays "H" patterns on the screen.
- c. The NB sends messages to the modem.
- d. Repeat the step b to c.


At the same time, the following programs were executed:

- Executed "WiFi" to link with the remote workstation to receive and transmit data.
- Executed "Ping" to link with the remote workstation to receive and transmit data via RJ45 cable.
- Executed "RT3x9x QA" to keep transmitting signals at fixed frequency. (Only for radio tested.)


2.11 Test Configuration

2.11.1 Radiation Emissions Test Configuration


For radiated emissions 9kHz~1GHz  
Adapter Mode

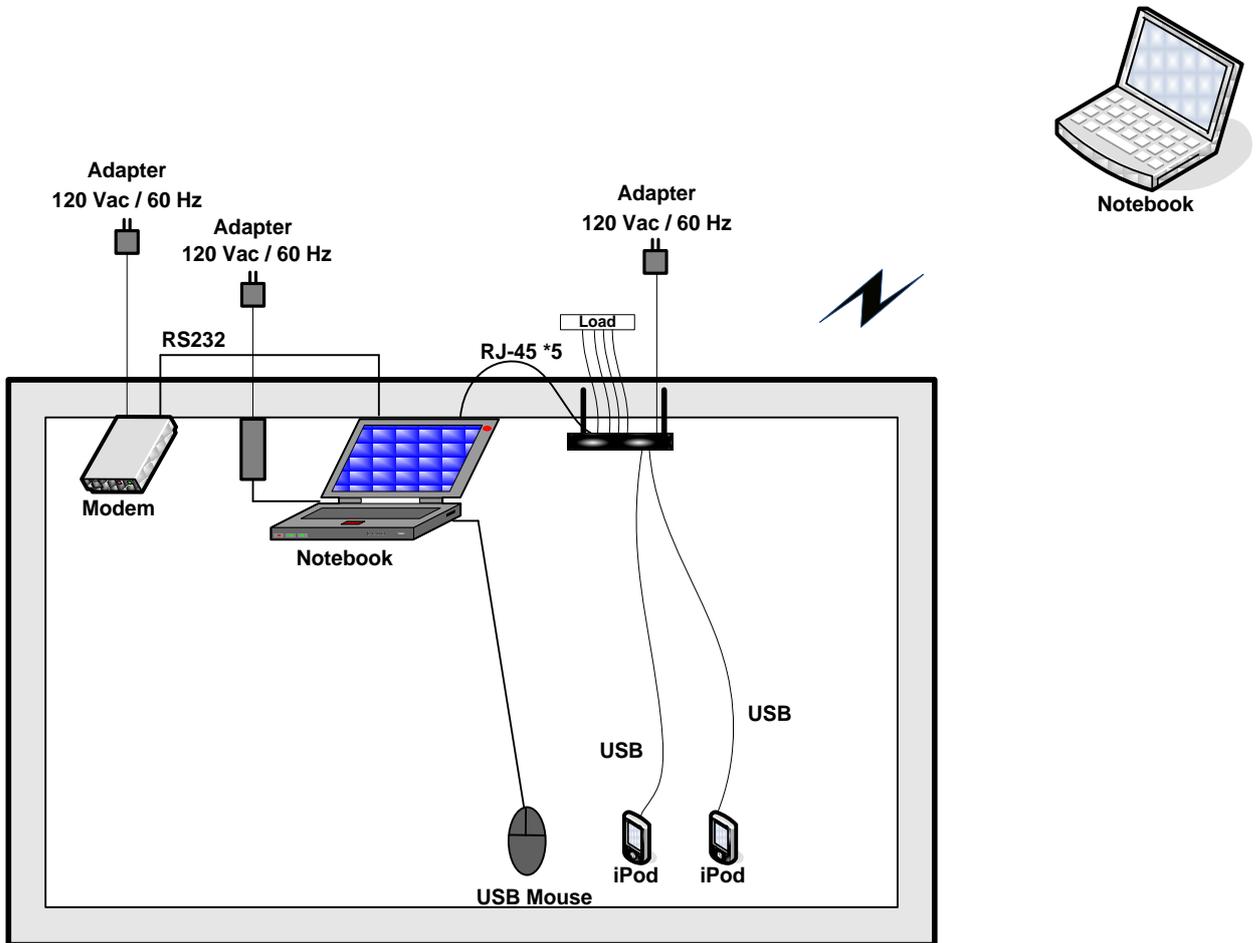

POE Mode

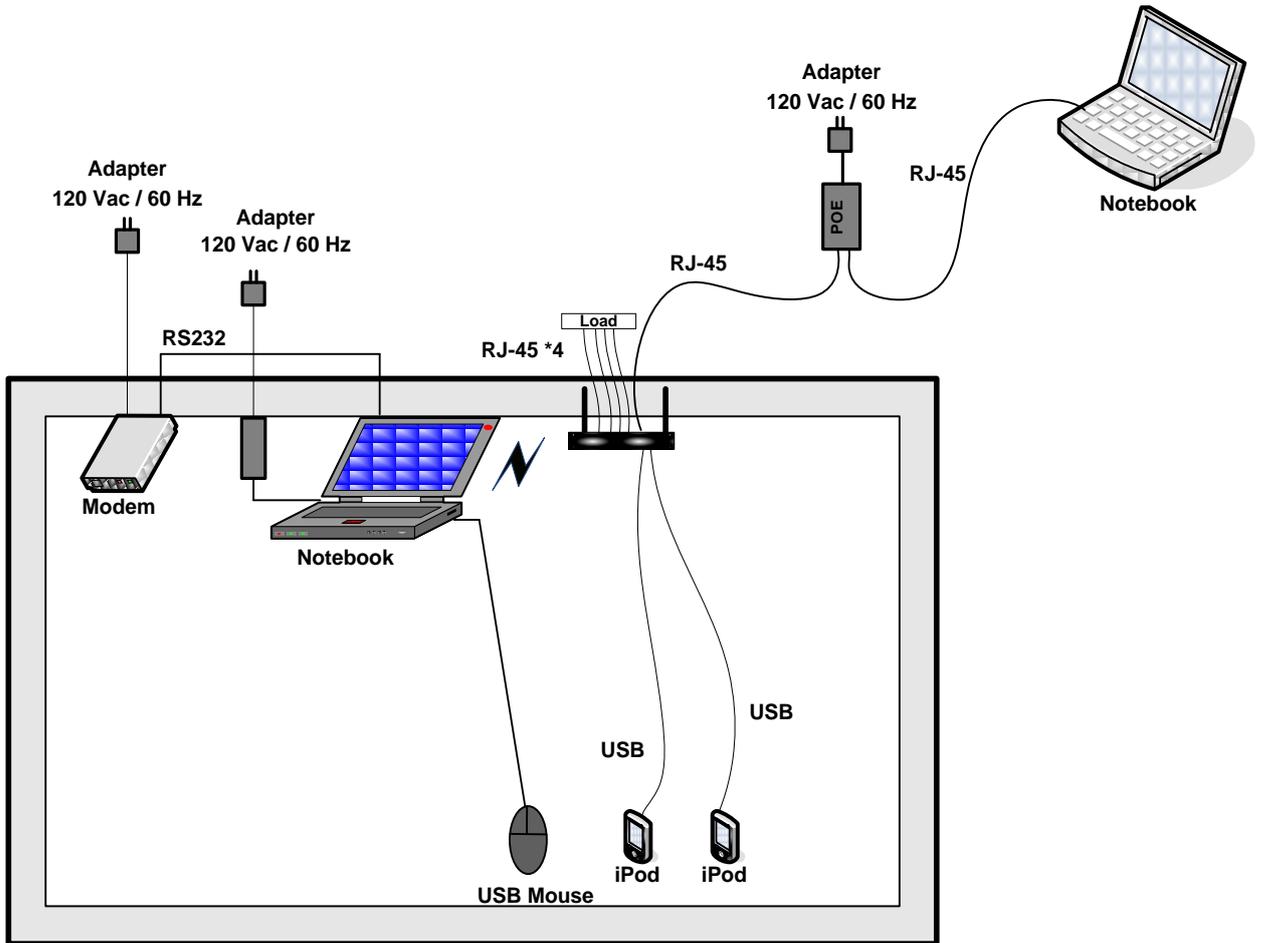

**For radiated emissions above 1GHz**

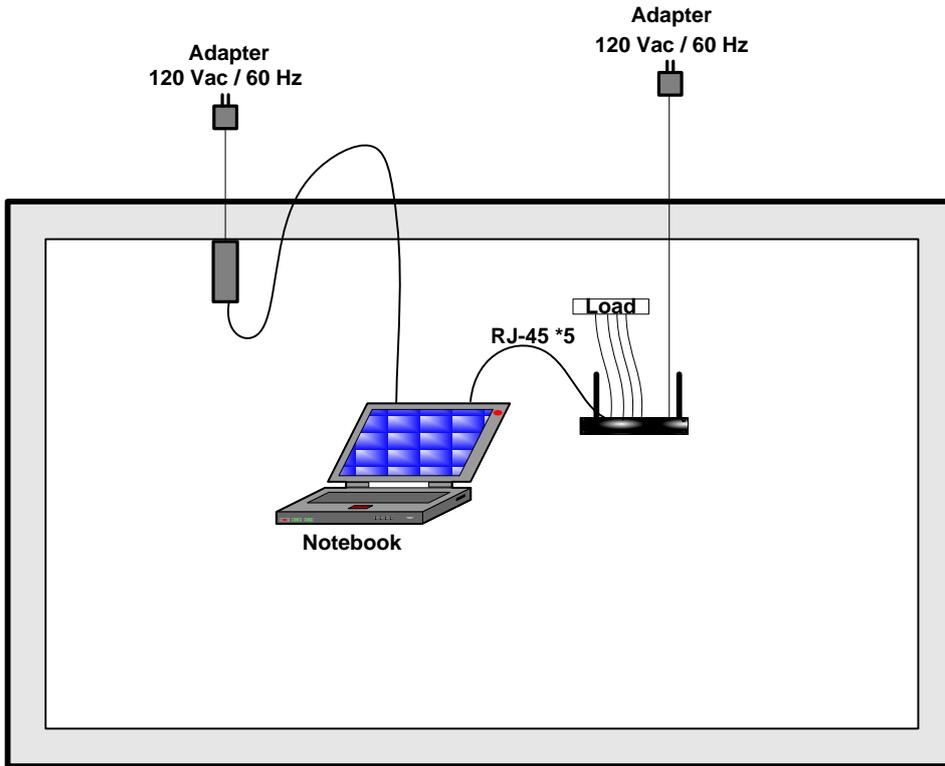

**3 TEST RESULT**

**3.1 AC Power Line Conducted Emissions Measurement**

**3.1.1 Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3 Test Procedures**

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

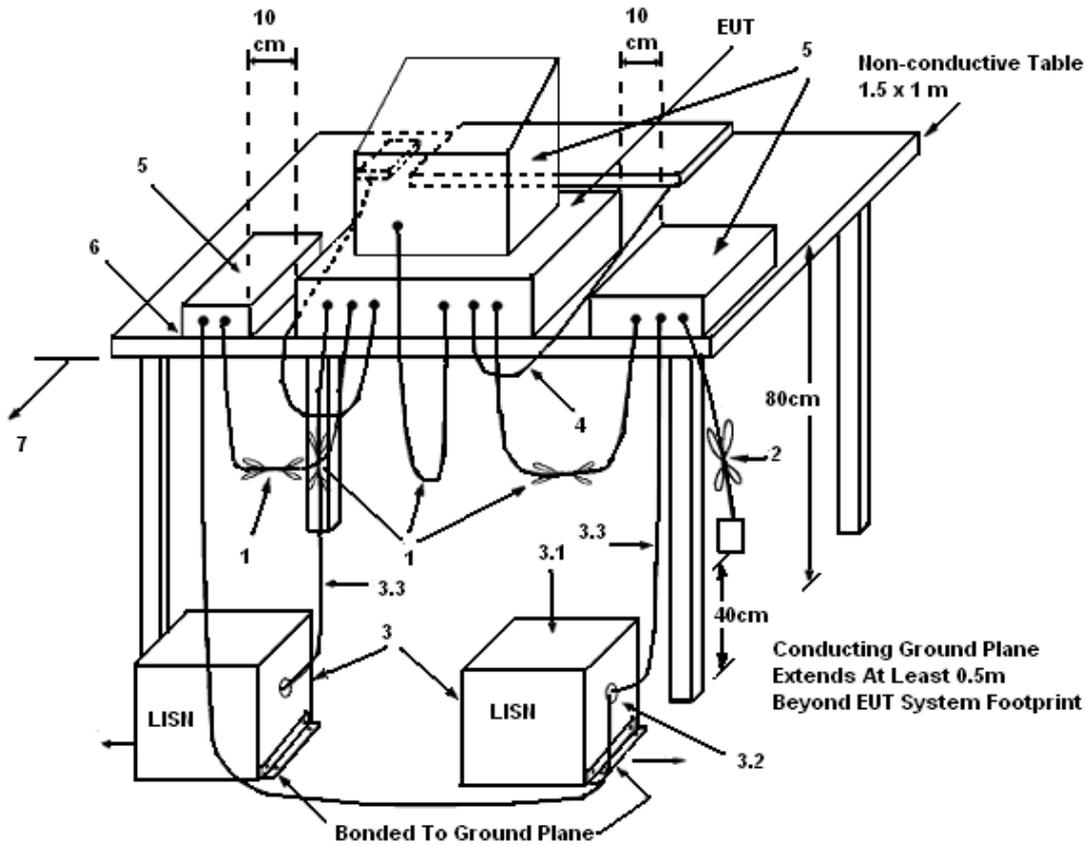

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Mar. 22, 2011	Test Site No.	CO01-HY
Temperature	20.8°C	Humidity	51.3%
Test Engineer	David	Configuration	Adapter Mode

Line

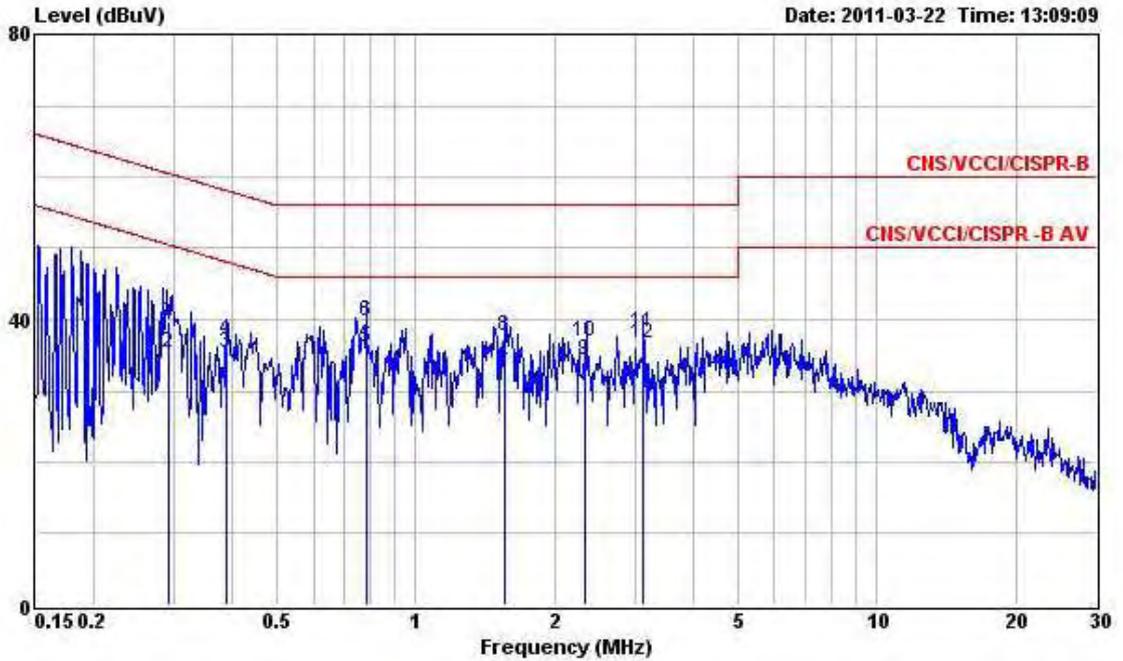

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.291	39.79	-20.71	60.50	39.10	0.09	0.60	QP
2	0.291	35.35	-15.15	50.50	34.66	0.09	0.60	Average
3	0.388	35.28	-12.82	48.10	34.59	0.09	0.60	Average
4	0.388	37.27	-20.83	58.10	36.58	0.09	0.60	QP
5	0.779	36.06	-9.94	46.00	35.36	0.10	0.60	Average
6	0.779	39.79	-16.21	56.00	39.09	0.10	0.60	QP
7	1.560	32.46	-13.54	46.00	31.74	0.12	0.60	Average
8	1.560	37.56	-18.44	56.00	36.84	0.12	0.60	QP
9	2.336	34.31	-11.69	46.00	33.57	0.14	0.60	Average
10	2.336	36.84	-19.16	56.00	36.10	0.14	0.60	QP
11	3.118	38.15	-17.85	56.00	37.39	0.16	0.60	QP
12	3.118	36.64	-9.36	46.00	35.88	0.16	0.60	Average

Neutral

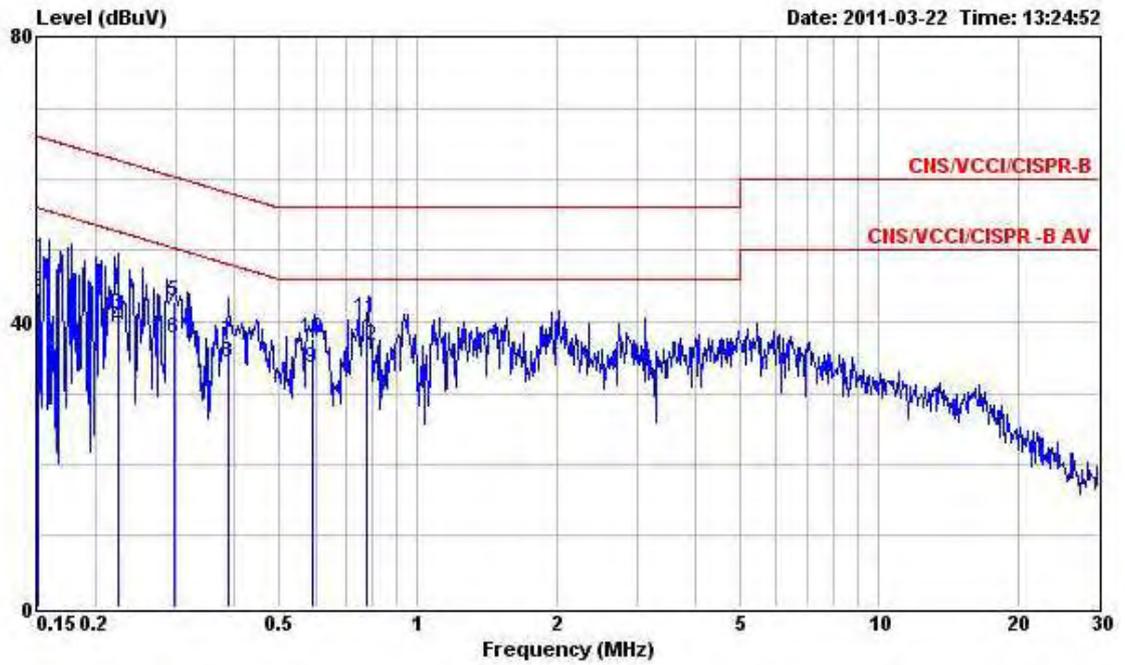


	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.150	27.43	-28.57	56.00	26.79	0.08	0.56	Average
2	0.150	44.19	-21.81	66.00	43.55	0.08	0.56	QP
3	0.223	40.96	-21.75	62.71	40.28	0.08	0.60	QP
4	0.223	39.25	-13.46	52.71	38.57	0.08	0.60	Average
5	0.297	42.77	-17.56	60.33	42.08	0.09	0.60	QP
6	0.297	37.73	-12.60	50.33	37.04	0.09	0.60	Average
7	0.387	37.22	-20.91	58.13	36.53	0.09	0.60	QP
8	0.387	34.35	-13.78	48.13	33.66	0.09	0.60	Average
9	0.590	33.50	-12.50	46.00	32.80	0.10	0.60	Average
10	0.590	37.63	-18.37	56.00	36.93	0.10	0.60	QP
11	0.778	40.40	-15.60	56.00	39.70	0.10	0.60	QP
12	0.778	36.63	-9.37	46.00	35.93	0.10	0.60	Average

Note:  
Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Mar. 22, 2011	<b>Test Site No.</b>	CO01-HY
<b>Temperature</b>	20.8°C	<b>Humidity</b>	51.3%
<b>Test Engineer</b>	David	<b>Configuration</b>	POE Mode

**Line**

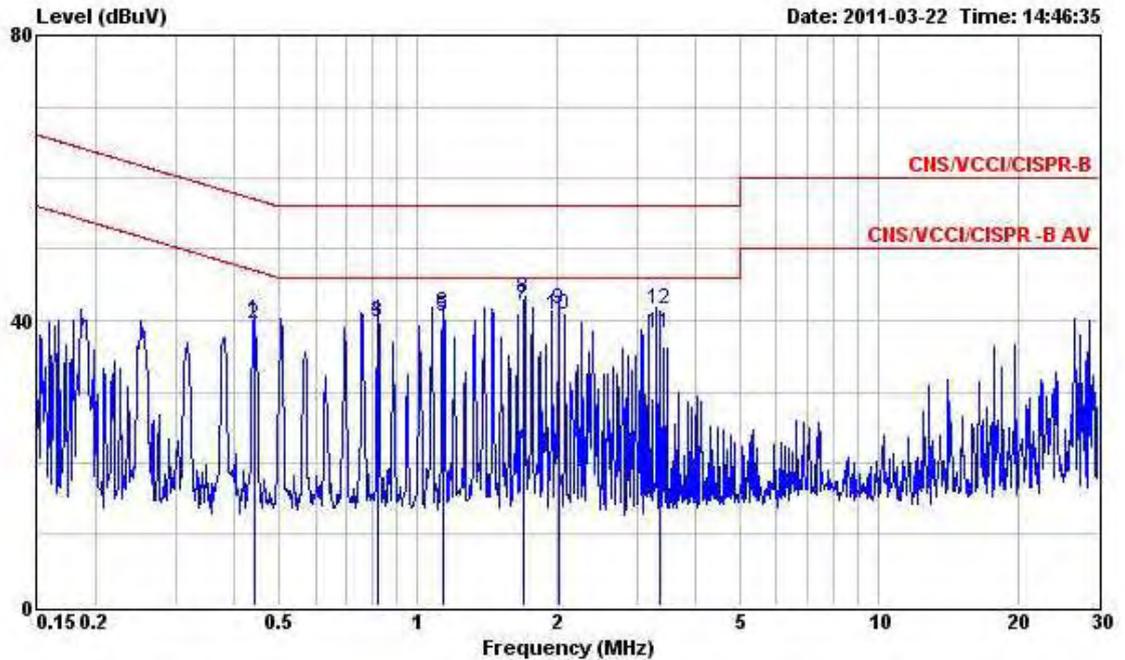

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.442	39.89	-17.13	57.02	39.20	0.09	0.60	QP
2	0.442	39.54	-7.48	47.02	38.85	0.09	0.60	Average
3	0.822	39.63	-6.37	46.00	38.92	0.11	0.60	Average
4	0.822	39.93	-16.07	56.00	39.22	0.11	0.60	QP
5	1.136	40.64	-5.36	46.00	39.93	0.11	0.60	Average
6	1.136	41.08	-14.92	56.00	40.37	0.11	0.60	QP
7	1.703	42.16	-3.84	46.00	41.43	0.13	0.60	Average
8	1.703	43.22	-12.78	56.00	42.49	0.13	0.60	QP
9	2.017	41.56	-14.44	56.00	40.83	0.13	0.60	QP
10	2.017	40.90	-5.10	46.00	40.17	0.13	0.60	Average
11	3.340	38.25	-7.75	46.00	37.49	0.16	0.60	Average
12	3.343	41.65	-14.35	56.00	40.89	0.16	0.60	QP

Neutral

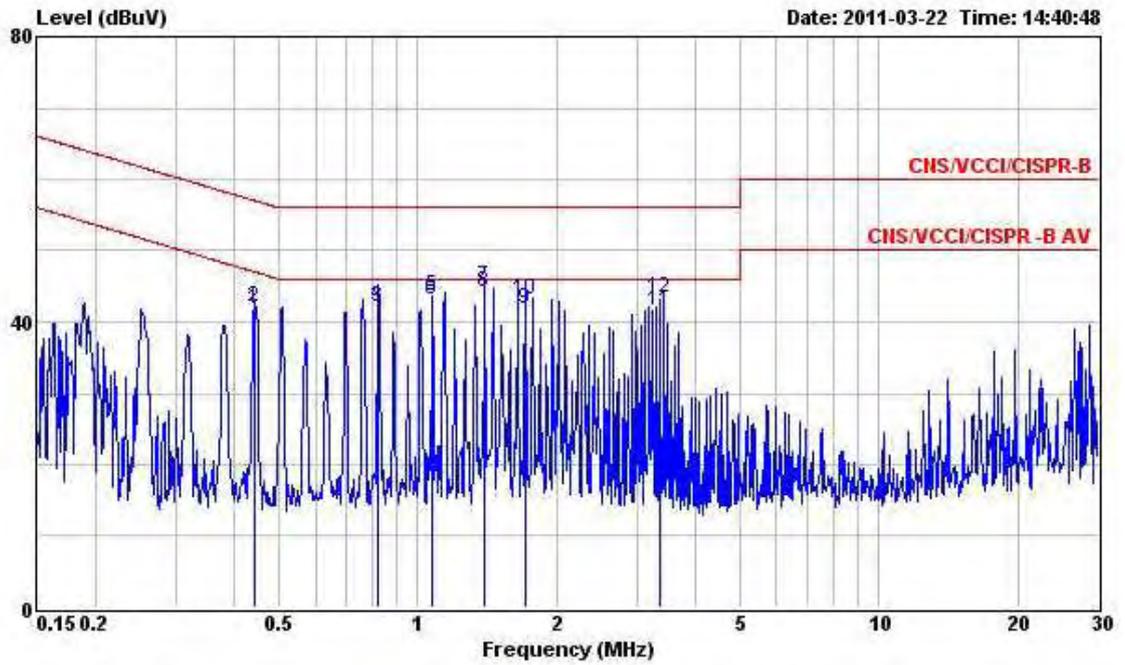

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.442	41.87	-5.15	47.02	41.20	0.07	0.60	Average
2	0.442	42.09	-14.93	57.02	41.42	0.07	0.60	QP
3	0.822	42.21	-3.79	46.00	41.52	0.09	0.60	Average
4	0.822	42.42	-13.58	56.00	41.73	0.09	0.60	QP
5	1.075	43.71	-12.29	56.00	43.02	0.09	0.60	QP
6	1.075	43.23	-2.77	46.00	42.54	0.09	0.60	Average
7	1.390	44.97	-11.03	56.00	44.27	0.10	0.60	QP
8	1.390	44.05	-1.95	46.00	43.35	0.10	0.60	Average
9	1.710	41.92	-4.08	46.00	41.21	0.11	0.60	Average
10	1.710	43.13	-12.87	56.00	42.42	0.11	0.60	QP
11	3.350	41.58	-4.42	46.00	40.85	0.13	0.60	Average
12	3.351	43.42	-12.58	56.00	42.69	0.13	0.60	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.

**3.2 99% Occupied Bandwidth Measurement**

**3.2.1 Limit**

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameters</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

**3.2.4 Test Setup Layout**

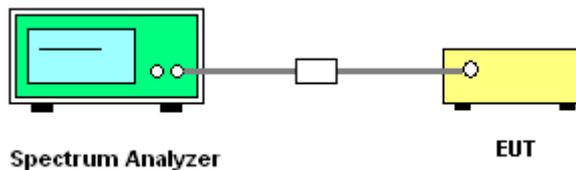

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of 99% Occupied Bandwidth**

<b>Final Test Date</b>	May 20, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**Configuration of IEEE 802.11a**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	21.47	16.91
40	5200 MHz	24.76	16.99
48	5240 MHz	25.16	17.07

**Configuration IEEE 802.11n (20MHz) Ant. A**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.10	17.50
40	5200 MHz	20.20	17.50
48	5240 MHz	20.10	17.50

**Configuration IEEE 802.11n (20MHz) Ant. B**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	19.60	17.60
40	5200 MHz	19.60	17.60
48	5240 MHz	19.60	17.60


**Configuration IEEE 802.11n (40MHz) Ant. A**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.20	35.60
46	5230 MHz	39.20	35.60

**Configuration IEEE 802.11n (40MHz) Ant. B**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.00	35.60
46	5230 MHz	39.00	35.80

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

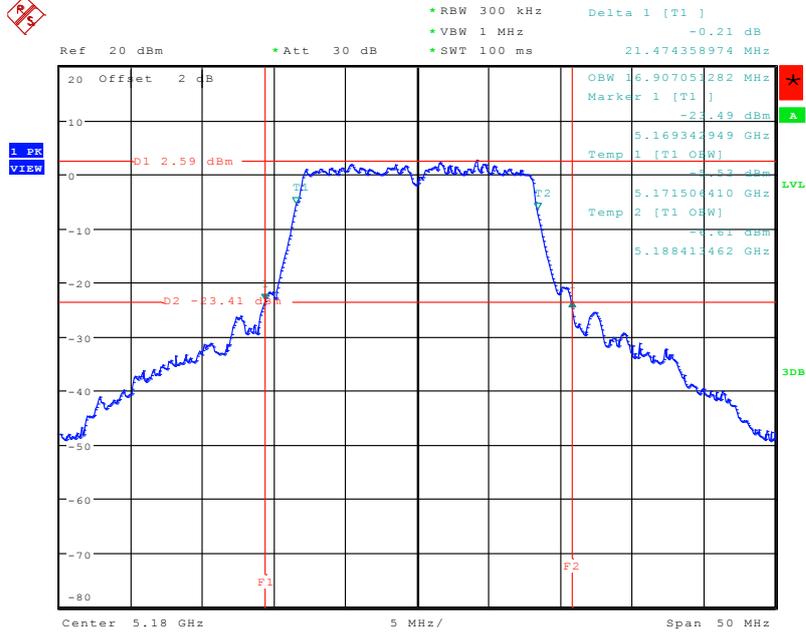


Date: 28.JAN.2011 21:42:55

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

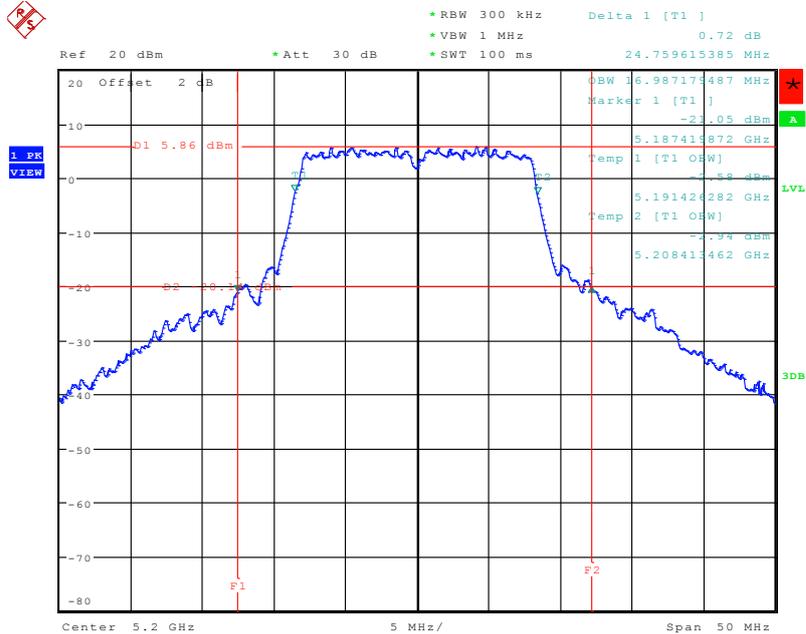


Date: 28.JAN.2011 21:44:58

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

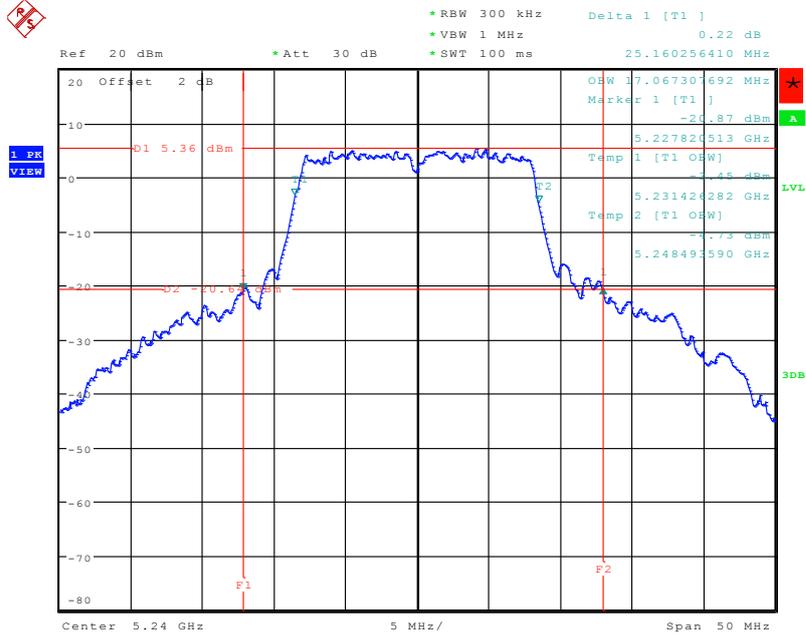


Date: 28.JAN.2011 21:46:47

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5180 MHz

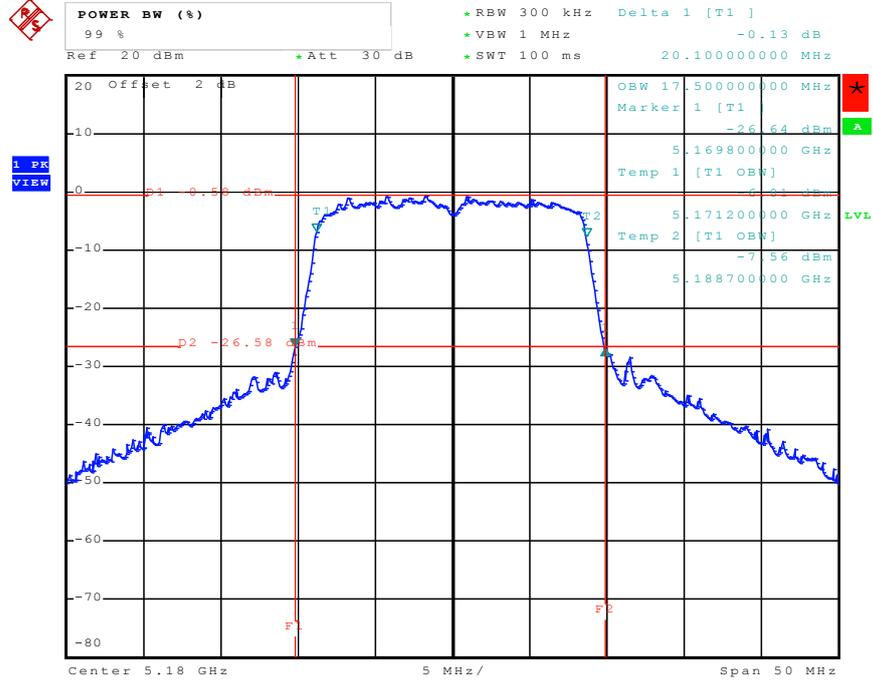


Date: 20.MAY.2011 18:04:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5200 MHz

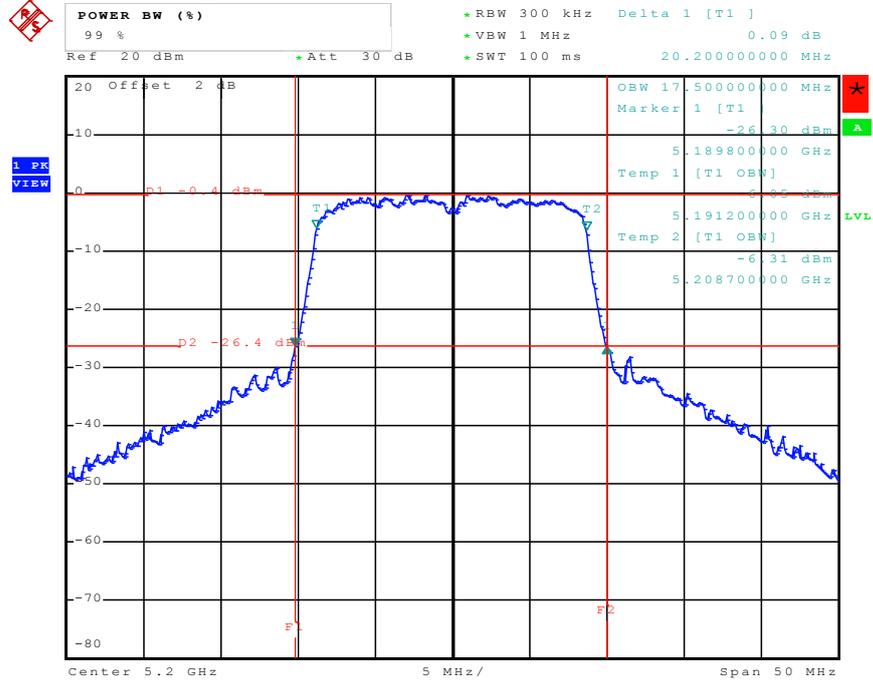


Date: 20.MAY.2011 18:07:30

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5240 MHz

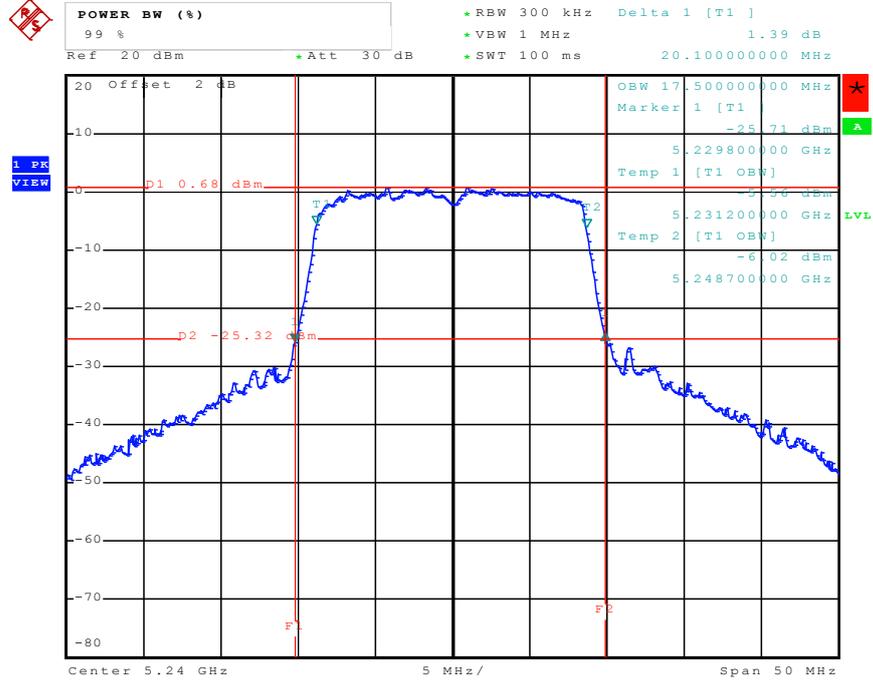


Date: 20.MAY.2011 18:10:53

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5180 MHz

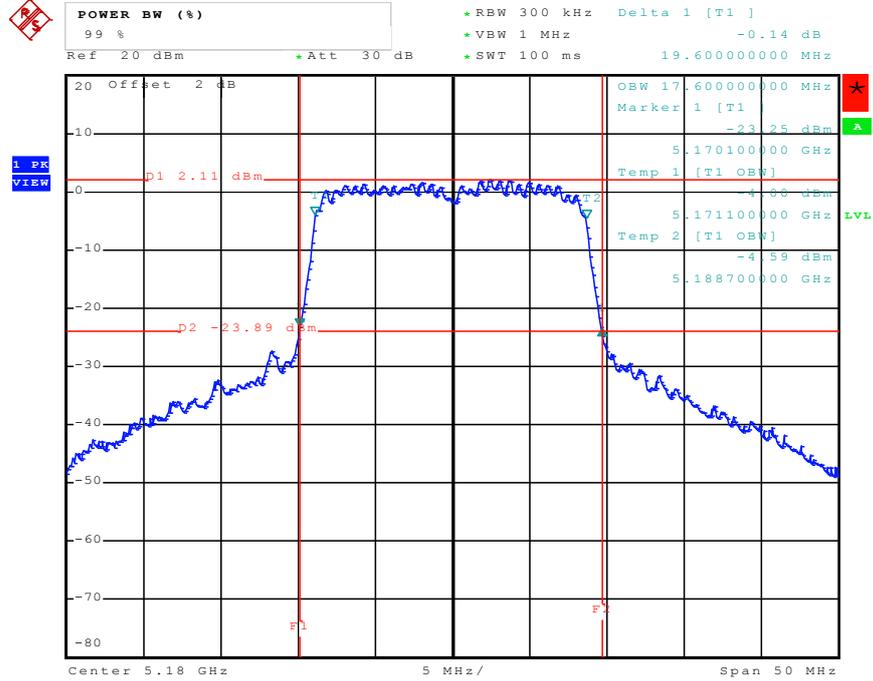


Date: 20.MAY.2011 18:13:51

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5200 MHz

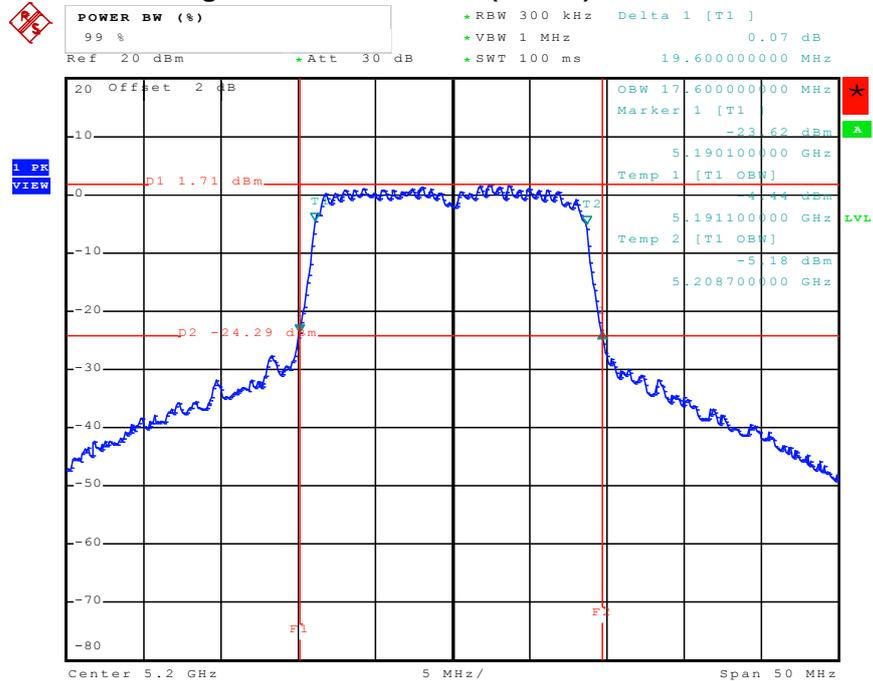


Date: 20.MAY.2011 18:18:09

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5240 MHz

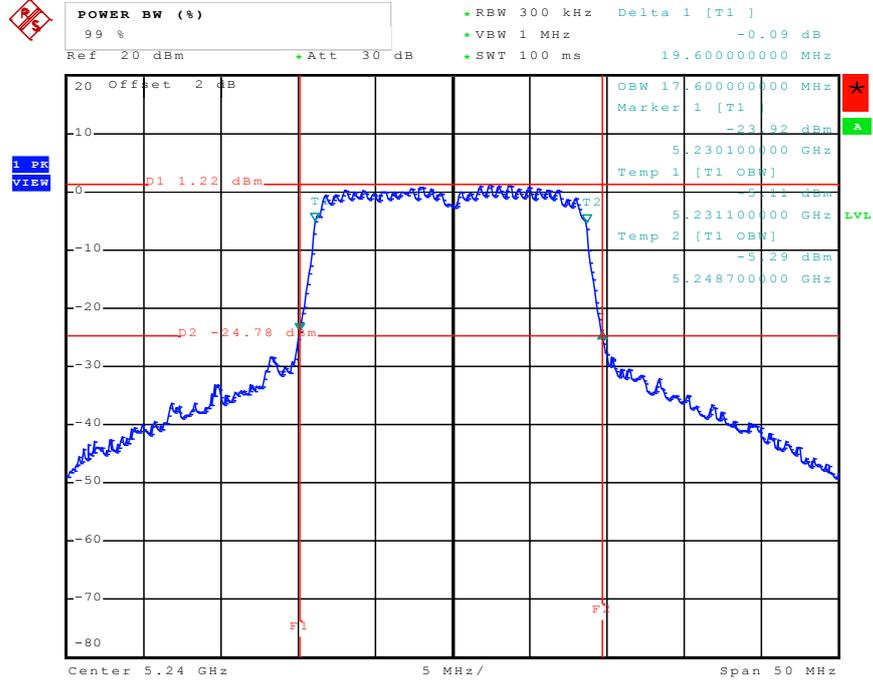


Date: 20.MAY.2011 18:21:42

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5190 MHz

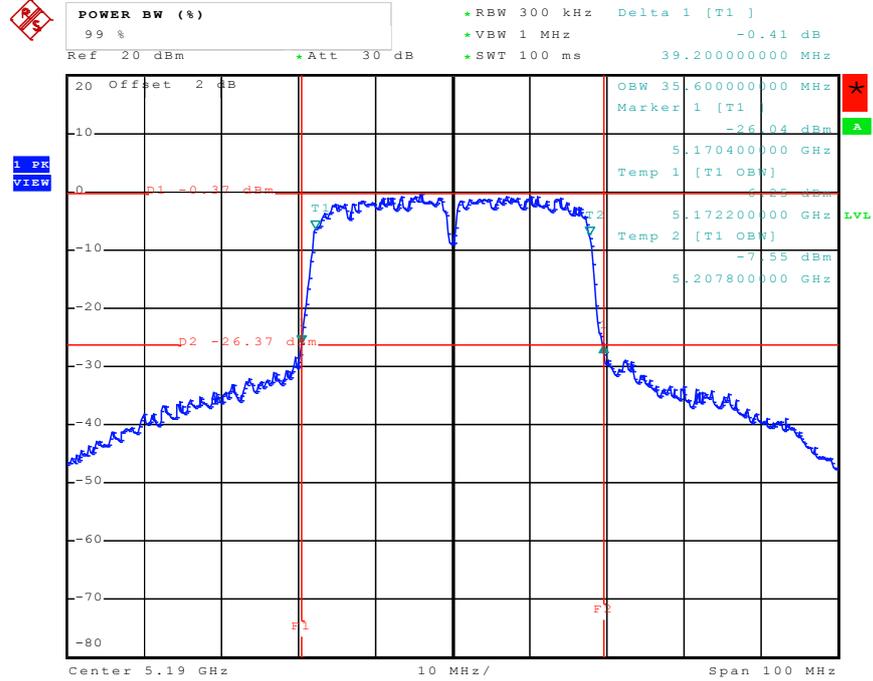


Date: 20.MAY.2011 19:24:02

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5230 MHz

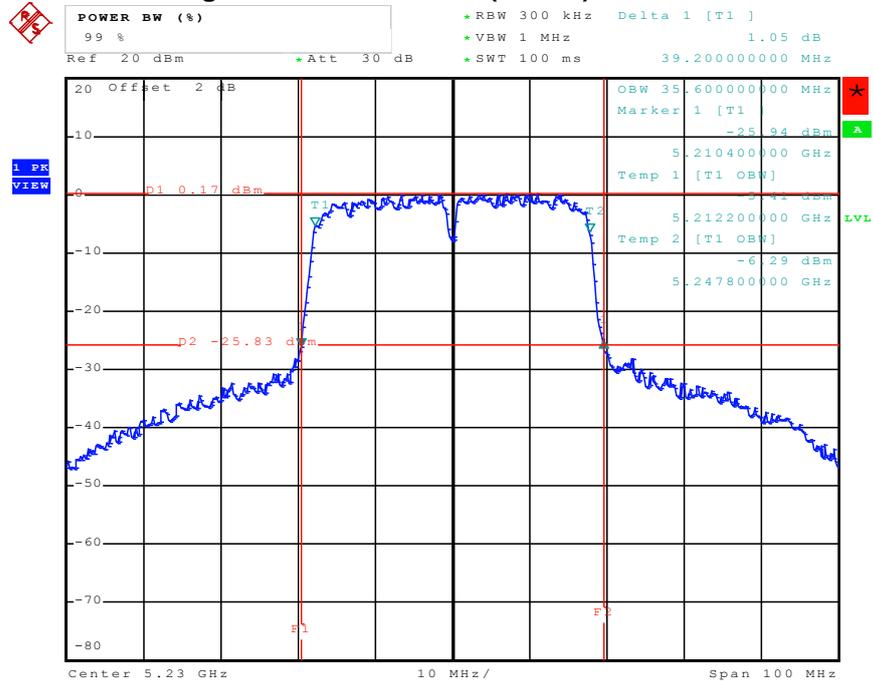


Date: 20.MAY.2011 19:33:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5190 MHz

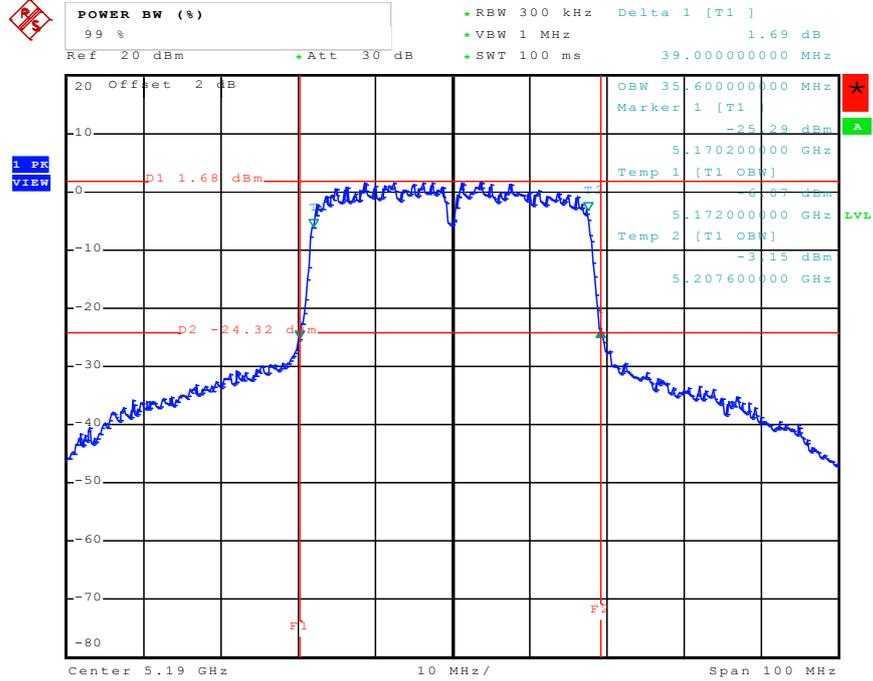

Date: 20.MAY.2011 19:29:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5230 MHz

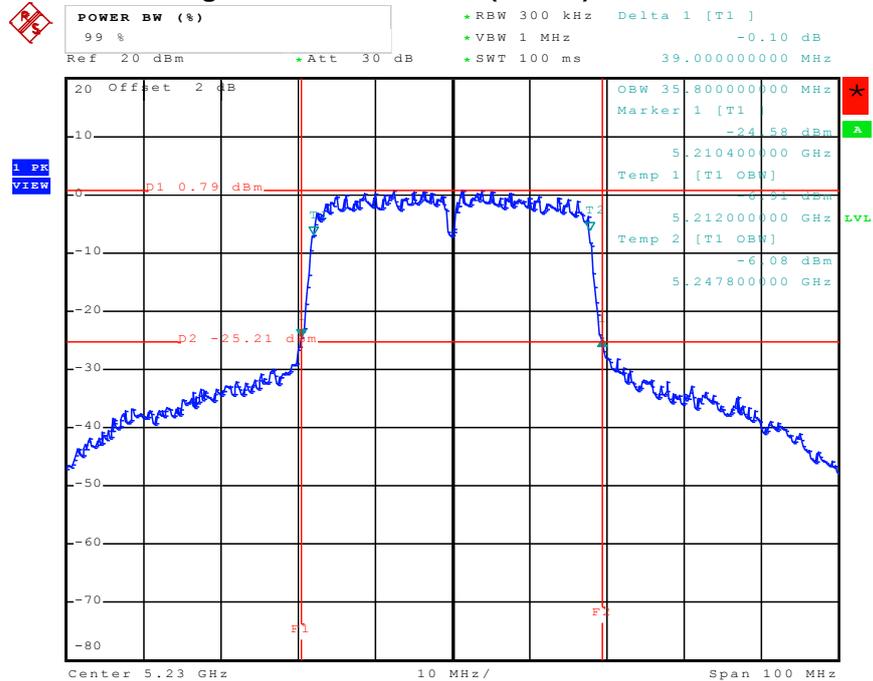

Date: 20.MAY.2011 19:36:33

**3.3 Maximum Conducted Output Power Measurement**

**3.3.1 Limit**

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Maximum Conducted Output Power mean that the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Sensor	MA2411B

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the wideband power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

**3.3.4 Test Setup Layout**

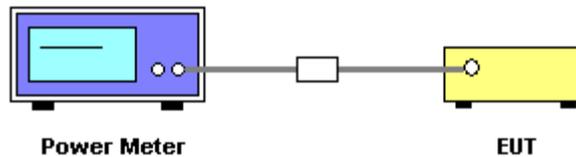

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Maximum Conducted Output Power**

<b>Final Test Date</b>	May 20, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**Configuration of IEEE 802.11a**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.33	17.00	<b>Complies</b>
40	5200 MHz	14.85	17.00	<b>Complies</b>
48	5240 MHz	13.96	17.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.58	17.00	<b>Complies</b>
40	5200 MHz	11.41	17.00	<b>Complies</b>
48	5240 MHz	11.28	17.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	9.43	17.00	<b>Complies</b>
40	5200 MHz	10.25	17.00	<b>Complies</b>
48	5240 MHz	11.08	17.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. A+Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.65	17.00	<b>Complies</b>
40	5200 MHz	13.88	17.00	<b>Complies</b>
48	5240 MHz	14.19	17.00	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz) Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	12.67	17.00	Complies
46	5230 MHz	14.36	17.00	Complies

**Configuration IEEE 802.11n (40MHz) Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.56	17.00	Complies
46	5230 MHz	13.57	17.00	Complies

**Configuration IEEE 802.11n (40MHz) Ant. A+Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	15.16	17.00	Complies
46	5230 MHz	16.99	17.00	Complies

**3.4 Power Spectral Density Measurement**

**3.4.1 Limit**

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.

**3.4.4 Test Setup Layout**

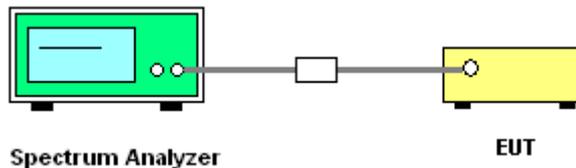

**3.4.5 Test Deviation**

There is no deviation with the original standard.

**3.4.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Test Result of Power Spectral Density**

<b>Final Test Date</b>	May 20, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**Configuration of IEEE 802.11a**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-0.93	4.00	<b>Complies</b>
5200 MHz	3.61	4.00	<b>Complies</b>
5240 MHz	3.25	4.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. A**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-2.17	4.00	<b>Complies</b>
5200 MHz	-2.36	4.00	<b>Complies</b>
5240 MHz	-1.31	4.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. B**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-0.78	4.00	<b>Complies</b>
5200 MHz	-0.94	4.00	<b>Complies</b>
5240 MHz	-1.58	4.00	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. A+Ant. B**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	1.59	4.00	<b>Complies</b>
5200 MHz	1.42	4.00	<b>Complies</b>
5240 MHz	1.57	4.00	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz) Ant. A**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-2.62	4.00	Complies
5230 MHz	-1.71	4.00	Complies


**Configuration IEEE 802.11n (40MHz) Ant. B**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-0.77	4.00	Complies
5230 MHz	-1.55	4.00	Complies

**Configuration IEEE 802.11n (40MHz) Ant. A+Ant. B**


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	1.41	4.00	Complies
5230 MHz	1.38	4.00	Complies

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

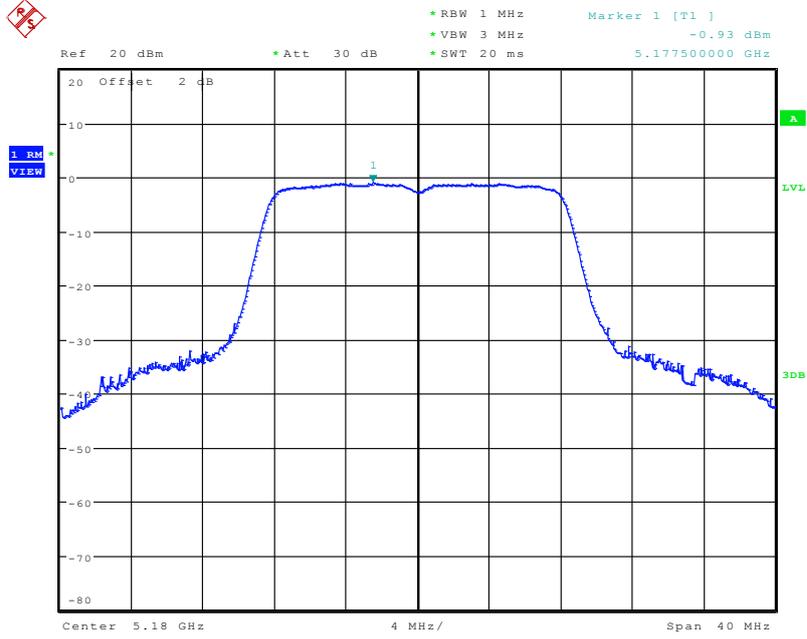


Date: 28.JAN.2011 21:34:43

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

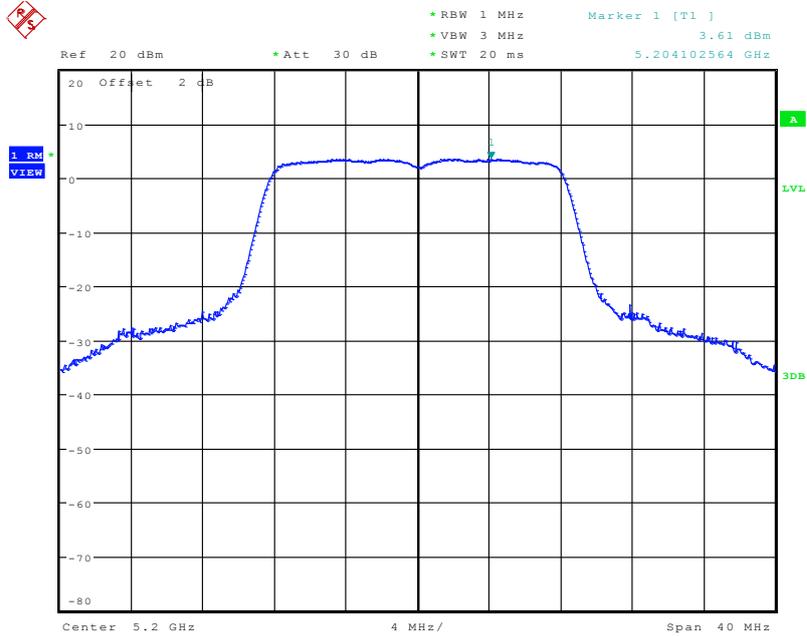


Date: 28.JAN.2011 21:35:41

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

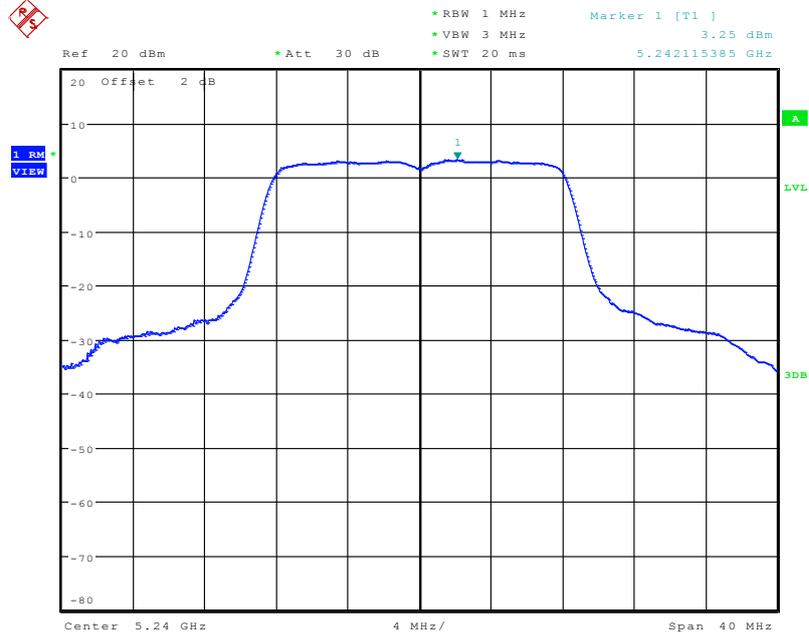


Date: 28.JAN.2011 21:37:37

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5180 MHz

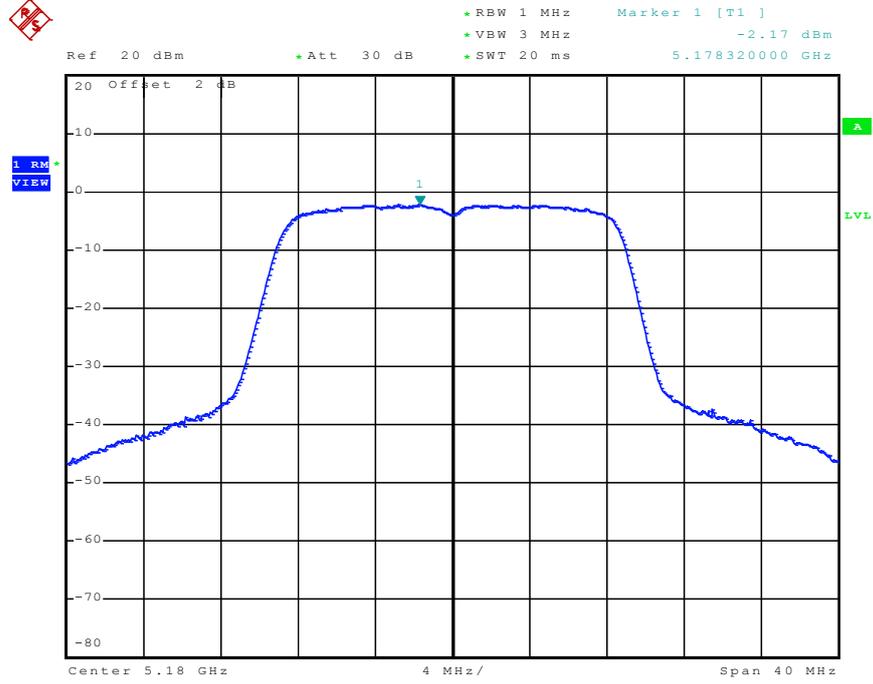


Date: 20.MAY.2011 17:58:47

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5200 MHz

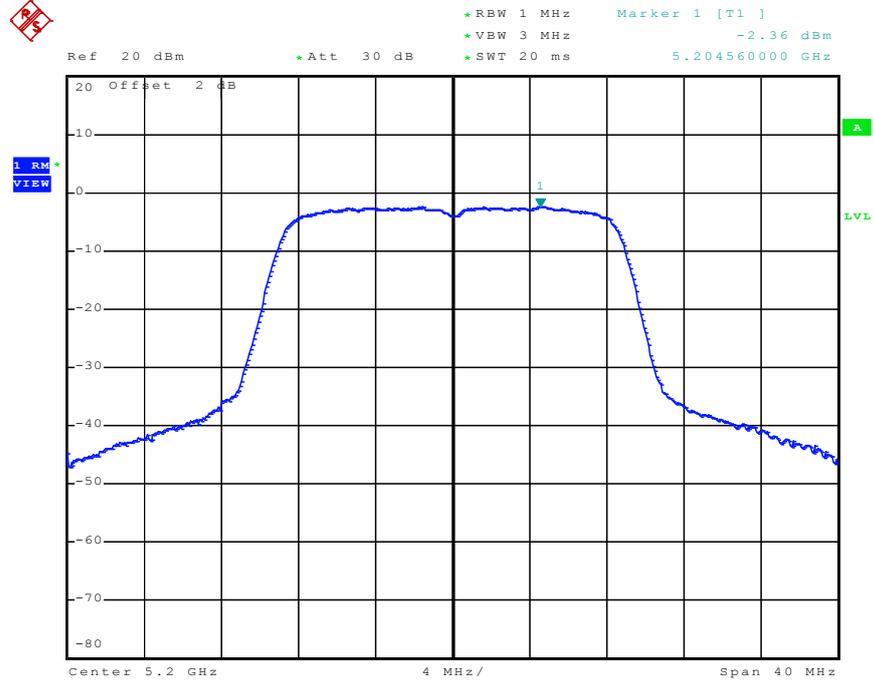


Date: 20.MAY.2011 18:05:58

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5240 MHz

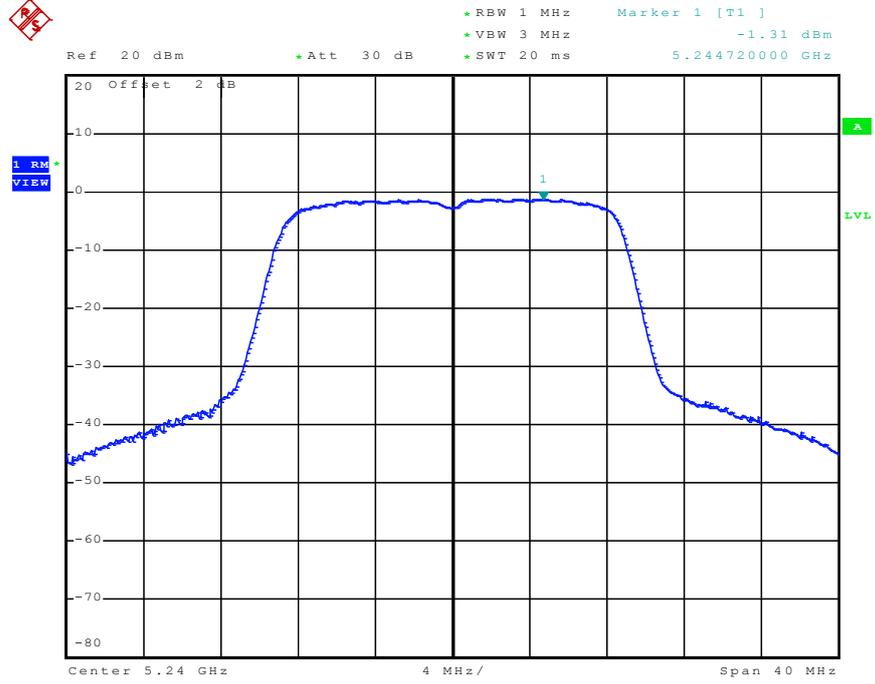


Date: 20.MAY.2011 18:08:35

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5180 MHz

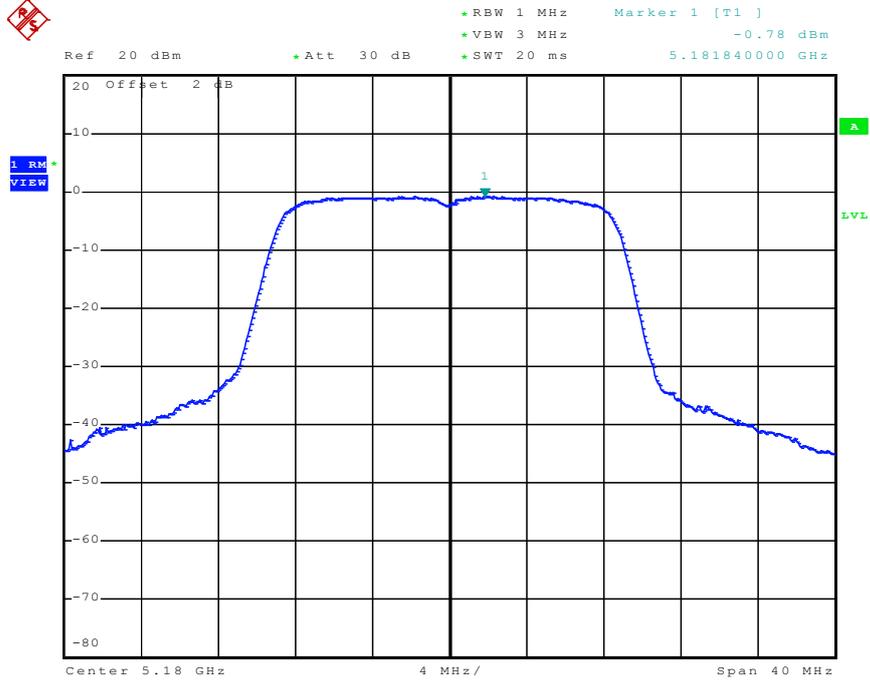


Date: 20.MAY.2011 18:12:08

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5200 MHz

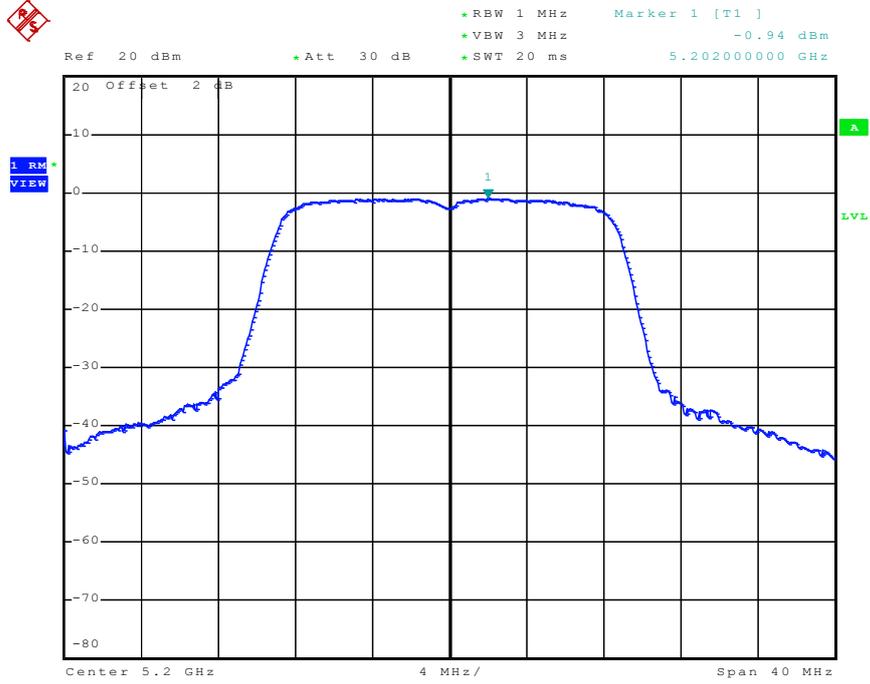


Date: 20.MAY.2011 18:14:59

Power Density Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5240 MHz

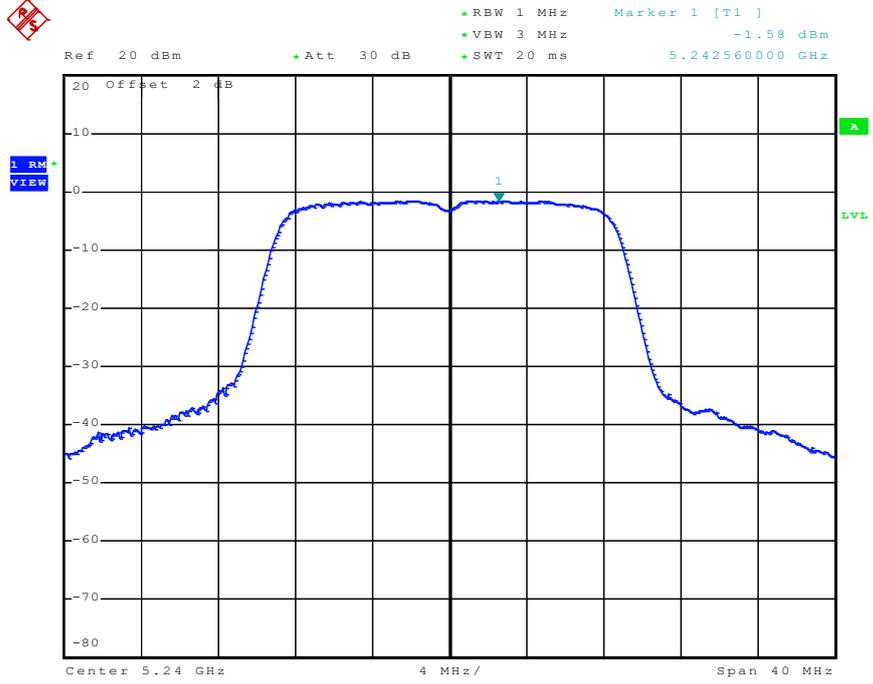


Date: 20.MAY.2011 18:19:42

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5190 MHz

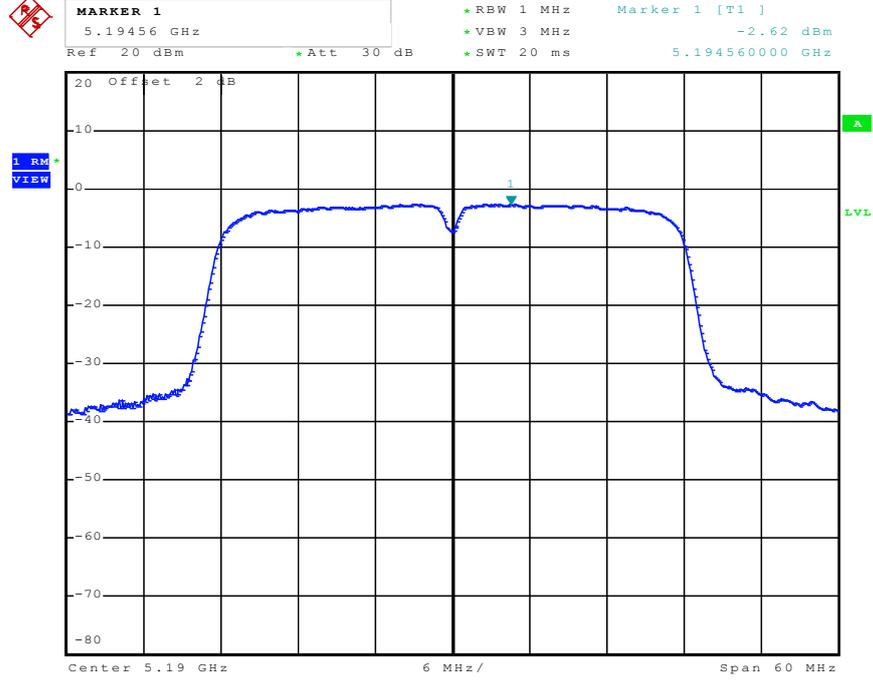


Date: 20.MAY.2011 19:19:21

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5230 MHz

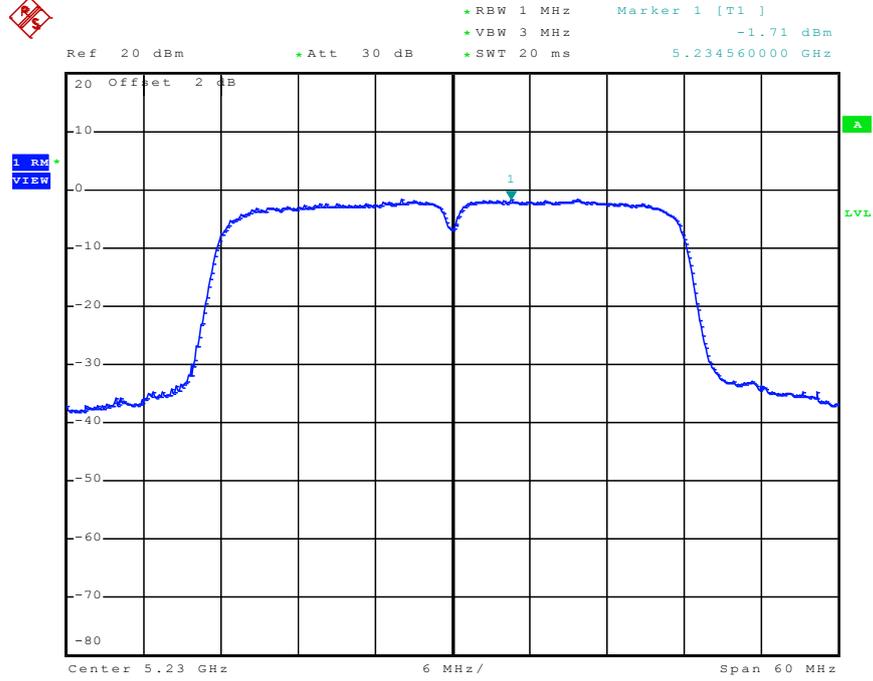


Date: 20.MAY.2011 19:31:49

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5190 MHz

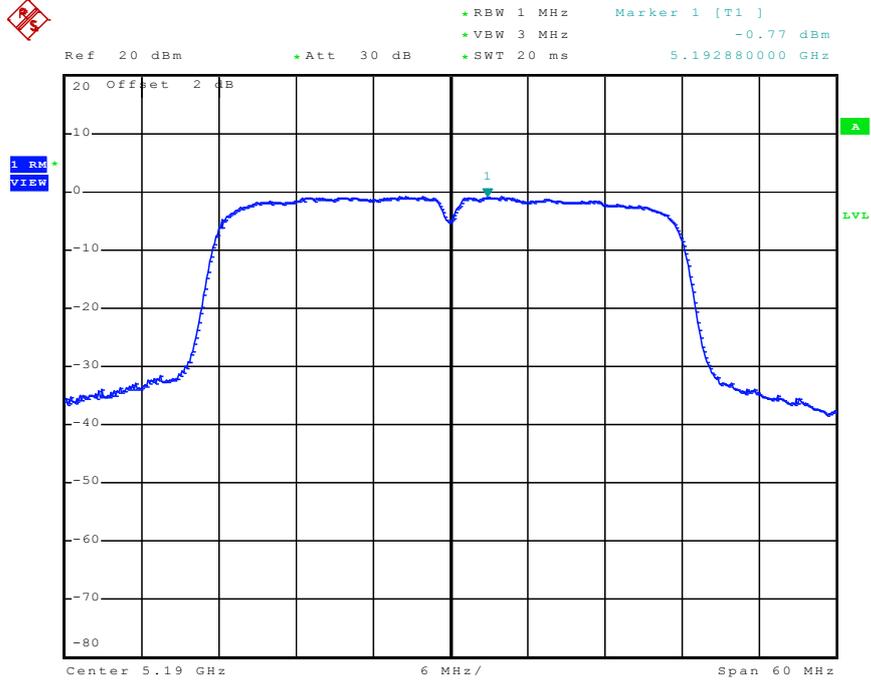

Date: 20.MAY.2011 19:26:39

Power Density Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5230 MHz

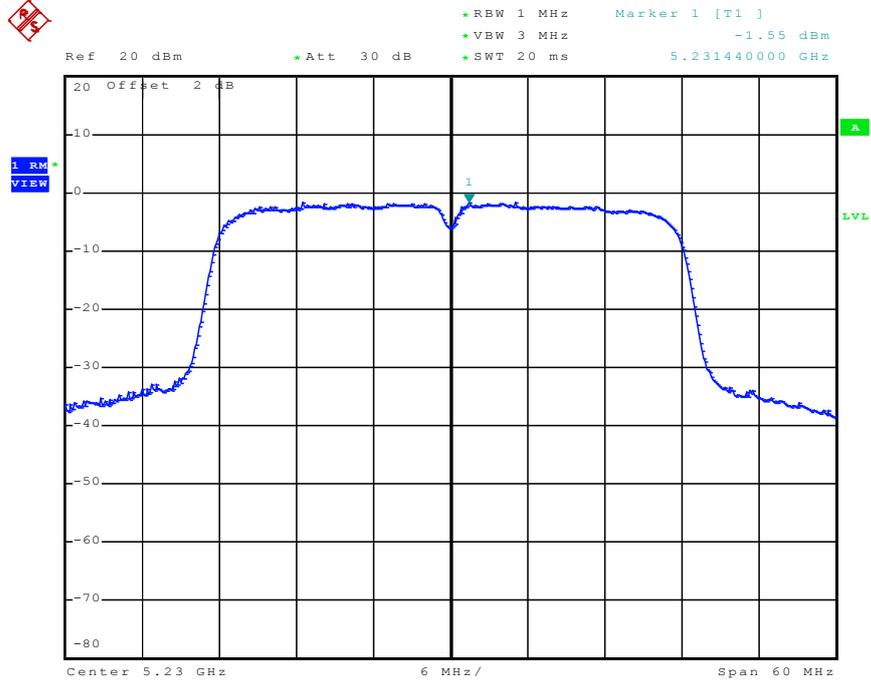

Date: 20.MAY.2011 19:34:25

**3.5 Peak Excursion Measurement**

**3.5.1 Limit**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.

**3.5.4 Test Setup Layout**

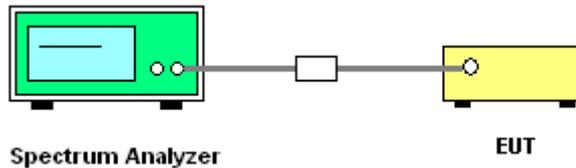

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Peak Excursion**

<b>Final Test Date</b>	May 20, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**Configuration of IEEE 802.11a**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	5.18	13	<b>Complies</b>
5200 MHz	5.44	13	<b>Complies</b>
5240 MHz	5.85	13	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. A**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	5.01	13	<b>Complies</b>
5200 MHz	4.94	13	<b>Complies</b>
5240 MHz	5.01	13	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz) Ant. B**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	6.67	13	<b>Complies</b>
5200 MHz	6.54	13	<b>Complies</b>
5240 MHz	6.57	13	<b>Complies</b>


**Configuration IEEE 802.11n (40MHz) Ant. A**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	5.77	13	<b>Complies</b>
5230 MHz	5.83	13	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz) Ant. B**


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	6.80	13	<b>Complies</b>
5230 MHz	7.08	13	<b>Complies</b>

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

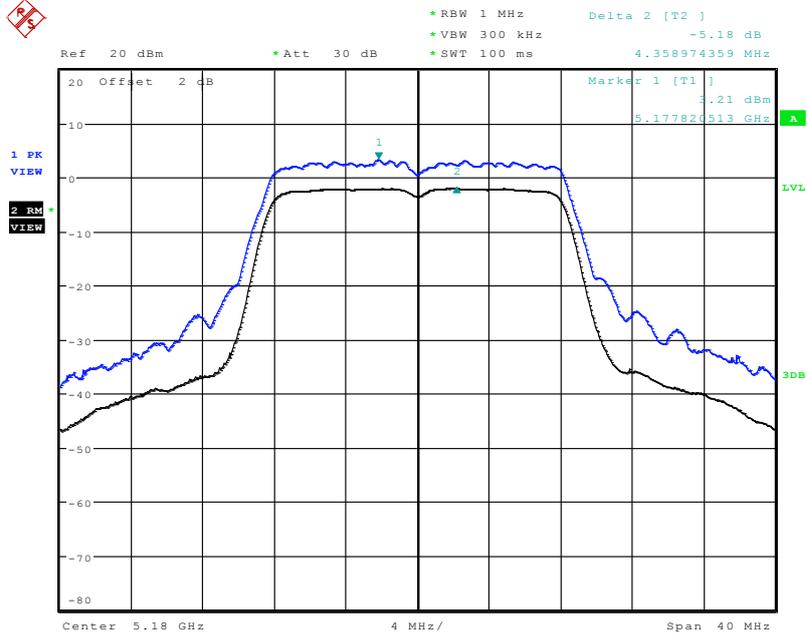


Date: 28.JAN.2011 21:48:38

Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

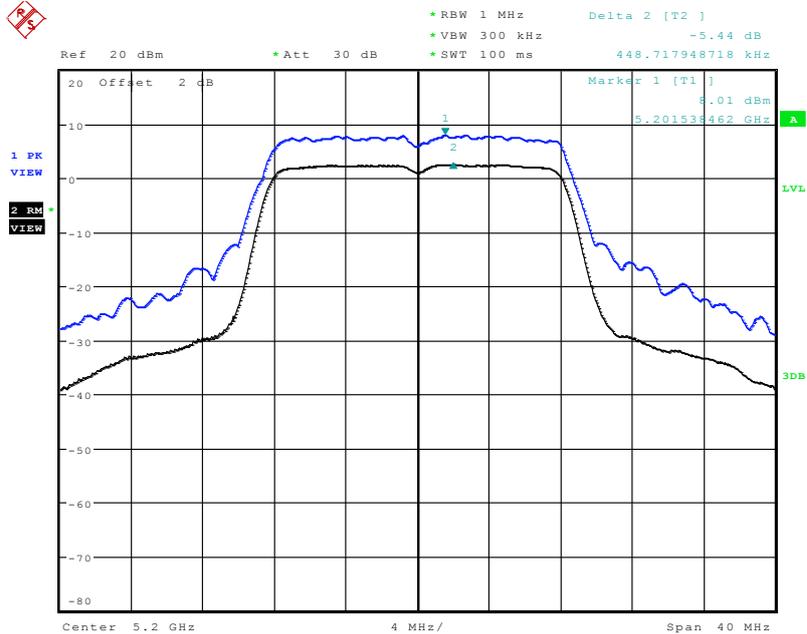


Date: 28.JAN.2011 21:50:03

Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

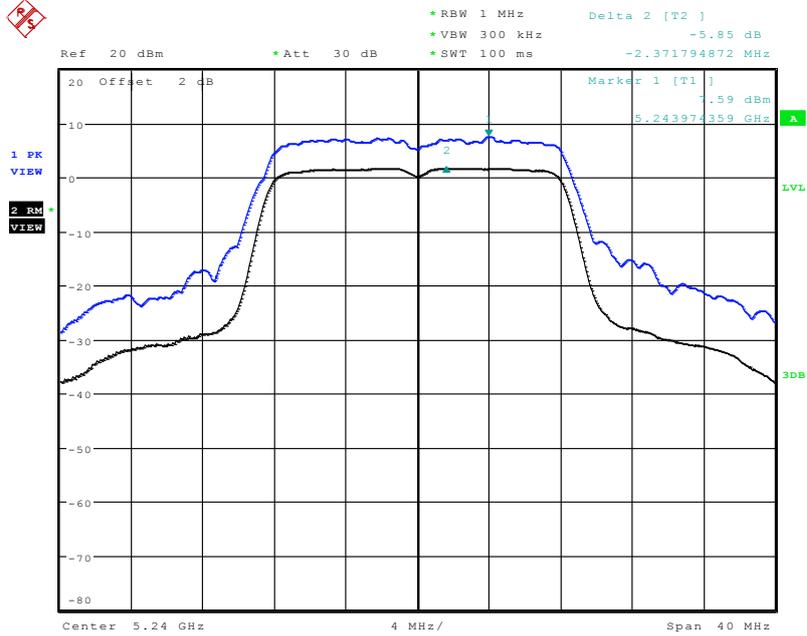


Date: 28.JAN.2011 21:51:24

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5180 MHz

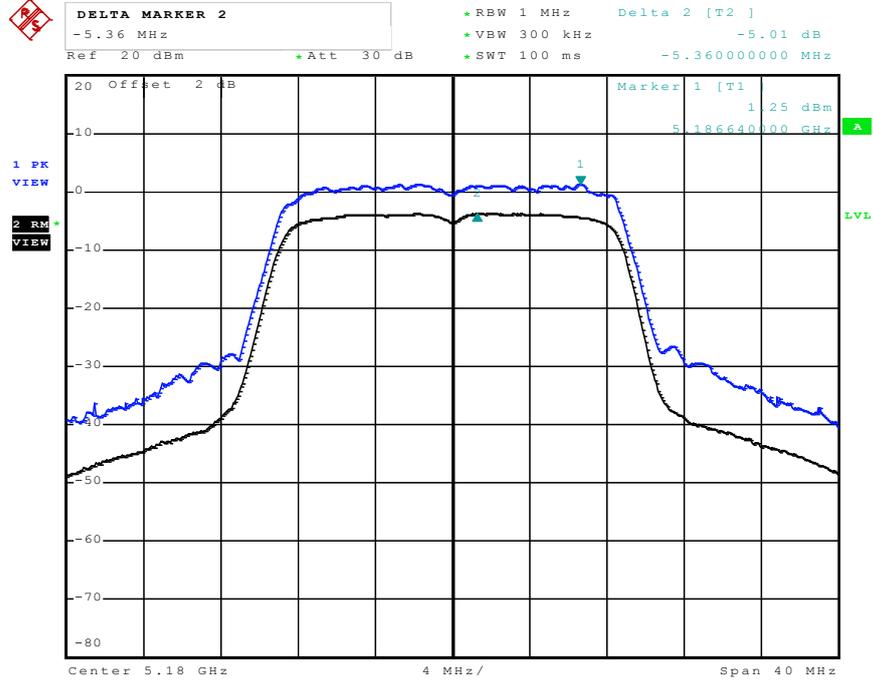


Date: 20.MAY.2011 17:59:45

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5200 MHz

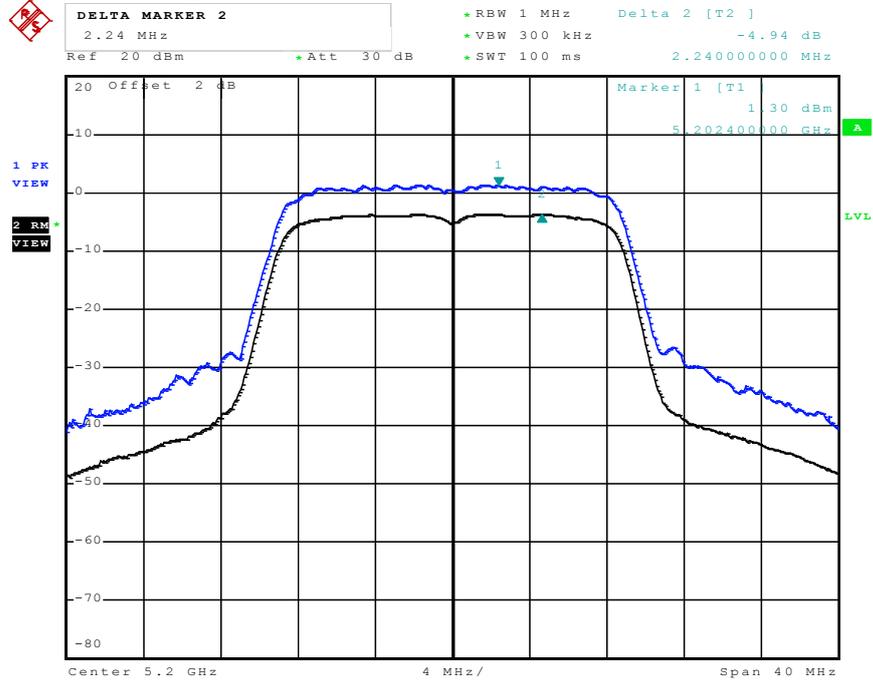


Date: 20.MAY.2011 18:06:35

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. A / 5240 MHz

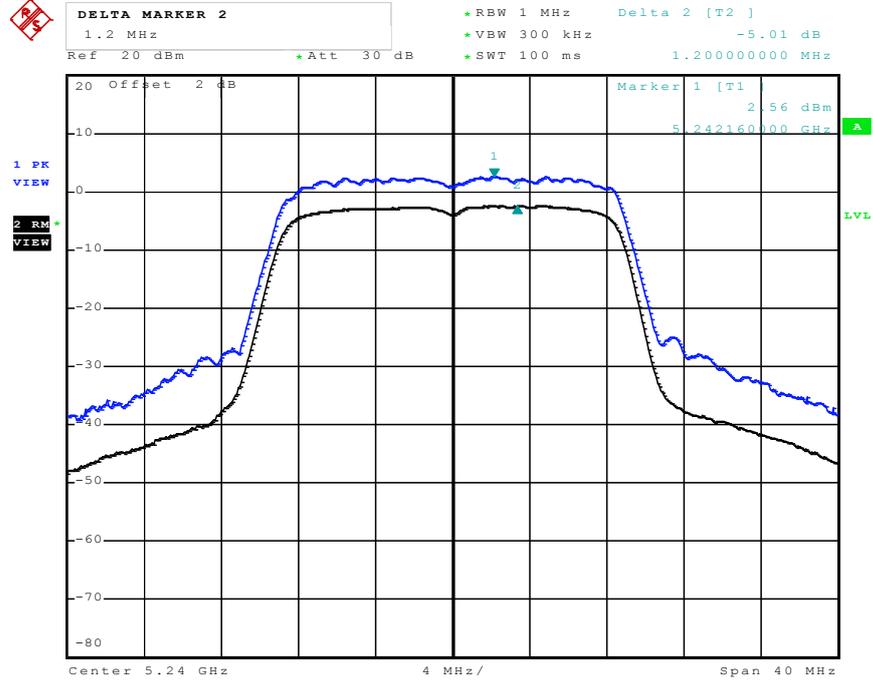


Date: 20.MAY.2011 18:09:40

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5180 MHz

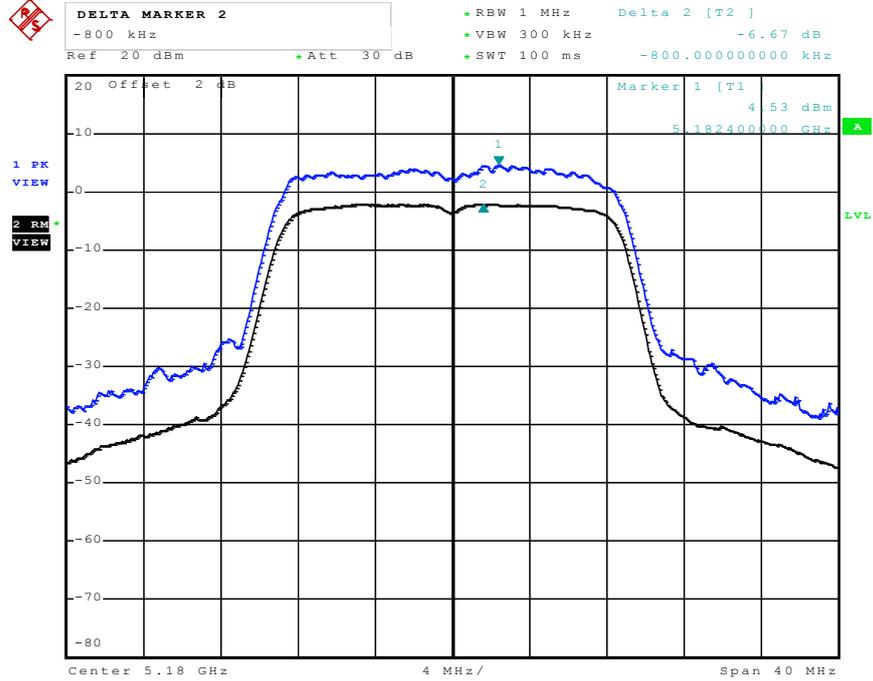


Date: 20.MAY.2011 18:12:44

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5200 MHz

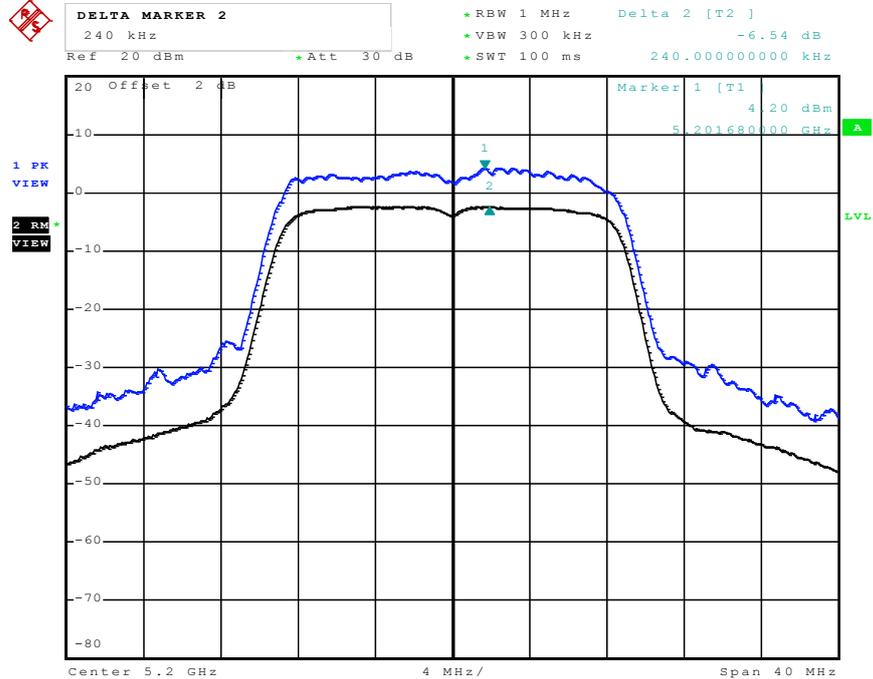


Date: 20.MAY.2011 18:15:32

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) Ant. B / 5240 MHz

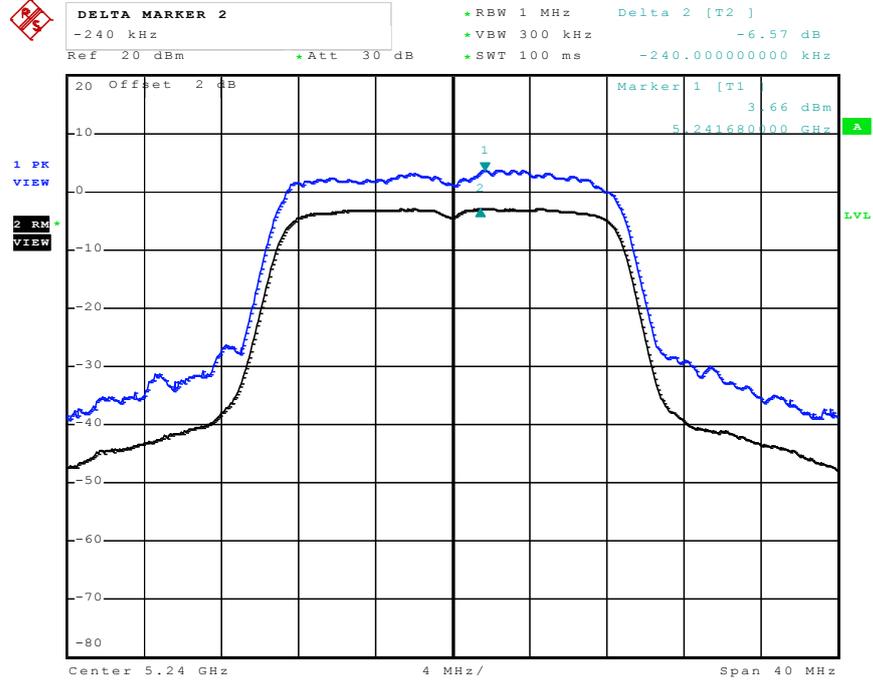


Date: 20.MAY.2011 18:20:38

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5190 MHz

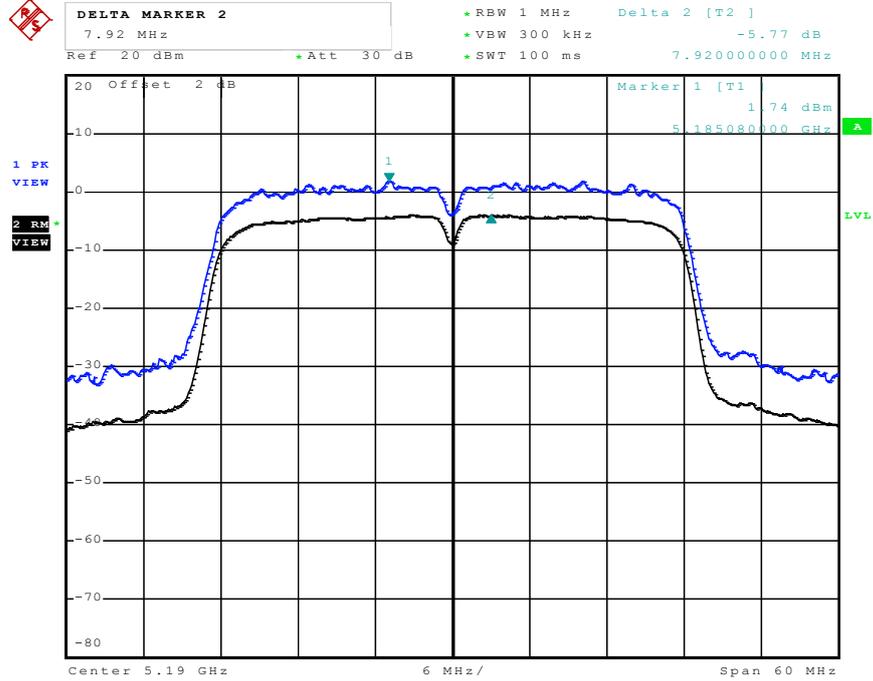


Date: 20.MAY.2011 19:22:49

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) Ant. A / 5230 MHz

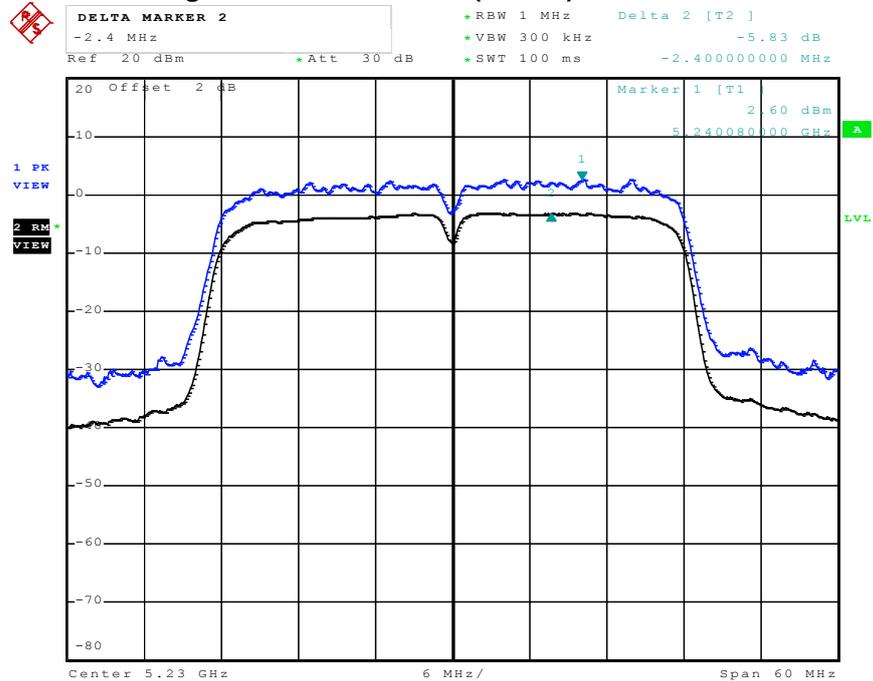


Date: 20.MAY.2011 19:32:26

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5190 MHz

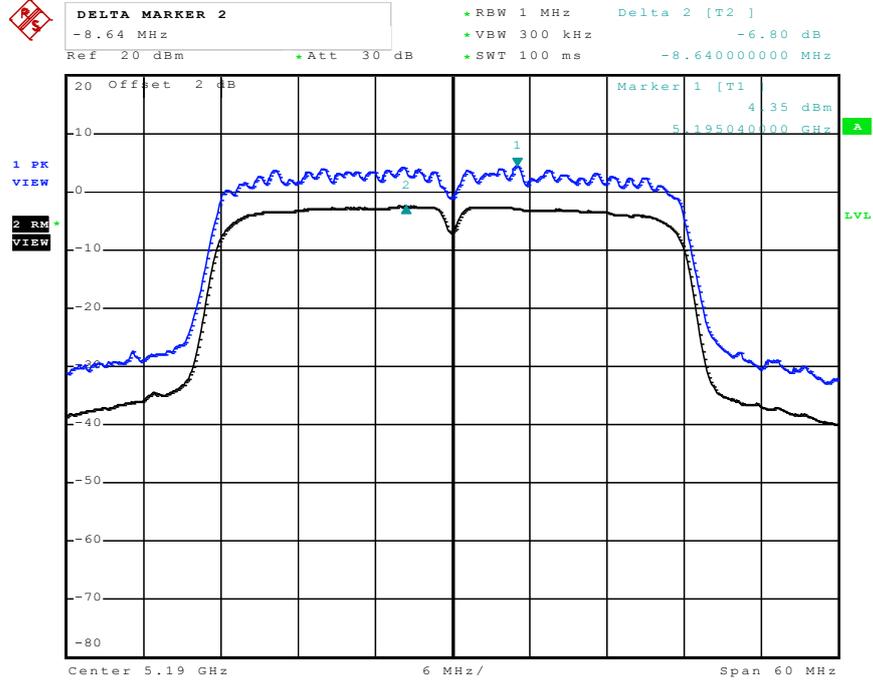

Date: 20.MAY.2011 19:28:07

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) Ant. B / 5230 MHz

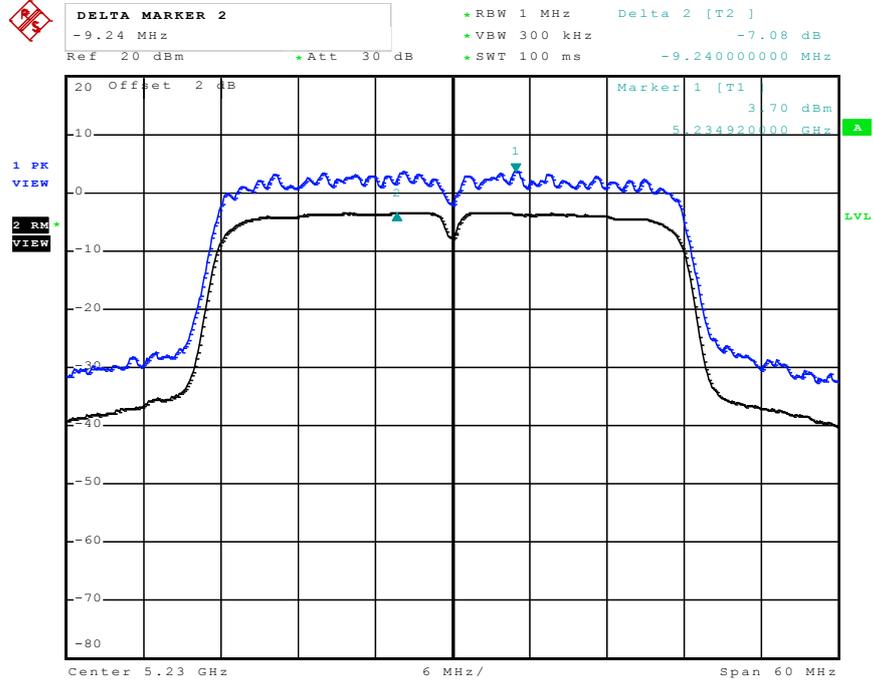

Date: 20.MAY.2011 19:35:46

**3.6 Radiated Emissions Measurement**

**3.6.1 Limit**

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz z for peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.6.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.6.4 Test Setup Layout

For radiated emissions below 30MHz

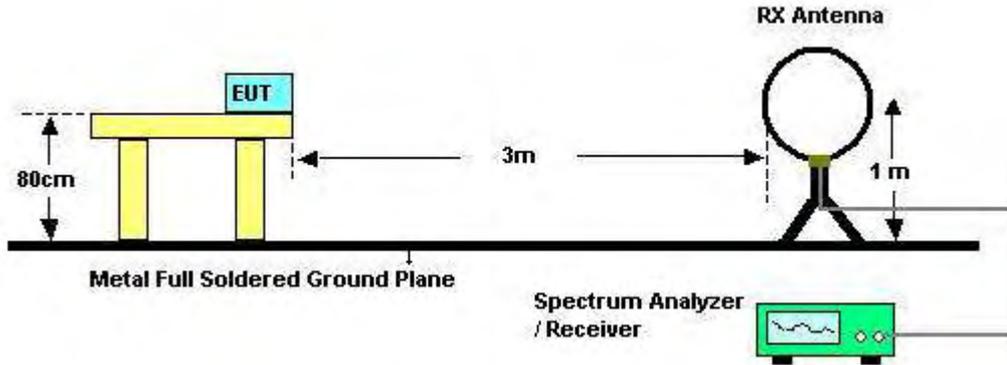

For radiated emissions above 30MHz

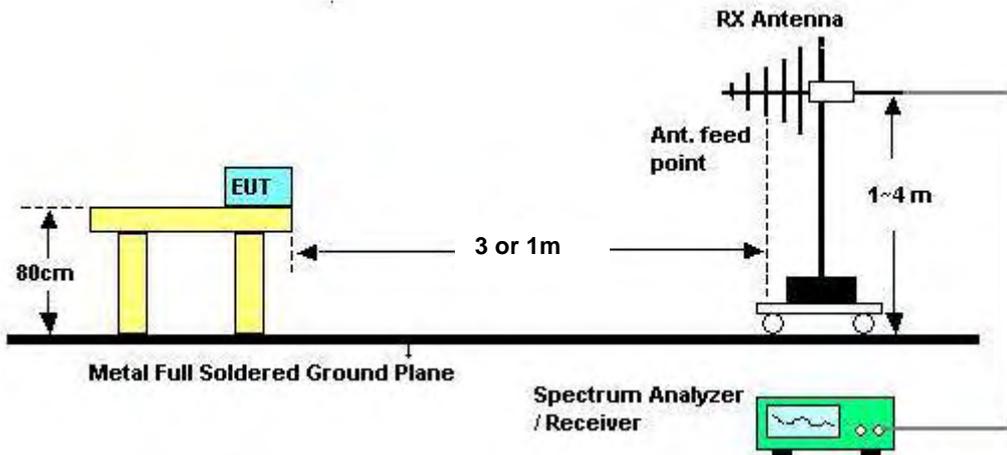

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.6.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Jan. 20, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.6.8 Results of Radiated Emissions (30MHz~1GHz)


<b>Final Test Date</b>	Jan. 20, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	Adapter Mode

Horizontal

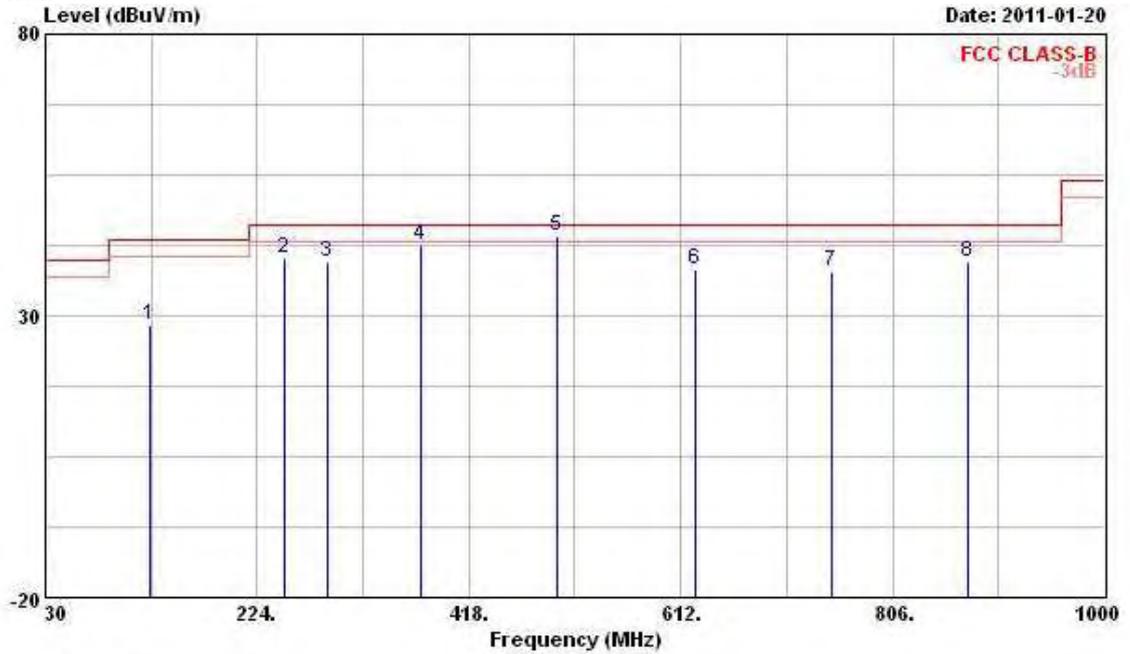

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	125.060	28.27	-15.23	43.50	40.36	13.18	2.26	27.53	Peak
2	249.220	40.04	-5.96	46.00	49.84	12.97	4.05	26.82	Peak
3	288.020	39.59	-6.41	46.00	48.41	13.54	4.44	26.80	Peak
4	374.350	42.52	-3.48	46.00	50.30	14.86	4.77	27.41	Peak
5	498.510	44.10	-1.90	46.00	48.87	17.26	6.15	28.18	Peak
6	625.580	38.22	-7.78	46.00	39.23	19.84	7.28	28.13	Peak
7	749.740	37.82	-8.18	46.00	38.39	19.55	7.76	27.88	Peak
8	874.870	39.46	-6.54	46.00	37.73	20.09	9.08	27.44	Peak

Vertical

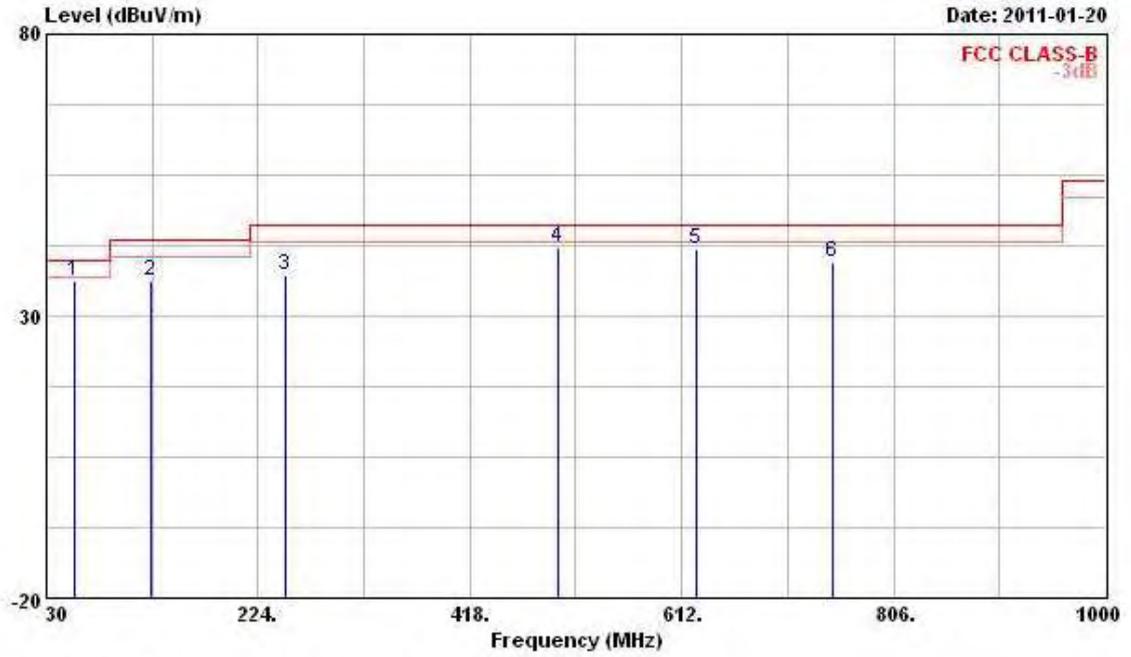

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	56.190	36.40	-3.60	40.00	54.76	8.05	1.34	27.75	Peak
2	125.060	36.24	-7.26	43.50	48.33	13.18	2.26	27.53	Peak
3	249.220	37.18	-8.82	46.00	46.98	12.97	4.05	26.82	Peak
4	498.510	42.28	-3.72	46.00	47.05	17.26	6.15	28.18	Peak
5	625.580	41.85	-4.15	46.00	42.86	19.84	7.28	28.13	Peak
6	749.740	39.61	-6.39	46.00	40.18	19.55	7.76	27.88	Peak

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Final Test Date	Feb. 08, 2011	Test Site No.	03CH02-HY
Temperature	21.5°C	Humidity	55%
Test Engineer	Daniel	Configurations	POE Mode

Horizontal

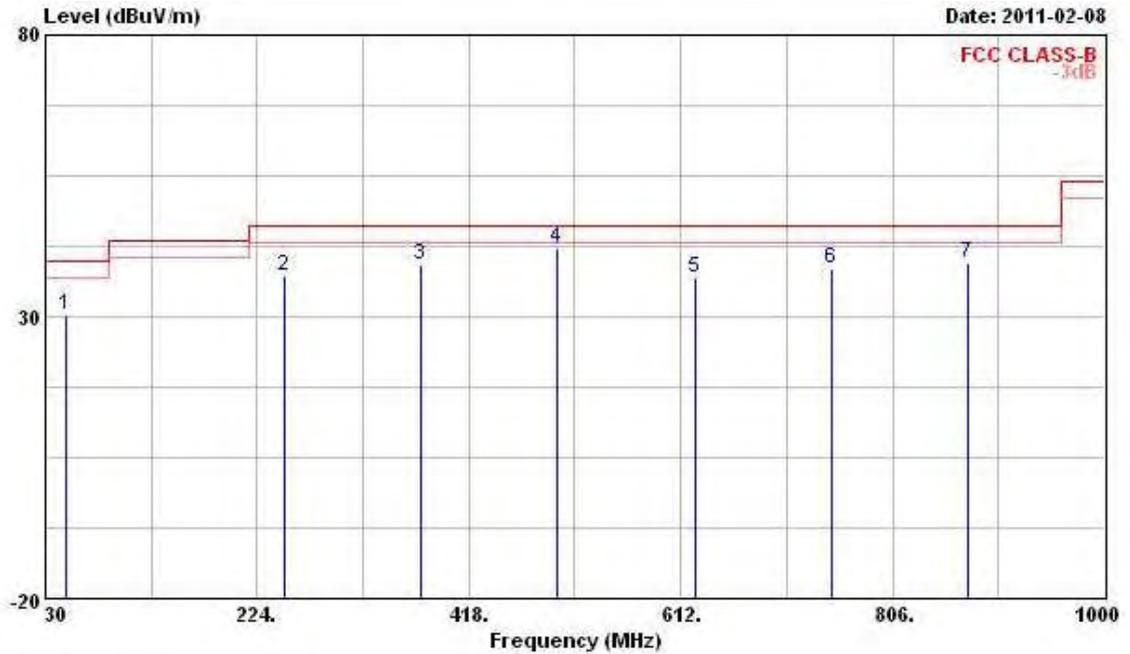

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	48.430	30.19	-9.81	40.00	46.57	10.34	1.07	27.79 Peak
2	249.220	37.19	-8.81	46.00	46.99	12.97	4.05	26.82 Peak
3	374.350	39.07	-6.93	46.00	46.85	14.86	4.77	27.41 Peak
4	498.510	42.05	-3.95	46.00	46.82	17.26	6.15	28.18 QP
5	625.580	37.03	-8.97	46.00	38.04	19.84	7.28	28.13 Peak
6	749.740	38.51	-7.49	46.00	39.08	19.55	7.76	27.88 Peak
7	874.870	39.45	-6.55	46.00	37.72	20.09	9.08	27.44 Peak

Vertical

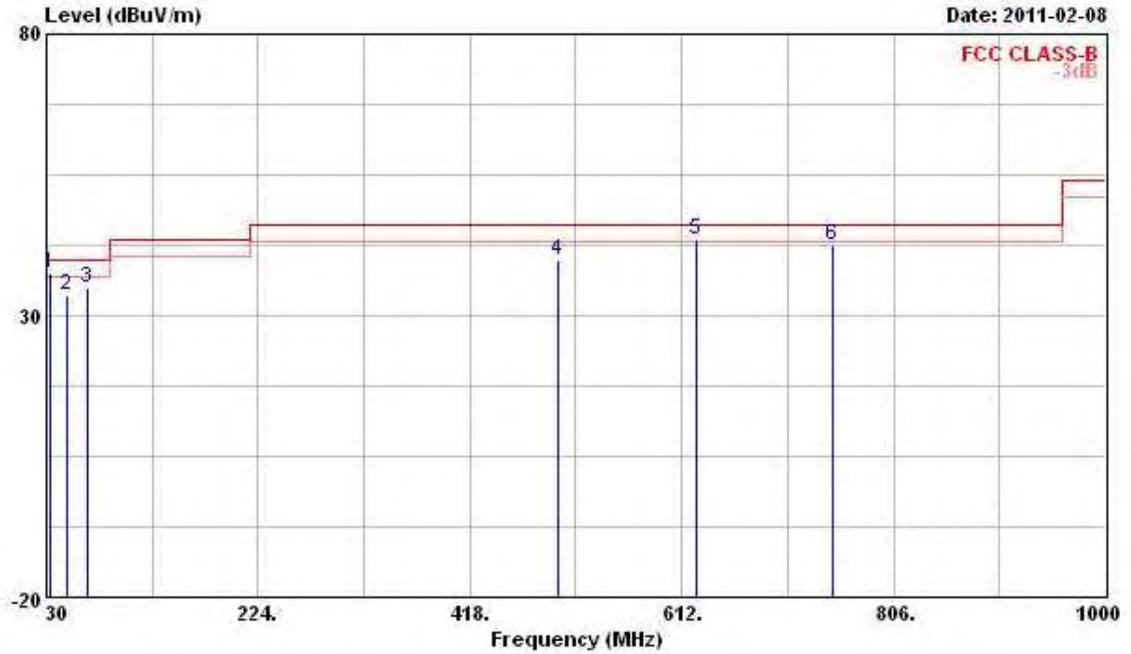

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	32.910	37.51	-2.49	40.00	49.55	15.11	0.71	27.86	QP
2	48.430	33.55	-6.45	40.00	49.93	10.34	1.07	27.79	QP
3	67.830	35.08	-4.92	40.00	53.67	6.81	2.30	27.70	QP
4	498.510	39.77	-6.23	46.00	44.54	17.26	6.15	28.18	Peak
5	625.580	43.45	-2.55	46.00	44.46	19.84	7.28	28.13	Peak
6	749.740	42.49	-3.51	46.00	43.06	19.55	7.76	27.88	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Single Chain:


Final Test Date	Jan. 14, 2011	Test Site No.	03CH02-HY
Temperature	21.5°C	Humidity	55%
Test Engineer	Daniel	Configuration	802.11a Ch. 36

Horizontal

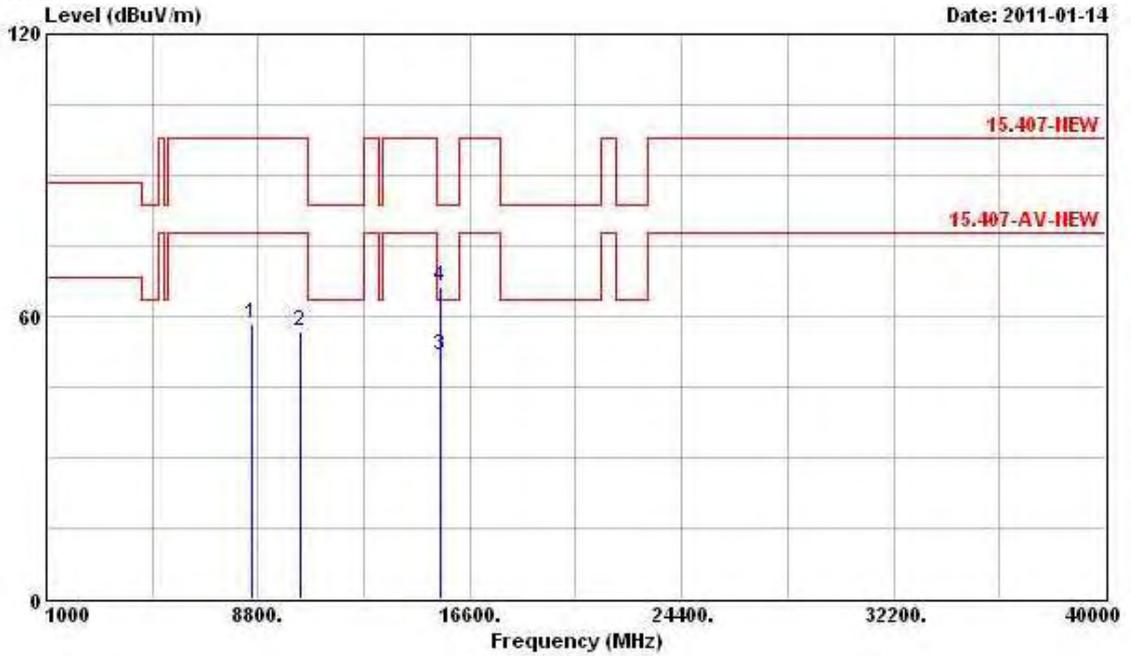

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8580.000	58.45	-39.39	97.84	48.33	38.43	5.97	34.28	Peak
2	10360.000	56.67	-41.17	97.84	44.08	40.02	6.71	34.14	Peak
3	15540.000	51.64	-11.90	63.54	33.22	42.81	8.45	32.84	Average
4	15540.000	66.37	-17.17	83.54	47.95	42.81	8.45	32.84	Peak


Vertical

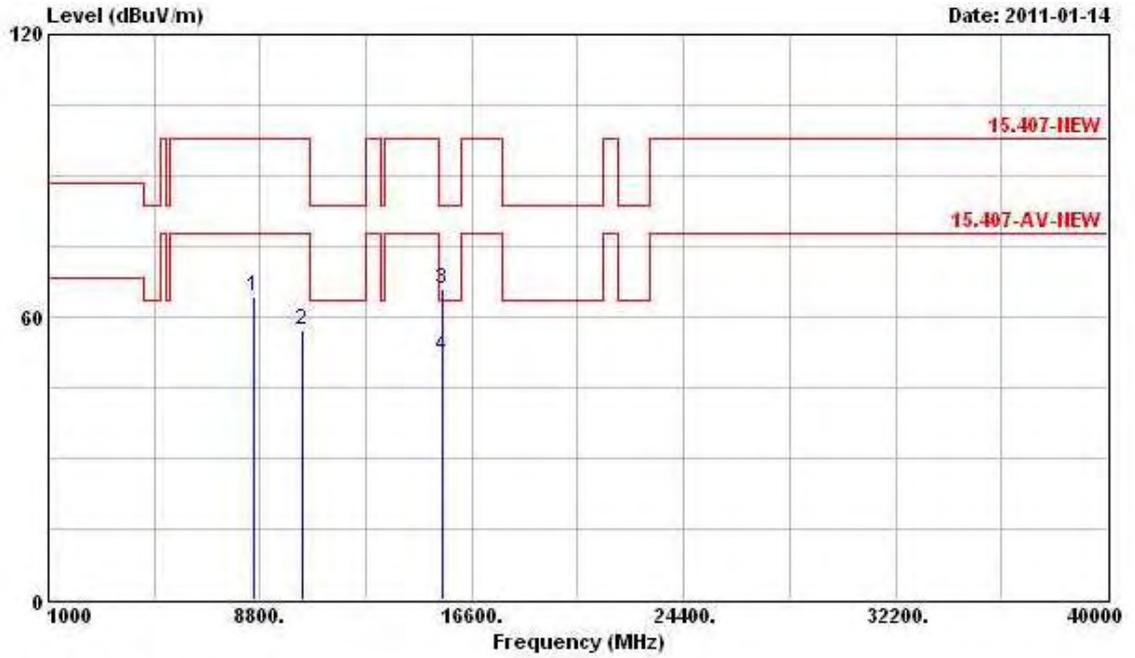

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8584.000	64.16	-33.68	97.84	54.04	38.43	5.97	34.28	Peak
2	10360.000	57.41	-40.43	97.84	44.82	40.02	6.71	34.14	Peak
3	15540.000	66.05	-17.49	83.54	47.63	42.81	8.45	32.84	Peak
4	15540.000	51.68	-11.86	63.54	33.26	42.81	8.45	32.84	Average


Final Test Date	Jan. 14, 2011	Test Site No.	03CH02-HY
Temperature	21.5°C	Humidity	55%
Test Engineer	Daniel	Configuration	802.11a Ch. 40

Horizontal

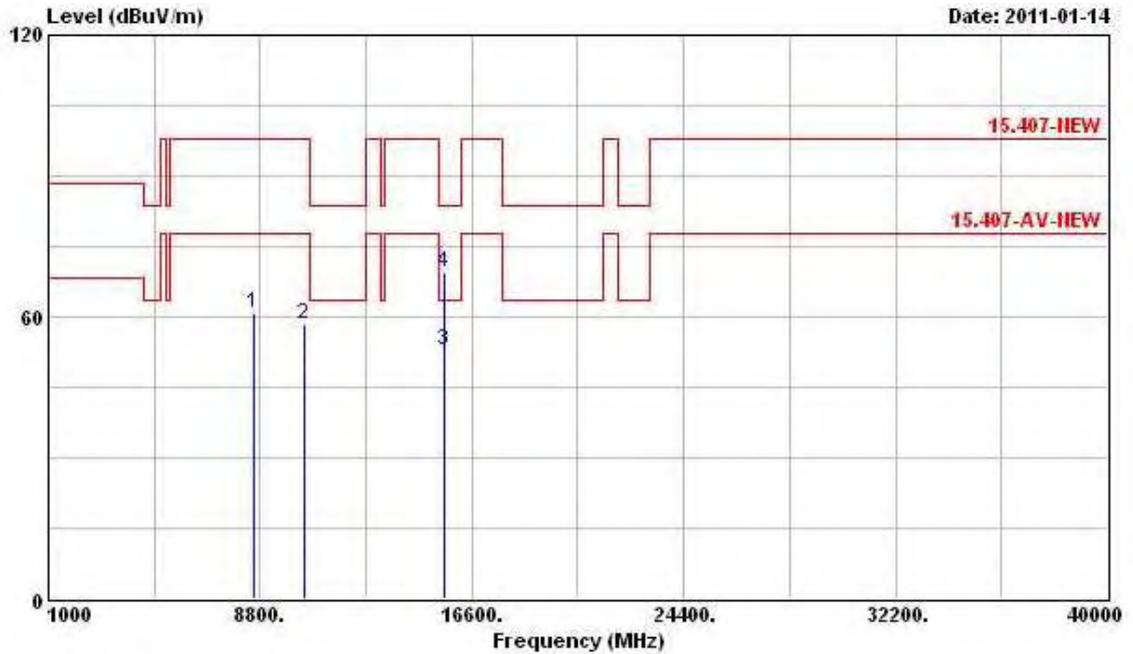

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8572.000	60.98	-36.86	97.84	50.84	38.45	5.97	34.28 Peak
2	10400.000	58.41	-39.43	97.84	45.72	40.04	6.75	34.10 Peak
3	15600.000	53.01	-10.53	63.54	34.66	42.82	8.45	32.92 Average
4	15600.000	69.42	-14.12	83.54	51.07	42.82	8.45	32.92 Peak


Vertical

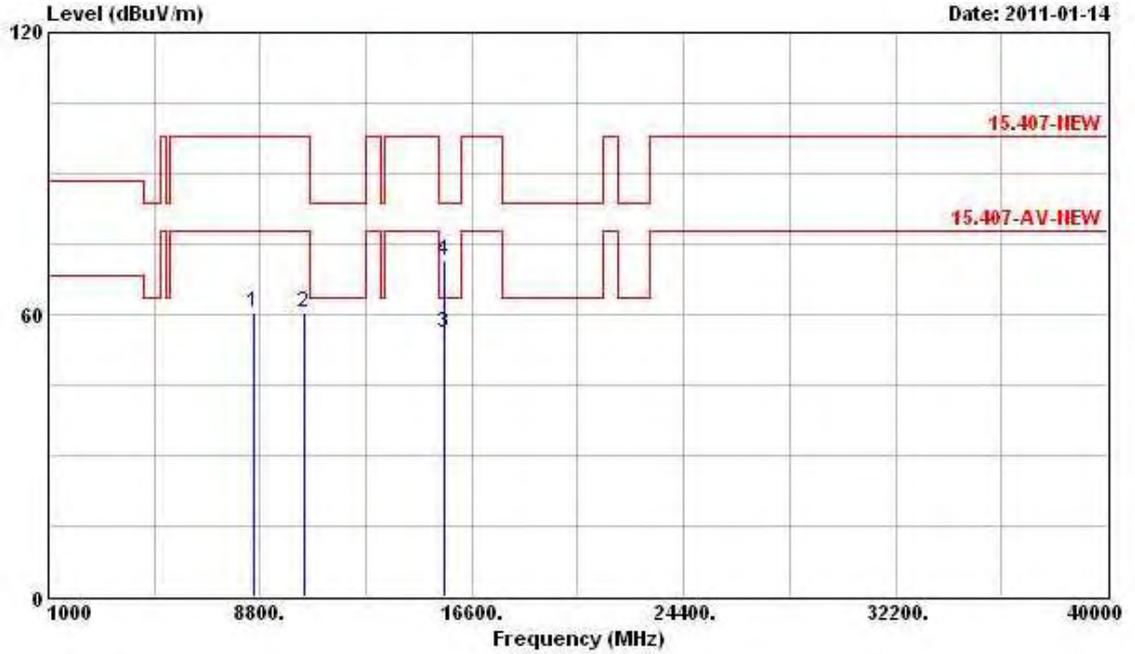

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8568.000	60.47	-37.37	97.84	50.33	38.45	5.97	34.28 Peak
2	10400.000	60.59	-37.25	97.84	47.90	40.04	6.75	34.10 Peak
3	@15600.000	56.18	-7.36	63.54	37.83	42.82	8.45	32.92 Average
4	15600.000	71.49	-12.05	83.54	53.14	42.82	8.45	32.92 Peak


Final Test Date	Jan. 14, 2011	Test Site No.	03CH02-HY
Temperature	21.5°C	Humidity	55%
Test Engineer	Daniel	Configuration	802.11a Ch. 48

Horizontal

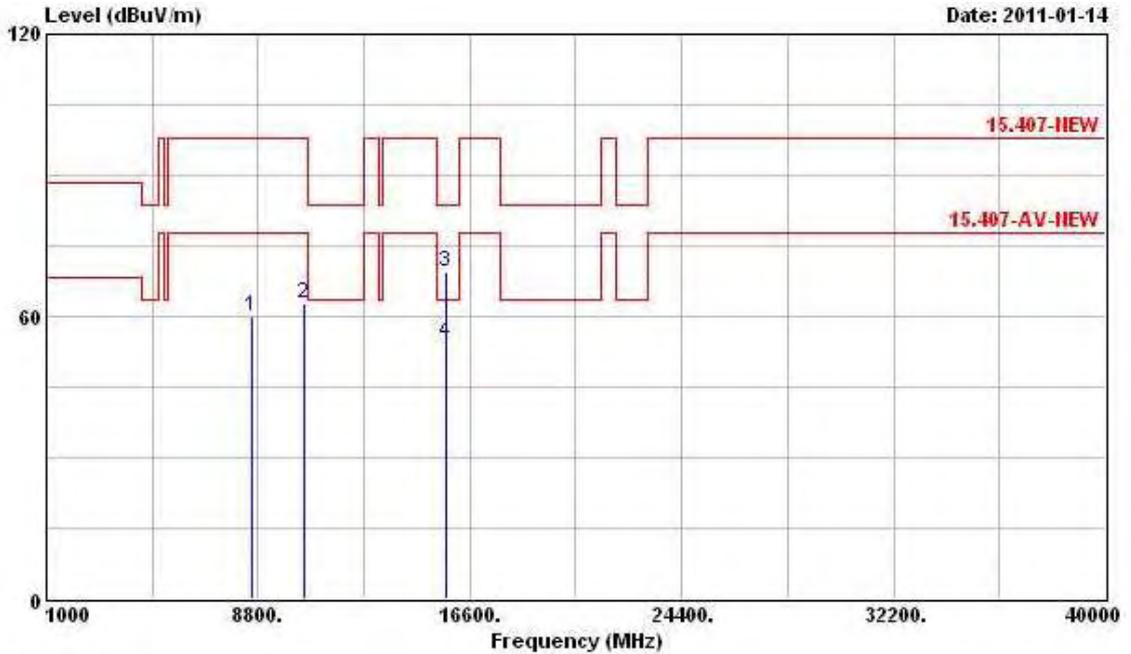

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8568.000	60.12	-37.72	97.84	49.98	38.45	5.97	34.28	Peak
2	10480.000	62.57	-35.27	97.84	49.69	40.09	6.82	34.03	Peak
3	15720.000	69.37	-14.17	83.54	51.10	42.84	8.46	33.03	Peak
4	@15720.000	54.56	-8.98	63.54	36.29	42.84	8.46	33.03	Average

Vertical

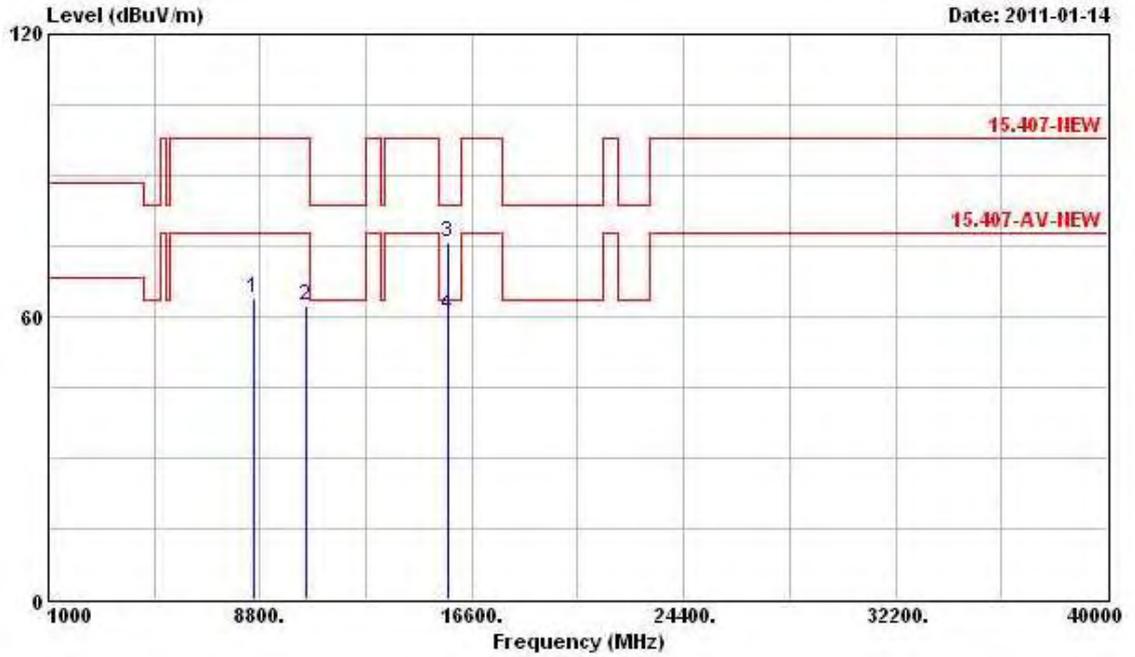


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8568.000	64.04	-33.80	97.84	53.90	38.45	5.97	34.28 Peak
2	10480.000	62.36	-35.48	97.84	49.48	40.09	6.82	34.03 Peak
3	@15720.000	75.97	-7.57	83.54	57.70	42.84	8.46	33.03 Peak
4	@15720.000	60.31	-3.23	63.54	42.04	42.84	8.46	33.03 Average

**For Two Chain:**


<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 36 (20MHz) (Ant. A+Ant. B)

**Horizontal**

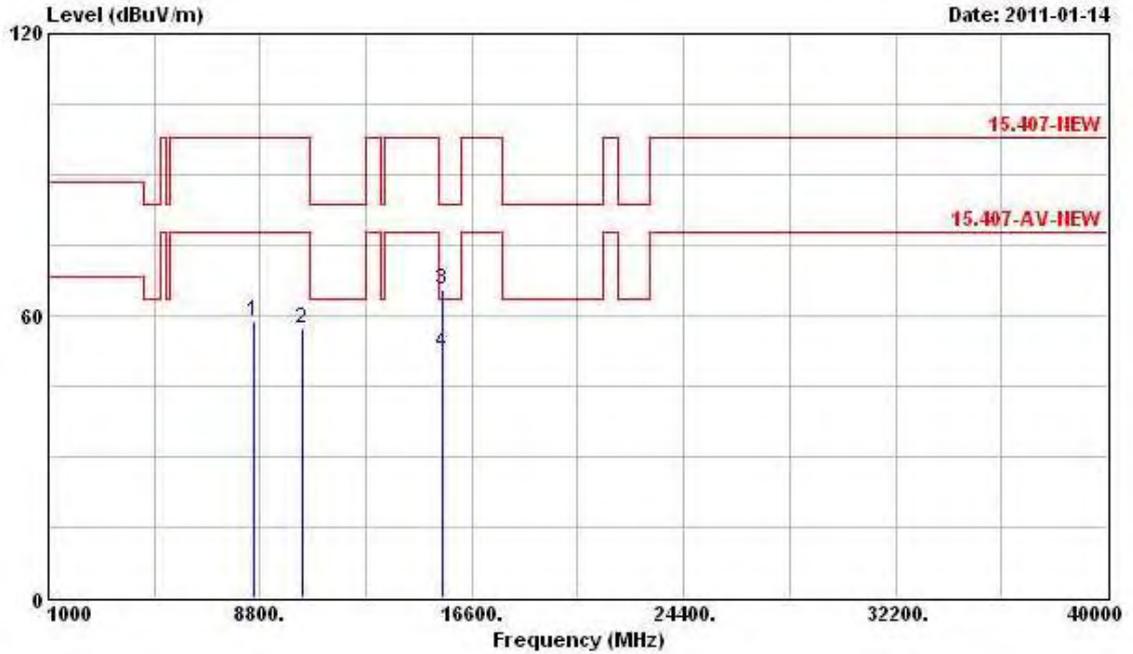

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8568.000	58.71	-39.13	97.84	48.57	38.45	5.97	34.28	Peak
2	10360.000	57.28	-40.56	97.84	44.69	40.02	6.71	34.14	Peak
3	15540.000	65.56	-17.98	83.54	47.14	42.81	8.45	32.84	Peak
4	15540.000	51.94	-11.60	63.54	33.52	42.81	8.45	32.84	Average


Vertical

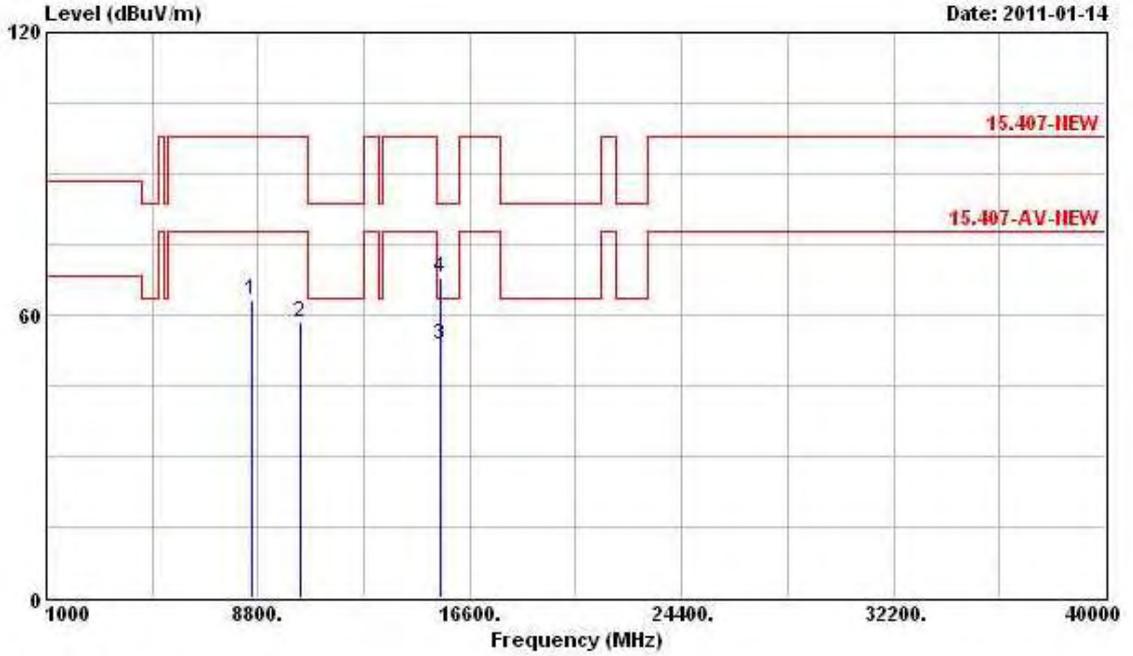

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	63.12	-34.72	97.84	52.98	38.45	5.97	34.28	Peak
2	10360.000	58.56	-39.28	97.84	45.97	40.02	6.71	34.14	Peak
3	15540.000	53.78	-9.76	63.54	35.36	42.81	8.45	32.84	Average
4	15540.000	68.00	-15.54	83.54	49.58	42.81	8.45	32.84	Peak


<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 40 (20 MHz) (Ant. A+Ant. B)

**Horizontal**

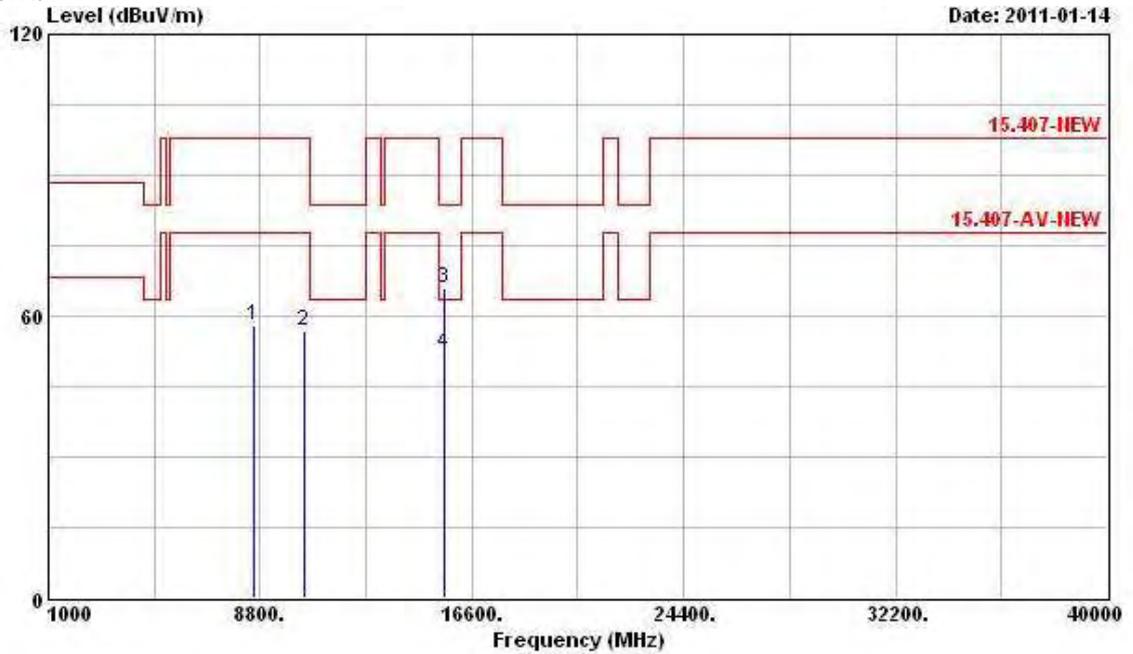

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	58.12	-39.72	97.84	47.98	38.45	5.97	34.28	Peak
2	10400.000	57.03	-40.81	97.84	44.34	40.04	6.75	34.10	Peak
3	15600.000	65.83	-17.71	83.54	47.48	42.82	8.45	32.92	Peak
4	15600.000	52.08	-11.46	63.54	33.73	42.82	8.45	32.92	Average


Vertical

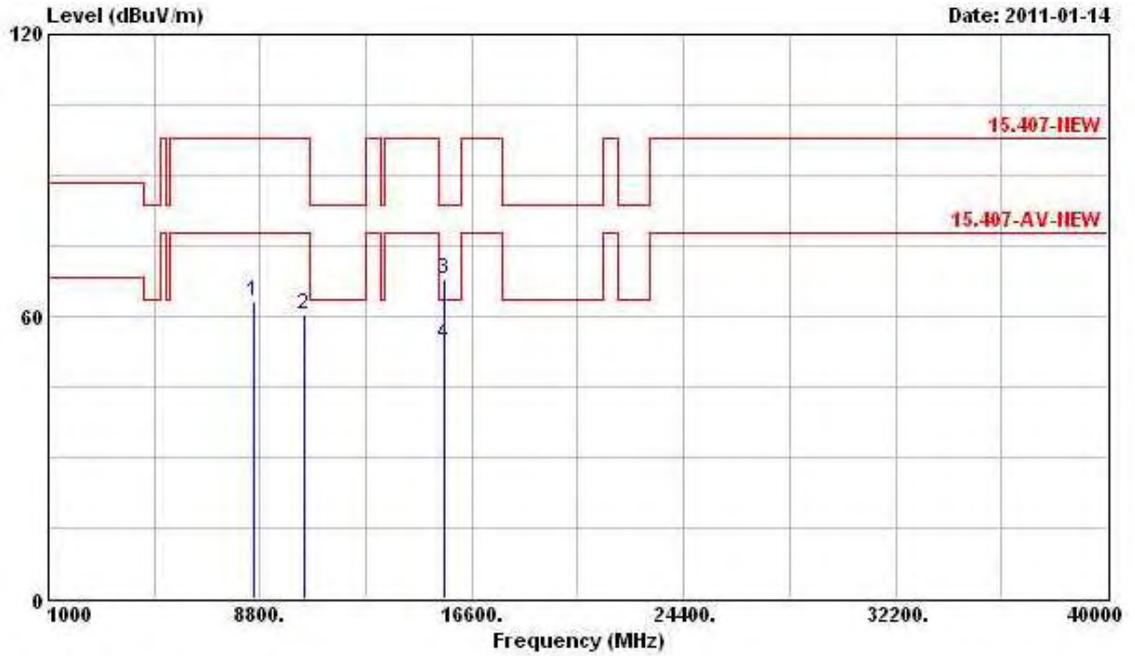

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	63.22	-34.62	97.84	53.08	38.45	5.97	34.28	Peak
2	10400.000	60.28	-37.56	97.84	47.59	40.04	6.75	34.10	Peak
3	15600.000	67.88	-15.66	83.54	49.53	42.82	8.45	32.92	Peak
4	15600.000	54.02	-9.52	63.54	35.67	42.82	8.45	32.92	Average


<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 48 (20 MHz) (Ant. A+Ant. B)

**Horizontal**

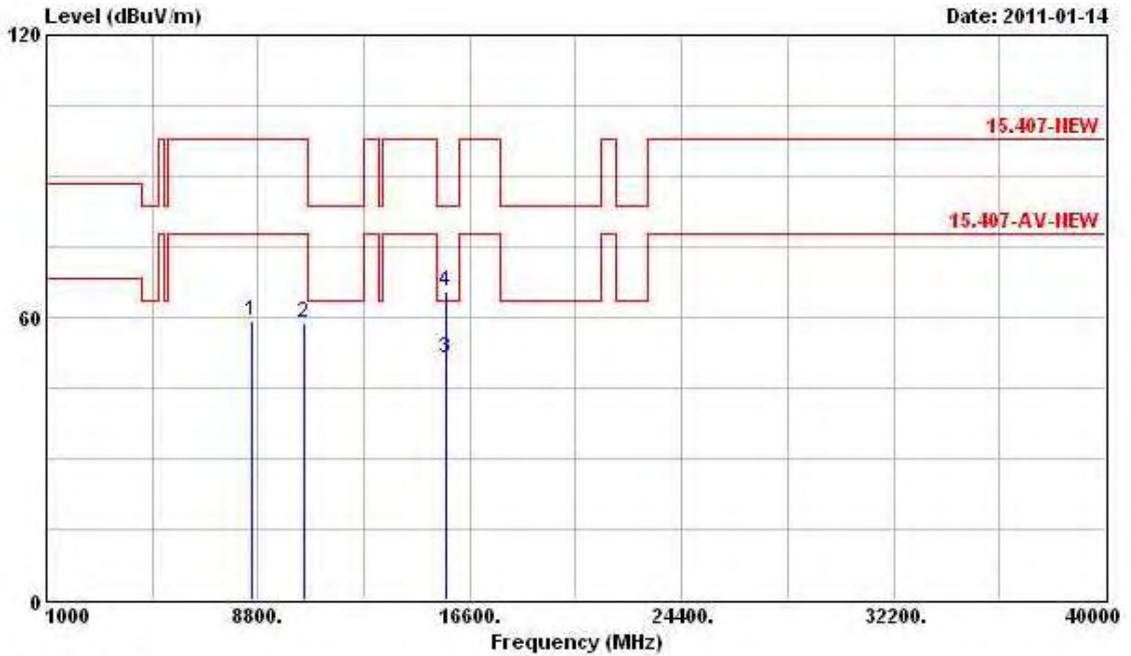

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	59.17	-38.67	97.84	49.03	38.45	5.97	34.28	Peak
2	10480.000	58.64	-39.20	97.84	45.76	40.09	6.82	34.03	Peak
3	15720.000	51.45	-12.09	63.54	33.18	42.84	8.46	33.03	Average
4	15720.000	65.49	-18.05	83.54	47.22	42.84	8.46	33.03	Peak


Vertical

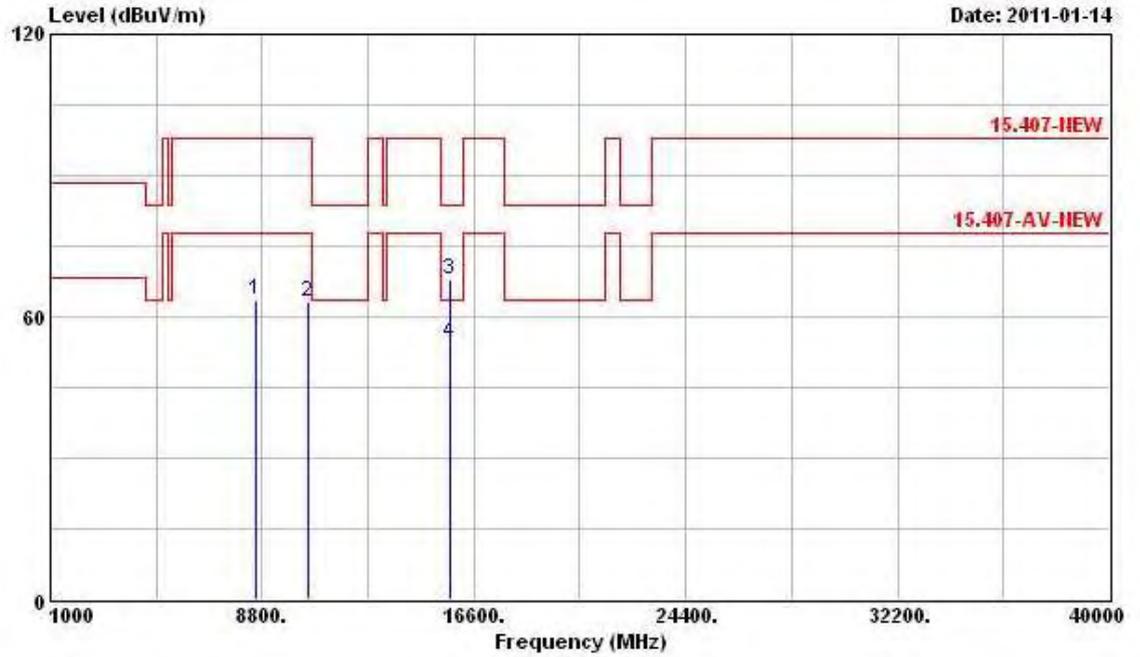

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8564.000	63.67	-34.17	97.84	53.53	38.45	5.97	34.28 Peak
2	10480.000	63.28	-34.56	97.84	50.40	40.09	6.82	34.03 Peak
3	15720.000	67.73	-15.81	83.54	49.46	42.84	8.46	33.03 Peak
4	15720.000	54.41	-9.13	63.54	36.14	42.84	8.46	33.03 Average


<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 38 (40MHz) (Ant. A + Ant. B)

**Horizontal**

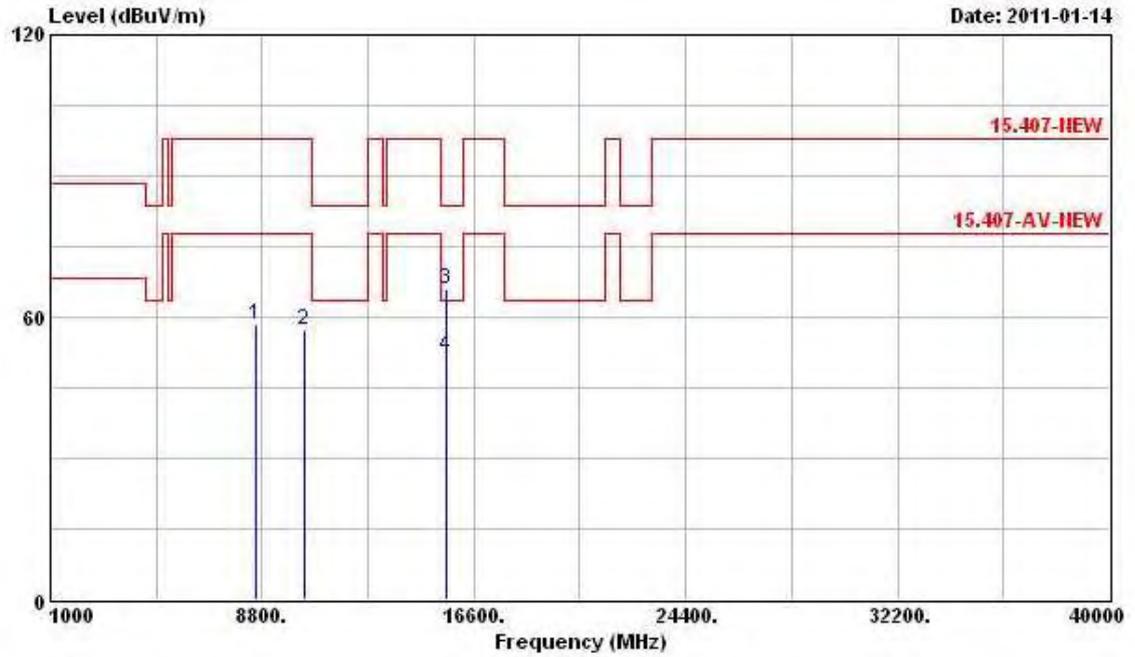

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	58.57	-39.27	97.84	48.43	38.45	5.97	34.28	Peak
2	10380.000	57.12	-40.72	97.84	44.46	40.03	6.75	34.12	Peak
3	15570.000	65.96	-17.58	83.54	47.57	42.81	8.45	32.87	Peak
4	15570.000	51.83	-11.71	63.54	33.44	42.81	8.45	32.87	Average


Vertical

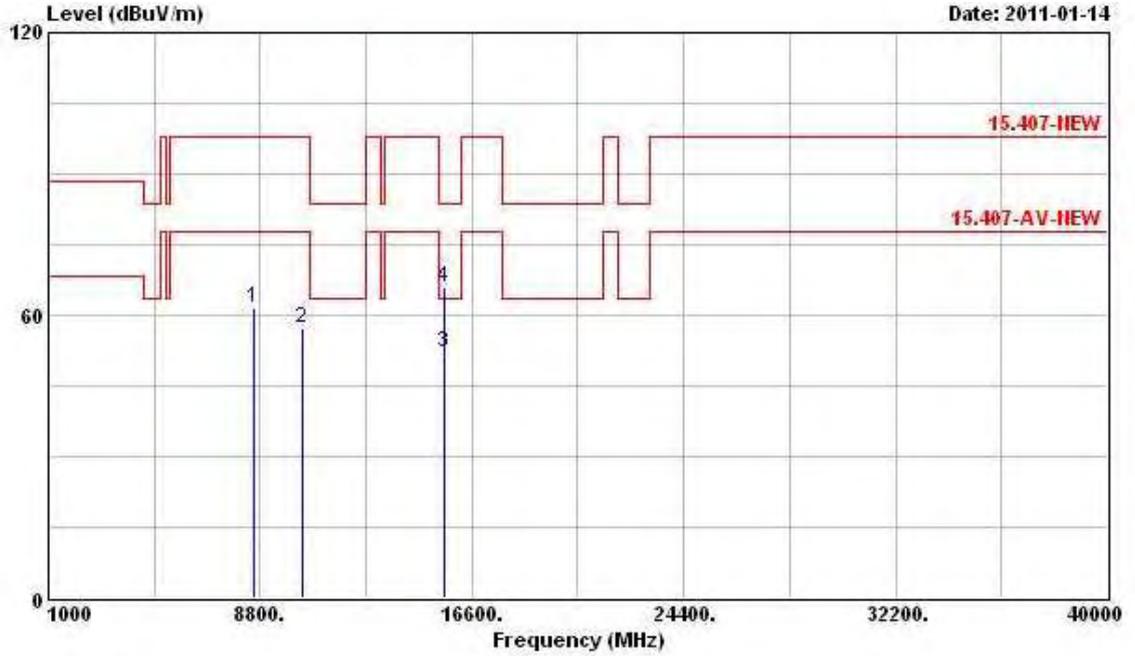

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8564.000	61.60	-36.24	97.84	51.46	38.45	5.97	34.28	Peak
2	10380.000	57.25	-40.59	97.84	44.59	40.03	6.75	34.12	Peak
3	15570.000	51.92	-11.62	63.54	33.53	42.81	8.45	32.87	Average
4	15570.000	65.84	-17.70	83.54	47.45	42.81	8.45	32.87	Peak


Final Test Date	Jan. 14, 2011	Test Site No.	03CH02-HY
Temperature	21.5°C	Humidity	55%
Test Engineer	Daniel	Configuration	802.11n Ch. 46 (40MHz) (Ant. A + Ant. B)

Horizontal

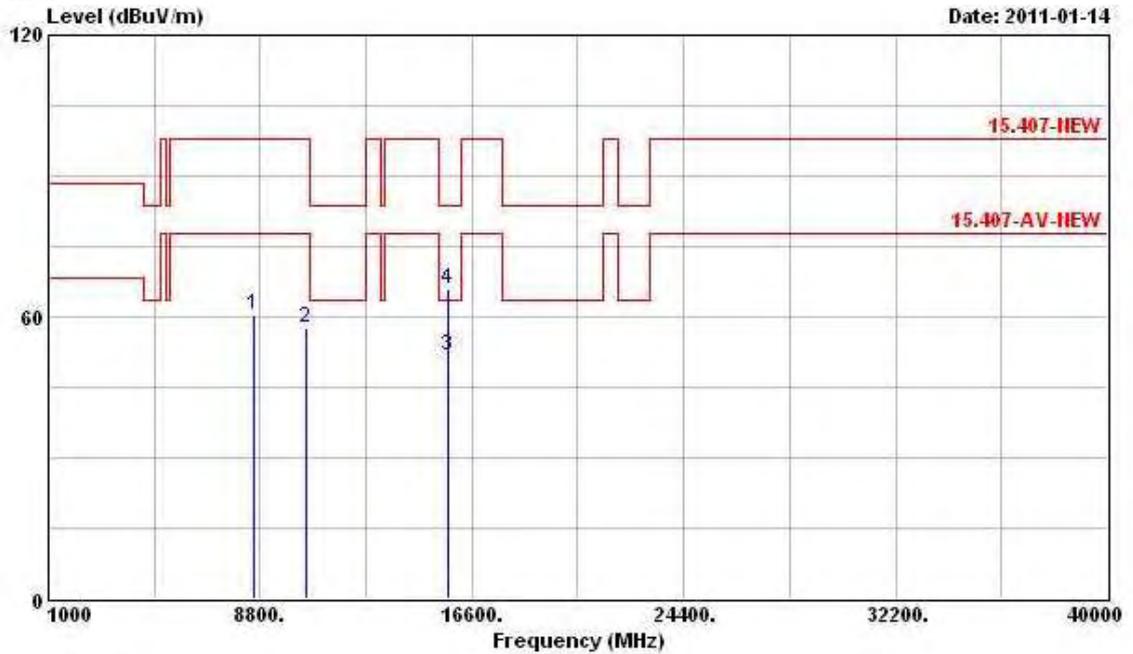

	Freq	Level	Over Limit	Limit Line	Read Antenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	8564.000	60.35	-37.49	97.84	50.21	38.45	5.97	34.28 Peak
2	10460.000	57.76	-40.08	97.84	44.92	40.07	6.82	34.05 Peak
3	15690.000	51.89	-11.65	63.54	33.59	42.84	8.46	33.00 Average
4	15690.000	65.93	-17.61	83.54	47.63	42.84	8.46	33.00 Peak

Vertical

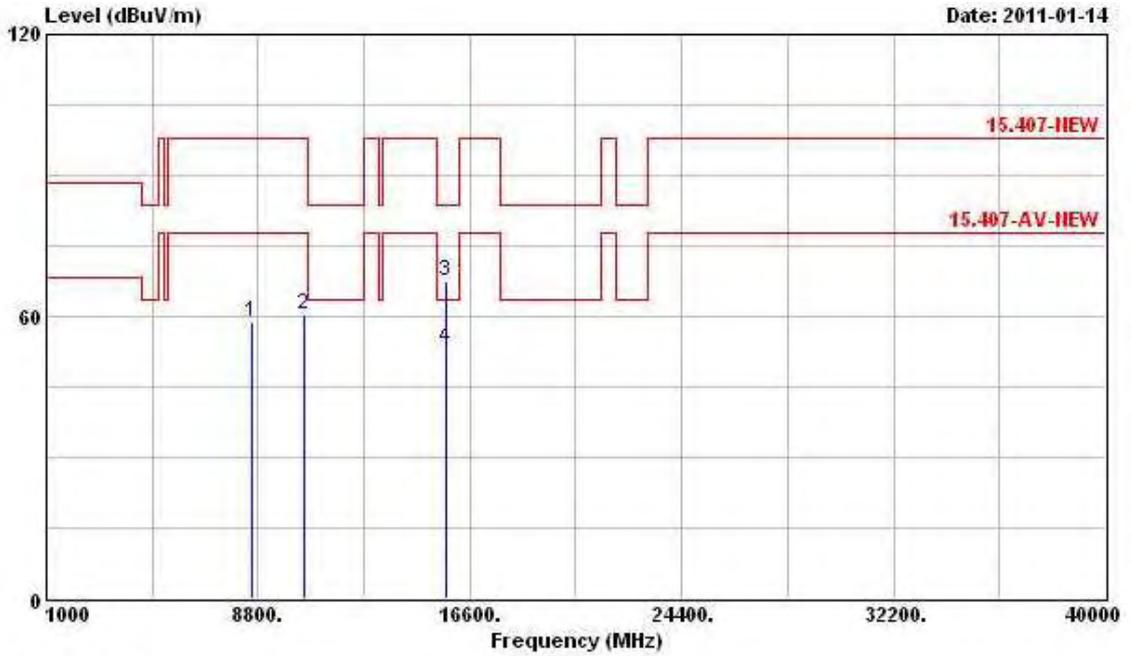

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8560.000	58.89	-38.95	97.84	48.73	38.45	5.97	34.26 Peak
2	10460.000	60.23	-37.61	97.84	47.39	40.07	6.82	34.05 Peak
3	15690.000	67.54	-16.00	83.54	49.24	42.84	8.46	33.00 Peak
4	15690.000	53.38	-10.16	63.54	35.08	42.84	8.46	33.00 Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

**3.7 Band Edge and Fundamental Emissions Measurement**

**3.7.1 Limit**

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microlvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.7.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz /1 MHz for Peak

**3.7.3 Test Procedures**

1. The test procedure is the same as section 3.6.3, only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.7.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.6.4.

**3.7.5 Test Deviation**

There is no deviation with the original standard.

**3.7.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.7.7 Test Result of Band Edge and Fundamental Emissions**

**For Single Chain:**

<b>Final Test Date</b>	Jan. 13, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11a Ch. 36, 40, 48

**Channel 36**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5142.600	62.10	-1.44	63.54	21.11	36.21	4.78	0.00	Average
2 @	5181.900	108.29			67.23	36.26	4.80	0.00	Average
1 @	5135.100	75.09	-8.45	83.54	34.12	36.19	4.78	0.00	Peak
2 @	5178.600	118.53			77.47	36.26	4.80	0.00	Peak

The item 2 is fundamental emissions.

**Channel 40**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5147.400	62.15	-1.39	63.54	21.16	36.21	4.78	0.00	Average
2 @	5194.500	112.46			71.37	36.28	4.81	0.00	Average
3 @	5397.300	60.00	-3.54	63.54	18.56	36.56	4.88	0.00	Average
1	5146.500	74.00	-9.54	83.54	33.01	36.21	4.78	0.00	Peak
2 @	5201.400	123.08			81.99	36.28	4.81	0.00	Peak
3	5399.400	72.83	-10.71	83.54	31.39	36.56	4.88	0.00	Peak

The item 2 is fundamental emissions.

**Channel 48**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5112.900	61.16	-2.38	63.54	20.23	36.16	4.77	0.00	Average
2 @	5237.400	116.03			74.88	36.33	4.82	0.00	Average
3 @	5362.200	62.08	-1.46	63.54	20.70	36.51	4.87	0.00	Average
1	5116.500	74.11	-9.43	83.54	33.17	36.16	4.78	0.00	Peak
2 @	5236.200	126.44			85.29	36.33	4.82	0.00	Peak
3 @	5361.000	74.71	-8.83	83.54	33.33	36.51	4.87	0.00	Peak

The item 2 is fundamental emissions.

**For Two Chain:**

<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 36, 40, 48 (20MHz) / (Ant. A + Ant. B)

**Channel 36**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5128.200	62.18	-1.36	63.54	21.21	36.19	4.78	0.00	Average
2 @	5177.800	111.05			69.99	36.26	4.80	0.00	Average
1 @	5145.500	74.99	-8.55	83.54	34.00	36.21	4.78	0.00	Peak
2 @	5181.400	122.61			81.55	36.26	4.80	0.00	Peak

The item 2 is fundamental emissions.

**Channel 40**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5147.700	62.35	-1.19	63.54	21.36	36.21	4.78	0.00	Average
2 @	5196.900	110.91			69.82	36.28	4.81	0.00	Average
3 @	5392.500	59.16	-4.38	63.54	17.74	36.54	4.88	0.00	Average
1 @	5147.400	74.73	-8.81	83.54	33.74	36.21	4.78	0.00	Peak
2 @	5198.100	122.95			81.86	36.28	4.81	0.00	Peak
3 @	5390.100	72.59	-10.95	83.54	31.17	36.54	4.88	0.00	Peak

The item 2 is fundamental emissions.

**Channel 48**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5112.600	61.49	-2.05	63.54	20.56	36.16	4.77	0.00	Average
2 @	5237.700	113.26			72.11	36.33	4.82	0.00	Average
3 @	5367.000	61.69	-1.85	63.54	20.31	36.51	4.87	0.00	Average
1 @	5115.300	75.59	-7.95	83.54	34.65	36.16	4.78	0.00	Peak
2 @	5241.300	124.77			83.62	36.33	4.82	0.00	Peak
3 @	5357.700	75.44	-8.10	83.54	34.08	36.49	4.87	0.00	Peak

The item 2 is fundamental emissions.

<b>Final Test Date</b>	Jan. 14, 2011	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	21.5°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11n Ch. 38, 46 (40MHz) / (Ant. A + Ant. B)

**Channel 38**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1	5150.000	62.36	-1.18	63.54	21.37	36.21	4.78	0.00	Average
2	5180.300	102.97			61.91	36.26	4.80	0.00	Average
1	5148.600	77.90	-5.64	83.54	36.91	36.21	4.78	0.00	Peak
2	5197.800	115.27			74.18	36.28	4.81	0.00	Peak

The item 2 is fundamental emissions.

**Channel 46**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1	5125.500	62.14	-1.40	63.54	21.17	36.19	4.78	0.00	Average
2	5232.750	110.08			68.93	36.33	4.82	0.00	Average
3	5360.500	60.95	-2.59	63.54	19.59	36.49	4.87	0.00	Average
1	5125.500	74.32	-9.22	83.54	33.35	36.19	4.78	0.00	Peak
2	5237.500	121.84			80.69	36.33	4.82	0.00	Peak
3	5363.500	75.04	-8.50	83.54	33.66	36.51	4.87	0.00	Peak

The item 2 is fundamental emissions.

**3.8 Frequency Stability Measurement**

**3.8.1 Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual or ±20ppm (IEEE 802.11a specification).

**3.8.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

**3.8.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than ±20ppm (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -30°C~50°C.
8. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.8.4 Test Setup Layout**

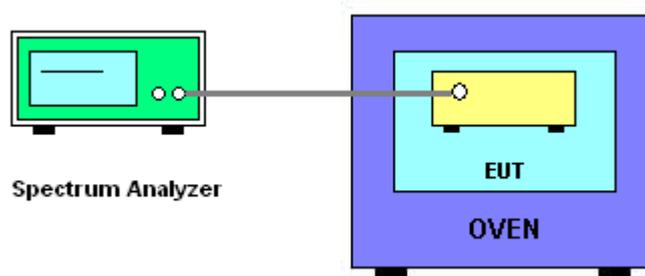

**3.8.5 Test Deviation**

There is no deviation with the original standard.

**3.8.6 EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.8.7 Test Result of Frequency Stability**

**Voltage vs. Frequency Stability  
For Single Chain**

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>
<b>(V)</b>	<b>IEEE 802.11a 5200 MHz</b>
<b>126.5</b>	5199.969714
<b>110</b>	5199.969812
<b>93.5</b>	5199.969819
<b>Max. Deviation (MHz)</b>	<b>0.030286</b>
<b>Max. Deviation (ppm)</b>	<b>5.82</b>

**Temperature vs. Frequency Stability**

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>
<b>(°C)</b>	<b>IEEE 802.11a 5200 MHz</b>
<b>-20</b>	5199.983650
<b>-10</b>	5199.987019
<b>0</b>	5199.985577
<b>10</b>	5199.977404
<b>20</b>	5199.969712
<b>30</b>	5199.962500
<b>40</b>	5199.958654
<b>50</b>	5199.960096
<b>Max. Deviation (MHz)</b>	<b>0.041346</b>
<b>Max. Deviation (ppm)</b>	<b>7.95</b>

**For Two Chain**

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>
<b>(V)</b>	<b>IEEE 802.11n (40MHz) 5230 MHz</b>
<b>126.5</b>	5229.999819
<b>110</b>	5229.999996
<b>93.5</b>	5229.999832
<b>Max. Deviation (MHz)</b>	<b>0.000181</b>
<b>Max. Deviation (ppm)</b>	<b>0.03</b>

**Temperature vs. Frequency Stability**

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>
<b>(°C)</b>	<b>IEEE 802.11n (40MHz) 5230 MHz</b>
<b>-20</b>	5229.999413
<b>-10</b>	5229.999157
<b>0</b>	5229.999543
<b>10</b>	5229.993314
<b>20</b>	5229.999996
<b>30</b>	5229.999370
<b>40</b>	5229.998744
<b>50</b>	5229.998159
<b>Max. Deviation (MHz)</b>	<b>0.006686</b>
<b>Max. Deviation (ppm)</b>	<b>1.28</b>

### **3.9 Antenna Requirements**

#### **3.9.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.9.2 Antenna Connector Construction**

Please refer to section 2.4 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Sep. 14, 2010	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Jan. 31, 2011	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 01, 2011	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	Mar. 02, 2011	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Nov. 19, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 19, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2010	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2010	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 26, 2010*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Nov. 17, 2010	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 01, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz~18GHz	Nov. 11, 2010	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 26, 2010	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Feb. 26, 2010	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Oct. 16, 2010	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

**5 TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

P1, total 24 pages