

FCC Test Report

Equipment : 2T2R 11ac Wireless LAN Concurrent Dual Band Gigabit Router
Brand Name : EDIMAX
Model No. : BR-6478AC / GR-478AC
FCC ID : NDD9564781213
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
Equipment Class : NII
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Manufacturer : No.3,Wu-Chuan 3rd Road,Wu-Ku Industrial Park,
New Taipei City, Taiwan
Multiple Listing : Please refer to section 1.3

The product sample received on Dec. 17, 2012 and completely tested on Apr. 03, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Vic Hsiao / Supervisor



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Product Details	7
1.3	Table for Multiple Listing	7
1.4	Accessories	7
1.5	Support Equipment.....	8
1.6	Testing Applied Standards	8
1.7	Testing Location Information.....	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	10
2.4	The Worst Case Measurement Configuration.....	11
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	Emission Bandwidth	17
3.3	RF Output Power.....	20
3.4	Peak Power Spectral Density.....	26
3.5	Peak Excursion	31
3.6	Transmitter Radiated Bandedge Emissions.....	35
3.7	Transmitter Radiated Unwanted Emissions	42
3.8	Frequency Stability.....	65
4	TEST EQUIPMENT AND CALIBRATION DATA	67
	APPENDIX A. TEST PHOTOS	A1
	APPENDIX B. PHOTOGRAPHS OF EUT	B1

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.2340870MHz 57.21 (Margin 5.09dB) - QP 46.03 (Margin 6.27dB) - AV	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	Bandwidth [MHz] 20M:20.45 / 40M:43.72 80M: 82.72	Information only	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 5150-5250MHz:16.53	Power [dBm] 5150-5250MHz:17	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5150-5250MHz:3.61	PPSD [dBm/MHz] 5150-5250MHz:4	Complied
3.5	15.407(a)	Peak Excursion	8.65 dB	13 dB	Complied
3.6	15.407(b)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 1m]: 5150.000MHz 79.26 (Margin 4.28dB) - PK 62.47 (Margin 1.07dB) - AV	Non-Restricted Bands: ≤ -27 dBm (83.54dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.7	15.407(b)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 1m]: 10480MHz 72.81(Margin 10.73dB) – PK 62.21 (Margin 1.33dB) - AV	Non-Restricted Bands: ≤ -27 dBm (83.54dBuV/m@1m) Restricted Bands: FCC 15.209	Complied
3.8	15.407(g)	Frequency Stability	8.22 ppm	Signal shall remain in-band	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5150-5250	a	5180-5240	36-48 [4]	1	14.90	Yes
5150-5250	n(HT20)	5180-5240	36-48 [4]	2	15.15	Yes
5150-5250	n(HT40)	5190-5230	38-46 [2]	2	16.53	Yes
5150-5250	ac(VHT80)	5210	48 [1]	2	16.43	Yes

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
☐	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☒	External antenna (dedicated antennas)
☐	Single power level with corresponding antenna(s).
☒	Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	External	Dipole	3.00

Reminder: The EUT was pre-tested Antenna Port 1 and Antenna Port 2 for single chain, the worst case was Antenna Port 1. Therefore only the test data recorded in this report.

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 100.00% - IEEE 802.11a	0
☒ 100.00% - IEEE 802.11n (HT20)	0
☒ 100.00% - IEEE 802.11n (HT40)	0
☒ 100.00% - IEEE 802.11ac (VHT80)	0

1.1.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	
Type of DC Source	☐ Internal DC supply	☒ External DC adapter	☐ Battery

1.2 Product Details

The equipment is 2T2R 11ac Wireless LAN Concurrent Dual Band Gigabit Router. There are two types of EUT. The only difference is the appearance. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

1.3 Table for Multiple Listing

The models are exactly same in both physical and electrical. The different in model number for marketing purpose.

No.	Brand Name	Model Name
1	Edimax	BR-6478AC,GR-478AC
2	ZyXEL	X650

1.4 Accessories

Accessories Information				
AC Adaptor	Brand Name	DVE	Model Name	DSA-12PFA-05 FUS
	Power Rating	I/P: 100-240V ~ 50/60Hz 0.5A; O/P: +5V  2A		

Note: Regarding to more detail and other information, please refer to user manual.

1.5 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	VOSTRO 3350	DoC
2	(USB)Mouse	Microsoft	1113	DoC
3	(USB) Printer	EPSON	STYLUS C61	DoC
4	Dummy Load	-	-	-
5	Notebook	DELL	PP32LB	DoC
6	PC (Remote workstation)	HP	d330uT	DoC
7	LCD Monitor (Remote workstation)	DELL	2408WFPb	DoC
8	(PS2)Keyboard (Remote workstation)	HP	KB-0133	DoC
9	(PS2)Mouse (Remote workstation)	HP	M-S69	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	(USB)Mouse	Microsoft	1004	DoC
3	(USB) Printer	EPSON	STYLUS C61	DoC
4	Notebook (Remote workstation)	DELL	E5520	DoC

1.6 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 789033
- ♦ FCC KDB 662911
- ♦ FCC KDB 644545
- ♦ FCC KDB 412172

1.7 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Wei	22.8°C / 48.4%	Mar. 27, 2013
AC Conduction	CO04-HY	Zevs	23°C / 49.1%	Apr. 03, 2013
Radiated Emission	03CH02-HY	Hsiao	23.1°C / 60%	Feb. 27, 2013~ Mar. 02, 2013

1.8 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing (5150-5250MHz)				
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	Output Power (dBm)
11a,6-54Mbps	1	6-54Mbps	6 Mbps	14.90
HT20,M0-15	2	M0-15	M0	15.15
HT40,M0-15	2	M0-15	M0	16.53
VHT80,M0-9	2	M0-9	M9	16.43
Note 1: Modulation modes consist of below configuration: 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac Note 2: IEEE Std. 802.11n/ac modulation consists of HT20, HT40, VHT20, VHT40, VHT80 and VHT160. Then EUT support HT20, HT40, VHT20, VHT40 and VHT80. Worst modulation mode: HT20, HT40, VHT80. Worst modulation of Guard Interval (GI) is 800ns.				

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration		
Frequency Range (MHz)	IEEE Std. 802.11	Test Channel Freq. (MHz) – FX (Frequencies Abbreviations)
5150-5250	a, n (HT20)	5180-(F1), 5200-(F2), 5240-(F3)
5150-5250	n (HT40)	5190-(F1'), 5230-(F2')
5150-5250	ac (VHT80)	5210-(F1'')

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250 MHz band)							
Test Software Version	RTL819x_2.2.5						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5180	5200	5240	5190	5230	5210
11a,6-54Mbps	1	44	43	43	-	-	-
HT20,M0-M15	2	41,45	40,44	40,44	-	-	-
HT40,M0-M15	2	-	-	-	46,49	45,48	-
VHT80,M0-9	2	-	-	-	-	-	42,46


2.4 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT80

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☒ EUT will be placed in fixed position. The worst planes is X.		
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode < 1GHz	☒ 1. Radio link (WLAN)		
Modulation Mode	11a, HT20, HT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.5 Test Setup Diagram

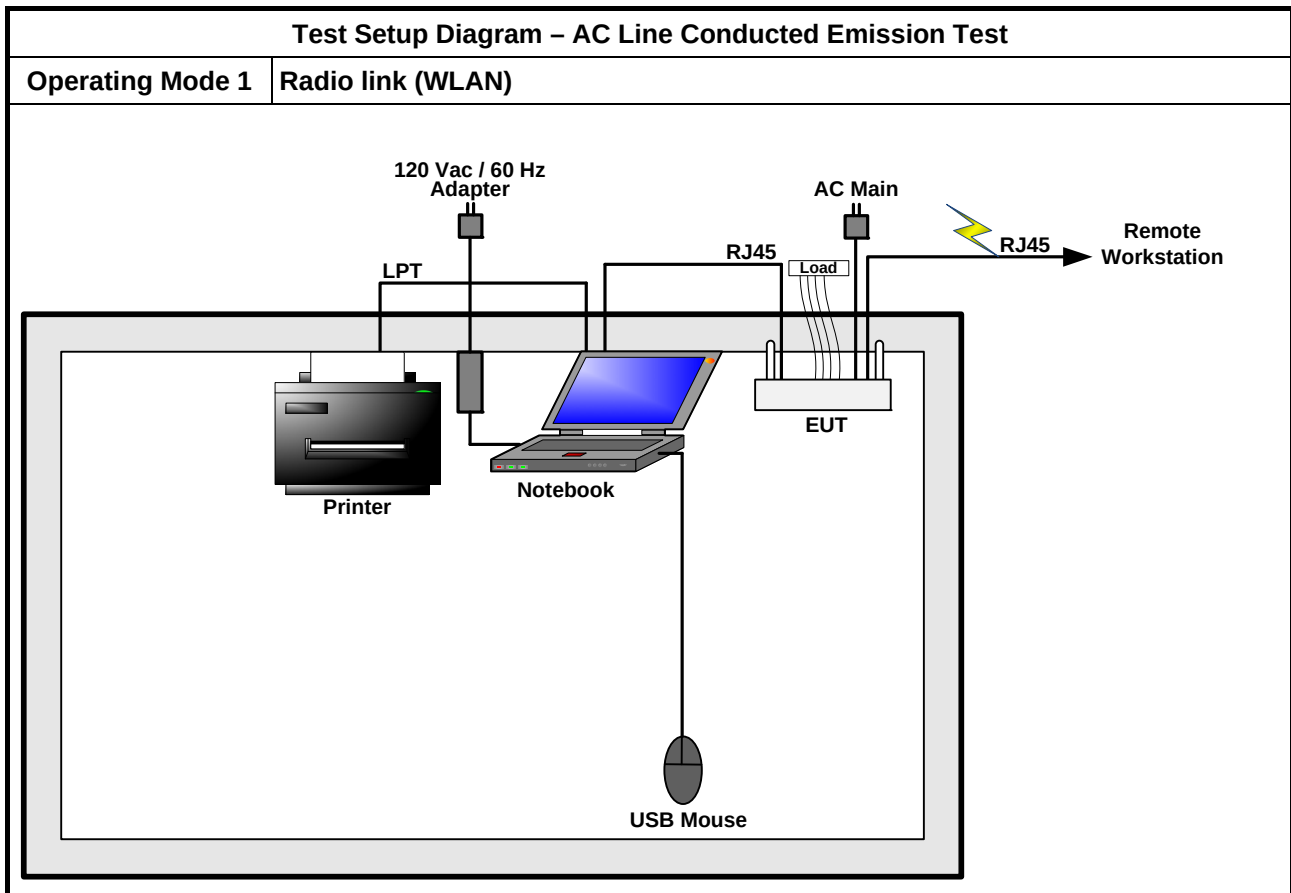

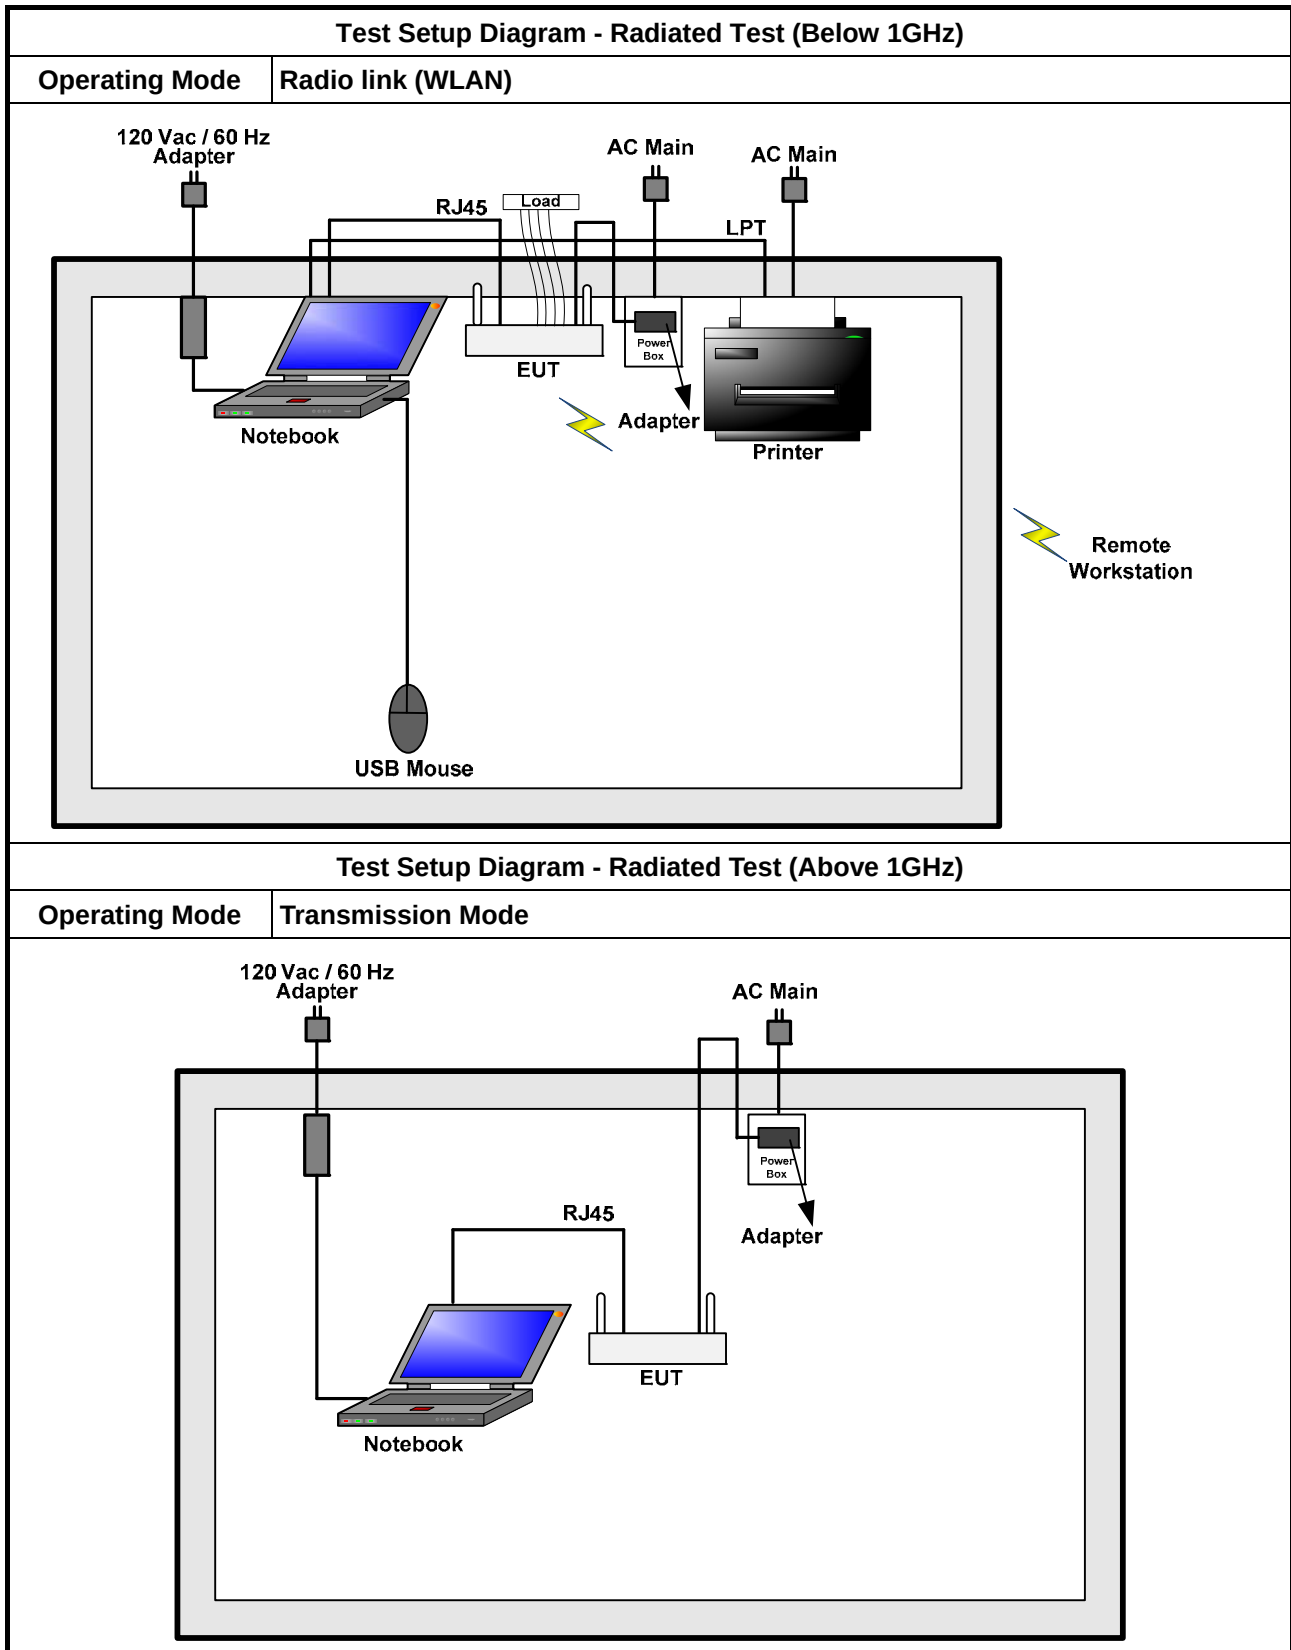

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

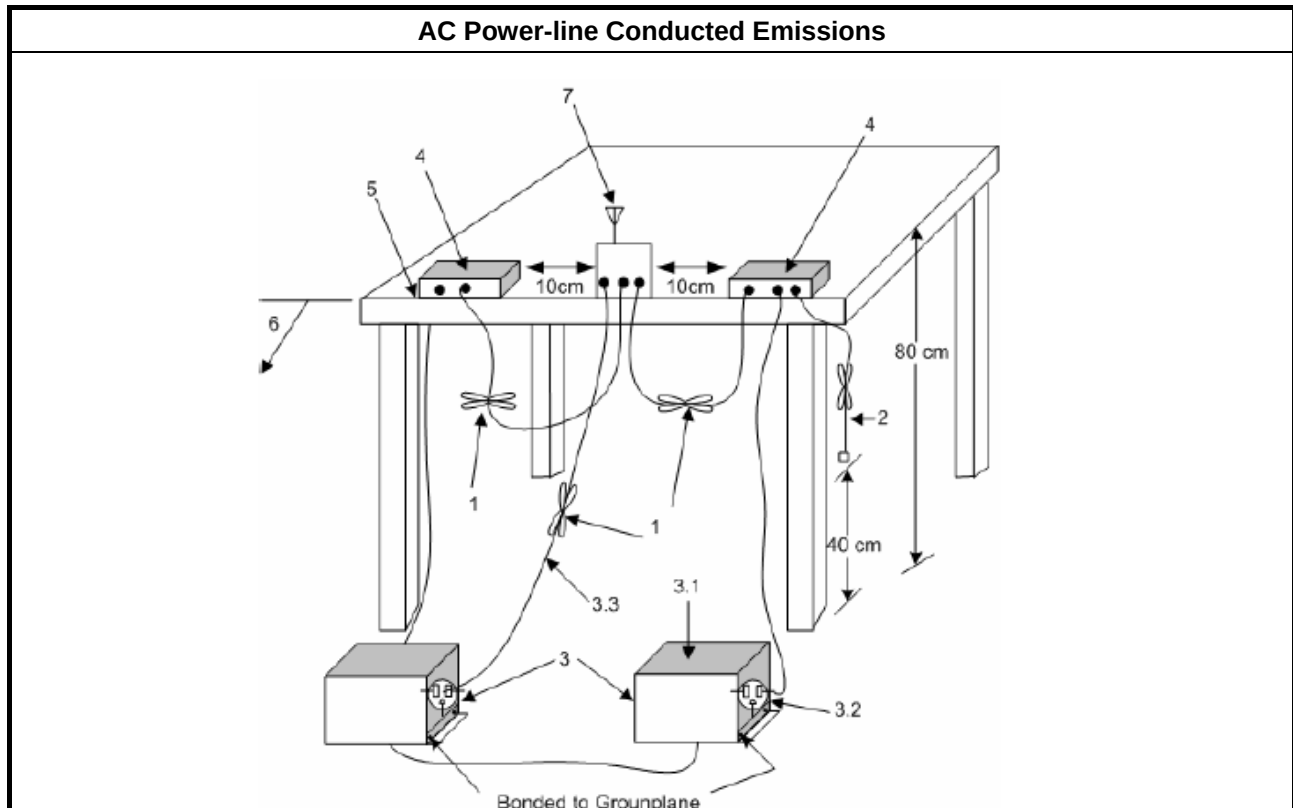


3.1.5 Test Result of AC Power-line Conducted Emissions

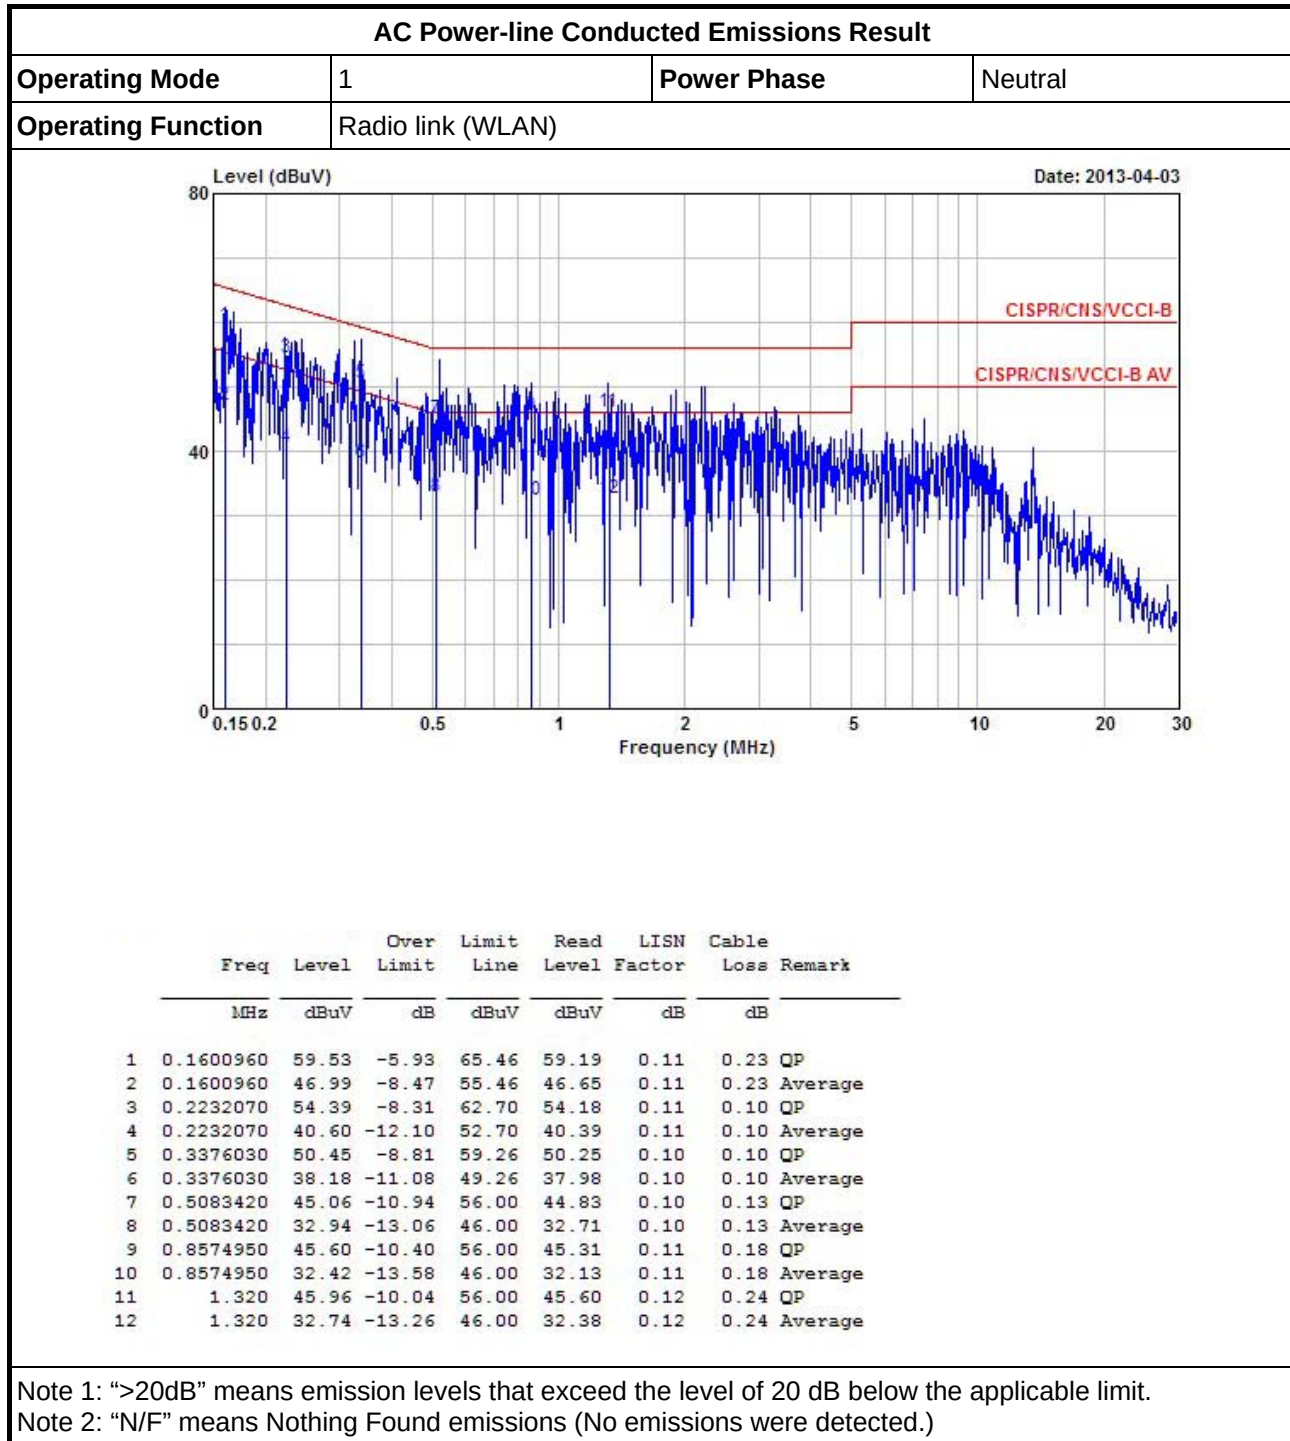

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Radio link (WLAN)		

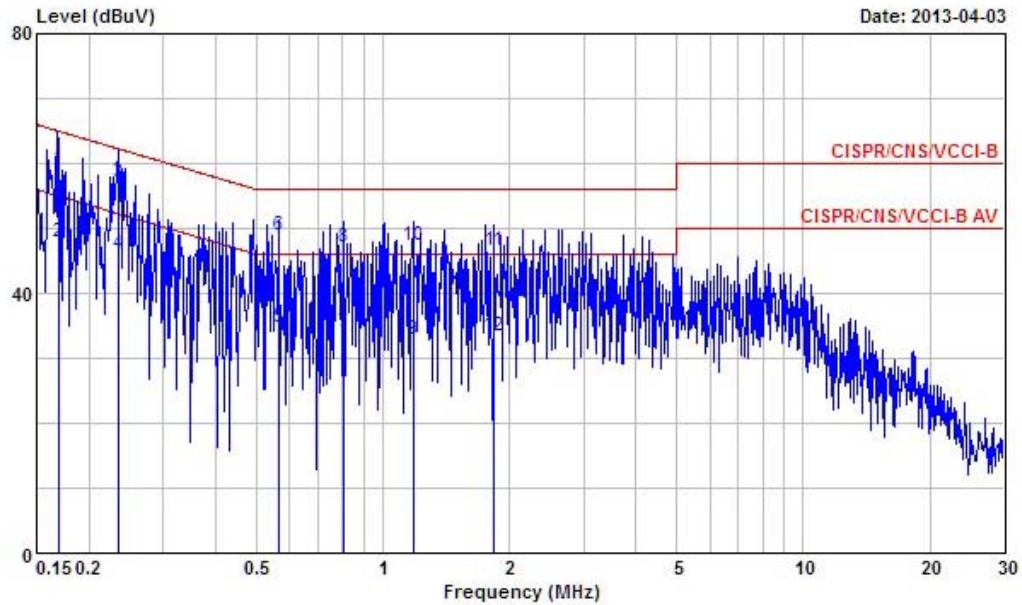

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV		dB	
1	0.1689540	59.15	-5.86	65.01	58.72	0.24	0.19	QP
2	0.1689540	47.80	-7.21	55.01	47.37	0.24	0.19	Average
3	0.2340870	57.21	-5.09	62.30	56.88	0.23	0.10	QP
4	0.2340870	46.03	-6.27	52.30	45.70	0.23	0.10	Average
5	0.5640910	34.80	-11.20	46.00	34.44	0.22	0.14	Average
6	0.5640910	48.94	-7.06	56.00	48.58	0.22	0.14	QP
7	0.8087580	33.99	-12.01	46.00	33.58	0.23	0.18	Average
8	0.8087580	47.21	-8.79	56.00	46.80	0.23	0.18	QP
9	1.180	32.87	-13.13	46.00	32.42	0.23	0.22	Average
10	1.180	47.49	-8.51	56.00	47.04	0.23	0.22	QP
11	1.840	46.56	-9.44	56.00	46.02	0.25	0.29	QP
12	1.840	33.35	-12.65	46.00	32.81	0.25	0.29	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the maximum conducted output power shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum conducted output power shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
LE-LAN Devices	
☒	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
☒	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

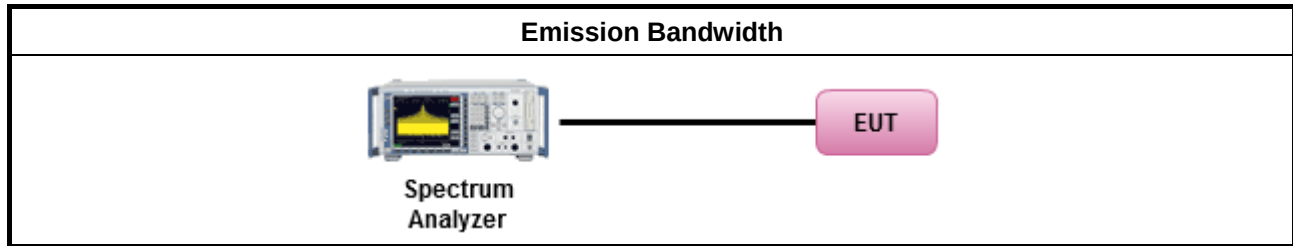


3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)												
Condition			Emission Bandwidth (MHz)									
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				26dB Bandwidth				Power Limit	
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-	99% BW	26dB BW
11a	1	5180	16.74	-	-	-	20.15	-	-	-	16.24	17.04
11a	1	5200	16.51	-	-	-	19.77	-	-	-	16.18	16.96
11a	1	5240	16.59	-	-	-	19.87	-	-	-	16.20	16.98
HT20	2	5180	17.64	17.76	-	-	20.15	20.30	-	-	16.46	17.04
HT20	2	5200	17.69	17.51	-	-	20.15	19.87	-	-	16.43	16.98
HT20	2	5240	17.71	17.61	-	-	20.45	20.15	-	-	16.46	17.04
HT40	2	5190	36.58	36.58	-	-	43.72	43.20	-	-	19.63	20.35
HT40	2	5230	36.50	36.54	-	-	43.36	43.56	-	-	19.62	20.37
VHT80	2	5210	75.64	75.64	-	-	82.72	82.40	-	-	22.79	23.16
Result			Complied									

5150-5250MHz


Worst Emission Bandwidth Plots

11a

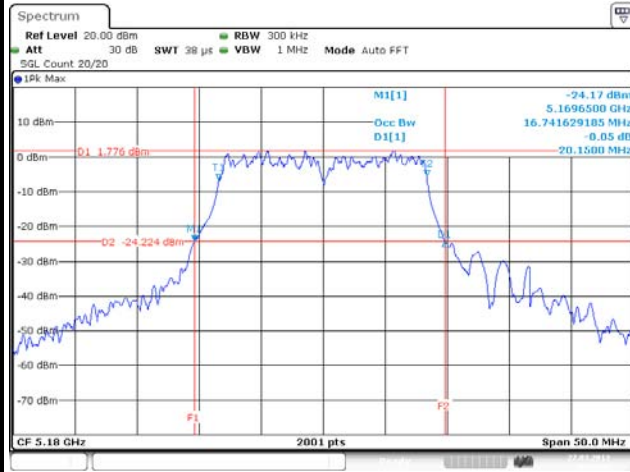


Date: 27.MAR.2013 20:58:54

HT20

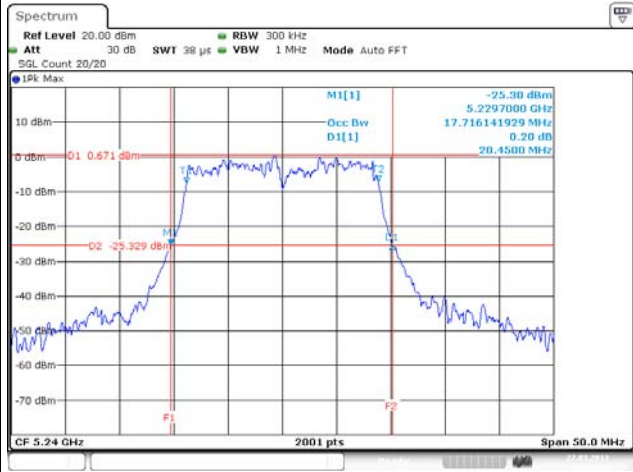


Date: 27.MAR.2013 21:02:51

HT40

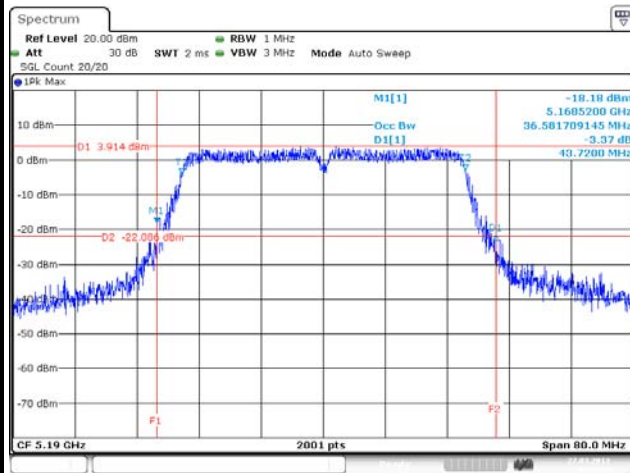

Date: 27.MAR.2013 20:41:19

VHT80

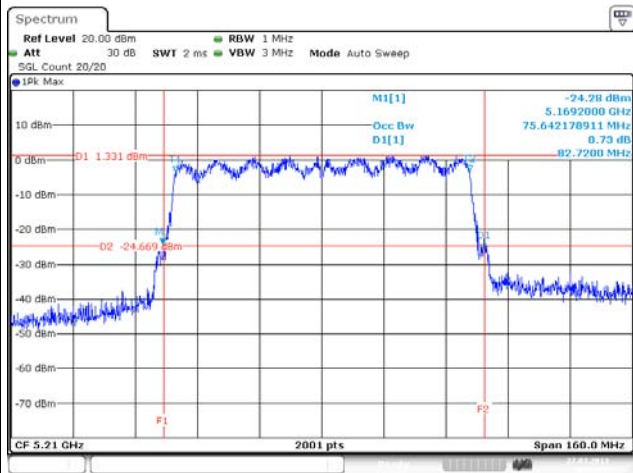

Date: 27.MAR.2013 20:53:21

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.725-5.825 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 23 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 23)$.
LE-LAN Devices	
☒	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-multipoint systems (P2M): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Point-to-point systems (P2P): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If e.i.r.p. > 36 dBm, $G_{TX} \leq P_{Out}$
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	



3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
☐	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☒	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

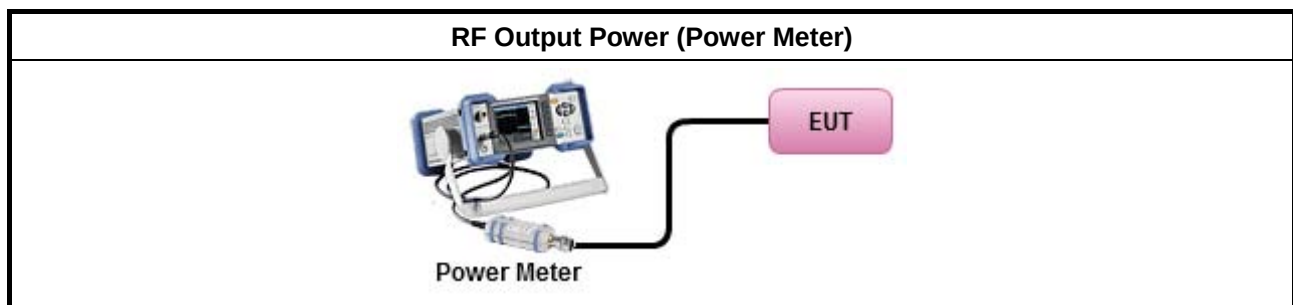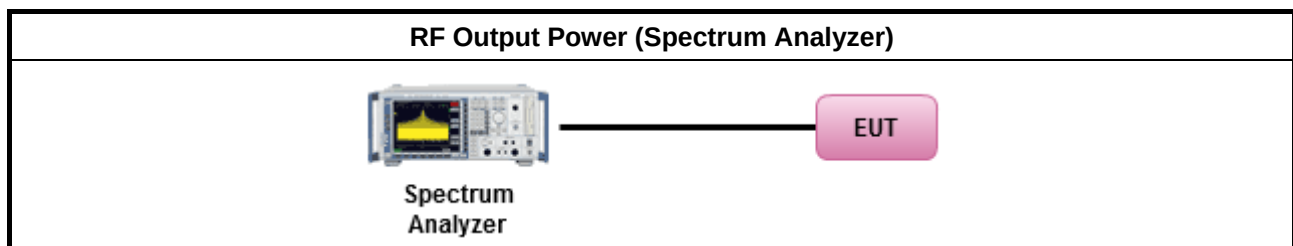

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G_{ANT} (dBi)		3.00	3.00	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	3.00	1	1	-	-
HT20,M8-15	3.00	2	1	-	-
HT40,M8-M15	3.00	2	2	-	-
VHT80,M0-9	3.00	2	2	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$
All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$,
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX} ;


3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power (5150-5250MHz band)											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	1	5180	14.77	-	-	-	14.77	17.00	3.00	17.77	22.20
11a	1	5200	14.52	-	-	-	14.52	16.96	3.00	17.52	22.17
11a	1	5240	14.90	-	-	-	14.90	16.98	3.00	17.90	22.17
HT20	2	5180	12.13	12.03	-	-	15.09	17.00	3.00	18.09	22.49
HT20	2	5200	12.14	11.92	-	-	15.04	16.98	3.00	18.04	22.45
HT20	2	5240	12.11	12.16	-	-	15.15	17.00	3.00	18.15	22.44
HT40	2	5190	13.57	13.46	-	-	16.53	17.00	3.00	19.53	23.00
HT40	2	5230	13.36	13.39	-	-	16.39	17.00	3.00	19.39	23.00
VHT80	2	5210	13.35	13.49	-	-	16.43	17.00	3.00	19.43	23.00
Result			Complied								


5150-5250MHz

Worst RF Output Power Plots


11a [Port 1]

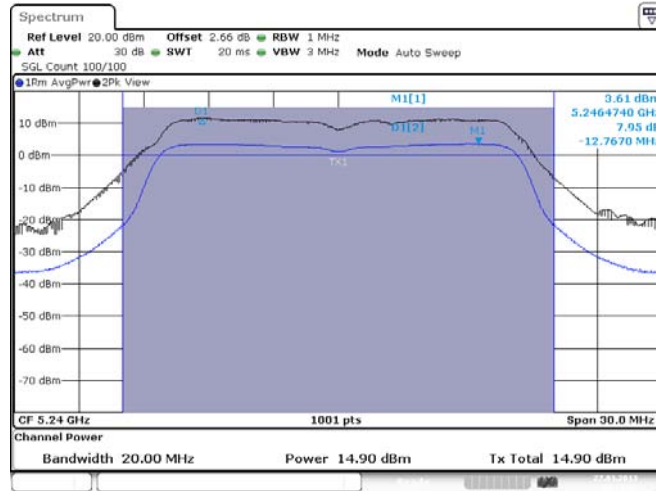

HT20 [Port 1]

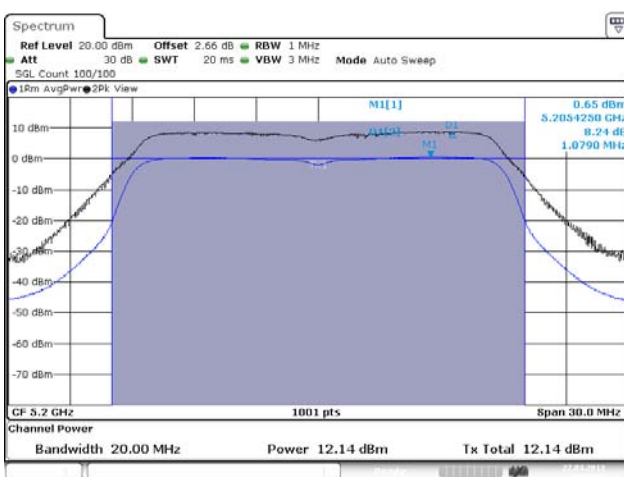


HT20 [Port 2]

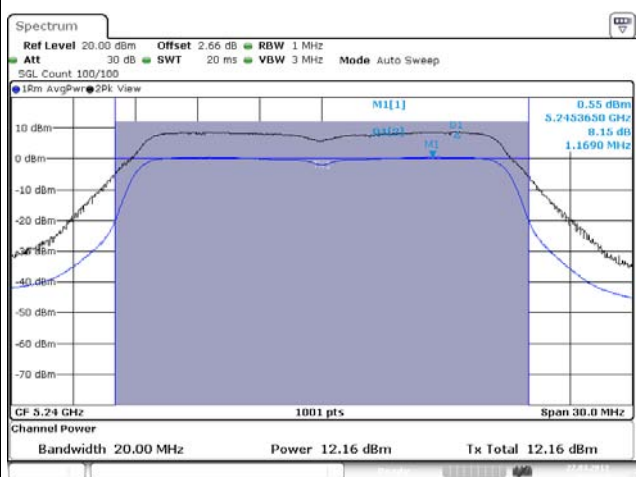


Worst RF Output Power Plots

HT40 [Port 1]

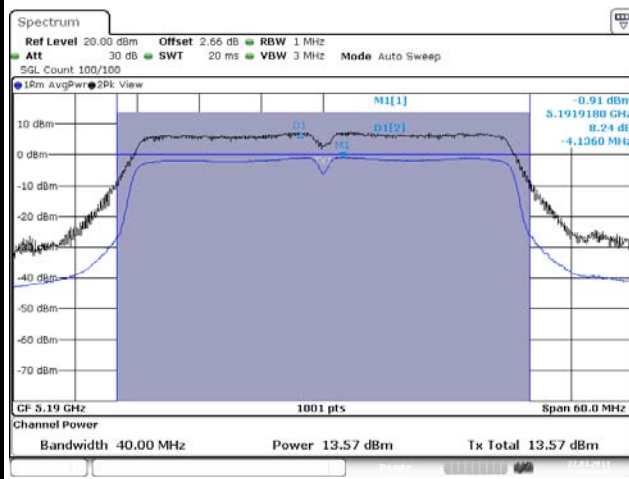


Date: 27.MAR.2013 20:40:56

HT40 [Port 2]

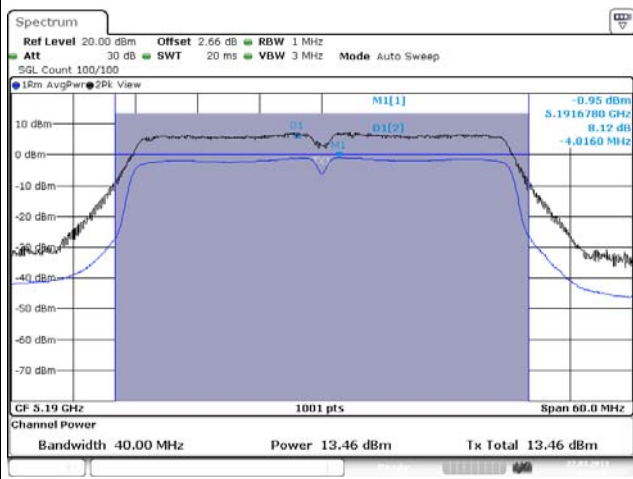


Date: 27.MAR.2013 20:41:05

VHT80 [Port 1]

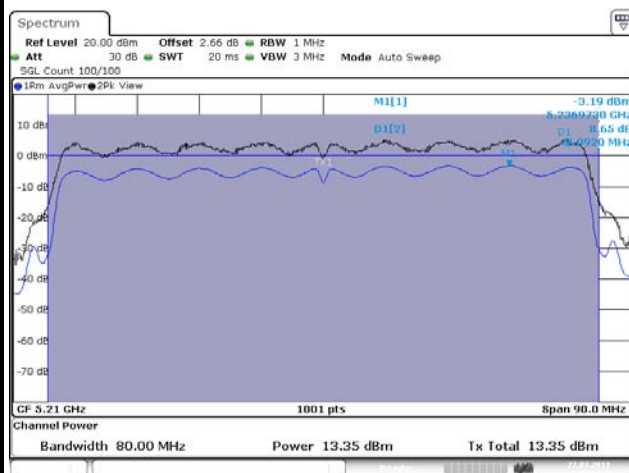

Date: 27.MAR.2013 20:51:15

VHT80 [Port 2]

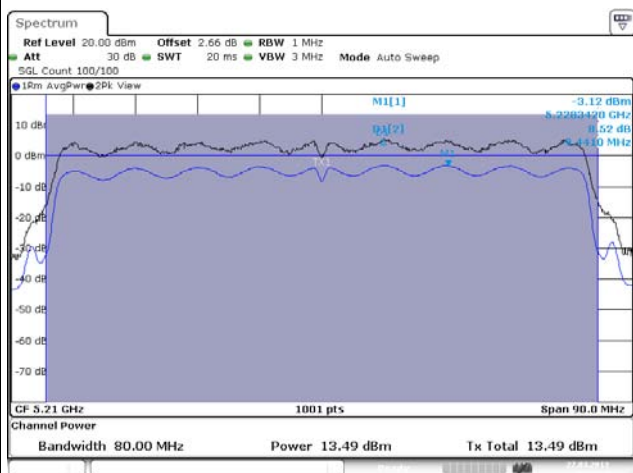

Date: 27.MAR.2013 20:51:24

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 4 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐	For the 5.725-5.825 GHz band:
☐	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 17 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 17 dBm/MHz. If $G_{TX} > 23$ dBi, then $PPSD = 17 - (G_{TX} - 23)$.
LE-LAN Devices	
☒	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☐	For the 5.725-5.825 GHz band, the peak power spectral density (PPSD) ≤ 17 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 23 dBm/MHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
☐	Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☒	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☒	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☒	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.

3.4.4 Test Setup

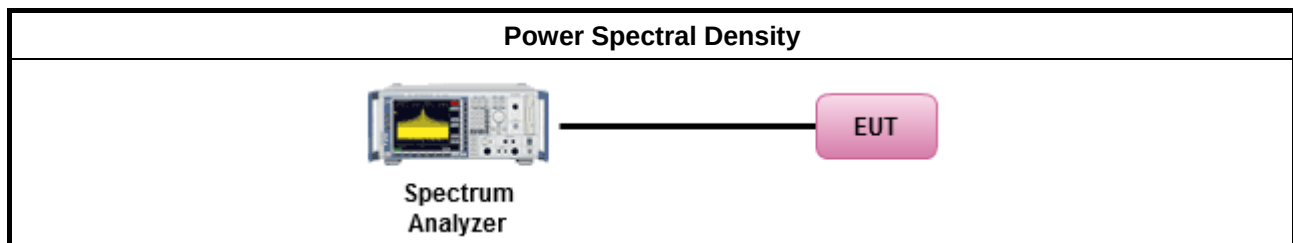

3.4.5 Directional Gain for Power Spectral Density Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G_{ANT} (dBi)		3.00	3.00	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	3.00	1	1	-	0
HT20,M0-15	6.01	2	1	-	0
HT40,M0-M15	6.01	2	1	-	0
VHT80,M0-9	6.01	2	1	-	0

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$
All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$,
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power spectral density measurements:
Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:
Array Gain = $10 \log(N_{TX}/N_{SS})$;


3.4.6 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result (5150-5250MHz band)											
Condition			Peak Power Spectral Density (dBm/MHz)								
Modulation Mode	N _{TX}	Freq. (MHz)	-	-	-	-	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	1	5180	-	-	-	-	3.57	4.00	3.00	6.57	10.00
11a	1	5200	-	-	-	-	3.35	4.00	3.00	6.35	10.00
11a	1	5240	-	-	-	-	3.61	4.00	3.00	6.61	10.00
HT20	2	5180	-	-	-	-	3.55	3.99	6.01	9.56	10.00
HT20	2	5200	-	-	-	-	3.52	3.99	6.01	9.53	10.00
HT20	2	5240	-	-	-	-	3.51	3.99	6.01	9.52	10.00
HT40	2	5190	-	-	-	-	2.07	3.99	6.01	8.08	10.00
HT40	2	5230	-	-	-	-	1.88	3.99	6.01	7.89	10.00
VHT80	2	5210	-	-	-	-	-0.19	3.99	6.01	5.82	10.00
Result			Complied								


5150-5250MHz

Worst Power Spectral Density Plots


11a

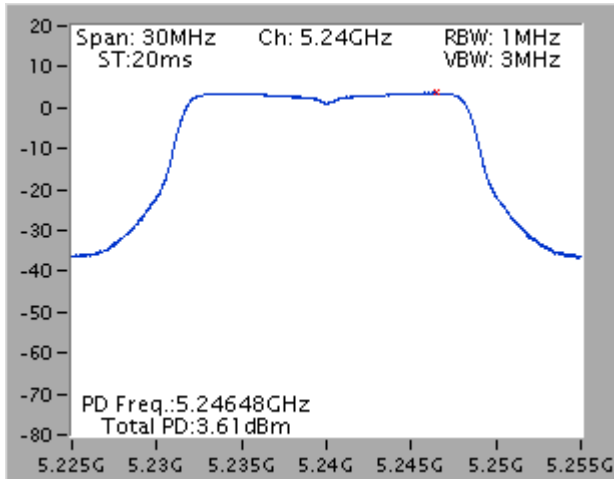


HT20

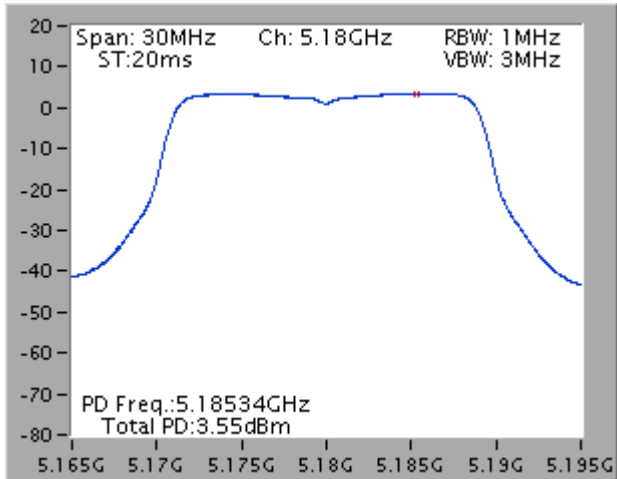

HT40

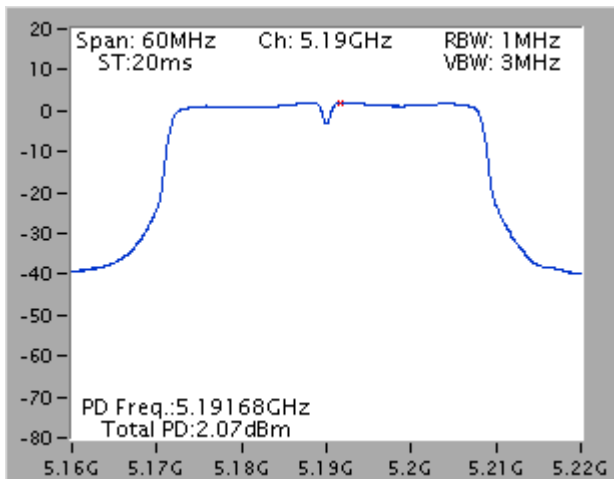

VHT80

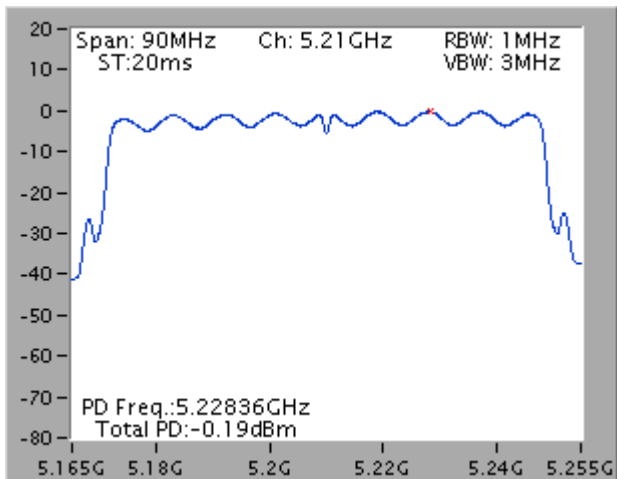

3.5 Peak Excursion

3.5.1 Peak Excursion Limit

Peak Excursion Limit	
UNII Devices	
☒	Peak excursion ≤ 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)
LE-LAN Devices	
☒	N/A


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	Refer as FCC KDB 789033, clause G peak excursion method.
☒	Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
☒	For conducted measurement.
☒	Testing a single output port is sufficient to demonstrate compliance with the peak excursion.
☒	Test result plots refer as test report clause 3.3.5 with peak excursion ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum.

3.5.4 Test Setup

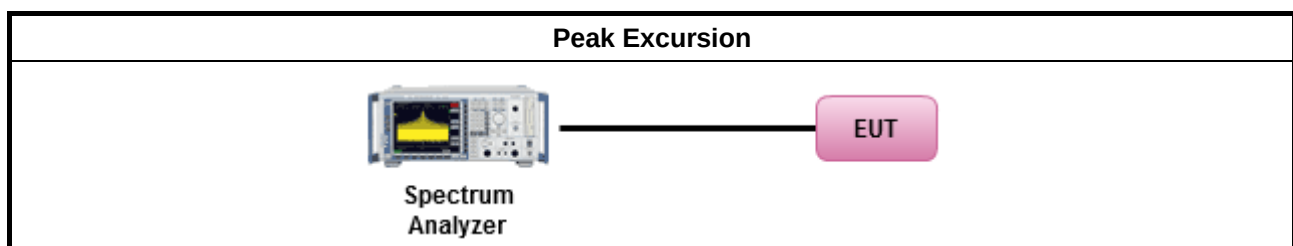


3.5.5 Test Result of Peak Excursion

UNII Peak Excursion Result (5150-5250MHz band)							
Condition			Peak Excursion (dB)				
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Chain-Port 2	-	-	Limit
11a	1	5180	7.91	-	-	-	13.0
HT20	2	5180	8.22	8.14	-	-	13.0
HT40	2	5190	8.24	8.12	-	-	13.0
VHT80	2	5210	8.65	8.52	-	-	13.0
Result			Complied				


5150-5250MHz

Worst Peak Excursion Plots


11a [Port 1]

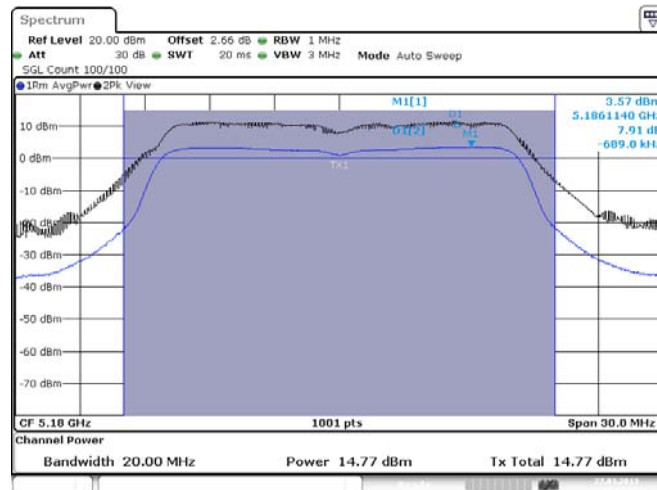

HT20 [Port 1]

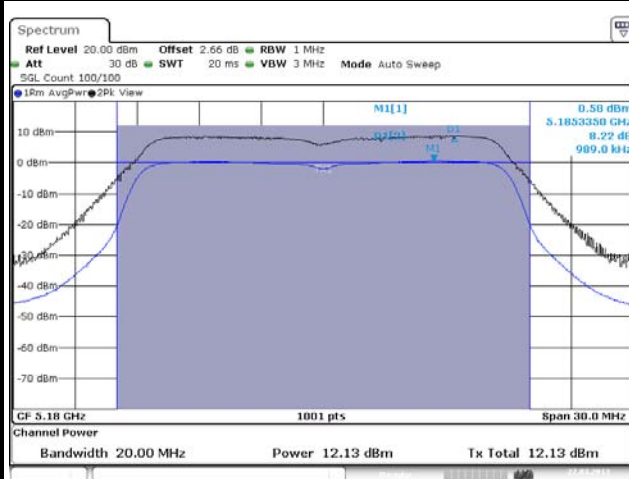


HT20 [Port 2]

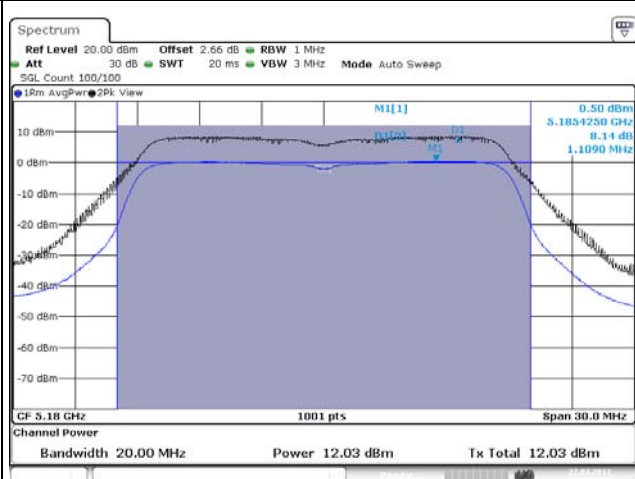


Worst Peak Excursion Plots


HT40 [Port 1]

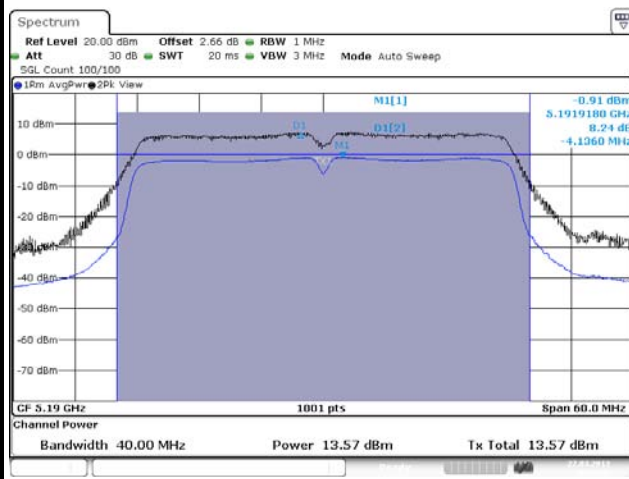


HT40 [Port 2]

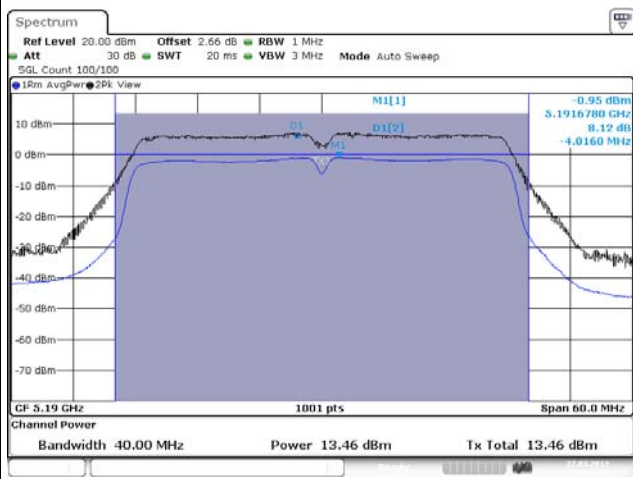

VHT80 [Port 1]

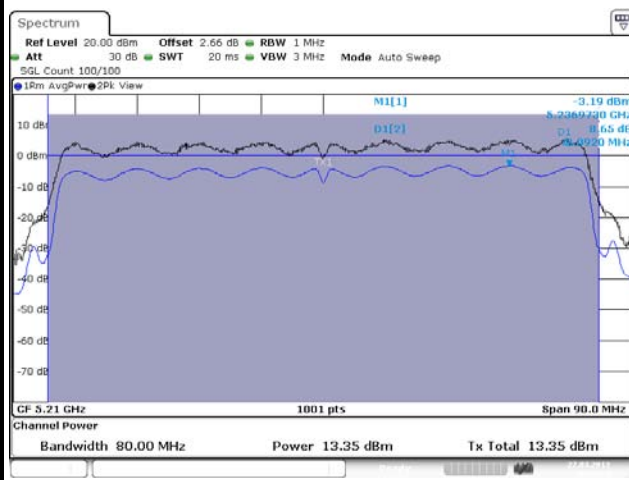


VHT80 [Port 2]

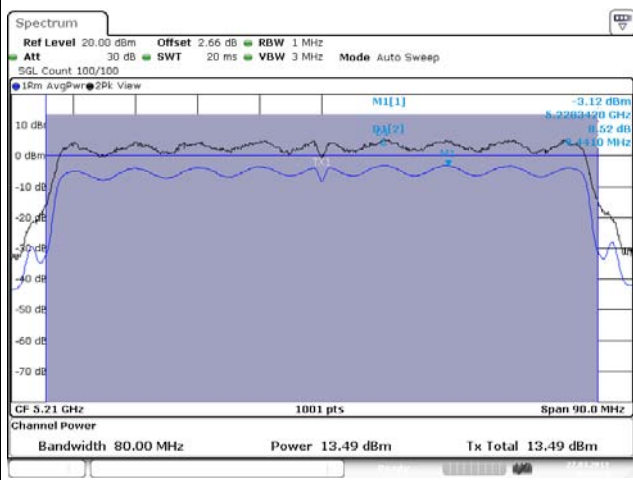

3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

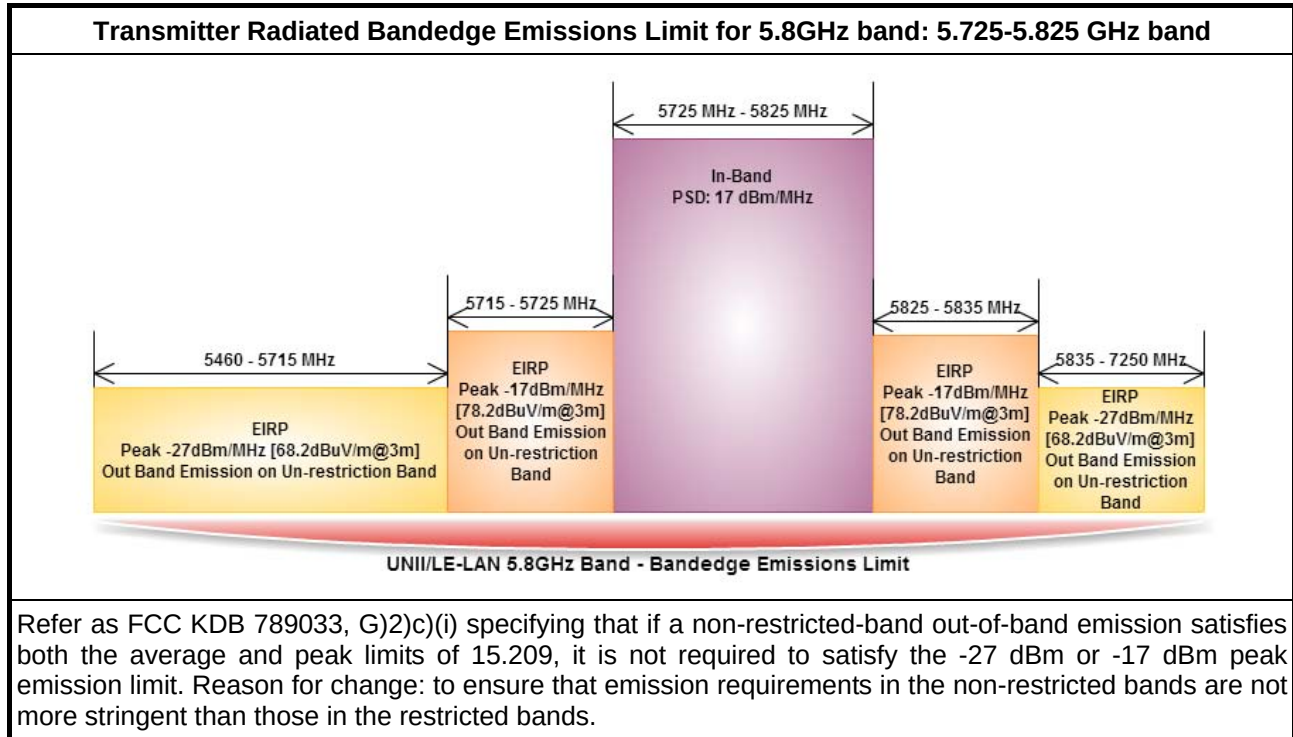

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☐	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band).
☐	☐ Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☐	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
☐	☐ Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band).
☐	☐ Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☐	☐ Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
☐	☐ Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
☒	☒ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	☒ Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐	☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☐	☐ Refer as FCC KDB 789033, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
☒	☒ Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	☐ Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.





Test Method	
☐	For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).
☐	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
☐	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

3.6.4 Test Setup




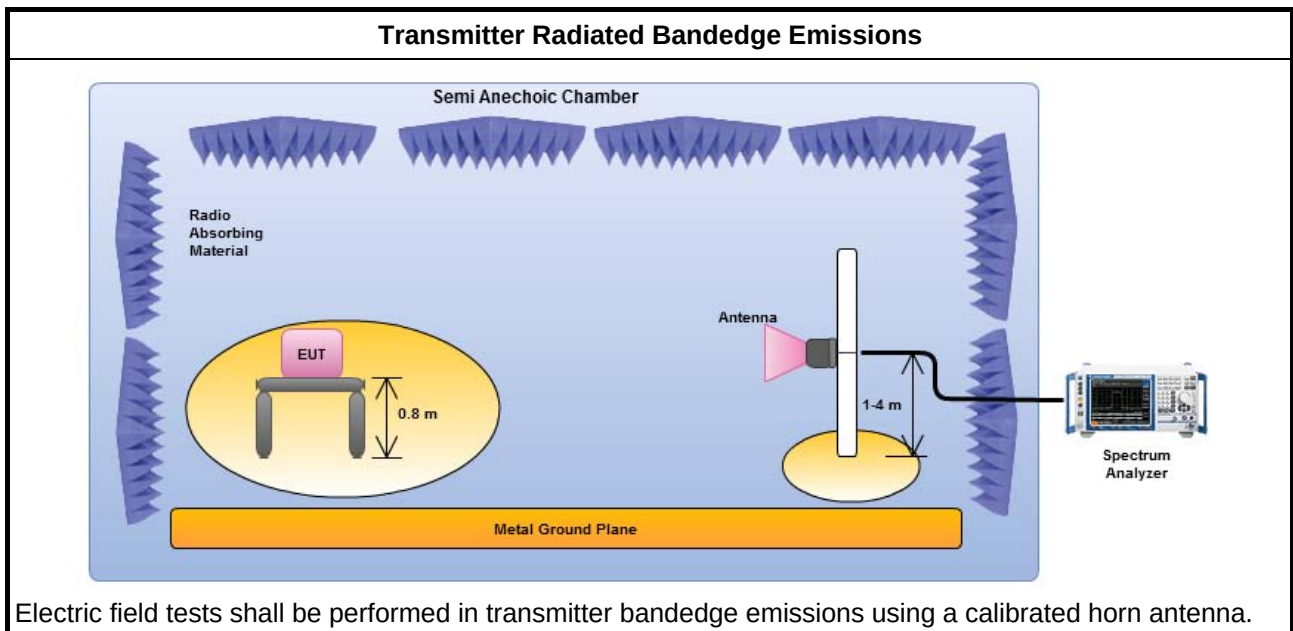






3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions Result								
Modulation	11a		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5180	123.27	5149.800	1	79.26	83.54	PK	H
4500-5150	5180	112.75	5150.000	1	62.47	63.54	AV	H
5350-5460	5240	123.32	5399.700	1	69.81	83.54	PK	H
5350-5460	5240	113.10	5399.700	1	56.57	63.54	AV	H

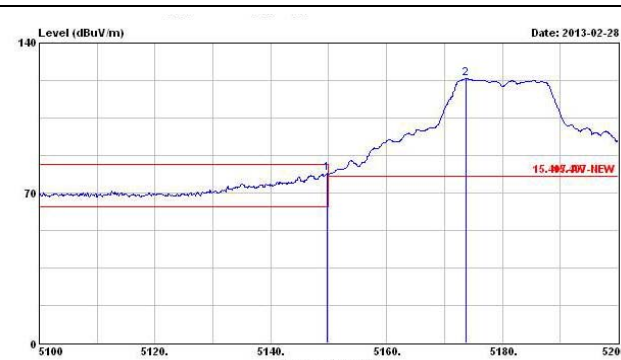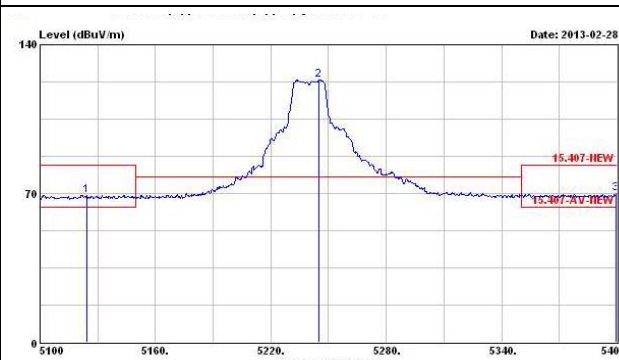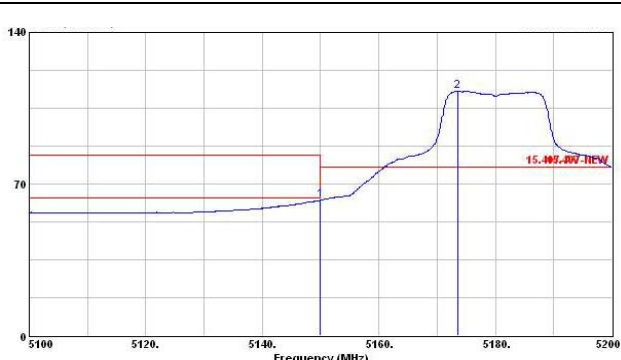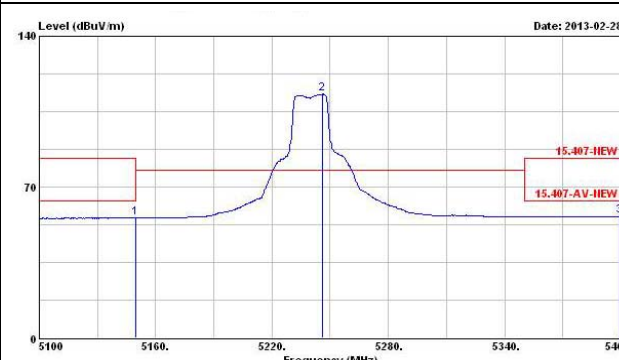5.2GHz Lower-band (Lowest Ch.)	5.2GHz Higher-band (Highest Ch.)
	
	



Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

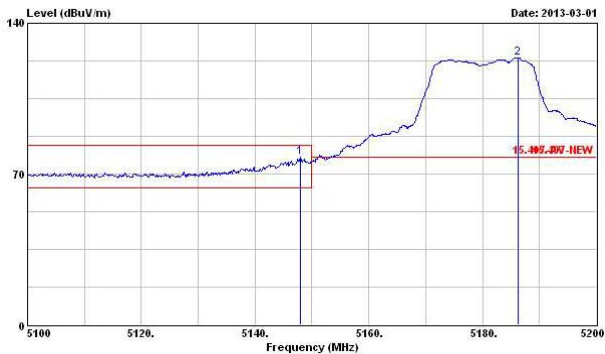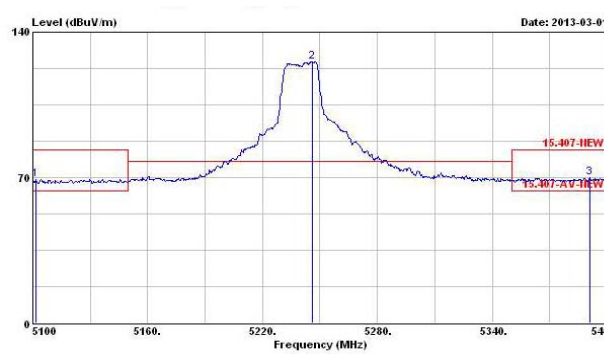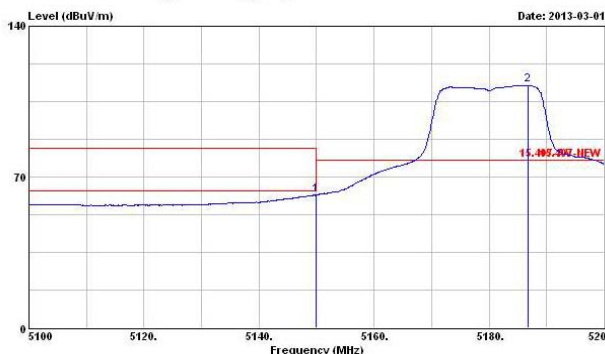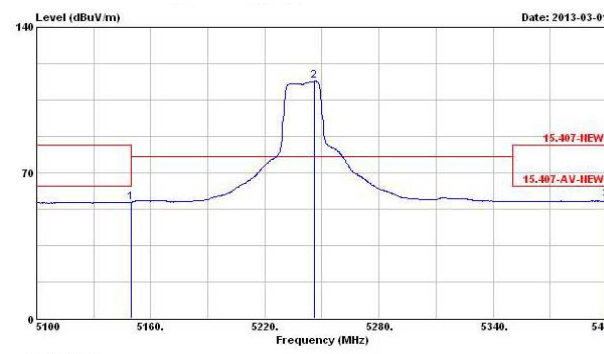Transmitter Radiated Bandedge Emissions Result								
Modulation	HT20		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5180	123.92	5147.900	1	77.64	83.54	PK	H
4500-5150	5180	112.60	5149.900	1	61.68	63.54	AV	H
5350-5460	5240	125.78	5391.000	1	69.89	83.54	PK	H
5350-5460	5240	114.18	5399.700	1	56.95	63.54	AV	H
5.2GHz Lower-band (Lowest Ch.)				5.2GHz Higher-band (Highest Ch.)				
								
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

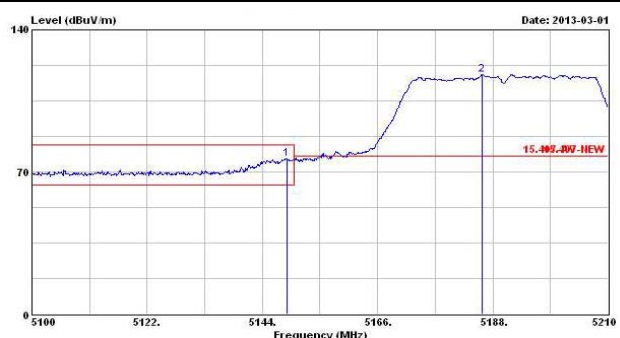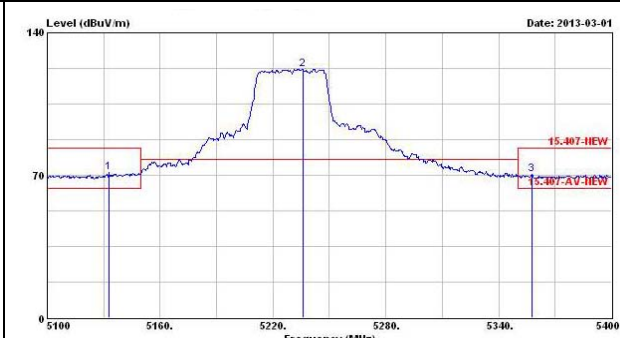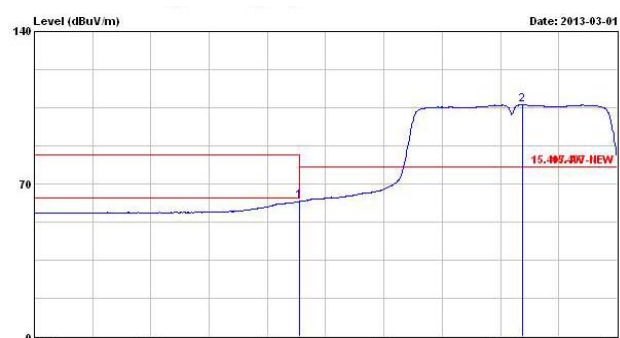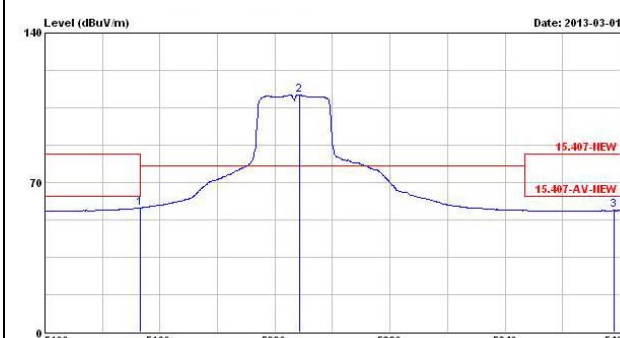Transmitter Radiated Bandedge Emissions Result								
Modulation	HT40		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5190	117.92	5148.620	1	76.40	83.54	PK	H
4500-5150	5190	106.41	5150.000	1	62.03	63.54	AV	H
5350-5460	5230	122.13	5357.700	1	70.39	83.54	PK	H
5350-5460	5230	110.96	5397.000	1	56.93	63.54	AV	H
5.2GHz Lower-band (Lowest Ch.)				5.2GHz Higher-band (Highest Ch.)				
								
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

Transmitter Radiated Bandedge Emissions Result

Modulation	VHT80		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
4500-5150	5210	116.83	5139.300	1	77.15	83.54	PK	H
4500-5150	5210	106.05	5145.000	1	61.90	63.54	AV	H
5350-5460	5210	116.83	5362.200	1	71.83	83.54	PK	H
5350-5460	5210	106.05	5350.200	1	57.04	63.54	AV	H

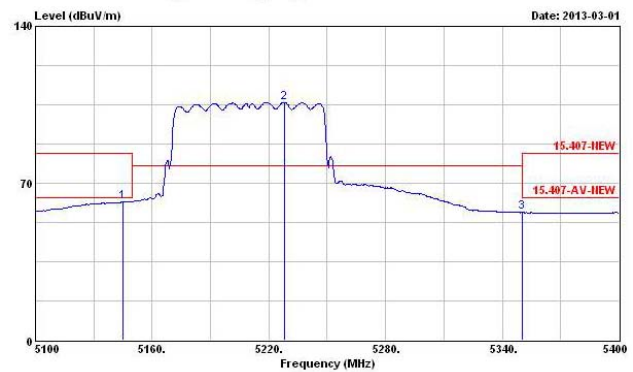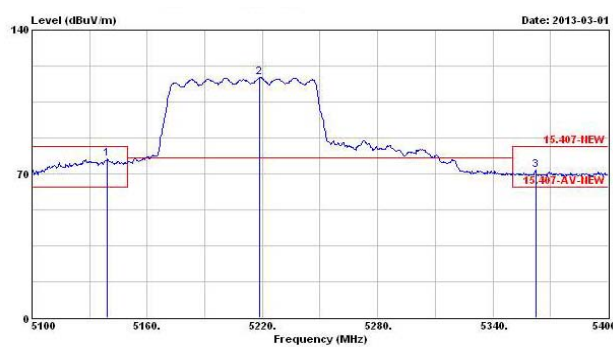5.2GHz Lower-band


Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
☒	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
☐	Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method	
☐	For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).
☐	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
☐	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB


3.7.4 Test Setup

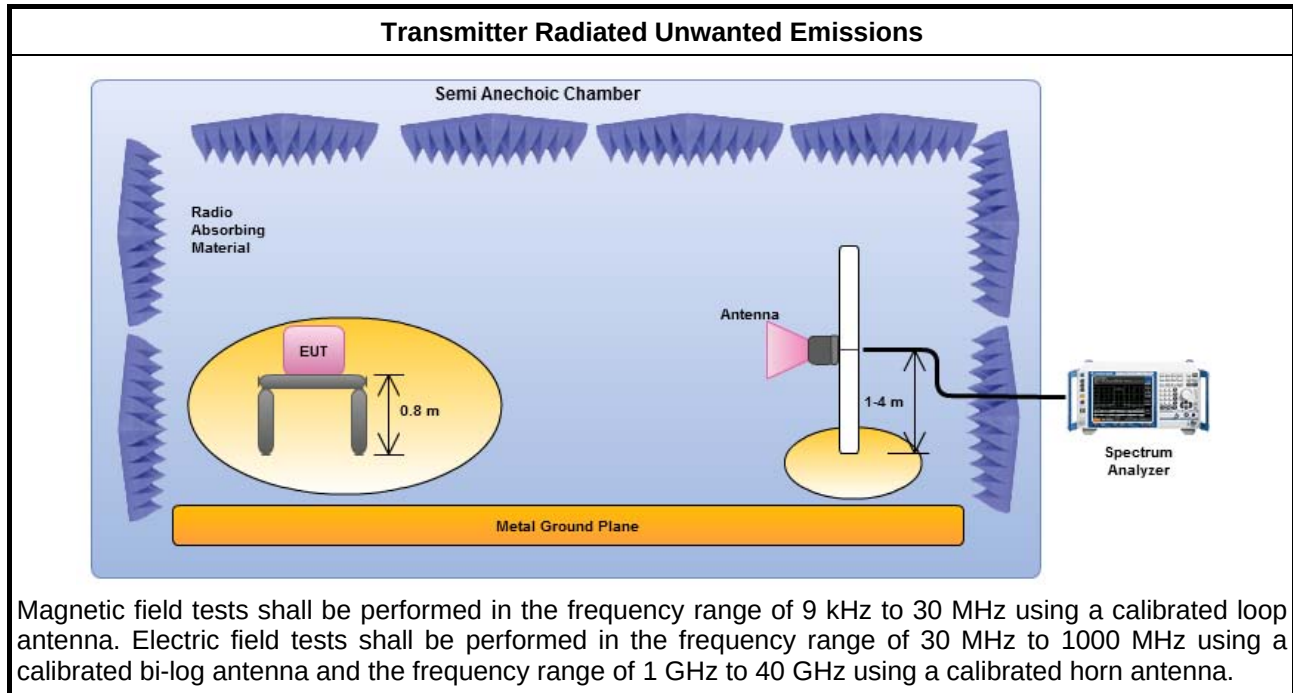

3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

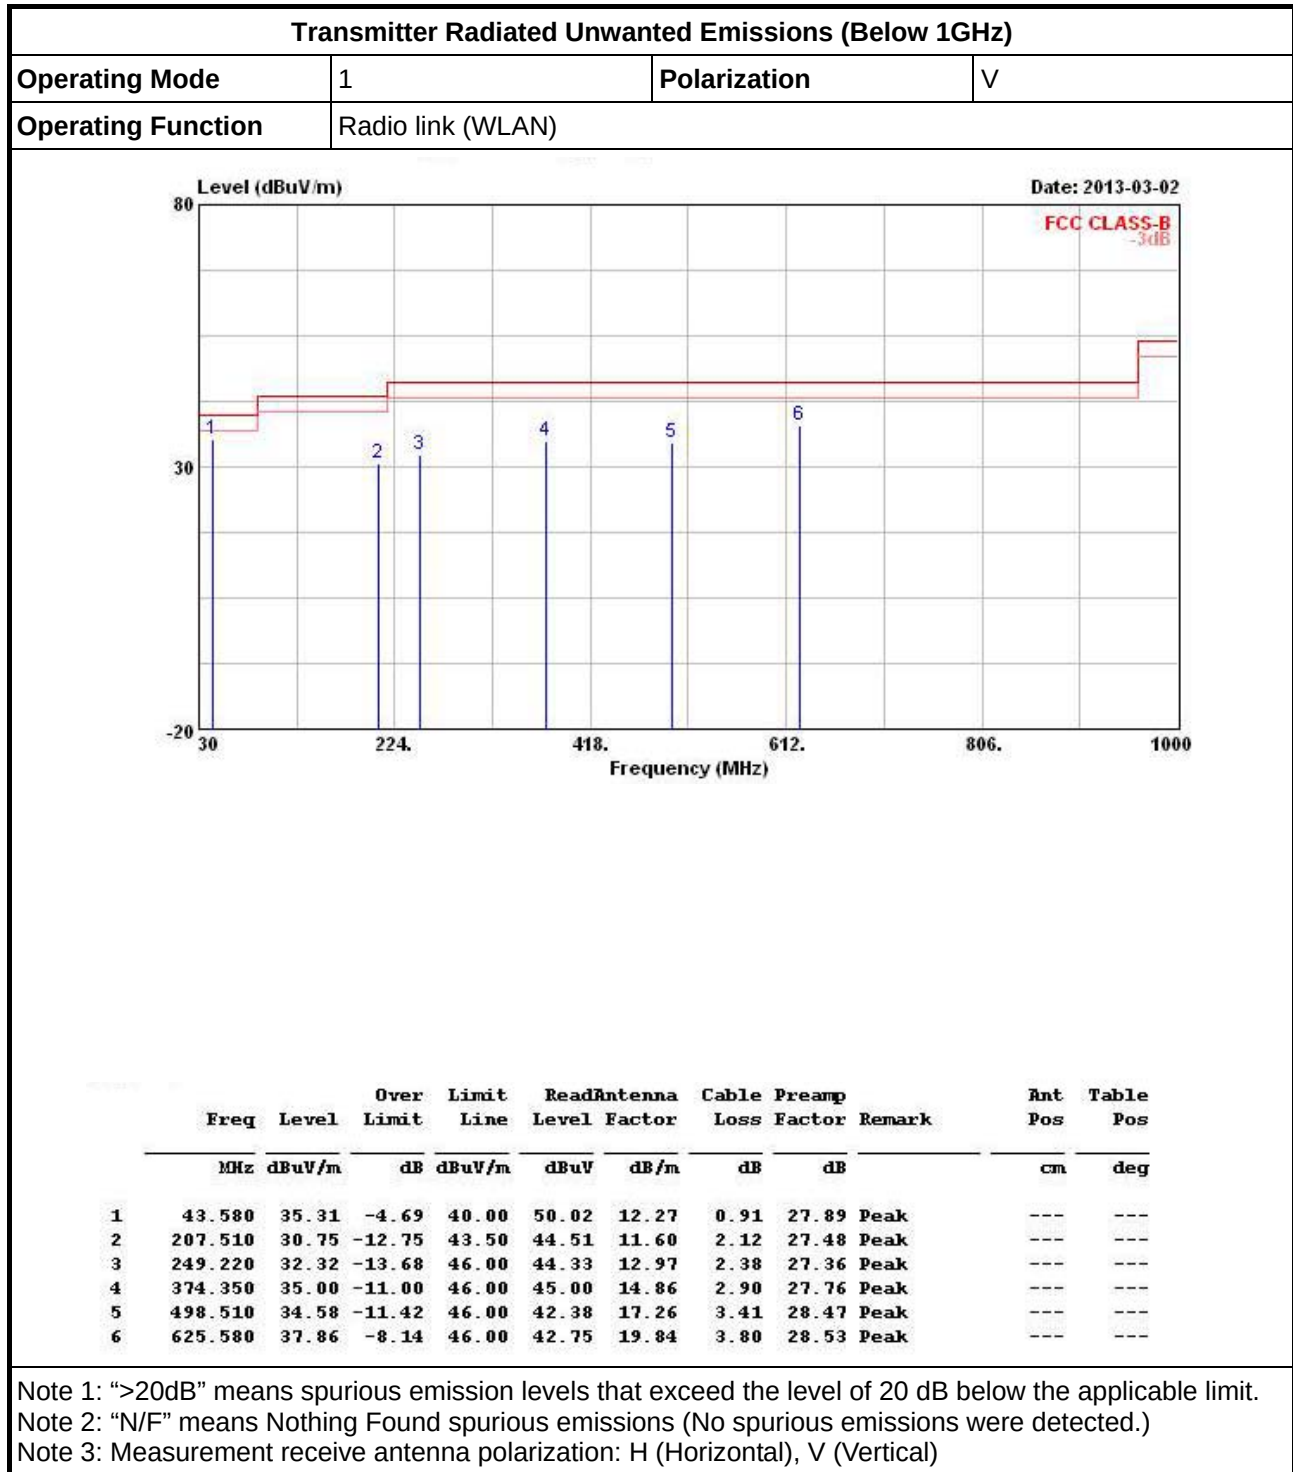

Transmitter Radiated Unwanted Emissions (Below 1GHz)


Operating Mode	1	Polarization	H
Operating Function	Radio link (WLAN)		

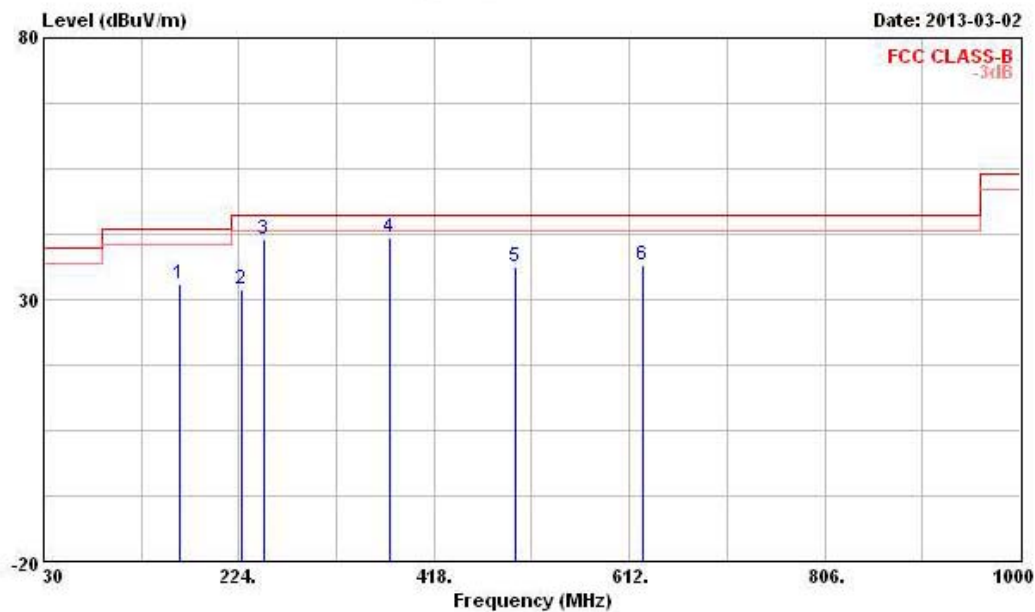

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	164.830	33.00	-10.50	43.50	48.48	10.34	1.82	27.64	Peak	---	---
2	225.940	31.94	-14.06	46.00	44.92	12.21	2.23	27.42	Peak	---	---
3	249.220	41.47	-4.53	46.00	53.48	12.97	2.38	27.36	Peak	---	---
4	374.350	41.72	-4.28	46.00	51.72	14.86	2.90	27.76	Peak	---	---
5	498.510	36.33	-9.67	46.00	44.13	17.26	3.41	28.47	Peak	---	---
6	625.580	36.72	-9.28	46.00	41.61	19.84	3.80	28.53	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

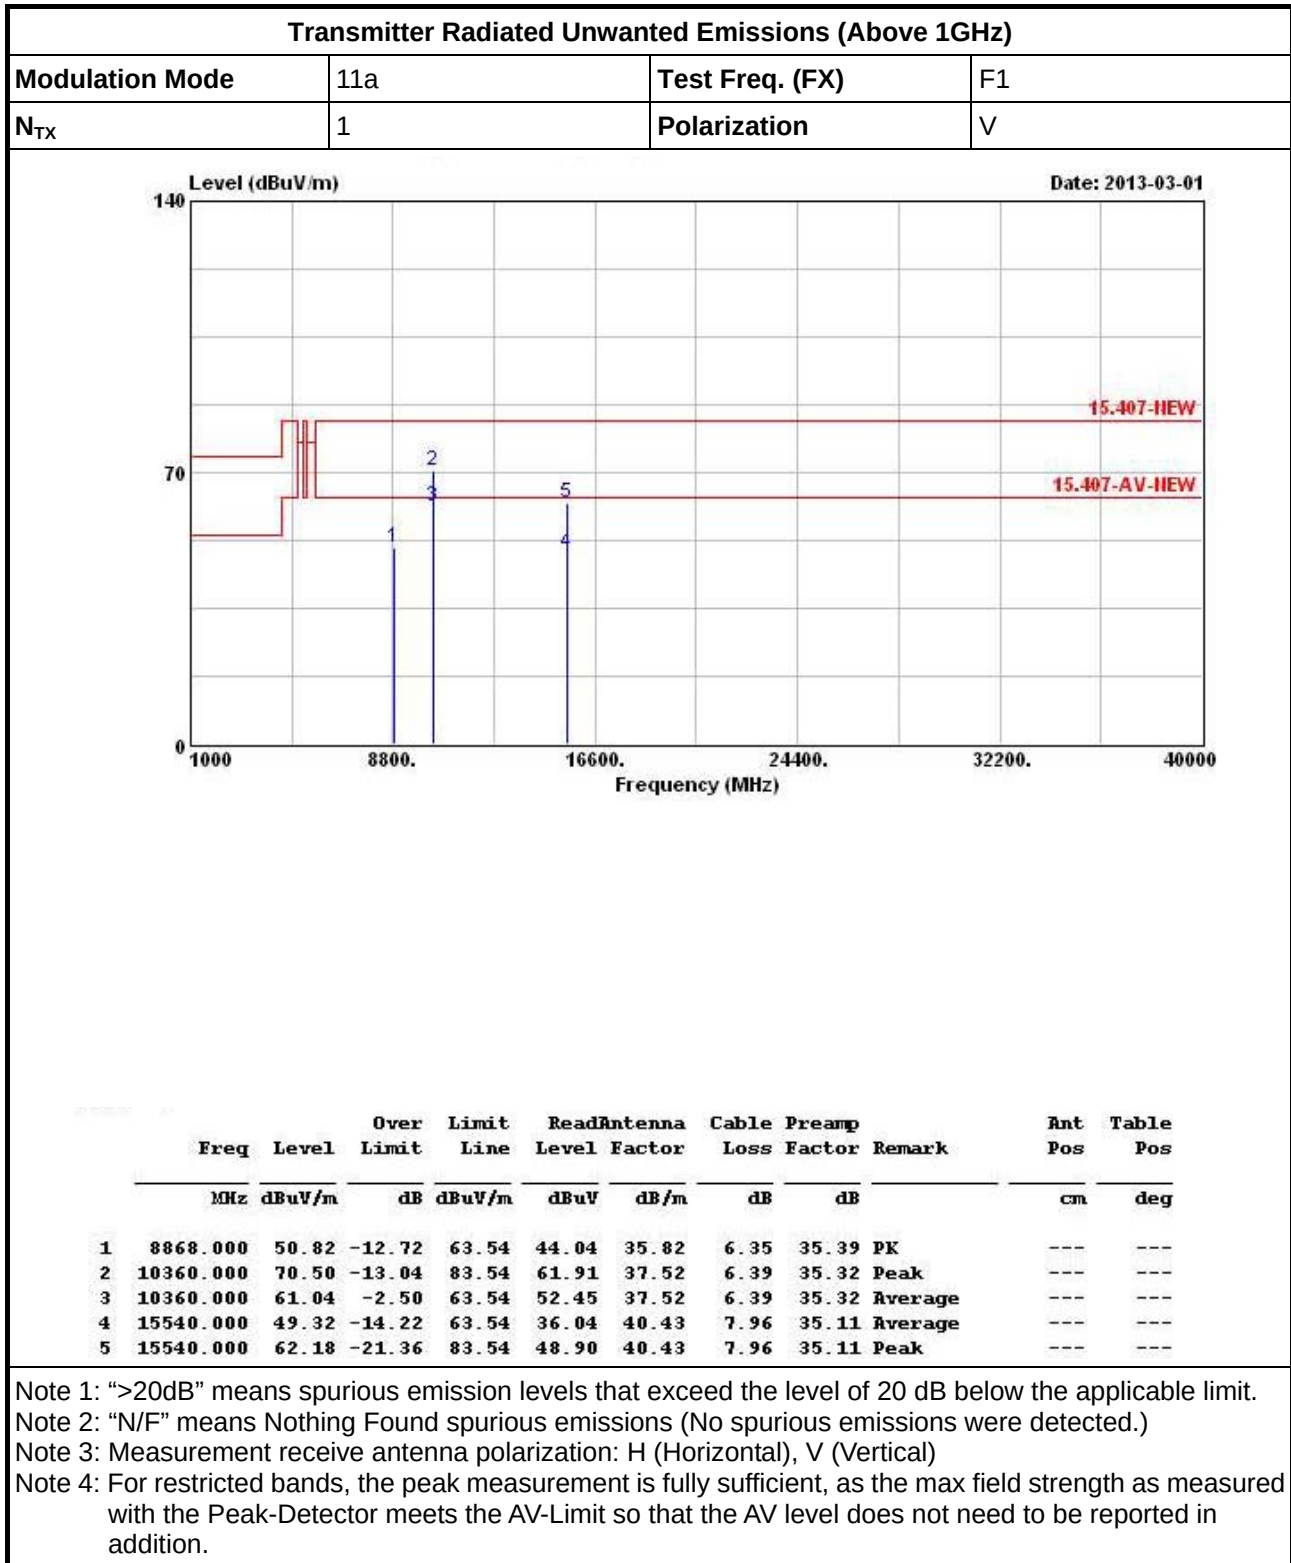

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F1
N _{TX}	1	Polarization	H

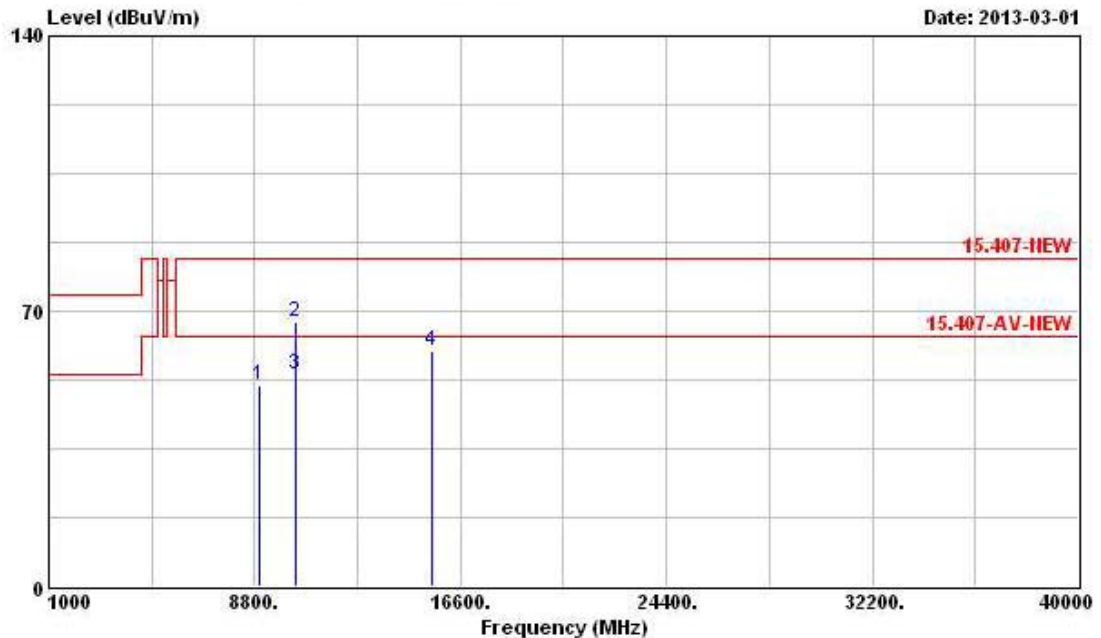


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8952.000	51.24	-12.30	63.54	44.33	35.87	6.44	35.40	PK	---	---
2	10360.000	67.07	-16.47	83.54	58.48	37.52	6.39	35.32	Peak	---	---
3	10360.000	53.83	-9.71	63.54	45.24	37.52	6.39	35.32	Average	---	---
4	15540.000	59.79	-3.75	63.54	46.51	40.43	7.96	35.11	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F2
N _{TX}	1	Polarization	V

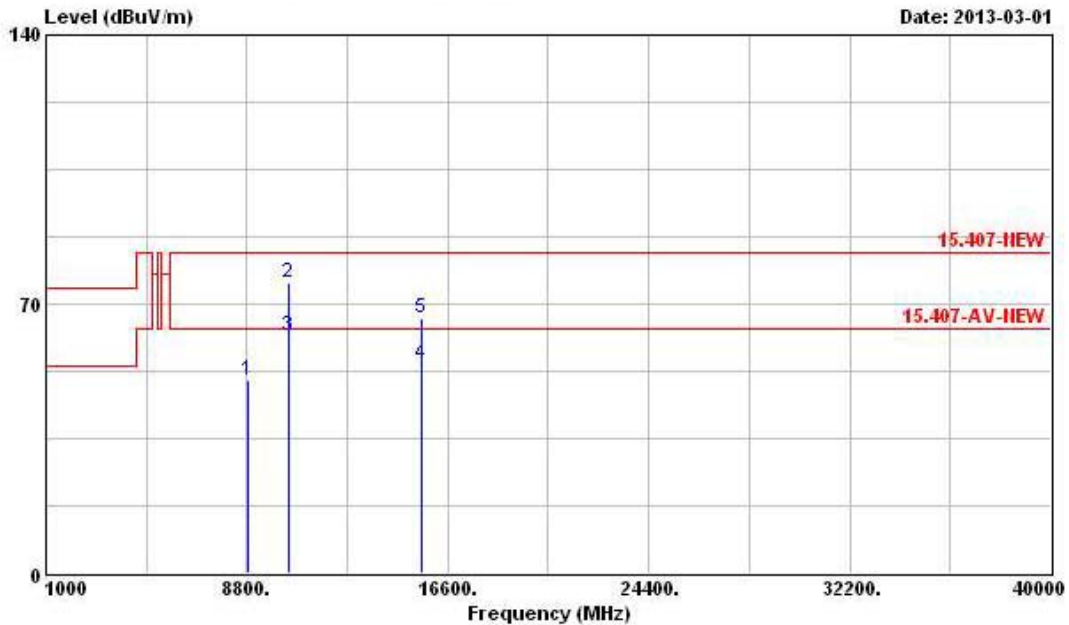


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8844.000	50.06	-13.48	63.54	43.33	35.80	6.31	35.38	PK	---	---
2	10400.000	75.48	-8.06	83.54	66.79	37.54	6.43	35.28	Peak	---	---
3	10400.000	61.88	-1.66	63.54	53.19	37.54	6.43	35.28	Average	---	---
4	15600.000	54.22	-9.32	63.54	40.90	40.50	8.00	35.18	Average	---	---
5	15600.000	66.30	-17.24	83.54	52.98	40.50	8.00	35.18	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F2
N _{TX}	1	Polarization	H

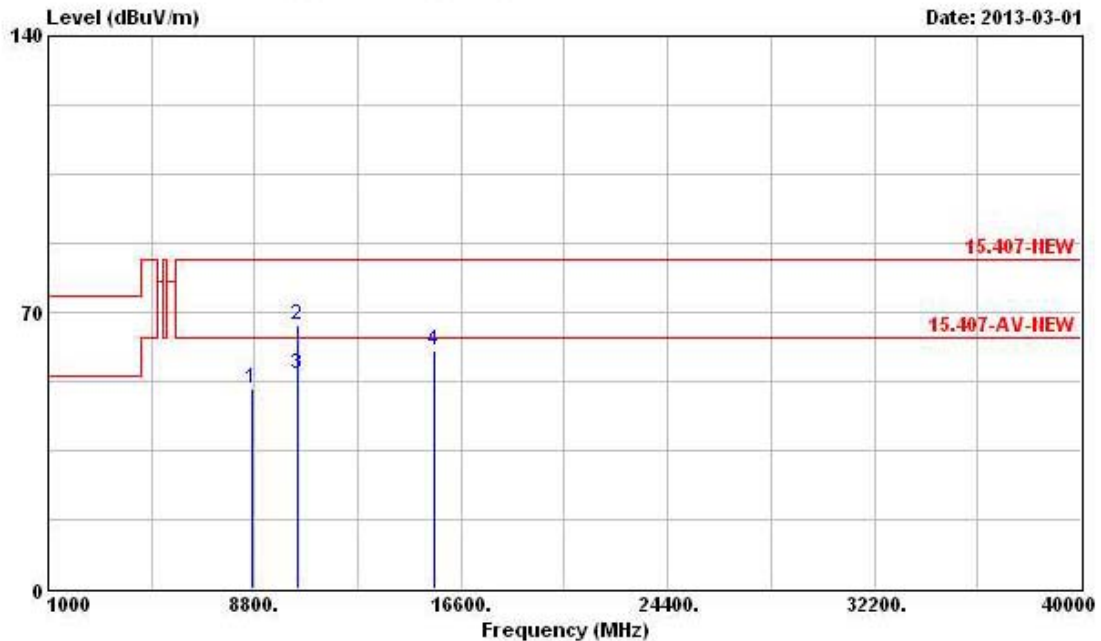


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8724.000	50.84	-12.70	63.54	44.30	35.73	6.17	35.36	PK	---
2	10400.000	66.88	-16.66	83.54	58.19	37.54	6.43	35.28	Peak	---
3	10400.000	54.50	-9.04	63.54	45.81	37.54	6.43	35.28	Average	---
4	15600.000	60.53	-3.01	63.54	47.21	40.50	8.00	35.18	PK	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F3
N _{TX}	1	Polarization	V

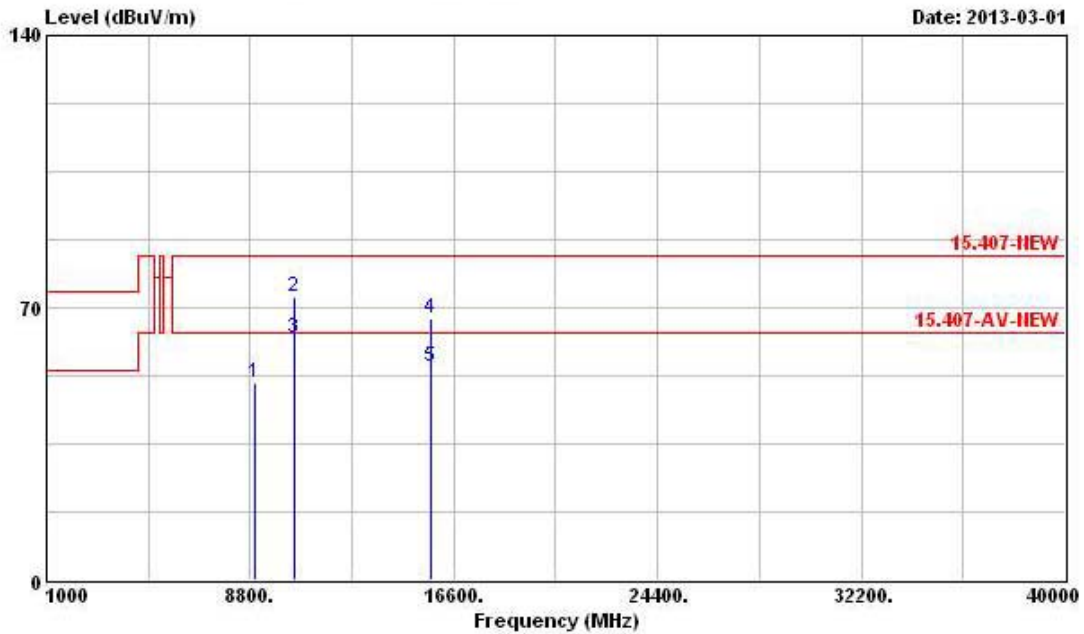


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8964.000	50.76	-12.78	63.54	43.85	35.87	6.44	35.40	PK	---	---
2	10480.000	72.81	-10.73	83.54	63.94	37.59	6.50	35.22	Peak	---	---
3	10480.000	62.21	-1.33	63.54	53.34	37.59	6.50	35.22	Average	---	---
4	15720.000	67.13	-16.41	83.54	53.68	40.62	8.11	35.28	Peak	---	---
5	15720.000	54.68	-8.86	63.54	41.23	40.62	8.11	35.28	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (FX)	F3
N _{TX}	1	Polarization	H

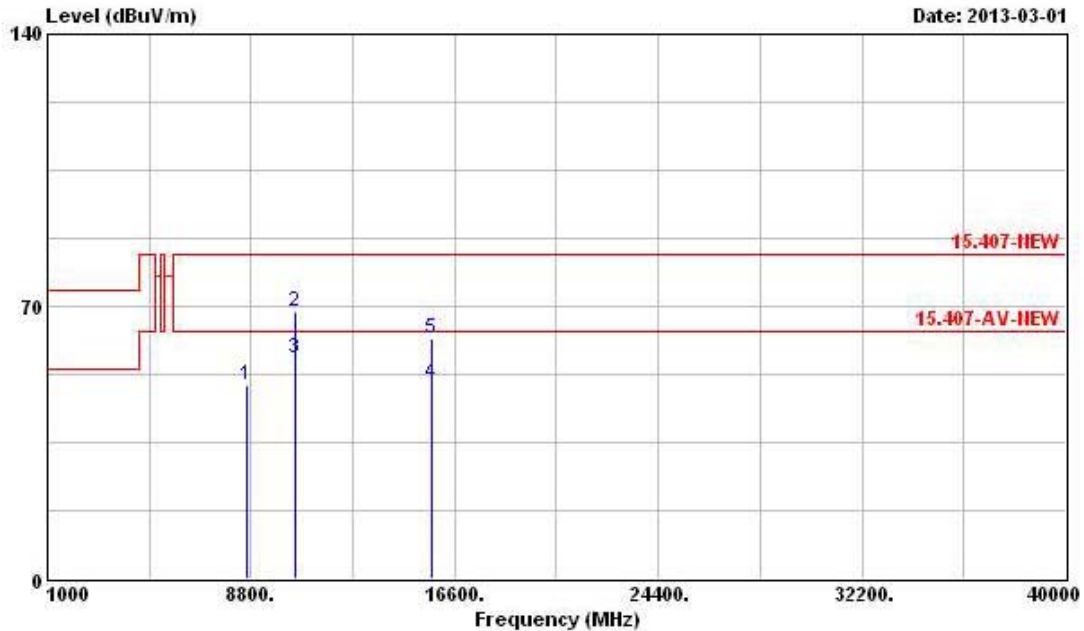

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8640.000	49.79	-13.75	63.54	43.38	35.68	6.08	35.35	PK	---	---
2	10480.000	68.62	-14.92	83.54	59.75	37.59	6.50	35.22	Peak	---	---
3	10480.000	56.50	-7.04	63.54	47.63	37.59	6.50	35.22	Average	---	---
4	15720.000	50.10	-13.44	63.54	36.65	40.62	8.11	35.28	Average	---	---
5	15720.000	61.94	-21.60	83.54	48.49	40.62	8.11	35.28	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.7.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

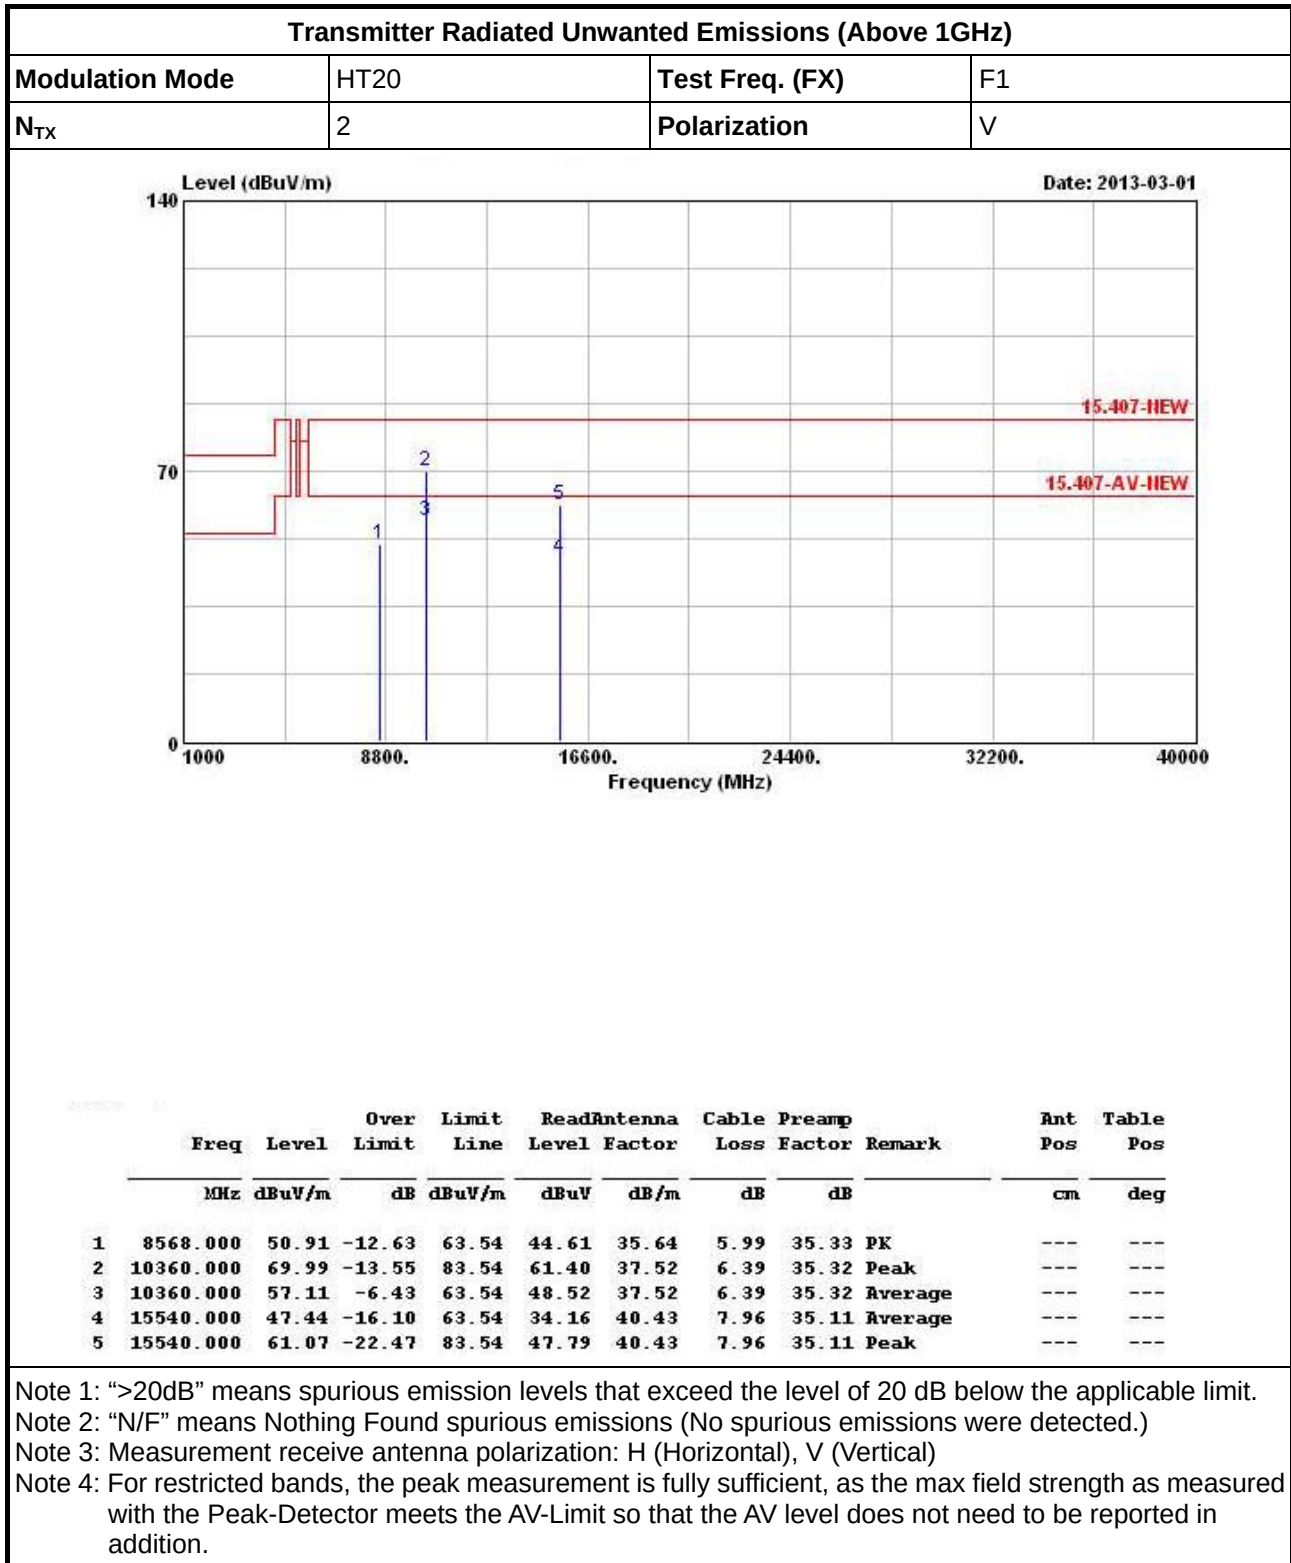

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F1
N _{TX}	2	Polarization	H

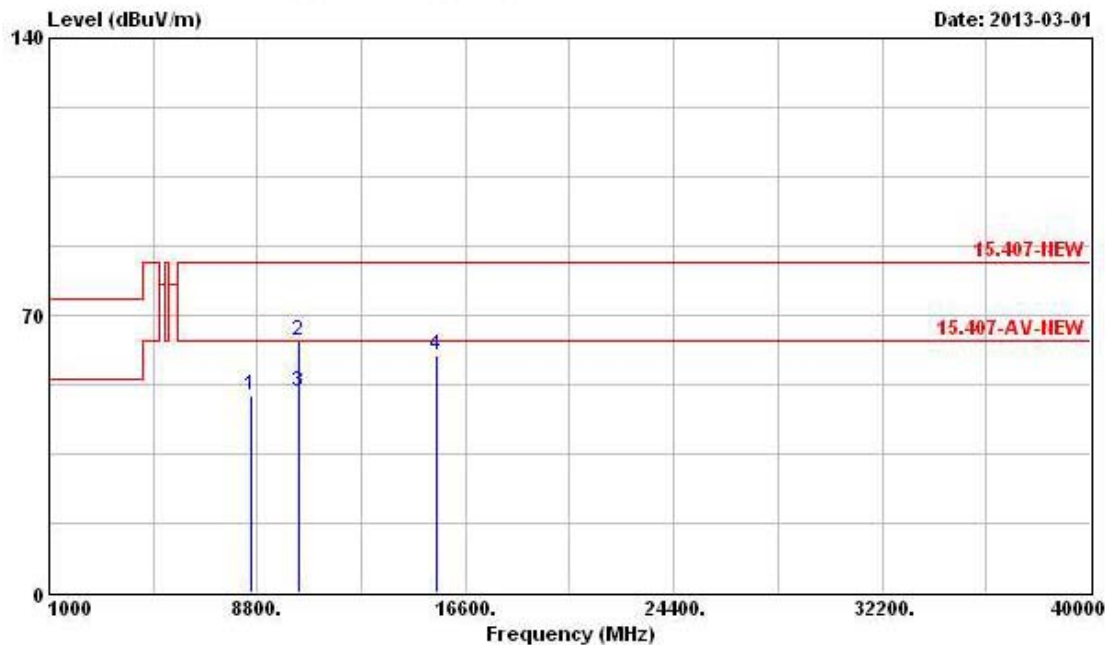


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8568.000	49.77	-13.77	63.54	43.47	35.64	5.99	35.33	PK	---	---
2	10360.000	63.58	-19.96	83.54	54.99	37.52	6.39	35.32	Peak	---	---
3	10360.000	50.79	-12.75	63.54	42.20	37.52	6.39	35.32	Average	---	---
4	15540.000	59.72	-3.82	63.54	46.44	40.43	7.96	35.11	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F2
N _{TX}	2	Polarization	V

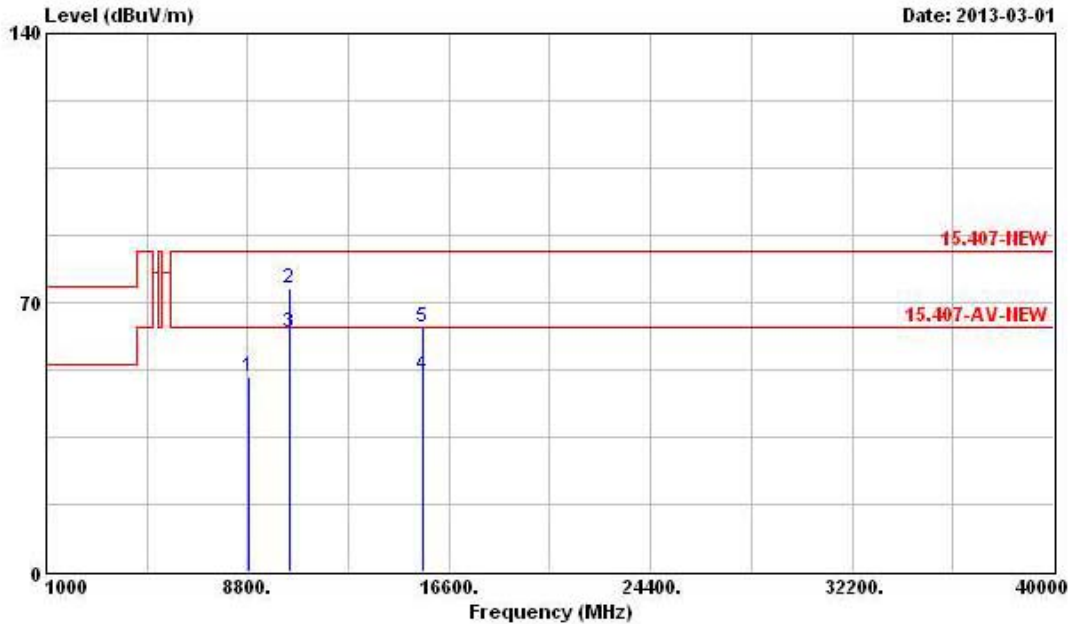


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8868.000	50.68	-12.86	63.54	43.90	35.82	6.35	35.39	PK	---	---
2	10400.000	73.69	-9.85	83.54	65.00	37.54	6.43	35.28	Peak	---	---
3	10400.000	62.12	-1.42	63.54	53.43	37.54	6.43	35.28	Average	---	---
4	15600.000	51.15	-12.39	63.54	37.83	40.50	8.00	35.18	Average	---	---
5	15600.000	63.50	-20.04	83.54	50.18	40.50	8.00	35.18	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F2
N _{TX}	2	Polarization	H

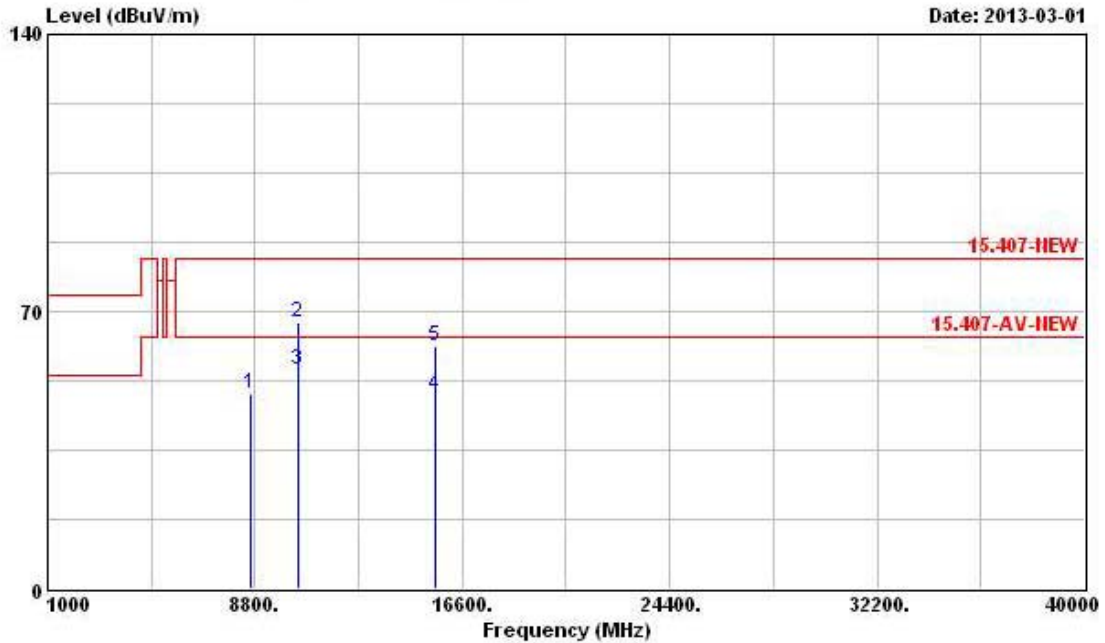


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8640.000	49.42	-14.12	63.54	43.01	35.68	6.08	35.35	PK	---	---
2	10400.000	67.31	-16.23	83.54	58.62	37.54	6.43	35.28	Peak	---	---
3	10400.000	55.16	-8.38	63.54	46.47	37.54	6.43	35.28	Average	---	---
4	15600.000	48.97	-14.57	63.54	35.65	40.50	8.00	35.18	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (FX)	F3
N _{TX}	2	Polarization	V

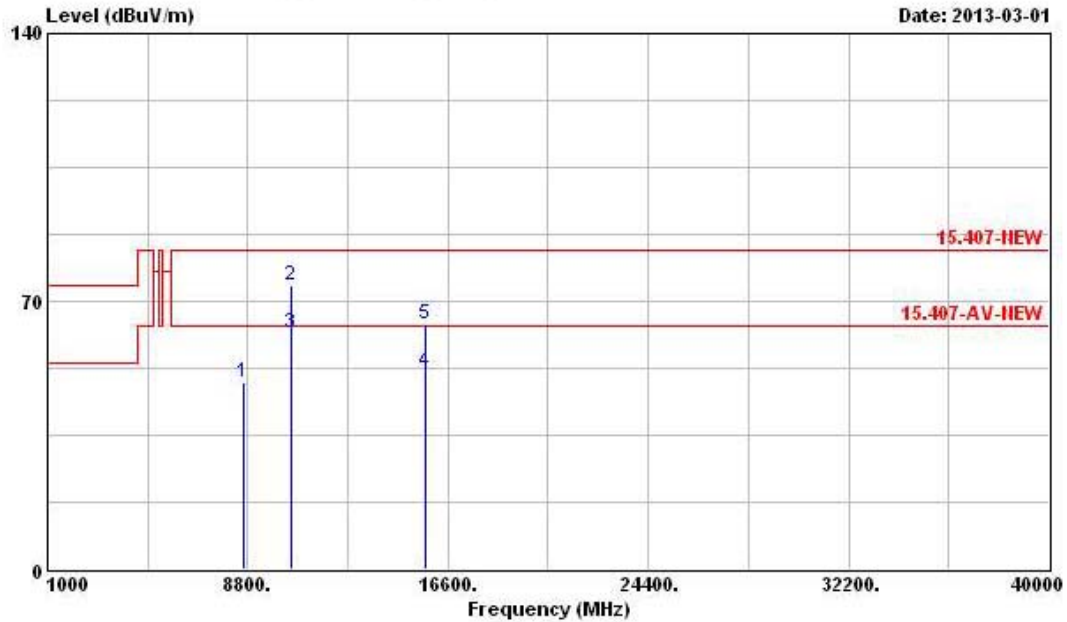


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8640.000	48.98	-14.56	63.54	42.57	35.68	6.08	35.35	PK	---	---
2	10480.000	74.33	-9.21	83.54	65.46	37.59	6.50	35.22	Peak	---	---
3	10480.000	61.90	-1.64	63.54	53.03	37.59	6.50	35.22	Average	---	---
4	15720.000	51.67	-11.87	63.54	38.22	40.62	8.11	35.28	Average	---	---
5	15720.000	64.07	-19.47	83.54	50.62	40.62	8.11	35.28	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT20	Test Freq. (FX)	F3
N _{TX}	2	Polarization	H

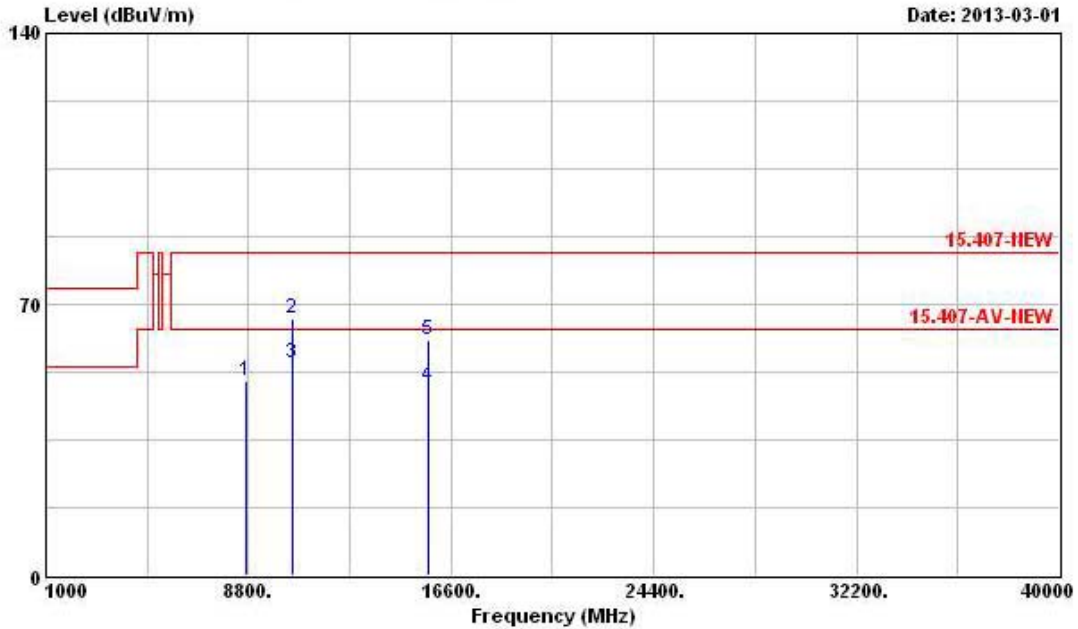

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8676.000	50.38	-13.16	63.54	43.89	35.71	6.13	35.35	PK	---	---
2	10480.000	66.47	-17.07	83.54	57.60	37.59	6.50	35.22	Peak	---	---
3	10480.000	54.61	-8.93	63.54	45.74	37.59	6.50	35.22	Average	---	---
4	15720.000	48.95	-14.59	63.54	35.50	40.62	8.11	35.28	Average	---	---
5	15720.000	60.88	-22.66	83.54	47.43	40.62	8.11	35.28	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.7.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

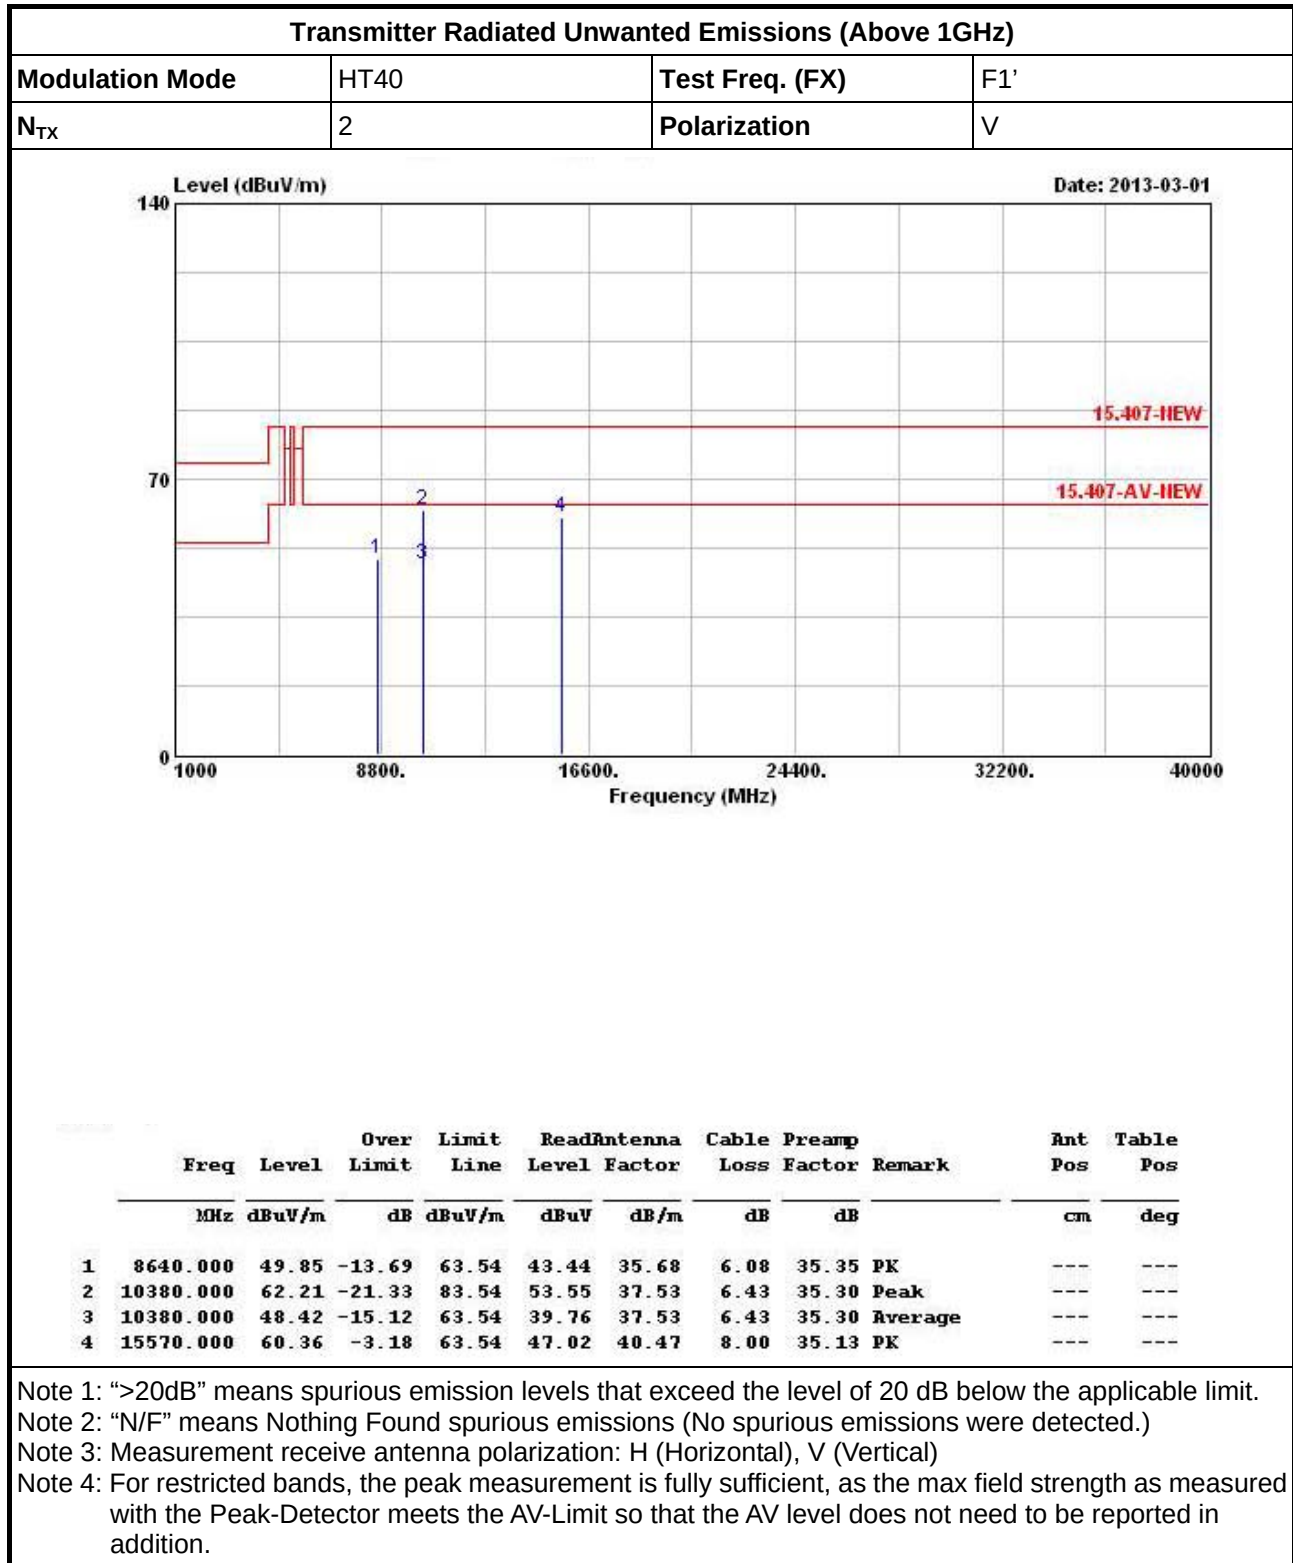

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F1'
N _{TX}	2	Polarization	H

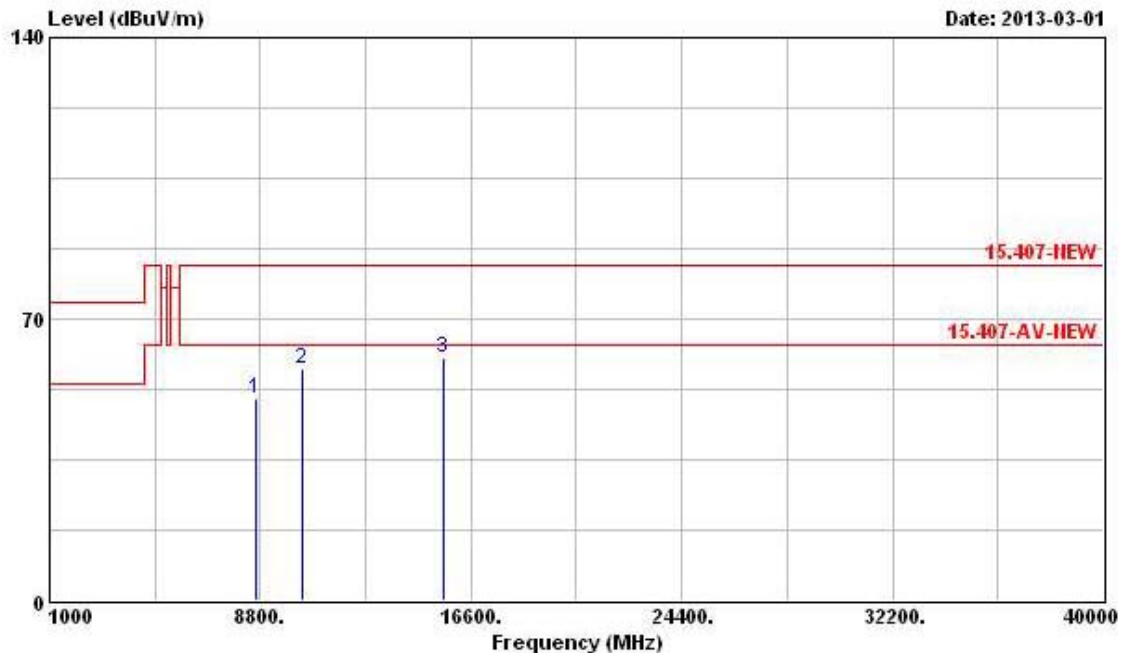

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 8640.000	50.26	-13.28	63.54	43.85	35.68	6.08	35.35	PK	---	---
2 10380.000	57.74	-5.80	63.54	49.08	37.53	6.43	35.30	PK	---	---
3 15570.000	60.15	-3.39	63.54	46.81	40.47	8.00	35.13	PK	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (FX)	F2'
N _{TX}	2	Polarization	V

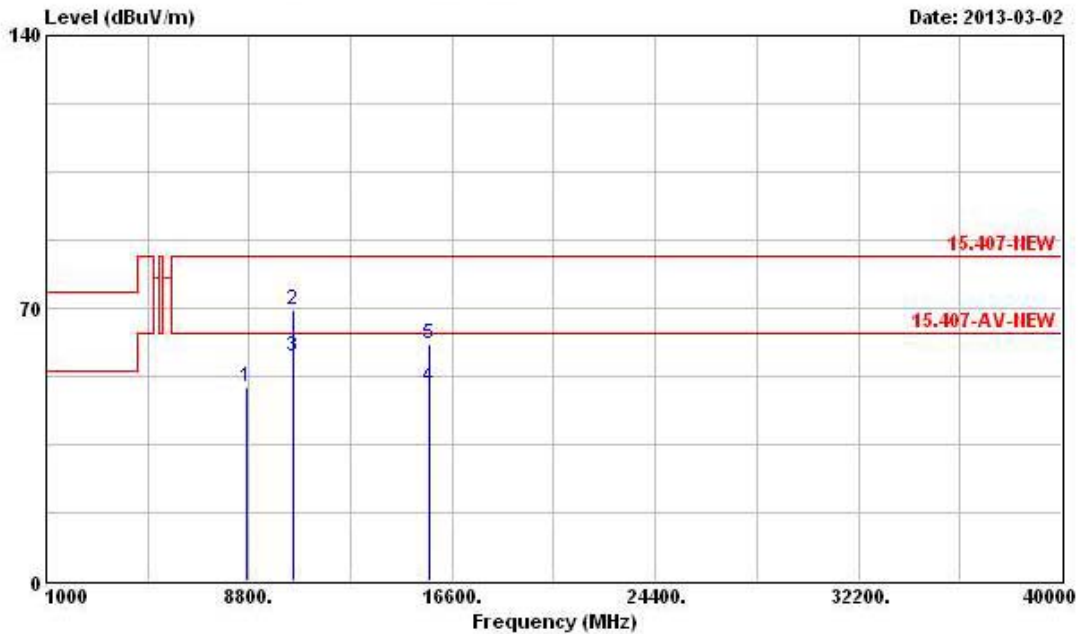


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8700.000	49.51	-14.03	63.54	43.02	35.72	6.13	35.36	PK	---	---
2	10460.000	69.42	-14.12	83.54	60.59	37.57	6.50	35.24	Peak	---	---
3	10460.000	57.41	-6.13	63.54	48.58	37.57	6.50	35.24	Average	---	---
4	15690.000	49.54	-14.00	63.54	36.10	40.59	8.11	35.26	Average	---	---
5	15690.000	60.78	-22.76	83.54	47.34	40.59	8.11	35.26	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT40	Test Freq. (FX)	F2'
N _{TX}	2	Polarization	H

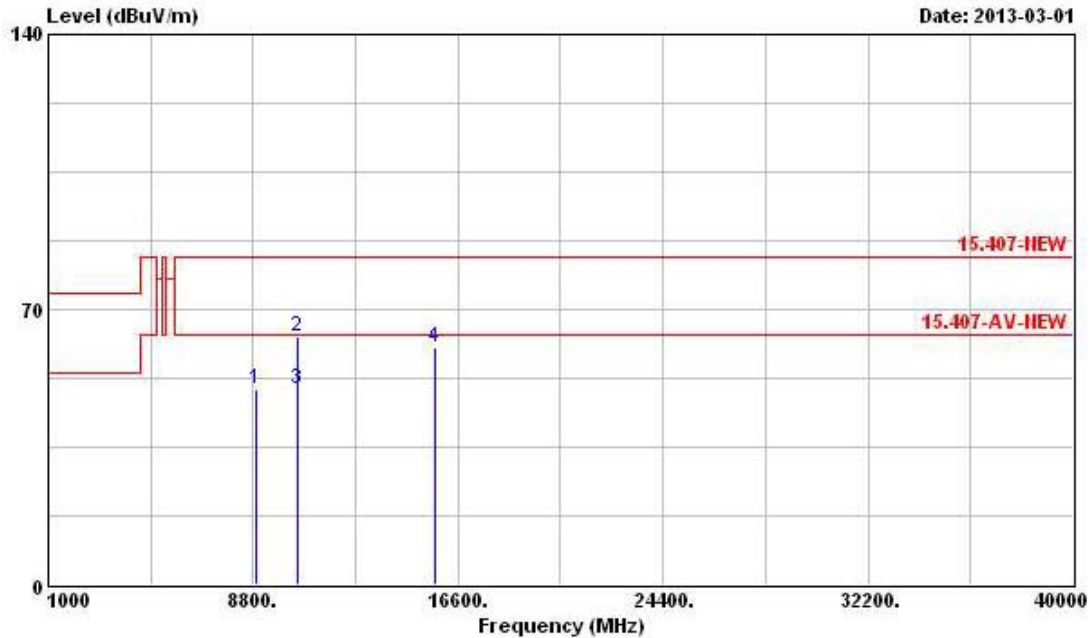

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8916.000	49.86	-13.68	63.54	43.00	35.85	6.40	35.39	PK	---	---
2	10460.000	63.10	-20.44	83.54	54.27	37.57	6.50	35.24	Peak	---	---
3	10460.000	49.81	-13.73	63.54	40.98	37.57	6.50	35.24	Average	---	---
4	15690.000	60.28	-3.26	63.54	46.84	40.59	8.11	35.26	PK	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.7.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

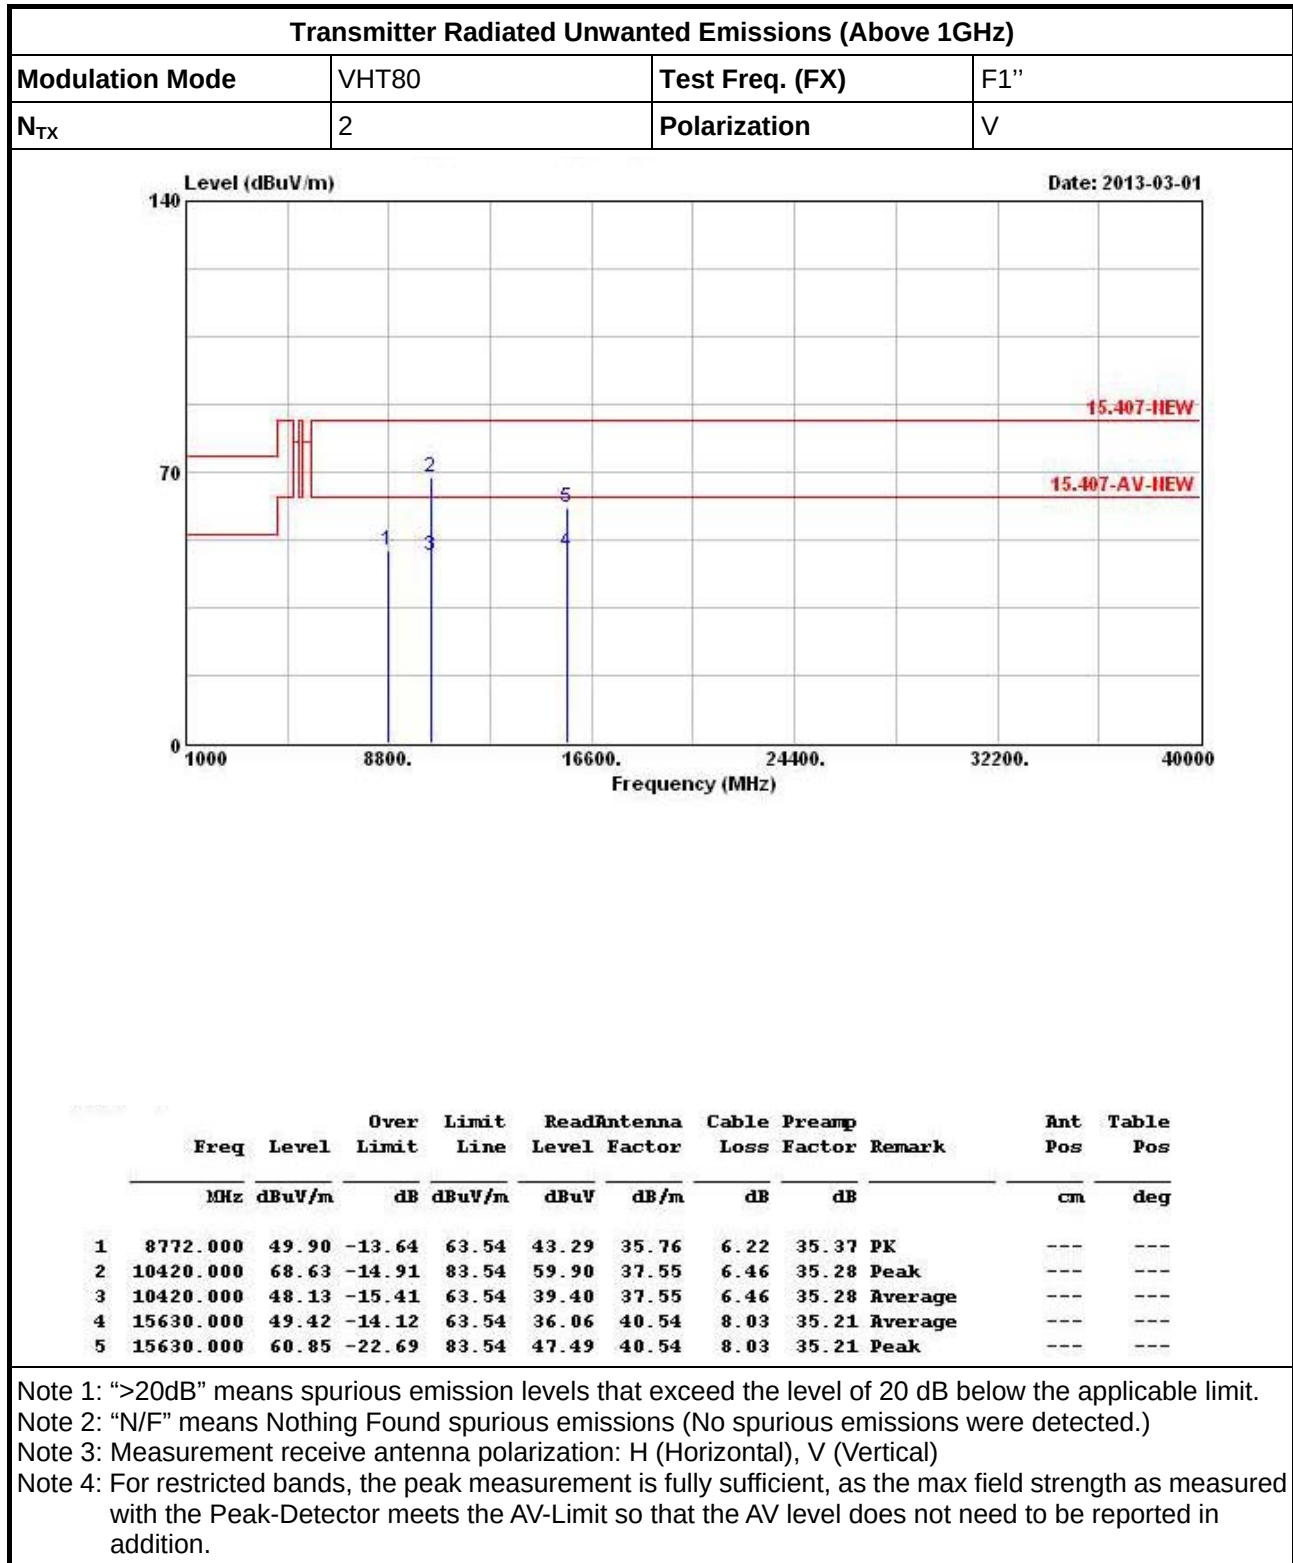

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (FX)	F1"
N _{TX}	2	Polarization	H

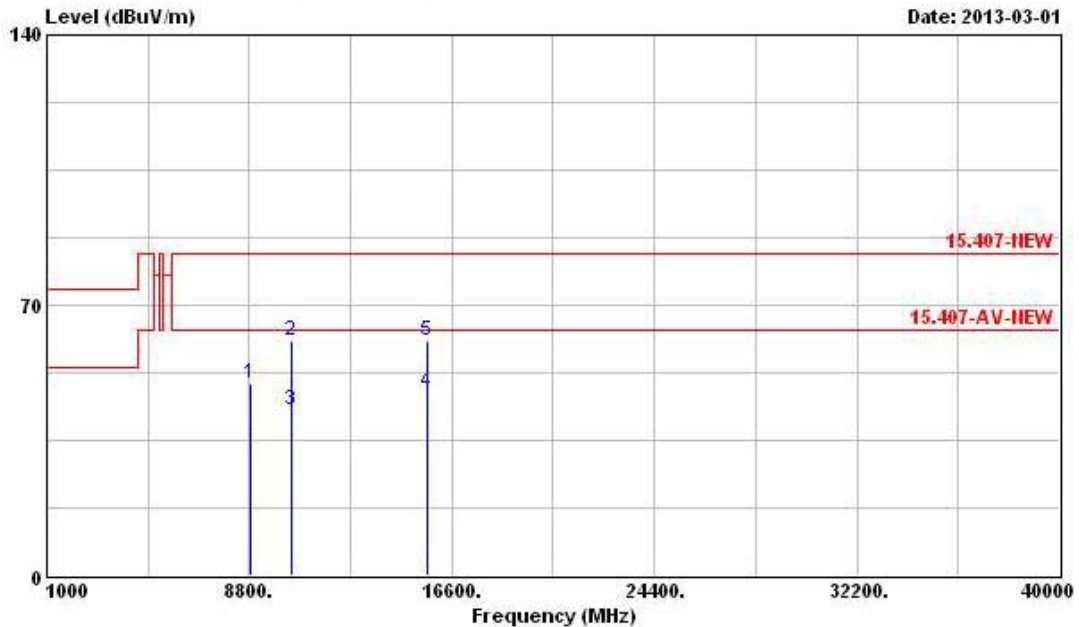

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8844.000	49.54	-14.00	63.54	42.81	35.80	6.31	35.38	PK	---	---
2	10420.000	60.94	-22.60	83.54	52.21	37.55	6.46	35.28	Peak	---	---
3	10420.000	42.97	-20.57	63.54	34.24	37.55	6.46	35.28	Average	---	---
4	15630.000	47.46	-16.08	63.54	34.10	40.54	8.03	35.21	Average	---	---
5	15630.000	60.67	-22.87	83.54	47.31	40.54	8.03	35.21	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.8 Frequency Stability

3.8.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
☒	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices	
☒	N/A
IEEE Std. 802.11n-2009	
☒	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.8.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.8.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
☒	Frequency stability with respect to ambient temperature
☒	Frequency stability when varying supply voltage
☒	For conducted measurement.
☒	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
☐	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.8.4 Test Setup

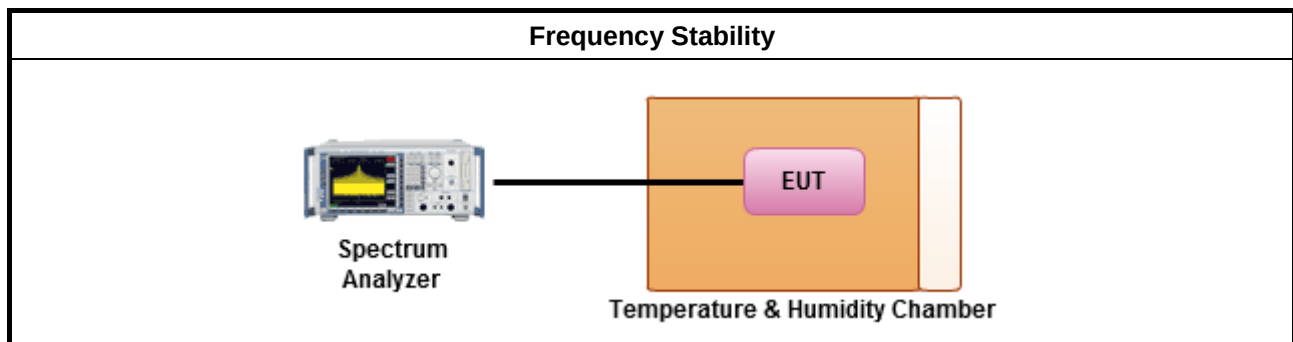

3.8.5 Test Result of Frequency Stability

Frequency Stability Result						
Mode		Frequency Stability (ppm)				
Condition	Freq. (MHz)	0 min	2 min	5 min	10 min	Limit
T _{20°C} Vmax	5180	2.32	2.32	2.20	2.20	20.0
T _{20°C} Vmin	5180	2.32	2.32	2.20	2.20	20.0
T _{50°C} Vnom	5180	7.76	7.76	7.99	7.99	20.0
T _{40°C} Vnom	5180	3.94	3.94	4.05	4.05	20.0
T _{30°C} Vnom	5180	2.20	2.20	2.32	2.32	20.0
T _{20°C} Vnom	5180	2.32	2.32	2.20	2.20	20.0
T _{10°C} Vnom	5180	3.36	3.36	3.24	3.24	20.0
T _{0°C} Vnom	5180	5.10	5.10	4.98	4.98	20.0
T _{-10°C} Vnom	5180	6.95	6.95	6.83	6.83	20.0
T _{-20°C} Vnom	5180	8.22	8.22	8.11	8.11	20.0
Result		Complied				
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].						
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.						

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023/030	9KHz ~ 30GHz	Apr. 27, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP- SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.