

Appendix C - Highest Measurement Plots

Test Laboratory: A Test Lab Techno Corp.
Date: 2022/7/27

01_WLAN 2.4 GHz_802.11b_Ch1_Horizontal-UP_5 mm

DUT: EW-7811UL


Communication System: UID 0, IEEE 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.016
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 39.824$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(8.13, 8.13, 8.13) @ 2412 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.10 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.29 W/kg
SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.543 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 50.2%
Maximum value of SAR (measured) = 1.83 W/kg

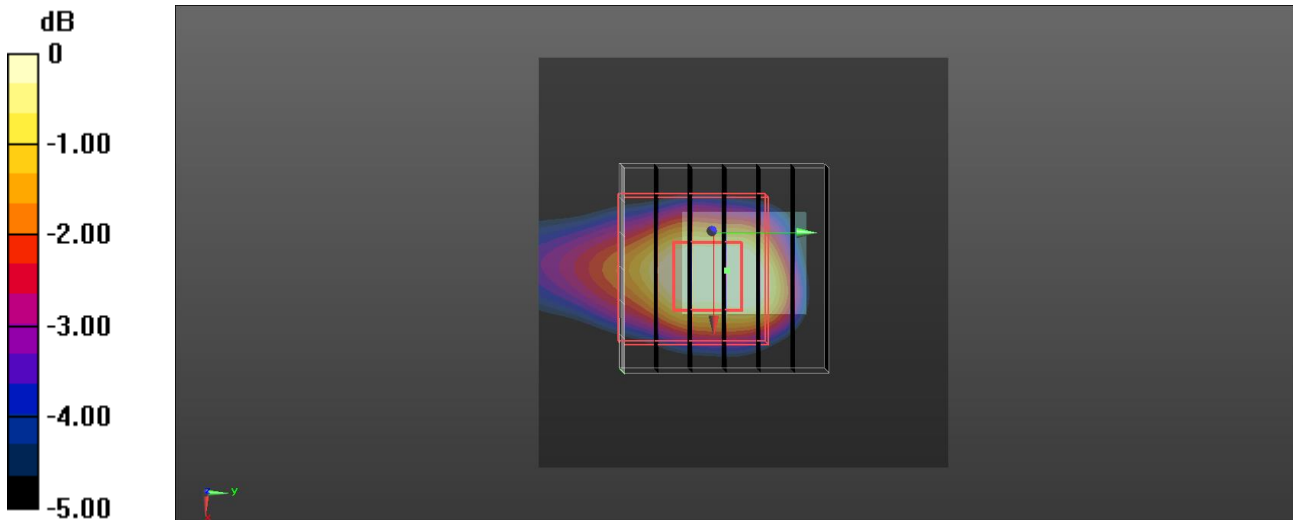

0 dB = 1.83 W/kg = 2.62 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
Date: 2022/7/27

02_WLAN 5 GHz_802.11ac VHT80_Ch42_Tip_5 mm

DUT: EW-7811UL


Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5210 MHz;Duty Cycle: 1:1.156
Medium parameters used: $f = 5210$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 36.452$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.74, 5.74, 5.74) @ 5210 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.192 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 4.859 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.554 W/kg
SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.027 W/kg
Smallest distance from peaks to all points 3 dB below = 4.2 mm
Ratio of SAR at M2 to SAR at M1 = 55.1%
Maximum value of SAR (measured) = 0.324 W/kg

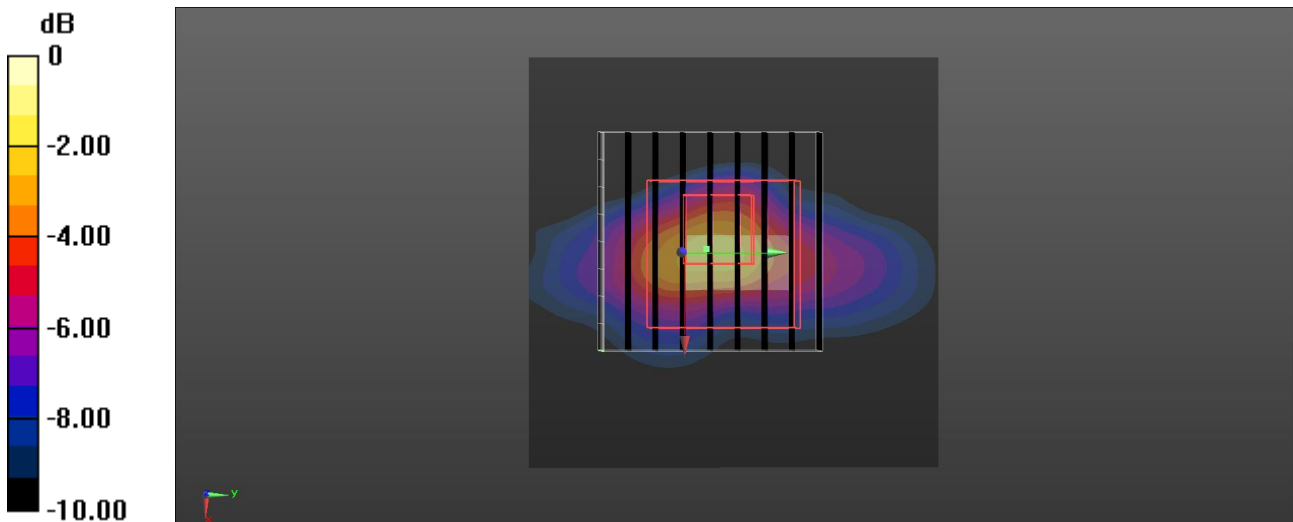

0 dB = 0.324 W/kg = -4.89 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
Date: 2022/7/27

03_WLAN 5 GHz_802.11ac VHT80_Ch155_Tip_5 mm

DUT: EW-7811UL


Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1.156
Medium parameters used: $f = 5775$ MHz; $\sigma = 5.217$ S/m; $\epsilon_r = 35.342$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7647; ConvF(5.25, 5.25, 5.25) @ 5775 MHz; Calibrated: 2022/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1253; Calibrated: 2021/12/30
- Phantom: ELI; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.971 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.801 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 2.16 W/kg
SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.062 W/kg
Smallest distance from peaks to all points 3 dB below = 4.3 mm
Ratio of SAR at M2 to SAR at M1 = 55.8%
Maximum value of SAR (measured) = 1.10 W/kg

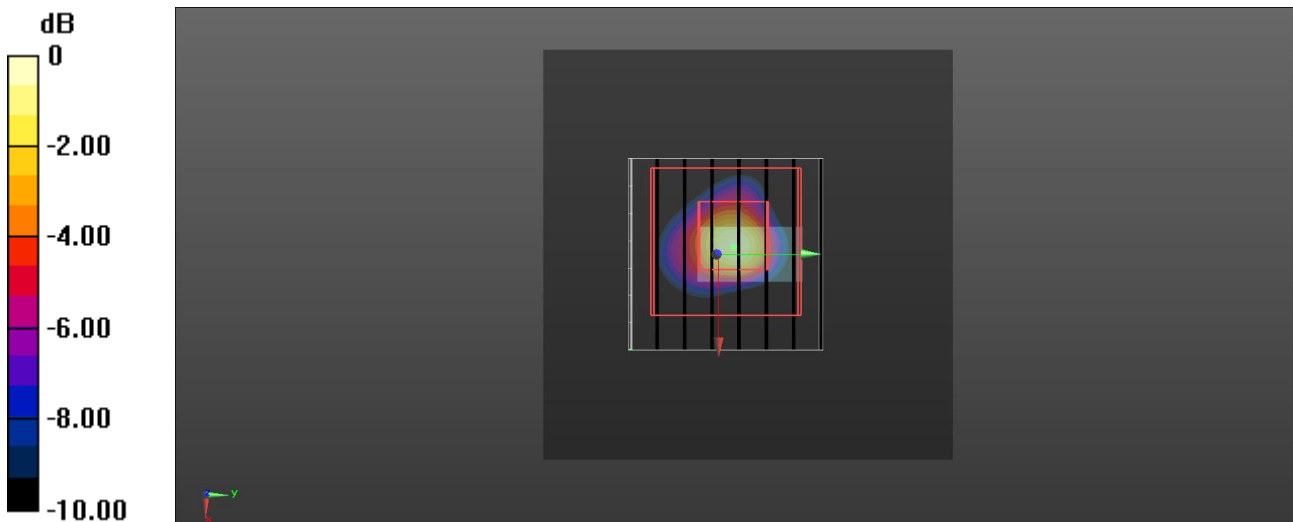

0 dB = 1.10 W/kg = 0.41 dBW/kg