

FCC ID: NDXISOMAXIV



## EMI -- TEST REPORT

<b>Test Report No. :</b> T25258-00-00AA	22. October 2004 Date of issue
---	-----------------------------------

Type / Model : ISOMAX IV

Model Description : Portable Reader

**Applicant** : Datamars SA

Address : Via ai prati  
CH-6930 Bedano-Lugano, Switzerland

**Manufacturer** : Datamars SA

Address : Via ai prati  
CH-6930 Bedano-Lugano, Switzerland

**Licence holder** : Datamars SA

Address : Via ai prati  
CH-6930 Bedano-Lugano, Switzerland

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

File No. T25258-00-00AA, page 1 of 22

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b><u>3</u></b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b><u>4</u></b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b><u>5</u></b>
3.1	PHOTO DOCUMENTATION OF THE EUT	5
3.2	POWER SUPPLY SYSTEM UTILISED	11
3.3	SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	11
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b><u>12</u></b>
4.1	ADDRESS OF THE TEST LABORATORY	12
4.2	ENVIRONMENTAL CONDITIONS	12
4.3	STATEMENT OF THE MEASUREMENT UNCERTAINTY	12
4.4	MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	12
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b><u>14</u></b>
5.1	CONDUCTED EMISSIONS	14
5.2	FIELD STRENGTH OF THE FUNDAMENTAL WAVE	15
5.3	SPURIOUS EMISSIONS (MAGNETIC FIELD) 9 KHz – 30 MHz	17
5.4	RADIATED EMISSIONS (ELECTRIC FIELD) 30 MHz – 1 GHz	19
5.5	EMISSION BANDWIDTH	21
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b><u>22</u></b>

## 1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C- Intentional Radiators (October 01, 2003)

Part 15, Subpart C, Section **15.209(a)**                      Radiated emissions, general requirements



## 2 SUMMARY

### GENERAL REMARKS:

None

### FINAL ASSESSMENT:


The equipment under test **fulfills** the EMC requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records of MBPS

Testing commenced on : 07. October 2004


Testing concluded on : 18. October 2004

Checked by:

A handwritten signature in blue ink, appearing to read "Günter Mikes", written over a light blue rectangular background.

Günter Mikes  
Dipl. Ing.(FH)

Tested by:

A handwritten signature in blue ink, appearing to read "Anton Altmann", written over a light blue rectangular background.

Anton Altmann  
Dipl. Ing.(FH)

### **3 EQUIPMENT UNDER TEST**

#### **3.1 Photo documentation of the EuT**



FCC ID: NDXISOMAXIV



File No. **T25258-00-00AA**, page **6** of **22**


**FCC ID: NDXISOMAXIV**



File No. **T25258-00-00AA**, page 7 of 22



FCC ID: NDXISOMAXIV

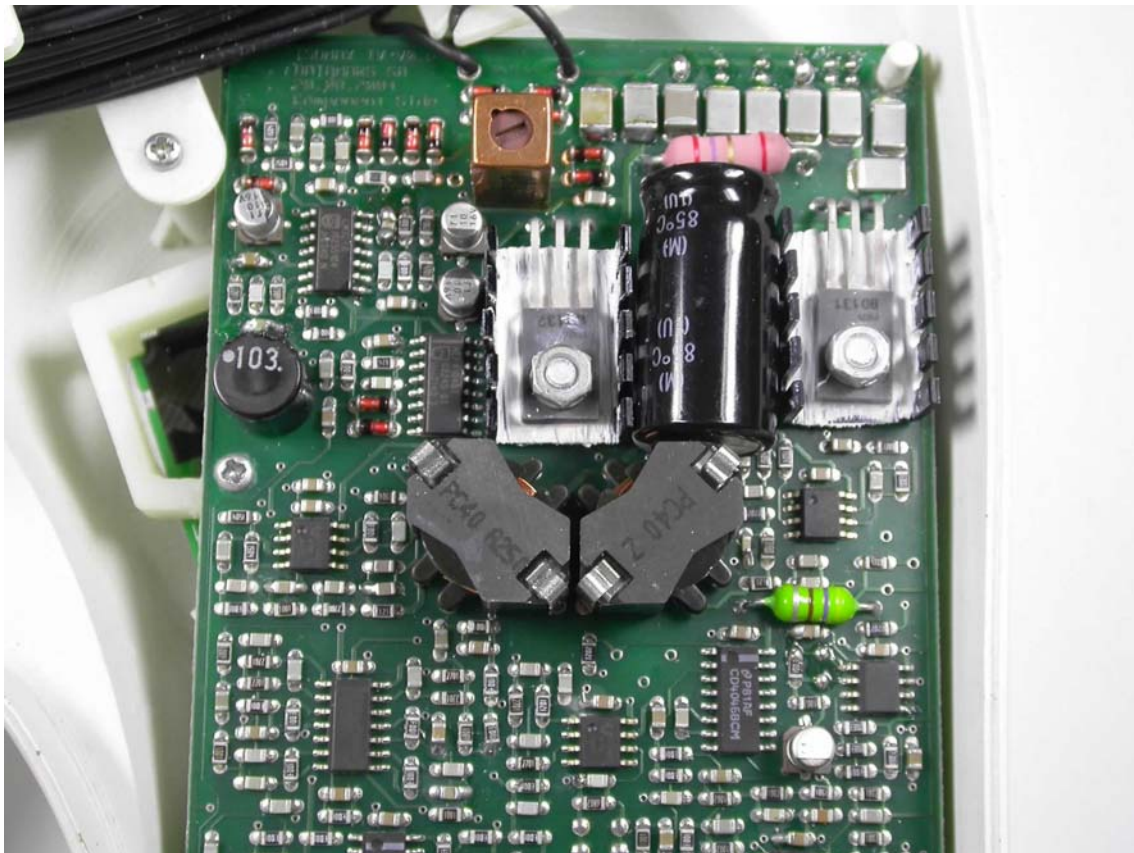

File No. **T25258-00-00AA**, page **8** of **22**




**FCC ID: NDXISOMAXIV**



File No. **T25258-00-00AA**, page **9** of **22**

FCC ID: NDXISOMAXIV

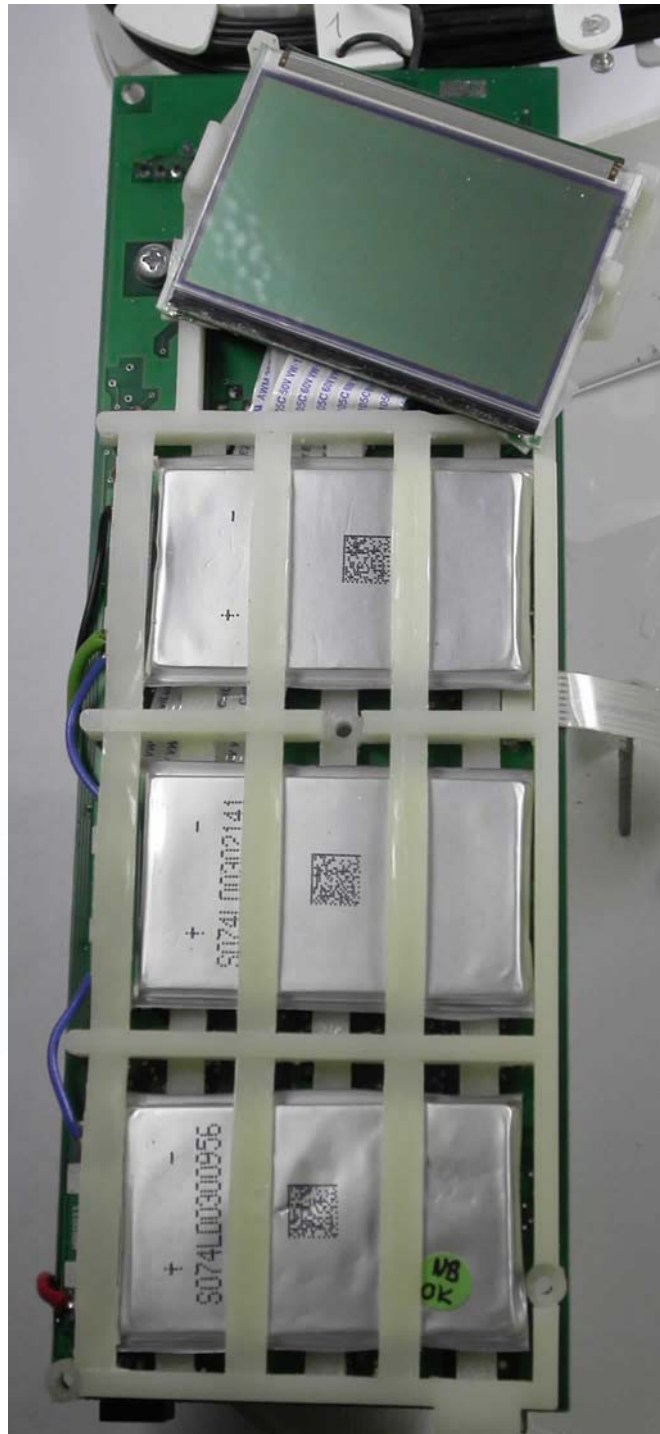

File No. **T25258-00-00AA**, page 10 of 22

### 3.2 Power supply system utilised

Power supply voltage : 11.1 V / DC

### 3.3 Short description of the Equipment under Test (EuT)

The EuT ISOMAX IV is a transponder Reader working on 134.2 kHz. It has different channels to receive different frequencies and demodulator in order to read 4 different types of transponder.

Number of tested samples: 1  
Serial number: Sample No 2

#### EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX reading mode

---



---



---

#### EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

#### The following peripheral devices and interface cables were connected during the measurements:

- Battery charger	Model : SB-151BOF-11
- USB cable	Model : 1m shielded
-	Model :
-	Model :
-	Model :
-	Model :

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

**MIKES BAPT Product Service GmbH**  
**Ohmstrasse 2-4**  
**94342 Strasskirchen**  
**Germany**

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the MIKES BAPT Product Service GmbH quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 4.4 Measurement Protocol for FCC, VCCI and AUSTEL

#### 4.4.1 GENERAL INFORMATION

##### 4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1993), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1993). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-1992 procedures and using the CISPR 22 Limits.

#### **4.4.1.2 Measurement Error**

The data and results referenced in this document are true and accurate. The reader is cautioned that there is some measurement variability due to the tolerances of the test equipment that can contribute to a nominal product measurement uncertainty. The measurement uncertainty was calculated for all measurements listed in this test report according to NIS 81/5.1994 "The treatment of uncertainty in EMC measurements" and is documented in the MIKES BABT Product Service GmbH quality system according to DIN EN ISO/IEC 17025. Furthermore, component differences and manufacturing process variability of production units similar to that tested may result in additional product uncertainty. If necessary, refer to the test lab for the actual measurement uncertainty for specific tests. The manufacturer has the sole responsibility of continued compliance of the device.

#### **4.4.1.3 Justification**

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum disturbances from the unit.

### **4.4.2 DETAILS OF TEST PROCEDURES**

#### **General Standard Information**

The test methods used comply with CISPR Publication 22 (1993), EN 55022 (1987) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

## 5 TEST CONDITIONS AND RESULTS

### 5.1 Conducted emissions

For test instruments and accessories used see section 6 Part.

#### 5.1.1 Description of the test location

Test location:

#### 5.1.2 Photo documentation of the test set-up

#### 5.1.3 Description of Measurement

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

#### 5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin

Remarks: This test is not applicable because the EuT is battery powered.

---

---

---

---



## 5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 1.

### 5.2.1 Description of the test location

Test location: OATS1

### 5.2.2 Photo documentation of the test set-up



### 5.2.3 Description of Measurement

The magnetic field strength from the EuT is measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

The final level, expressed in dB $\mu$ V/m, is arrived at by taking the reading from the EMI receiver (Level dB $\mu$ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dB $\mu$ V)	+	Factor (dB)	=	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5



#### 5.2.4 Test result

Measurement distance: 30m

Frequency [kHz]	L: PK [dBμV]	L: AV [dBμV]	L: QP [dBμV]	Correct. [dB]	L: PK [dBμV/m]	L: AV [dBμV/m]	L: QP [dBμV/m]	Limit [dBμV/m]	Delta [dB]
134.2	44.5	44.0	44.4	20.0	64.5	64.0	64.4	65.0	1.0

Interpolated measurement distance (-40 dB): 300m

Frequency [kHz]	L: PK [dBμV]	L: AV [dBμV]	L: QP [dBμV]	Correct. [dB]	L: PK [dBμV/m]	L: AV [dBμV/m]	L: QP [dBμV/m]	Limit [dBμV/m]	Delta [dB]
134.2	4.5	4.0	4.4	20.0	24.5	24.0	24.4	25.0	1.0

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of fundamental wave		Measurement distance (meters)
	(μV/m)	dB (μV/m)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

**Remarks:** The field strength of fundamental wave has been measured at a distance of 30 m.

---



---



---



---

### 5.3 Spurious emissions (Magnetic field) 9 kHz – 30 MHz

For test instruments and accessories used see section 6 Part SER 1.

#### 5.3.1 Description of the test location

Test location: OATS1

#### 5.3.2 Photo documentation of the test set-up



#### 5.3.3 Description of Measurement

Spurious emissions from the EuT are measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

The final level, expressed in dB $\mu$ V/m, is arrived at by taking the reading from the EMI receiver (Level dB $\mu$ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dB $\mu$ V)	+	Factor (dB)	=	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

FCC ID: NDXISOMAXIV

#### 5.3.4 Test result

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	(µV/m)	dB (µV/m)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

**Remarks:** No unwanted emissions could be measured up to 30 MHz

.

.

## 5.4 Radiated emissions (electric field) 30 MHz – 1 GHz

For test instruments and accessories used see section 6 Part.

### 5.4.1 Description of the test location

Test location:

Test distance:

### 5.4.2 Photo documentation of the test set-up

### 5.4.3 Description of Measurement

Spurious emissions from the EuT are measured in the frequency range of 30 MHz to 10 times the highest used frequency using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dBμV/m, is arrived by taking the reading from the EMI receiver (Level dBμV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level (dBμV/m)	Limit (dBμV/m)	=	Delta (dB)
719	75	+	32.6	=	107.6	110	=	-2.4

### 5.4.4 Test result

Frequency [MHz]	L: PK [dBμV]	L: AV [dBμV]	L: QP [dBμV]	Correct. [dB]	L: PK [dBμV/m]	L: AV [dBμV/m]	L: QP [dBμV/m]	Limit [dBμV/m]	Delta [dB]

**FCC ID: NDXISOMAXIV**

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ )	
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
960-1000	500	54	3

**Remarks:** This test is not applicable because the fundamental frequency is below 1.705 MHz.

---



---



---



---

## 5.5 Emission Bandwidth


For test instruments and accessories used see section 6 Part MB.

### 5.5.1 Description of the test location

Test location: AREA4

### 5.5.2 Test protocol

Emission Bandwidth plot

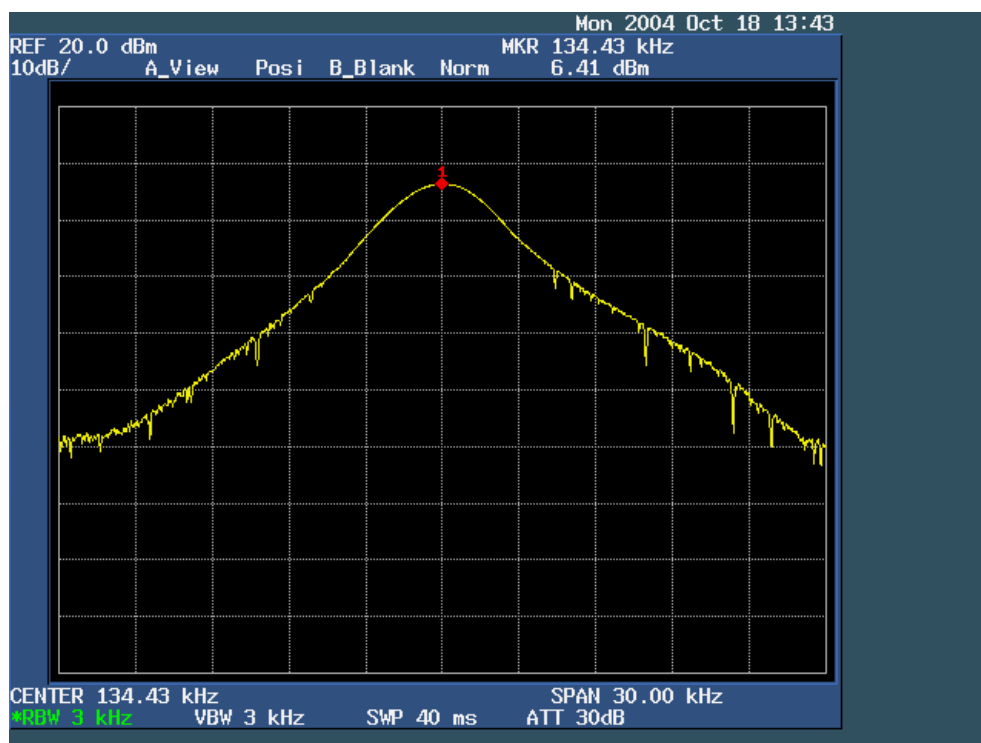

## 6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPR1	ESCS-30	Test Receiver	Rohde & Schwarz München	04-07/63-03-001
	FMZB 1516	Magnetic Field Antenna	Schwarzbeck Mess-Elektronik	99-07/62-03-004
MB	HZ-10	Magnetic Field Antenna	Rohde & Schwarz München	04-07/62-95-320
	R 3162	Spectrum Analyzer	Advantest	04-07/74-00-001
SER1	ESCS-30	Test Receiver	Rohde & Schwarz München	04-07/63-03-001
	FMZB 1516	Magnetic Field Antenna	Schwarzbeck Mess-Elektronik	99-07/62-03-004