


# MiniMax II Manual

## Preliminary version

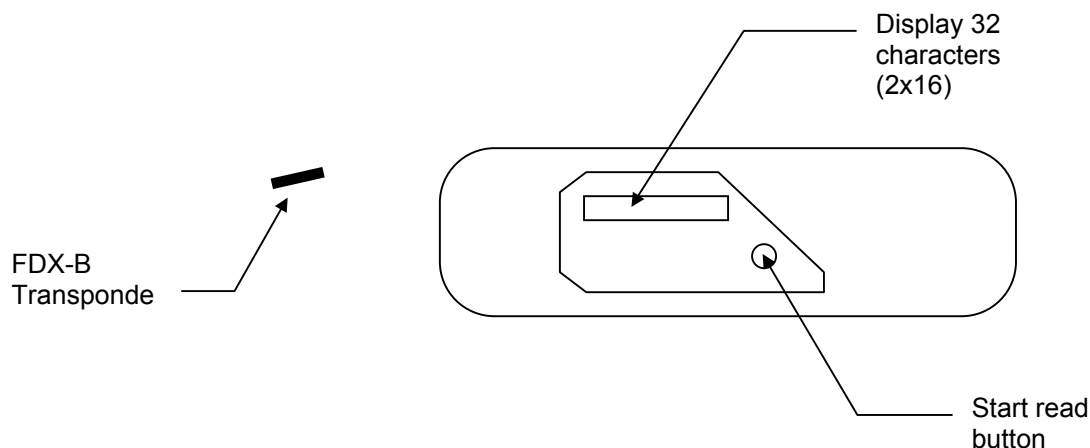

### How to operate the MiniMax II :

- Push the start read button once  
The display indicates :

**MiniMax II A00**  
**ready ⇨**      Software version

- Point the top of the MiniMax II close to the transponder
- Push the start read button once  
The display indicates :

**\*reading\***

- If a Transponder is present  
The display indicates :

**Country : CHE**      Alpha country code according to ISO3166, ISO11784/5  
**276098101420465**      Id code number according to ISO11784/5

- If a Transponder is not read  
The display indicates :

**Tag not found**  
**ready ⇨**

- If the MiniMax is left at power on and not used for more than 90 sec. It will beep and indicate a battery sign on the display.

When the battery voltage is less than 7 Volts the reader after 3 seconds turn off.

If the display indicates:

**Battery low**

Replace the battery with a 9 Volts block battery **Alkaline** or **Lithium**.  
Another type of battery will not function properly.

## **INFORMATION TO USER**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.