



**A RADIO TEST REPORT**

**FOR**

**AXELL WIRELESS**

**ON**

**MBF2308-2319-15XX**

**DOCUMENT NO. TRA-015162-47-00-D**

**HULL**

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.  
**T** +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com  
[www.tracglobal.com](http://www.tracglobal.com)

**TRaC Wireless Test Report** : TRA-015162-47-04-D

**Applicant** : Axell Wireless

**Apparatus** : MBF2308-2319-15XX

**Specification(s)** : CFR47 Part 22, Part 24, Part 90

**Purpose of Test** : Certification

**FCCID** : NEOMBF23082319

**Authorised by** :



: Radio Product Manager

**Issue Date** : 19<sup>th</sup> November 2014

**Authorised Copy Number** : PDF

## Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	6
1.5	Test Result Summary	7
1.6	Equipment Test Conditions	8
1.7	Standard References	9
1.8	Notes Relating To Assessment	10
1.9	Deviations from Test Standards	10
Section 2:	Measurement Uncertainty	11
2.1	Measurement Uncertainty Values	11
Section 3:	Modifications	13
3.1	Modifications Performed During Assessment	13
Appendix A:	Uplink Formal Emission Test Results	14
A1	RF Gain and Output Power	15
A2	Amplifier Intermodulation Spurious Emissions	16
A3	Amplifier Modulated Channel Test	21
A4	Spurious Emissions at Antenna Terminals Less than 1MHz	27
A5	Spurious Emissions at Antenna Terminals Greater than 1 MHz	28
A6	Radiated Electric Field Emissions	35
A7	Passband Gain & Bandwidth	43
Appendix B:	Downlink Formal Emission Test Results	44
B1	RF Gain and Output Power	45
B2	Amplifier Intermodulation Spurious Emissions	46
B3	Amplifier Modulated Channel Test	51
B4	Spurious Emissions at Antenna Terminals Less than 1MHz	57
B5	Spurious Emissions at Antenna Terminals Greater than 1MHz	65
B6	Radiated Electric Field Emissions	72
B7	Passband Gain & Bandwidth	80
Appendix C:	Additional Test and Sample Details	81
Appendix D:	Additional Information	87
Appendix F:	Photographs and Figures	88

## Section 1:

## Introduction

### 1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global [ ]

Unit E  
South Orbital Trading Park  
Hedon Road  
Hull, HU9 1NJ.  
United Kingdom.

Telephone: +44 (0) 1482 801801  
Fax: +44 (0) 1482 801806

TRaC Global [X]

Unit 1  
Pendle Place  
Skelmersdale  
West Lancashire, WN8 9PN  
United Kingdom

Telephone: +44 (0) 1695 556666  
Fax: +44 (0) 1695 577077

Email: [test@tracglobal.com](mailto:test@tracglobal.com)  
Web site: <http://www.tracglobal.com>

Tests performed by: D Winstanley

Report author: D Winstanley

**This report must not be reproduced except in full without prior written permission from TRaC Global.**

## **1.2 Tests Requested By**

This testing in this report was requested by :

Aerial House  
Asheridge Road  
Chesham  
Buckinghamshire  
HP5 1TU

## **1.3 Manufacturer**

Aerial House  
Asheridge Road  
Chesham  
Buckinghamshire  
HP5 1TU

## 1.4 Apparatus Assessed

The following apparatus was assessed between 27<sup>th</sup> August and 25<sup>th</sup> September 2013

Fibre Optic (F/O) Remote Unit

The Multi-Band Fibre Optic system is composed of two building blocks: OMU (Optical Master unit) and MBF2308-2319-15XX (Fibre Distributed Antenna System) Remote Unit. This is an indoor solution for single or multi operator use.

Technical specifications			
Frequency Range	Uplink	Downlink	CFR 47 Rule Part
850 MHz	824 - 849 MHz	869 - 894 MHz	22, Subpart H
SMR 800 (Sprint)	817 - 824MHz	862 - 869 MHz	90, Subpart S
1900 MHz	1850- 1915 MHz	1930 - 1995 MHz	24, Subpart E

## Variants

Model	Part Number
MBF2308-2319-1510	MBF2001
MBF2308-2319-1530	MBF2002
MBF2308-2319-1550	MBF2003
MBF2308-2319-1570	MBF2004
MBF2308-2319-1590	MBF2005

## 1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	FCC Part	CFR 47 Part 22 Subpart H	CFR 47 Part 24 Subpart E	CFR 47 Part 90 Subpart S	Appendix in Report
RF Power Output	2.1046	22.913(a)	24.232(a)	90.205(k)	A1 & B1
Intermodulation Spurious Emissions	2.1051	22.917(a)	24.238(a)	90.691(a)(1) & (2)	A2 & B2
Occupied Bandwidth & Modulation	2.1049 *KDB 935210	N/A	N/A	N/A	A3 & B3
Spurious Emissions at Antenna Terminals Less than 1 MHz	2.1051	22.917(a)	24.238(a)	90.691(a)(1) & (2)	A4 & B4
Spurious Emissions at Antenna Terminals Greater than 1MHz	2.1051	22.917(a)	24.238(a)	90.691(a)(1) & (2)	A5 & B5
Field Strength of Spurious Emissions	2.1053	22.917(a)	24.238(a)	90.691(a)(1) & (2)	A6 & B6
Passband Gain & 20dB bandwidth	*KDB 935210	N/A	N/A	N/A	A7 & B7
Frequency Stability	2.1055	22.355	24.135	90.213	N/A(note 1)
Transient behaviour	2.1055	N/A	N/A	N/A	N/A(note 2)
Audio Frequency Response (a)	TIA EIA 603.3.2.6	N/A	N/A	N/A	N/A
Modulation Limiting	TIA EIA-603.3.2.6	N/A	N/A	N/A	N/A
Signal Booster Labelling Requirements	20.21(f)(1)(ii)	N/A	N/A	N/A	N/A

Notes:

1 The EUT does not contain modulation circuitry; therefore the test was not performed.

2 The EUT is not a keyed carrier system; therefore the test was not performed.

3 \*KDB 935210 D02 Signal Boosters Certification v02

Abbreviations used in the above table:

CFR : Code of Federal Regulations  
 REFE : Radiated Electric Field Emissions  
 A Uplink Results Appendix

ANSI : American National Standards Institution  
 PLCE : Power Line Conducted Emissions  
 B Downlink Results Appendix

## 1.6 Equipment Test Conditions

Product class:	Uplink	Class A [ ] Class B [X]
	Downlink	Class A [ ] Class B [X]
Product Use:	Private Land Mobile Repeater	
Supply Voltages:	Vnom	+230Vac/110Vac
Note: Vnom voltages are as stated above unless otherwise shown on the test report page		
Equipment Category:	Single channel	[ ]
	Two channel	[ ]
	Multi-channel	[X]
Channel spacing:	Wideband	Uplink
	Wideband	Downlink
Test Location	TRaC Global	
	Skelmersdale	[X]
	Hull	[ ]
	Other	[ ] Please Specify

## 1.7 Standard References

47 CFR 2	Code of Federal Regulations, Title 47, Part 2, "Frequency allocations and Radio Telemetry Matters; General Rules and Regulations"
47 CFR 22	Code of Federal Regulations, Title 47, Part 22," Public Mobile Services"
47 CFR 24	Code of Federal Regulations, Title 47, Part 24," Personal Communications Services"
47 CFR 27	Code of Federal Regulations, Title 47, Part 27," Miscellaneous Wireless Communications Services"
47 CFR 90	Code of Federal Regulations, Title 47, Part 90,"Land Mobile Radio Service"
47 CFR 15	Code of Federal Regulations, Title 47, Part 15,"Radio Frequency Devices" Subpart B, "Unintentional Radiators"
C63.4-2003	American National Standards Institute (ANSI), "Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range 9 kHz to 40 GHz"
KDB 935210 D01	Booster Definitions v02
KDB 935210 D02	Certification Requirements v02
KDB 935210 D03	Signal Booster Measurements v02

## 1.8 Notes Relating To Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

## 1.9 Deviations from Test Standards

There were no deviations from the standards tested to.

**Section 2:****Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded the following measurement uncertainty was calculated:

**Radio Testing – General Uncertainty Schedule**

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.*

**[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

**[2] Carrier Power**

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

**[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

**[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

**[5] Maximum frequency error**

Uncertainty in test result (Frequency Counter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

**[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

**[7] Frequency deviation**

Uncertainty in test result = **3.2%**

**[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

**[9] Conducted Spurious**

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

**[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

**[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**,  
Uncertainty in time measurement = **0.59%**,  
Uncertainty in Amplitude measurement = **0.82%**

**[12] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[13] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[14] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[15] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[16] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[17] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[18] Receiver Threshold**

Uncertainty in test result = **3.23dB**

**[19] Transmission Time Measurement**

Uncertainty in test result = **7.98%**

<b>Section 3:</b>	<b>Modifications</b>
-------------------	----------------------

### **3.1 Modifications Performed During Assessment**

No modifications were performed during the assessment

**Appendix A:****Uplink Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

## A1 RF Gain and Output Power


Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1046,22.913(a), 24.232(a), 90.205 (k)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
Temperature	23°C
Humidity	46%
EUT set up	Refer to Appendix C

Frequency (MHz)	Signal Generator input level (dBm)	Input Cable Loss (dB)	Input Level (dBm)	Level at Spectrum Analyser (dBm)	Output Cable & Attenuator loss (dB)	Gain (dB)	Conducted Output Power (dBm)	Gain after 10dB input level increase (dB)
850 MHz								
817.000	-47.20	0.45	-47.65	-31.06	0.8	17.34	-30.31	7.58
833.000	-49.20	0.45	-49.65	-31.06	0.8	19.34	-30.31	9.52
849.000	-46.50	0.45	-46.95	-31.25	0.8	16.45	-30.50	6.67
1800 MHz								
1850.000	-44.00	0.63	-44.63	-30.85	1.1	14.88	-29.75	4.93
1880.000	-44.00	0.63	-44.63	-31.65	1.1	14.04	-30.59	4.16
1915.000	-40.70	0.63	-41.33	-31.99	1.1	10.40	-30.93	0.58

Notes: 1.The signal generator input was increased by 10dBs and the level of the output signal remeasured.

## A2 Amplifier Intermodulation Spurious Emissions

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a), 90.691(a)(1) & (2)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

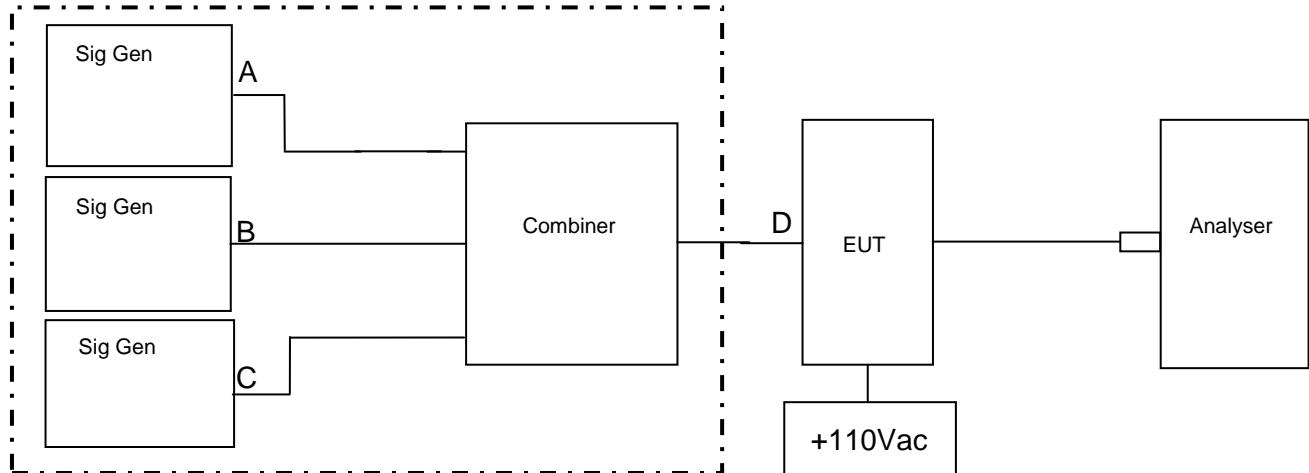

Signal Generator B was varied in frequency to check if intermodulation products were produced.

RF Input Frequency (MHz)			Highest Intermodulation Product Level (dBm)	Limit (dBm)
850MHz				
817.00 MHz	827.67 MHz	849.00 MHz	No Emissions Within 10 dB of the limit	-13
1800 MHz				
1850.00 MHz	1886.25 MHz	1915.00 MHz	No Emissions Within 10 dB of the limit	-13


Sweep data is shown on the next page:

## Results

The EUT was found to comply with the limits

See plots below



## 850 MHz Intermodulation Close View

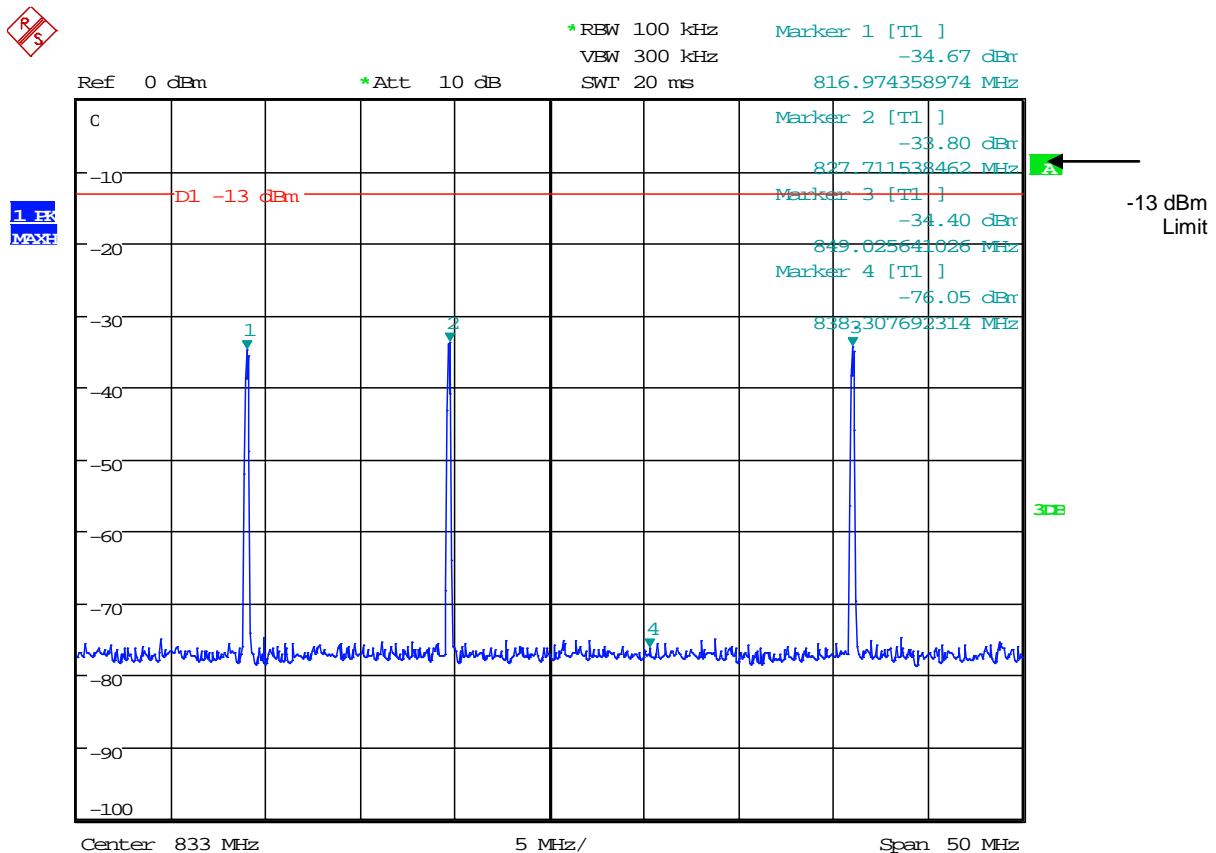

Date: 25.OCT.2013 10:38:26

The above plots show that there are no products within 20 dB of the spurious limit.

## 850 MHz Intermodulation

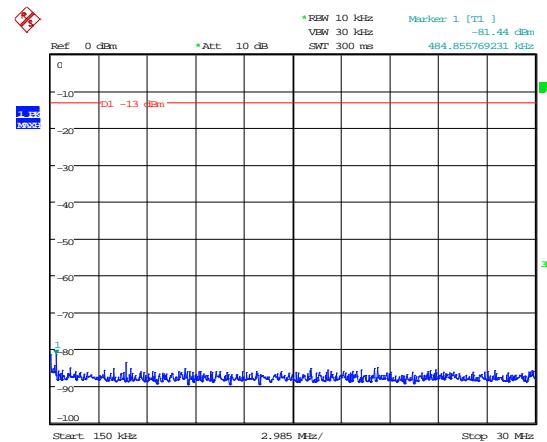
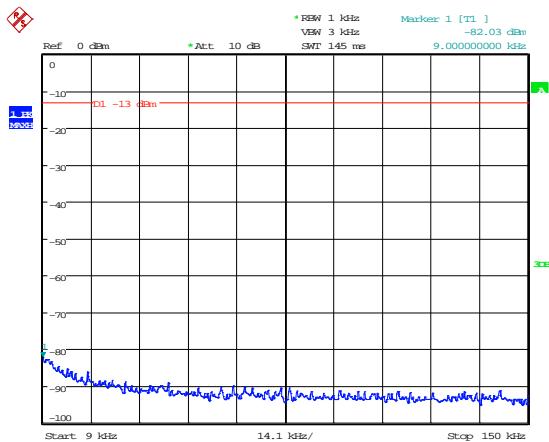


Date: 25.OCT.2013 10:53:01

Date: 25.OCT.2013 10:53:19

### 9 – 150kHz

### 150kHz – 30MHz

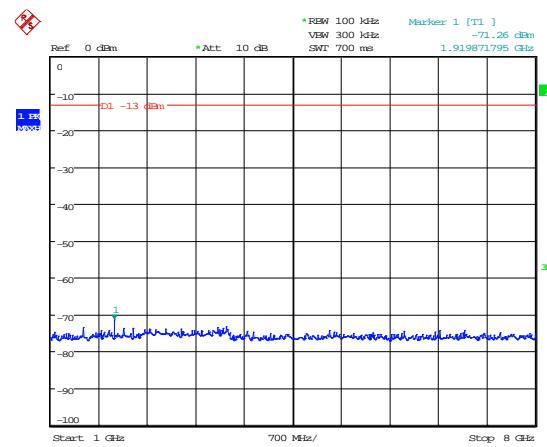
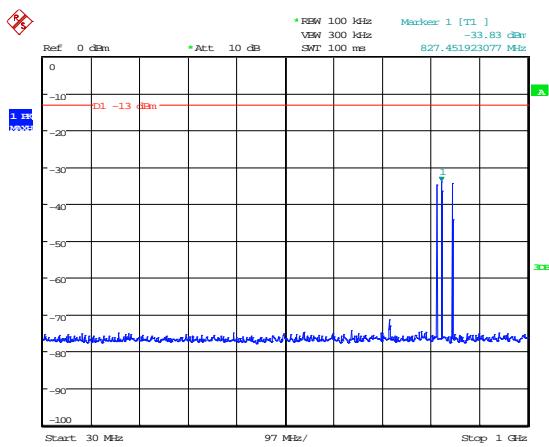


Date: 25.OCT.2013 10:38:40

Date: 25.OCT.2013 10:39:12

### 30MHz – 1GHz

### 1GHz – 8GHz

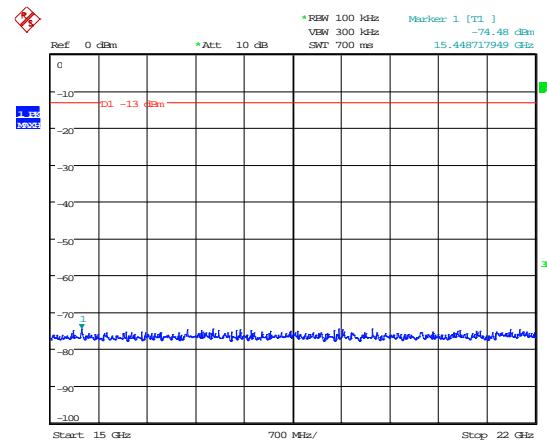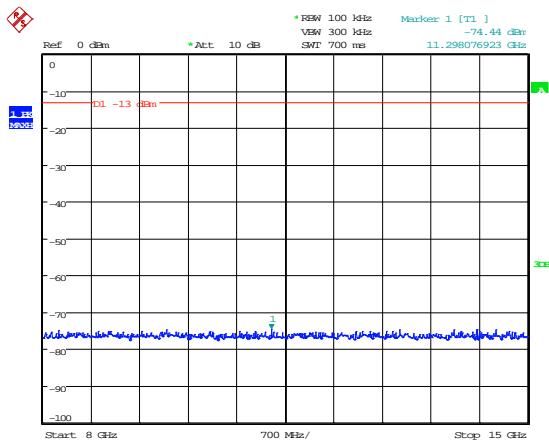


Date: 25.OCT.2013 10:40:12

Date: 25.OCT.2013 10:58:17

### 8GHz – 15GHz

### 15GHz – 22GHz


## 1800 MHz Intermodulation Close View

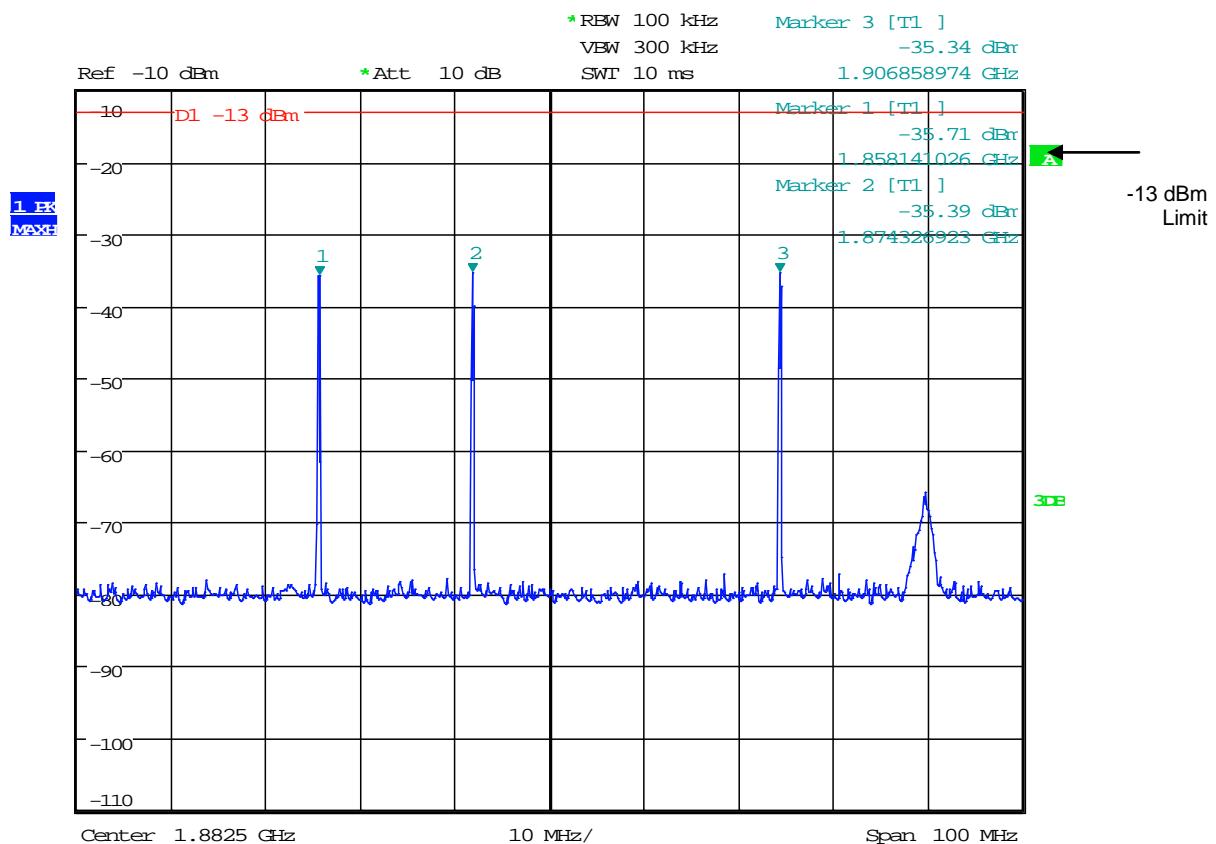


Date: 28.MAY.2014 11:05:59

The above plots show that there are no products within 20 dB of the spurious limit.

## 1880 MHz Intermodulation

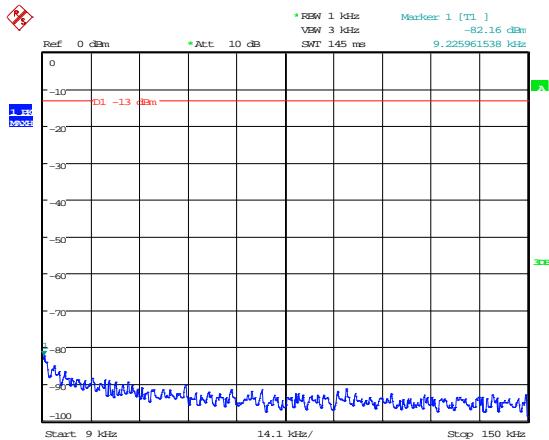


Date: 25.OCT.2013 10:58:30

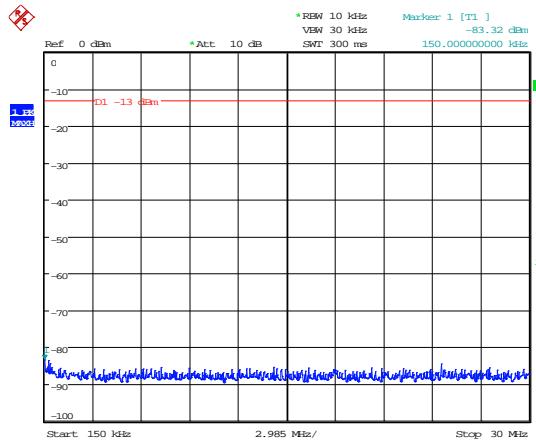


Date: 25.OCT.2013 10:58:46

9 – 150kHz

150kHz – 30MHz

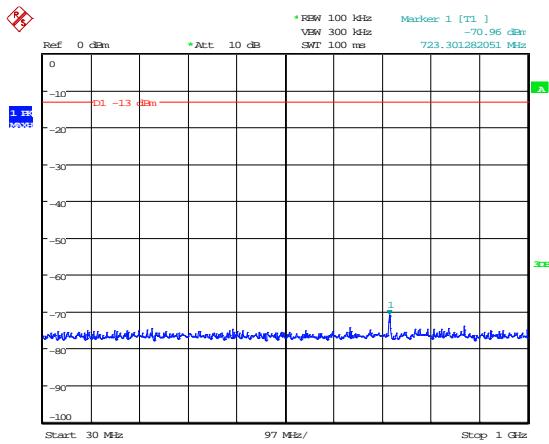


Date: 25.OCT.2013 10:59:04

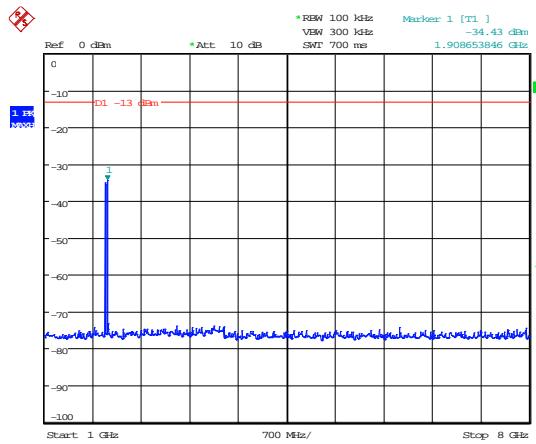


Date: 25.OCT.2013 10:57:51

30MHz – 1GHz

1GHz – 8GHz

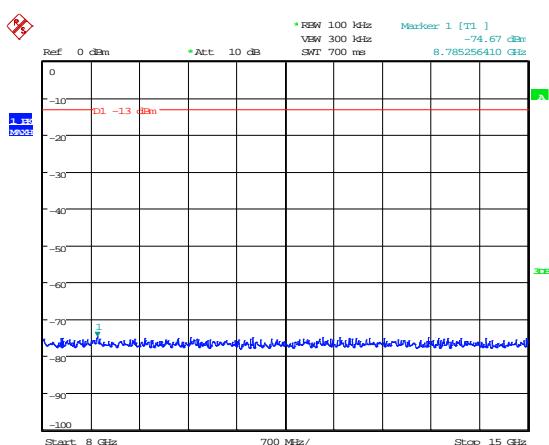

Date: 25.OCT.2013 10:58:05

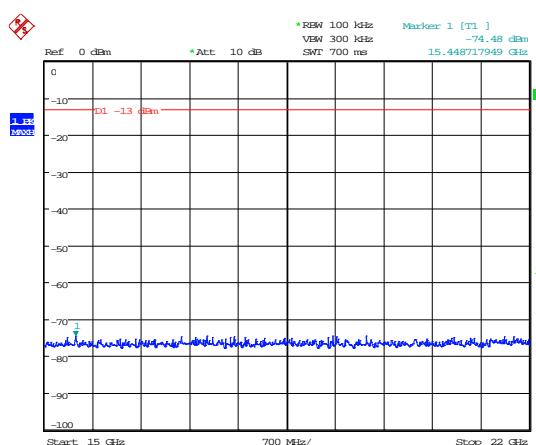

Date: 25.OCT.2013 10:58:17

8GHz – 15GHz



15GHz – 22GHz

### A3 Amplifier Modulated Channel Test


<b>Test Details:</b>	
Measurement standard	D.3 Policies + Procedures (j) of KDB 935210 D02 Signal Boosters Certification v02
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Frequency Of Operation Channel	Modulation Type				
	CDMA	GSM	WCDMA	LTE 1.4 MHz	LTE 20.0 MHz
817.0 MHz	1.275 MHz	246.795 kHz	4.182 MHz	1.089 MHz	17.868 MHz
833.0 MHz	1.269 MHz	246.795 kHz	4.202 MHz	1.089 MHz	17.868 MHz
849.0 MHz	1.269 MHz	246.795 kHz	4.163 MHz	1.086 MHz	17.868 MHz
1850.0 MHz	1.278 MHz	248.397 kHz	4.153 MHz	1.089 MHz	17.868 MHz
1880.0 MHz	1.269 MHz	245.192 kHz	4.163 MHz	1.089 MHz	17.828 MHz
1915.0 MHz	1.275 MHz	246.795 kHz	4.153 MHz	1.089 MHz	17.868 MHz


## CDMA Modulation

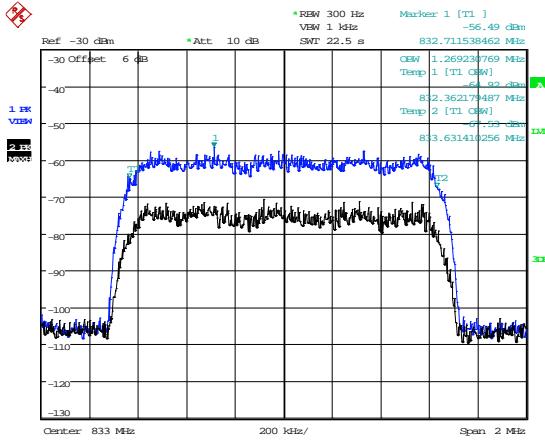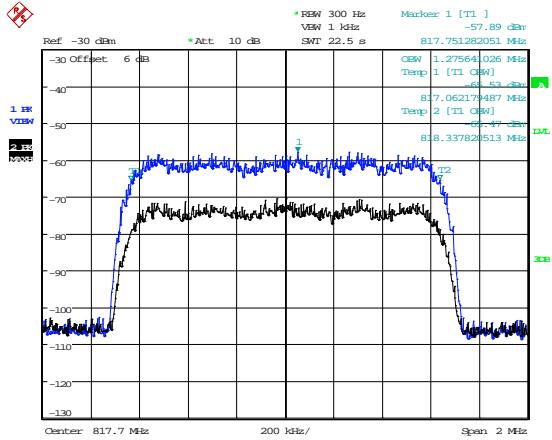


Date: 24.OCT.2013 16:46:40

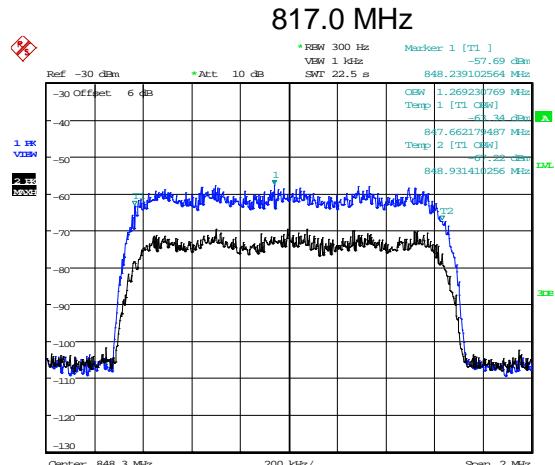


Date: 24.OCT.2013 15:43:53

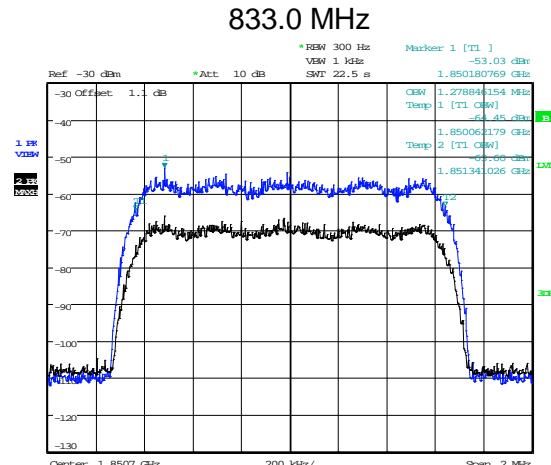

Date: 24.OCT.2013 16:43:46

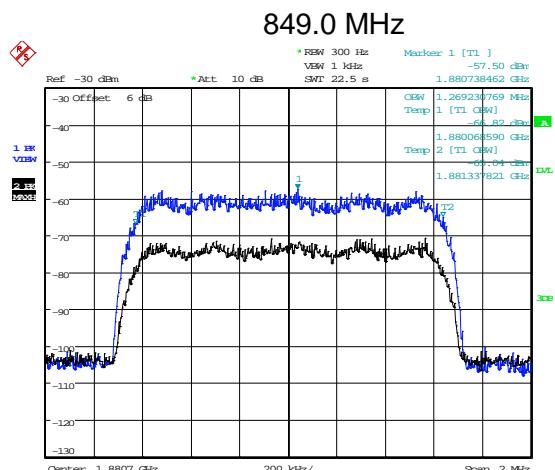

Date: 28.MAY.2014 10:09:57

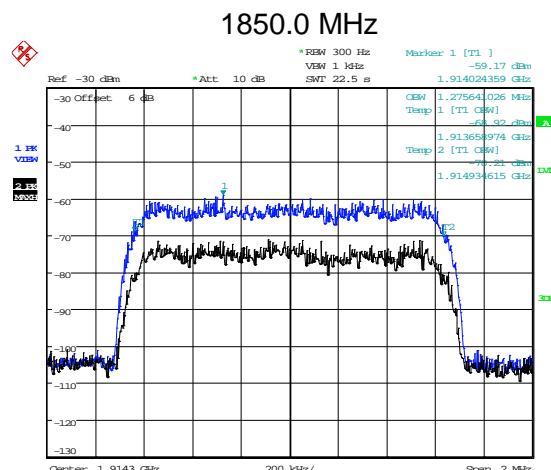



Date: 24.OCT.2013 16:41:05

## 1880.0 MHz


Date: 24.OCT.2013 16:37:26

## 1915.0 MHz


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

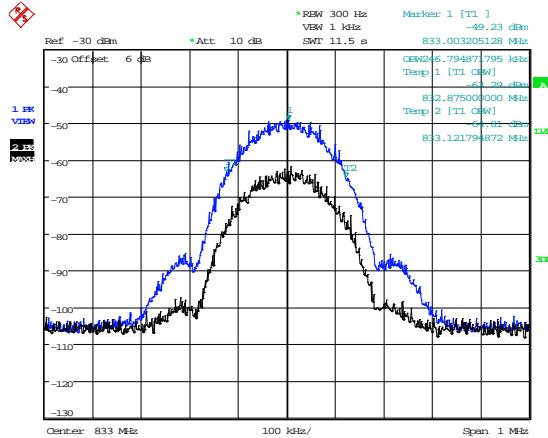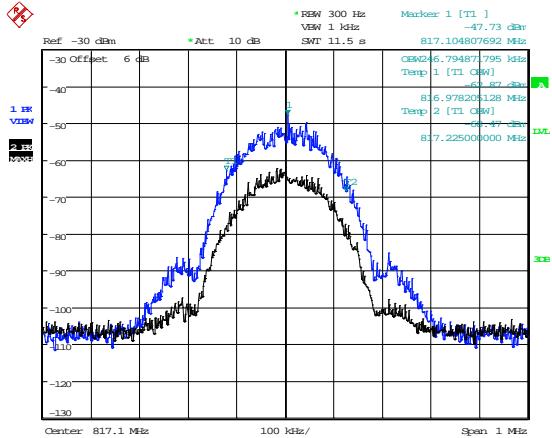**GSM Modulation**


Date: 24.OCT.2013 16:49:59

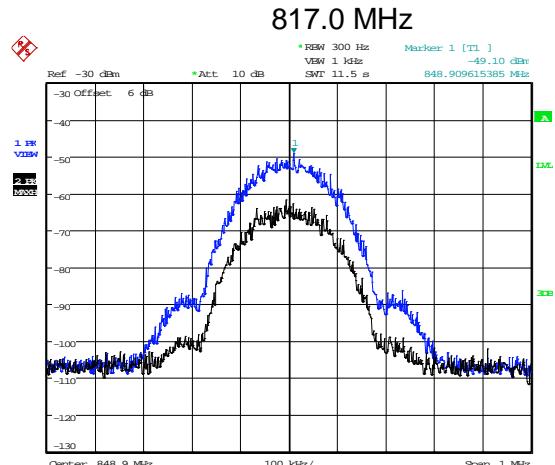


Date: 24.OCT.2013 16:55:32

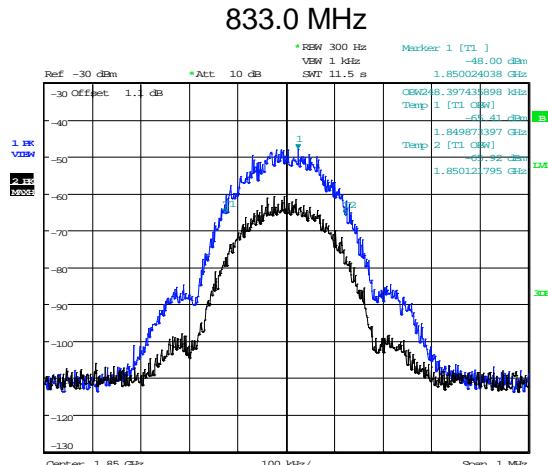

Date: 24.OCT.2013 16:57:41

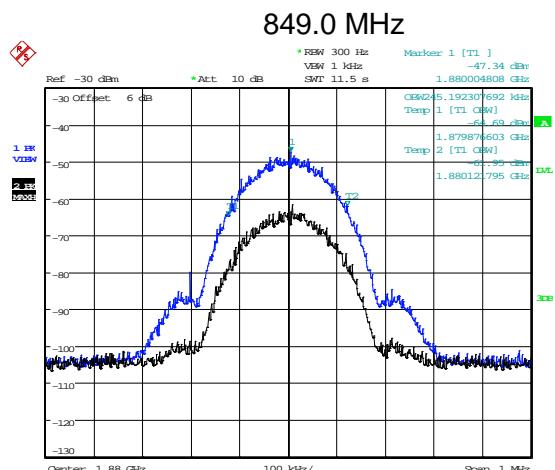

Date: 28.MAY.2014 10:17:13

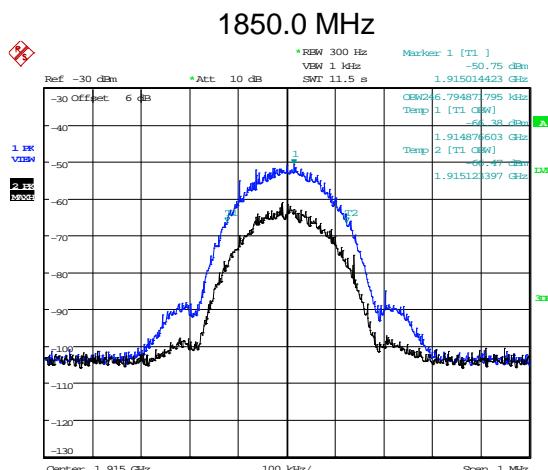

Date: 25.OCT.2013 08:32:26



**1880.0 MHz**

Date: 25.OCT.2013 08:43:01


**1915.0 MHz**

The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.


## WCDMA Modulation

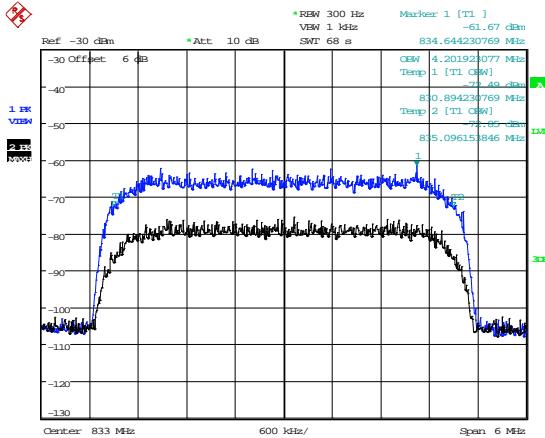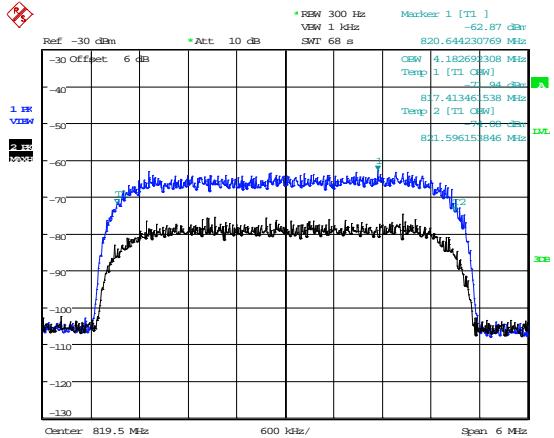

Date: 24.OCT.2013 15:59:12

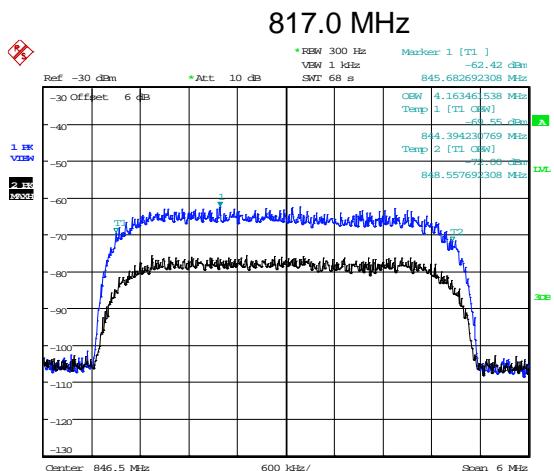


Date: 24.OCT.2013 16:02:09

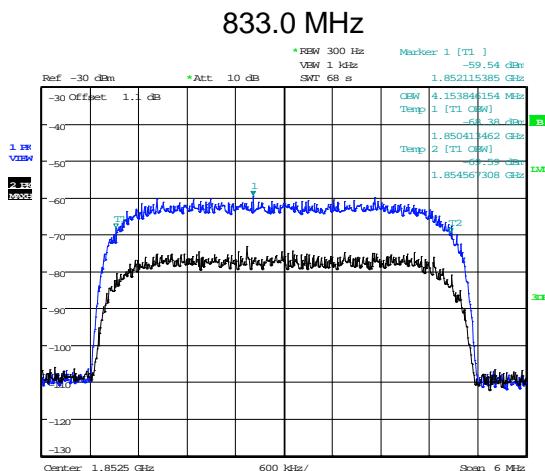


Date: 24.OCT.2013 16:07:19

## 849.0 MHz

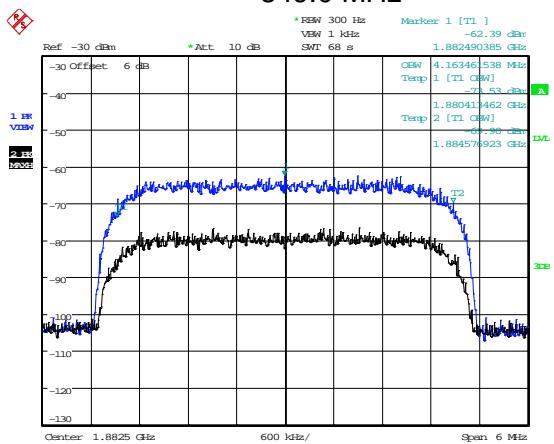

Date: 28.MAY.2014 10:24:21

## 1850.0 MHz

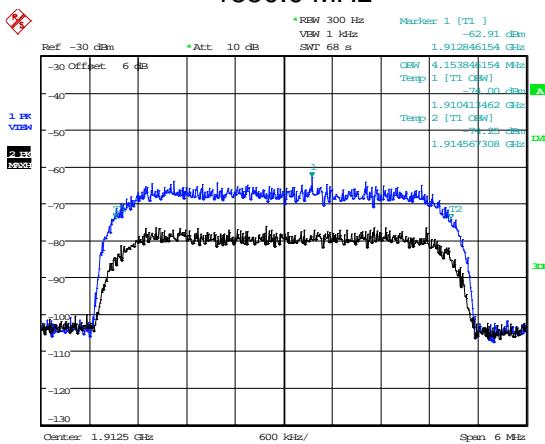

Date: 24.OCT.2013 16:10:58



## 1880.0 MHz

Date: 24.OCT.2013 16:23:58

## 1915.0 MHz

The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.


### 1.4 MHz LTE Modulation

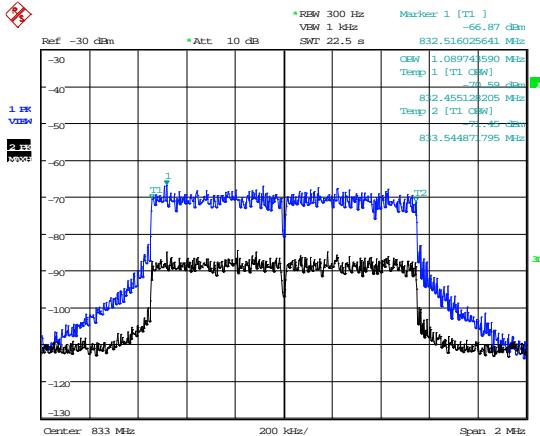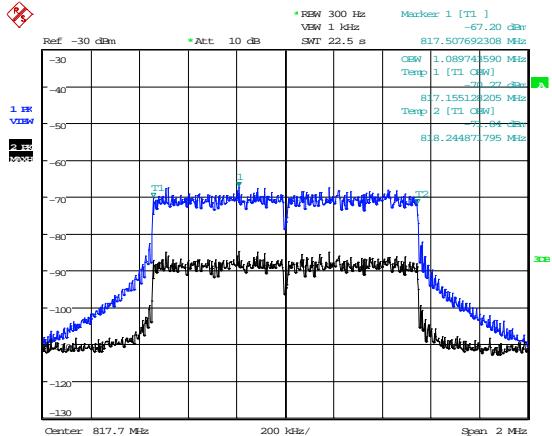


Date: 6.NOV.2013 15:02:52

Date: 6.NOV.2013 14:55:12

### 817.0 MHz

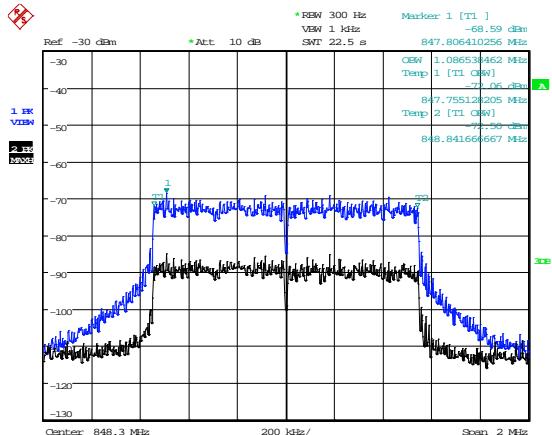


### 833.0 MHz

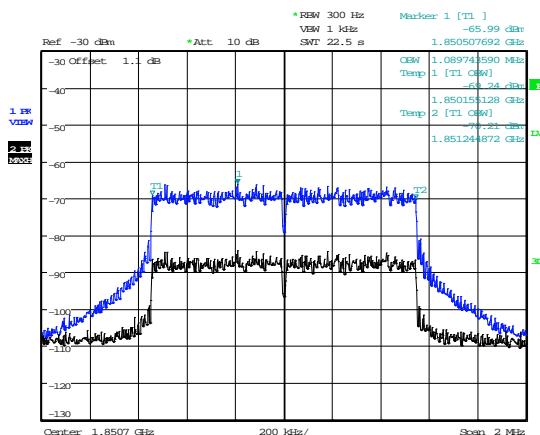


Date: 6.NOV.2013 14:51:59

Date: 28.MAY.2014 10:35:14

### 849.0 MHz

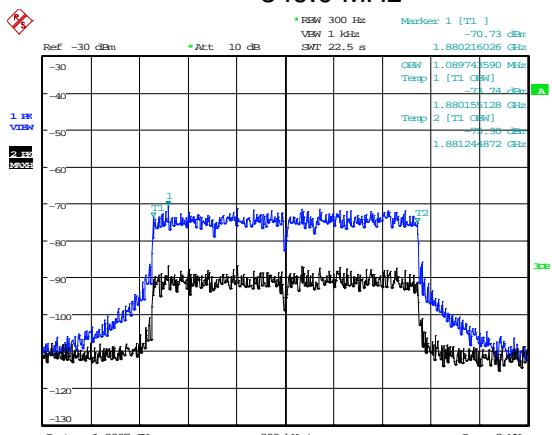

### 1850.0 MHz

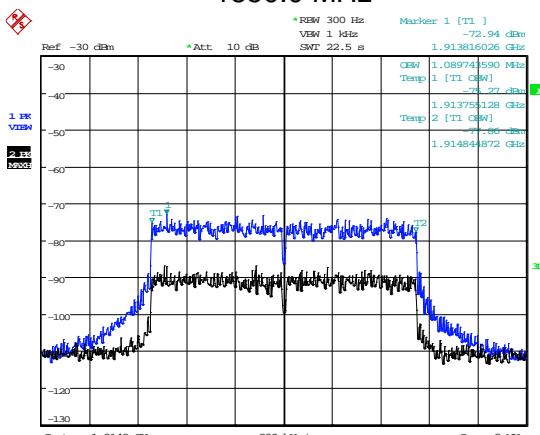

Date: 6.NOV.2013 14:50:16



Date: 6.NOV.2013 14:46:00

### 1880.0 MHz

### 1915.0 MHz

The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.


## 20 MHz LTE Modulation

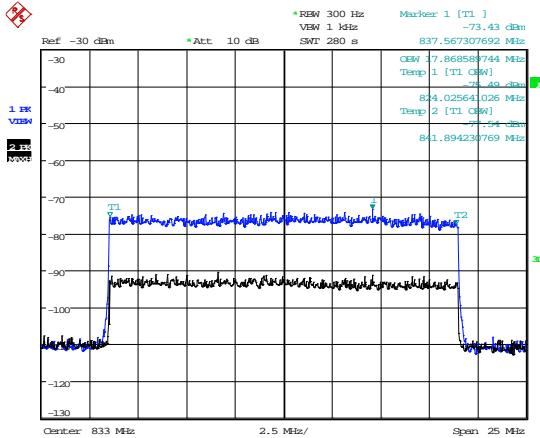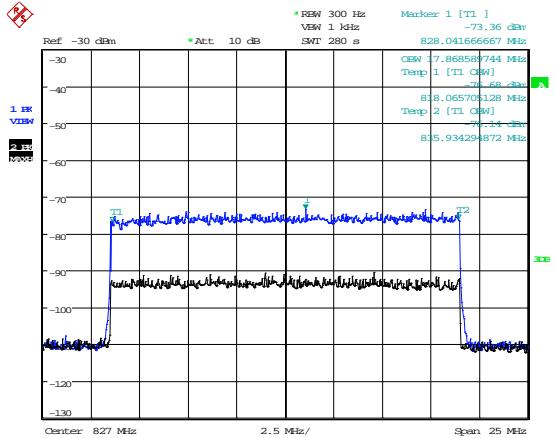


Date: 6.NOV.2013 10:28:02

Date: 6.NOV.2013 10:43:07

## 827.0 MHz

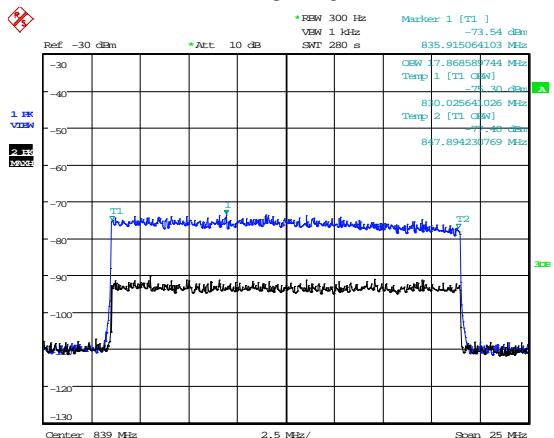

## 833.0 MHz


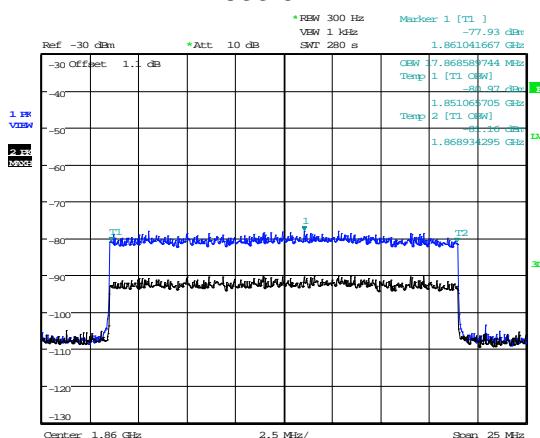


Date: 6.NOV.2013 11:07:46

Date: 28.MAY.2014 10:55:24

## 839.0 MHz

## 1860.0 MHz

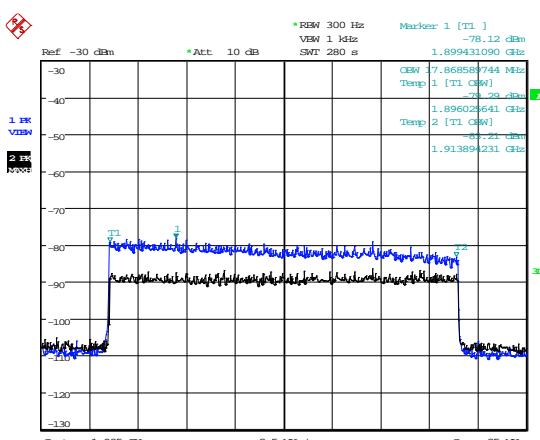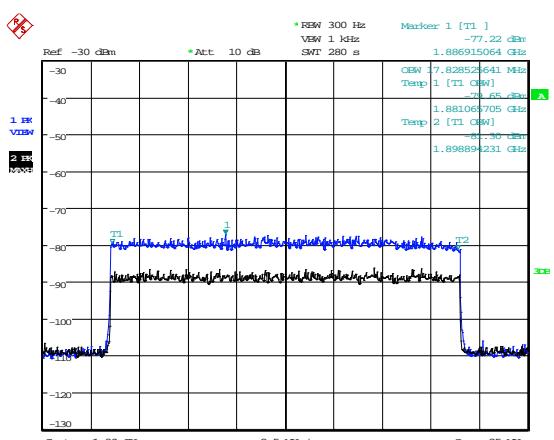

Date: 6.NOV.2013 11:33:55

Date: 6.NOV.2013 12:35:28

## 1890.0 MHz

## 1905.0 MHz

The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

**A4 Spurious Emissions at Antenna Terminals Less than 1MHz**

<b>Test Details:</b>	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a) 90.691(a)(1) & (2)
EUT sample number	S01 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Modulation Type	Bandedge	Carrier Frequency (MHz)	Max Level @ bandedge (dBm)
GSM	Lower		Maximum output power is less than the spurious limit
	Upper		
CDMA	Lower		Maximum output power is less than the spurious limit
	Upper		
WCDMA	Lower		Maximum output power is less than the spurious limit
	Upper		
LTE 1.4 MHz	Lower		Maximum output power is less than the spurious limit
	Upper		
LTE 20.0 MHz	Lower		Maximum output power is less than the spurious limit
	Upper		

## A5 Spurious Emissions at Antenna Terminals Greater than 1 MHz

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a) 90.691(a)(1) & (2)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Frequency (MHz)	Frequency Range (MHz)	Freq. of Emission (MHz)	Measured Level (dBm)	Attenuator & Cable Losses (dB)	Spurious Emission Level (dBm)	Limit (dBm)
850 MHz						
817.000						-13
833.000						-13
849.000						-13
1800 MHz						
1880.000						-13
1897.500						-13
1915.000						-13

Limit is determined by the outermost step of the emissions mask and is calculated as follows:



At least  $43 + 10 \log P$  dB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

### Result


The EUT was found to comply with the limits

## 850 MHz – 817.0 MHz

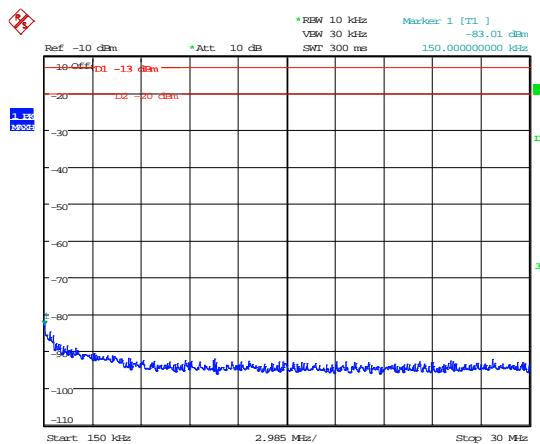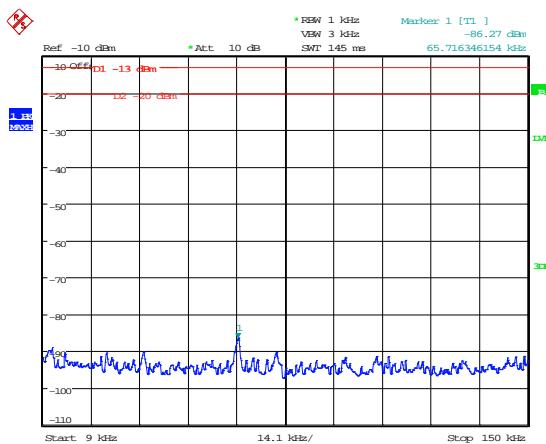


Date: 28.AUG.2013 12:43:06

## 9kHz - 150kHz

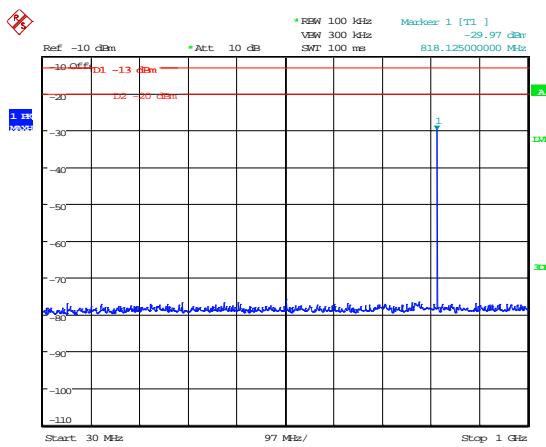


## 150kHz - 30MHz

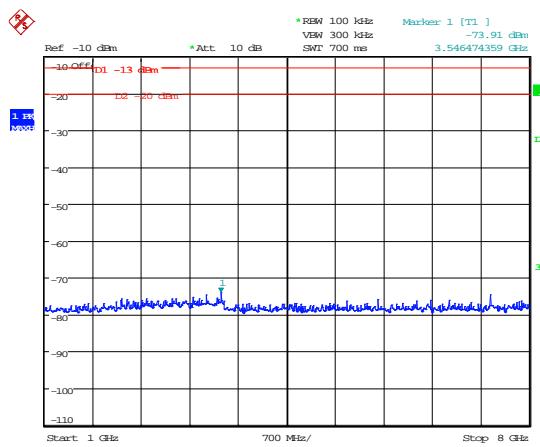


Date: 28.AUG.2013 12:44:27

## 30MHz - 1GHz

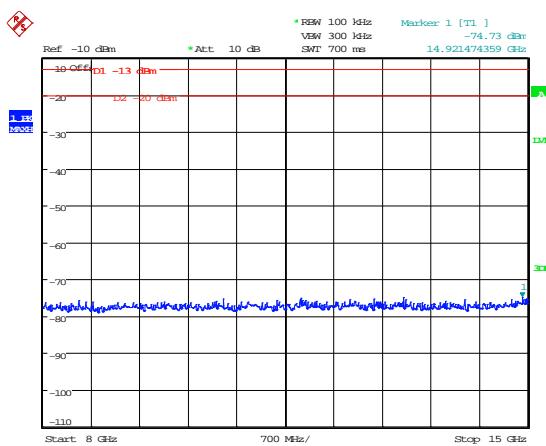

## 1GHz - 8GHz

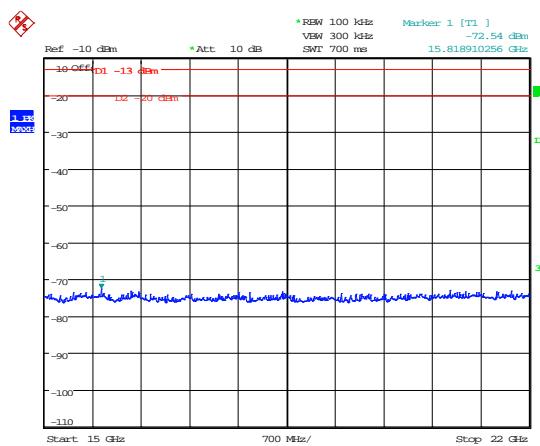



Date: 28.AUG.2013 12:44:51

## 8GHz - 15GHz

Date: 28.AUG.2013 12:46:38


## 15GHz - 22GHz

## 850 MHz – 833.0 MHz

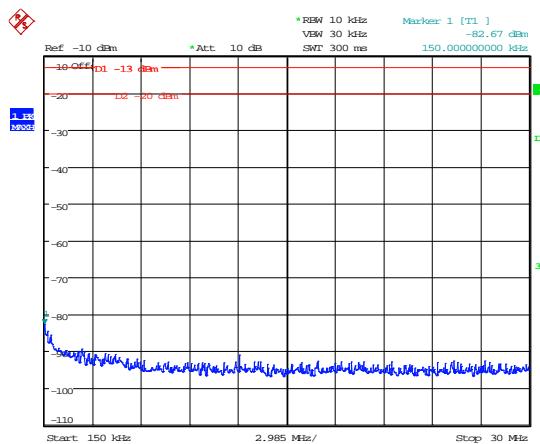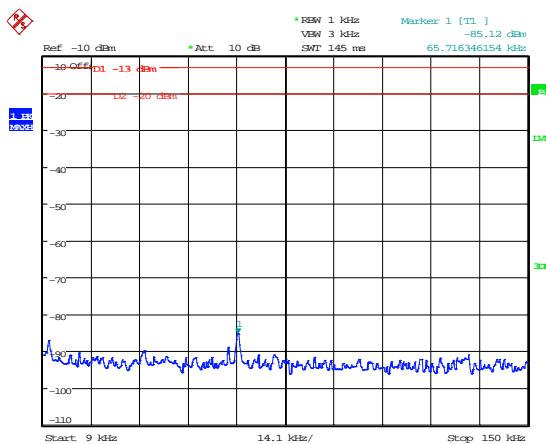


Date: 28.AUG.2013 12:49:06

## 9kHz - 150kHz

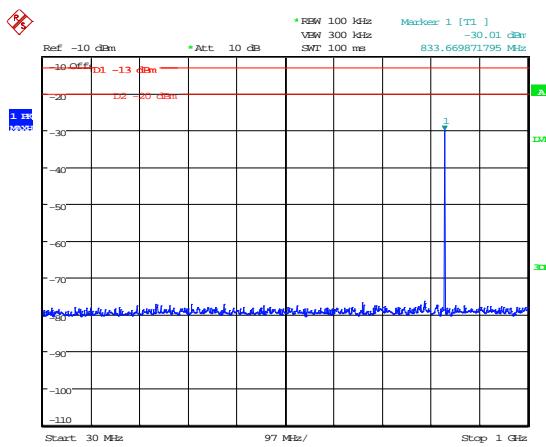


## 150kHz - 30MHz

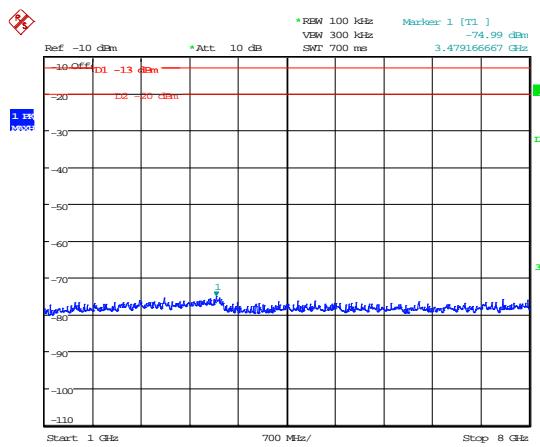


Date: 28.AUG.2013 12:48:13

## 30MHz - 1GHz

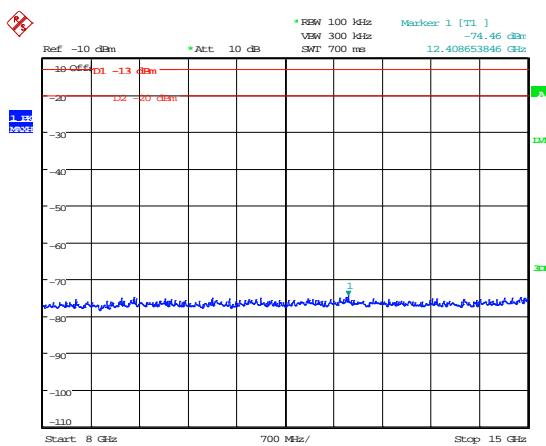

## 1GHz - 8GHz

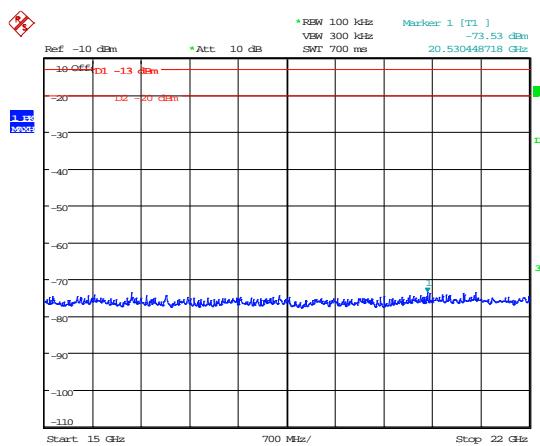


Date: 28.AUG.2013 12:47:53

## 8GHz - 15GHz


Date: 28.AUG.2013 12:47:13

## 15GHz - 22GHz

850 MHz – 849.0 MHz

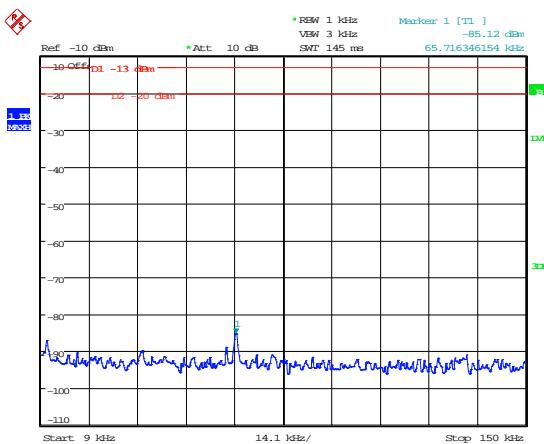


Date: 28.AUG.2013 12:49:06

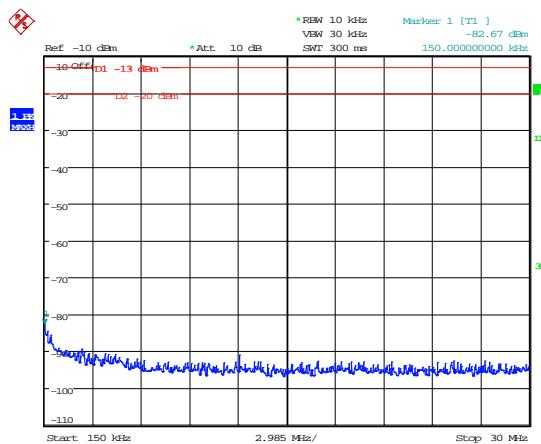


Date: 28.AUG.2013 12:48:28

9kHz - 150kHz

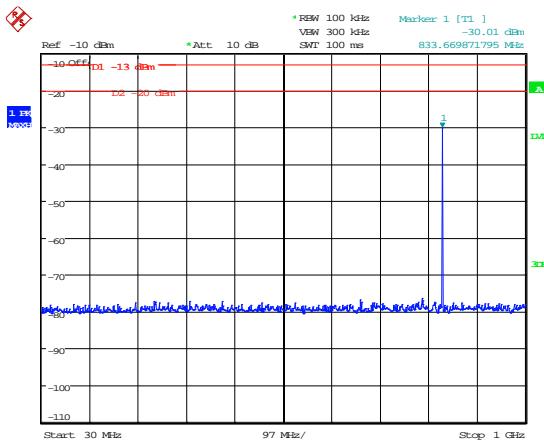


Date: 28.AUG.2013 12:48:13

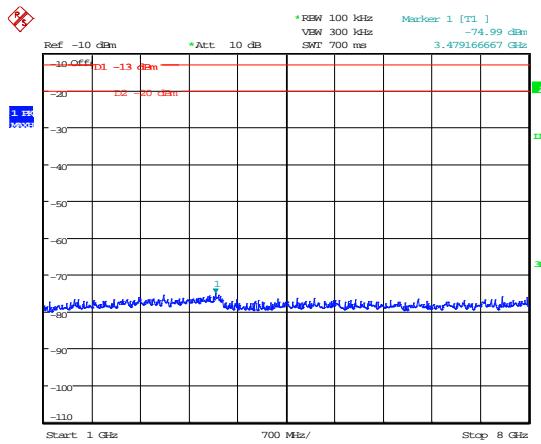


Date: 28.AUG.2013 12:48:03

30MHz – 1GHz

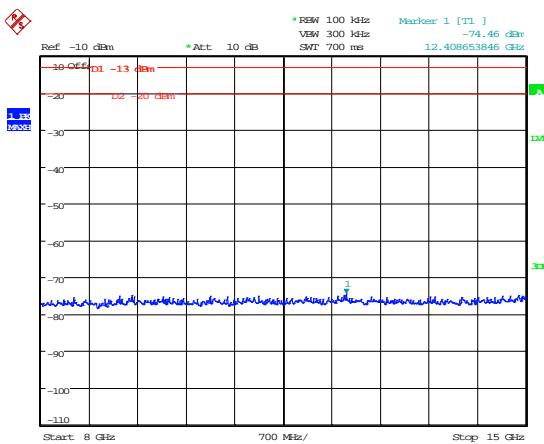

Date: 28.AUG.2013 12:47:53


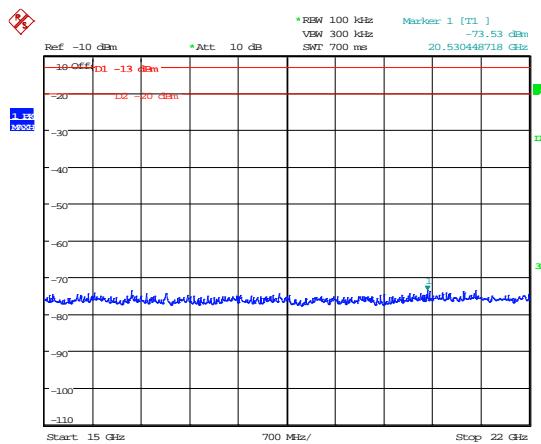


Date: 28.AUG.2013 12:47:13

8GHz – 15GHz


15GHz – 22GHz

## 1800 MHz – 1880.0 MHz

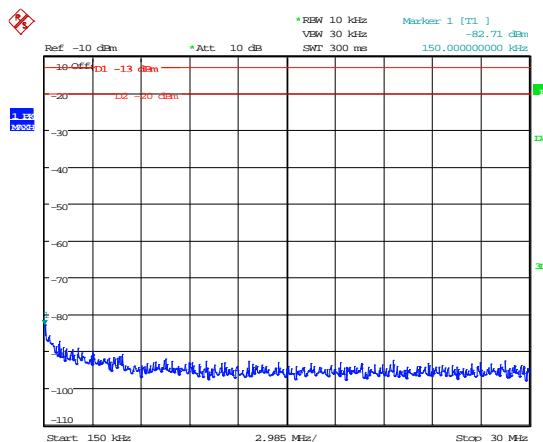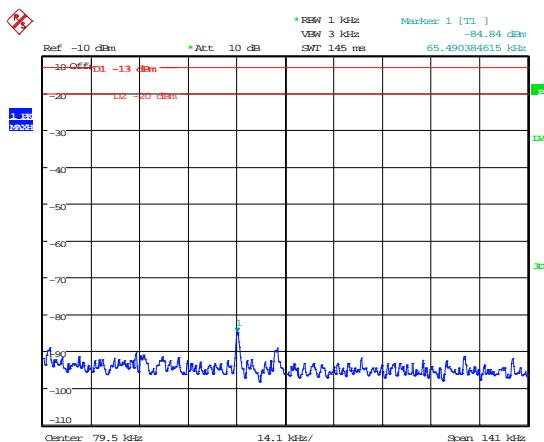


Date: 28.AUG.2013 13:03:57

## 9kHz - 150kHz

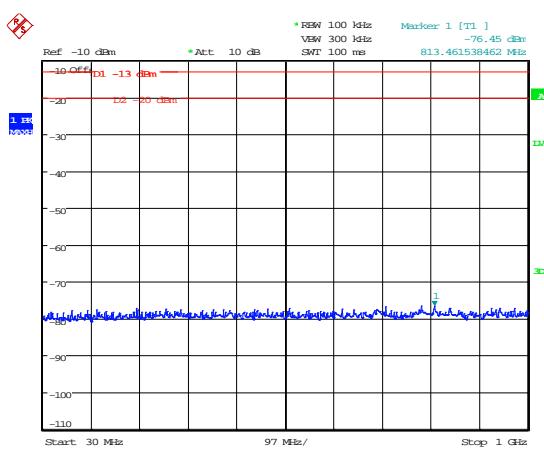


## 150kHz - 30MHz

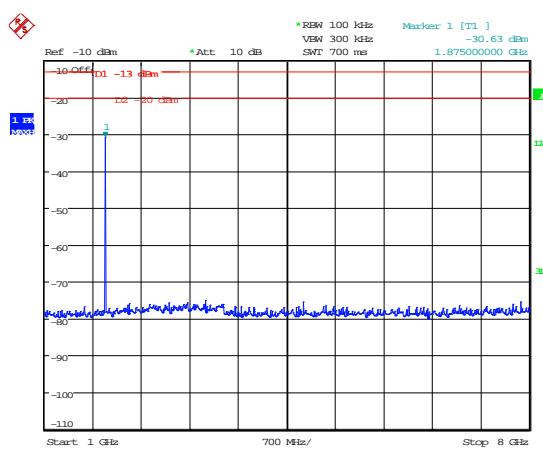


Date: 28.AUG.2013 13:04:20

## 30MHz - 1GHz

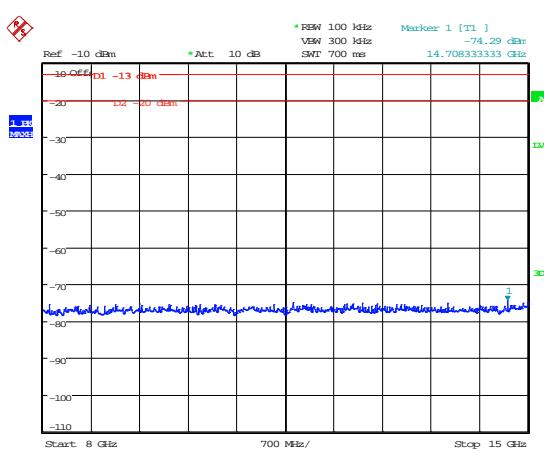

## 1GHz - 8GHz

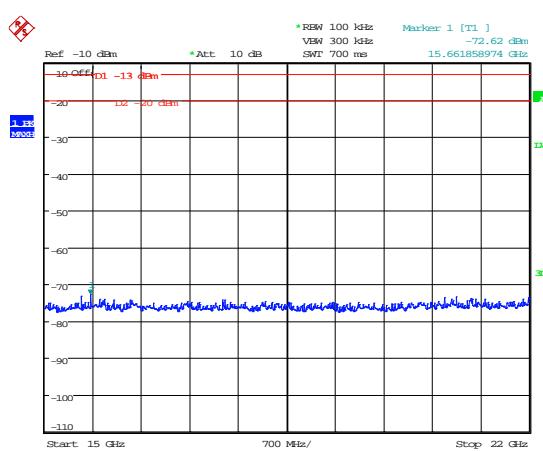



Date: 28.AUG.2013 13:04:50

## 8GHz - 15GHz

Date: 28.AUG.2013 13:05:04


## 15GHz - 22GHz

## 1800 MHz – 1897.5 MHz

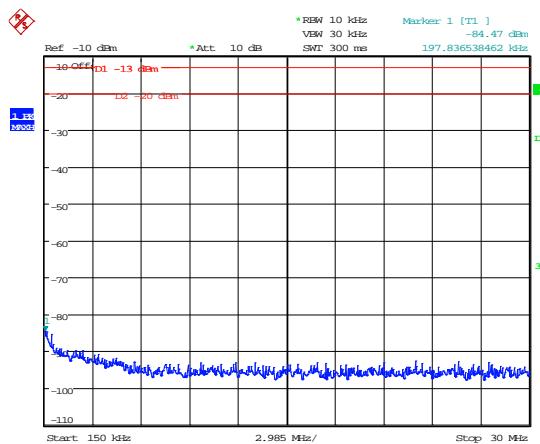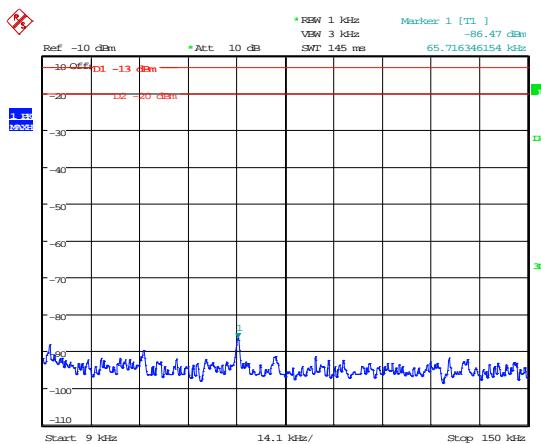


Date: 28.AUG.2013 13:06:24

## 9kHz - 150kHz

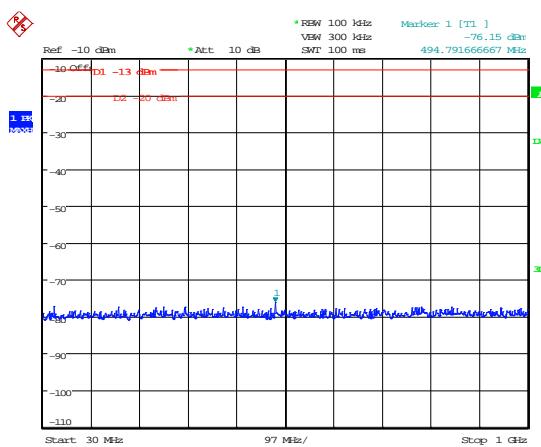


Date: 28.AUG.2013 13:06:11

## 150kHz - 30MHz

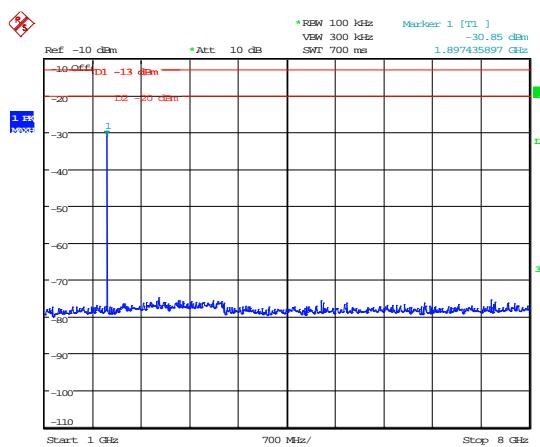


Date: 28.AUG.2013 13:06:03

## 30MHz - 1GHz

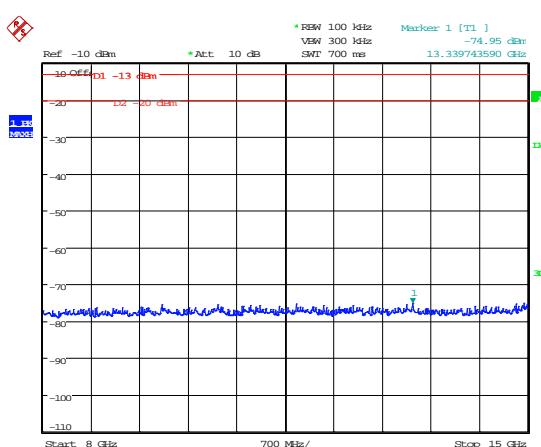

Date: 28.AUG.2013 13:05:48

## 1GHz - 8GHz

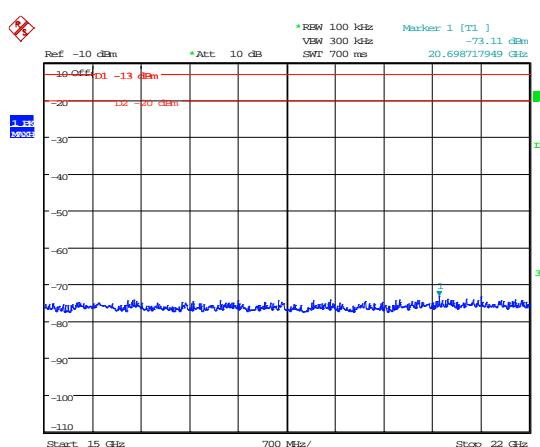



Date: 28.AUG.2013 13:05:33

## 8GHz - 15GHz

Date: 28.AUG.2013 13:05:22


## 15GHz - 22GHz

## 1800 MHz – 1915.0 MHz

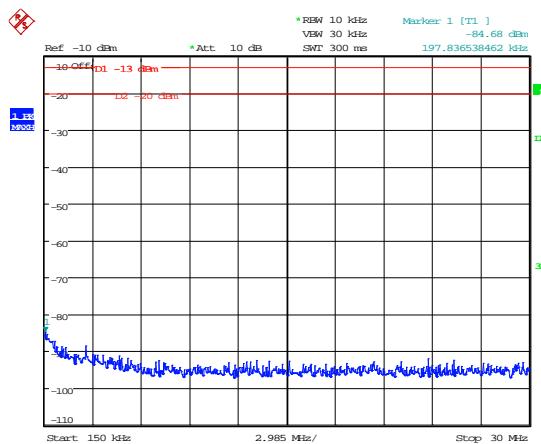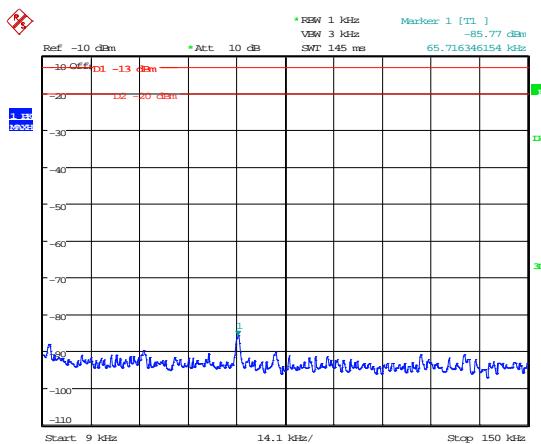


Date: 28.AUG.2013 13:06:42

## 9kHz - 150kHz

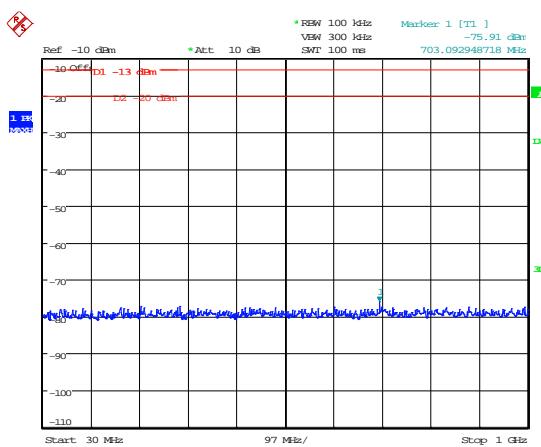


## 150kHz - 30MHz

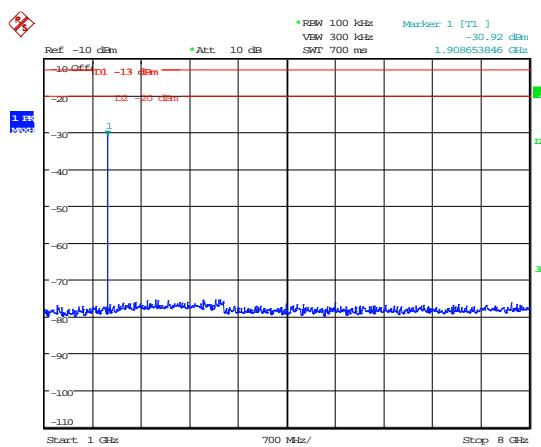


Date: 28.AUG.2013 13:07:15

## 30MHz - 1GHz

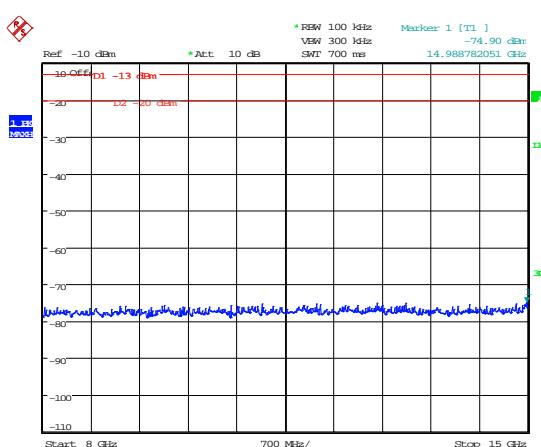

## 1GHz - 8GHz

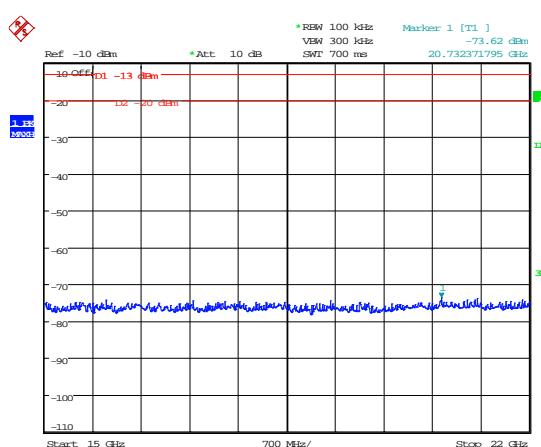

Date: 28.AUG.2013 13:07:42

## 8GHz - 15GHz

Date: 28.AUG.2013 13:07:54

## 15GHz - 22GHz

## A6 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious and harmonic emissions. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

3m alternative test site :  X

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a) 90.691(a)(1) & (2)
Frequency range	30 MHz – 22 GHz
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs	Appendix F

Frequency (MHz)	Freq. of Emission (MHz)	ERP/EIRP (dBm)	Limit (dBm)
850 MHz			
817.000	No Significant Emissions Within	-13	
833.000		-13	
849.000		-13	
1800 MHz			
1850.000	No Significant Emissions Within	-13	
1880.000		-13	
1915.000		-13	

## Result

The EUT was found to comply with the limits

**Notes:**

1. Emissions Checked up to 10 times Fc.
2. The unit was mounted on a turntable and rotated through 360° and in 3 orthogonal planes to find the worst case emission.
3. For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak Detector            RBW = 1MHz; VBW = ≥RBW

4. Limit is determined as the outermost step of the emissions mask and is calculated as follows.

At least  $43 + 10 \log P$  dB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 2.1057.


- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left( \frac{\text{measurement distance}}{\text{specification distance}} \right)$$


- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

## 850 MHz – 817.0 MHz

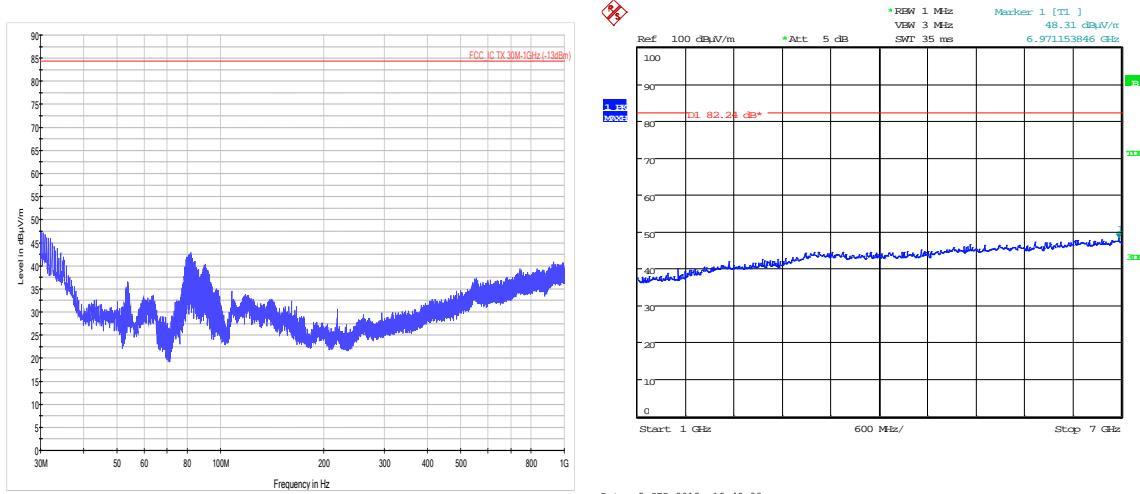


## 30MHz – 1GHz

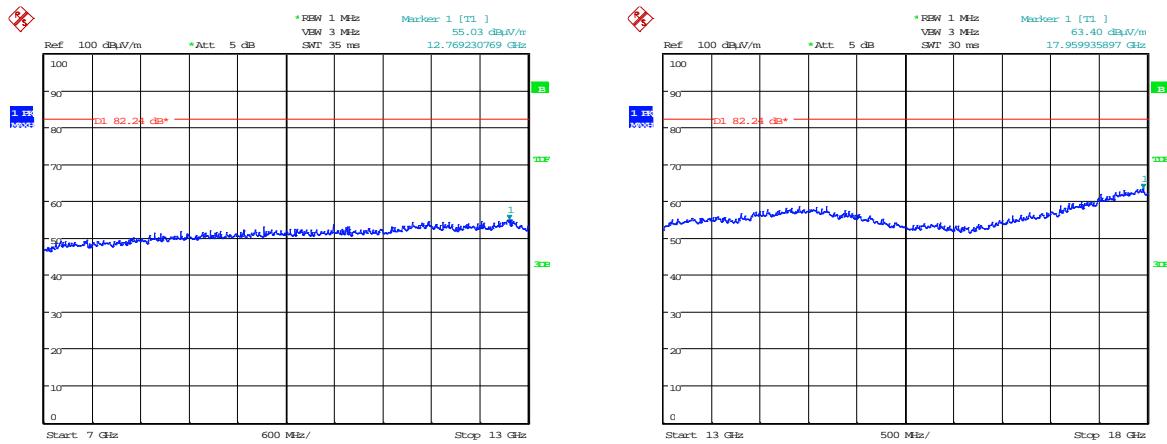


## 7GHz – 13GHz

## 13GHz – 18GHz

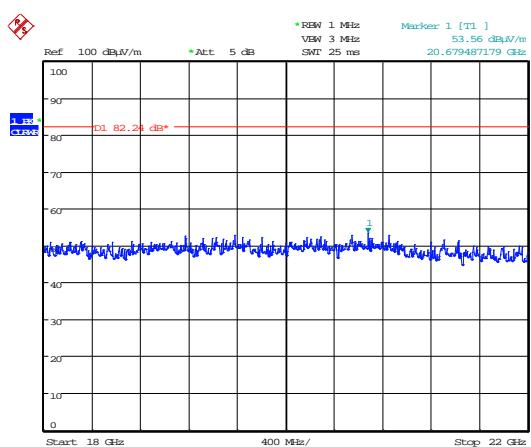


## 18GHz – 22GHz


## 850 MHz – 833.0 MHz

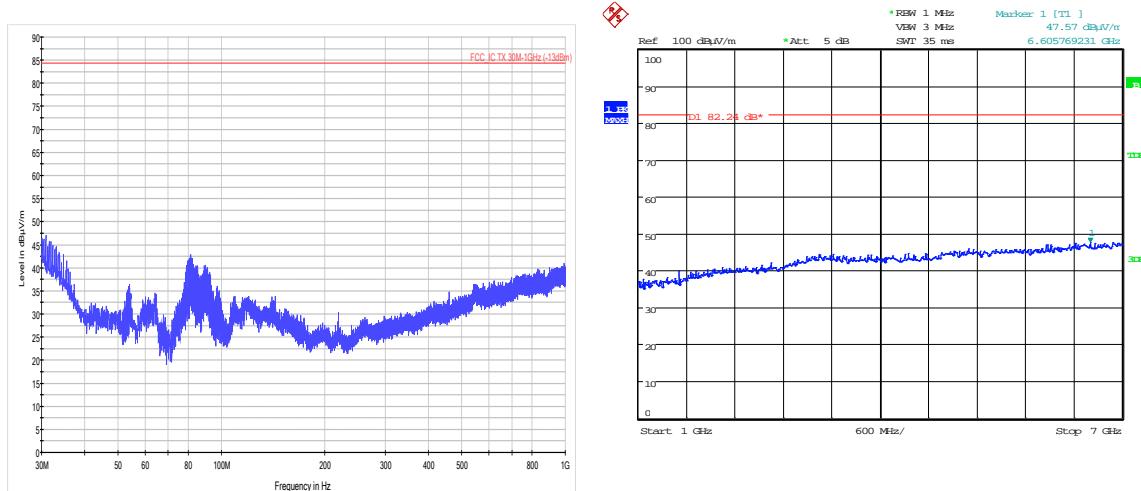


## 30MHz – 1GHz

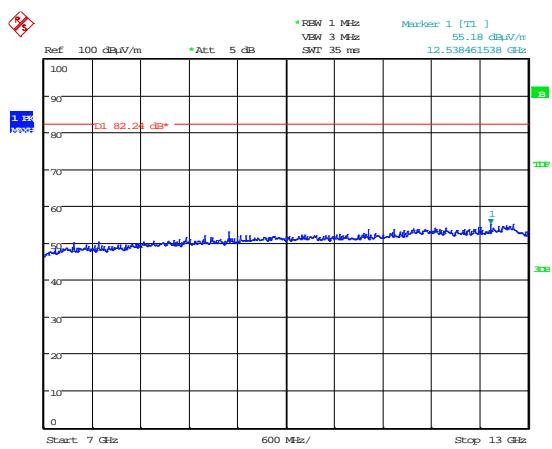

## 1GHz – 7GHz

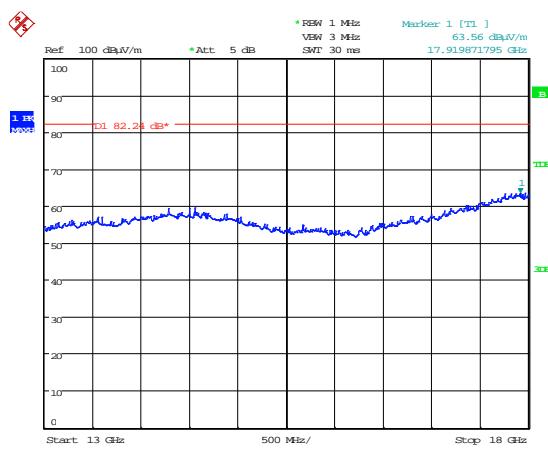


## 7GHz – 13GHz

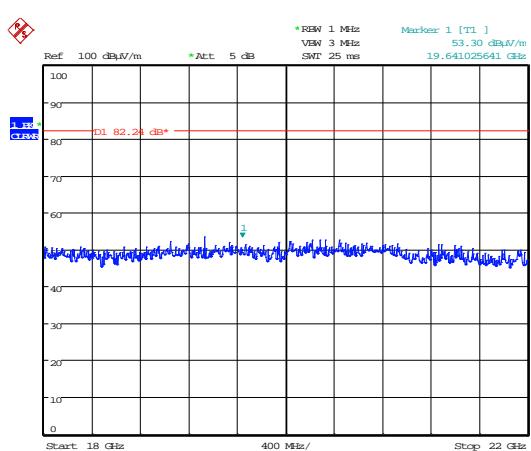


## 18GHz – 22GHz


## 850 MHz – 849.0 MHz

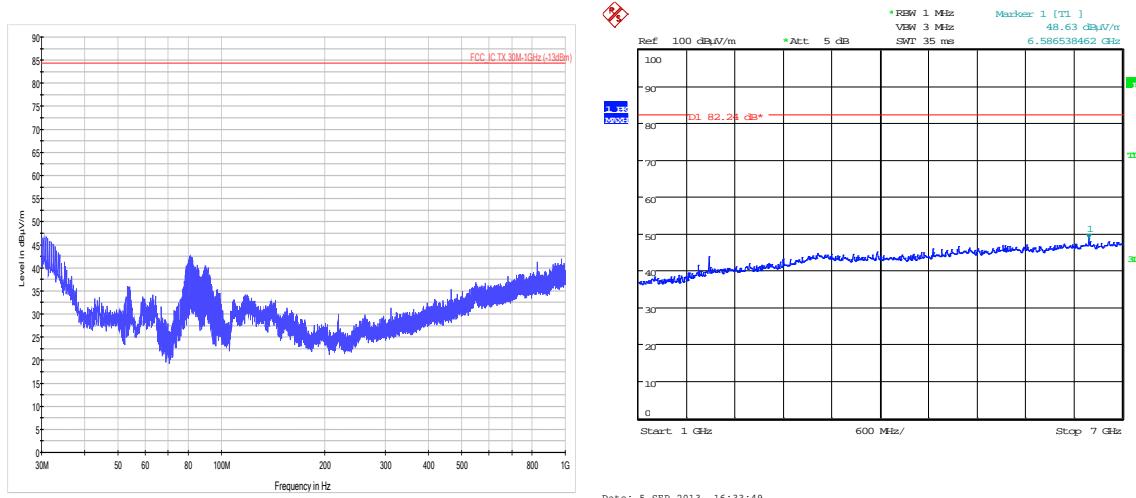


## 30MHz – 1GHz

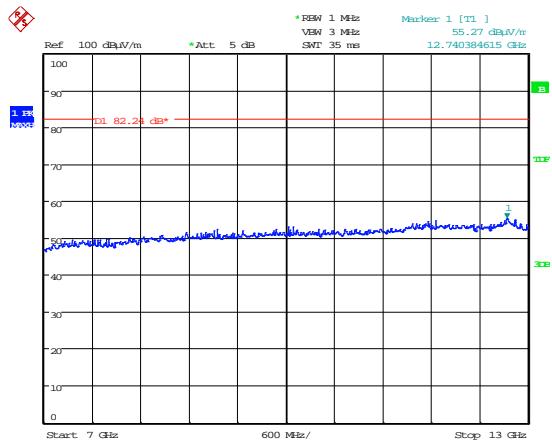

## 1GHz – 7GHz

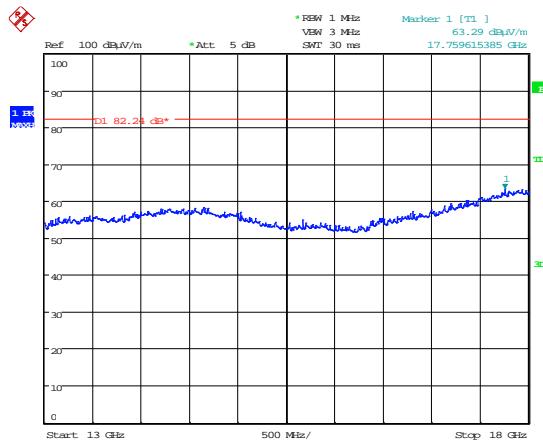


## 7GHz – 13GHz

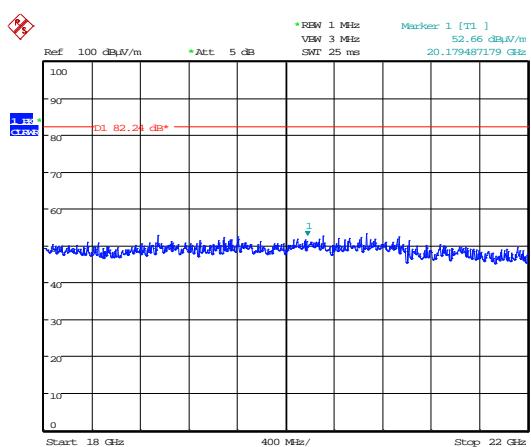


## 13GHz – 18GHz

18GHz – 22GHz

## 1800 MHz – 1880.0 MHz

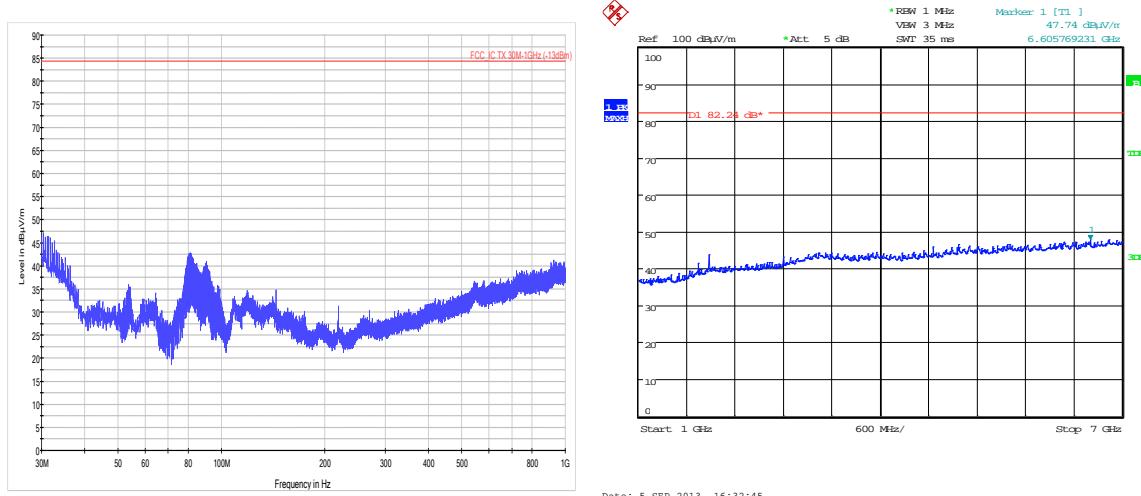


## 30MHz – 1GHz

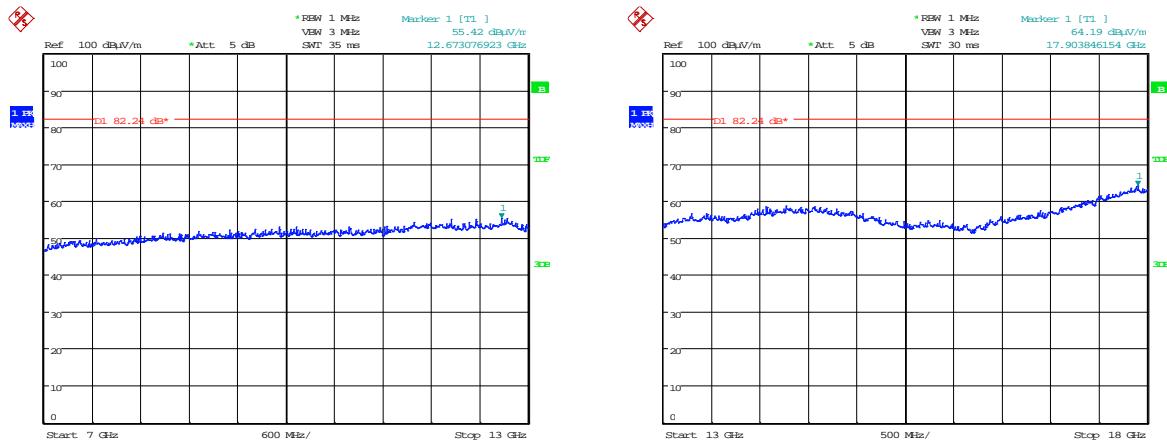


## 7GHz – 13GHz

## 13GHz – 18GHz

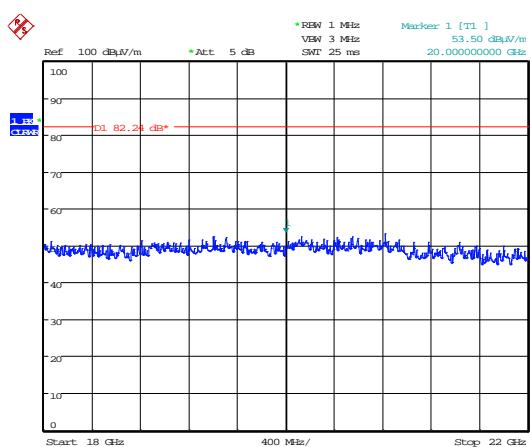


## 18GHz – 22GHz


## 1800 MHz – 1897.5 MHz

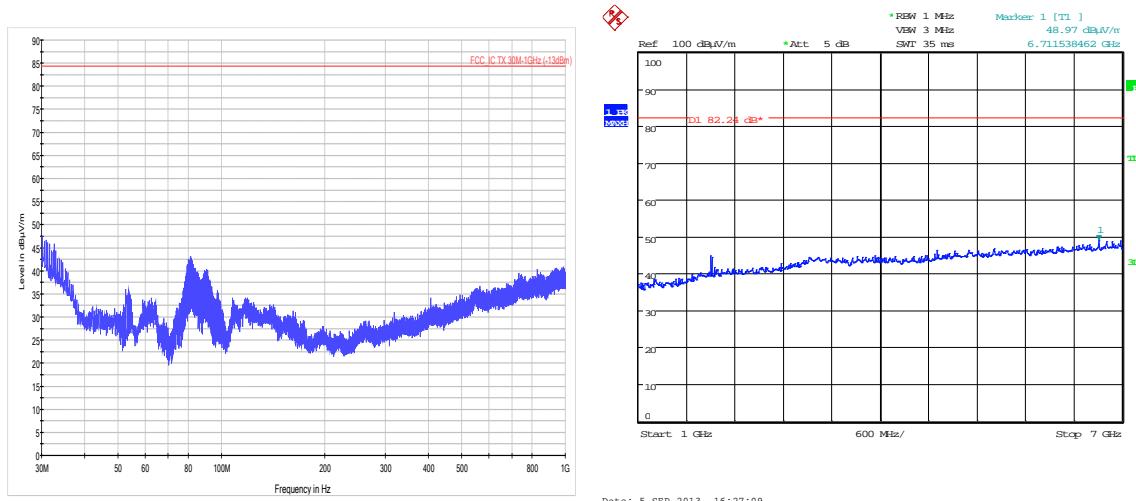


## 30MHz – 1GHz

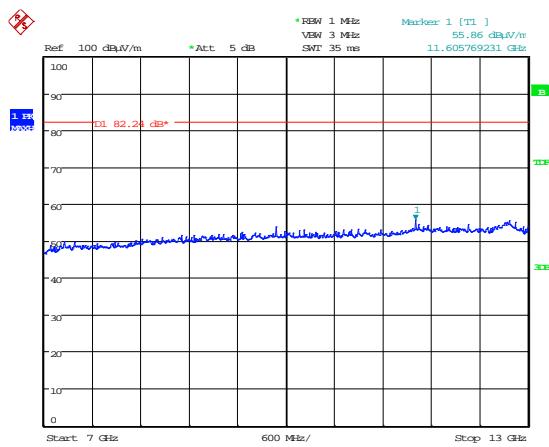

## 1GHz – 7GHz

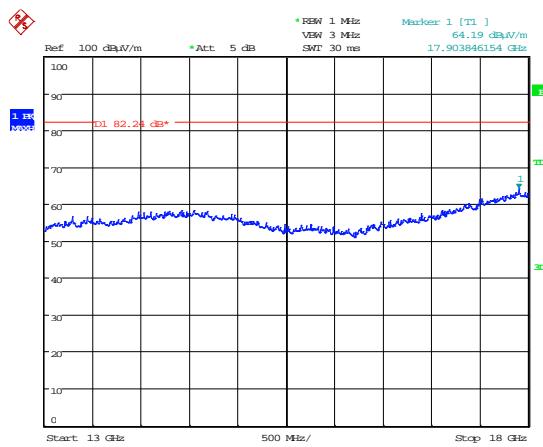


## 7GHz – 13GHz

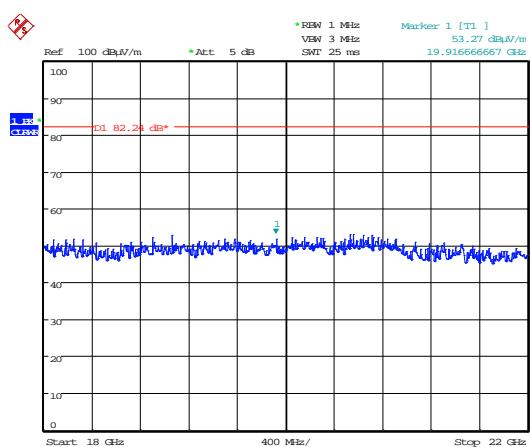


## 18GHz – 22GHz

## 1800 MHz – 1915.0 MHz

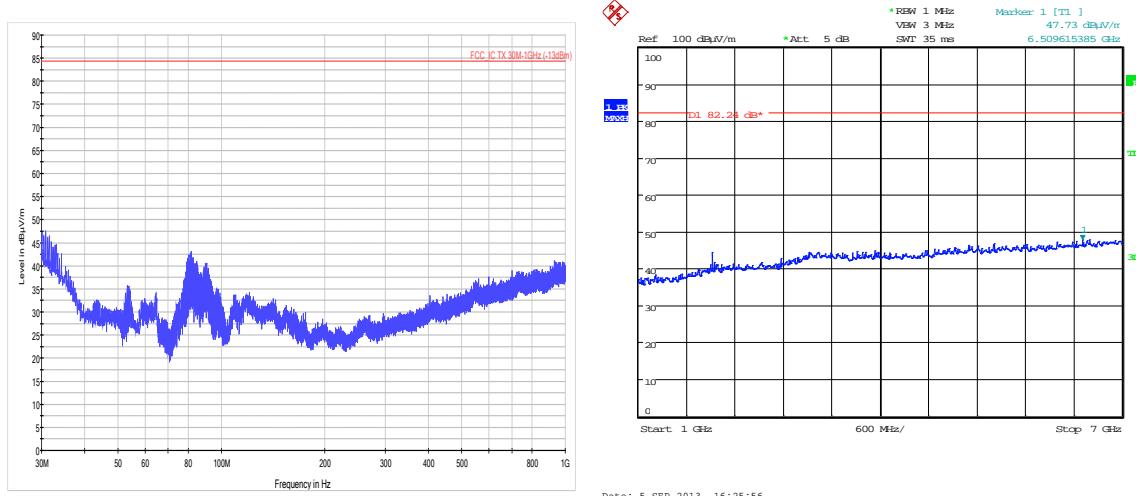


## 30MHz – 1GHz

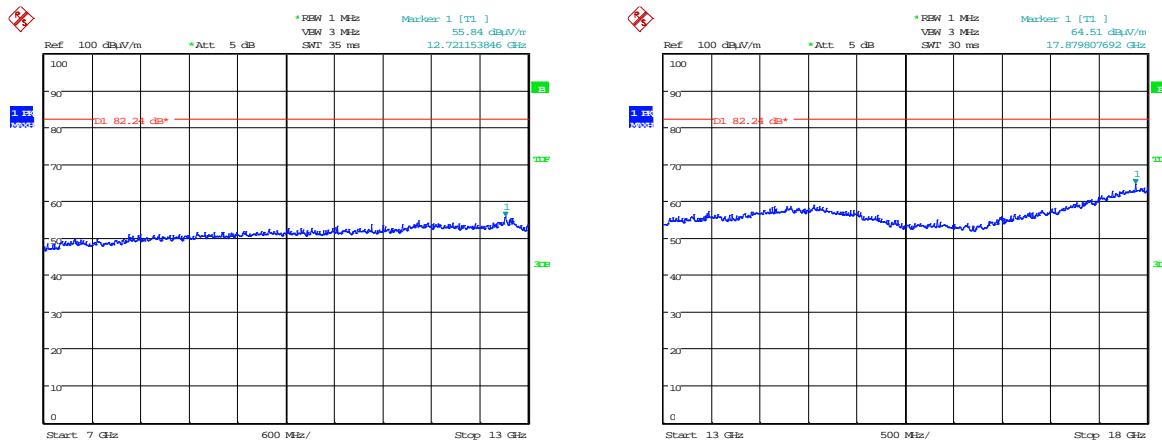

## 7GHz – 13GHz

## 13GHz – 18GHz

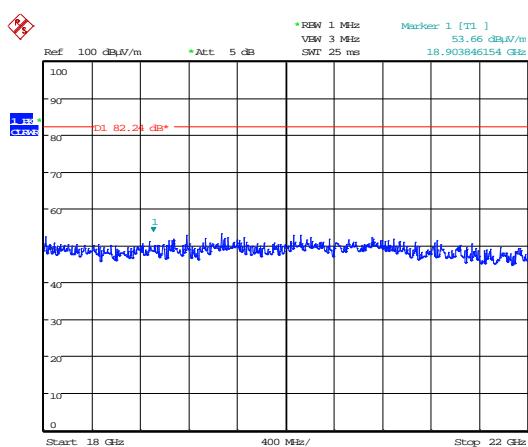


## 18GHz – 22GHz

## A7 Passband Gain & Bandwidth

Test Details:	
Measurement standard	D.3 Policies + Procedures (k) of KDB 935210 D02 Signal Boosters Certification v02
EUT sample number	S03
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

BAND	Frequency MHz	f <sub>l</sub>	f <sub>h</sub>	20 dB Bandwidth
850 MHz	824 - 849 MHz	809.923077 MHz	852.871795 MHz	42.948 MHz
SMR 800 (Sprint)	817 – 824 MHz			

See below for plots showing passband gain & bandwidth

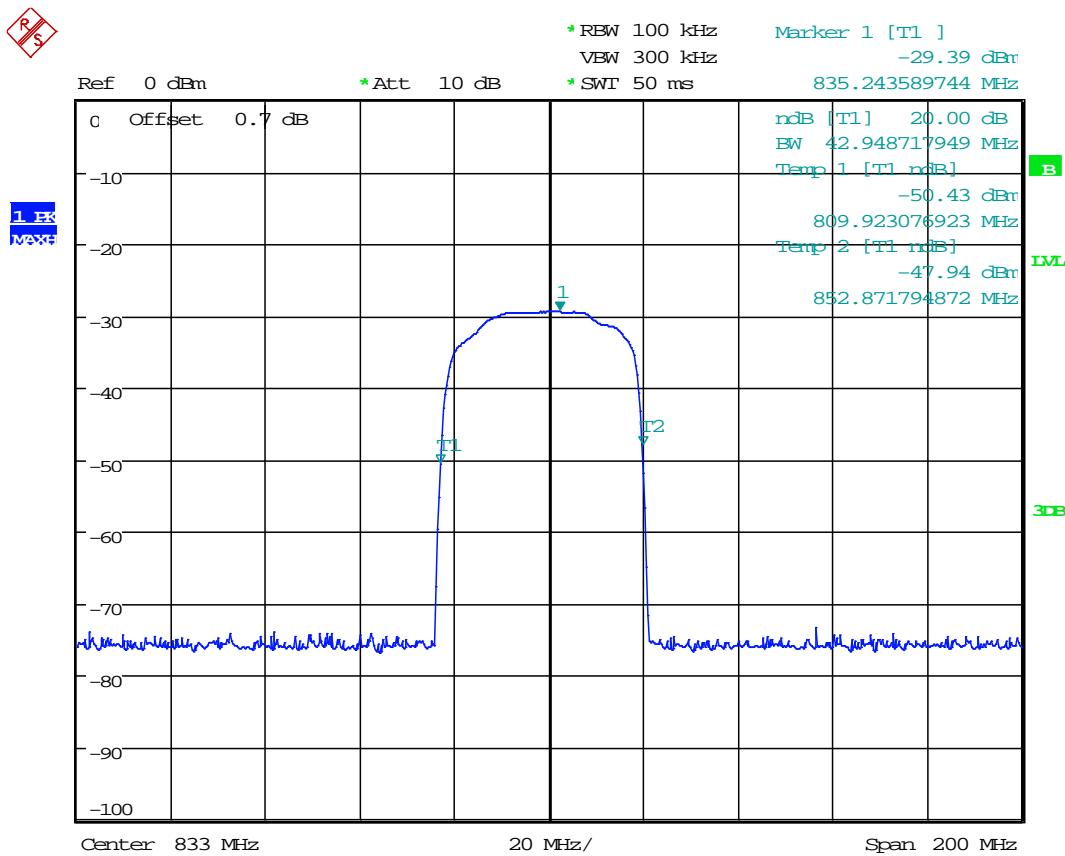

**Appendix B:****Downlink Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

**B1 RF Gain and Output Power**


<b>Test Details:</b>	
Measurement standard	Title 47 of the CFR: Part 2.1046,22.913(a), 24.232(a), 90.205(k)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
Temperature	23°C
Humidity	46%
EUT set up	Refer to Appendix C

Frequency (MHz)	Signal Generator input level (dBm)	Input Cable Loss (dB)	Input Level (dBm)	Level at Spectrum Analyser (dBm)	Output Cable & Attenuator loss (dB)	Gain (dB)	Conducted Output Power (dBm)	Gain after 10dB input level increase (dB)
850 MHz								
862.000	4.70	0.47	4.23	-2.96	26.5	19.31	23.54	9.37
878.000	4.00	0.47	3.53	-2.70	26.5	20.27	23.80	10.27
894.000	5.70	0.47	5.23	-5.75	26.5	15.52	20.75	5.52
1900 MHz								
1930.000	6.00	0.78	5.22	-5.32	27.0	16.47	21.69	6.55
1962.500	4.50	0.78	3.72	-7.22	27.0	16.07	19.79	6.11
1995.000	7.90	0.78	7.12	-4.77	27.0	15.12	22.24	5.18

Notes: 1.The signal generator input was increased by 10dBs and the level of the output signal remeasured.

## B2 Amplifier Intermodulation Spurious Emissions

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a) 90.691(a)(1) & (2)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

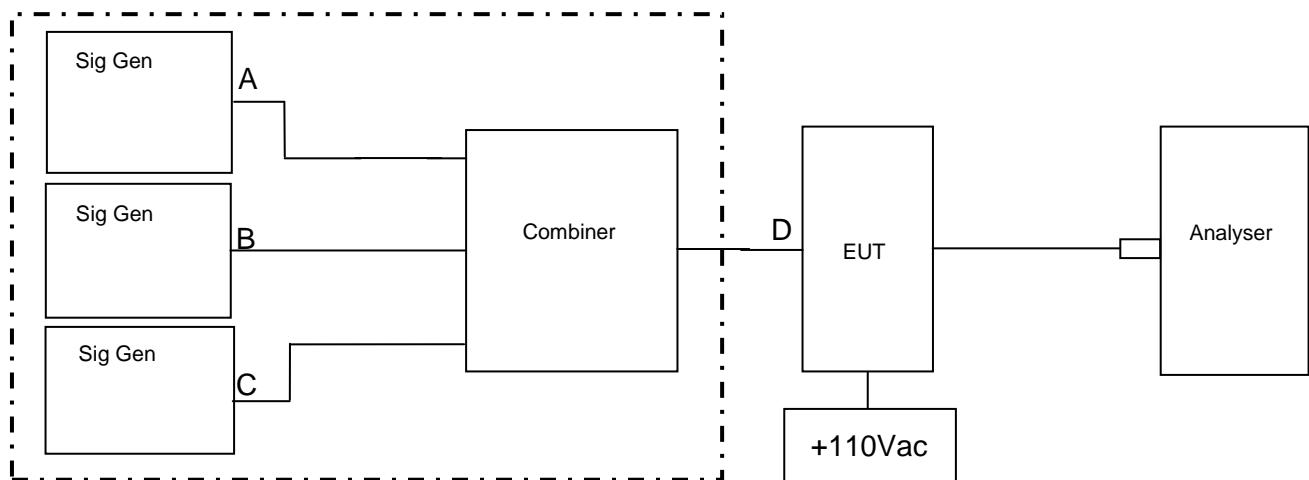

RF Input Frequency (MHz)			Highest Intermodulation Product Level (dBm)	Limit (dBm)
850MHz				
862.000	872.631	894.000	-22.94 dBm @ 883.368 MHz	-13
1900 MHz				
1930.000	1951.602	1995.000	-26.29 dBm @ 1973.397 MHz	-13


Sweep data is shown on the next page:

## Results

The EUT was found to comply with the limits

See plots below


## 850 MHz Intermodulation Close View

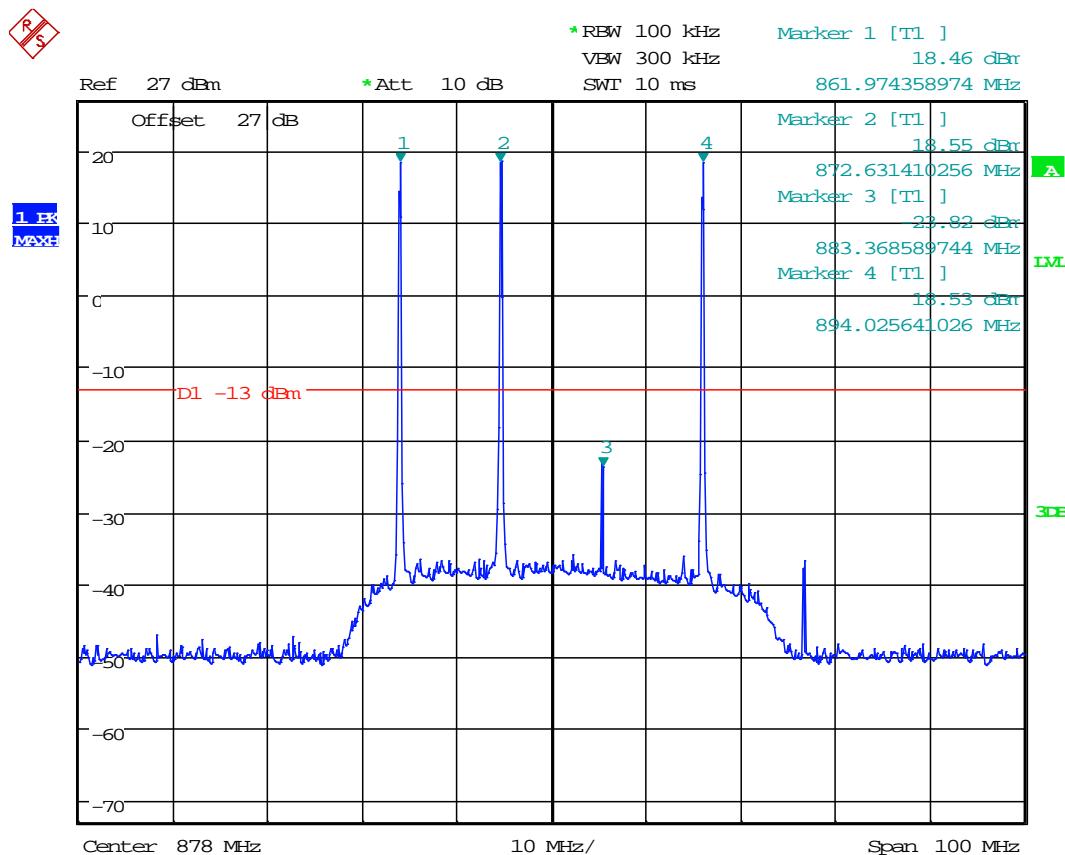

Date: 25.OCT.2013 11:44:29

The above plots show that there are no products over the spurious limit.

## 850 MHz Intermodulation

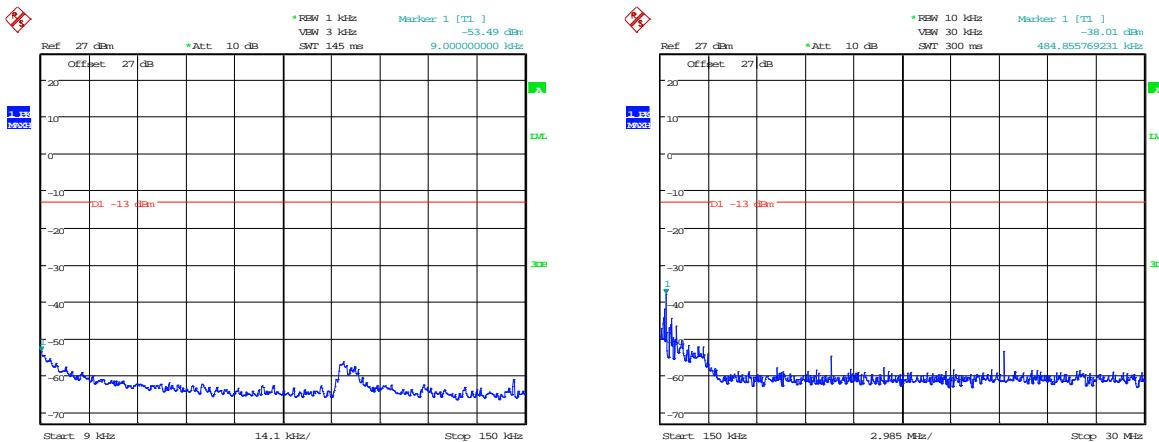


Date: 25.OCT.2013 11:48:41

Date: 25.OCT.2013 11:56:34

### 9 – 150kHz

### 150kHz – 30MHz

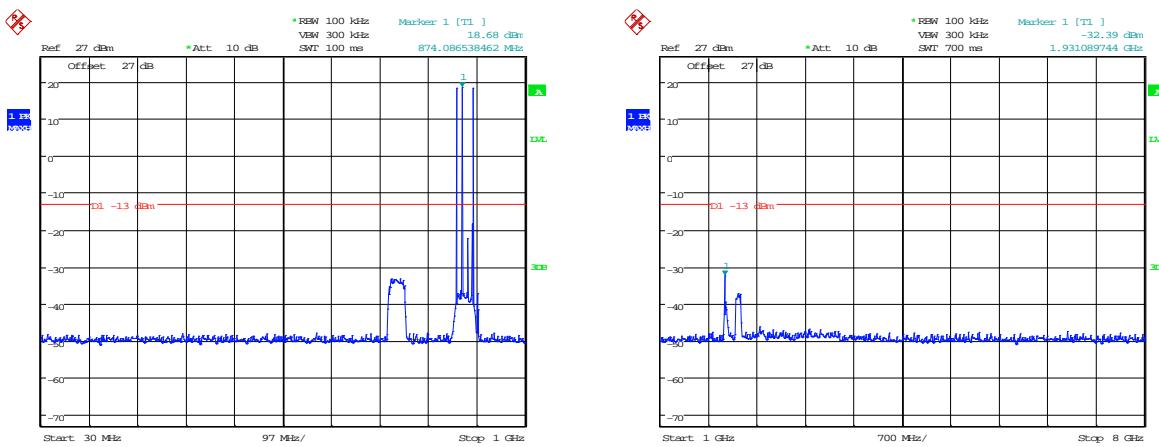


Date: 25.OCT.2013 11:44:57

Date: 25.OCT.2013 11:45:14

### 30MHz – 1GHz

### 1GHz – 8GHz

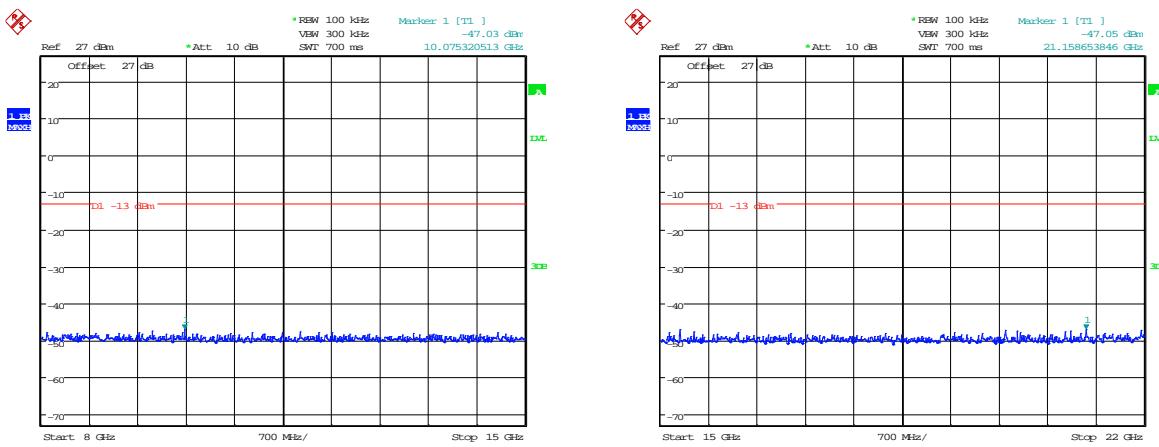


Date: 25.OCT.2013 11:45:29

Date: 25.OCT.2013 11:56:52

### 8GHz – 15GHz

### 15GHz – 22GHz



## 1900 MHz Intermodulation Close View

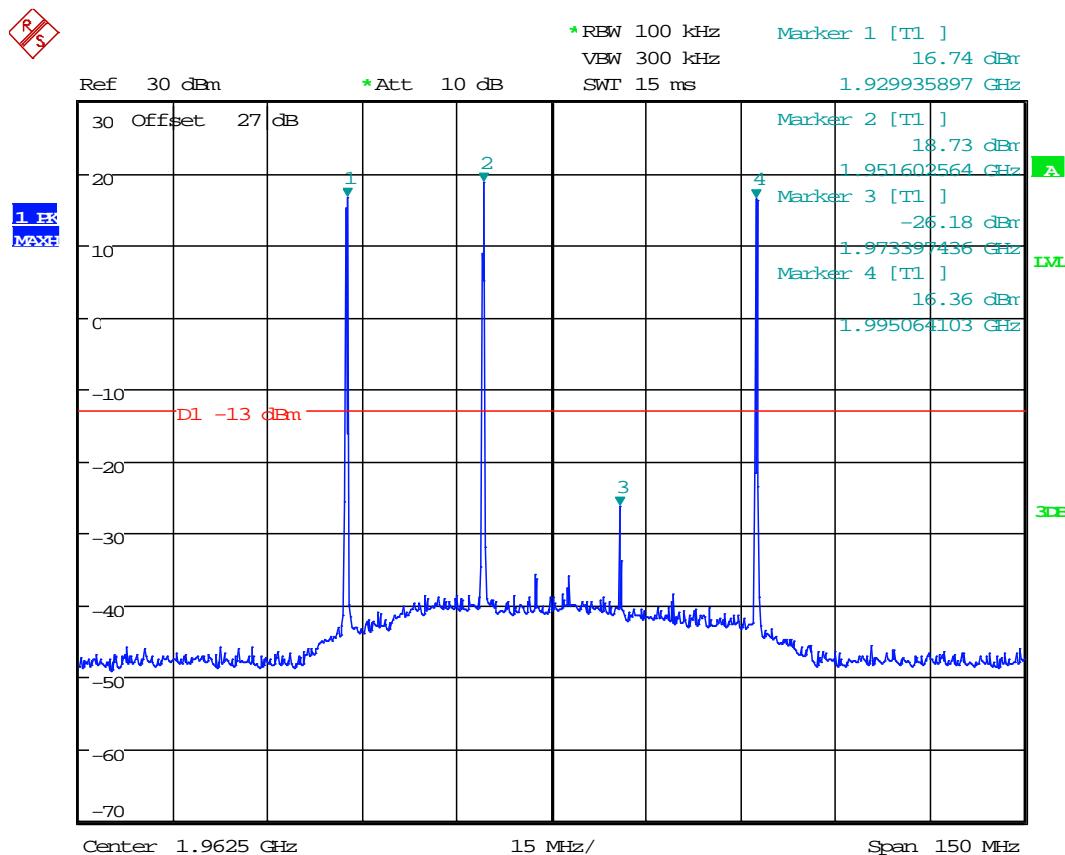

Date: 25.OCT.2013 12:04:37

The above plots show that there are no products over the spurious limit.

## 1900 MHz Intermodulation

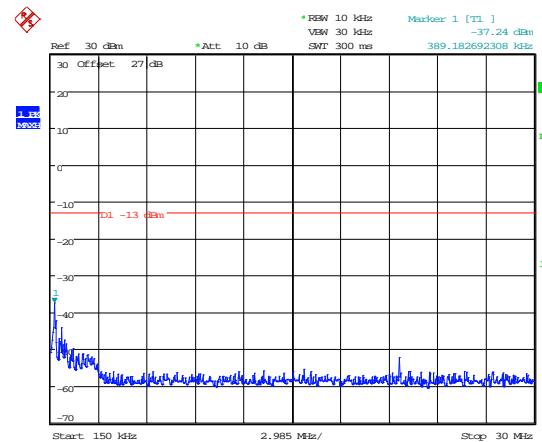
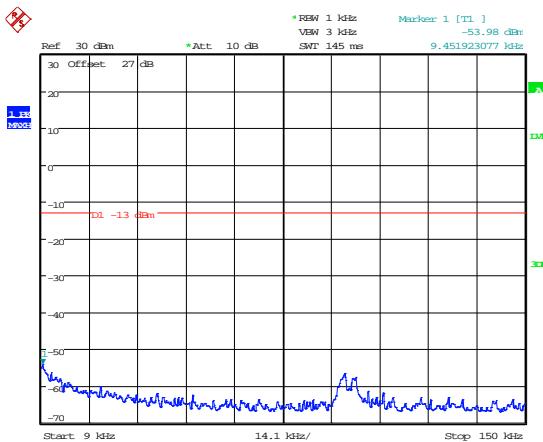


Date: 25.OCT.2013 12:07:02

Date: 25.OCT.2013 12:07:16

## 9 – 150kHz

## 150kHz – 30MHz

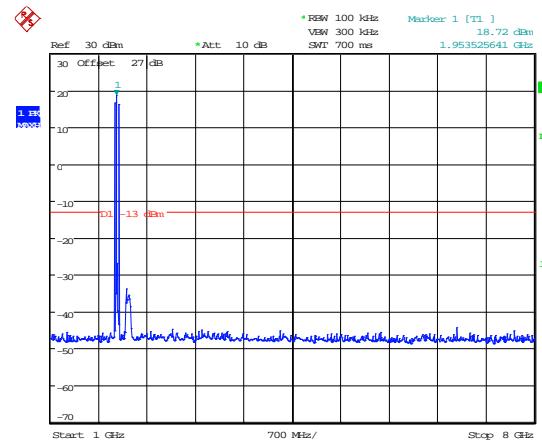
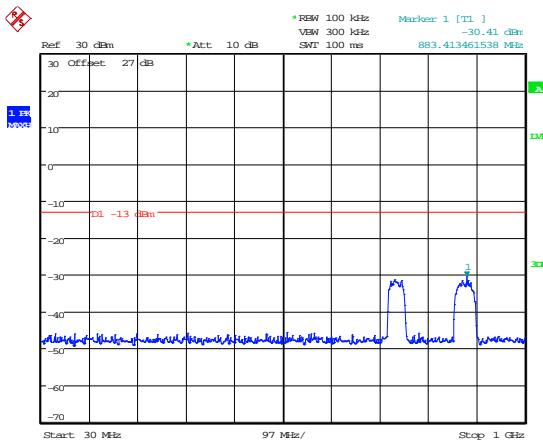


Date: 25.OCT.2013 12:17:26

Date: 25.OCT.2013 12:04:51

## 30MHz – 1GHz

## 1GHz – 8GHz

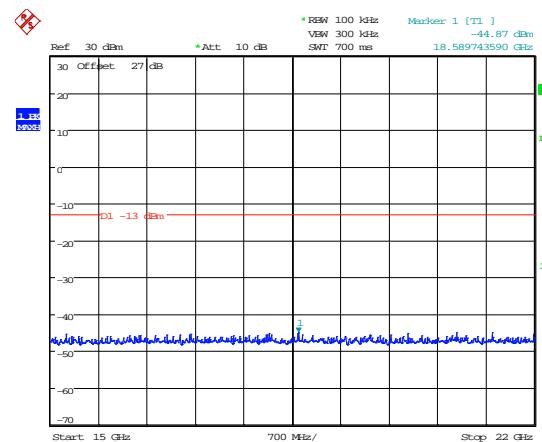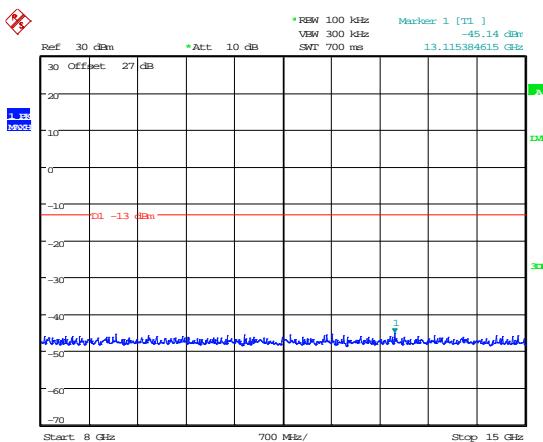

Date: 25.OCT.2013 12:05:05

Date: 25.OCT.2013 12:05:23

## 8GHz – 15GHz



## 15GHz – 22GHz

**B3 Amplifier Modulated Channel Test**

<b>Test Details:</b>	
Measurement standard	D.3 Policies + Procedures (j) of KDB 935210 D02 Signal Boosters Certification v02
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C


Frequency Of Operation Channel	Modulation Type				
	CDMA	GSM	WCDMA	LTE 1.4 MHz	LTE 20.0 MHz
862.000	1.272 MHz	245.192 kHz	4.153 MHz	1.089 MHz	17.868 MHz
878.000	1.266 MHz	245.192 kHz	4.173 MHz	1.089 MHz	17.908 MHz
894.000	1.275 MHz	246.794 kHz	4.173 MHz	1.089 MHz	17.908 MHz
1930.000	1.272 MHz	246.794 kHz	4.163 MHz	1.089 MHz	17.868 MHz
1962.500	1.266 MHz	245.192 kHz	4.182 MHz	1.089 MHz	17.868 MHz
1995.000	1.272 MHz	245.192 kHz	4.173 MHz	1.086 MHz	17.828 MHz

## CDMA Modulation

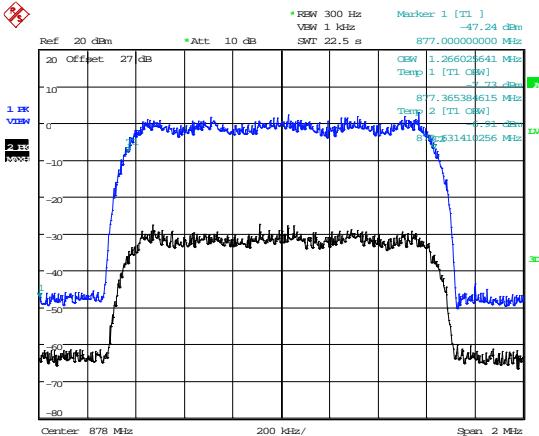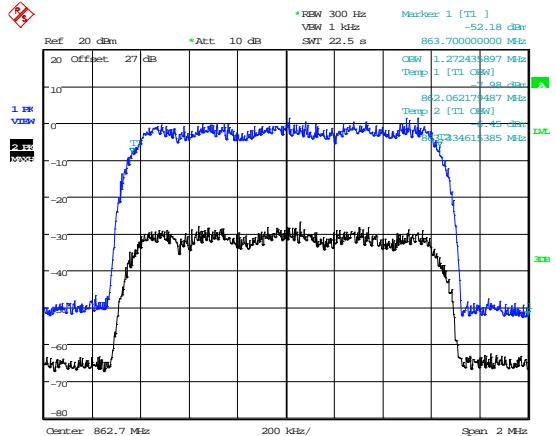


Date: 23.OCT.2013 15:15:38

## 862.0 MHz

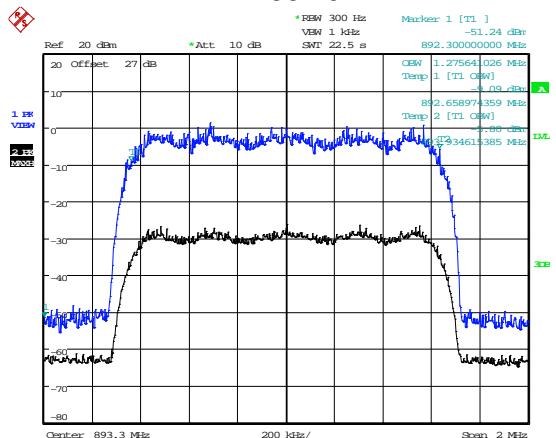


Date: 23.OCT.2013 14:54:18

## 878.0 MHz

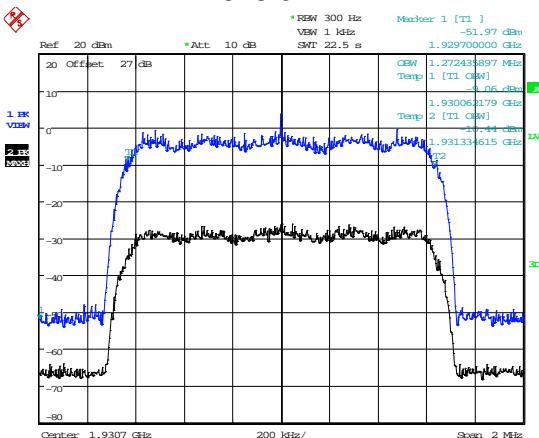


Date: 23.OCT.2013 15:11:31

## 894.0 MHz

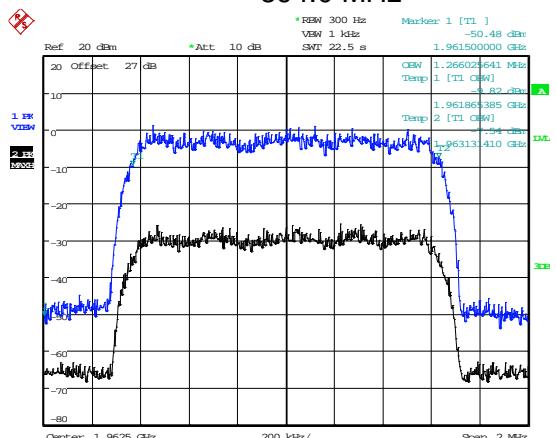

Date: 23.OCT.2013 15:40:10

## 1930.0 MHz

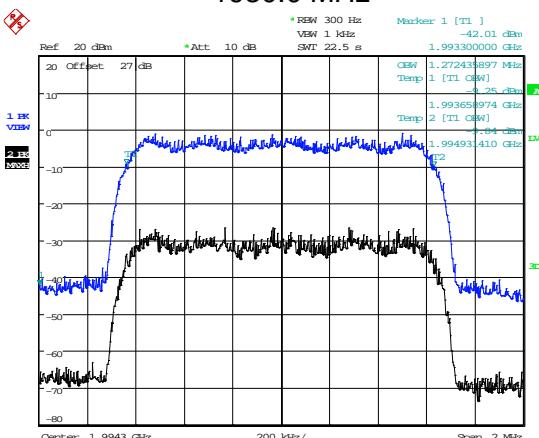

Date: 23.OCT.2013 15:41:54







## 1962.5 MHz

Date: 23.OCT.2013 15:48:13

## 1995.0 MHz


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

## GSM Modulation

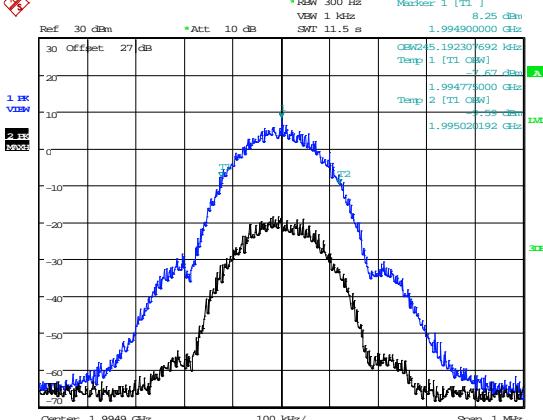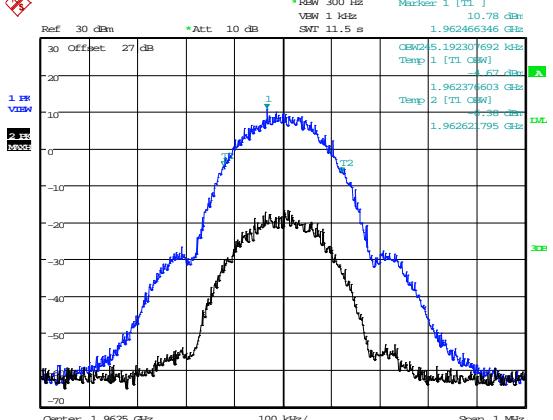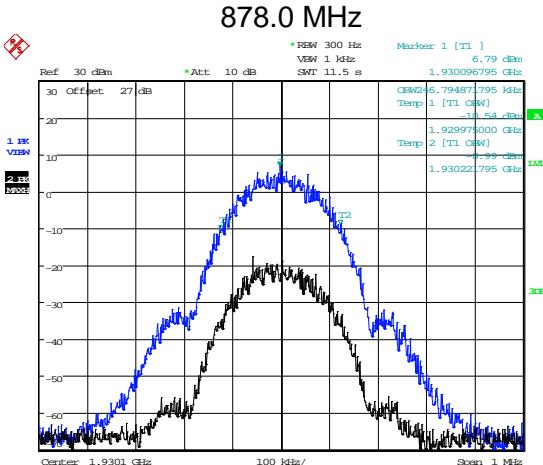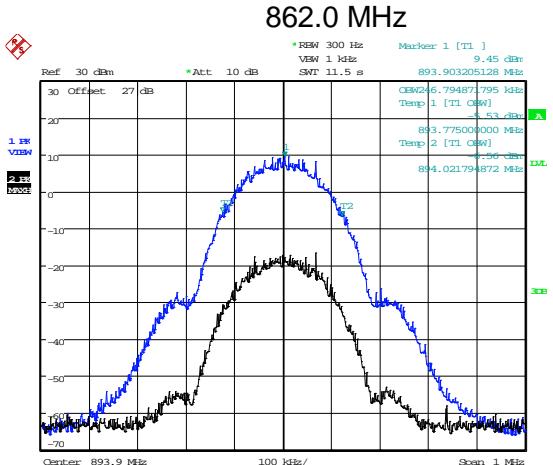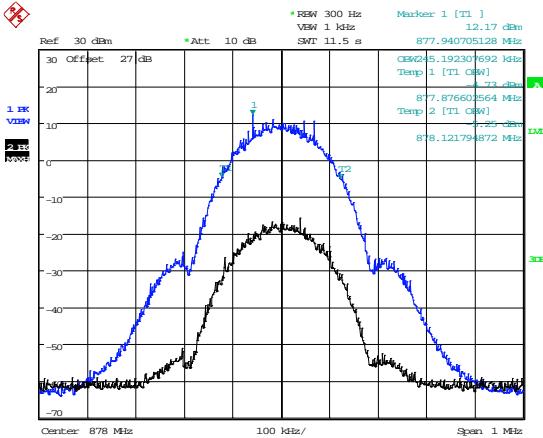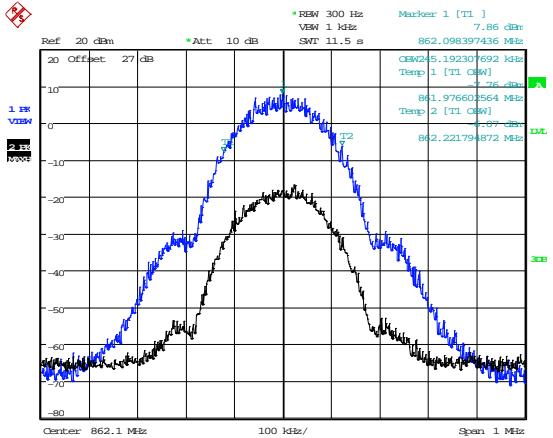


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.


## WCDMA Modulation

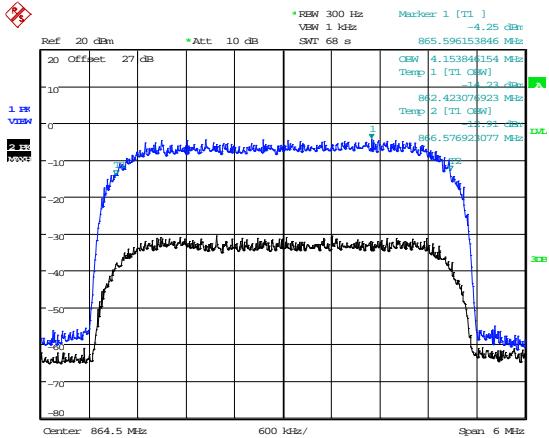


Date: 24.OCT.2013 09:15:45

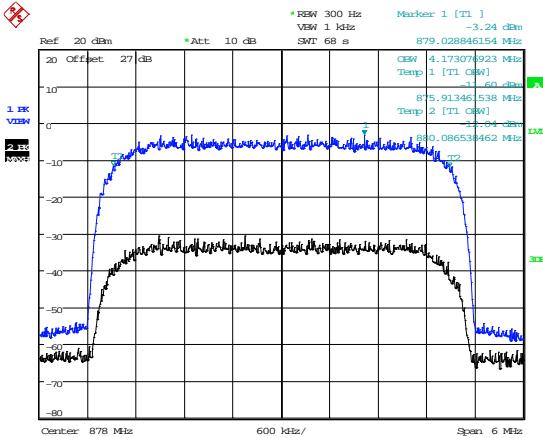


Date: 24.OCT.2013 09:06:14

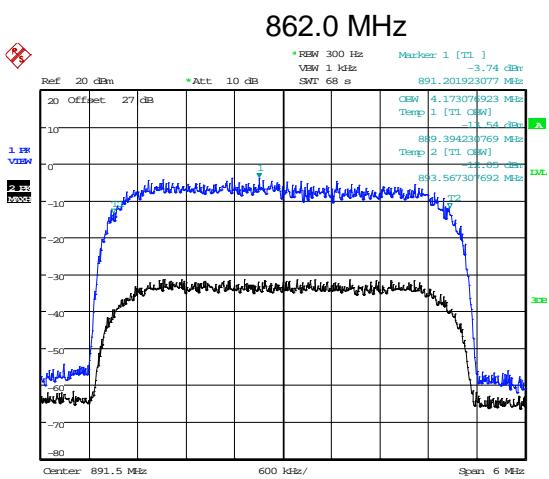


Date: 24.OCT.2013 08:58:38

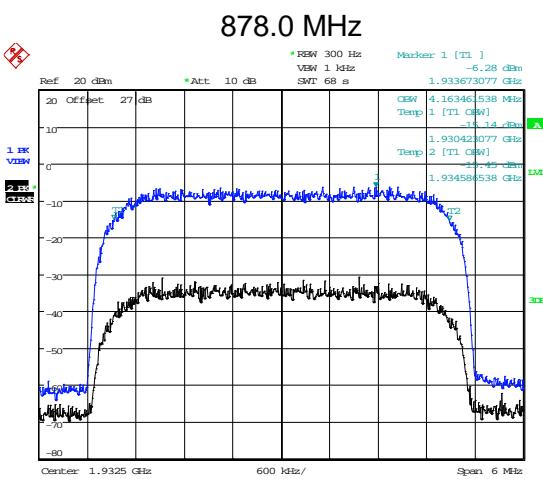

Date: 24.OCT.2013 08:52:41

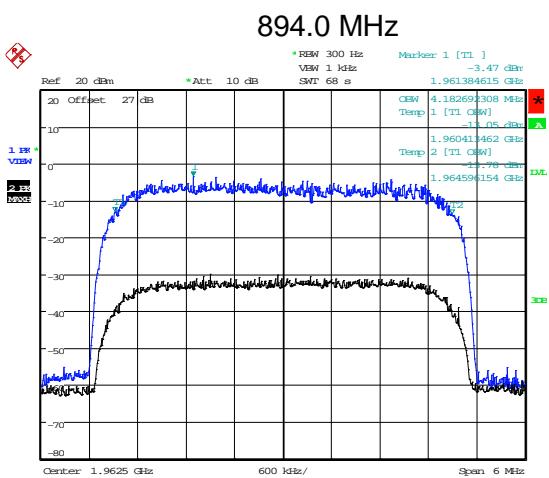

Date: 23.OCT.2013 16:56:10

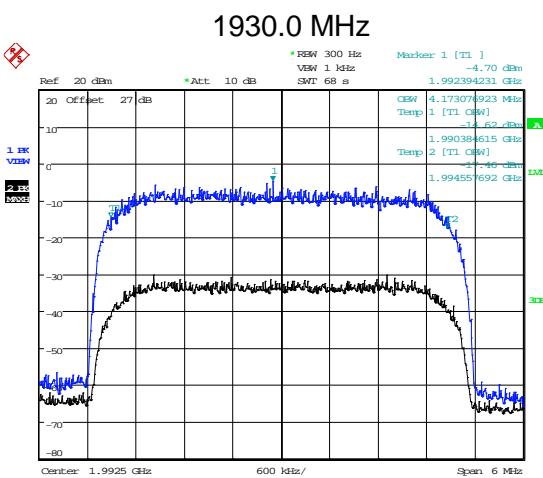



Date: 23.OCT.2013 16:44:45

## 1962.5 MHz

## 1995.0 MHz



The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

## 1.4 MHz LTE Modulation

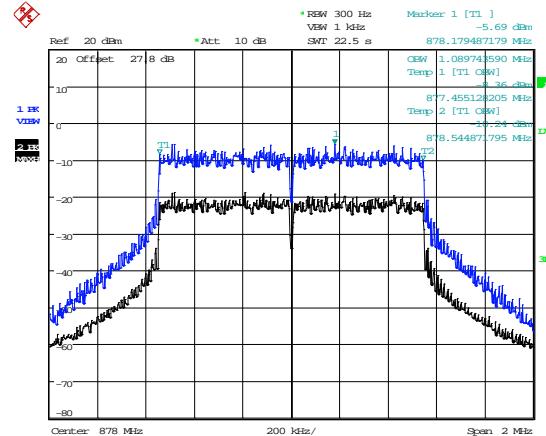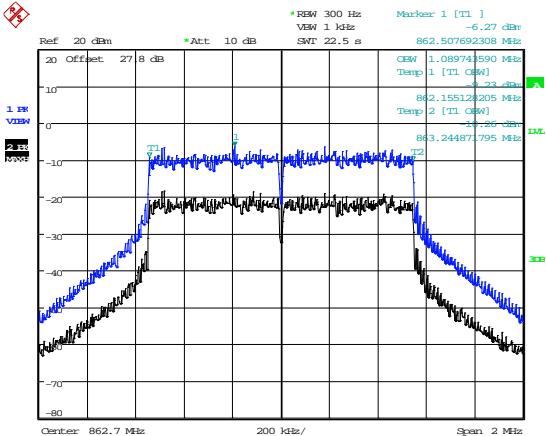

Date: 5.NOV.2013 12:05:38



862.0 MHz

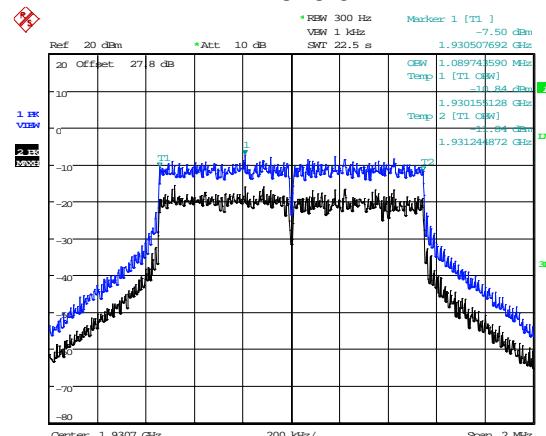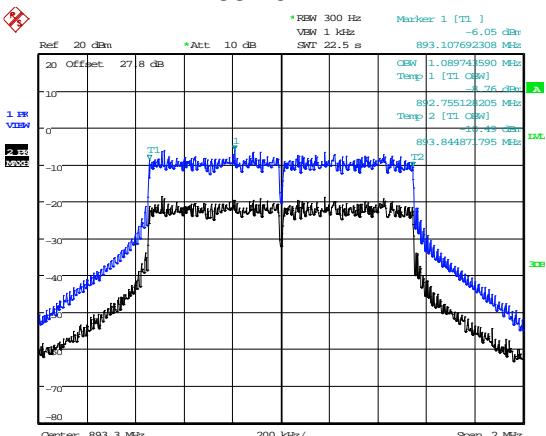

Date: 5.NOV.2013 12:29:03

Date: 5.NOV.2013 12:35:43

894.0 MHz

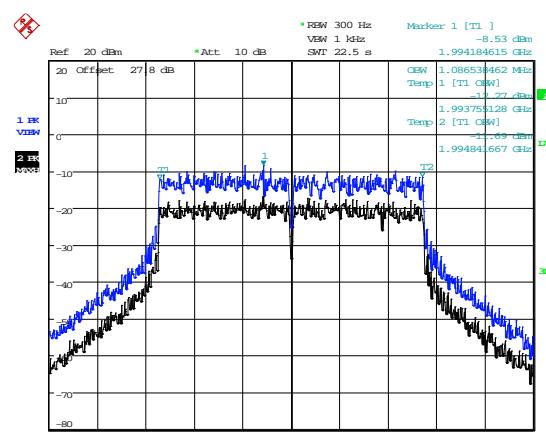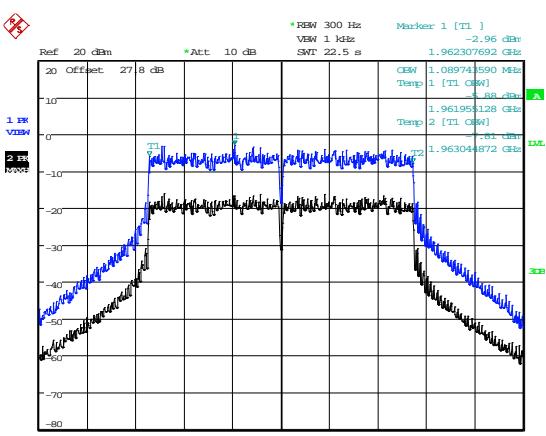

Date: 5 NOV 2013 12:42:18



Date: 5 NOV 2013 12:43:39

1962.5 MHz

1995.0 MHz


The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

## 20.0 MHz LTE Modulation

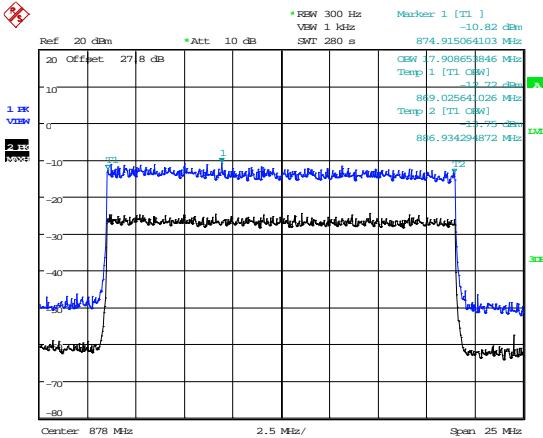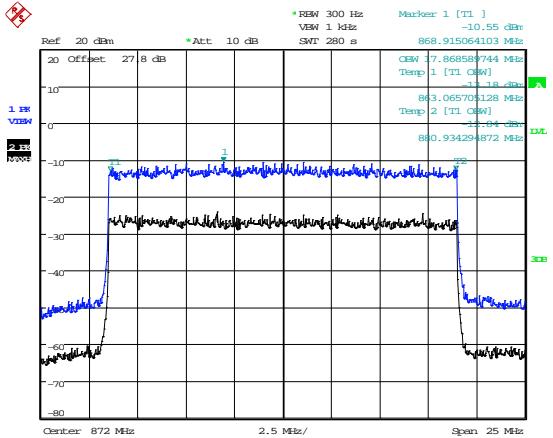


Date: 5.NOV.2013 16:48:36

## 862.0 MHz

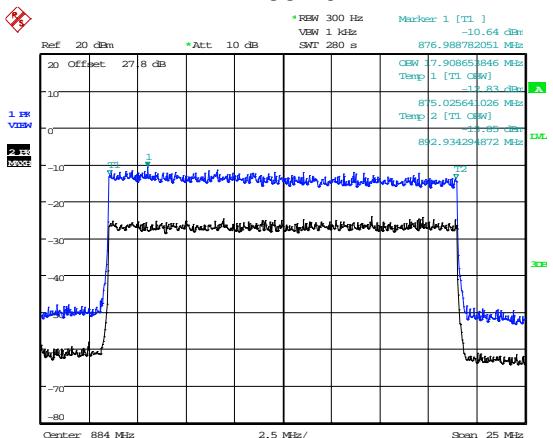


Date: 5.NOV.2013 16:30:18

## 878.0 MHz

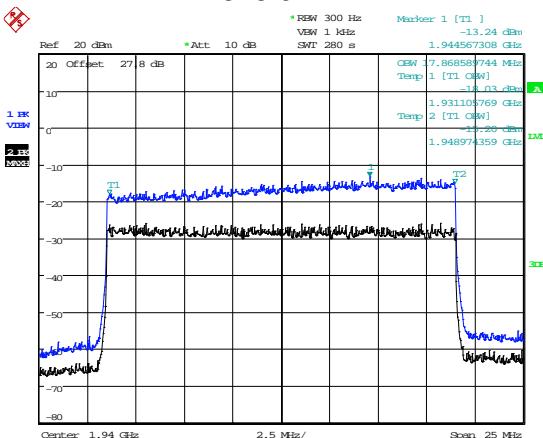


Date: 5.NOV.2013 16:15:42

## 894.0 MHz

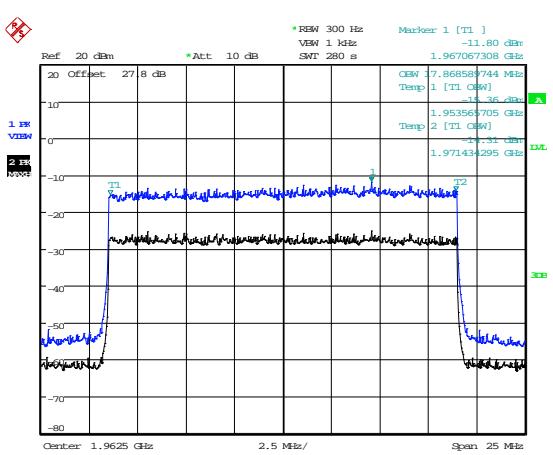

Date: 5.NOV.2013 15:59:42

## 1930.0 MHz

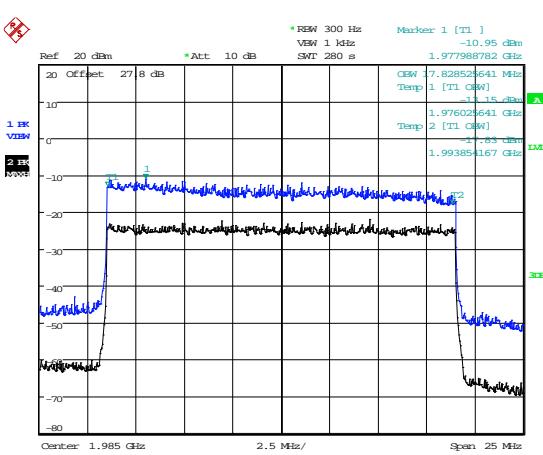

Date: 5.NOV.2013 15:29:11

## 1962.5 MHz

Date: 5.NOV.2013 14:56:26

## 1995.0 MHz

The above plots depicting the output waveshape show no measurable distortion visible when compared to the input signal.

**B4 Spurious Emissions at Antenna Terminals Less than 1MHz**



<b>Test Details:</b>	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a), 90.691(a)(1) & (2)
EUT sample number	S01 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Modulation Type	Bandedge	Carrier Centre Frequency (MHz)	Max Level @ Bandedge (dBm)
GSM	SMR 800 (Sprint) Lower	862.2	-39.88 dBm
	SMR 800 (Sprint) Upper	868.8	-41.43 dBm
	850 MHz Lower	869.2	-41.04 dBm
	850 MHz Upper	893.8	-43.18 dBm
	1900 MHz Lower	1930.2	-40.60 dBm
	1900 MHz Upper	1994.8	-43.90 dBm
CDMA	SMR 800 (Sprint) Lower	863.25	-39.81 dBm
	SMR 800 (Sprint) Upper	868.75	-42.99 dBm
	850 MHz Lower	869.25	-42.89 dBm
	850 MHz Upper	892.75	-40.36 dBm
	1900 MHz Lower	1931.25	-43.25 dBm
	1900 MHz Upper	1993.75	-49.36 dBm

Modulation Type	Bandedge	Carrier Centre Frequency (MHz)	Max Level @ Bandedge (dBm)
WCDMA	SMR 800 (Sprint) Lower	864.5	-40.52 dBm
	SMR 800 (Sprint) Upper	866.5	-45.58 dBm
	850 MHz Lower	871.5	-38.61 dBm
	850 MHz Upper	891.5	-46.81 dBm
	1900 MHz Lower	1932.5	-43.11 dBm
	1900 MHz Upper	1992.5	-43.38 dBm
LTE 1.4 MHz	SMR 800 (Sprint) Lower	862.7	-20.71 dBm
	SMR 800 (Sprint) Upper	868.3	-24.64 dBm
	850 MHz Lower	869.7	-23.98 dBm
	850 MHz Upper	893.3	-24.79 dBm
	1900 MHz Lower	1930.7	-21.90 dBm
	1900 MHz Upper	1994.3	-23.81 dBm
LTE 20.0 MHz	SMR 800 (Sprint) Lower	872.0	-25.45 dBm
	SMR 800 (Sprint) Upper	866.5	-28.10 dBm
	850 MHz Lower	879.0	-33.81 dBm
	850 MHz Upper	884.0	-25.70 dBm
	1900 MHz Lower	1940.0	-26.75 dBm
	1900 MHz Upper	1985.0	-28.21 dBm

\* Reduced to 5 MHz LTE to fit into 862 -869 MHz band

## GSM Modulation

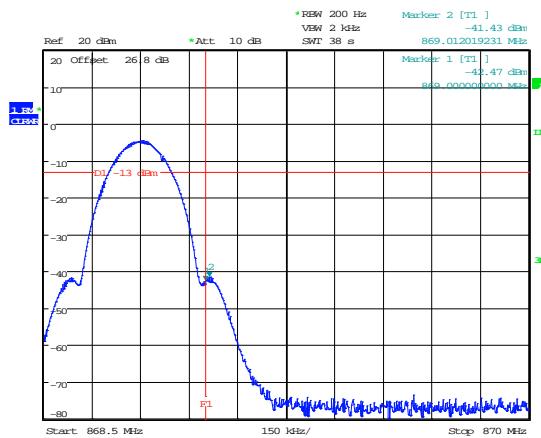
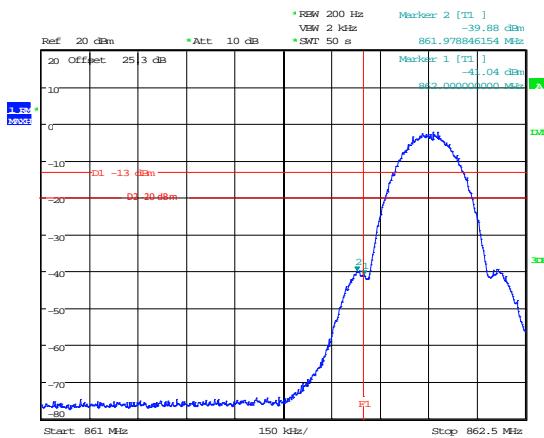


Date: 28.MAY.2014 12:34:54

862.2MHz

Date: 23.JUN.2014 12:46:27

868.8 MHz

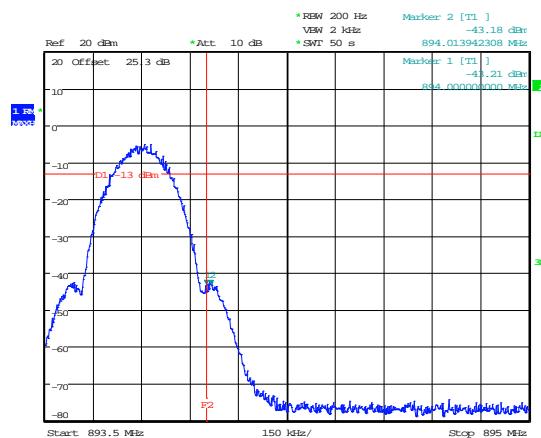
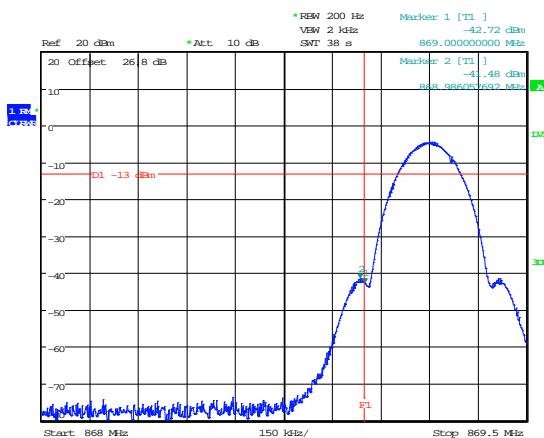


Date: 23.JUN.2014 12:31:21

896.2MHz

Date: 28.MAY.2014 13:00:31

893.8 MHz

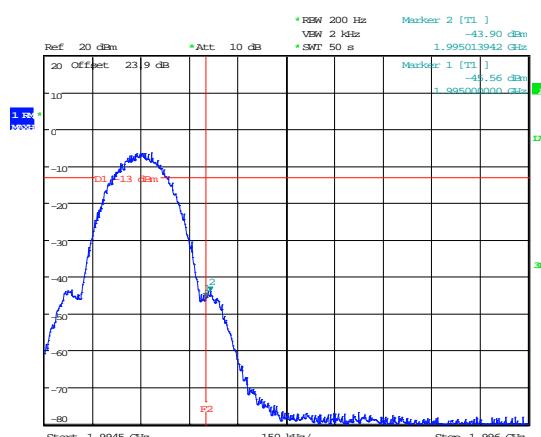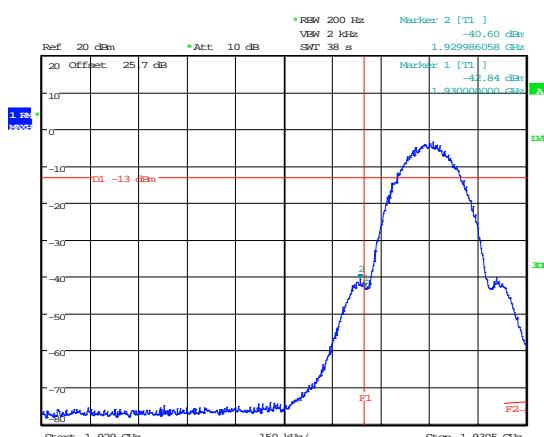



Date: 28.MAY.2014 14:53:03

1930.2 MHz

Date: 28.MAY.2014 14:38:03

1994.8 MHz

## CDMA Modulation

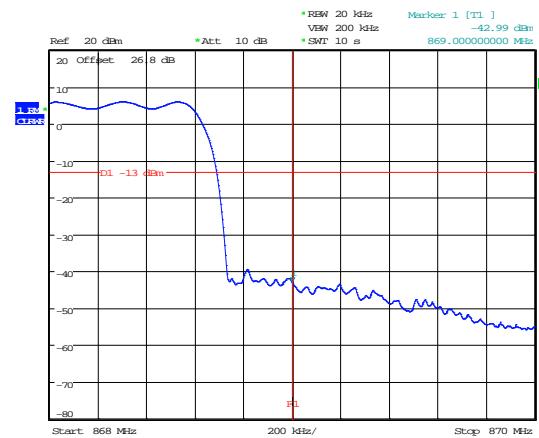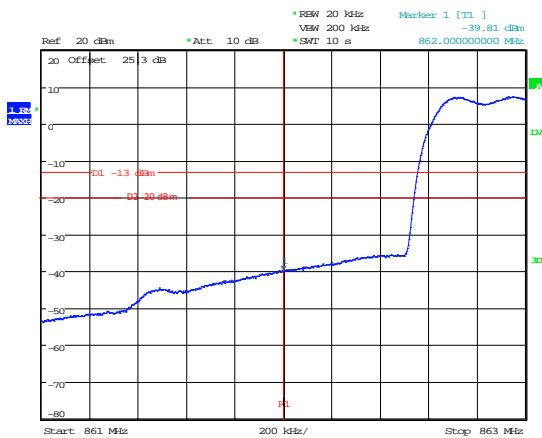


Date: 28.MAY.2014 12:51:54

863.25MHz

Date: 23.JUN.2014 12:42:20

868.75 MHz

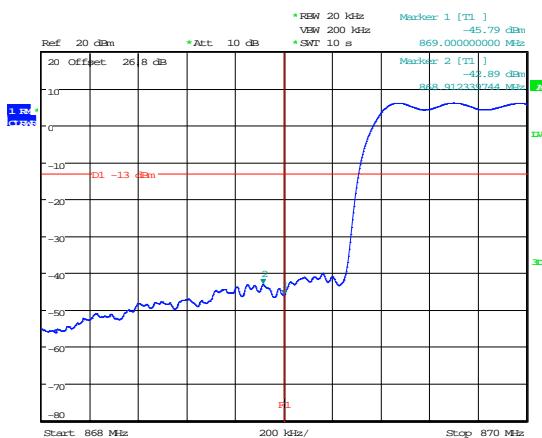


Date: 23.JUN.2014 12:37:49

869.25MHz

Date: 28.MAY.2014 12:56:43

892.75 MHz

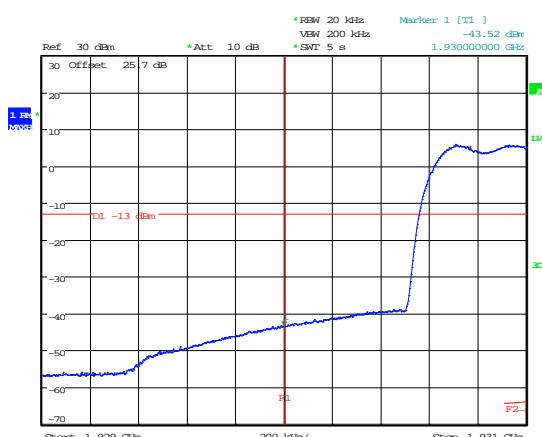



Date: 28.MAY.2014 14:54:17

1931.25 MHz

Date: 28.MAY.2014 14:35:13

1993.75 MHz

## WCDMA Modulation

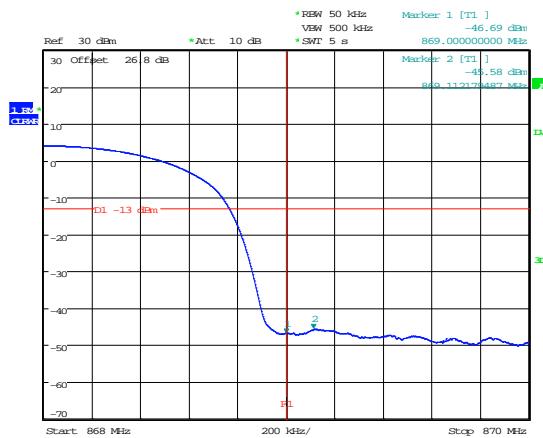
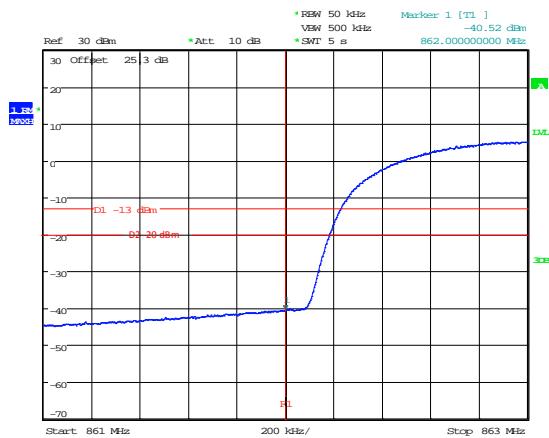


Date: 28.MAY.2014 11:28:43

864.5 MHz

Date: 23.JUN.2014 12:52:46

866.5 MHz

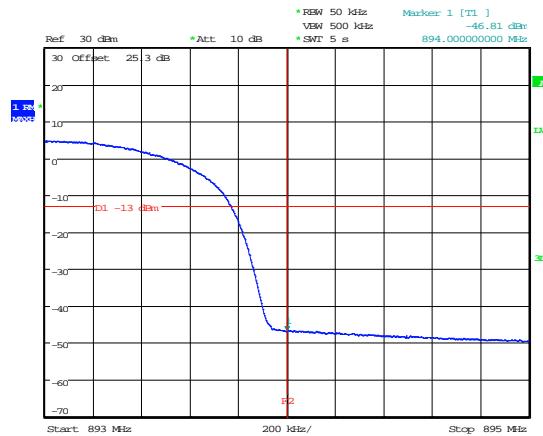
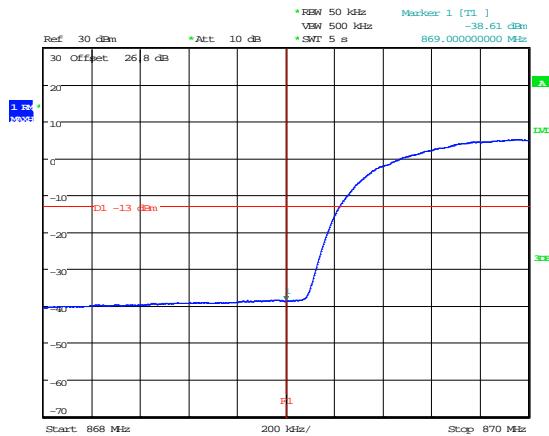


Date: 23.JUN.2014 12:21:01

871.5 MHz

Date: 28.MAY.2014 14:13:54

891.5 MHz

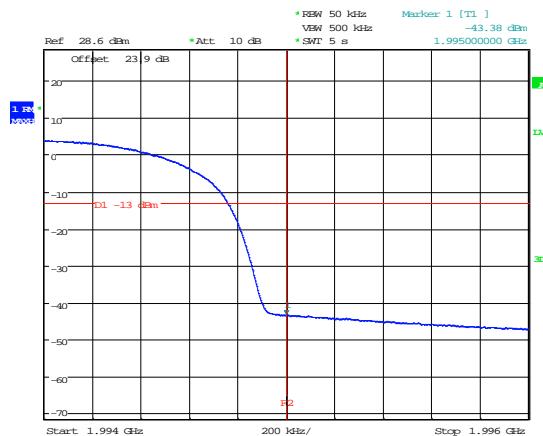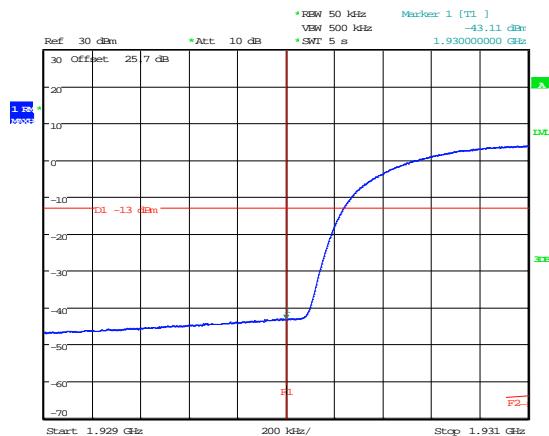



Date: 28.MAY.2014 15:01:22

1932.5 MHz

Date: 28.MAY.2014 14:30:54


1992.5 MHz

## LTE 1.4 MHz Modulation

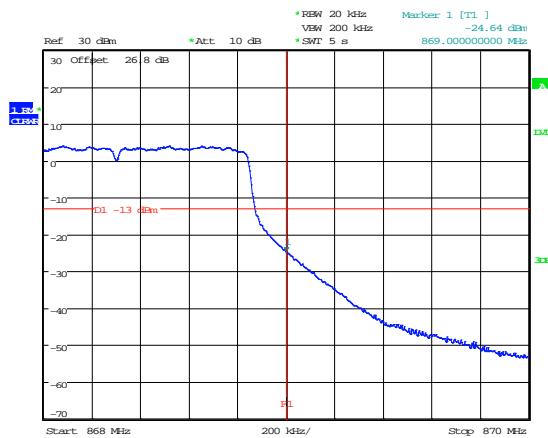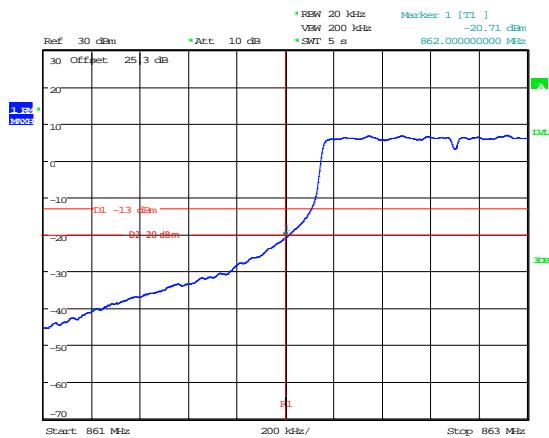


Date: 28.MAY.2014 11:26:12

862.7 MHz

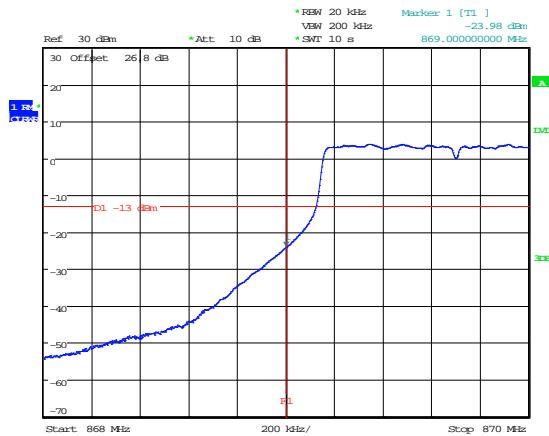


Date: 23.JUN.2014 12:57:38

868.3 MHz

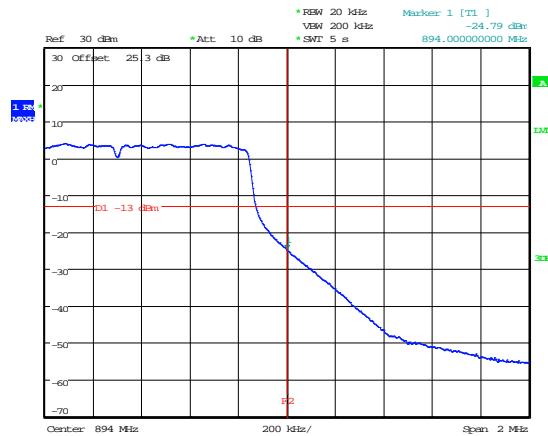


Date: 23.JUN.2014 12:14:37

869.7 MHz

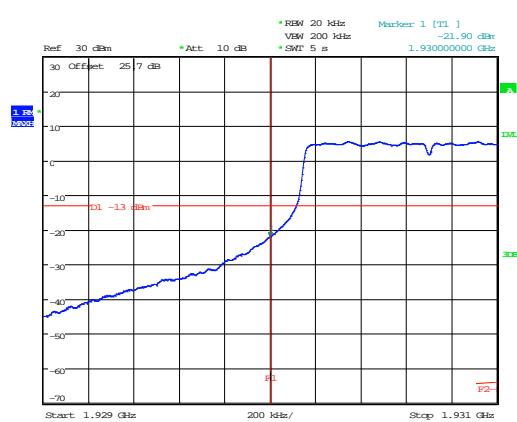

Date: 28.MAY.2014 14:20:07

893.3 MHz

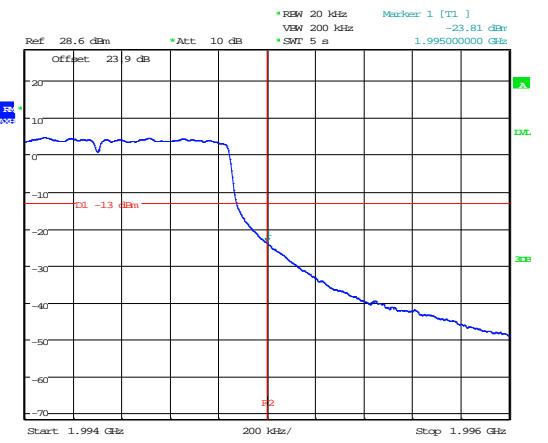



Date: 28.MAY.2014 15:03:49

1930.7 MHz

Date: 28.MAY.2014 14:28:15


1994.3 MHz

## LTE 20 MHz Modulation

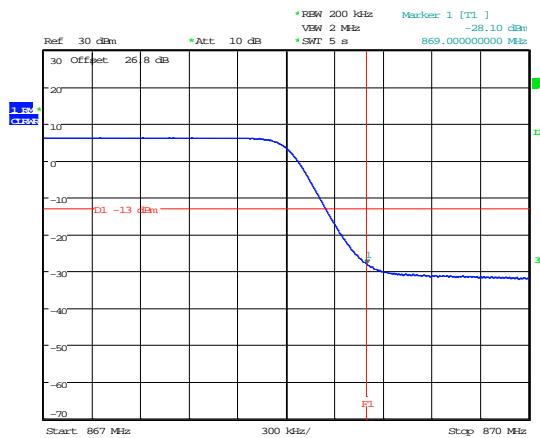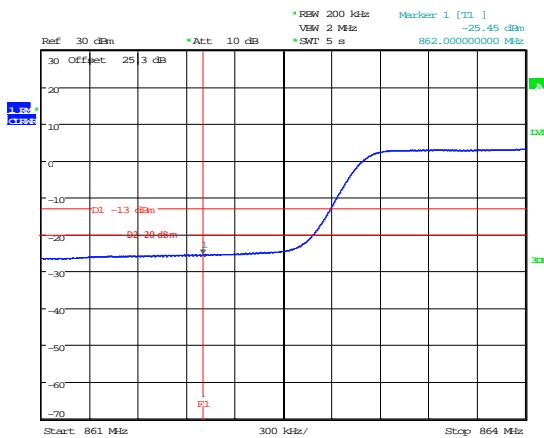


Date: 28.MAY.2014 11:23:31

## 872.0 MHz

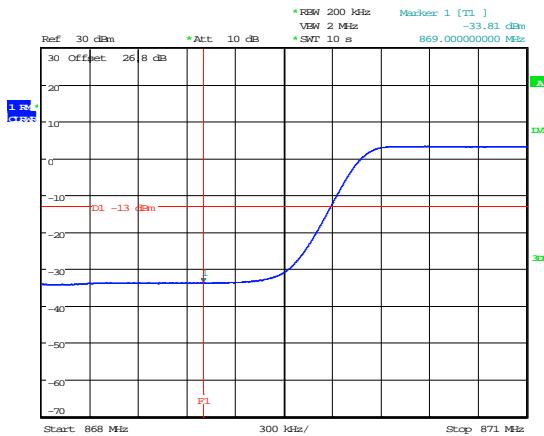


Date: 23.JUN.2014 13:00:50

## 866.5.0 MHz

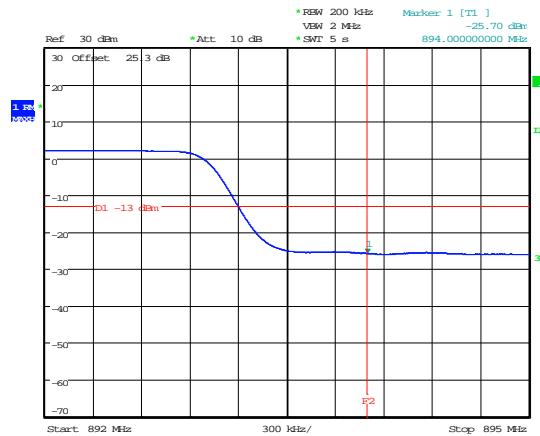


Date: 23.JUN.2014 12:17:33

## 879.0 MHz

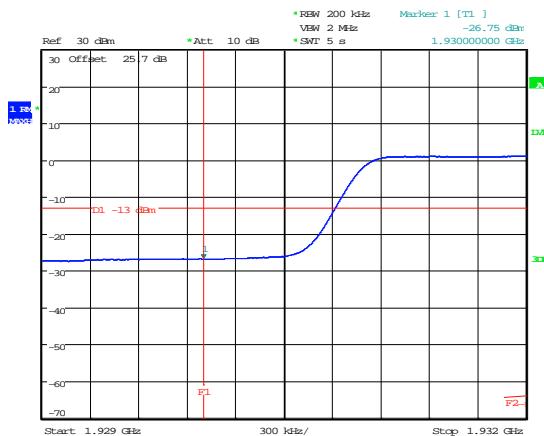

Date: 28.MAY.2014 14:21:56

## 884.0 MHz

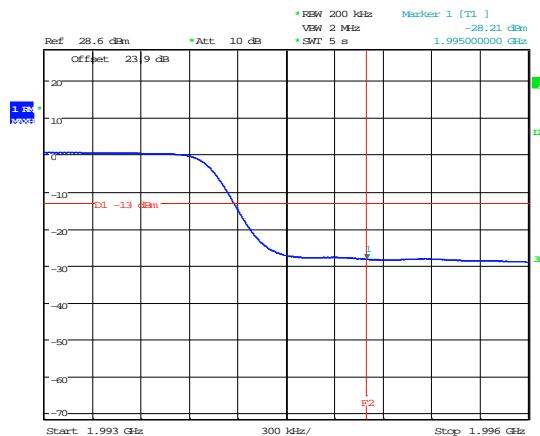



Date: 28.MAY.2014 15:05:49

## 1940.0 MHz

Date: 28.MAY.2014 14:26:39

## 1985.0 MHz


## SMR 800 (Sprint) &amp; 850 MHz - Cross Boundary - 869.0 MHz

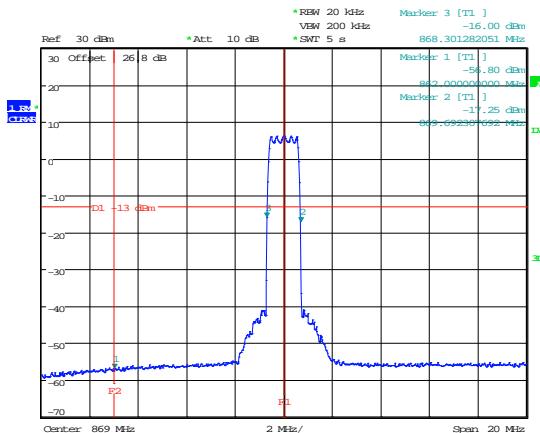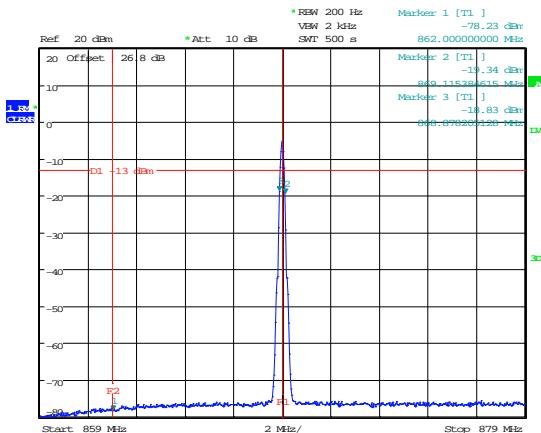


Date: 23.JUN.2014 15:02:14

Date: 23.JUN.2014 14:28:22

## GSM

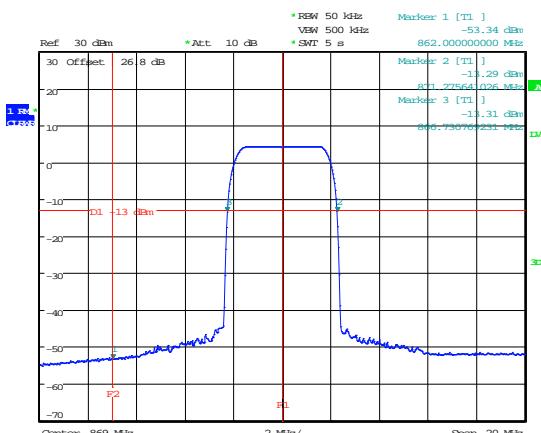


## CDMA

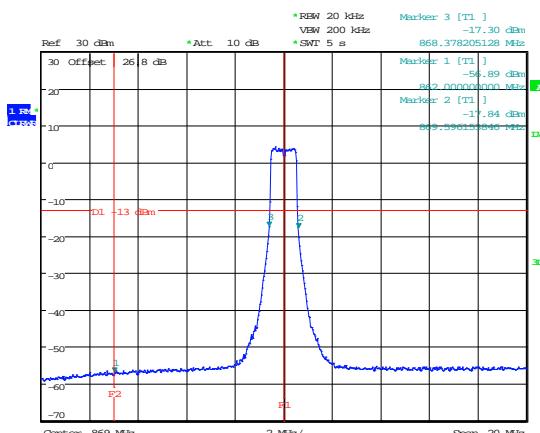


Date: 23.JUN.2014 14:20:56

Date: 23.JUN.2014 14:19:57

## WCDMA

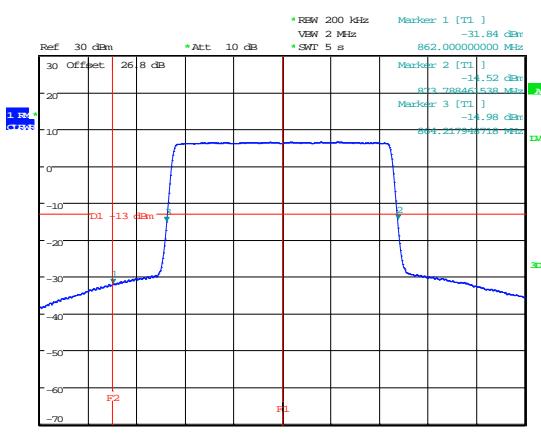

## 1.4 MHz LTE

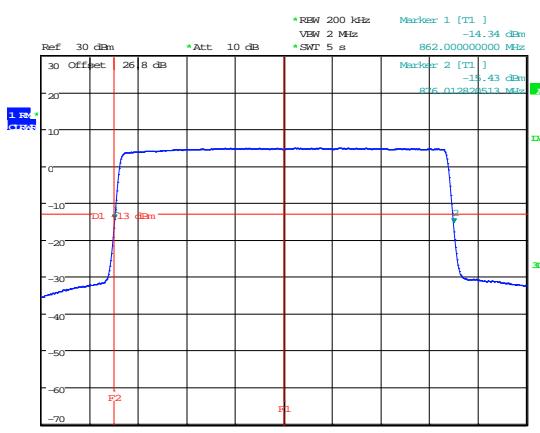

Date: 23.JUN.2014 14:18:02

Date: 23.JUN.2014 14:17:06

## 10 MHz LTE

## 15 MHz LTE

## B5 Spurious Emissions at Antenna Terminals Greater than 1MHz

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a) , 90.691(a)(1) & (2)
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Frequency (MHz)	Frequency Range (MHz)	Freq. of Emission (MHz)	Measured Level (dBm)	Attenuator & Cable Losses (dB)	Spurious Emission Level (dBm)	Limit (dBm)
850 MHz						
862.000	No Significant Emissions Within 20 dB of limit				-13	
878.000					-13	
894.000					-13	
1900 MHz						
1930.000	No Significant Emissions Within 20 dB of limit				-13	
1962.500					-13	
1995.000					-13	

Limit is determined by the outermost step of the emissions mask and is calculated as follows:


At least  $43 + 10 \log P$  dB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

### Result

The EUT was found to comply with the limits

## 850 MHz – 862.0 MHz

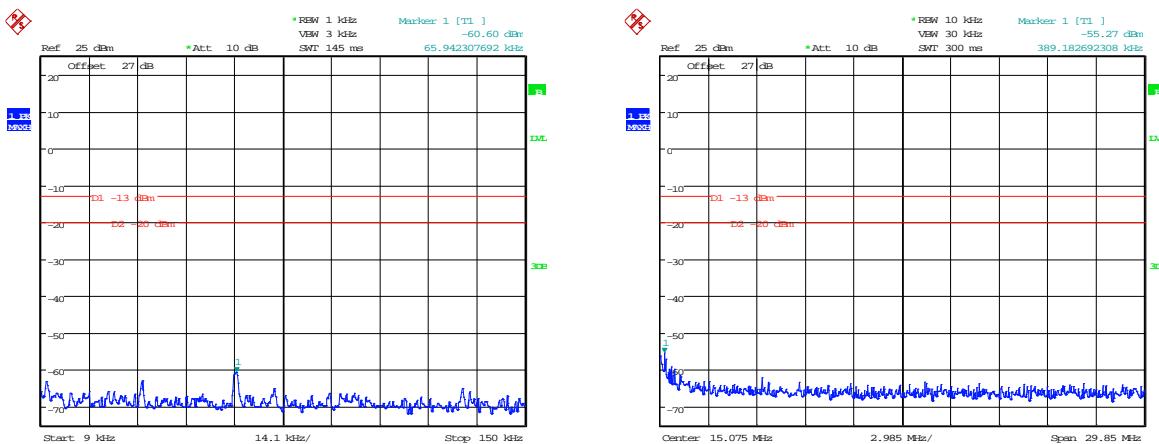


Date: 28.AUG.2013 13:25:45

Date: 28.AUG.2013 13:25:34

## 9kHz - 150kHz

## 150kHz - 30MHz

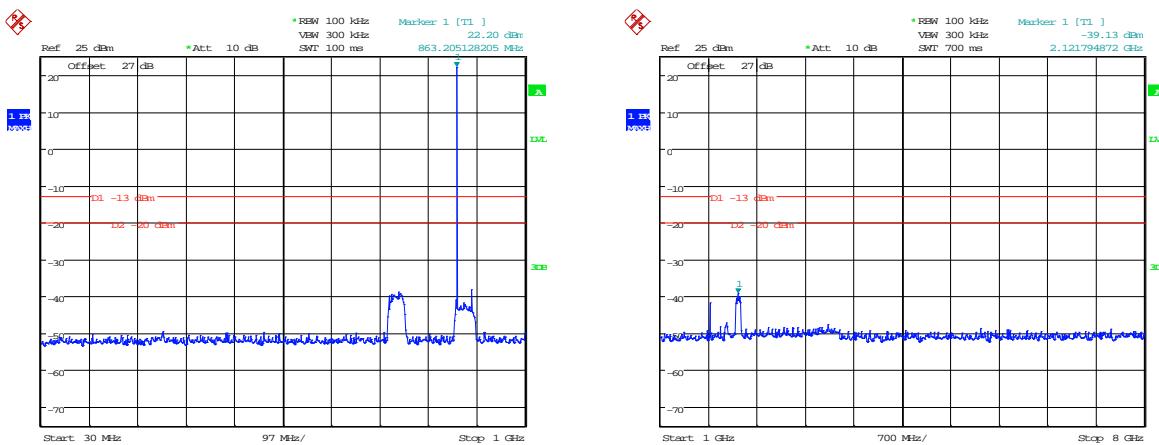


Date: 28.AUG.2013 13:25:24

Date: 28.AUG.2013 13:25:12

## 30MHz - 1GHz

## 1GHz - 8GHz

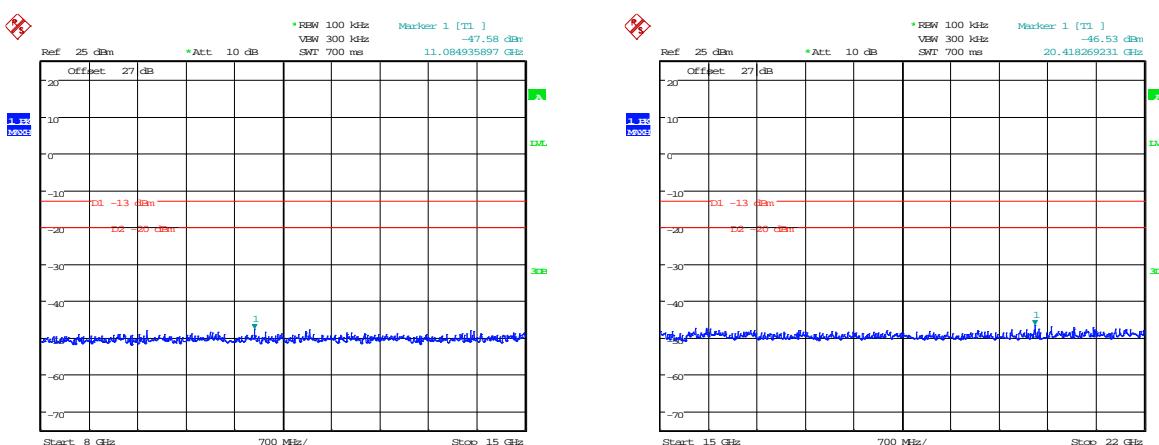



Date: 28.AUG.2013 13:25:01

Date: 28.AUG.2013 13:24:50

## 8GHz - 15GHz


## 15GHz - 22GHz

## 850 MHz – 878.0 MHz

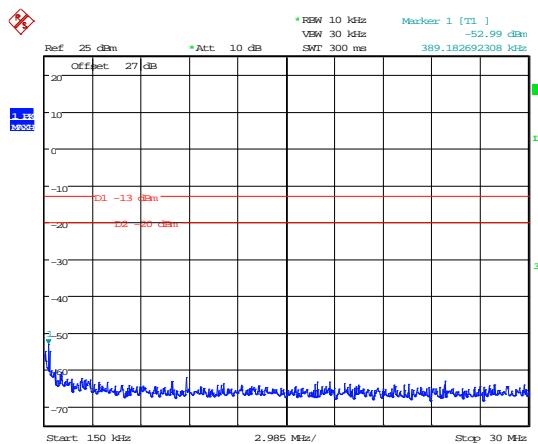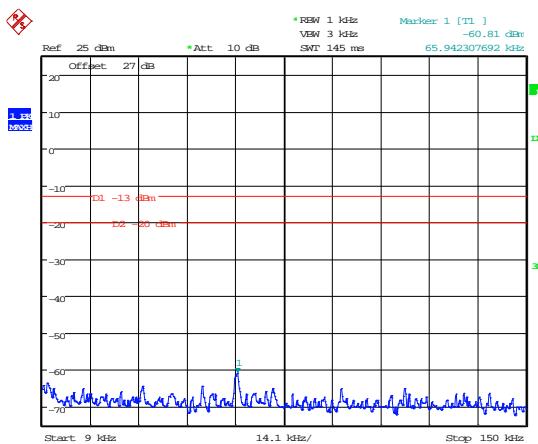


Date: 28.AUG.2013 13:26:16

## 9kHz - 150kHz

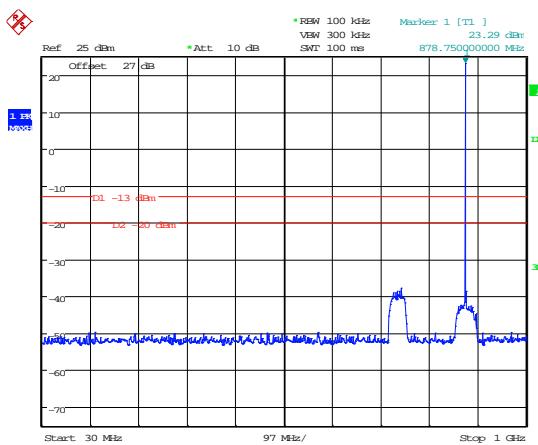


Date: 28.AUG.2013 13:26:30

## 150kHz - 30MHz

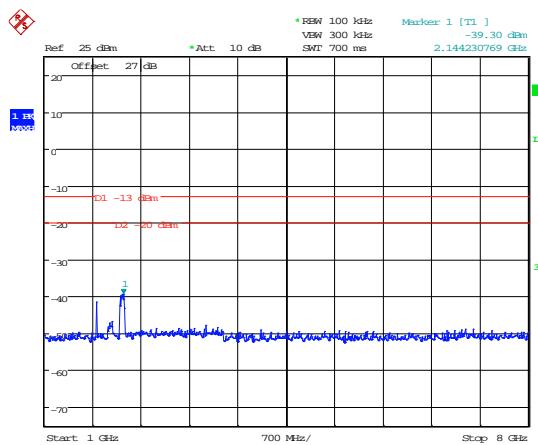


Date: 28.AUG.2013 13:26:38

## 30MHz - 1GHz

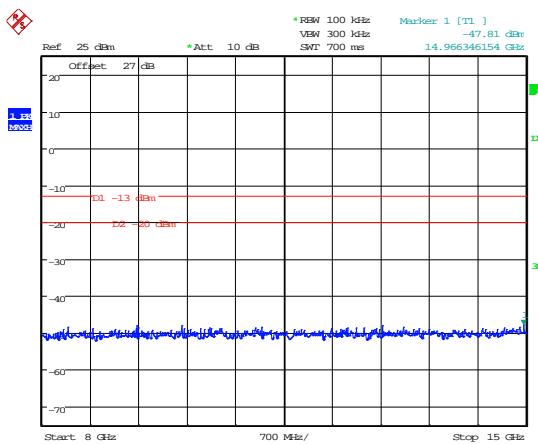

Date: 28.AUG.2013 13:26:48

## 1GHz - 8GHz

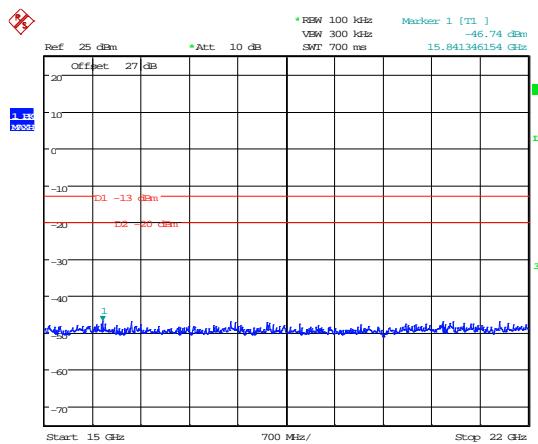



Date: 28.AUG.2013 13:27:02

## 8GHz - 15GHz

Date: 28.AUG.2013 13:27:13

## 15GHz - 22GHz

## 850 MHz – 894.0 MHz

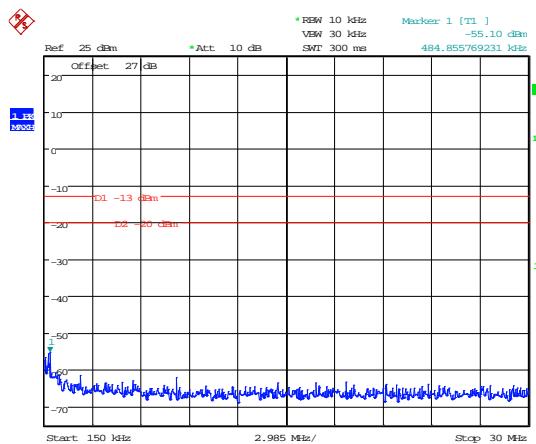
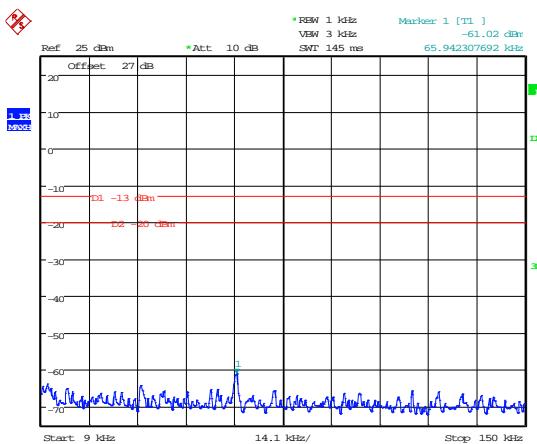


Date: 28.AUG.2013 13:28:34

Date: 28.AUG.2013 13:28:23

## 9kHz - 150kHz

## 150kHz - 30MHz

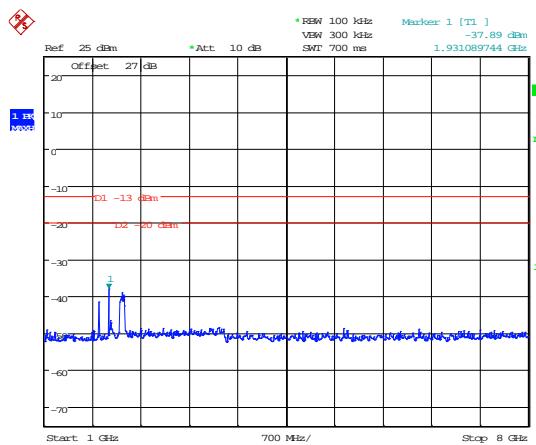
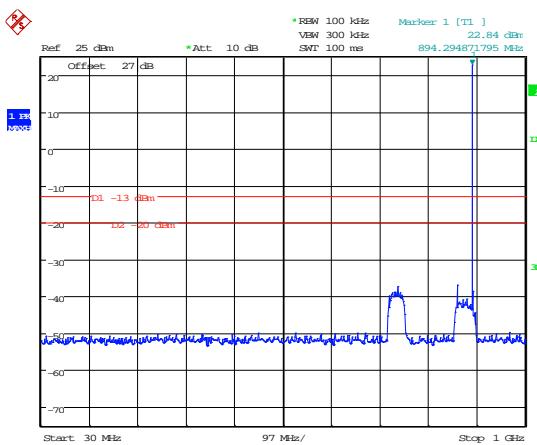


Date: 28.AUG.2013 13:28:03

Date: 28.AUG.2013 13:27:50

## 30MHz - 1GHz

## 1GHz - 8GHz

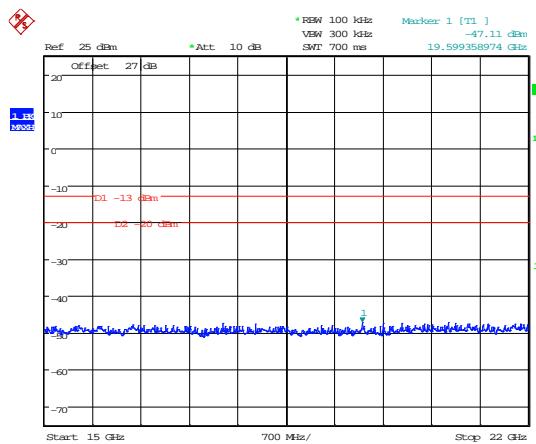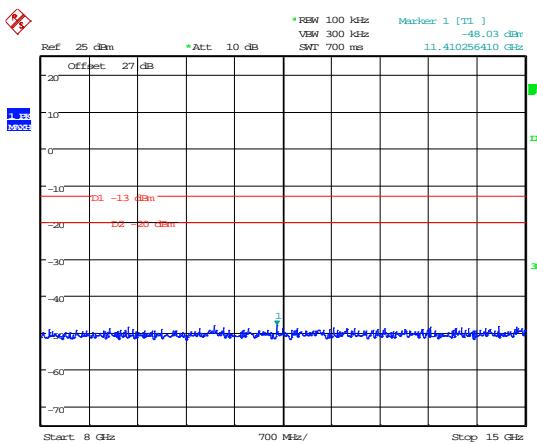


Date: 28.AUG.2013 13:27:40

Date: 28.AUG.2013 13:27:31

## 8GHz - 15GHz

## 15GHz - 22GHz

## 1900 MHz – 1930.0 MHz

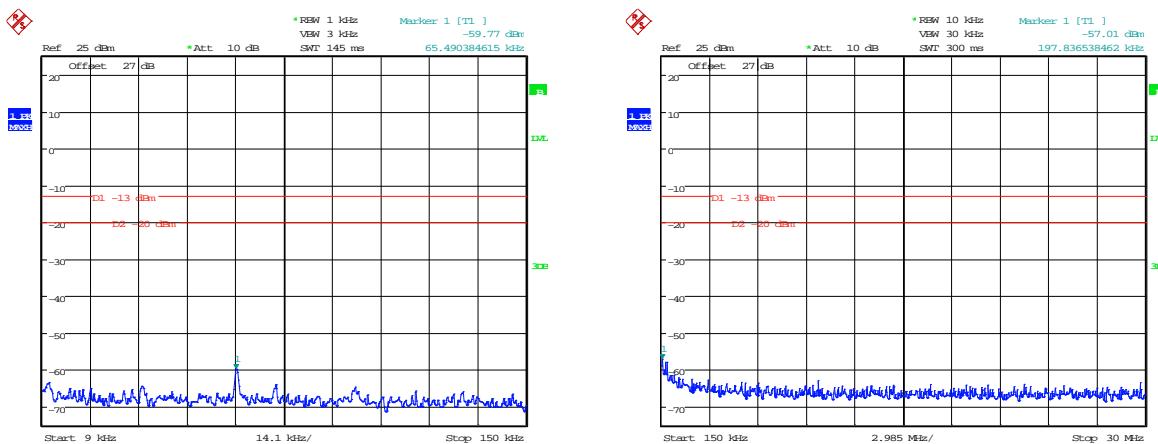


Date: 28.AUG.2013 13:29:05

Date: 28.AUG.2013 13:29:17

## 9kHz - 150kHz

## 150kHz - 30MHz

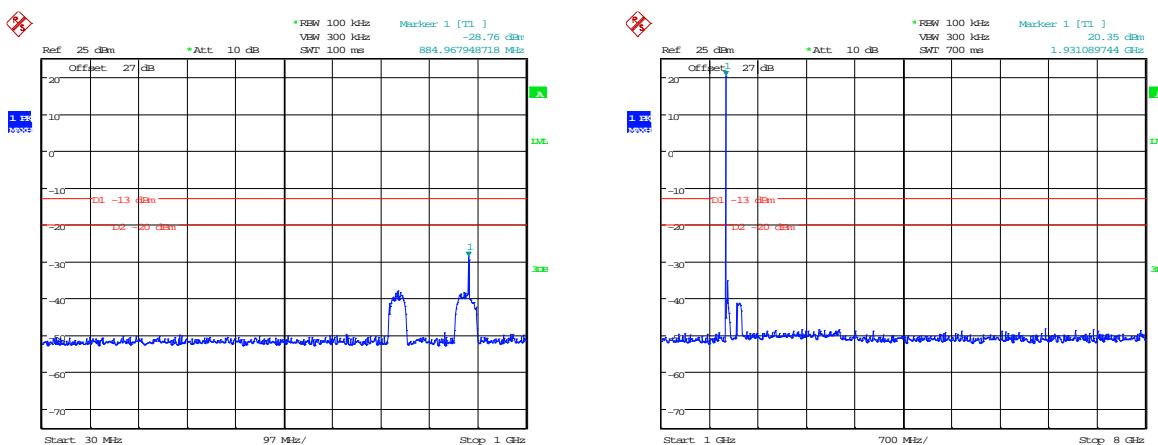


Date: 28.AUG.2013 13:29:29

Date: 28.AUG.2013 13:29:45

## 30MHz - 1GHz

## 1GHz - 8GHz

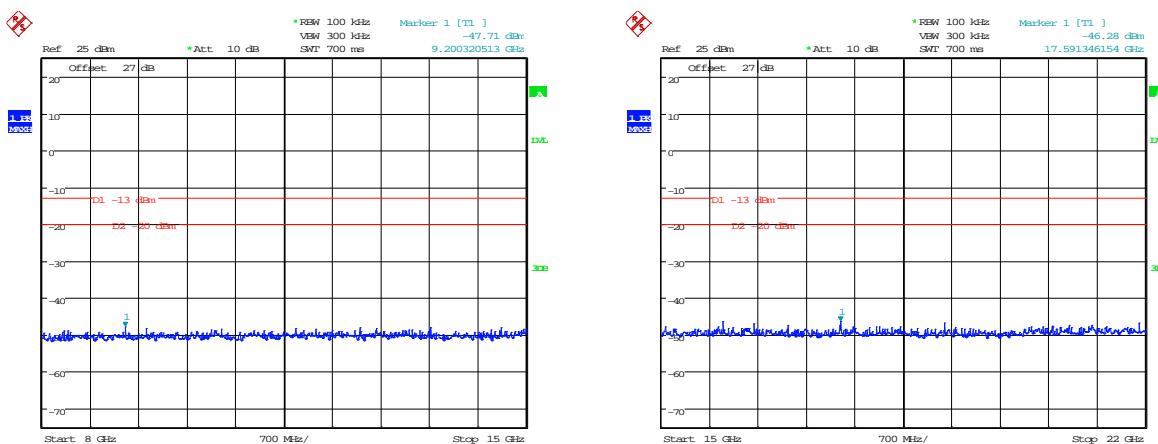


Date: 28.AUG.2013 13:29:58

Date: 28.AUG.2013 13:30:11

## 8GHz - 15GHz

## 15GHz - 22GHz

## 1900 MHz – 1962.5 MHz

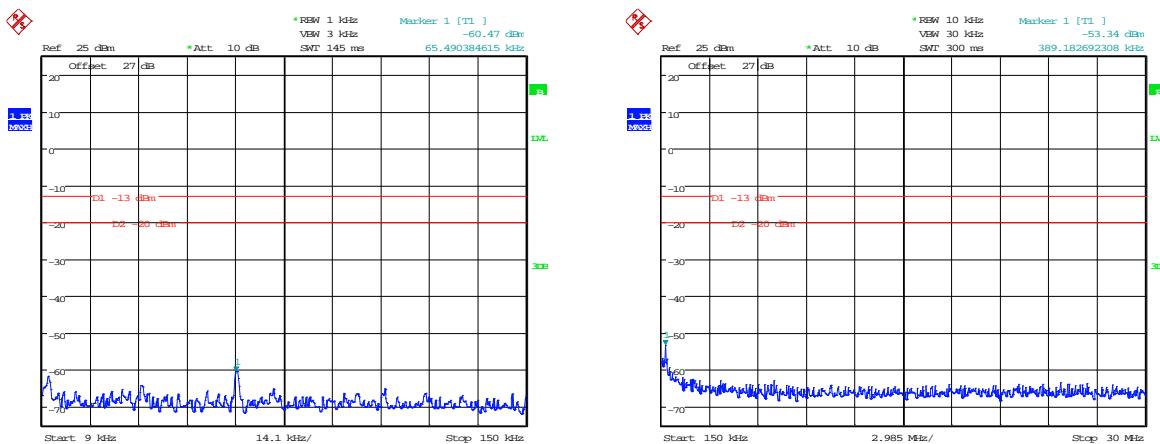


Date: 28.AUG.2013 13:32:06

Date: 28.AUG.2013 13:31:54

## 9kHz - 150kHz

## 150kHz - 30MHz

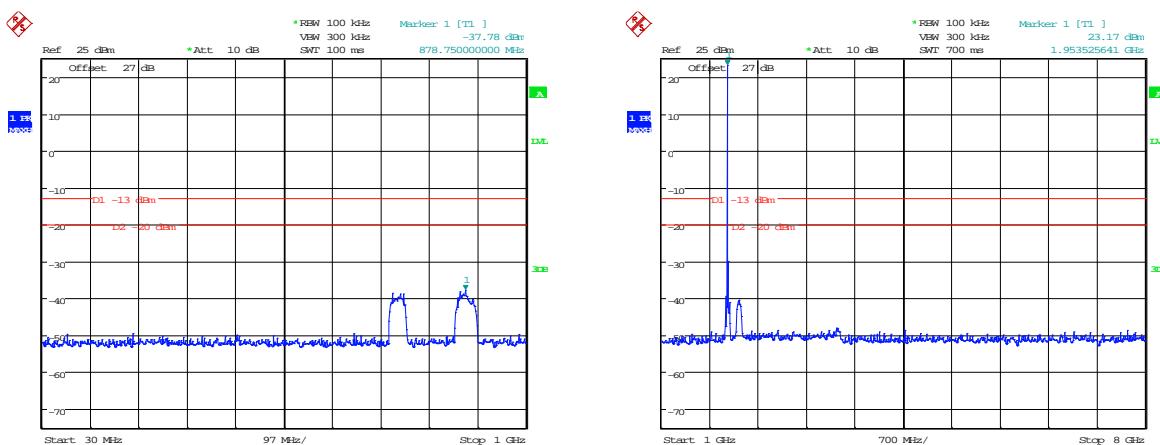


Date: 28.AUG.2013 13:31:43

Date: 28.AUG.2013 13:31:34

## 30MHz - 1GHz

## 1GHz - 8GHz

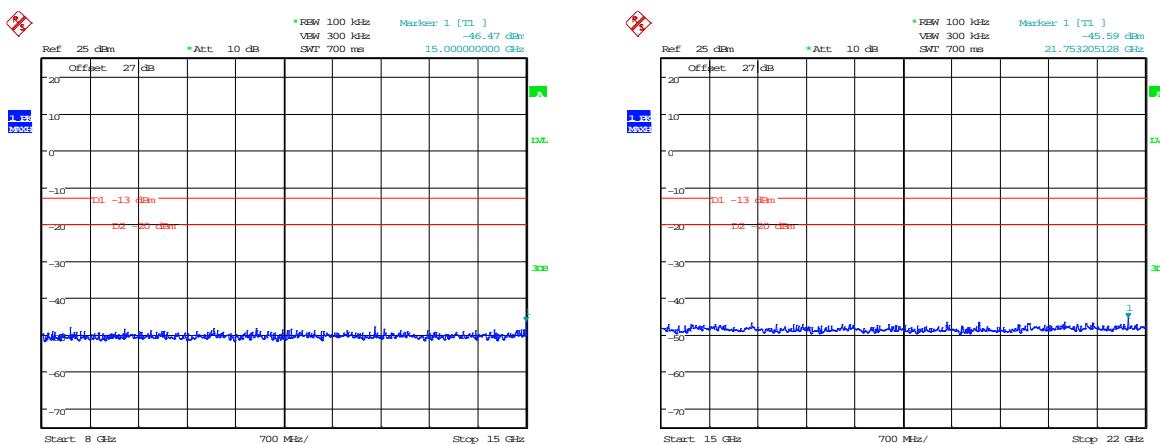


Date: 28.AUG.2013 13:31:25

Date: 28.AUG.2013 13:31:06

## 8GHz - 15GHz

## 15GHz - 22GHz

## 1900 MHz – 1995.0 MHz

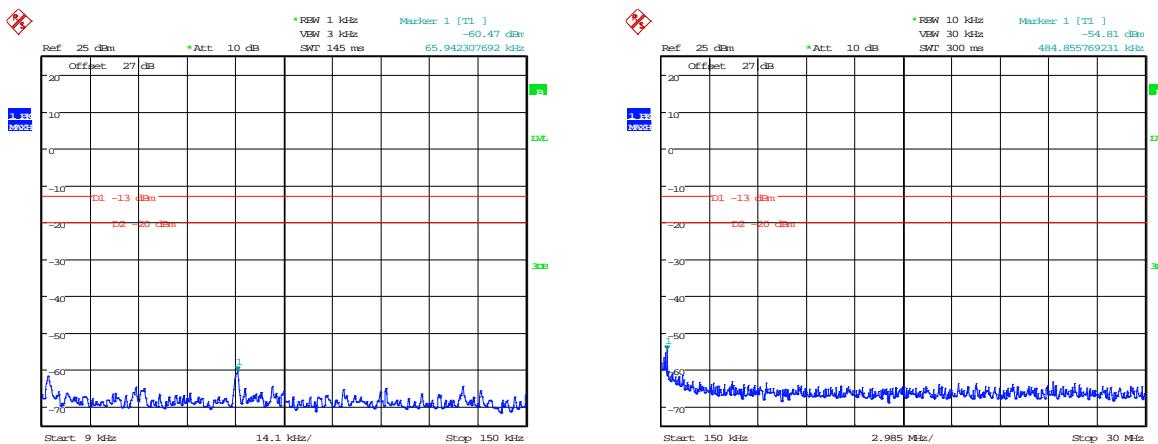


Date: 28.AUG.2013 13:32:20

Date: 28.AUG.2013 13:32:33

## 9kHz - 150kHz

## 150kHz - 30MHz

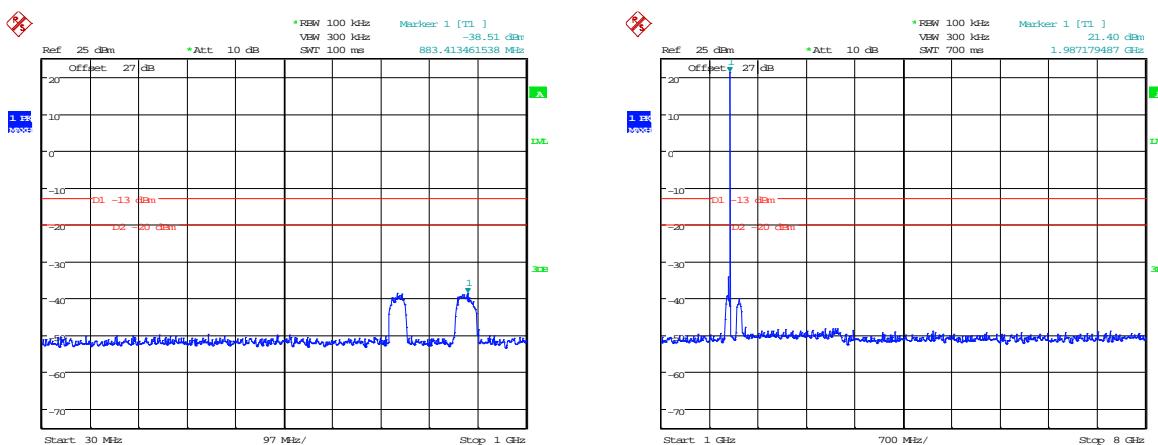


Date: 28.AUG.2013 13:32:42

Date: 28.AUG.2013 13:32:53

## 30MHz - 1GHz

## 1GHz - 8GHz

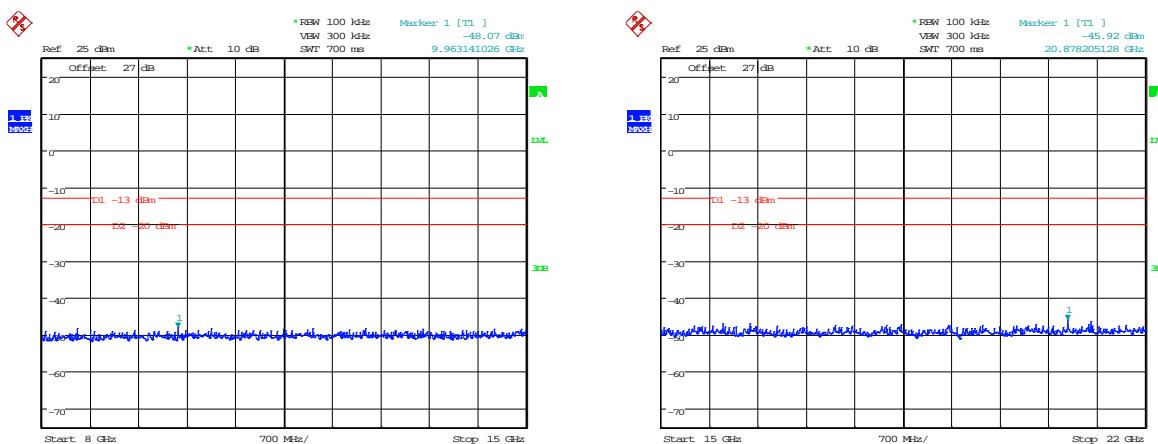

Date: 28.AUG.2013 13:33:09

Date: 28.AUG.2013 13:33:23

## 8GHz - 15GHz

## 15GHz - 22GHz

## B6 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious and harmonic emissions. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :  3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Measurement standard	Title 47 of the CFR: Part 2.1053, 22.917(a), 24.238(a), 90.691(a)(1) & (2)
Frequency range	30 MHz – 22 GHz
EUT sample number	S03 & S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Frequency (MHz)	Freq. of Emission (MHz)	ERP/EIRP (dBm)	Limit (dBm)
850 MHz			
862.000	No Significant Emissions Within	-13	
878.000		-13	
894.000		-13	
1900 MHz			
1930.000	No Significant Emissions Within	-13	
1962.500		-13	
1995.000		-13	

## Result

The EUT was found to comply with the limits

**Notes:**

1. Emissions Checked up to 10 times Fc.
2. The unit was mounted on a turntable and rotated through 360° and in 3 orthogonal planes to find the worst case emission.
3. For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak Detector              RBW = 1MHz; VBW = ≥RBW

4. Limit is determined as the outermost step of the emissions mask and is calculated as follows.

At least  $43 + 10 \log P$  dB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 2.1057.


- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left( \frac{\text{measurement distance}}{\text{specification distance}} \right)$$


- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				


## 850 MHz – 862.0 MHz

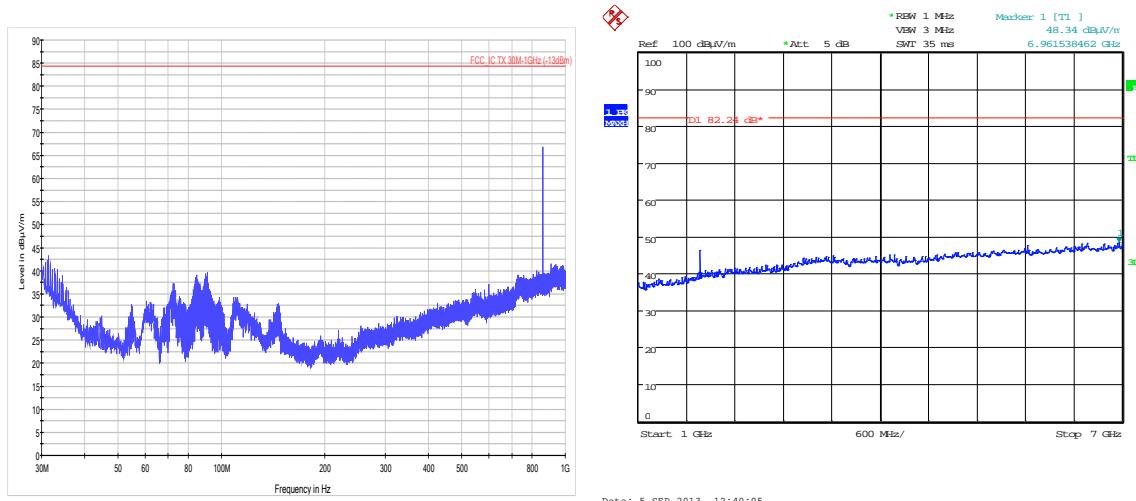


## 30MHz – 1GHz

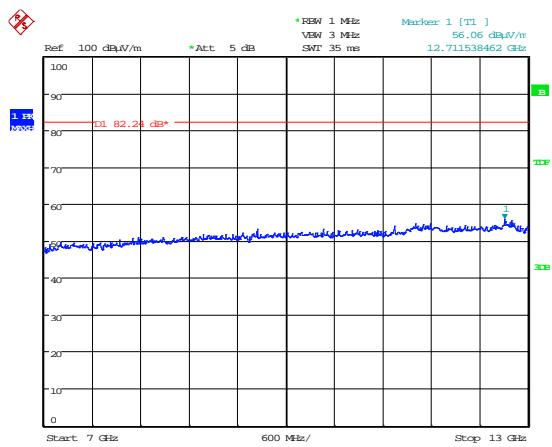

## 1GHz – 7GHz

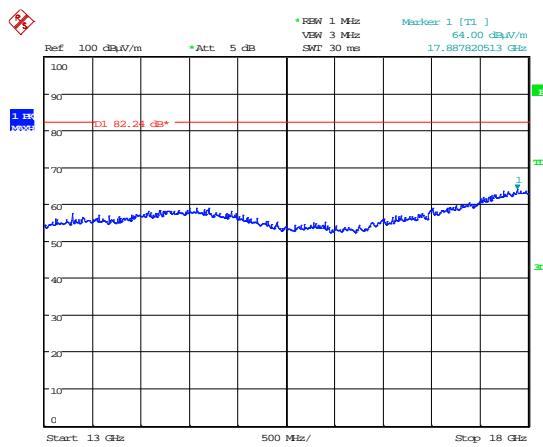


## 7GHz – 13GHz

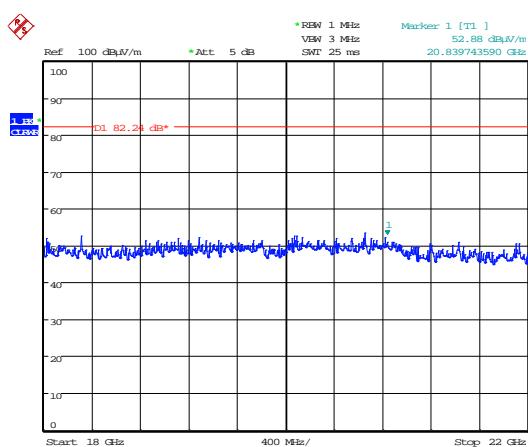


## 13GHz – 18GHz

18GHz – 22GHz


## 850 MHz – 878.0 MHz

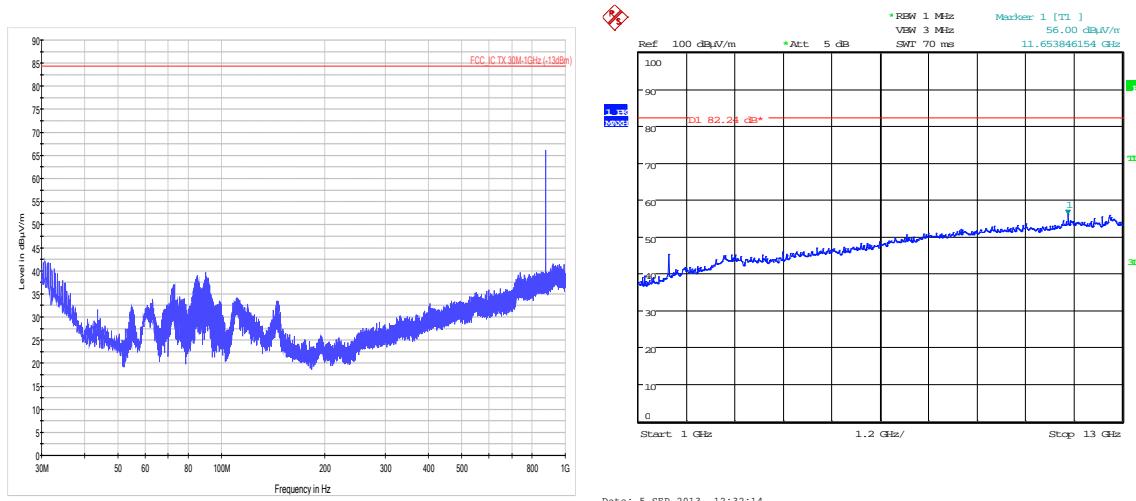


## 30MHz – 1GHz

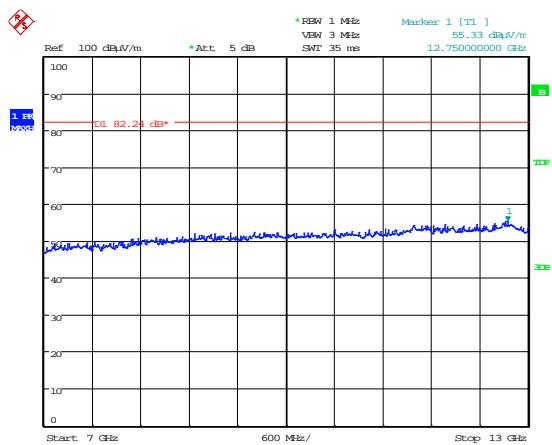

## 1GHz – 7GHz

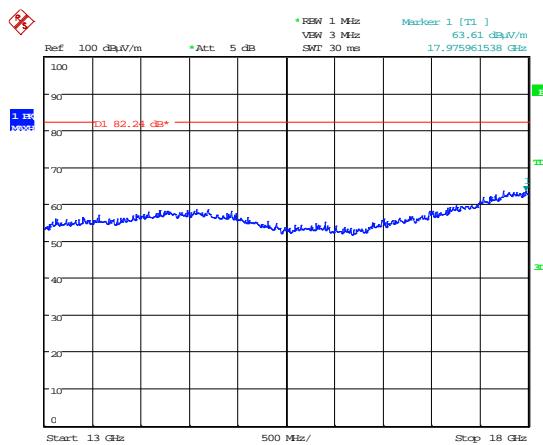


## 7GHz – 13GHz

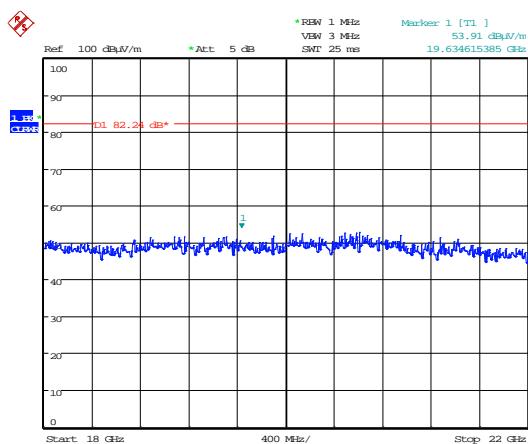


## 13GHz – 18GHz

18GHz – 22GHz


## 850 MHz – 894.0 MHz

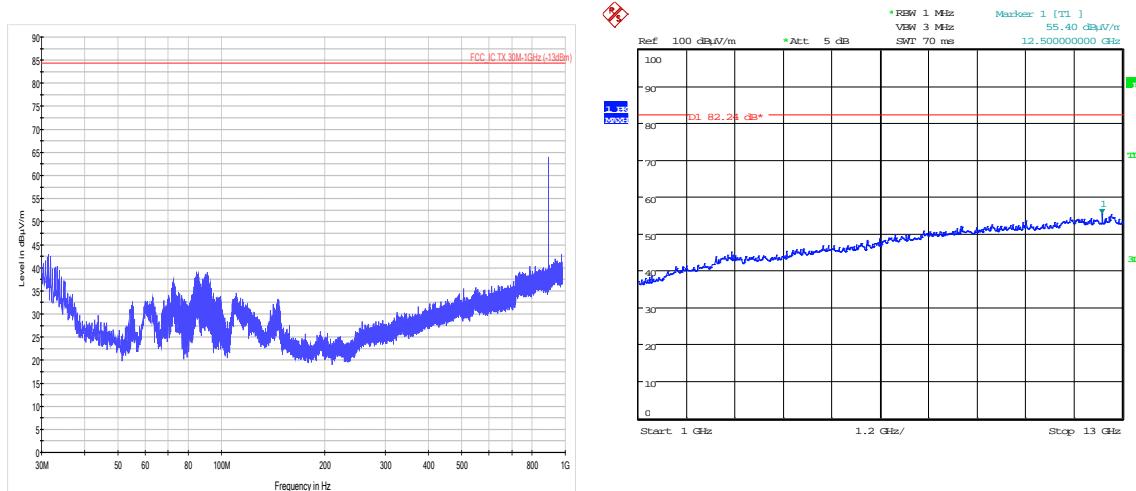


## 30MHz – 1GHz

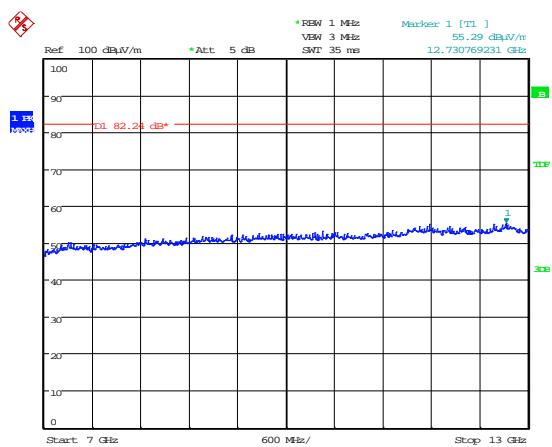

## 1GHz – 7GHz

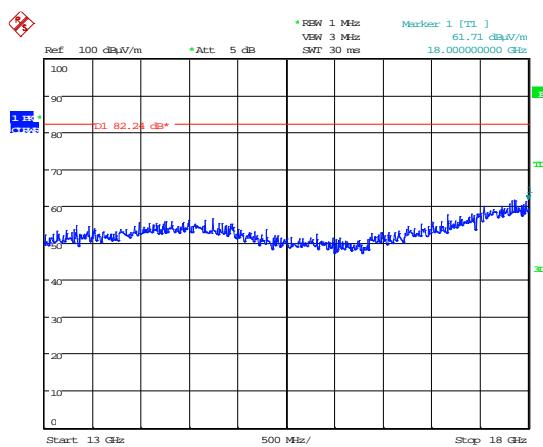


## 7GHz – 13GHz

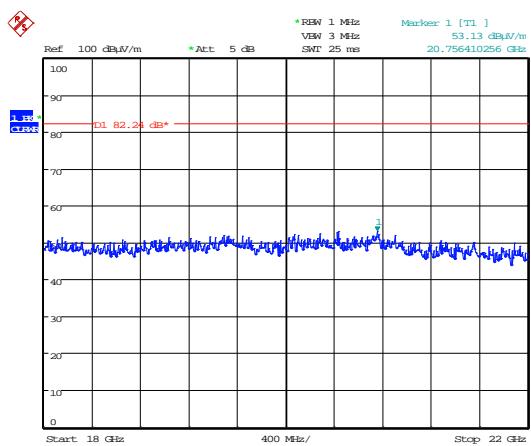

## 13GHz – 18GHz


## 18GHz – 22GHz

## 1900 MHz – 1930.0 MHz

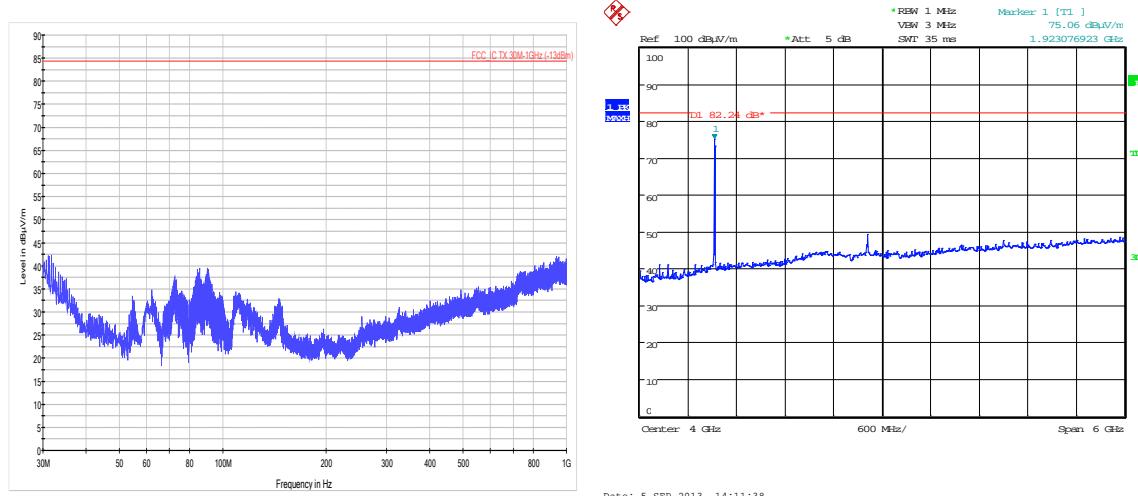


Date: 5.SEP.2013 14:11:38

## 30MHz – 1GHz

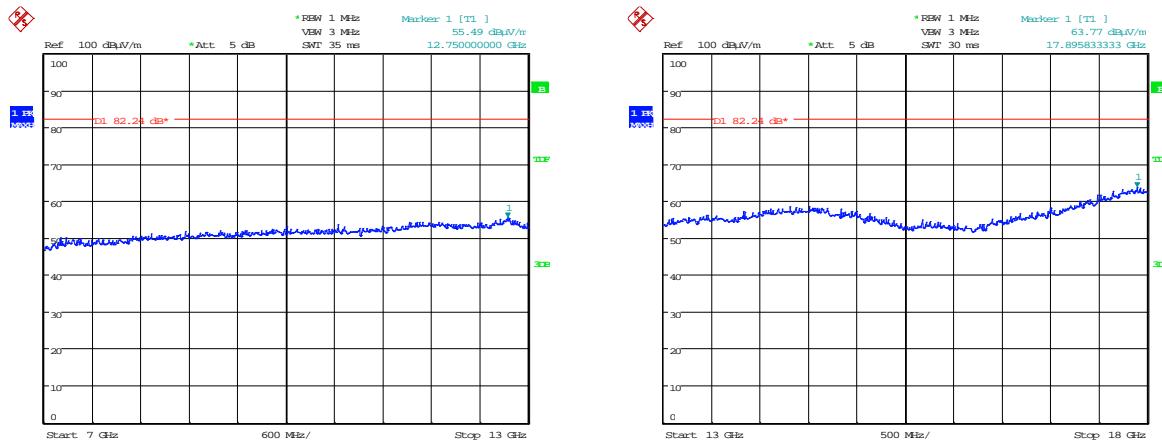


## 7GHz – 13GHz

## 13GHz – 18GHz

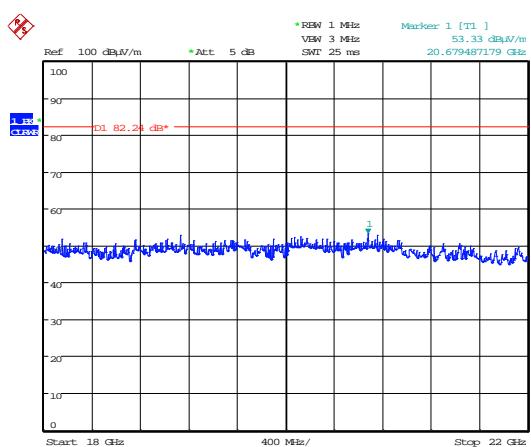


## 18GHz – 22GHz

## 1900 MHz – 1962.5 MHz

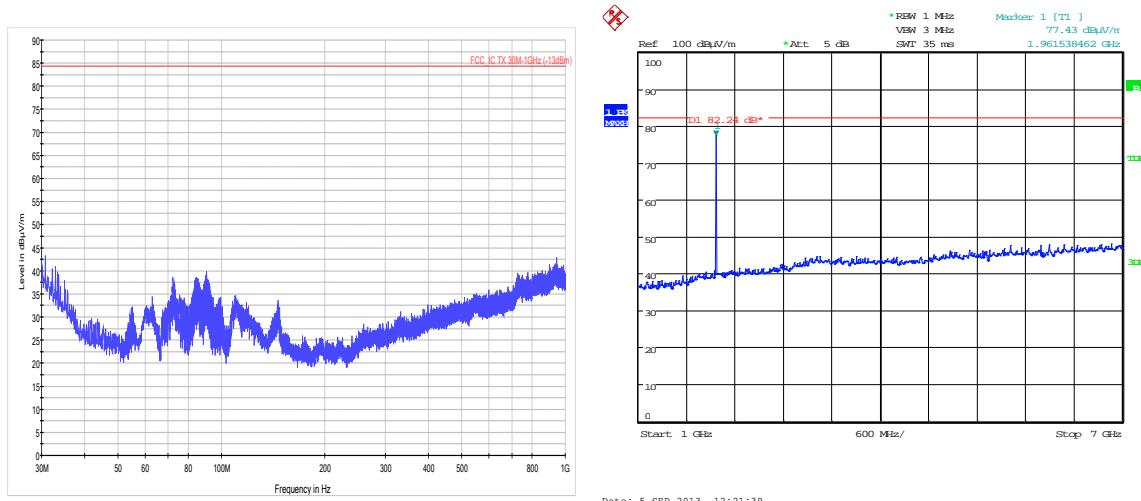


## 30MHz – 1GHz

## 1GHz – 7GHz

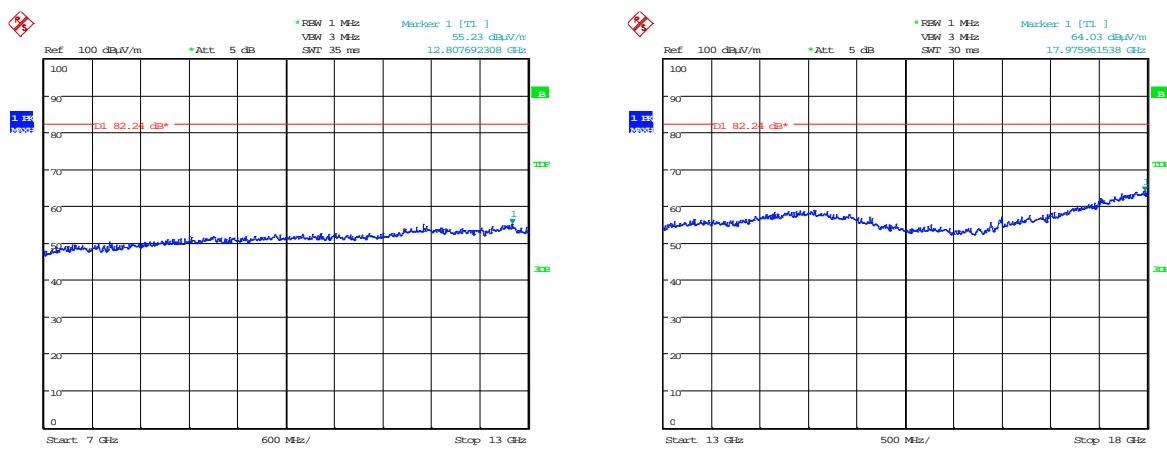


## 7GHz – 13GHz

## 13GHz – 18GHz

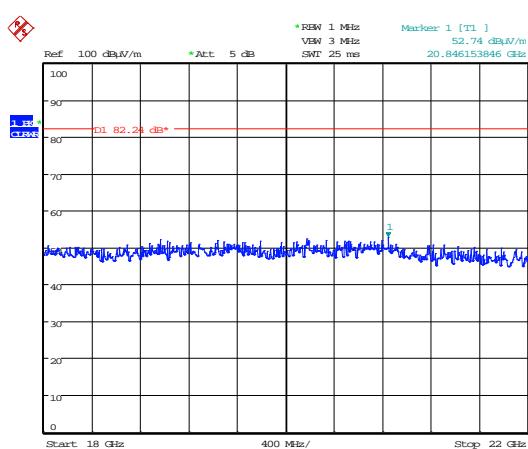


## 18GHz – 22GHz

## 1900 MHz – 1995.0 MHz

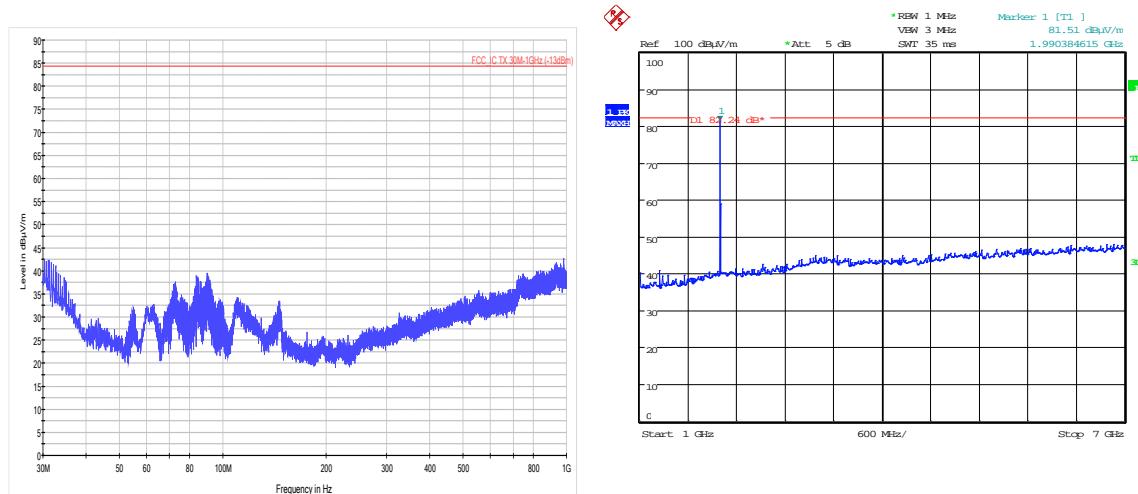

## 30MHz – 1GHz

## 1GHz – 7GHz

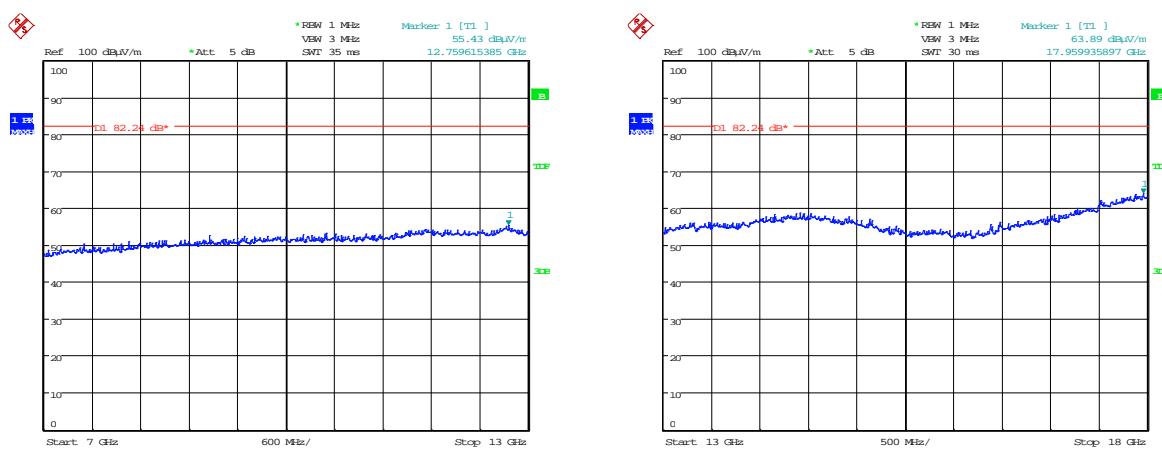


Date: 5.SEP.2013 12:16:46

Date: 5.SEP.2013 12:17:59

## 7GHz – 13GHz

## 13GHz – 18GHz

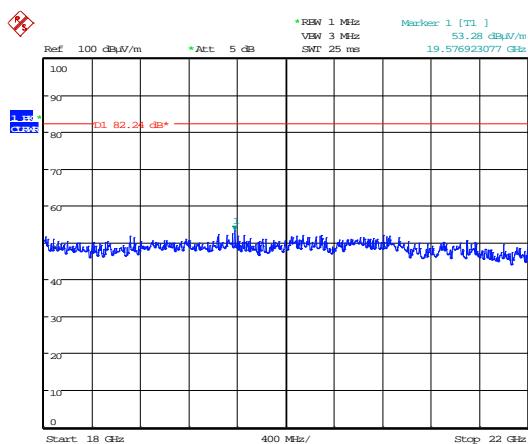

Date: 6.SEP.2013 10:21:54


## 18GHz – 22GHz

**B7 Passband Gain & Bandwidth**

Test Details:	
Measurement standard	D.3 Policies + Procedures (k) of KDB 935210 D02 Signal Boosters Certification v02
EUT sample number	S03
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

BAND	Frequency MHz	f <sub>l</sub>	f <sub>h</sub>	20 dB Bandwidth
850 MHz	869 - 894 MHz	855.564102 MHz	903.000000 MHz	47.435 MHz
SMR 800 (Sprint)	862-869 MHz			

See below for plots showing passband gain & bandwidth

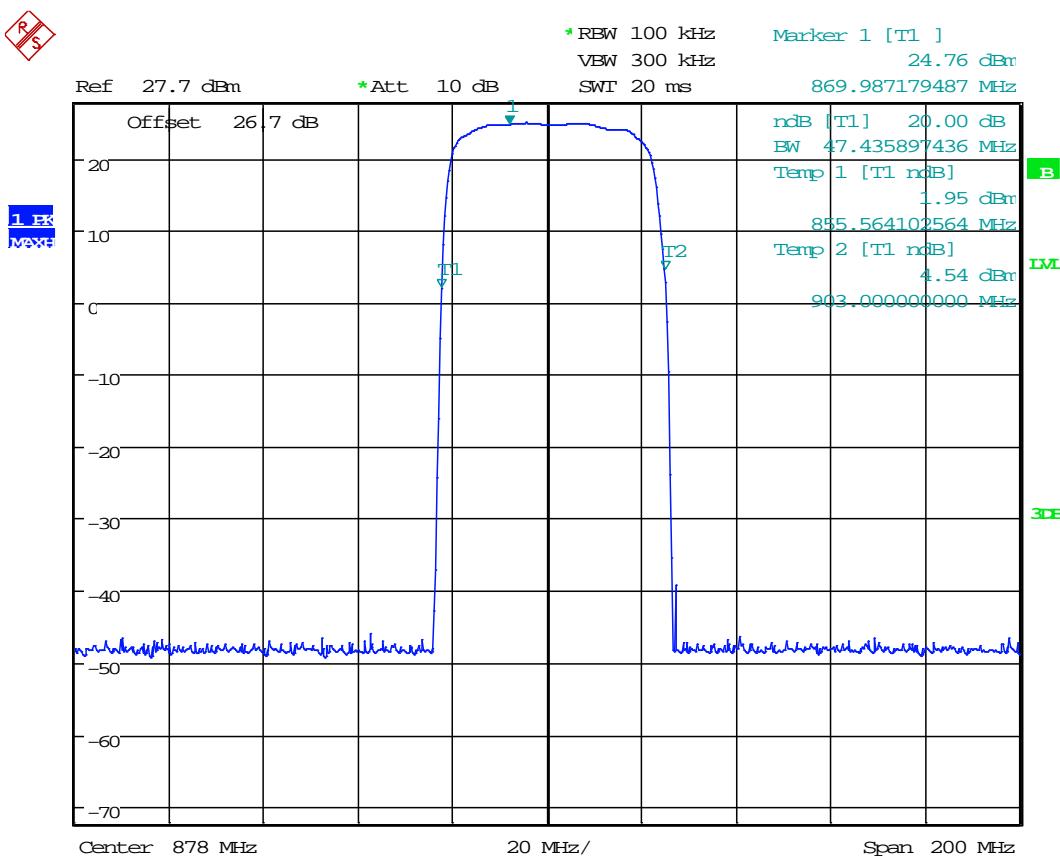

**Appendix C:****Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and its modification state:

**Sample No:** Sxx Mod w

where:

xx	= sample number	eg. S03
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

**Support Equipment (SE)** is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

**EUT configuration** refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as “single possible configuration”.

**EUT arrangement** refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

**C1) Test samples**

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S03	MBF2308-2319-15XX	
S02	OMU	

**C2) EUT Operating Mode During Testing.**

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode:
All tests detailed in this report	EUT active, operating at maximum gain and output power

**C3) EUT Configuration Information.**

The EUT was submitted for testing in one single possible configuration.

**C4) List of EUT Ports**

The tables below describe the termination of EUT ports:

Sample : S03 & S02  
Tests : Conducted

Port	Description of Cable Attached	Cable length	Equipment Connected
Server / Donor	Coaxial	2m	Measurement System
Power	Multi core	1.5m	AC Mains

Sample : S03 & S02  
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
Server / Donor	Coaxial	2m	Measurement System
Power	Multi core	1.5m	AC Mains

\* Only connected during setup.

## C5 Details of Equipment Used

TRaC No	Equipment Type	Equipment Description	Manufacturer	Last Cal	Cal Period	Due For Cal
UH003	ESHS10	Receiver	R&S	08/05/2013	12	08/05/2014
UH004	ESVS10	Receiver	R&S	11/02/2013	12	11/02/2014
UH028	UHALP 9108	Log Periodic Ant	Schwarbeck	08/07/2013	24	08/07/2015
UH029	VHBA 9123	Bicone Antenna	Schwarbeck	19/08/2013	24	19/08/2015
UH093	CBL6112B	Bilog	Chase	08/07/2013	24	08/07/2015
UH187	ESHS10	Receiver	R&S	11/02/2013	12	11/02/2014
UH191	CBL611/A	Bilog	Chase	13/12/2012	24	13/12/2014
UH281	FSU46	Spectrum Analyser	R&S	06/03/2013	12	06/03/2014
UH387	ATS	Chamber 1	Rainford EMC	04/07/2013	12	04/07/2014
UH388	ATS	Chamber 2	Rainford EMC	04/07/2013	12	04/07/2014
UH405	FSU26	Spectrum Analyser	R&S	20/03/2013	12	20/03/2014
UH420	CBL6112	Bilog	Chase	06/07/2012	24	06/07/2014
L138	3115	1-18GHz Horn	EMCO	17/10/2013	24	17/10/2015
L139	3115	1-18GHz Horn	EMCO	20/09/2013	24	20/09/2015
L193	VHA 9103 balu	Bicone Antenna	Chase	19/06/2012	24	19/06/2014
L176	2042	Signal Generator	Marconi	20/11/2012	12	20/11/2013
L254	2042	Signal Generator	Marconi	19/12/2012	12	19/12/2013
L203	UPA6108	Log Periodic Ant	Chase	19/06/2012	24	19/06/2014
L263/A	20240-20	Horn 18-26GHz	Flann	17/11/2011	24	17/11/2013
L290	CBL611/A	Bilog	Chase	13/12/2012	24	13/12/2014
L300	20240-20	Horn 18-26GHz (&UH330)	Flann	17/11/2011	24	17/11/2013
L317	ESVS10	Receiver	R&S	09/01/2013	12	09/01/2014
L415	ESVS20	Receiver	R&S	27/08/2013	12	27/08/2014
L572	8449B	Pre Amp	Agilent	12/12/2012	24	12/12/2014
REF916	SMBV100A	Signal Generator	R&S	23/07/2012	12	23/07/2013
REF940	ATS	Radio Chamber - PP	Rainford EMC	09/07/2013	12	09/07/2014
REF976	34405a	Multimeter	Agilent	26/04/2013	12	26/04/2014
REF977	SH4141	High Pass Filter	BSC	25/02/2013	24	25/02/2015

**Appendix D:**

**Additional Information**


No additional information is included within this test report.

## **Appendix F:**


## **Photographs and Figures**

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: Over view.
2. Radiated electric field emissions arrangement: close up.

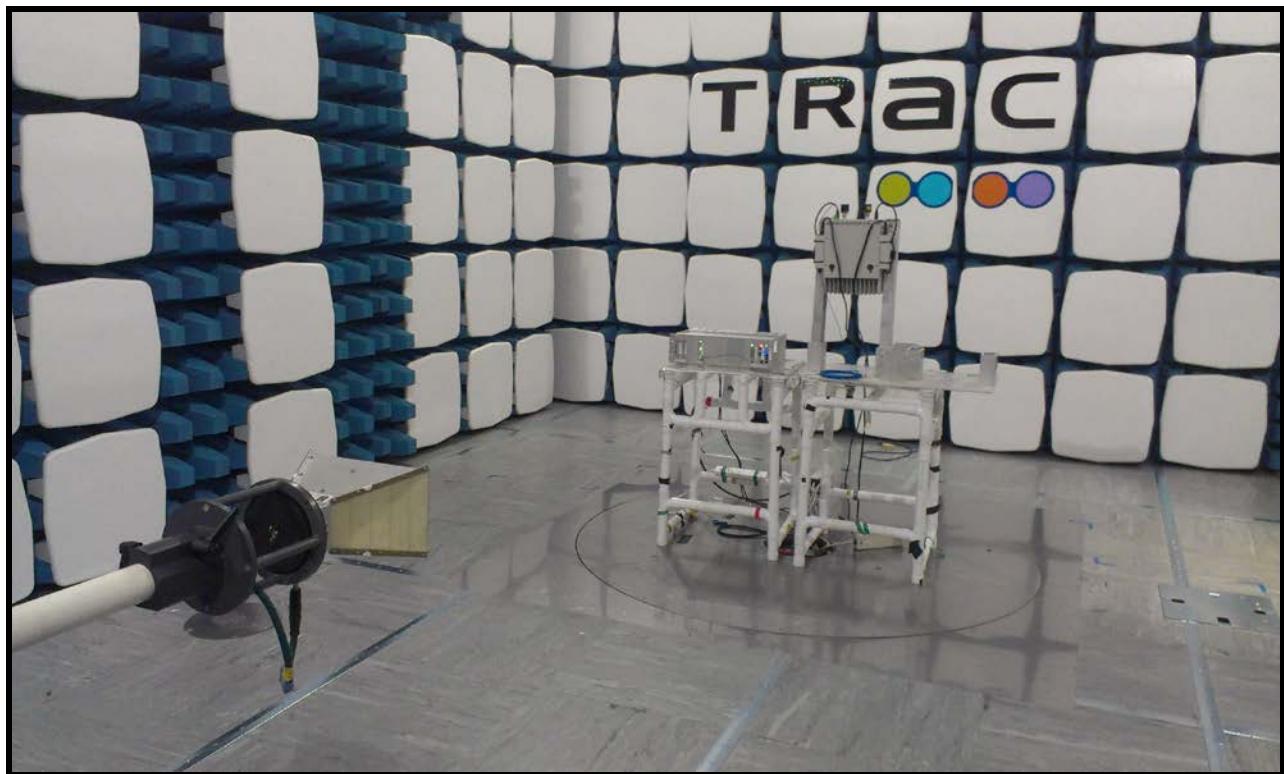

Photograph 1

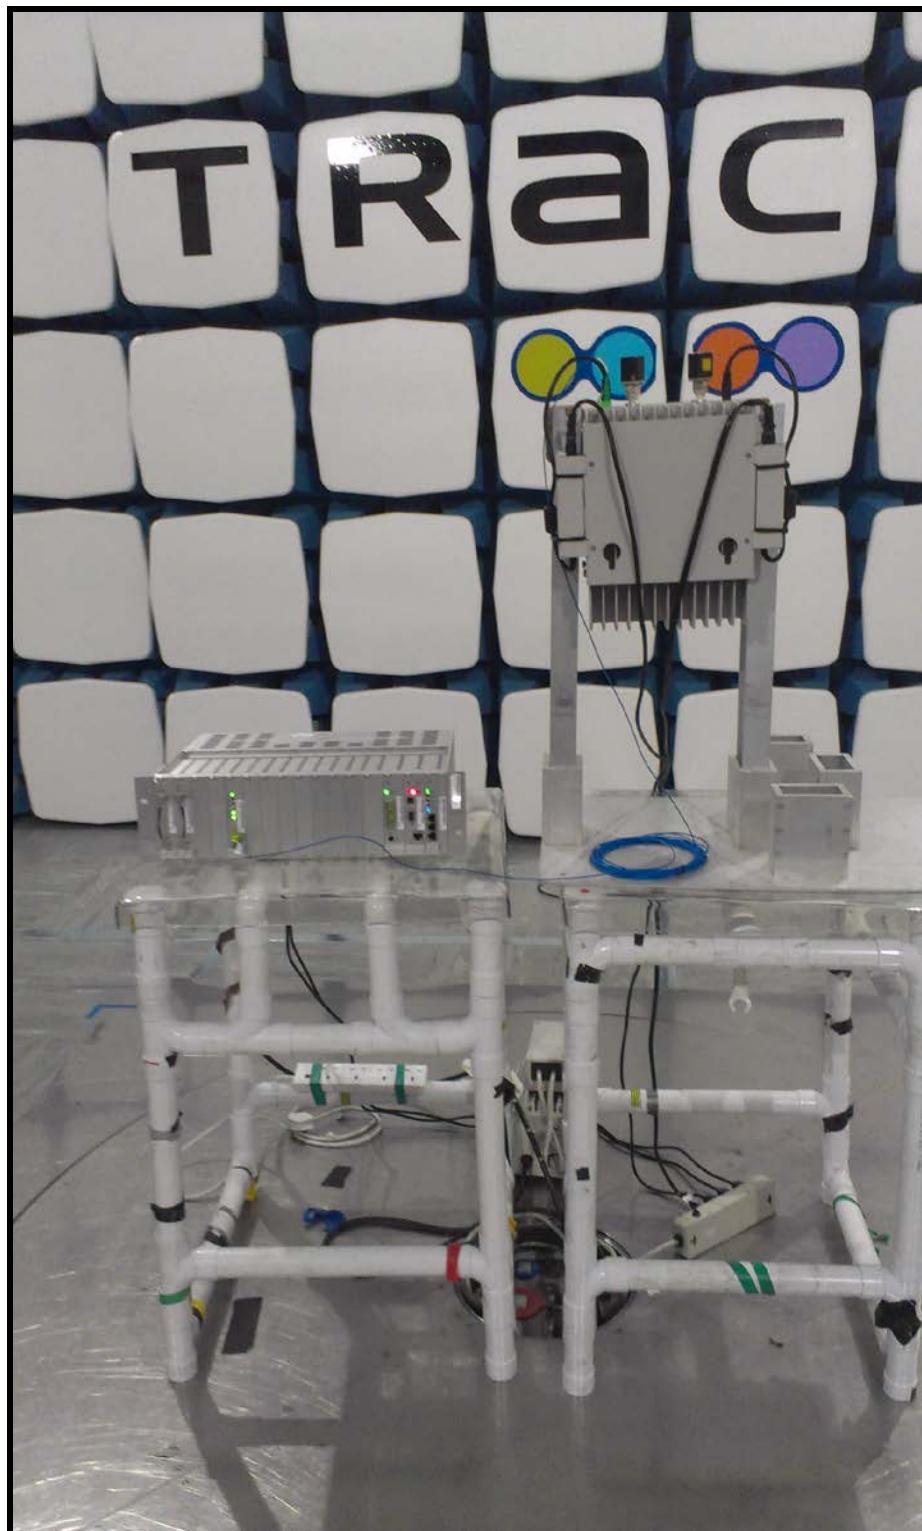

Photograph 2

