



Prüfbericht - Nr.: <i>Test Report No.</i>		14005575 001		Seite 1 von 12 Page 1 of 12	
Auftraggeber: <i>Client:</i>		Lucky Plastic Factory Ltd. Suite 907-908 Chinachem Golden Plaza 77 Mody Road T.S.T. East, Kowloon Hong Kong			
Gegenstand der Prüfung: <i>Test item:</i>		Lower Power Transmitter			
Bezeichnung: <i>Identification:</i>		Refer to section 3.1		Serien-Nr.: <i>Serial No.</i>	Engineering Sample
Wareneingangs-Nr.: <i>Receipt No.:</i>		040514001		Eingangsdatum: <i>Date of receipt:</i>	14.05.2004
Prüfart: <i>Testing location:</i>		Refer to section 2.1			
Prüfgrundlage: <i>Test specification:</i>		FCC Part 15, Subpart C			
Prüfergebnis: <i>Test Result</i>		Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The a. m. test item passed.			
geprüft / tested by: P.Poon		kontrolliert / reviewed by T.Berns			
27.05.2004 Datum Date		 Unterschrift Signature		27.05.2004 Datum Date	
				 Unterschrift Signature	
Sonstiges / Other Aspects: FCC ID: NEX-9405-27					
Abkürzungen: OK, Pass = entspricht Prüfgrundlage Fail = entspricht nicht Prüfgrundlage N/A = nicht anwendbar		Abbreviations: OK, Pass = passed Fail = failed N/A = not applicable			
Dieser Prüfbericht bezieht sich nur auf den o.g. Prüfgegenstand und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products.					

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 2 von 12
Page 2 of 12

TEST SUMMARY

7.1 RADIATED EMISSION OF CARRIER FREQUENCY
Result: Pass

7.2 SPURIOUS RADIATED EMISSIONS
Result: Pass

7.3 BANDWIDTH MEASUREMENT
Result: Pass

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 3 von 12
Page 3 of 12

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
3	GENERAL PRODUCT INFORMATION	6
3.1	PRODUCT FUNCTION AND INTENDED USE.....	6
3.2	CIRCUIT DESCRIPTION	6
3.3	RATINGS AND SYSTEM DETAILS.....	6
3.4	INDEPENDENT OPERATION MODES	7
3.5	SUBMITTED DOCUMENTS.....	7
3.6	RELATED SUBMITTAL(S) GRANTS.....	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION	8
4.2	TEST OPERATION AND TEST SOFTWARE	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
5	TEST METHODOLOGY	9
6	FIELD STRENGTH CALCULATION	9
7	TEST RESULTS.....	10
7.1	RADIATED EMISSION OF CARRIER FREQUENCY	10
7.2	SPURIOUS RADIATED EMISSIONS	11
7.3	BANDWIDTH MEASUREMENT	12

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 4 von 12
Page 4 of 12

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test Results

Appendix 2: Test Setup

Appendix 3: External Photographs of EUT

Appendix 4: Internal Photographs of EUT

Appendix 5: FCCID Label, Block Diagram, Schematics and User Manual

2 Test Sites

2.1 Test Facilities

TÜV Rheinland Hong Kong Ltd.
Unit 8, 25th Floor, Skyline Tower
39 Wang Kwong Road
Kowloon Bay
Hong Kong

Hong Kong Productivity Council
HKPC Building
78 Tat Chee Avenue
Kowloon
Hong Kong

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 5 von 12
Page 5 of 12

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

	Kind of Equipment	Manufacturer	Type	S/N
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input checked="" type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input checked="" type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3116	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking Gen.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 6 von 12
Page 6 of 12

3 General Product Information

3.1 Product Function and Intended Use

The equipment under test (EUT) is a transmitter for a RC toy car operating at 27.145MHz. The EUT has two control rods for commanding the forward, backward, left and right movement of the associated receiver.

After construction checking and declaration from the manufacturer, it is deemed that that the transmitter of 1081,1082,1083, 9389, 9406, 9407 and 9408 are same in circuit design and PCB layout as the transmitter of 9405, they only differ in the cosmetic design. Hence, all testing was conducted on the representative model: 9405.

FCCID: NEX-9405-27

Model	Product description
1081	3" R/C Polaris MSX Watercraft
1082	3" R/C Micro Boat
1083	3" R/C Cabin Cruisers
9389	3" R/C Smart
9405	Micro Subaru
9406	Micro Mitsubishi
9407	3" R/C Roadster
9408	Micro Citroen

3.2 Circuit Description

IC1 and the associated circuit act as AF-Modulator. Q2 and the associated circuit act as a RF-amplifier. Q1 together with 27.145MHz crystal acts as an oscillator to drive the base of Q2, signal from Q1 and the modulation provided by IC1 are then summed into Q2. The matching network at output of Q1 is to limit the harmonic content and provide the proper coupling to antenna output.

3.3 Ratings and System Details

	Transmitter
Frequency range	: 27.1450MHz
Number of channels	: 1
Type of antenna	: Integral antenna
Power supply	: Battery operated 3x1.5V "AAA" size batteries.
Ports	: none
Protection Class	: III

3.4 Independent Operation Modes

The basic operation modes are:

- Power: On and Off
- Two control rods for commanding the left and right, forward and backward movement of the associated receiver.

For further information refer to User Manual

3.5 Submitted Documents

The submitted documents are listed as follow:

- Circuit diagram
- Block diagram
- Rating label
- User manual

3.6 Related Submittal(s) Grants

This is a single application for certification of the transmitter. The receiver for this transmitter is authorized by the Certification procedure.

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation should refer to Section 5 and 7.

- There was no special software to exercise the device.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

-none

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Circuit Diagram or the Technical Construction File. No additional measures were employed to achieve compliance.

5 Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.4-2001.

The equipment under test (EUT) was placed at the middle of the 80cm height turntable, and the turntable is 3 meters far from the measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

The frequency range scanned is from the lowest radio frequency signal generated in the device which greater than 9 KHz to the tenth harmonic of the highest fundamental frequency or 40GHz, whichever is lower.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in section 7.1.1 and 7.1.2 of this test report.

6 Field Strength Calculation

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters
R = Reading of Spectrum Analyzer in dBuV
AF = Antenna Factor in dB
CF = Cable Attenuation Factor in dB
FA = Filter Attenuation Factor in dB
PA = Preamplifier Factor in dB

FA and PA are only be used for the measuring frequency above 1 GHz.

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 10 von 12
Page 10 of 12

7 Test Results

7.1 Radiated Emission of Carrier Frequency

RESULT:

Pass

Test Specification : FCC Part 15 section 15.227 (a)
 Test Method : ANSI 63.4-2001
 Measurement Location : Semi Anechoic Chamber
 Measurement Distance : 3m
 Detector Function : Peak and average
 Measurement BW : 100KHz
 Supply Voltage : DC 4.5V

Polarization: Vertical

Detector function	Frequency	Reading	Antenna Factor	Attenuation of cable	Measured Field strength at 3m	Delta to Limit
	(MHz)	(dBuV)	(dBuV/m)	(dB)	(dBuV/m)	(dB)
Peak	27.145	20.73	18.80	0.37	39.90	60.10
Average	27.145	15.73	18.80	0.37	34.90	65.10

Polarization: Horizontal

Detector function	Frequency	Reading	Antenna Factor	Attenuation of cable	Measured Field strength at 3m	Delta to Limit
	(MHz)	(dBuV)	(dBuV/m)	(dB)	(dBuV/m)	(dB)
Peak	27.145	6.23	18.80	0.37	25.40	74.60
Average	27.145	0.53	18.80	0.37	19.70	80.30

Limit

Section 15.227 (a)

Frequency within the band	Peak Emission		Average Emission	
	(microvolt / meter)	dBμV/m	(microvolt / meter)	dBμV/m
26.96-27.28MHz	100,000	100.0	10,000	80.0

According to section 15.35(b), when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

Prüfbericht - Nr.:**14005575 001**

Seite 11 von 12

Test Report No.

Page 11 of 12

7.2 Spurious Radiated Emissions

RESULT:

Pass

Test Specification : FCC Part 15 section 15.209
 Test Method : ANSI 63.4-2001
 Measurement Location : Semi Anechoic Chamber
 Measurement Distance : 3m
 Detector Function : Quasi Peak
 Measurement BW : 100KHz
 Supply Voltage : DC 4.5V
 Measuring Frequency Range : 30-1000MHz

Polarization: Vertical

Frequency	Reading	Antenna Factor	Attenuation of cable	Field strength at 3m	Limit at 3m	Delta to Limit
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
54.290	9.10	11.95	0.55	21.60	40.00	-18.40
81.435	1.39	9.70	0.61	11.70	40.00	-28.30
108.580	1.12	11.60	0.78	13.50	43.50	-30.00
135.725	0.50	13.30	0.90	14.70	43.50	-28.80
162.870	0.38	14.90	0.92	16.20	43.50	-27.30
271.450	3.60	12.20	1.30	17.10	43.50	-26.40
298.595	3.10	13.00	1.30	17.40	43.50	-26.10
325.740	2.90	13.60	1.40	17.90	43.50	-25.60
352.885	2.90	14.35	1.45	18.70	43.50	-24.80

Polarization: Horizontal

Frequency	Reading	Antenna Factor	Attenuation of cable	Field strength at 3m	Limit at 3m	Delta to Limit
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
54.290	0.10	11.95	0.55	12.60	40.00	-27.40
81.435	3.19	9.70	0.61	13.50	40.00	-26.50
108.580	1.62	11.60	0.78	14.00	43.50	-29.50
135.725	2.30	13.30	0.90	16.50	43.50	-27.00
162.870	0.98	14.90	0.92	16.80	43.50	-26.70
244.305	4.76	11.50	1.14	17.40	43.50	-26.10
271.450	4.00	12.20	1.30	17.50	43.50	-26.00
298.595	3.50	13.00	1.30	17.80	43.50	-25.70
357.885	2.40	14.35	1.45	18.20	43.50	-25.30

For test results refer to Appendix 1, page 3-6

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 12 von 12
Page 12 of 12

Limit

Section 15.209

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

Field strength limits within the restricted bands using average detector:

Frequency (MHz)	Field strength (microvolt/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100	$20 \cdot \log(100) = 40.0$	3
88-216	150	$20 \cdot \log(150) = 43.5$	3
216-960	200	$20 \cdot \log(200) = 46.0$	3
Above 960	500	$20 \cdot \log(500) = 54.0$	3

According to section 15.35(b), on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated.

7.3 Bandwidth Measurement

RESULT:

Pass

Test Specification : FCC Part 15 section 227(b)
 Port of Testing : Antenna port
 Detector Function : Peak
 Supply Voltage : DC 4.5V
 Temperature : 22°C
 Humidity : 50%

The field strength measured at the lower edge 26.96MHz and upper edge 27.28MHz are 12.25dB and 14.63dB respectively.

For test results refer to Appendix 1, page 1-2

Limit

Section 15.227(b)

The field strength of any emission which appears outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 1 von 5
 Page 1 of 5




*RBW 3 kHz Marker 3 [T1]
 *VBW 3 kHz 14.63 dBµV
 *SWT 500 ms 27.280000000 MHz

Ref 87 dBµV

Att 10 dB

**1 PK
 MAXH**

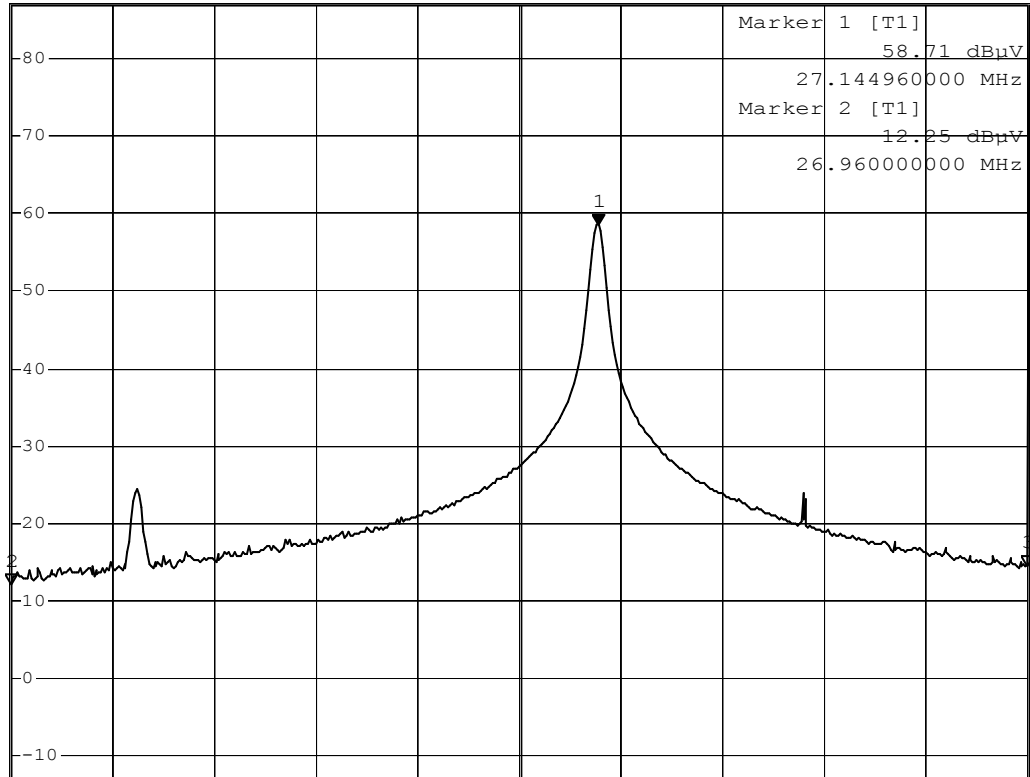

Start 26.96 MHz

32 kHz/


Stop 27.28 MHz

Date: 25.MAY.2004 12:07:15

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 2 von 5
Page 2 of 5

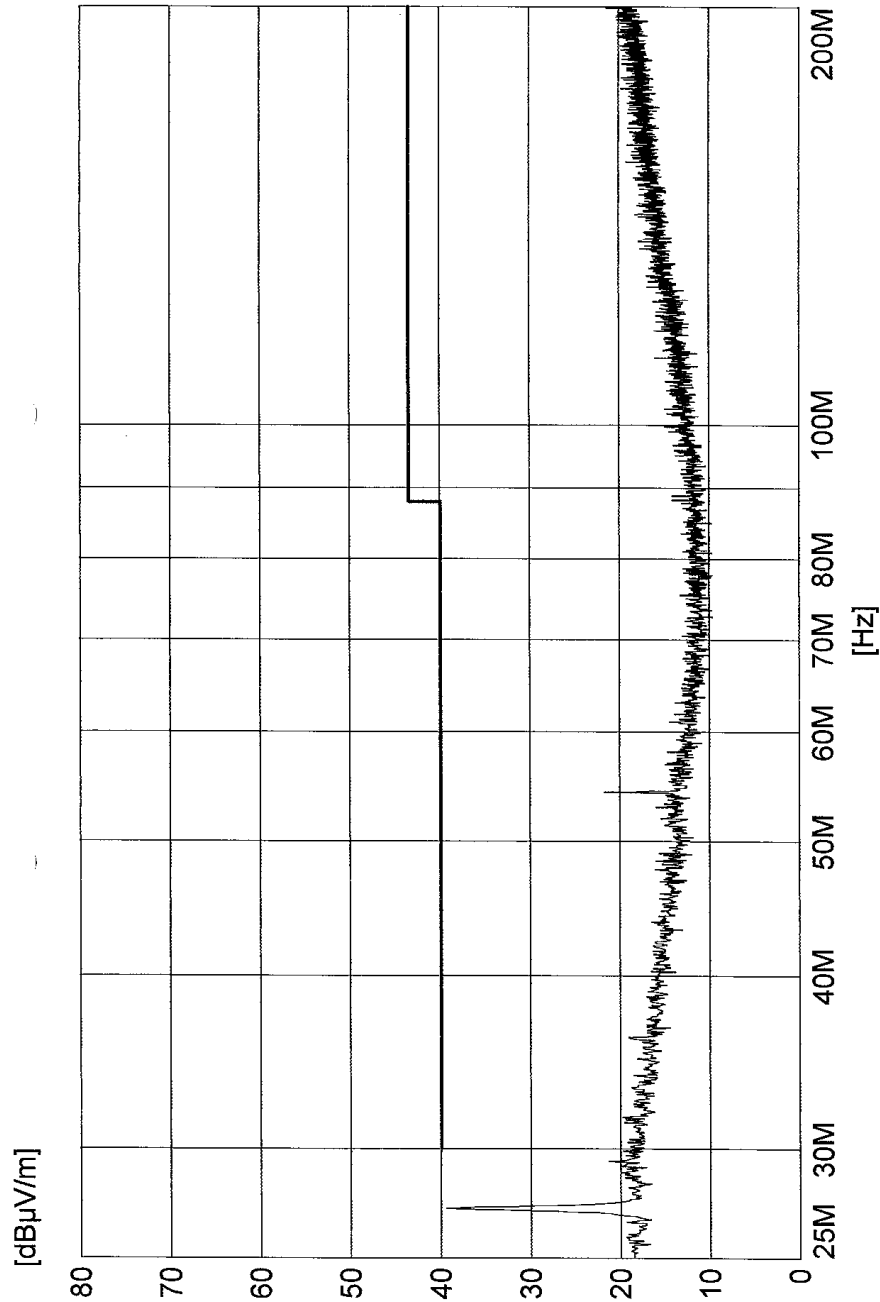


(V)

Prüfbericht - Nr.:
 Test Report No.

14005575 001

Seite 3 von 5
 Page 3 of 5

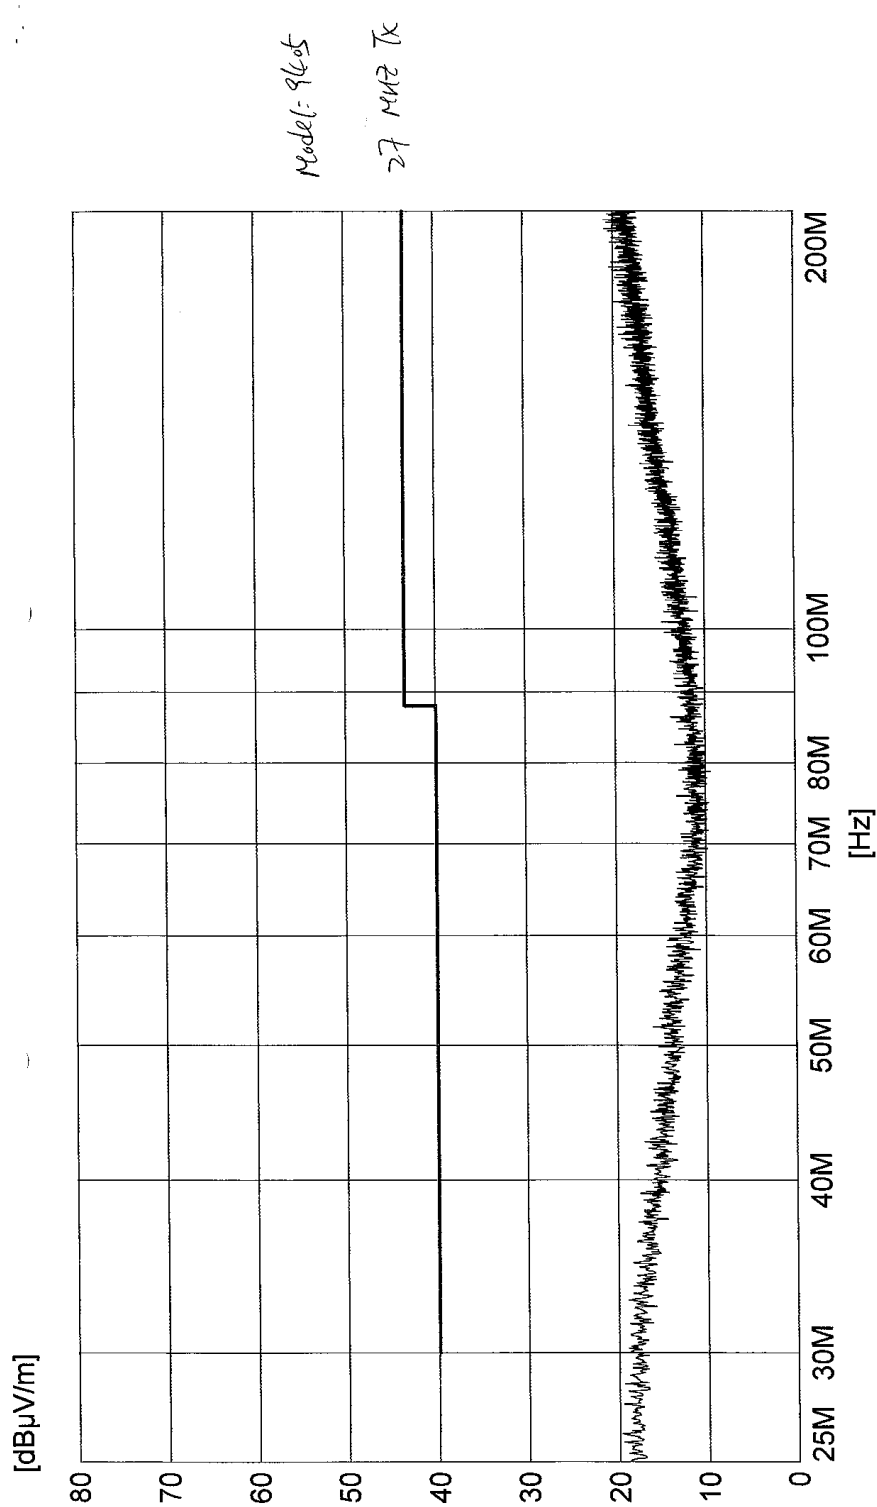


— MES TUV200504A02.PK
 - - - LIM FCC P15.209

(H)

Prüfbericht - Nr.:
Test Report No.

14005575 001

Seite 4 von 5
Page 4 of 5

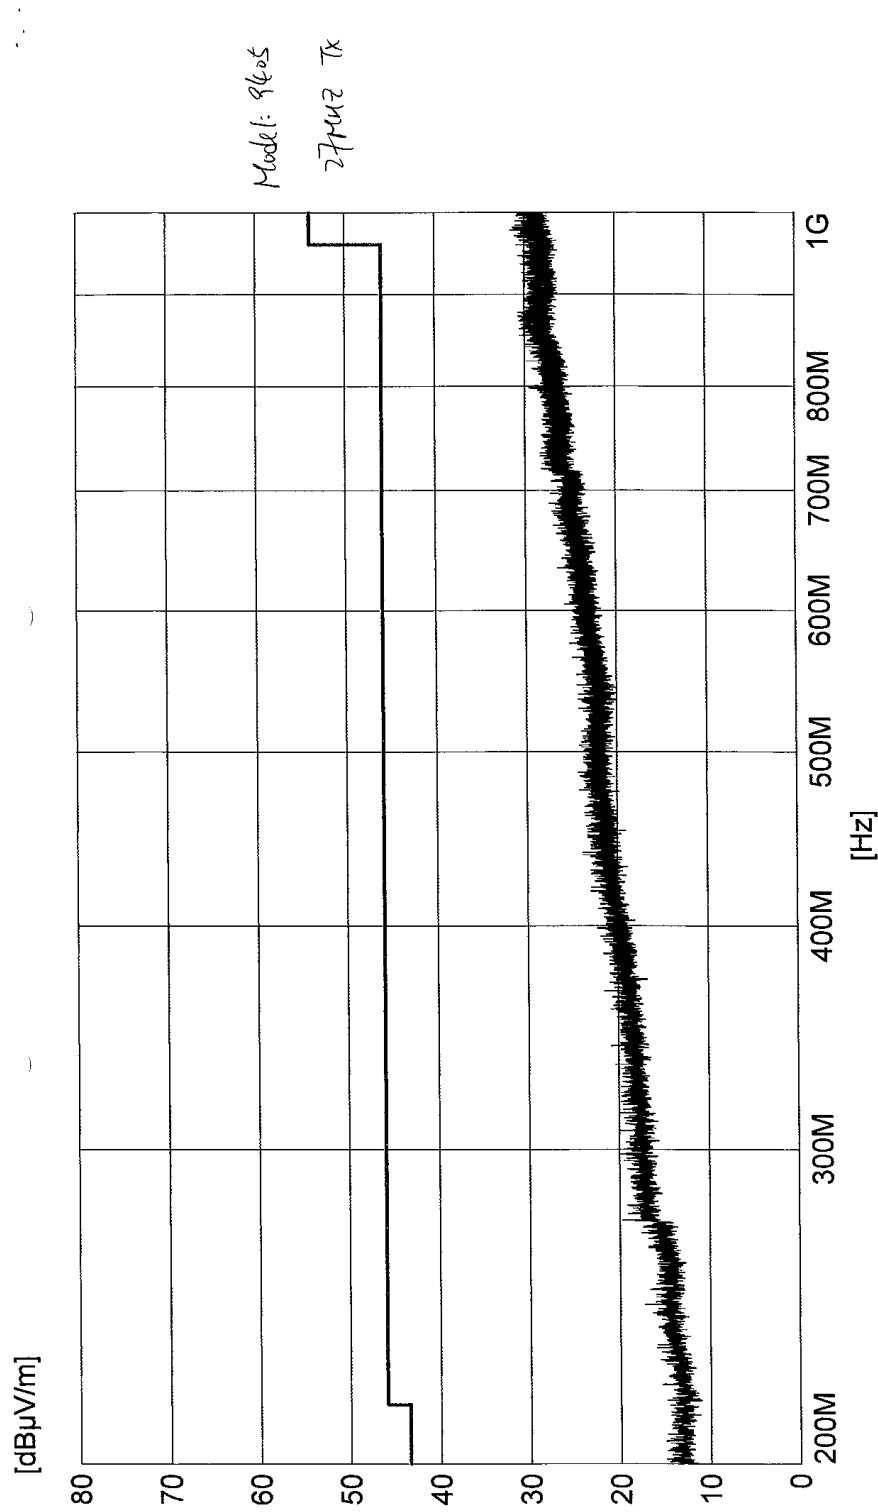


— MES TUV200504A03.PK
— LIM FCC P15.209

(v)

Prüfbericht - Nr.:
 Test Report No.

14005575 001

Seite 5 von 5
 Page 5 of 5

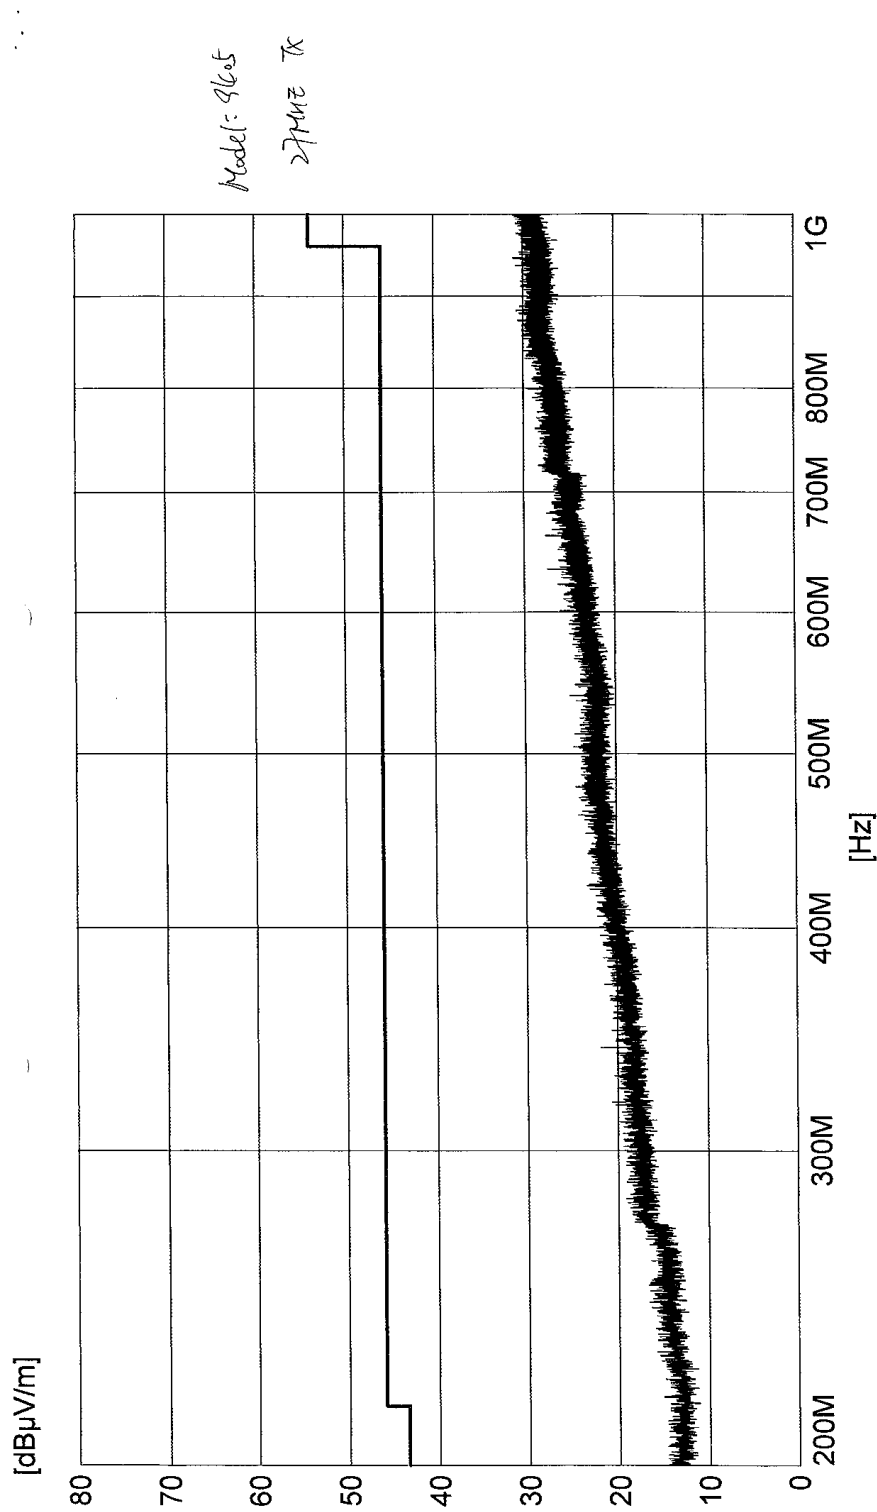

(H)

— MES TUV200504A04.PK
 — LIM FCC P15.209