

7.4 Field strength of spurious radiation (§2.1053 & §95.3379)

Description

§2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

Limits

§95.3379 76-81 GHz Band Radar Service unwanted emissions limits.

- (a) The power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:
- (1) Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequency [MHz]	Field Strength [$\mu\text{V/m}$] / [dB $\mu\text{V/m}$]	Measurement distance [m]
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0 / 29.5	30
30 – 88	100 / 40.0	3
88 – 216	150 / 43.5	3
216 – 960	200 / 46.0	3
960 – 40 000	500 / 54.0	3

- (2) The power density of radiated emissions outside the 76-81 GHz band above 40.0 GHz shall not exceed the following, based on measurements employing an average detector with a 1 MHz RBW:

Frequency [GHz]	Power Density / EIRP	Measurement distance [m]
40 – 200	600 pW/cm ² → -1.7 dBm	3
200 – 243	1000 pW/cm ² → +0.5 dBm	3

Note

Measurements with the peak detector are also suitable to demonstrate compliance of an EUT, as long as the required resolution bandwidth is used, because peak detection will yield amplitudes equal to or greater than amplitudes measured with RMS detector. The measurement data from a spectrum analyser peak detector will represent the worst-case results (see ANSI C63.10).

Calculation of the far field distance (Rayleigh distance):

The aperture dimensions of these horn antennas shall be small enough so that the measurement distance in meters is equal to or greater than the Rayleigh distance (i.e. $R_m = 2D^2 / \lambda$), where D is the largest linear dimension (i.e. width or height) of the antenna aperture in m and λ is the free-space wavelength in meters at the frequency of measurement.

Antenna type	Frequency range [GHz]	D [m]	Highest frequency in use [GHz]	Far field distance R_m [m]
20240-20	17.6 – 26.7	0.0520	26.5	0.478
22240-20	26.4 – 40.1	0.0342	40	0.312
23240-20	33.0 – 50.1	0.0280	50	0.261
24240-20	39.3 – 59.7	0.0230	60	0.212
25240-20	49.9 – 75.8	0.0185	75	0.171
26240-20	60.5 – 91.5	0.0150	90	0.135
27240-20	73.8 – 112	0.0124	110	0.113
29240-20	114 – 173	0.0085	170	0.082
30240-20	145 – 220	0.0068	220	0.068
32240-20	217 – 330	0.00446	243	0.032

Used test distances

Up to 18 GHz: 3.00 m
18 – 60 GHz: 1.00 m
60 – 84 GHz: 1.50 m
84 – 110 GHz: 0.25 m
110 – 170 GHz: 0.25 m
170 to 220 GHz: 0.50 m
220 to 231 GHz: 1.00 m
In-band / OOB: 1.50 m


Test setup: 8.1 – 8.4 (in case of field strength measurements below 40 GHz: test distance correction factor of 20dB/decade is already considered in the plots / test result table)

Test results:

Channel / Mode	Frequency [GHz]	Detector	Test distance [m]	Level [dBm]	Limit [dBm]	Margin [dB]
----------------	-----------------	----------	-------------------	-------------	-------------	-------------

No critical emissions found. For further details see plots.

Plot no. 33: radiated emissions 9 kHz – 30 MHz, loop antenna

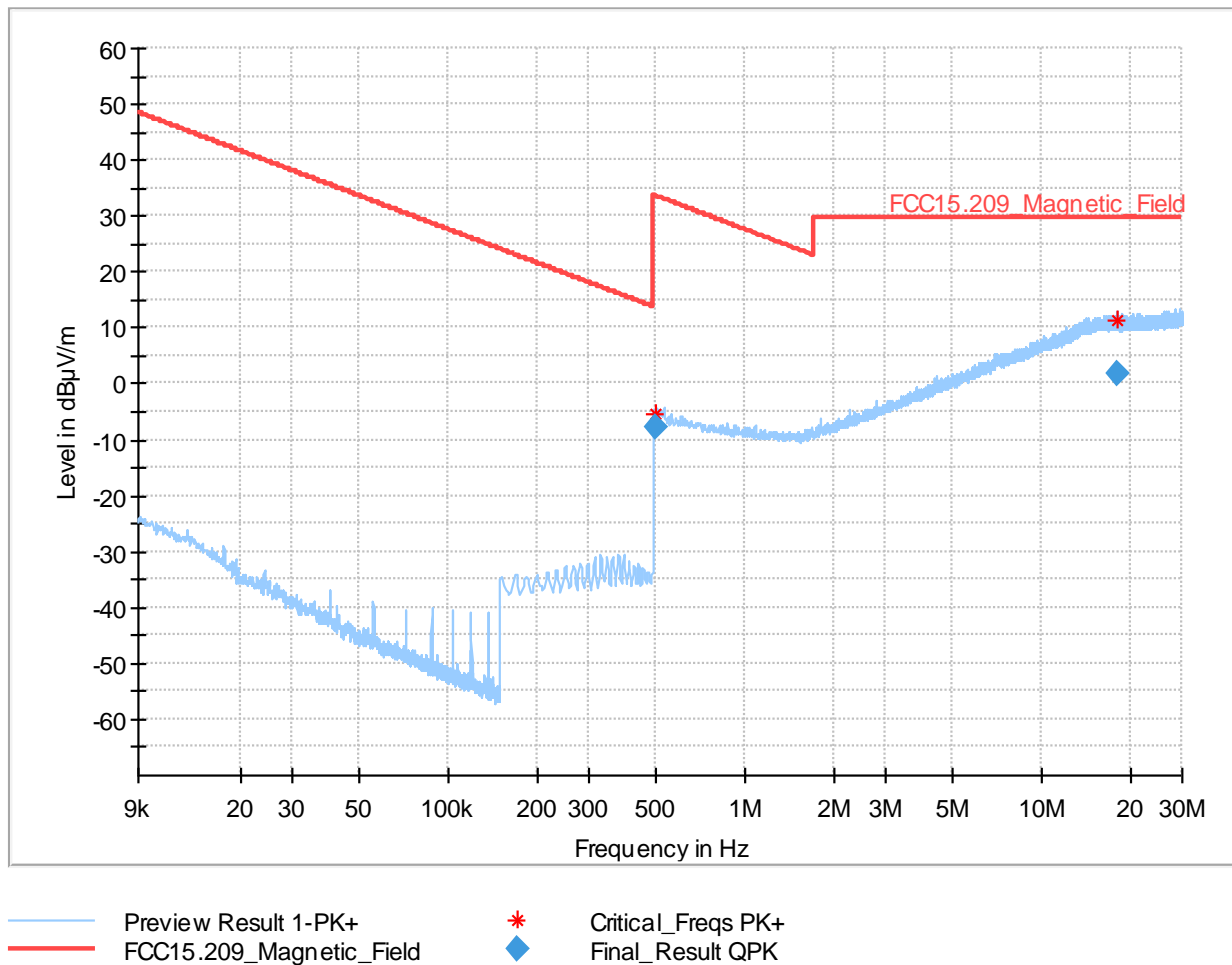


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.503250	-7.89	33.57	41.46	100.0	9.000	V	111.0	-19.6
18.210750	1.95	29.54	27.59	100.0	9.000	V	233.0	0.5

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Comment
0.503250	11:06:47 - 09.04.2024
18.210750	11:07:54 - 09.04.2024

Plot no. 34: radiated emissions 30 MHz – 1 GHz, polarization vertical / horizontal

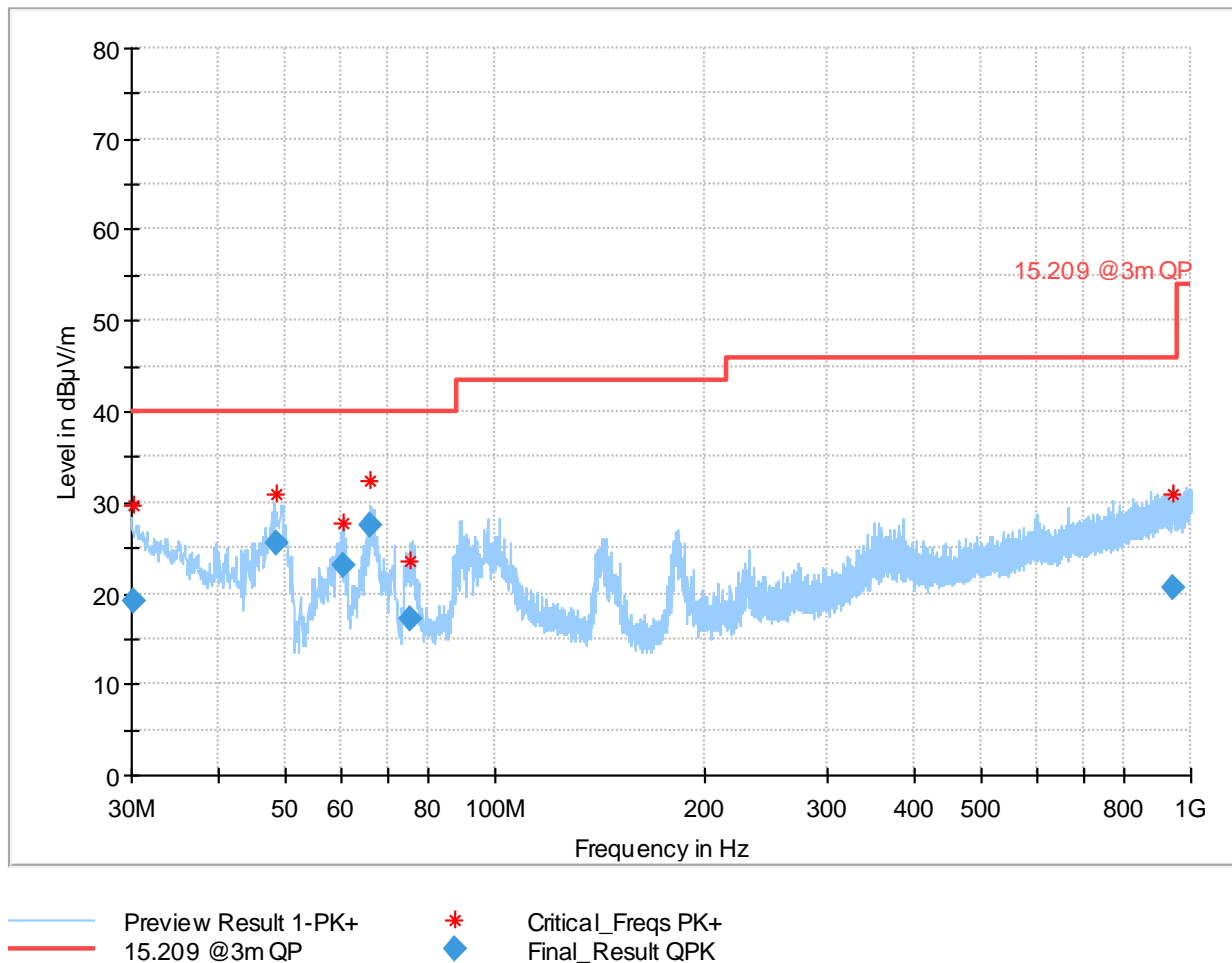

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.120000	19.09	40.00	20.91	100.0	120.000	103.0	H	335.0
48.593500	25.61	40.00	14.39	100.0	120.000	103.0	V	77.0
60.506500	23.06	40.00	16.94	100.0	120.000	198.0	V	248.0
66.206500	27.48	40.00	12.52	100.0	120.000	116.0	V	320.0
75.329500	17.24	40.00	22.76	100.0	120.000	100.0	V	271.0
940.768000	20.55	46.00	25.45	100.0	120.000	250.0	V	335.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Elevation (deg)	Corr. (dB/m)	Comment
30.120000	0.0	20.3	09:50:15 - 09.04.2024
48.593500	0.0	9.1	09:52:34 - 09.04.2024
60.506500	0.0	7.1	09:58:41 - 09.04.2024
66.206500	0.0	8.8	09:56:30 - 09.04.2024
75.329500	0.0	10.5	09:54:43 - 09.04.2024
940.768000	0.0	23.4	10:00:53 - 09.04.2024

Plot no. 35: radiated emissions 1 GHz – 18 GHz, polarization vertical / horizontal

Spectrum Overview

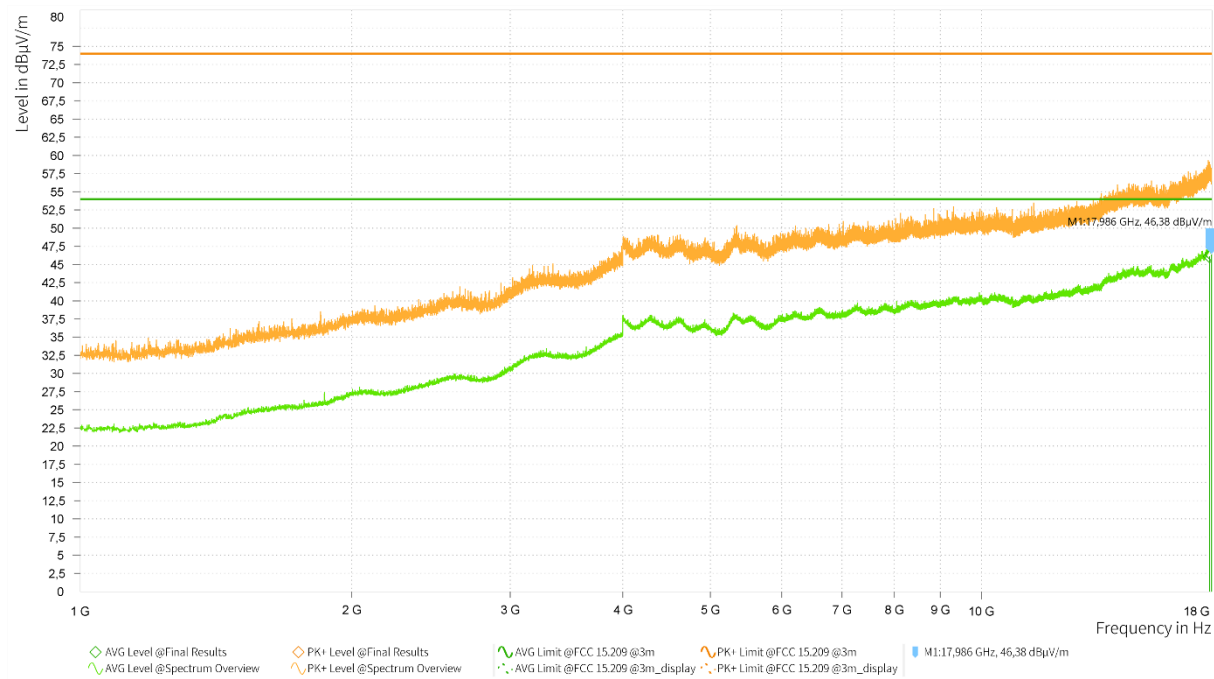


EMI Final Results (1/2)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
1	17.896,560				46,12	54,00	7,88	44,19	V	60	29,2	1,50
1	17.986,030				46,38	54,00	7,62	44,47	V	105	318,9	1,50


EMI Final Results (2/2)

Rg	Frequency [MHz]	Meas. BW [kHz]	Time of Meas.	Source	Attachments	Comment
1	17.896,560	1.000,000	13:39:56	Critical Points		
1	17.986,030	1.000,000	13:41:22	Critical Points		


Plot no. 36: radiated emissions 18 GHz – 26.5 GHz, polarization vertical / horizontal

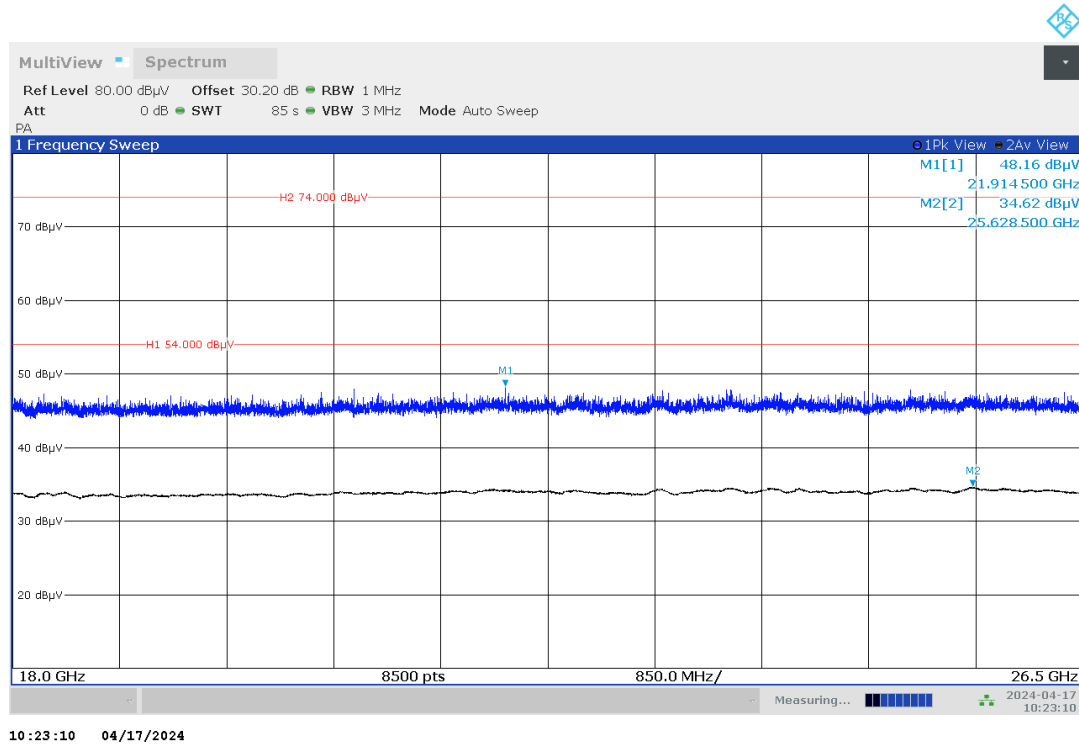


Plot no. 37: radiated emissions 26.5 GHz – 40 GHz, polarization vertical / horizontal

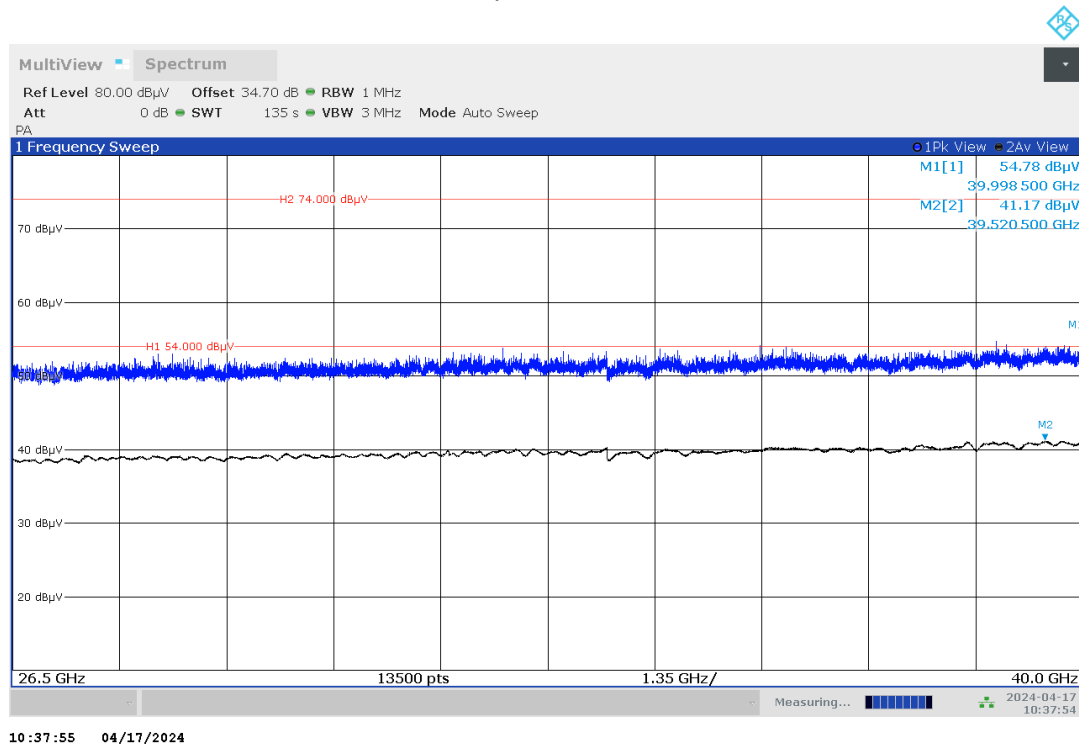

Plot no. 38: radiated emissions 40 GHz – 60 GHz, polarization vertical / horizontal

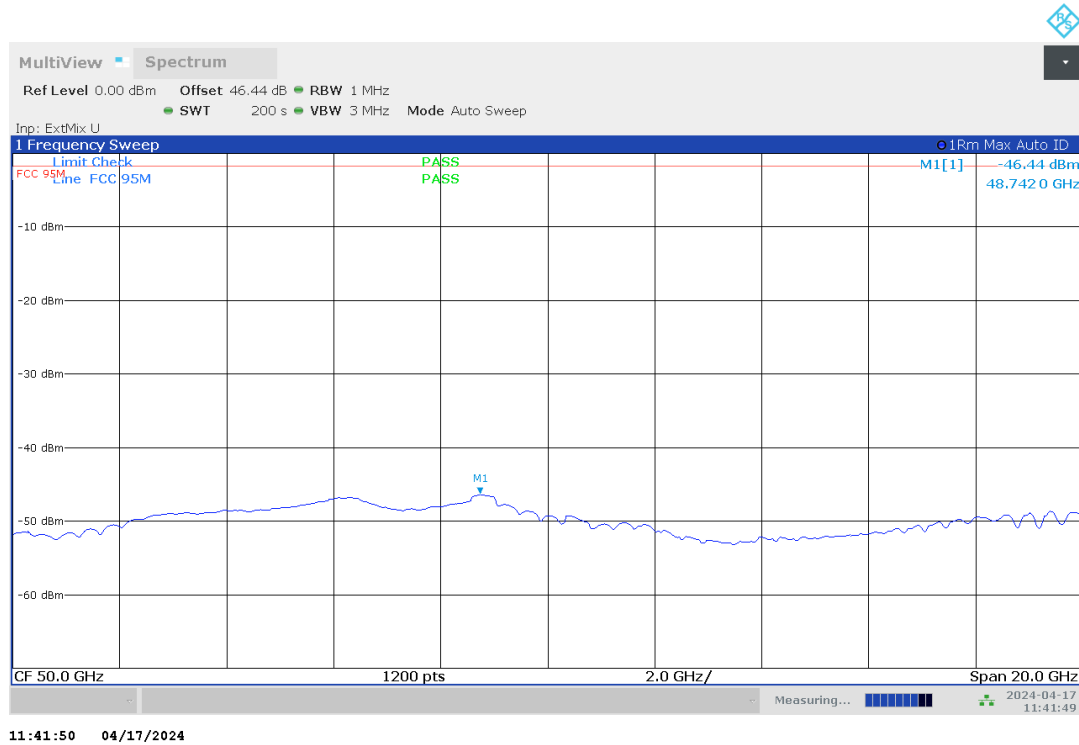

Plot no. 39: radiated emissions 60 GHz – 75 GHz, polarization vertical / horizontal

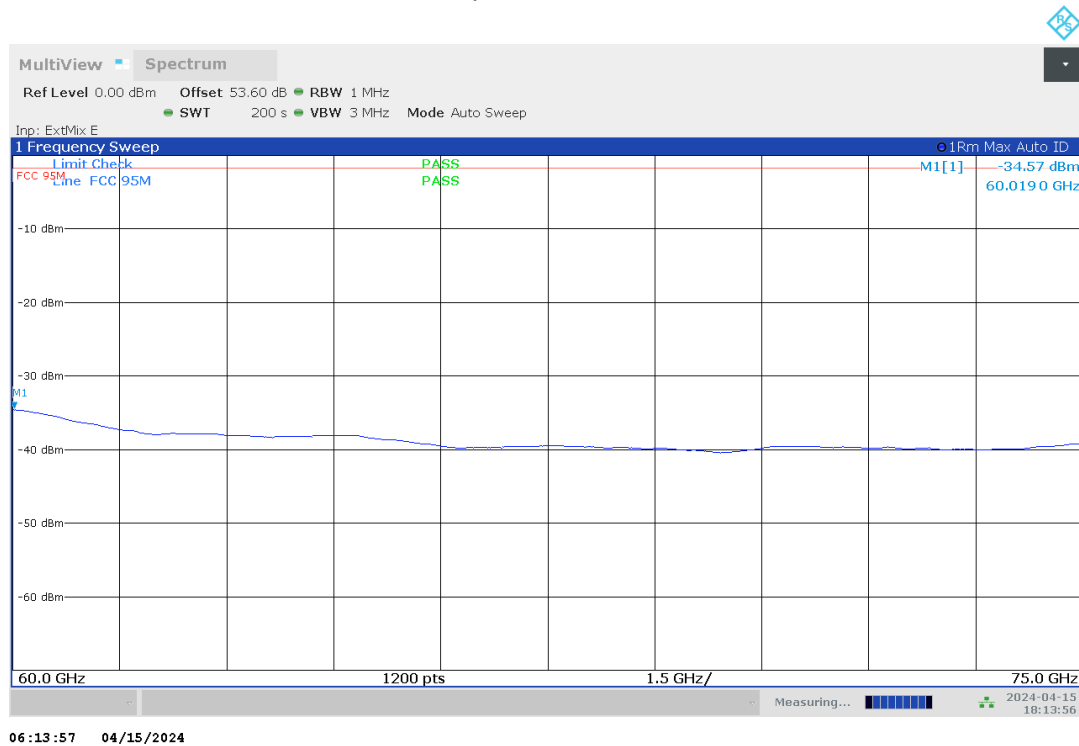


Plot no. 40: radiated emissions 75 GHz – 76 GHz, BEC, polarization aligned with radar sensor, Mode 1




Plot no. 41: radiated emissions 77 GHz – 78 GHz, polarization vertical / horizontal




Plot no. 42: radiated emissions 78 GHz – 84 GHz, polarization vertical / horizontal

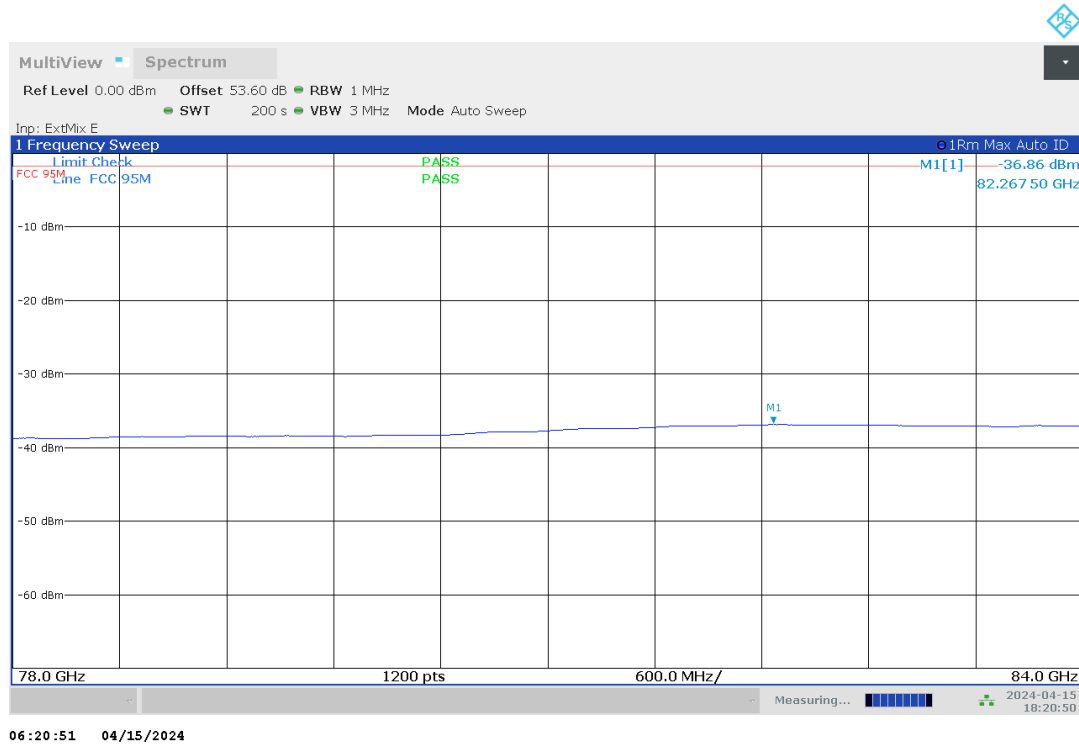


Plot no. 43: radiated emissions 84 GHz – 110 GHz, polarization vertical / horizontal

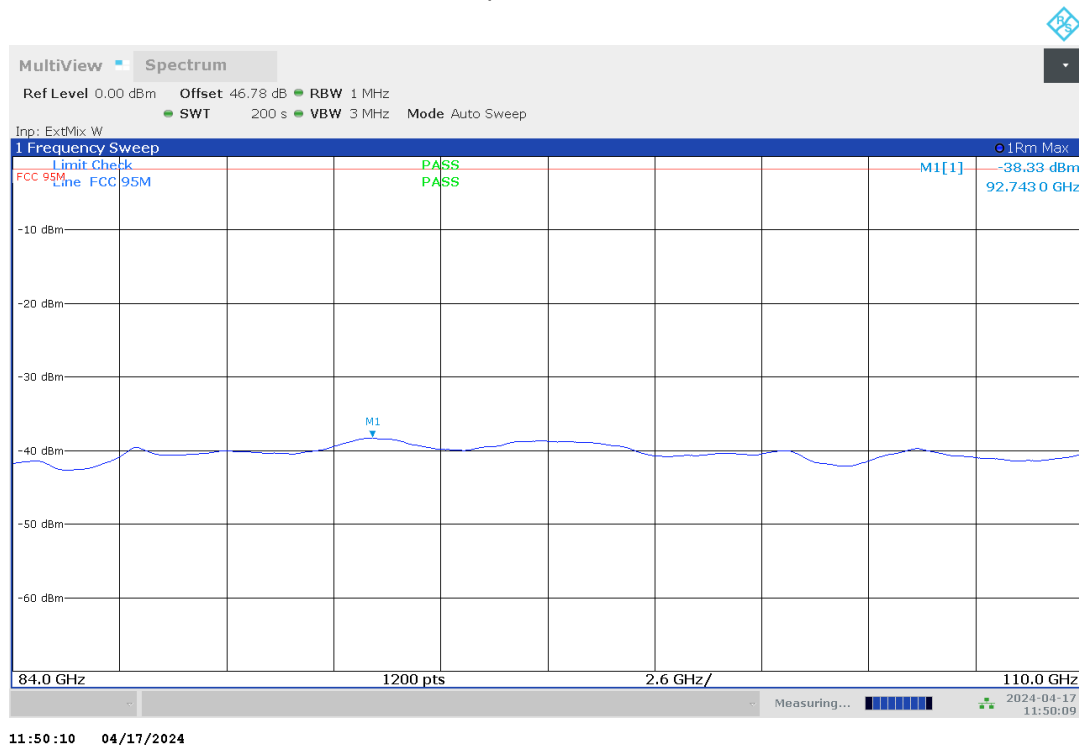


Plot no. 44: radiated emissions 110 GHz – 170 GHz, polarization vertical / horizontal

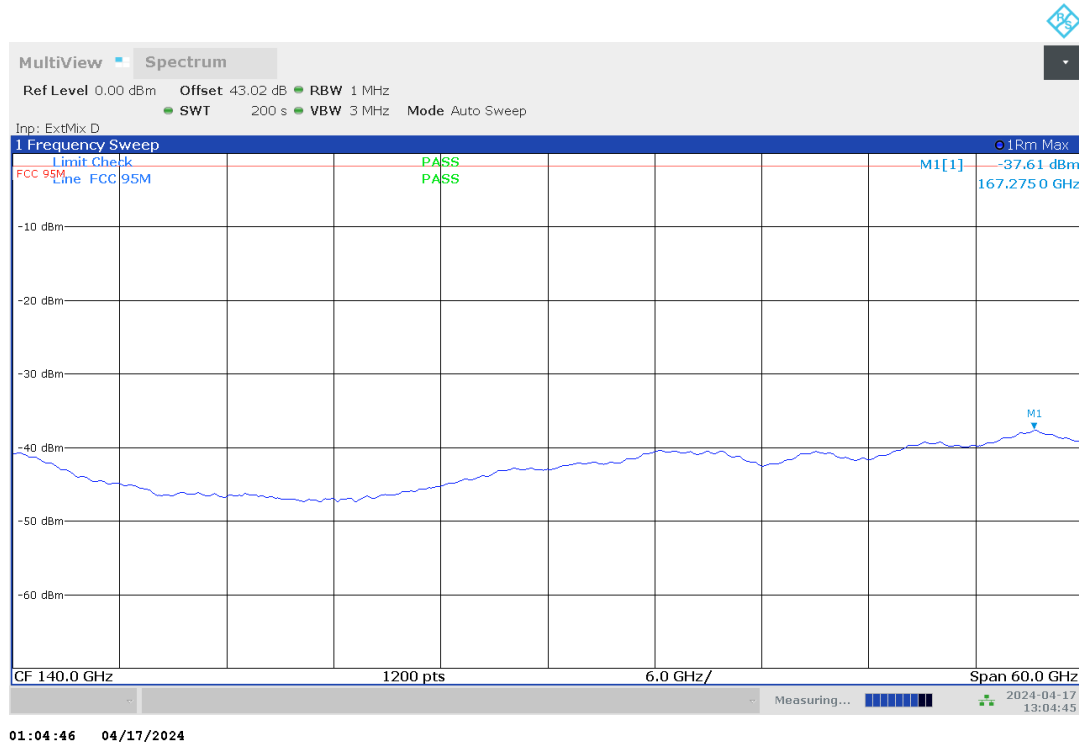


Plot no. 45: radiated emissions 170 GHz – 220 GHz, polarization vertical / horizontal

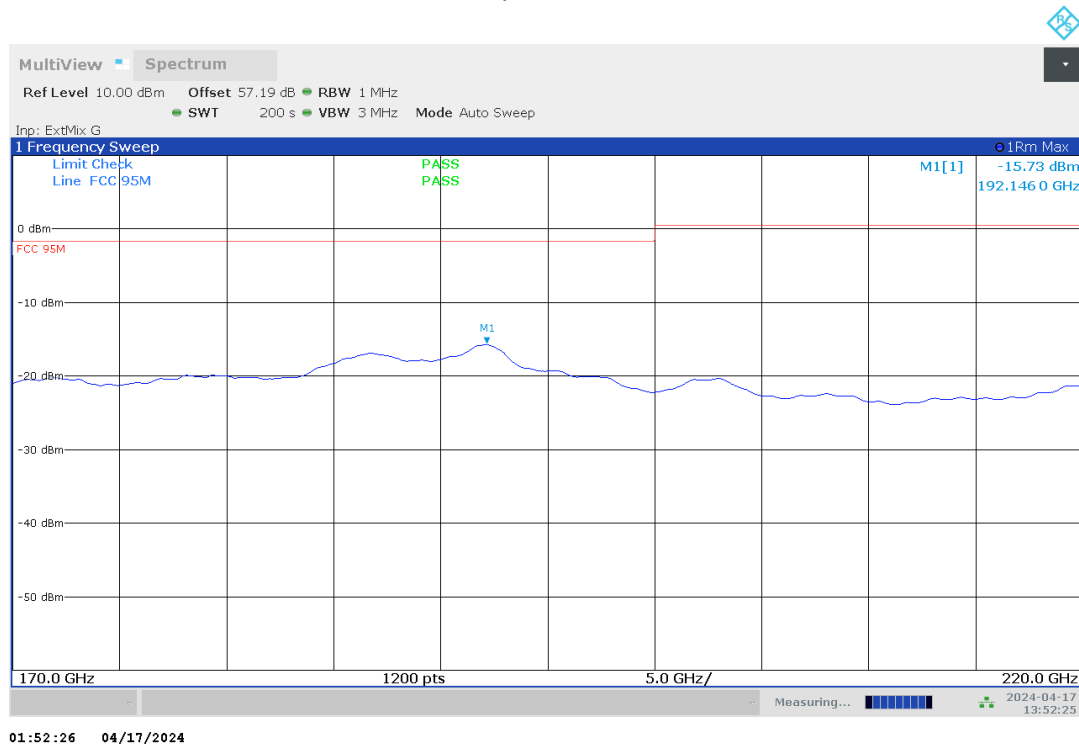

Plot no. 46: radiated emissions 220 GHz – 325 GHz, polarization vertical / horizontal

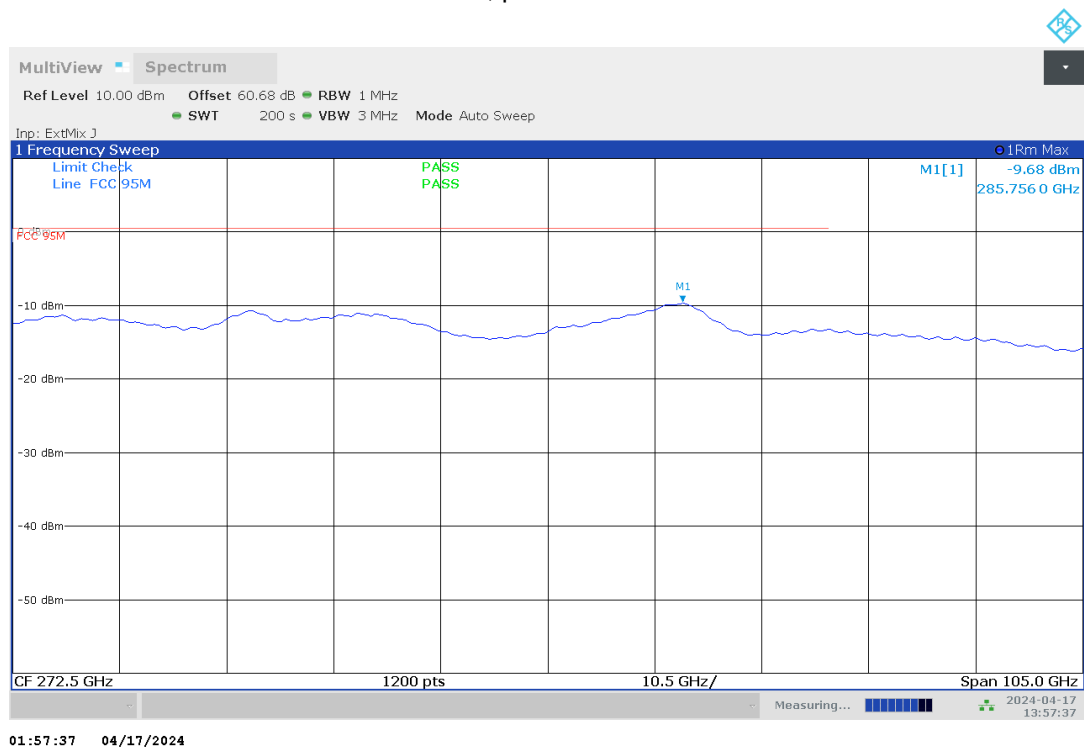

Plot no. 47: radiated emissions mode 2, 9 kHz – 30 MHz, loop antenna

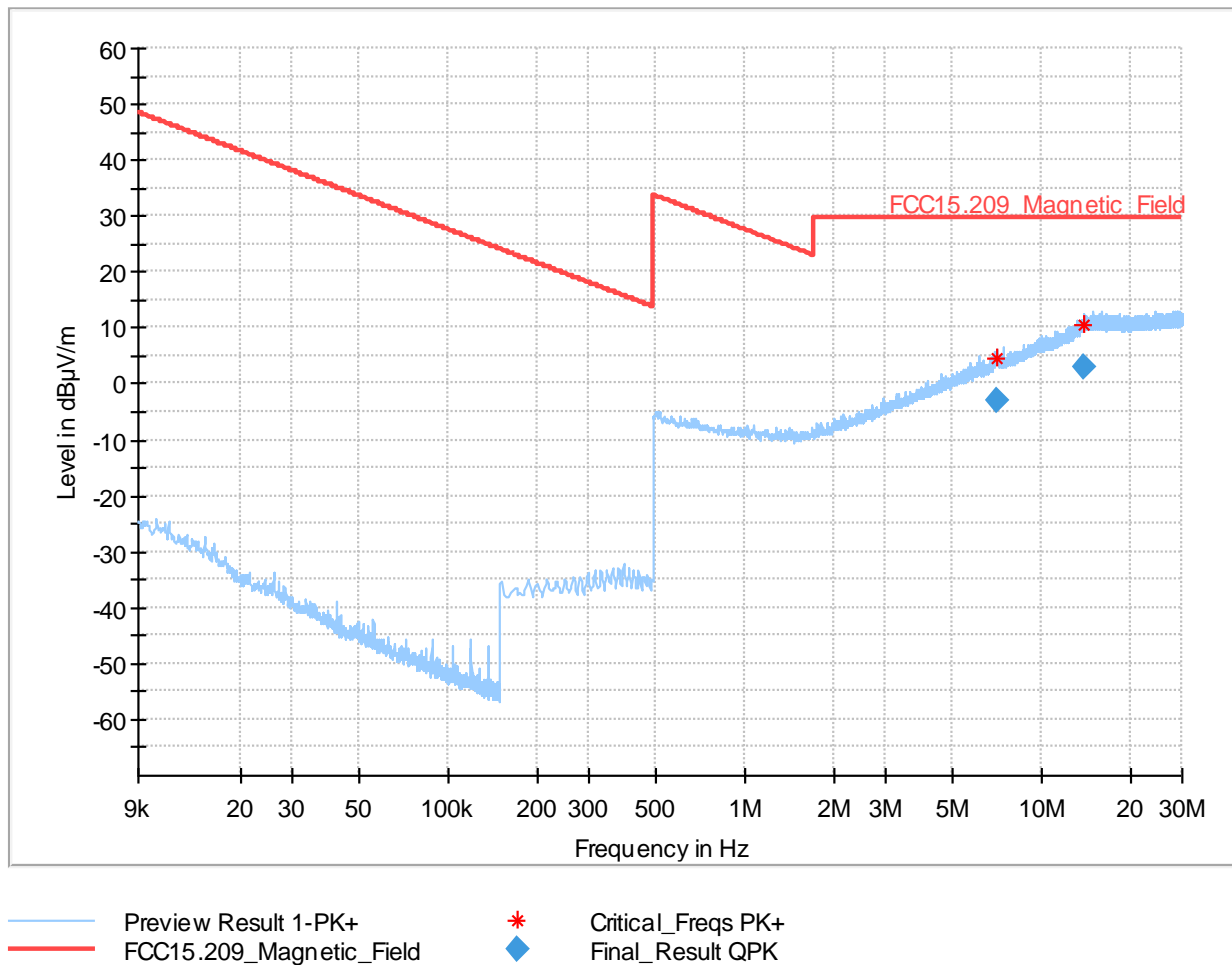


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
7.089000	-2.82	29.54	32.36	100.0	9.000	V	120.0	-6.6
14.043750	3.08	29.54	26.46	100.0	9.000	V	66.0	-0.6

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Comment
7.089000	11:17:01 - 09.04.2024
14.043750	11:18:06 - 09.04.2024

Plot no. 48: radiated emissions mode 2, 30 MHz – 1 GHz, polarization vertical / horizontal

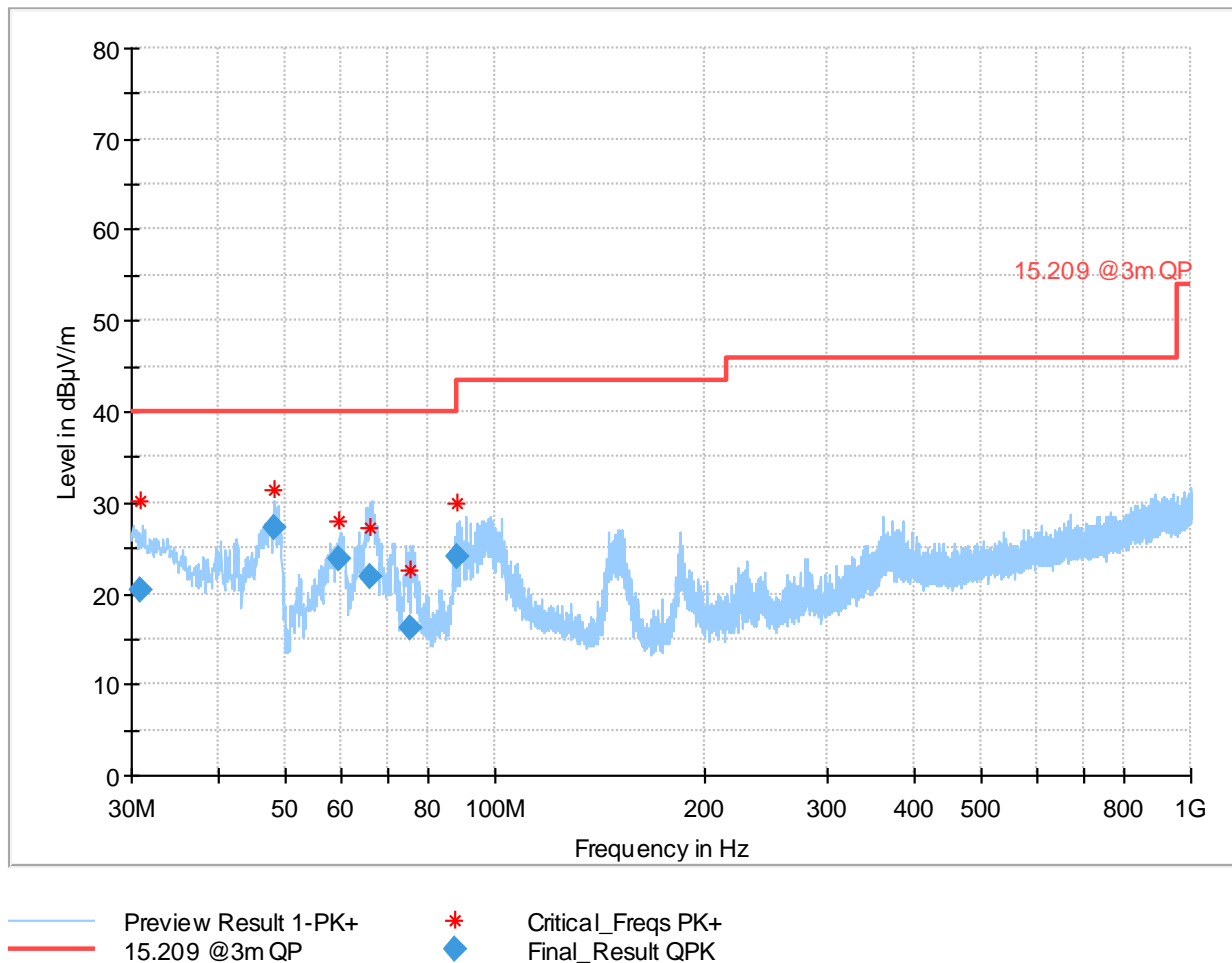


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.905500	20.39	40.00	19.61	100.0	120.000	138.0	V	74.0
47.993500	27.12	40.00	12.88	100.0	120.000	100.0	V	65.0
59.767500	23.86	40.00	16.14	100.0	120.000	206.0	V	61.0
66.156000	21.75	40.00	18.25	100.0	120.000	146.0	V	-6.0
75.225500	16.22	40.00	23.78	100.0	120.000	100.0	V	141.0
87.987500	23.99	40.00	16.01	100.0	120.000	156.0	V	251.0

Plot no. 49: radiated emissions mode 2, 1 GHz – 18 GHz, polarization vertical / horizontal

Spectrum Overview

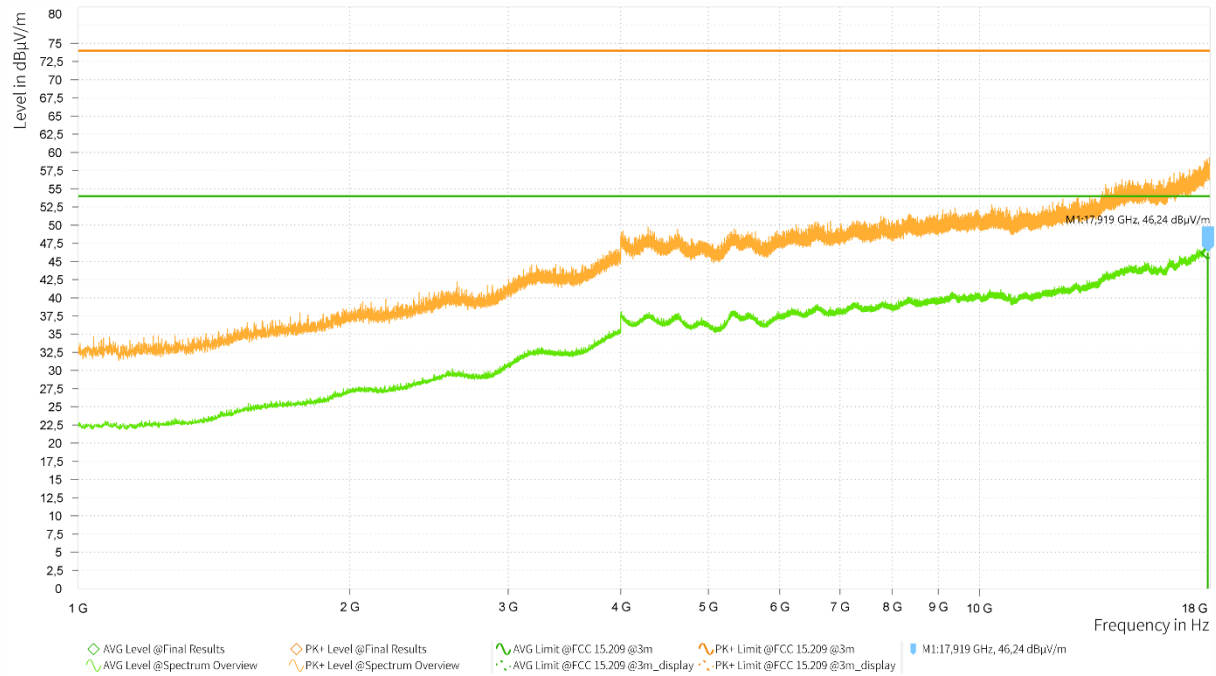


EMI Final Results (1/2)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Elevation [deg]	Azimuth [deg]	Antenna Height [m]
1	17.884,630				46,19	54,00	7,81	44,16	H	105,1	350,2	1,50
1	17.918,505				46,24	54,00	7,76	44,26	H	103,8	355,1	1,50


EMI Final Results (2/2)

Rg	Frequency [MHz]	Meas. BW [kHz]	Time of Meas.	Source	Attachments	Comment
1	17.884,630	1.000,000	13:54:35	Critical Points		
1	17.918,505	1.000,000	13:55:50	Critical Points		


Plot no. 50: radiated emissions mode 2, 18 GHz – 26.5 GHz, polarization vertical / horizontal

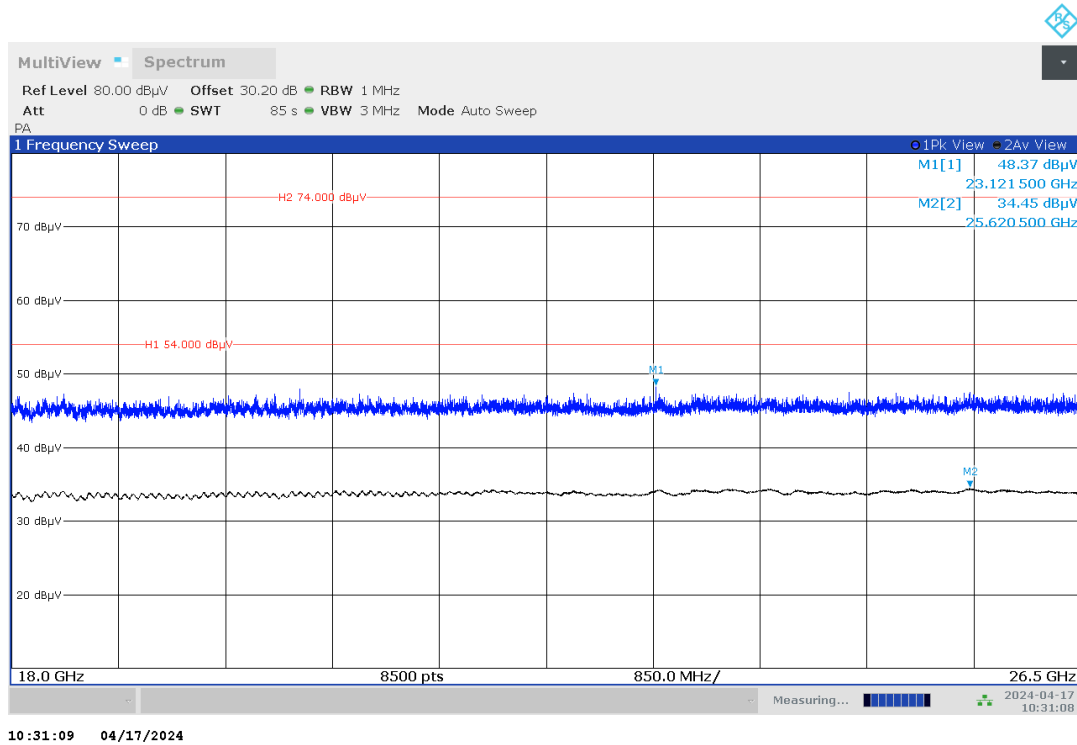


Plot no. 51: radiated emissions mode 2, 26.5 GHz – 40 GHz, polarization vertical / horizontal

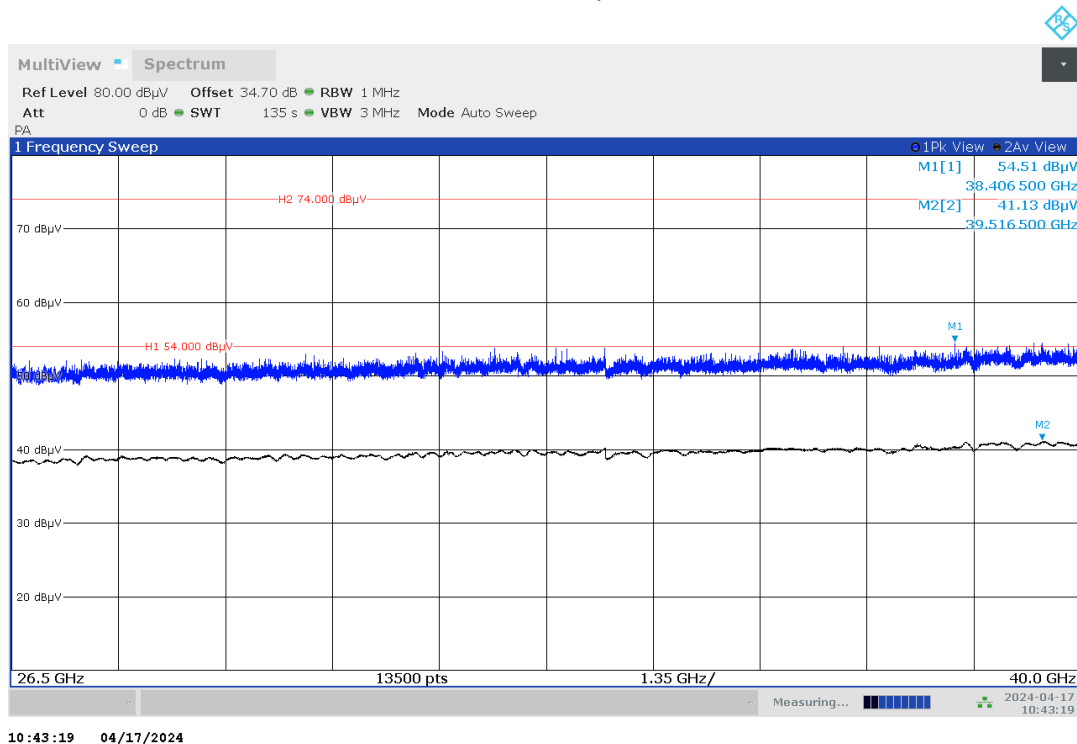

Plot no. 52: radiated emissions mode 2, 40 GHz – 60 GHz, polarization vertical / horizontal

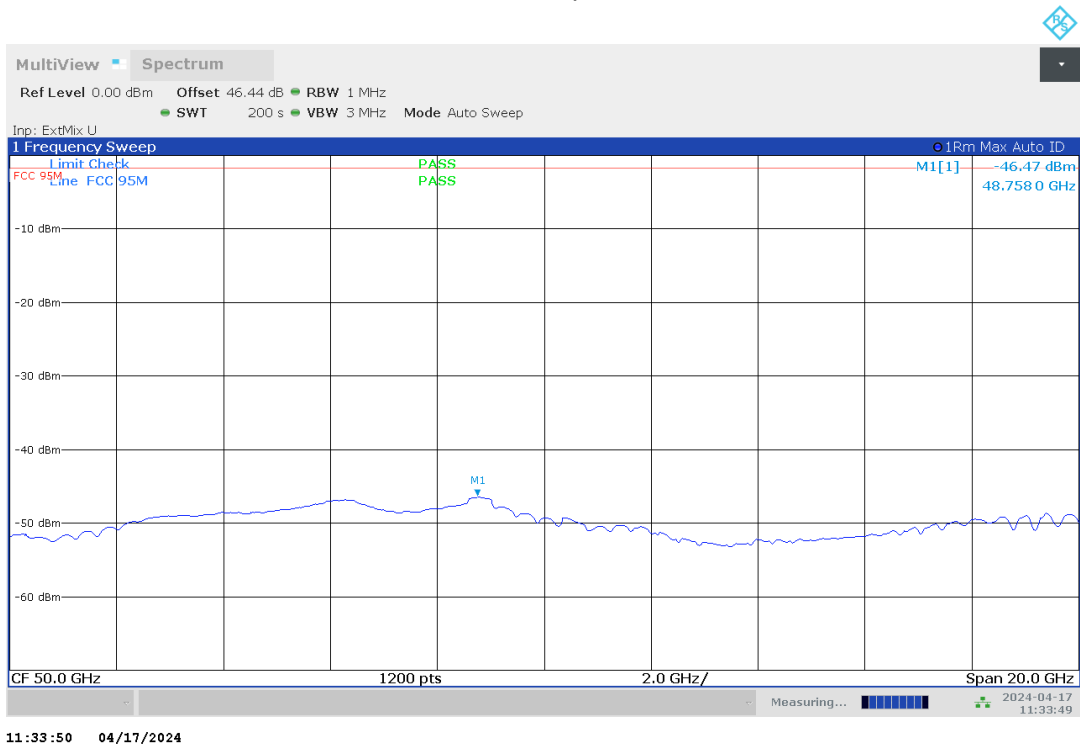


Plot no. 53: radiated emissions mode 2, 60 GHz – 75 GHz, polarization vertical / horizontal

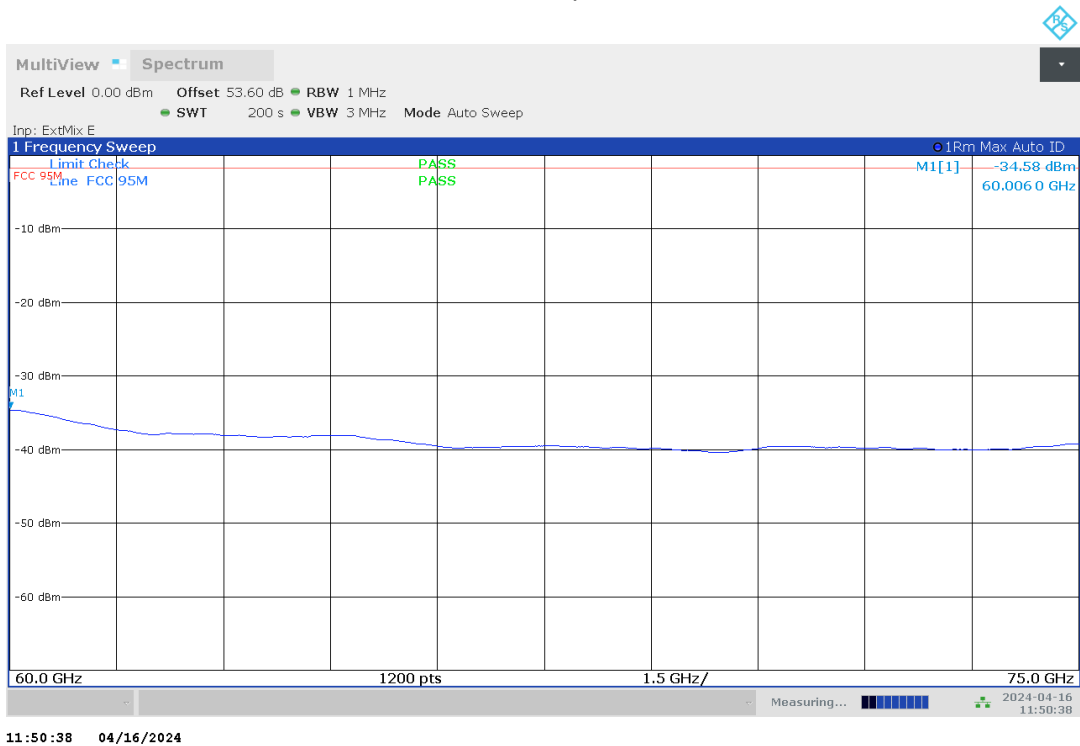


Plot no. 54: radiated emissions mode 2, 75 GHz – 76 GHz, BEC, polarization aligned with radar sensor, Mode 1




Plot no. 55: radiated emissions mode 2, 77 GHz – 78 GHz, polarization vertical / horizontal

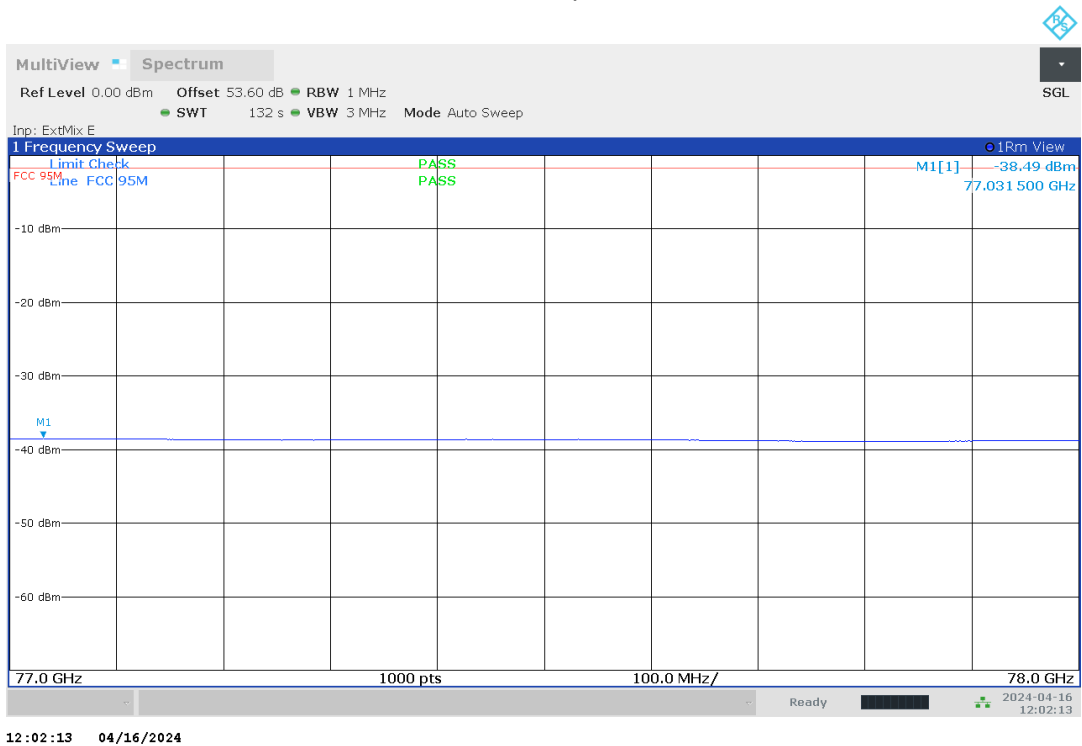


Plot no. 56: radiated emissions mode 2, 78 GHz – 84 GHz, polarization vertical / horizontal

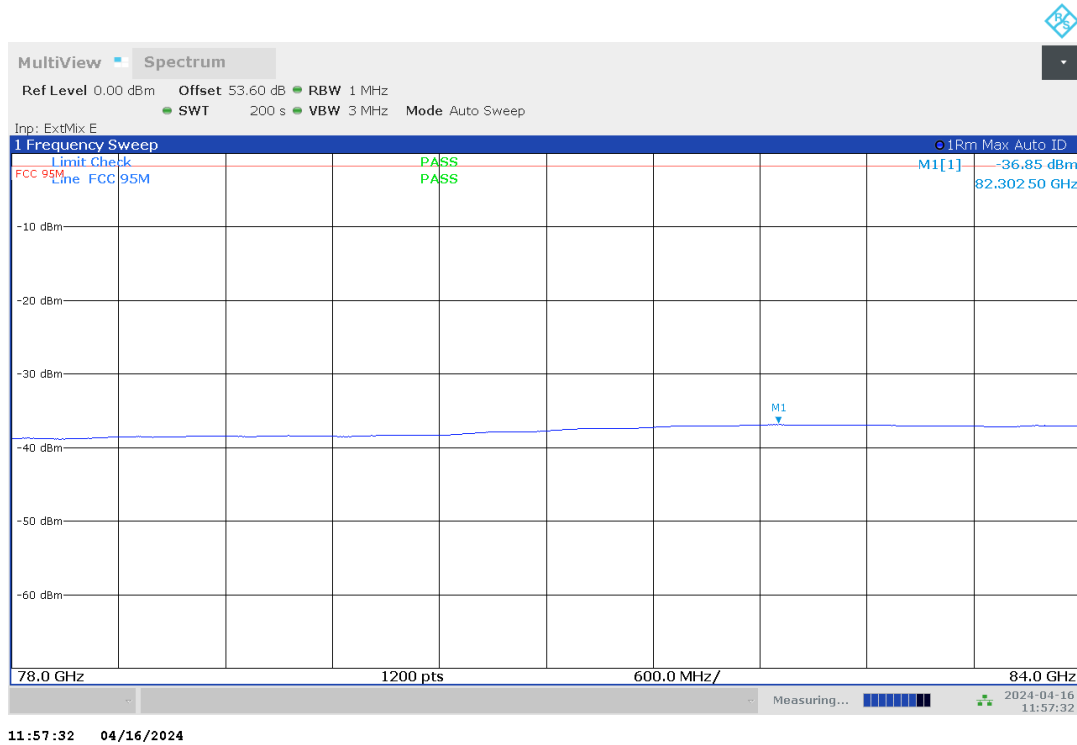


Plot no. 57: radiated emissions mode 2, 84 GHz – 110 GHz, polarization vertical / horizontal

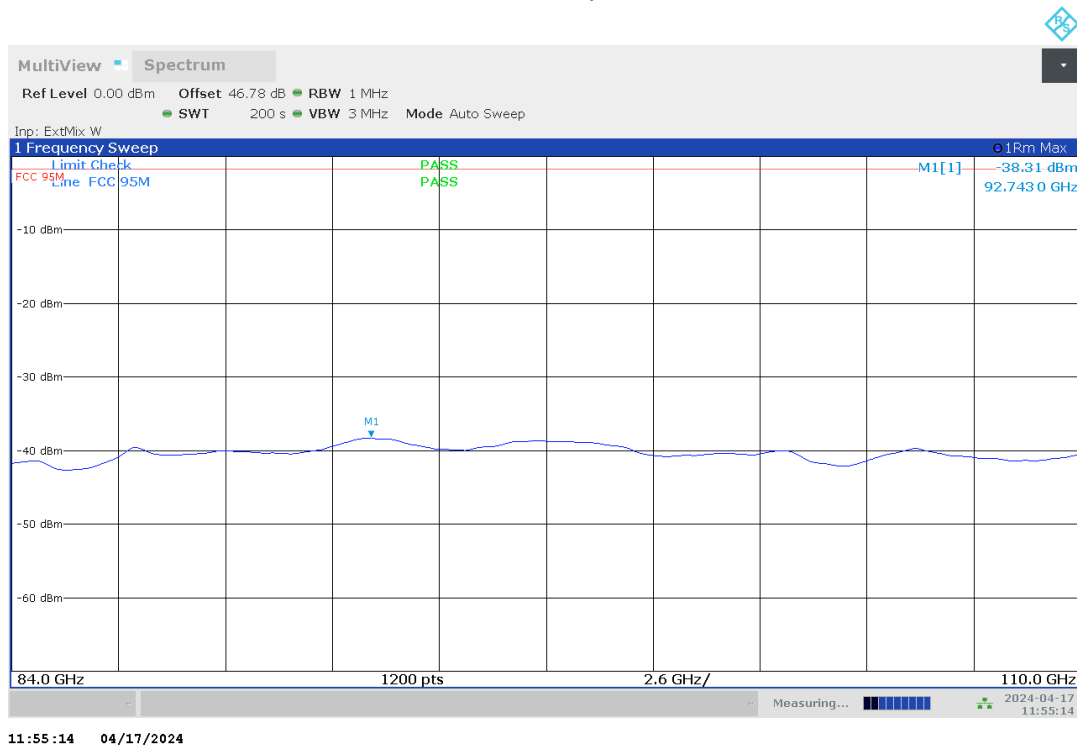


Plot no. 58: radiated emissions mode 2, 110 GHz – 170 GHz, polarization vertical / horizontal

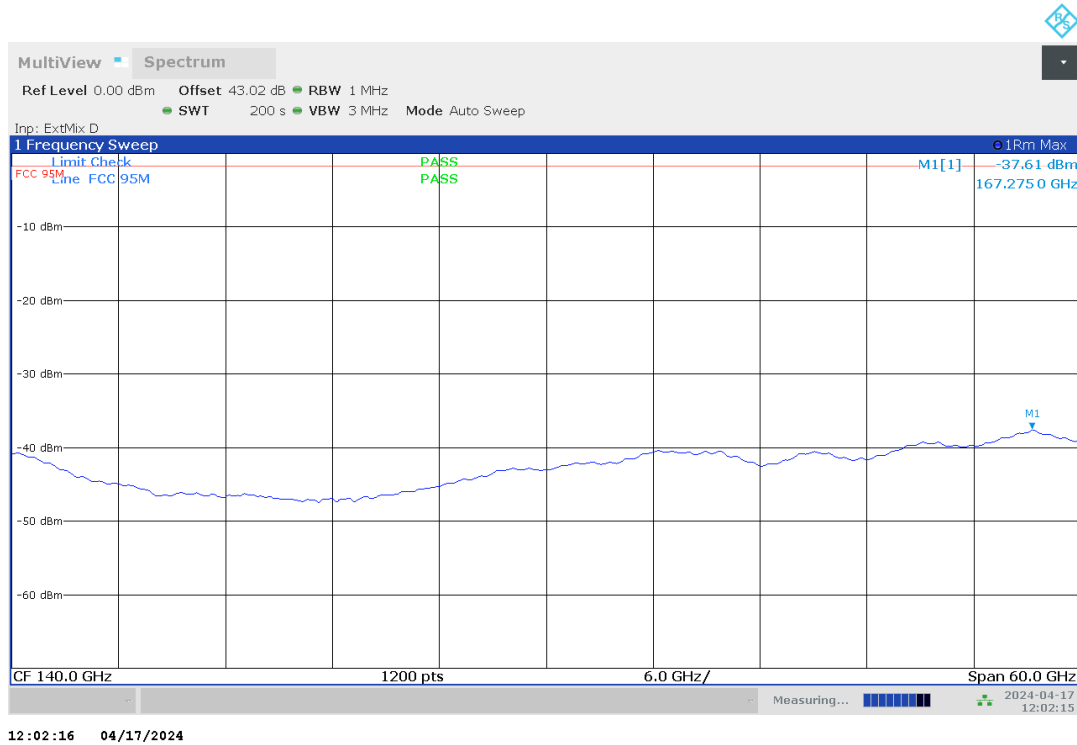

Plot no. 59: radiated emissions mode 2, 170 GHz – 220 GHz, polarization vertical / horizontal

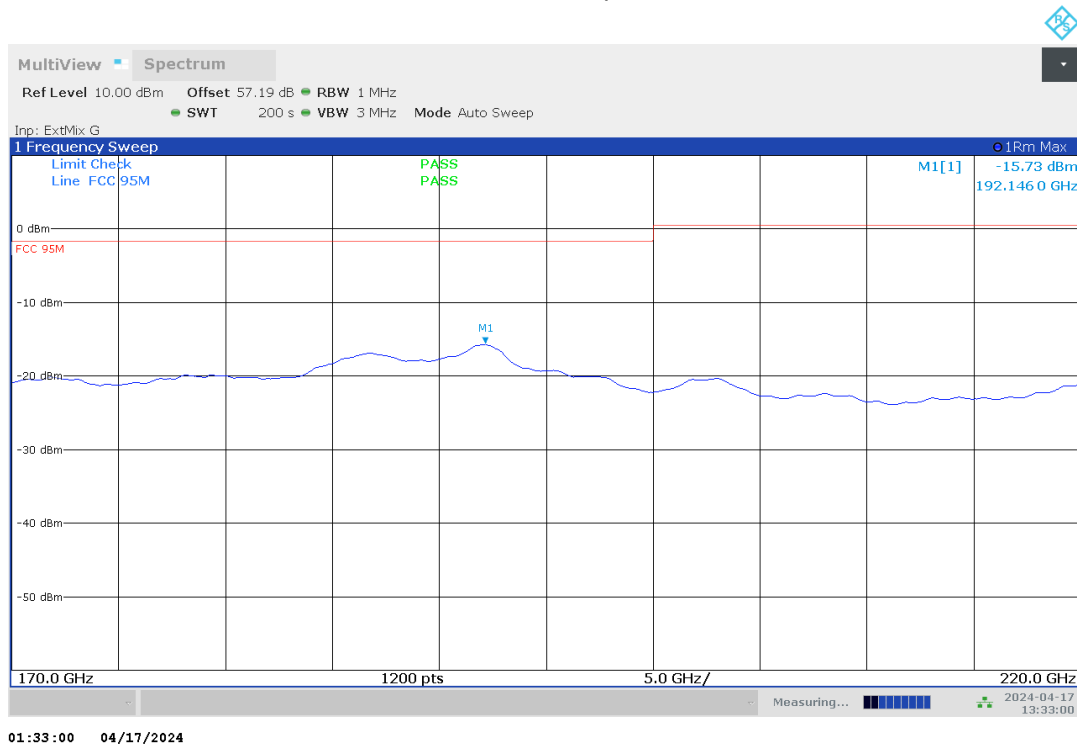

Plot no. 60: radiated emissions mode 2, 220 GHz – 325 GHz, polarization vertical / horizontal

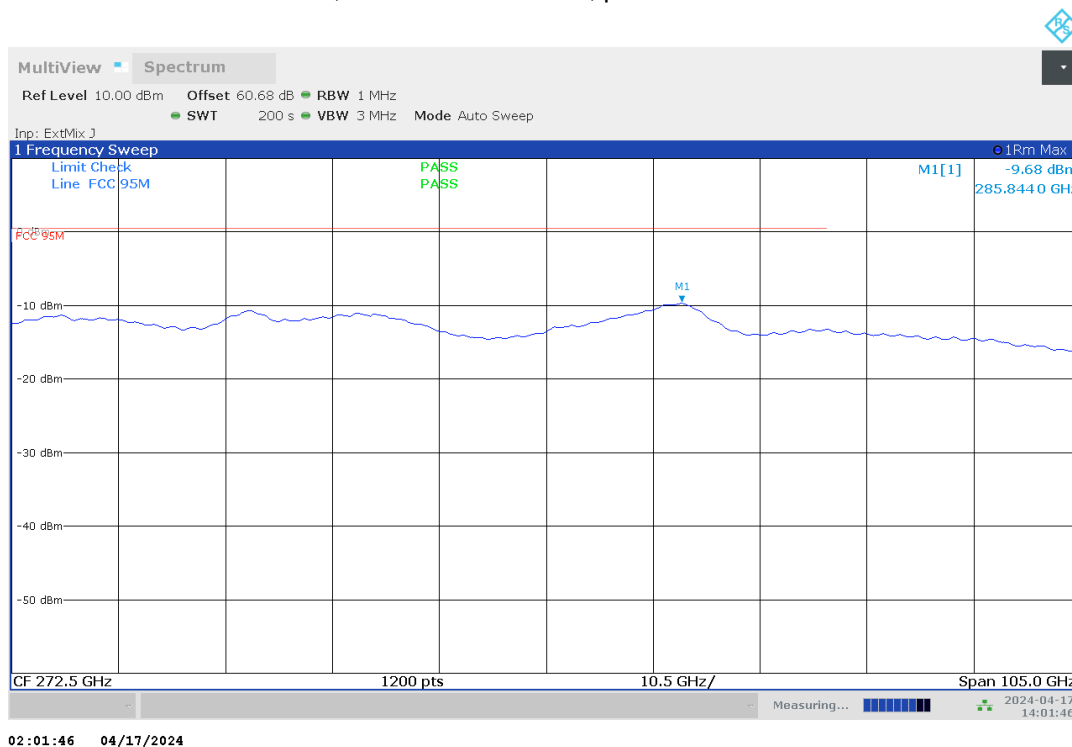

7.5 Frequency stability (§2.1055 & §95.3379(b))

Description

§2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

Limits

§95.3379 76-81 GHz Band Radar Service unwanted emissions limits.

- (b) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to $+50$ degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test procedure

ANSI C63.10, 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Note

Please see measurement results for occupied bandwidth.


8 Test Setup Description

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Cyclically chamber inspections and range calibrations are performed. Where possible resp. necessary, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

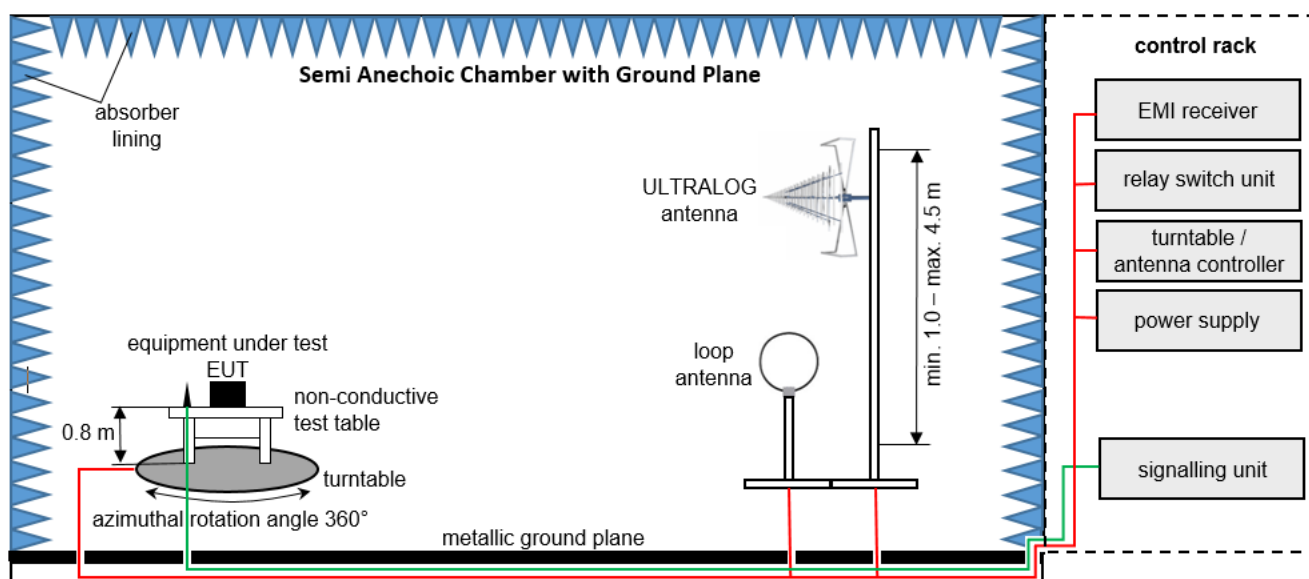

Measurement distance: ULTRALOG antenna 5 meter; loop antenna 5 meter / 3 meter / 1 meter
EMC32 software version: 11.00.00

$FS = UR + CL + AF$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Calibration
1	Power Supply	Rohde & Schwarz	IN 600	101554	LAB000824	NR	–
2	Antenna	Rohde & Schwarz	HL562E	102173	LAB000673	C	2022-10-17 → 36M → 2025-10-17
3	Power Supply	Chroma	61602		LAB000507	NR	–
4	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NR	–
5	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NR	–
6	Antenna Mast	Berlebach	Tripod HFH2-Z8 & -Z9	101762	LAB000292	NR	–
7	Compressed Air	Implotex	1-850-30	-	LAB000256	NR	–
8	EMI Test Receiver	Rohde & Schwarz	ESW26	101481	LAB000236	C	2023-07-04 → 12M → 2024-07-04
9	Semi/Fully Anechoic Chamber	Albatross Projects GmbH	Babylon 5 (SAC 5)	20168.PRB	LAB000235	CM	2022-01-31 → 36M → 2025-01-31
10	Measurement Software	Rohde & Schwarz	EMC32 V11.20		LAB000226	NR	–
11	Turntable	maturo GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NR	–
12	Antenna Mast	maturo GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NR	–
13	Controller	maturo GmbH	FCU 3.0	10082	LAB000222	NR	–
14	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350292	LAB000191	NR	–
15	Open Switch and Control Platform	Rohde & Schwarz	OSP220 Base Unit 2HU	101748	LAB000149	NR	–
16	Antenna	Rohde & Schwarz	HFH2-Z2E	100954	LAB000108	C	2023-05-05 → 36M → 2026-05-05

8.2 Fully Anechoic Chamber

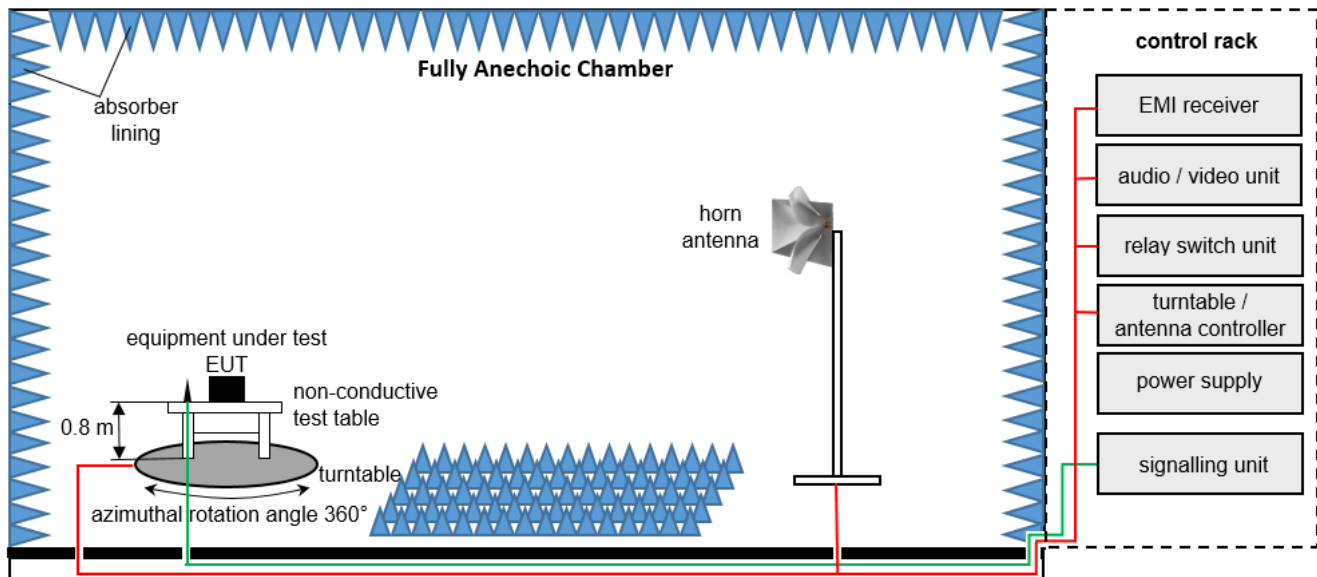

Measurement distance: tri-log antenna and horn antenna 3 meter; loop antenna 3 meter / 1 meter
EMC32 software version: 11.00.00

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$


List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Calibration
1	Power Supply	Rohde & Schwarz	IN 600	101554	LAB000824	NR	–
2	Power Supply	Chroma	61602		LAB000507	NR	–
3	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NR	–
4	Antenna Mast	Berlebach	Tripod HFH2-Z8 & -Z9	101762	LAB000292	NR	–
5	Positioner	matur GmbH	TD 1.5-10KG		LAB000258	NR	–
6	Compressed Air	Implotex	1-850-30	-	LAB000256	NR	–
7	EMI Test Receiver	Rohde & Schwarz	ESW26	101481	LAB000236	C	2023-07-04 → 12M → 2024-07-04
8	Semi/Fully Anechoic Chamber	Albatross Projects GmbH	Babylon 5 (SAC 5)	20168.PR.B	LAB000235	CM	2022-01-31 → 36M → 2025-01-31
9	Measurement Software	Rohde & Schwarz	EMC32 V11.20		LAB000226	NR	–
10	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NR	–
11	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NR	–
12	Controller	matur GmbH	FCU 3.0	10082	LAB000222	NR	–
13	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350292	LAB000191	NR	–
14	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	CM	2022-05-31 → 36M → 2025-05-31
15	Antenna	Rohde & Schwarz	HF907	102899	LAB000151	C	2023-05-15 → 36M → 2026-05-15
16	Open Switch and Control Platform	Rohde & Schwarz	OSP220 Base Unit 2HU	101748	LAB000149	NR	–

8.3 Radiated measurements > 18 GHz

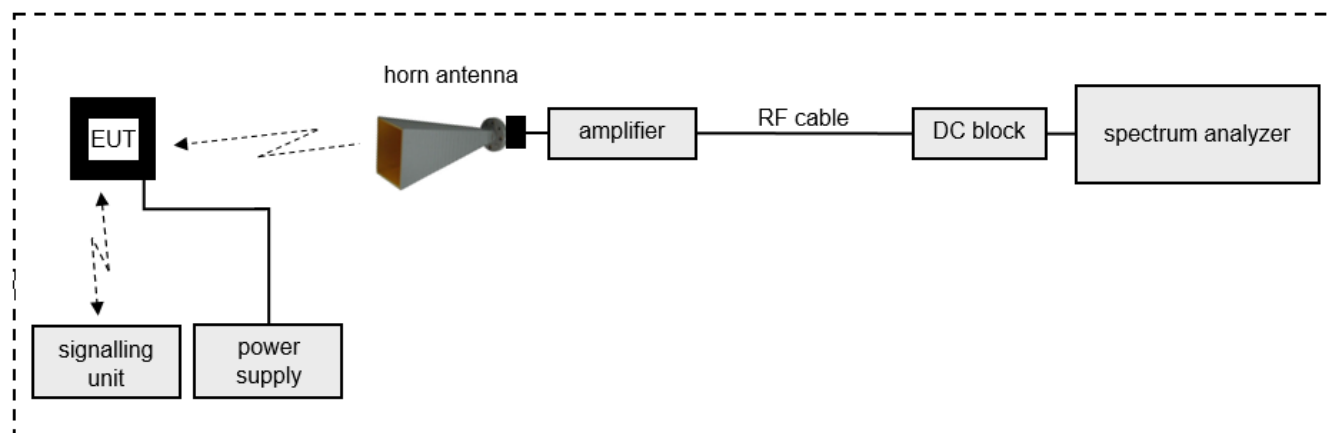

8.4 Radiated measurements > 50 GHz

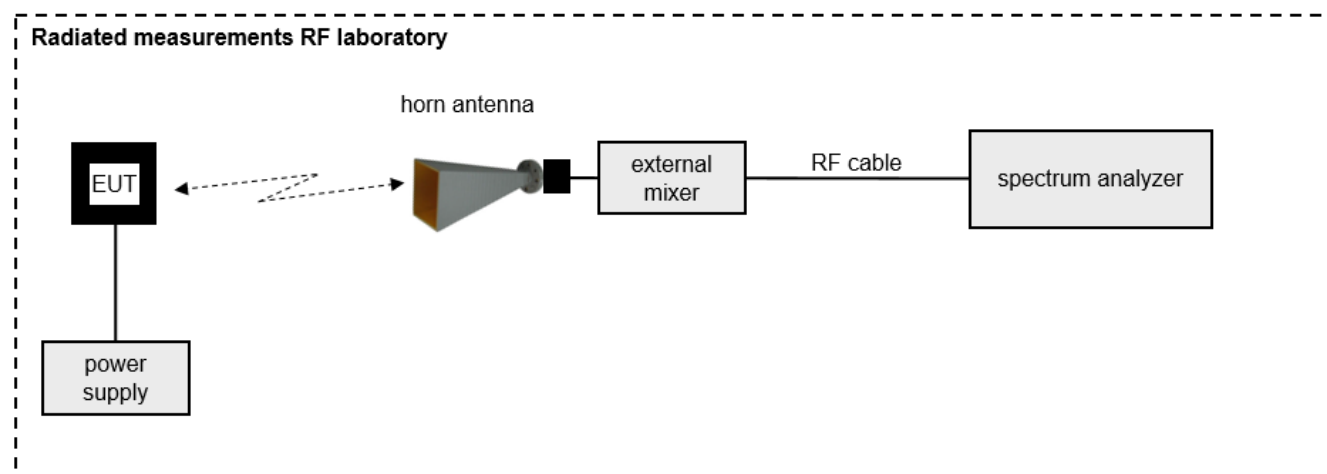

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:


$$OP [dBm] = -59.0 [dBm] + 44.0 [dB] - 20.0 [dBi] + 5.0 [dB] = -30 [dBm] (1 \mu W)$$

Note: conversion loss of mixer is already included in analyzer value.

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Calibration
1	Antenna	Flann Microwave Ltd	24240-20 (40.0-60.0 GHz)	275176	LAB000376	CM	2023-08-24 → 12M → 2024-08-24
2	Harmonic Mixer	Rohde & Schwarz	FS-Z60	101350	LAB000375	C	2024-04-11 → 12M → 2025-04-11
3	Absorber	Telemeter Electronic	EPP 12	-	LAB000327	NR	–
4	Test table	innco systems GmbH	PT0707-RH light	-	LAB000303	NR	–
5	Filter (Coax/WG, LPF, HPF, Band)	TTE	10-WHPF-84.5-UG387	-	LAB000299	NR	–
6	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350255	LAB000189	NR	–
7	WG-Coax-Adapter	Flann Microwave Ltd	23373-TF30 UG383/U	273384	LAB000184	CM	2023-08-24 → 12M → 2024-08-24
8	WG-Coax-Adapter	Flann Microwave Ltd	22093-TF30 UG599/U	273263	LAB000183	CM	2023-08-24 → 12M → 2024-08-24
9	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273373	LAB000180	CM	2023-08-24 → 12M → 2024-08-24
10	Antenna	Flann Microwave Ltd	30240-20 (140-220 GHz)	273390	LAB000178	CM	2023-08-24 → 12M → 2024-08-24
11	Antenna	Flann Microwave Ltd	26240-20 (60.0-90.0 GHz)	273417	LAB000135	CM	2023-08-24 → 12M → 2024-08-24
12	Oszilloscope	Rohde & Schwarz	RTE1204	300113	LAB000175	C	2023-05-19 → 12M → 2024-05-19
13	Coaxial Cable	Huber & Suhner	SF101/1.0m	503989/1	LAB000163	CM	2023-07-17 → 12M → 2024-07-17
14	Coaxial Cable	Rosenberger	LU7-022-1000	34	LAB000154	CM	2023-07-17 → 12M → 2024-07-17
15	Coaxial Cable	Rosenberger	LU7-022-1000	33	LAB000153	CM	2023-07-17 → 12M → 2024-07-17
16	Antenna	Flann Microwave Ltd	32240-20 (220-325 GHz)	273469	LAB000152	CM	2023-08-24 → 12M → 2024-08-24
17	Antenna	Flann Microwave Ltd	29240-20 (110-170 GHz)	273382	LAB000139	CM	2023-08-24 → 12M → 2024-08-24
18	Antenna	Flann Microwave Ltd	27240-20 (75.0-110 GHz)	273368	LAB000138	CM	2023-08-24 → 12M → 2024-08-24
19	Harmonic Mixer	Rohde & Schwarz	FS-Z170	100996	LAB000126	C	2023-04-26 → 12M → 2024-04-26
20	Harmonic Mixer	Rohde & Schwarz	FS-Z325	101015	LAB000117	C	2024-04-16 → 12M → 2025-04-16
21	Harmonic Mixer	Rohde & Schwarz	FS-Z220	101039	LAB000116	C	2024-04-03 → 12M → 2025-04-03
22	Harmonic Mixer	Rohde & Schwarz	FS-Z110	102000	LAB000114	C	2023-05-02 → 12M → 2024-05-02
23	Harmonic Mixer	Rohde & Schwarz	FS-Z90	102020	LAB000113	C	2024-04-06 → 12M → 2025-04-06

8.5 Frequency error

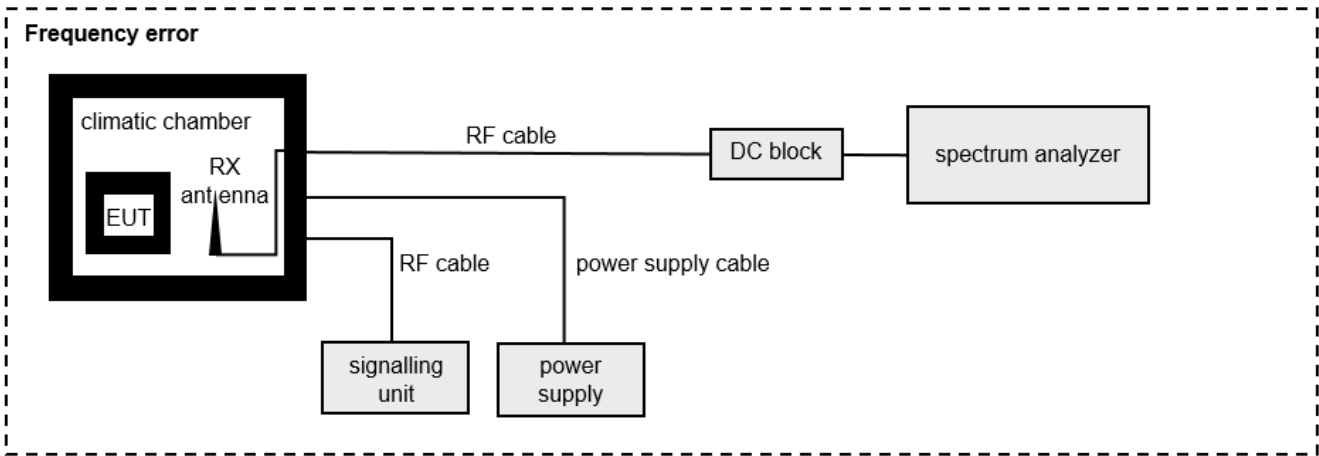

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PS 2042-10 B	2878350255	LAB000189	NE	–
2	Coaxial Cable	Rosenberger	LU7-022-1000	34	LAB000154	NE	–
3	Coaxial Cable	Rosenberger	LU7-022-1000	33	LAB000153	NE	–
4	Antenna	Flann Microwave Ltd	26240-20 (60.0-90.0 GHz)	273417	LAB000135	CM	2023-08-24 → 12M → 2024-08-24
5	Harmonic Mixer	Rohde & Schwarz	FS-Z90	102020	LAB000113	C	2024-04-06 → 12M → 2025-04-06
6	Spectrum Analyser	Rohde & Schwarz	FSW50	101450	LAB000111	C	2023-07-26 → 12M → 2024-07-26
7	Climatic Chamber	CTS GmbH	T-65/50	204002	LAB000110	CM	2023-05-11 → 12M → 2024-05-11
8	Antenna Mast	Schwarzbeck Mess-Elektronik OHG	AM 9104	99	LAB000109	NE	–

9 Measurement procedures

9.1 Radiated spurious emissions from 9 kHz to 30 MHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- For each turntable step the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated with special 3D adapter set to find maximum level of emissions.
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade of distance in the region closer than λ in m divided by 2π (i.e., $\lambda/2\pi$), and at 20 dB/decade of distance beyond that, using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the limit line of corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.2 Radiated spurious emissions from 30 MHz to 1 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.3 Radiated spurious emissions from 1 GHz to 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.4 Radiated spurious emissions above 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- EUT is powered on and set into operation.
- Test distance depends on EUT size and test antenna size (farfield conditions shall be met).

Pre-scan

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and for different polarizations of the antenna.

Final measurement

- Significant emissions found during the pre-scan will be maximized, i.e. position and antenna orientation causing the highest emissions with Peak and RMS detector
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C63.4 / C63.10).
- Final plot showing measurement data, levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit is recorded.

Note

- In case of measurements with external harmonic mixers (e.g. above 50 GHz) special care is taken to avoid possible overloading of the external mixer's input.
- As external harmonic mixers may generate false images, care is taken to ensure that any emission measured by the spectrum analyzer is indeed radiated from the EUT and not internally generated by the external harmonic mixer. Signal identification feature of spectrum analyzer is used to eliminate/reduce images of the external harmonic mixer.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

10 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 10$ ppm
Radiated emission	$\leq \pm 6$ dB
Temperature	$\leq \pm 1$ °C
Humidity	$\leq \pm 5$ %
DC and low frequency voltages	$\leq \pm 3$ %

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. It was determined in accordance with EA-4/01 m:2013. The true value is located in the corresponding interval with a probability of 95 %.

Annex 1 EUT Photographs, external

Photo No. 1:

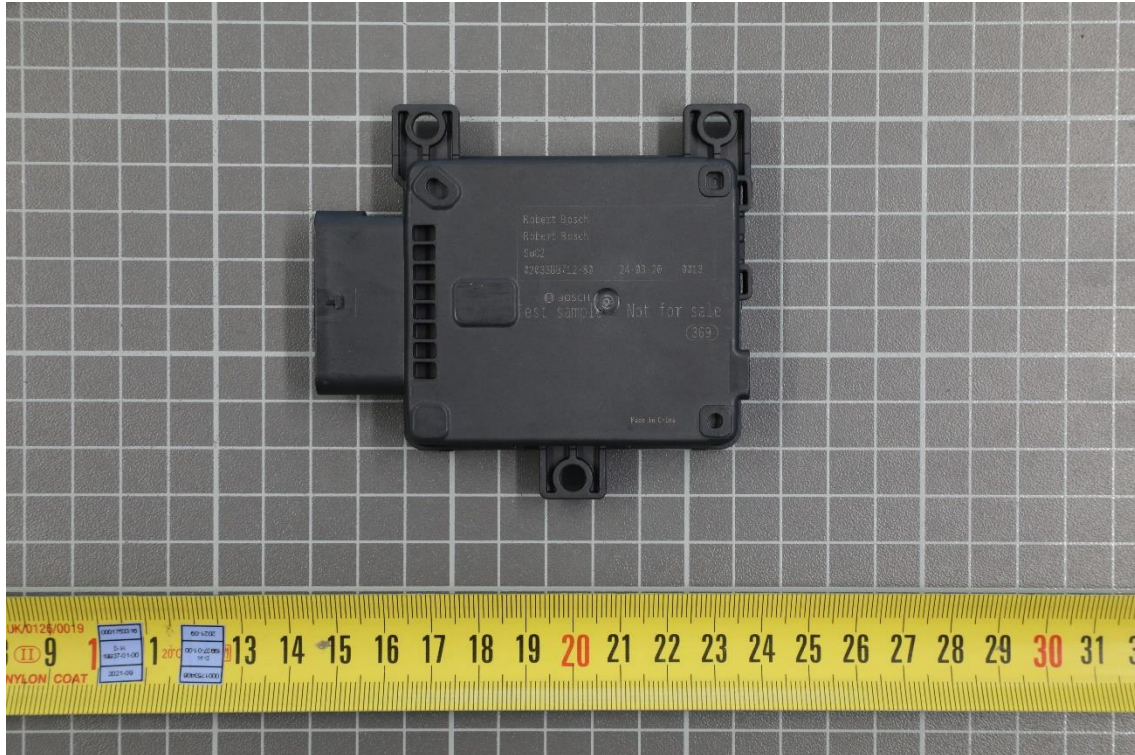


Photo No. 2:

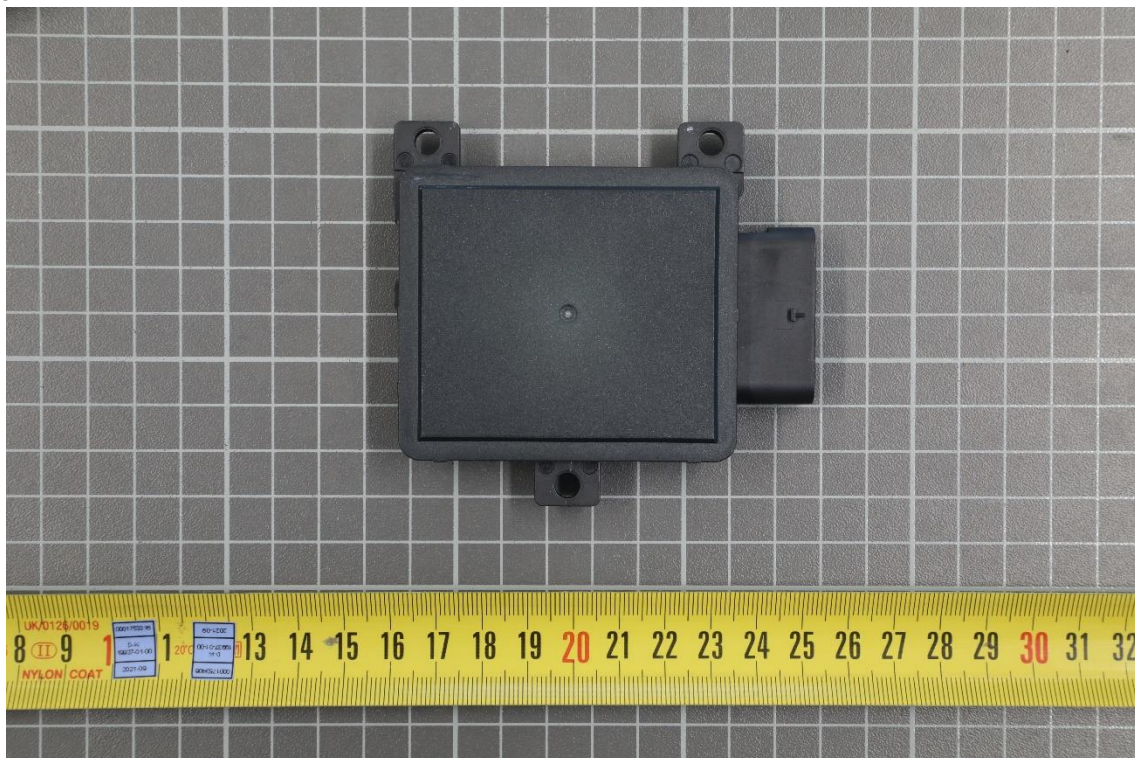


Photo No. 3:



Photo No. 4:

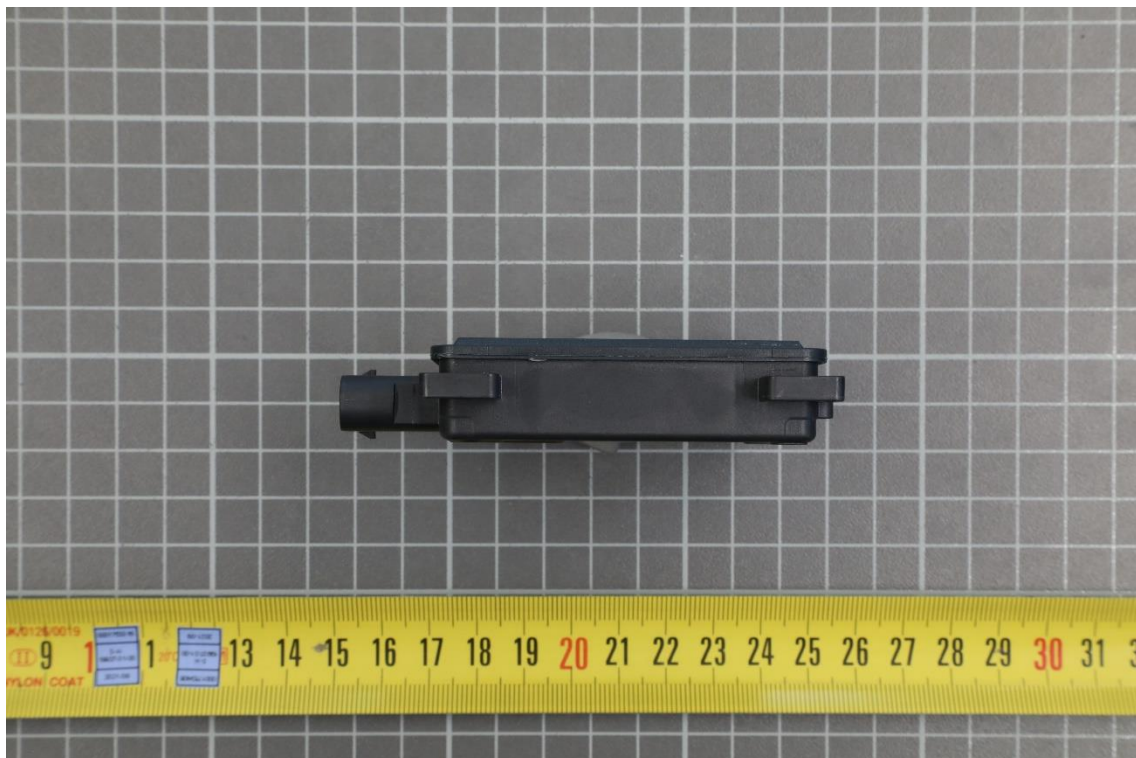


Photo No. 5:


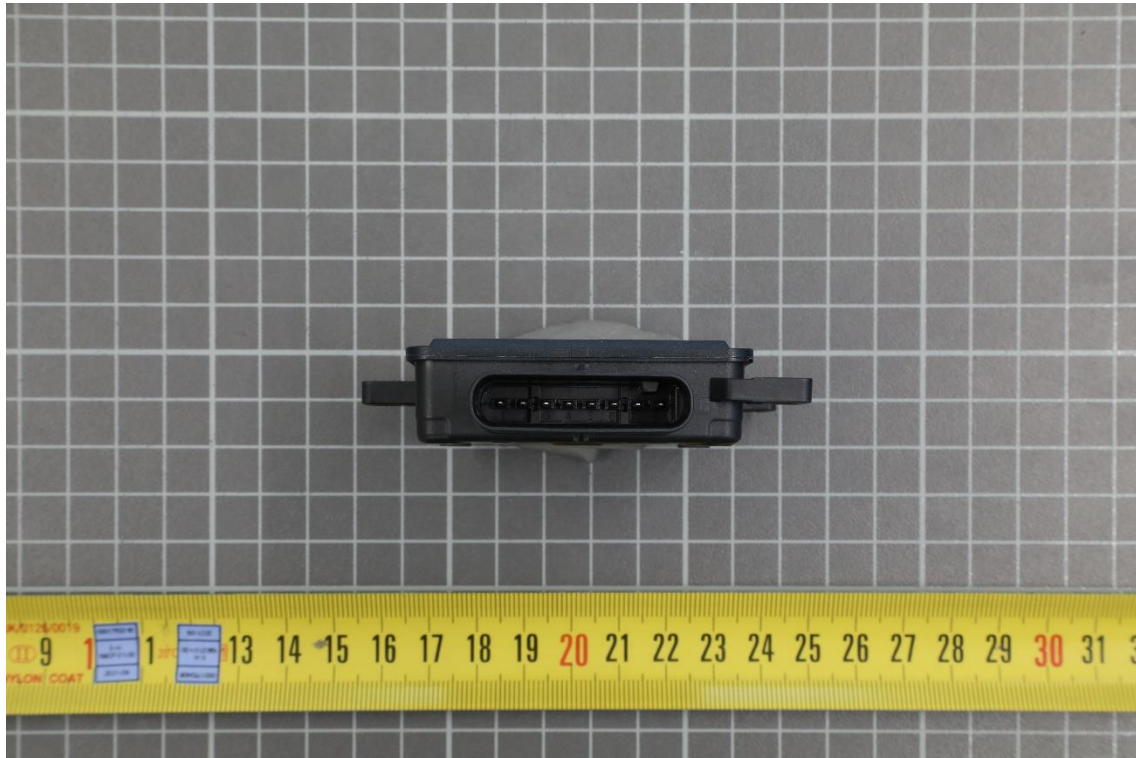


Photo No. 6:

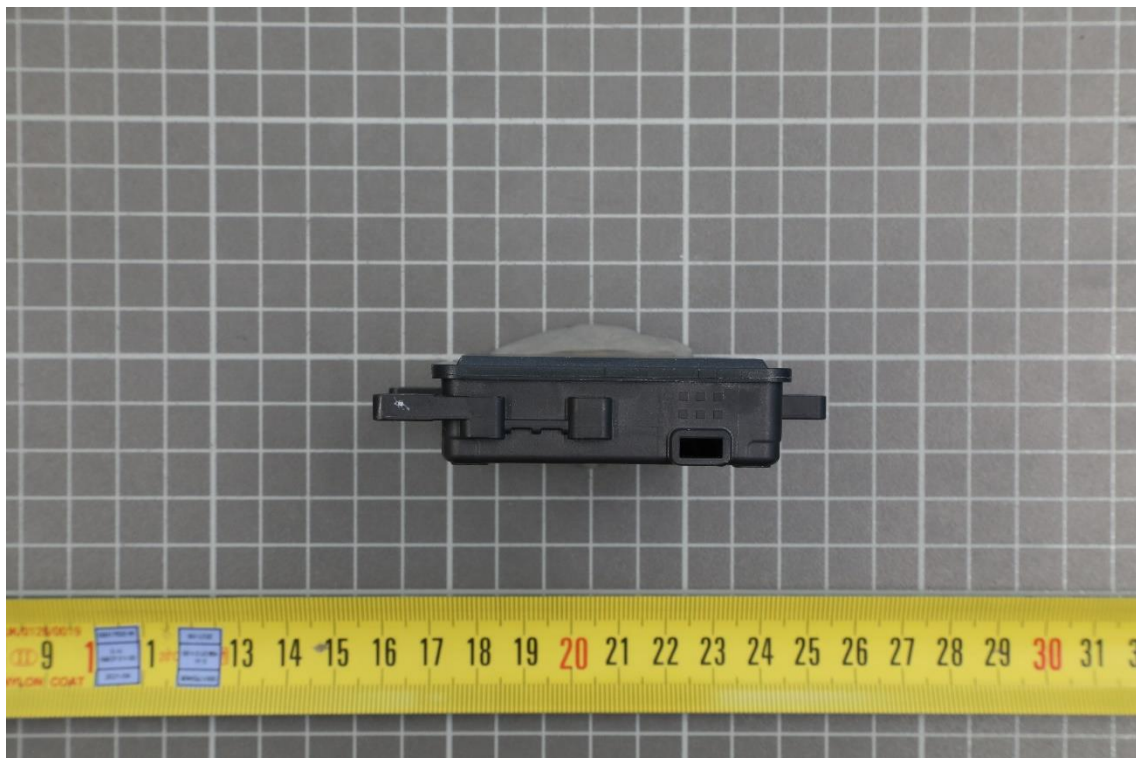

Annex 2 EUT Photographs, internal

Photo No. 7:

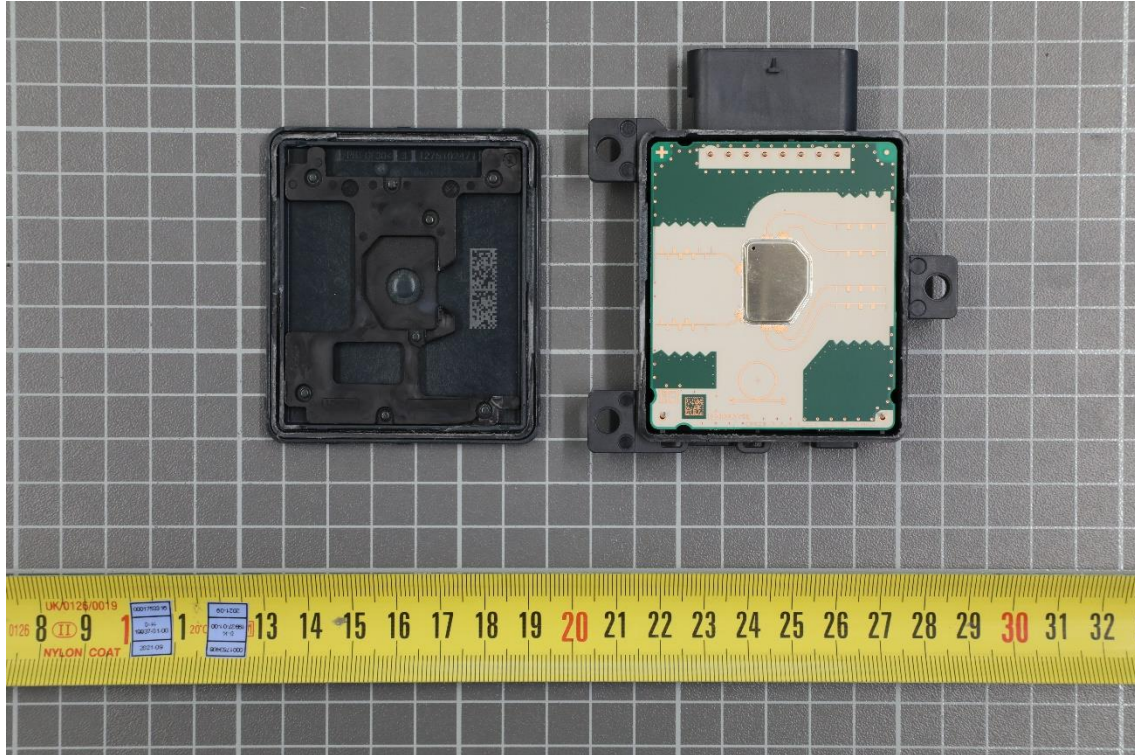


Photo No. 8:


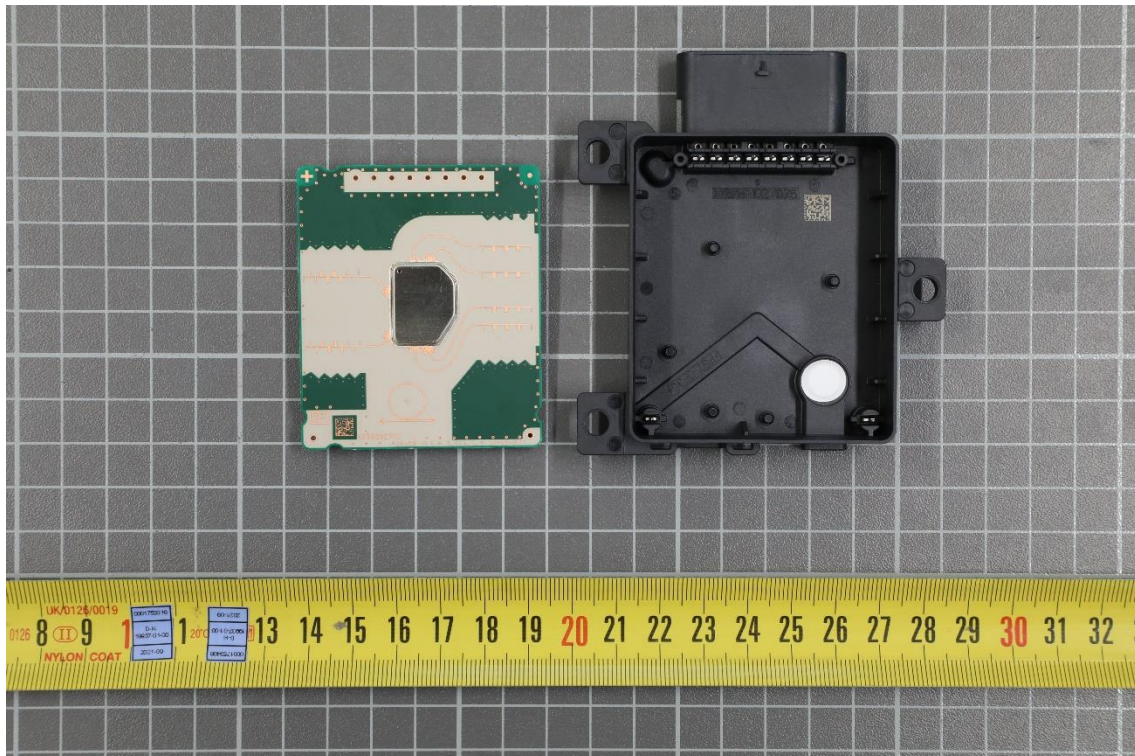


Photo No. 9:

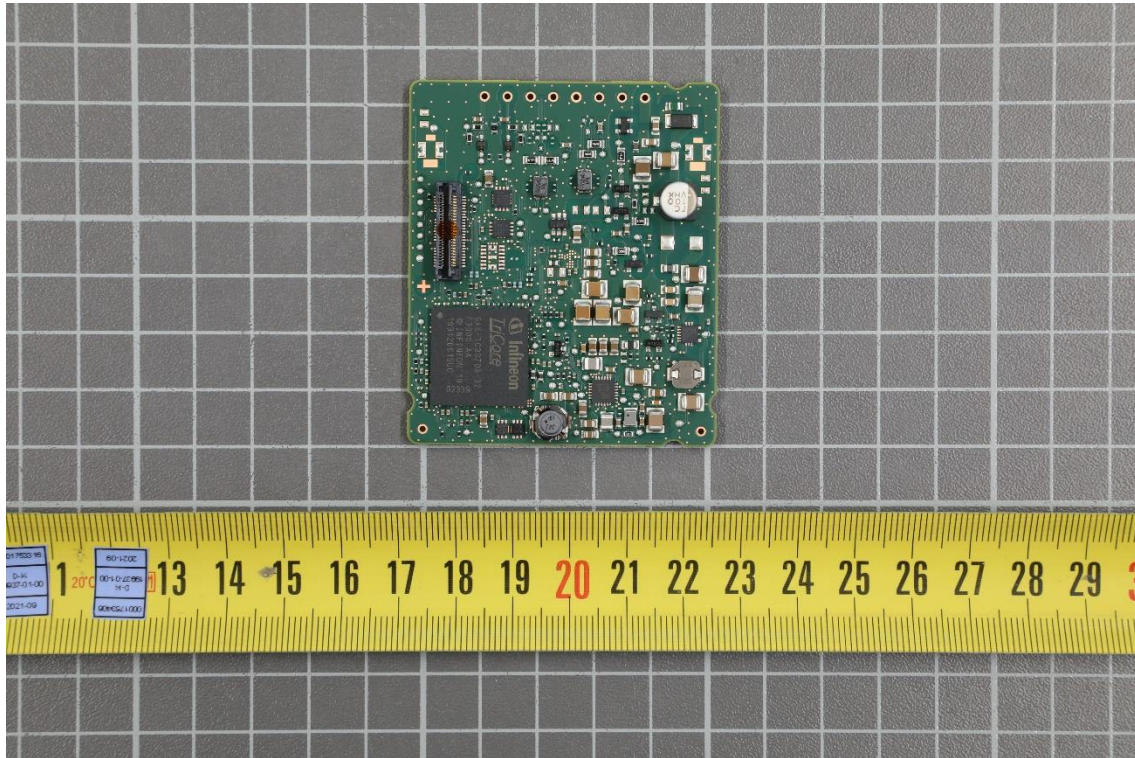

Annex 3 Test Setup Photographs

Photo No. 10:



Photo No. 11:



Photo No. 12:

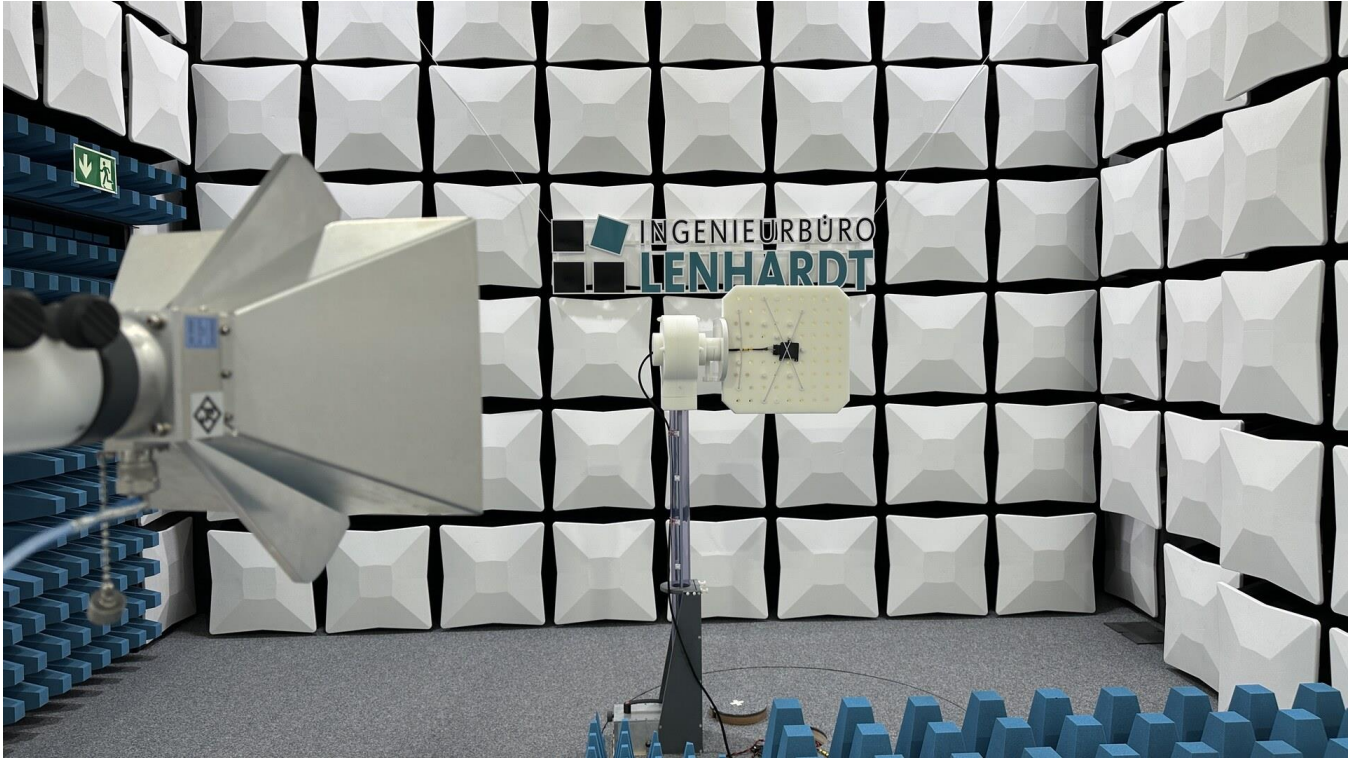


Photo No. 13:



Photo No. 14:

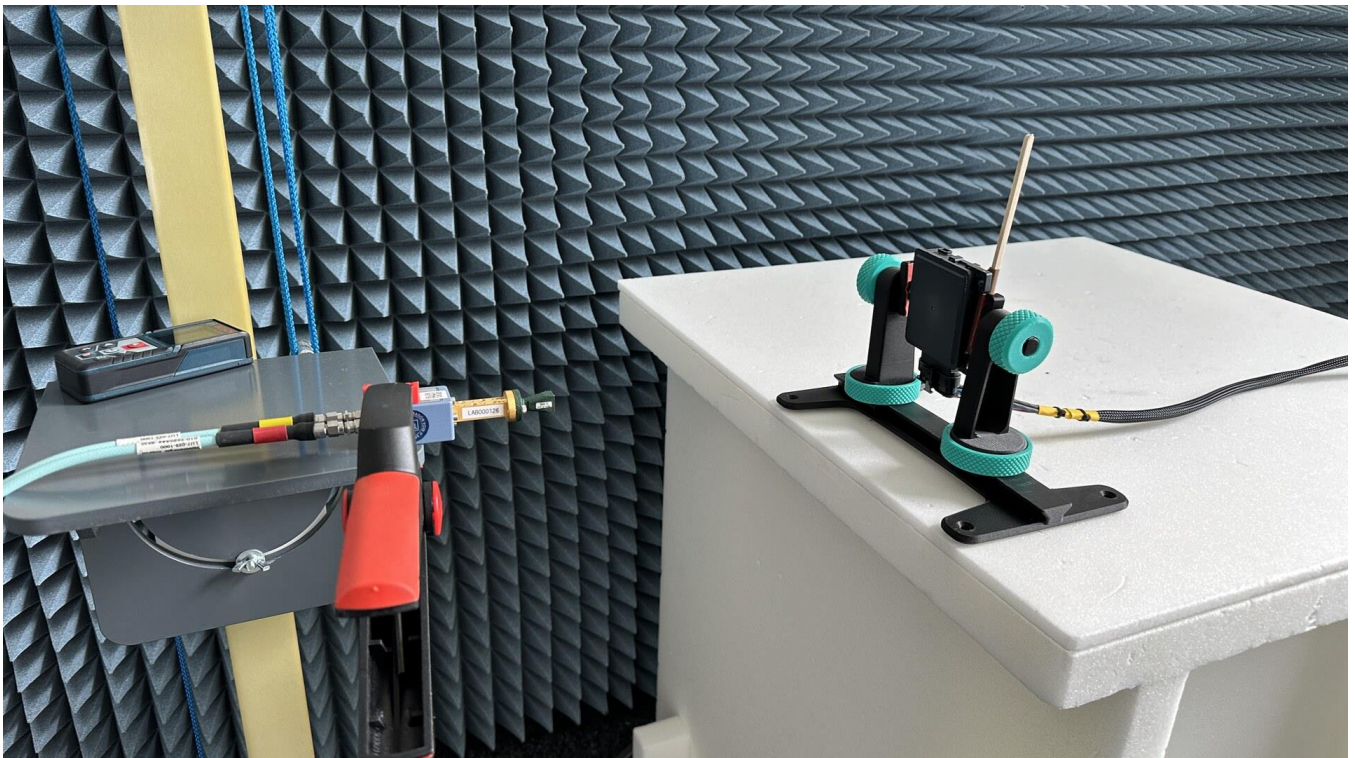


Photo No. 15:



End of Test Report
