

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 (a) and subpart B;
RSS-210 issue 8 Annex 1, RSS-Gen issue 3, ICES-003 Issue 5

FOR:

Crow Electronic Engineering Ltd.
Door&windows contact detector
Model:FW2-MAG-9F
FCC ID:NFC-FW2MAG9F
IC:8164A-FW2MAG9F

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in the EUT	5
6.4	EUT test positions	6
6.5	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 issue 8 Annex 1 requirements	8
7.1	Periodic operation requirements	8
7.2	Field strength of emissions	12
7.3	Occupied bandwidth test	33
7.4	Antenna requirements	36
8	Unintentional emissions	37
8.1	Radiated emission measurements	37
9	APPENDIX A Test equipment and ancillaries used for tests	43
10	APPENDIX B Measurement uncertainties	44
11	APPENDIX C Test laboratory description	45
12	APPENDIX D Specification references	45
13	APPENDIX E Test equipment correction factors	46
14	APPENDIX F Abbreviations and acronyms	57

1 Applicant information

Client name: Crow Electronic Engineering Ltd.
Address: 12 Kineret street, P.O.Box 293, Ben Gurion Airport, Airport City, 70100, Israel
Telephone: +972 3972 6093
Fax: +972 3972 6001
E-mail: eugenep@crow.co.il
Contact name: Mr. Eugene Plotnichenko

2 Equipment under test attributes

Product name: Door&windows contact detector
Product type: Transceiver
Model(s): FW2-MAG-9F
Serial number: NA
Hardware version: 5
Software release: V2.20
Receipt date 13-Nov-13

3 Manufacturer information

Manufacturer name: Crow Electronic Engineering Ltd.
Address: 12 Kineret street, P.O.Box 293, Ben Gurion Airport, Airport City, 70100, Israel
Telephone: +972 3972 6093
Fax: +972 3972 6001
E-Mail: eugenep@crow.co.il
Contact name: Mr. Eugene Plotnichenko

4 Test details

Project ID: 25156
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 13-Nov-13
Test completed: 17-Dec-13
Test specification(s): FCC 47CFR part 15, subpart C, §15.231(a), subpart B;
RSS-210 issue 8 Annex 1, RSS-Gen issue 3, ICES-003 issue 5

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 7.2.4, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / RSS-Gen, Section 7.2.4, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 6.1, ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.


	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer Mr. V. Einem, test engineer	December 17, 2013	 
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	December 19, 2013	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	February 13, 2014	

6 EUT description

6.1 General information

The EUT is a door&windiws contact detector, which compises a transceiver operating at 916.5 MHz with GFSK modulation The EUT is equipped with an integral antenna and is powered by internal 3 V battery.

6.2 Test configuration

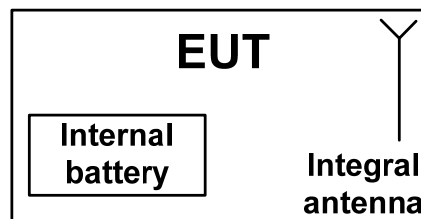

6.3 Changes made in the EUT

No changes were implemented in the EUT during testing.

6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position



6.5 Transmitter characteristics

Type of equipment									
X	Stand-alone (Equipment with or without its own control provisions)								
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)								
	Plug-in card (Equipment intended for a variety of host systems)								
Operating frequency				916.5 MHz					
Maximum rated output power				At transmitter 50 Ω RF output connector				dBm	
				Field strength at 3 m distance				100.5 dB(μ V/m) – peak 77.96 dB(μ V/m) -average	
Is transmitter output power variable?				X	No				
				Yes	continuous variable				
					stepped variable with stepsize				dB
					minimum RF power				dBm
					maximum RF power				dBm
Antenna connection									
	unique coupling		standard connector	X	integral		with temporary RF connector		
						X	without temporary RF connector		
Antenna/s technical characteristics									
Type		Manufacturer		Model number		Gain			
Integral		Crow Electronic Engineering		Helical antenna		NA			
Type of modulation				GFSK					
Bit rate				21.12 kbps					
Transmitter power source									
X	Battery	Nominal rated voltage		3 VDC, Lithium type CR123A					
	DC	Nominal rated voltage		VDC					
	AC mains	Nominal rated voltage							
Common power source for transmitter and receiver					X	yes		no	

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Nov-13 - 16-Dec-13		
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 35 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 issue 8 Annex 1 requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2, Plot 7.1.3.

7.1.3.4 The test results were recorded in Table 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test




Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Nov-13 - 16-Dec-13		
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 35 %	Power Supply: Battery
Remarks:			

Table 7.1.1 Periodic operation requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	Comply
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.2, Plot 7.1.3	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

Plot 7.1.1 Transmitter shut down test result

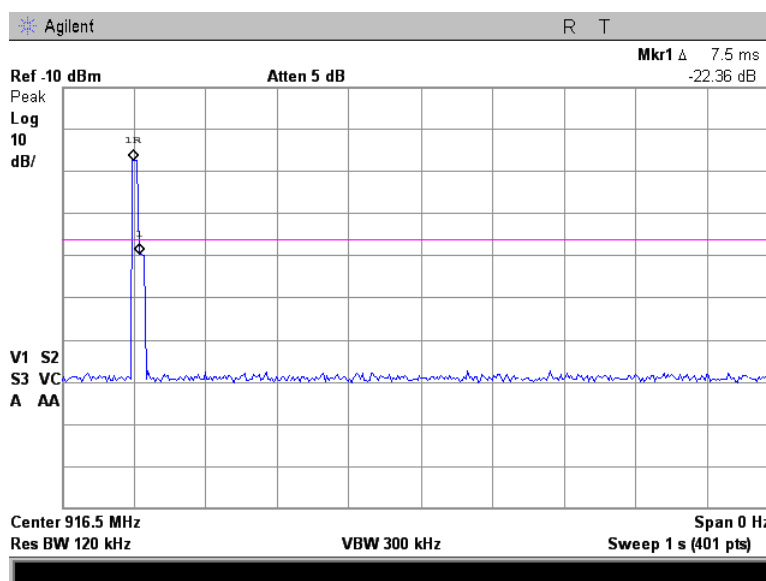


Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Nov-13 - 16-Dec-13		
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 35 %	Power Supply: Battery
Remarks:			

Plot 7.1.2 Supervision transmission duration

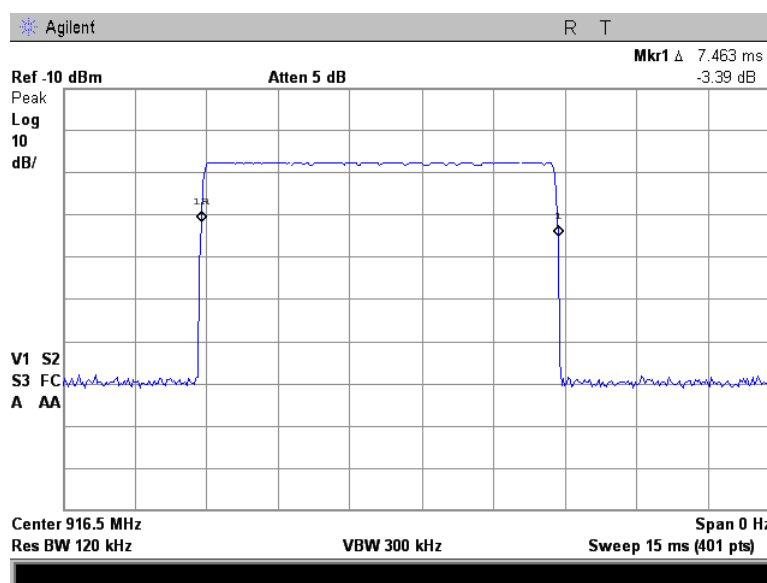

Plot 7.1.3 Supervision transmission period

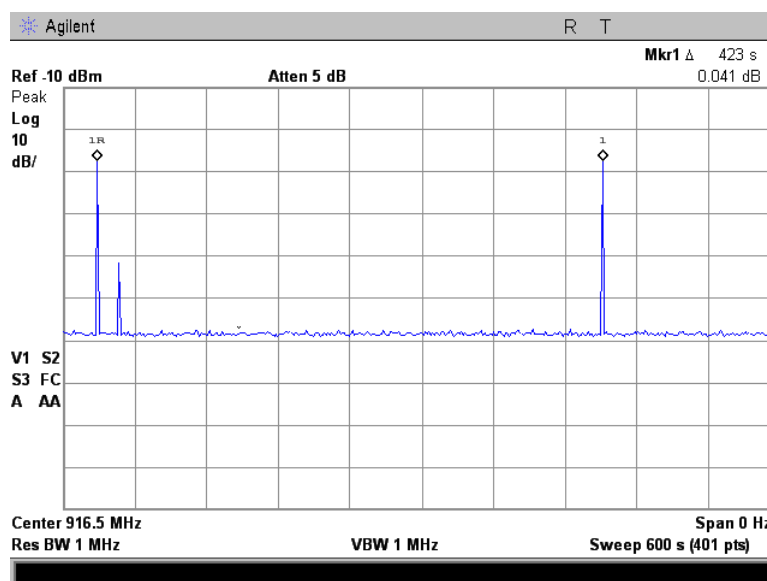



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Nov-13 - 16-Dec-13		
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 35 %	Power Supply: Battery
Remarks:			

Table 7.1.2 Total duration of supervision transmissions

Duration, ms	Repetition period, s	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
7.463	423	9	67.2

Reference numbers of test equipment used

HL 2909	HL 3323	HL 4274					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Dec-13	
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
916.5	102	82

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	82	62
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{\text{AVR}} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$\text{Lim}_{\text{AVR}} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Dec-13	
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The measurements were performed in three EUT orthogonal positions.

7.2.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The measurements were performed in three EUT orthogonal positions.

7.2.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

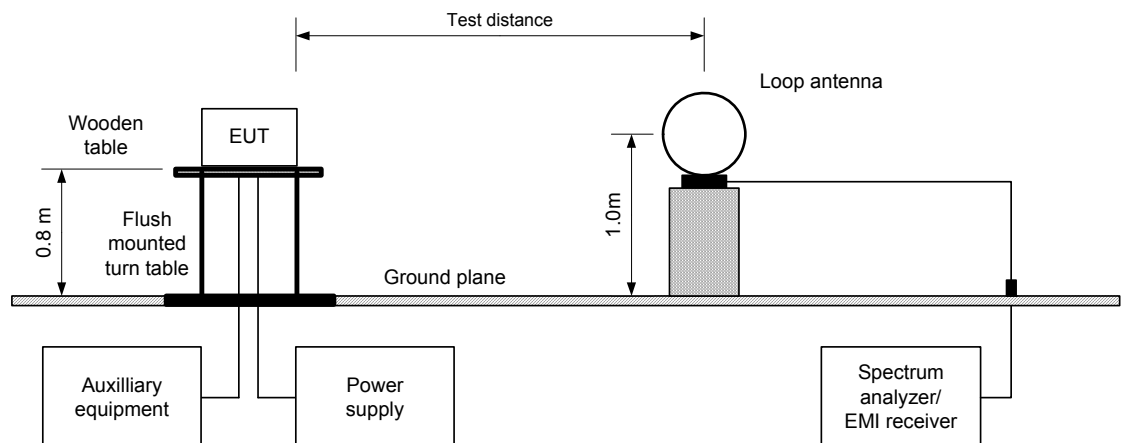




HERMON LABORATORIES

Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:		ANSI C63.4, Section 13.1.4		
Test mode:		Compliance	Verdict: PASS	
Date(s):		04-Dec-13		
Temperature: 25.0 °C		Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:				

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

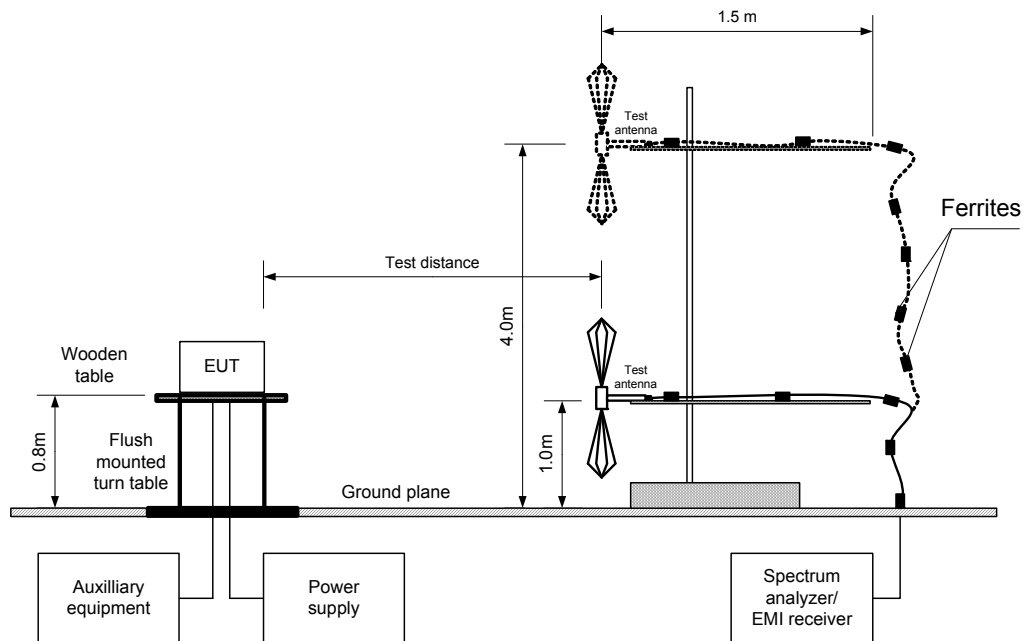



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
EUT POSITION: 3 orthogonal (X / Y / Z)
MODULATION: GFSK
BIT RATE: 21.12 kbps
INVESTIGATED FREQUENCY RANGE: 0.009 – 9165.0 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Log periodic (200 MHz – 1000 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
916.5	H	1.0	336	100.5	102.0	-1.50	N/A	77.96	82.0	-4.04	Pass
Spurious emissions											
3665.960	H	1.2	350	39.40	74.0	-34.60	N/A	16.86	54.0	-37.14	Pass
4582.655	H	1.2	270	40.18	74.0	-33.82	N/A	17.64	54.0	-36.36	
5498.920	V	1.1	0	51.30	82.0	-30.70	N/A	28.76	62.0	-33.24	
6415.450	V	1.2	0	51.87	82.0	-30.13	N/A	29.33	62.0	-32.67	
7331.870	H	1.2	80	57.34	74.0	-16.66	N/A	34.80	54.0	-19.20	
8248.520	H	1.0	80	47.53	74.0	-26.47	N/A	24.99	54.0	-29.01	
9165.340	V	1.1	0	48.36	74.0	-25.64	N/A	25.82	54.0	-28.18	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(μV/m)-Limit, dB(μV/m)

*** Max value was obtained in Z-axis orthogonal position.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of the pulse during 100 ms	Duration, ms	Period, ms		
7.463	1	NA	NA	NA	-22.54

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0415	HL 0446	HL 0583	HL 4294	HL 4295	HL 4535	HL 4541	HL 4542
HL 4543	HL 4549	HL 4551	HL 4575	HL 4603	HL 4604	HL 4665	HL 4676

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Dec-13	
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
EUT POSITION: Typical 3 orthogonal (X / Y / Z)
MODULATION: GFSK
BIT RATE: 21.12 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)

Emissions (50 MHz – 1500 MHz)									
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict	
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*					
No emissions were found									Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 4535	HL 4541	HL 4542	HL 4549	HL 4575	HL 4604	HL 4665
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

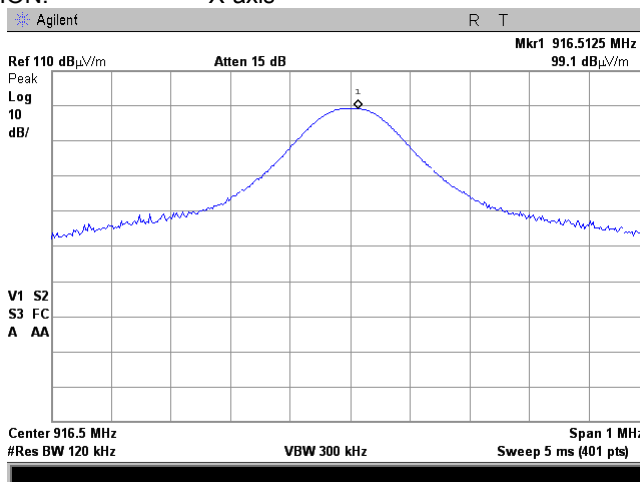

Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis

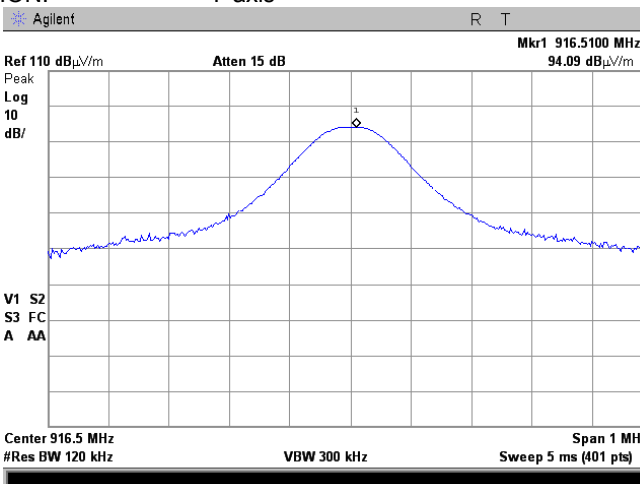




HERMON LABORATORIES

Report ID: CRORAD_FCC.25156.docx
Date of Issue: 19-Dec-13

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.3 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

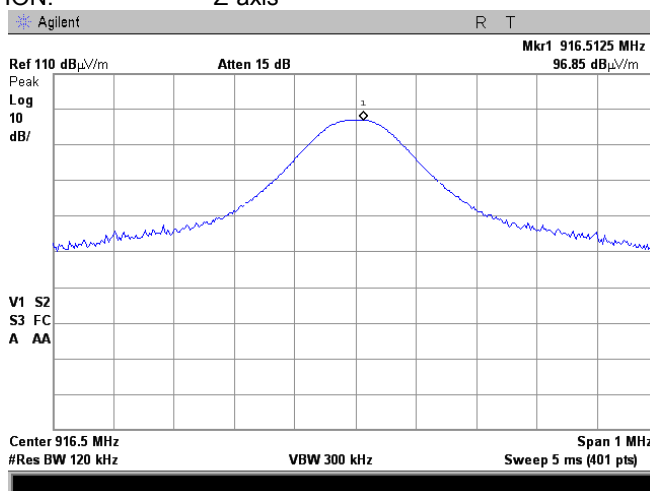

Plot 7.2.4 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis

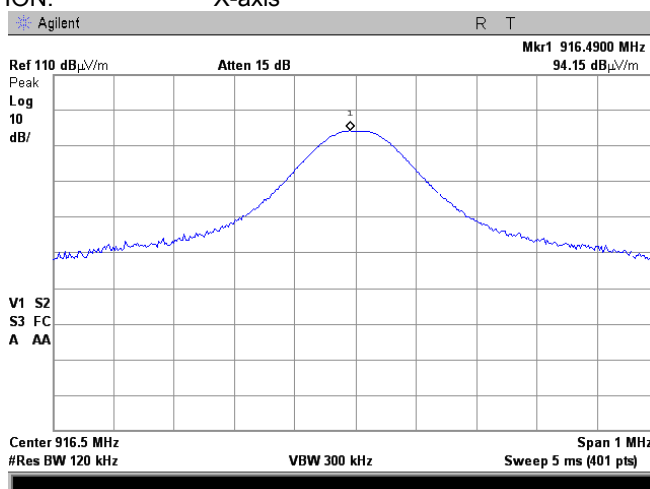




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.5 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis

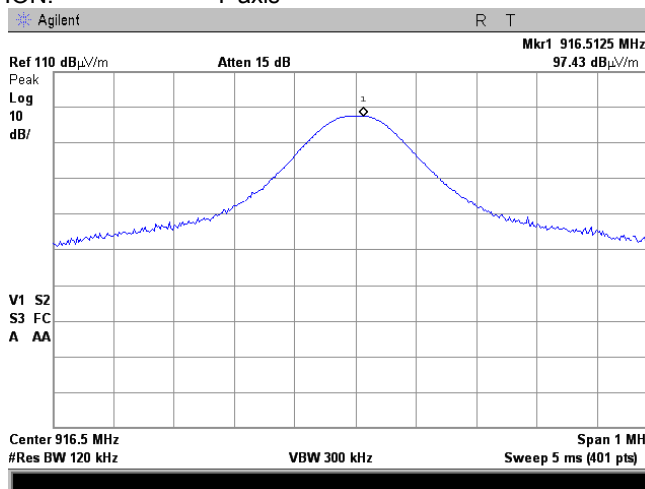

Plot 7.2.6 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

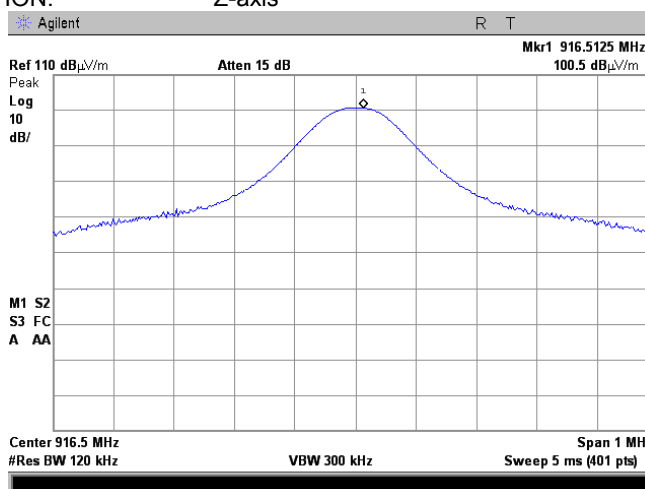



HERMON LABORATORIES


Report ID: CRORAD_FCC.25156.docx

Date of Issue: 19-Dec-13

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

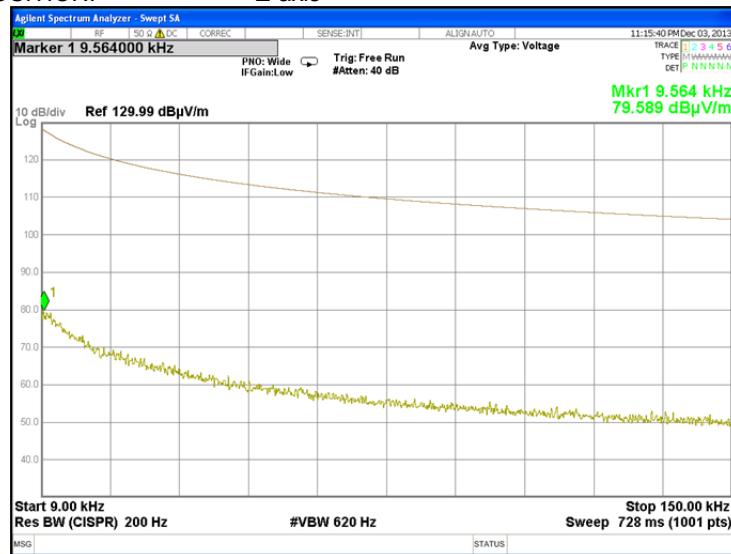

Plot 7.2.8 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

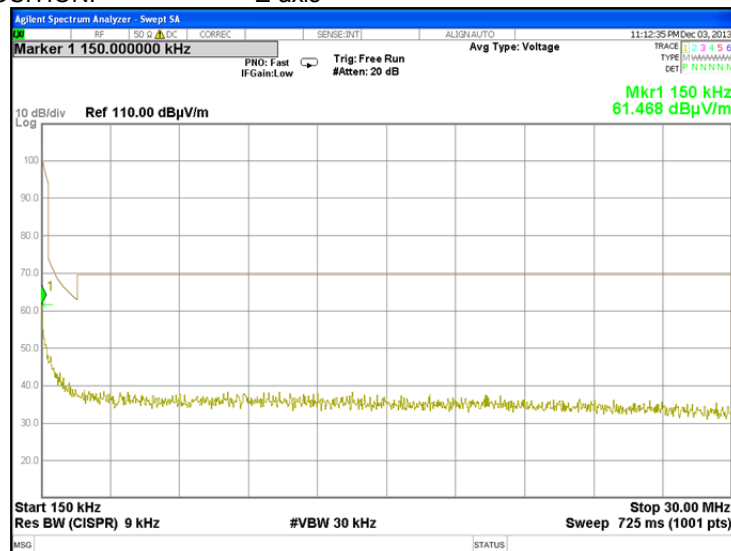




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Plot 7.2.9 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Z-axis

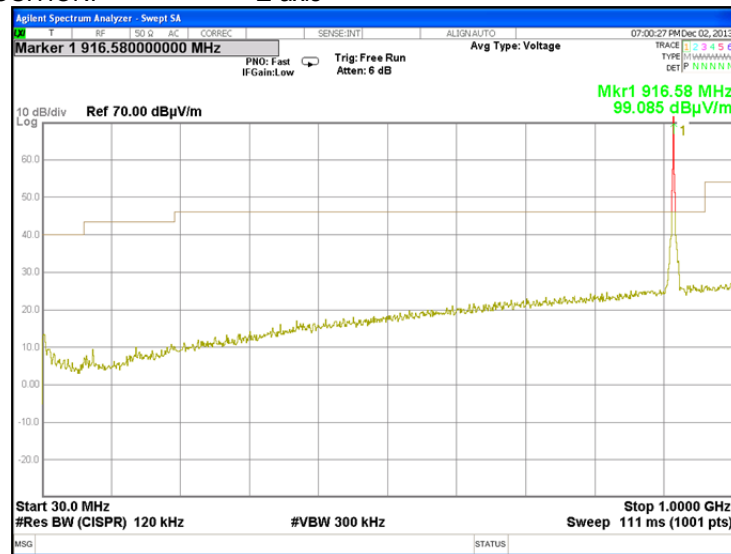

Plot 7.2.10 Radiated emission measurements from 1000 to 10000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Z-axis






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.11 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

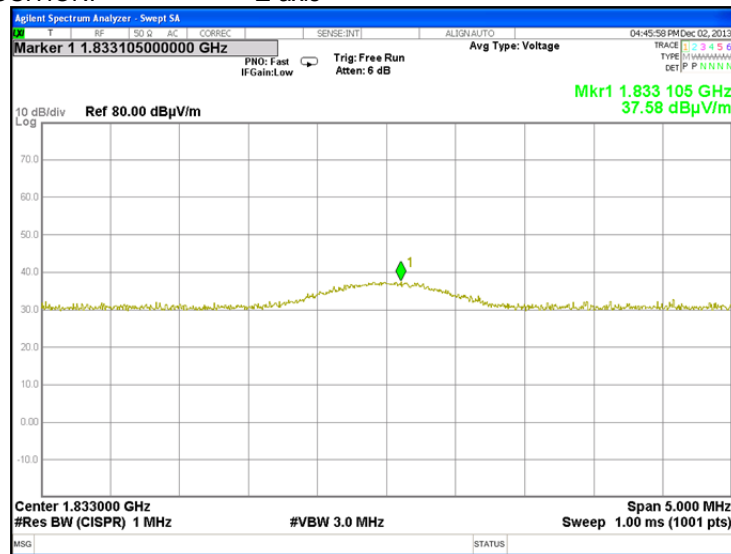

Plot 7.2.12 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

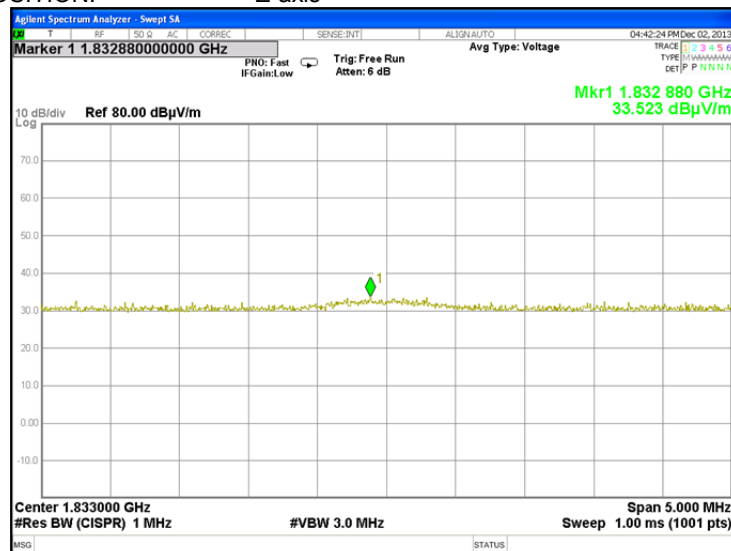



HERMON LABORATORIES


Report ID: CRORAD_FCC.25156.docx

Date of Issue: 19-Dec-13

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.13 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

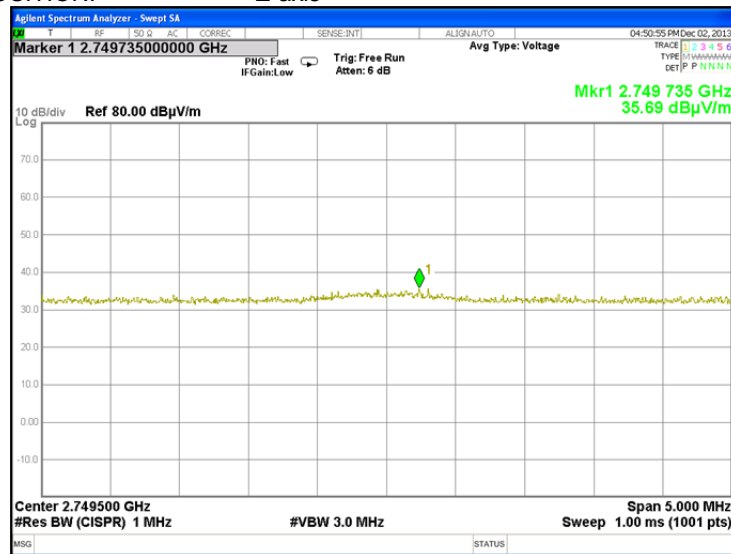

Plot 7.2.14 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

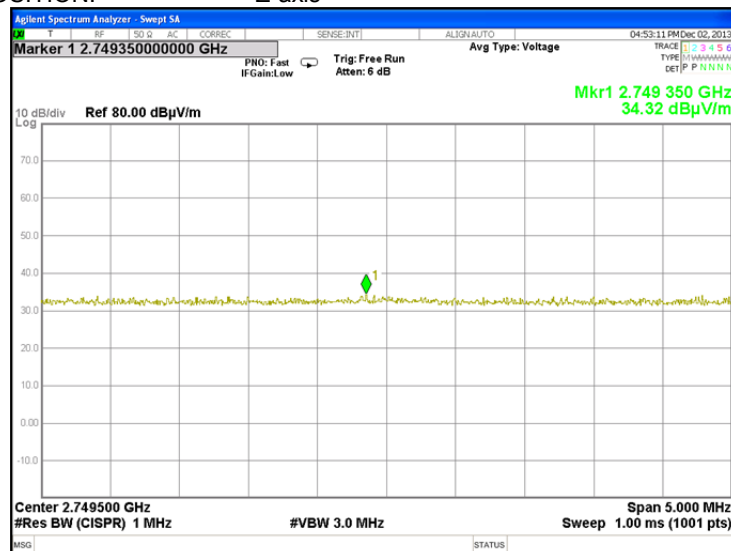



HERMON LABORATORIES


Report ID: CRORAD_FCC.25156.docx

Date of Issue: 19-Dec-13

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.15 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

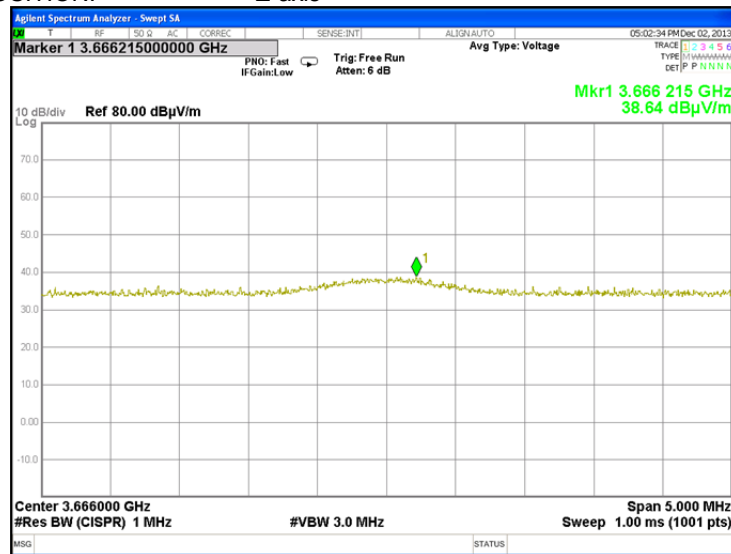

Plot 7.2.16 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

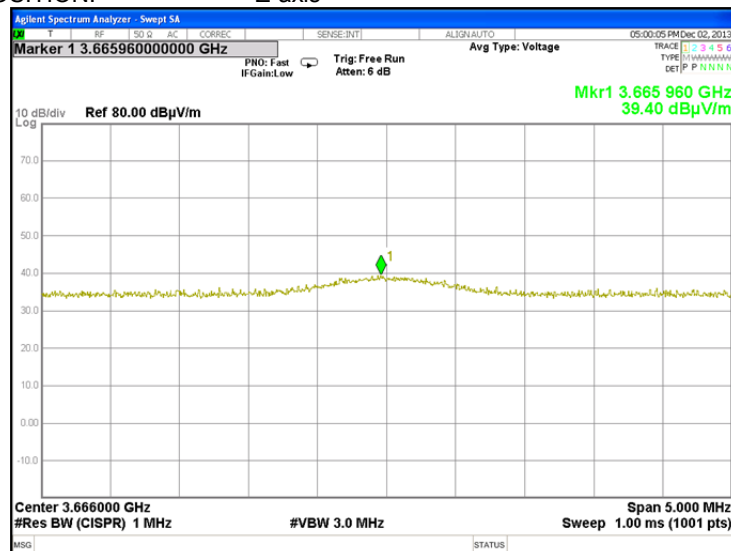




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.17 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

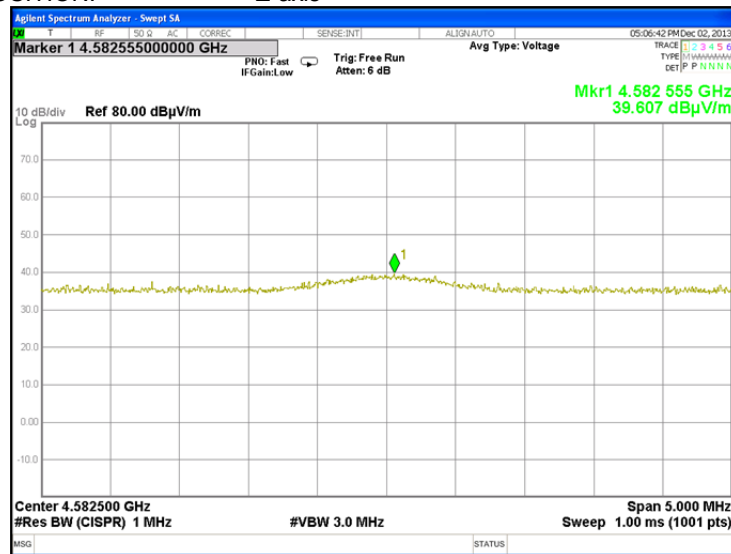

Plot 7.2.18 Radiated emission measurements at the fifth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

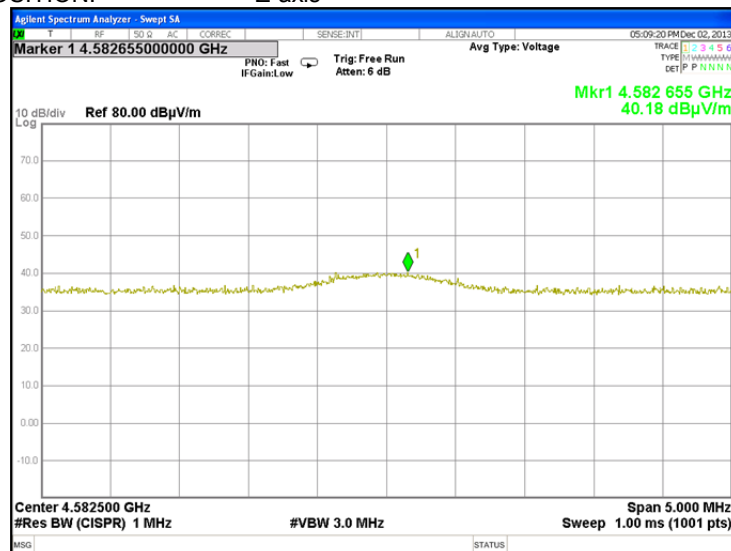




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.19 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

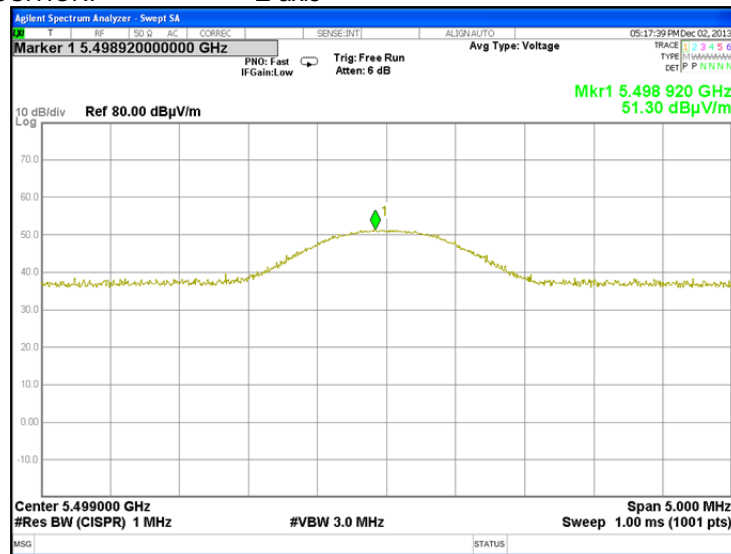

Plot 7.2.20 Radiated emission measurements at the sixth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

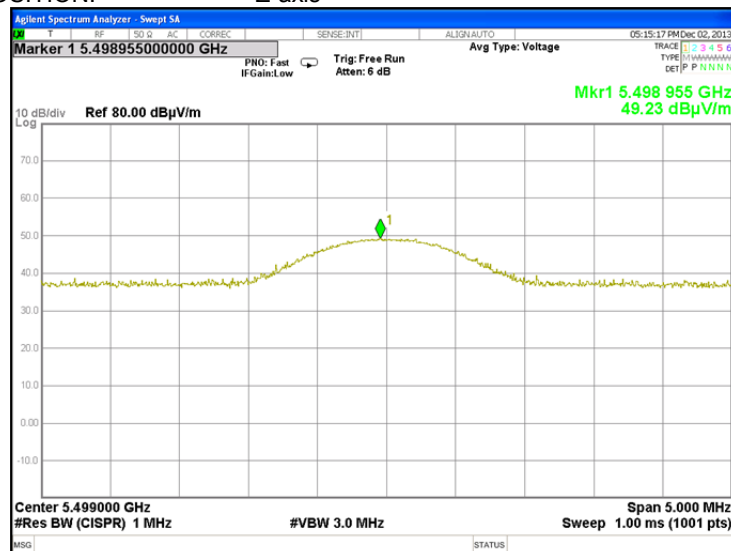




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.21 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

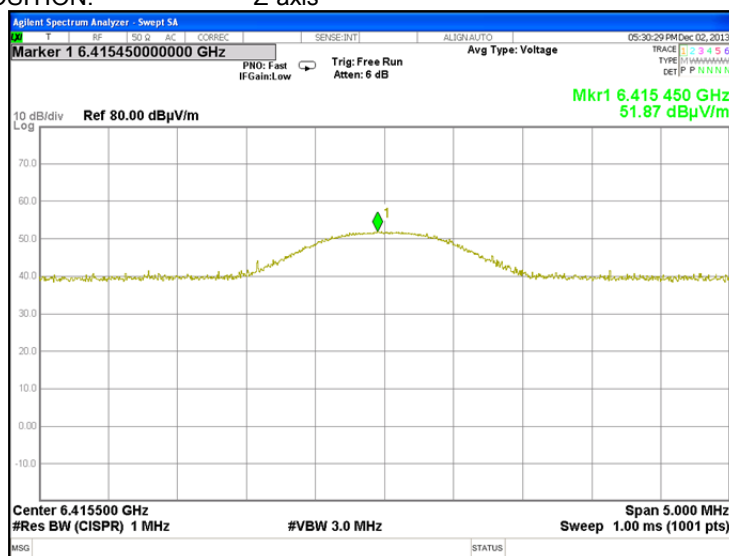

Plot 7.2.22 Radiated emission measurements at the seventh harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

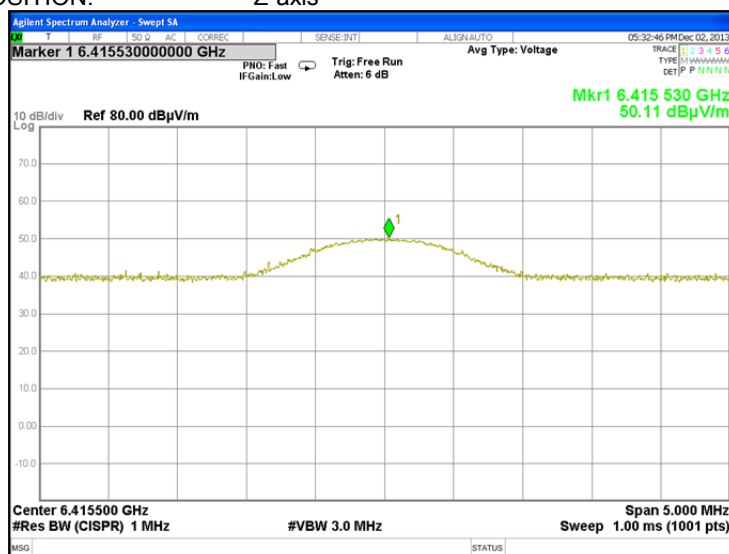




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.23 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

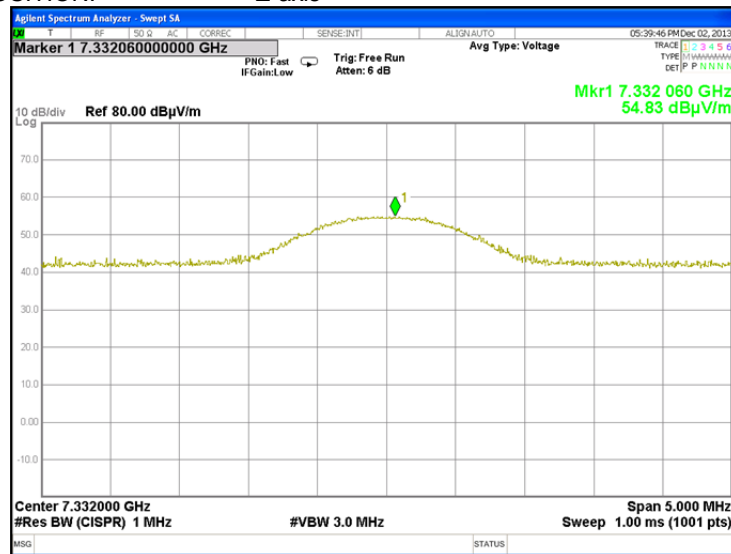

Plot 7.2.24 Radiated emission measurements at the eighth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

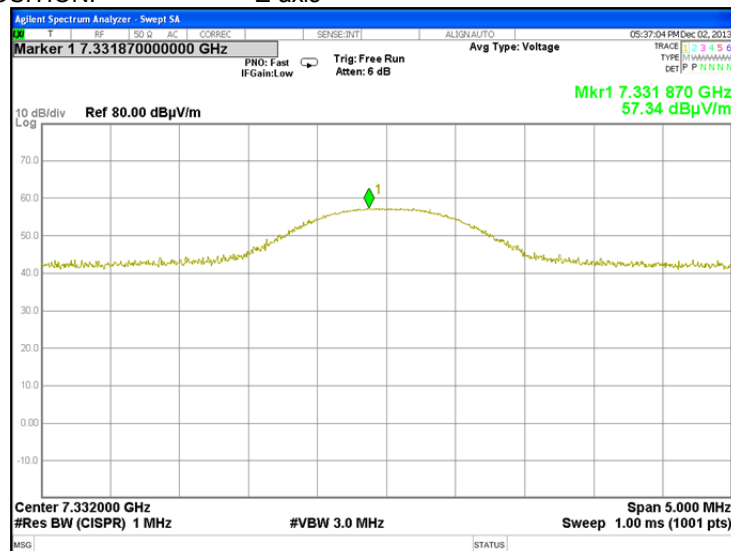




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.25 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

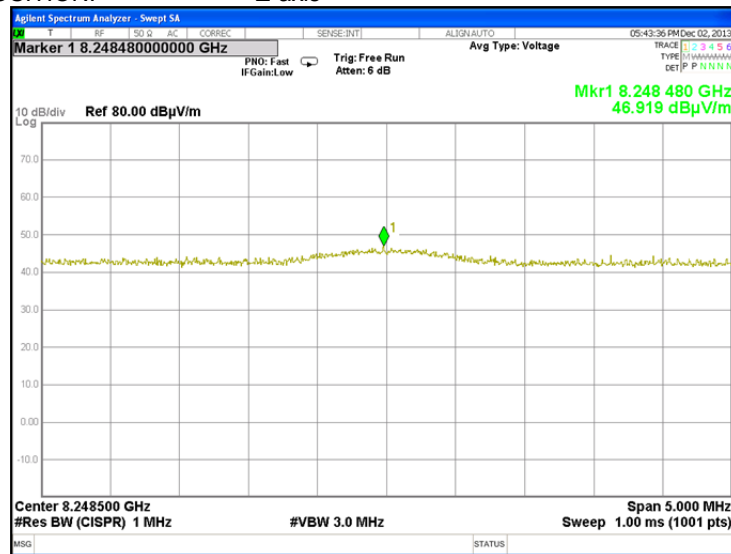

Plot 7.2.26 Radiated emission measurements at the ninth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

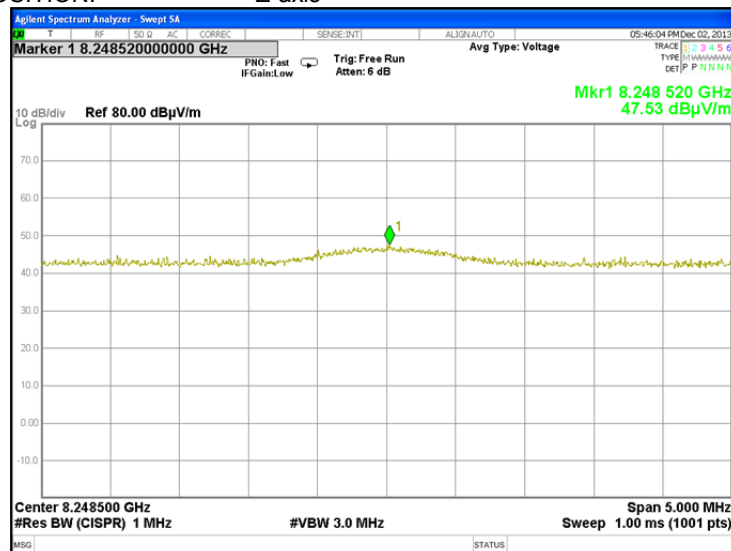




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 7.2.27 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

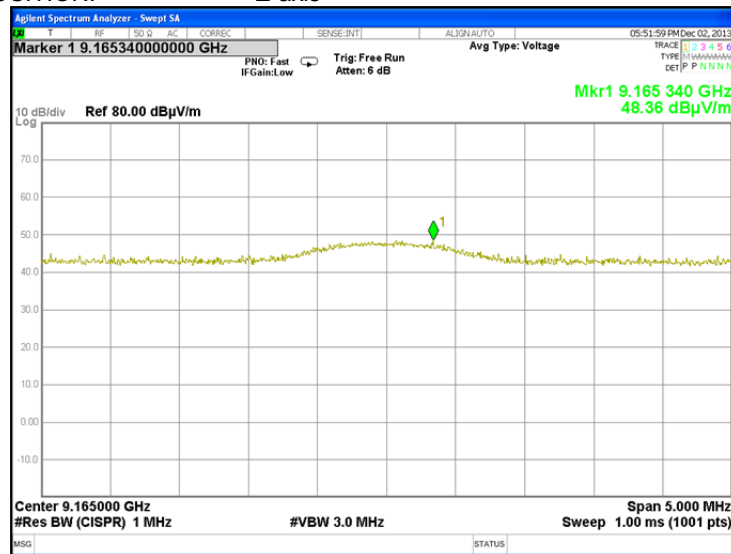

Plot 7.2.28 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

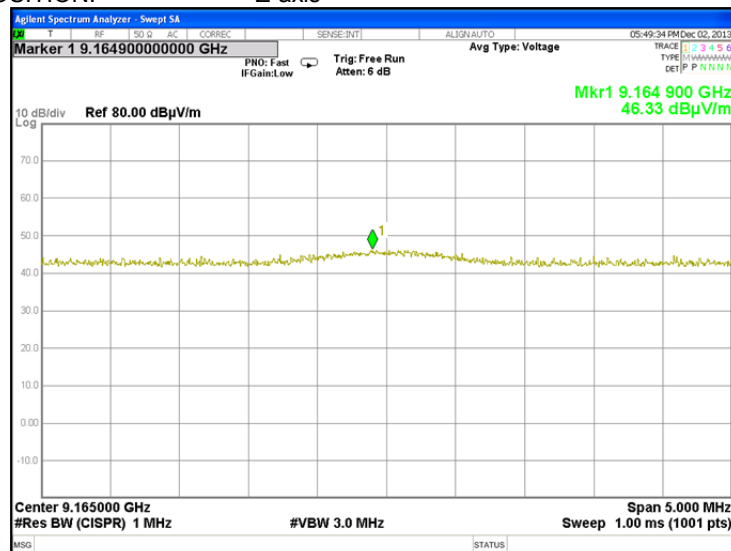




HERMON LABORATORIES

Report ID: CRORAD_FCC.25156.docx


Date of Issue: 19-Dec-13

Test specification:	FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
Test procedure:	ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict:		PASS
Date(s):	04-Dec-13			
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery	
Remarks:				

Plot 7.2.29 Supervision transmission duration

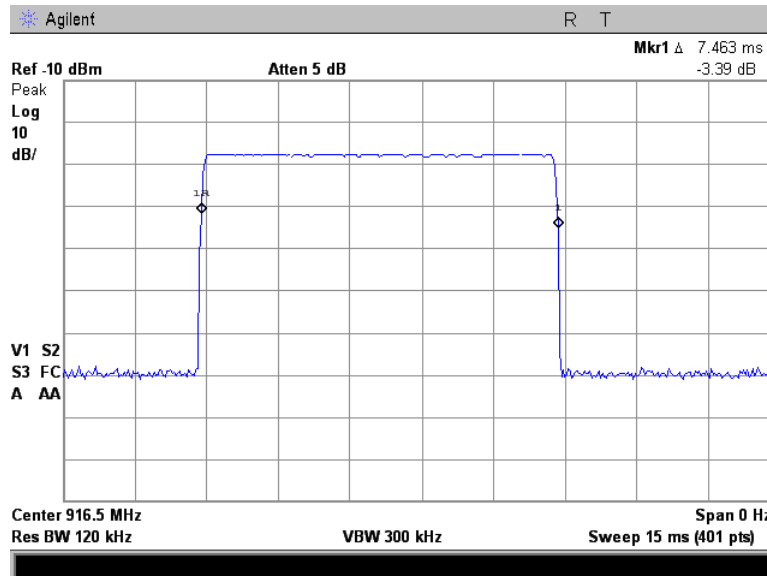

Plot 7.2.30 Supervision transmission period

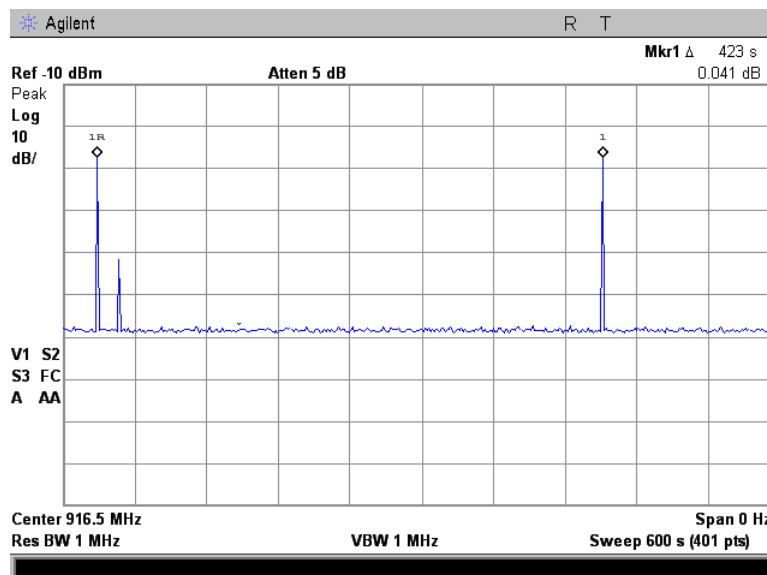

Test specification:		FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		16-Dec-13	
Temperature: 19 °C	Air Pressure: 1027 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0*/99% BW	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





Test specification:		FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Dec-13		
Temperature: 19 °C	Air Pressure: 1027 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION: GFSK
 BIT RATE: 21.12 kbps

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	52.6	0.5	4582.5	-4529.9	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	44.1	0.5	4582.5	-4538.4	Pass

Reference numbers of test equipment used

HL 3323	HL 3473	HL 3374	HL 3818					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: CRORAD_FCC.25156.docx

Date of Issue: 19-Dec-13

Test specification:		FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		16-Dec-13	
Temperature: 19 °C	Air Pressure: 1027 hPa	Relative Humidity: 41 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

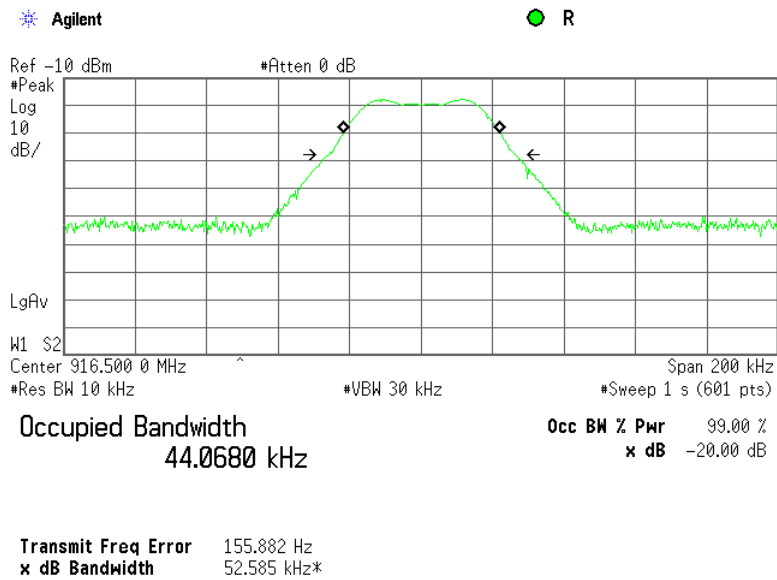

Test specification:		FCC Part 15, Section 203 / RSS-Gen, Section 7.1.4, Antenna requirements	
Test procedure:		Visual inspection / supplier declaration	
Test mode:	Compliance	Verdict:	PASS
Date(s):	16-Dec-13		
Temperature: 19 °C	Air Pressure: 1027 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

7.4 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

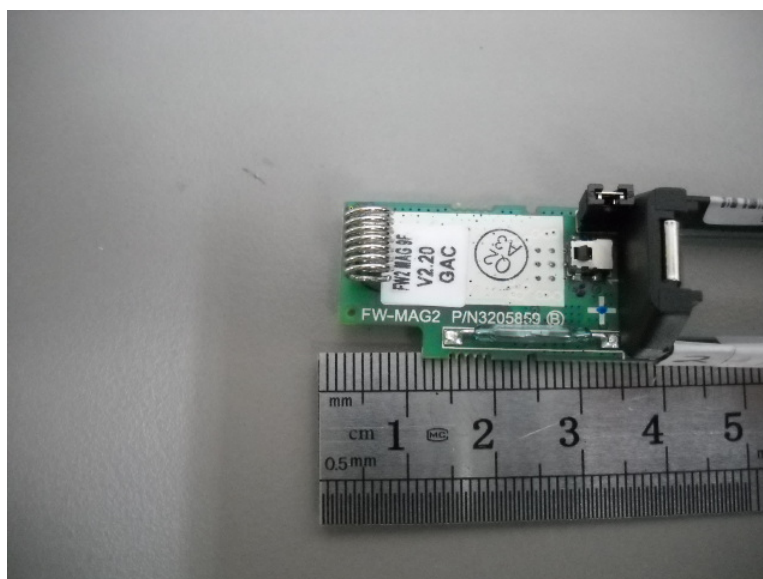

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, Table 8.1.2.

Table 8.1.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$,
where $S1$ and $S2$ – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen, Section 6.1

Frequency, MHz	Field strength limit at 3 m test distance, dB(μV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 rd harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.


8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.

Test specification:		FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22	
Test mode:		Compliance	Verdict: PASS
Date(s):		04-Dec-13	
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

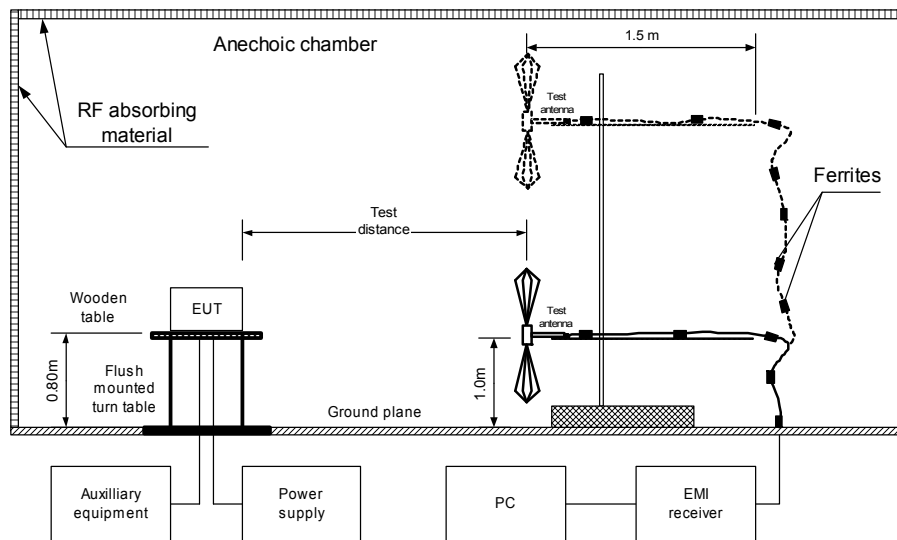

Photograph 8.1.1 Setup for radiated emission measurements

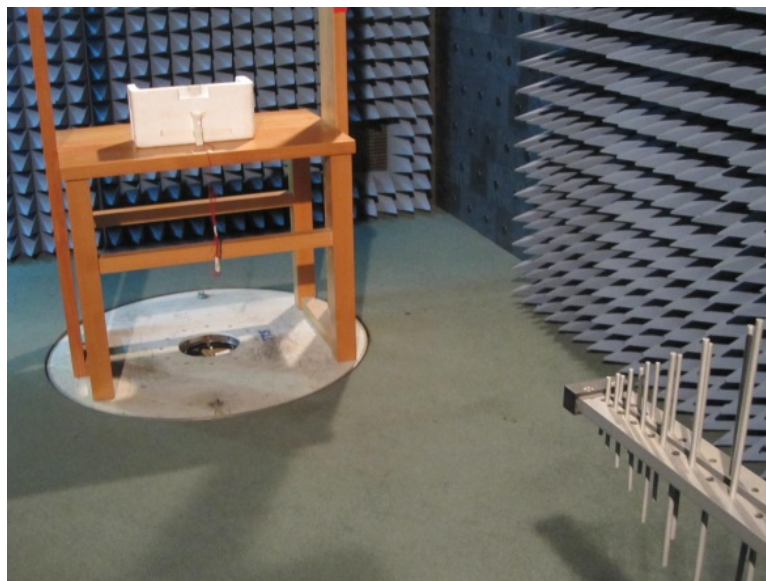


Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Photograph 8.1.2 Setup for radiated emission measurements



Photograph 8.1.3 Setup for radiated emission measurements

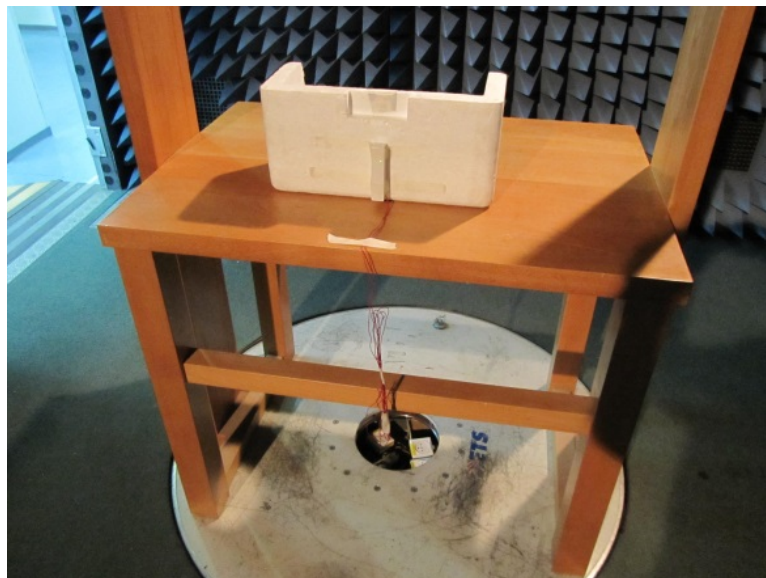



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict: PASS	
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Table 8.1.3 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Stand-by and Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Resolution Bandwidth:					120 kHz			
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 10000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Resolution Bandwidth:				Power Rate			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Peak			Average						
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575
HL 4603	HL 4604	HL 4665	HL 4676				

Full description is given in Appendix A.

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by and Receive

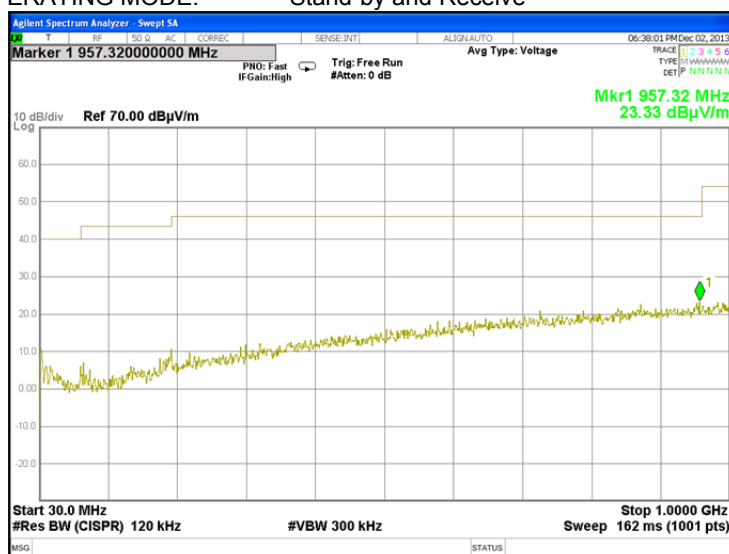

Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization



TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by and Receive

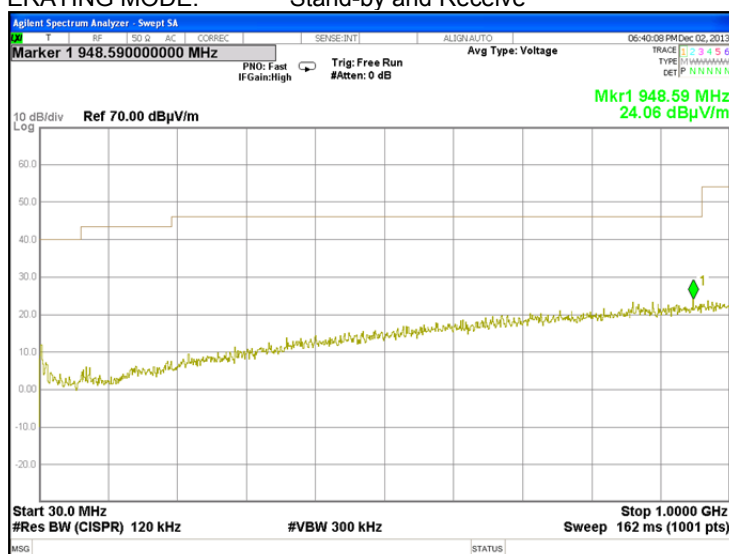

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	04-Dec-13		
Temperature: 25.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			



Plot 8.1.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by and Receive

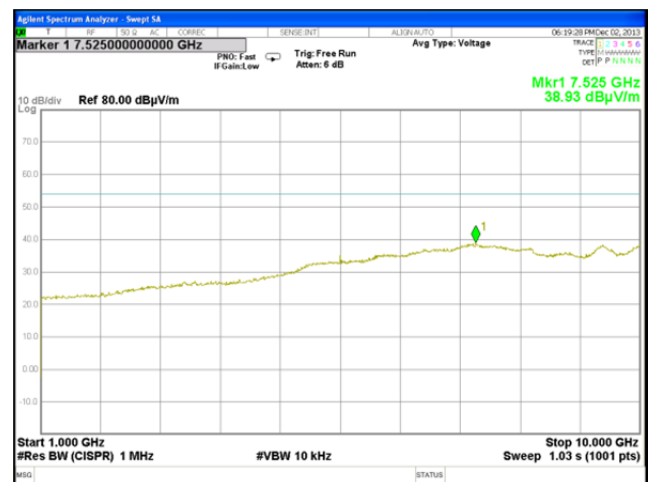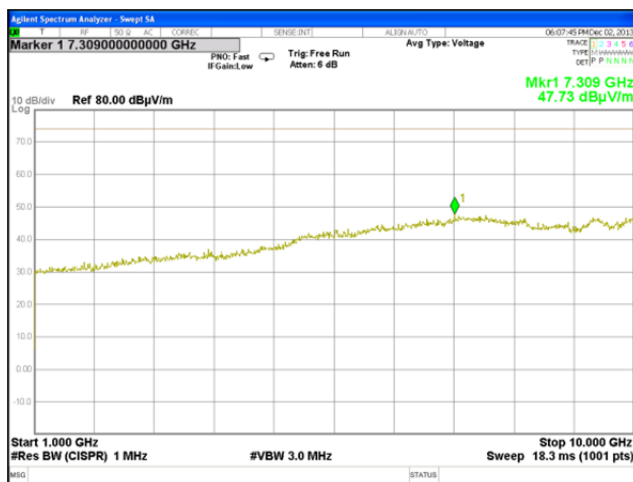

Plot 8.1.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Stand-by and Receive

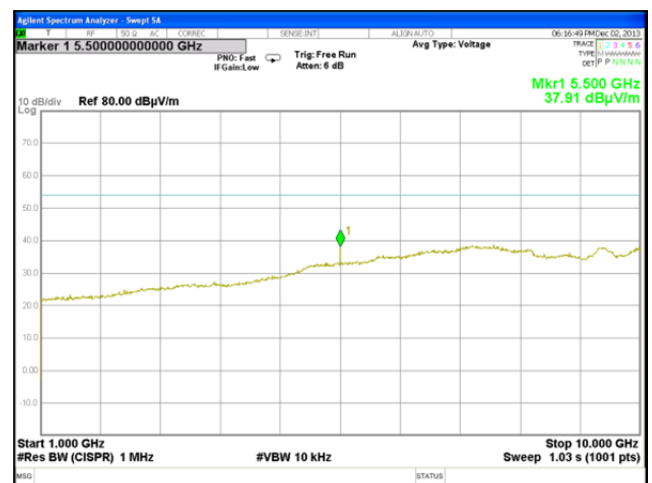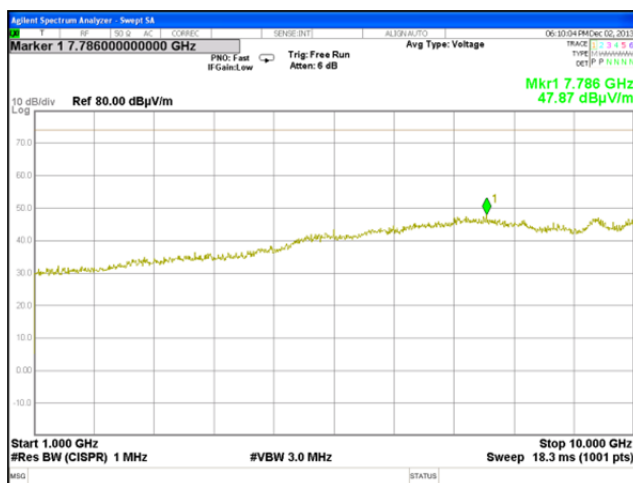

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0415	Cable, Coax, RF, RG-214, 12.3 m	Hermon Laboratories	CC-3	056	05-Dec-13	05-Dec-14
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-13	03-Jul-14
0583	Antenna, Log Periodic, 200 - 1000 MHz	Hermon Laboratories	LP 200/1000	035	11-Jul-13	11-Jul-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	20-Dec-12	20-Dec-13
3323	UHF TEM CELL, 100 MHz to 3000 MHz	TESCOM CO., LTD	TC-5060B	506039018 8	01-Sep-13	01-Sep-16
3374	Load Termination, BNC, 50 Ohm	Hermon Laboratories	TBNC-50	3374	17-Nov-13	17-Nov-14
3473	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m	Gore	GORE 65474	1003478	08-May-13	08-May-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	24-Apr-13	24-Apr-14
4274	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70047	27-Nov-13	27-Nov-14
4294	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	05-Dec-13	05-Dec-14
4295	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	04-Dec-13	04-Dec-14
4535	Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	13-Dec-13	13-Dec-14
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	13-Dec-13	13-Dec-14
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	13-Dec-13	13-Dec-14
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	13-Dec-13	13-Dec-14
4549	Cable RF, 6.8 m, N/N - type, up to 3 GHz	Suhner Switzerland	NA	07262	17-Dec-13	17-Dec-14
4551	Cable RF, 6.6 m, N/N - type, up to 18 GHz	Suhner Switzerland	Sucoflex 104E	22200/4E	17-Dec-13	17-Dec-14
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz,	Agilent Technologies	N90110A	MY480301 10	17-Apr-13	17-Apr-14
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	04-Jun-13	04-Jun-14
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	04-Jun-13	04-Jun-14
4665	Image Mainframe Controller	TESEQ	OVCMO2 B	7432	04-Mar-13	04-Mar-14
4676	Multi Device Controller	EMCO ETS	2090	9908-1449	04-Mar-13	04-Mar-14

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2012	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Log periodic antenna
Hermon Laboratories, model LP 200/1000
Ser.No.035, HL 0583

Frequency, MHz	Antenna factor, dB(1/m)
200	12.0
250	12.5
300	14.5
350	15.7
400	16.0
450	16.7
500	18.1
550	18.2
600	18.8
650	20.1
700	21.8
750	21.4
800	21.4
850	22.4
900	22.8
950	23.4
1000	24.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna factor
Horn antenna
Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m

Cable loss
Cable coax, RG-214, 12.3 m, s/n 056, HL 0415

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.89	±0.12
5	150	1.11	±0.13
6	200	1.30	±0.13
7	250	1.45	±0.13
8	300	1.61	±0.13
9	400	1.94	±0.13
10	500	2.18	±0.13
11	600	2.45	±0.14
12	700	2.67	±0.14
13	800	2.94	±0.14
14	900	3.16	±0.14
15	1000	3.38	±0.14

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m
Gore, HL 3473

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.01	5000	0.48	10200	0.72	15500	0.85
30	0.03	5100	0.48	10300	0.70	15600	0.93
50	0.04	5200	0.48	10400	0.75	15700	0.87
100	0.04	5300	0.48	10500	0.68	15800	0.88
200	0.08	5400	0.50	10600	0.77	15900	0.94
300	0.11	5500	0.48	10700	0.80	16000	0.94
400	0.12	5600	0.50	10800	0.77	16100	0.99
500	0.13	5700	0.50	10900	0.85	16200	0.96
600	0.15	5800	0.52	11000	0.83	16300	0.96
700	0.15	5900	0.51	11100	0.79	16400	0.94
800	0.17	6000	0.52	11200	0.82	16500	0.94
900	0.19	6100	0.54	11300	0.79	16600	1.03
1000	0.18	6200	0.53	11400	0.81	16700	1.04
1100	0.20	6300	0.54	11500	0.76	16800	1.07
1200	0.22	6400	0.55	11600	0.78	16900	0.94
1300	0.22	6500	0.56	11700	0.74	17000	1.05
1400	0.23	6600	0.56	11800	0.76	17100	0.96
1500	0.24	6700	0.60	11900	0.79	17200	1.07
1600	0.25	6800	0.55	12000	0.74	17300	0.98
1700	0.25	6900	0.60	12100	0.69	17400	1.16
1800	0.26	7000	0.59	12200	0.69	17500	1.05
1900	0.27	7100	0.60	12300	0.75	17600	1.13
2000	0.29	7200	0.61	12400	0.66	17700	1.05
2100	0.28	7300	0.60	12500	0.76	17800	1.22
2200	0.30	7400	0.57	12600	0.70	17900	1.02
2300	0.30	7500	0.63	12700	0.77	18000	1.04
2400	0.31	7600	0.60	12800	0.69		
2500	0.31	7700	0.63	12900	0.79		
2600	0.33	7800	0.66	13000	0.81		
2700	0.33	7900	0.61	13100	0.83		
2800	0.35	8000	0.58	13200	0.80		
2900	0.35	8100	0.62	13300	0.82		
3000	0.35	8200	0.62	13400	0.90		
3100	0.35	8300	0.63	13500	0.85		
3200	0.36	8400	0.67	13600	1.04		
3300	0.38	8500	0.63	13700	0.93		
3400	0.38	8600	0.61	13800	0.91		
3500	0.40	8700	0.64	13900	0.89		
3600	0.40	8800	0.62	14000	0.96		
3700	0.40	8900	0.64	14100	0.88		
3800	0.41	9000	0.64	14200	1.01		
3900	0.41	9100	0.64	14300	0.99		
4000	0.41	9200	0.63	14400	0.83		
4100	0.45	9300	0.63	14600	0.88		
4200	0.43	9400	0.63	14700	0.91		
4300	0.46	9500	0.64	14800	0.91		
4400	0.44	9600	0.65	14900	0.88		
4500	0.47	9700	0.62	15000	0.89		
4600	0.46	9800	0.66	15100	0.91		
4700	0.47	9900	0.61	15200	0.88		
4800	0.47	10000	0.70	15300	0.94		
4900	0.48	10100	0.70	15400	0.91		

Cable loss
Test cable, Mini-Circuits, S/N 70047, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4274

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.07	4800	1.69	9800	2.62	14800	3.42
30	0.11	4900	1.70	9900	2.63	14900	3.39
50	0.14	5000	1.72	10000	2.64	15000	3.38
100	0.21	5100	1.75	10100	2.64	15100	3.40
200	0.26	5200	1.76	10200	2.66	15200	3.41
300	0.30	5300	1.77	10300	2.67	15300	3.40
400	0.37	5400	1.79	10400	2.68	15400	3.39
500	0.44	5500	1.82	10500	2.68	15500	3.41
600	0.49	5600	1.85	10600	2.70	15600	3.44
700	0.54	5700	1.86	10700	2.71	15700	3.46
800	0.58	5800	1.87	10800	2.73	15800	3.45
900	0.63	5900	1.91	10900	2.74	15900	3.47
1000	0.67	6000	1.94	11000	2.76	16000	3.51
1100	0.71	6100	1.97	11100	2.77	16100	3.56
1200	0.75	6200	1.98	11200	2.78	16200	3.55
1300	0.78	6300	1.99	11300	2.79	16300	3.54
1400	0.81	6400	2.02	11400	2.80	16400	3.57
1500	0.85	6500	2.05	11500	2.82	16500	3.62
1600	0.88	6600	2.06	11600	2.83	16600	3.61
1700	0.91	6700	2.06	11700	2.84	16700	3.60
1800	0.94	6800	2.08	11800	2.85	16800	3.62
1900	0.97	6900	2.10	11900	2.87	16900	3.68
2000	1.00	7000	2.12	12000	2.88	17000	3.70
2100	1.03	7100	2.12	12100	2.89	17100	3.68
2200	1.06	7200	2.13	12200	2.90	17200	3.70
2300	1.08	7300	2.16	12300	2.92	17300	3.80
2400	1.11	7400	2.19	12400	2.94	17400	3.84
2500	1.14	7500	2.22	12500	2.95	17500	3.83
2600	1.16	7600	2.23	12600	2.96	17600	3.83
2700	1.19	7700	2.26	12700	2.98	17700	3.86
2800	1.21	7800	2.30	12800	3.00	17800	3.86
2900	1.27	7900	2.33	12900	3.02	17900	3.80
3000	1.29	8000	2.35	13000	3.03	18000	3.79
3100	1.32	8100	2.37	13100	3.06		
3200	1.35	8200	2.41	13200	3.08		
3300	1.37	8300	2.44	13300	3.09		
3400	1.38	8400	2.47	13400	3.10		
3500	1.41	8500	2.48	13500	3.13		
3600	1.43	8600	2.51	13600	3.17		
3700	1.46	8700	2.53	13700	3.17		
3800	1.47	8800	2.55	13800	3.18		
3900	1.49	8900	2.56	13900	3.22		
4000	1.52	9000	2.57	14000	3.26		
4100	1.55	9100	2.58	14100	3.28		
4200	1.56	9200	2.59	14200	3.30		
4300	1.58	9300	2.59	14300	3.35		
4400	1.60	9400	2.60	14400	3.39		
4500	1.63	9500	2.60	14500	3.39		
4600	1.65	9600	2.61	14600	3.39		
4700	1.67	9700	2.61	14700	3.41		

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner,
Sucoflex P103, HL 4294

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	4900	2.09	10000	2.90	15100	3.61
30	0.17	5000	2.10	10100	2.92	15200	3.67
50	0.22	5100	2.14	10200	2.95	15300	3.63
100	0.30	5200	2.16	10300	2.96	15400	3.64
200	0.42	5300	2.17	10400	2.99	15500	3.68
300	0.51	5400	2.19	10500	2.99	15600	3.71
400	0.59	5500	2.19	10600	3.03	15700	3.74
500	0.66	5600	2.22	10700	3.03	15800	3.71
600	0.72	5700	2.24	10800	3.04	15900	3.74
700	0.77	5800	2.23	10900	3.05	16000	3.71
800	0.82	5900	2.26	11000	3.09	16100	3.73
900	0.88	6000	2.27	11100	3.07	16200	3.76
1000	0.93	6100	2.26	11200	3.08	16300	3.82
1100	0.98	6200	2.29	11300	3.11	16400	3.90
1200	1.02	6300	2.30	11400	3.12	16500	3.81
1300	1.06	6400	2.34	11500	3.11	16600	3.88
1400	1.10	6500	2.34	11600	3.15	16700	3.87
1500	1.14	6600	2.36	11700	3.16	16800	3.89
1600	1.19	6700	2.36	11800	3.18	16900	3.95
1700	1.23	6800	2.39	11900	3.19	17000	4.02
1800	1.27	6900	2.39	12000	3.23	17100	4.04
1900	1.30	7000	2.44	12100	3.25	17200	3.99
2000	1.35	7100	2.46	12200	3.22	17300	4.03
2100	1.38	7200	2.44	12300	3.25	17400	4.03
2200	1.42	7300	2.48	12400	3.25	17500	4.06
2300	1.45	7400	2.47	12500	3.28	17600	4.05
2400	1.48	7500	2.48	12600	3.27	17700	4.12
2500	1.51	7600	2.50	12700	3.27	17800	4.14
2600	1.55	7700	2.53	12800	3.30	17900	4.18
2700	1.59	7800	2.56	12900	3.30	18000	4.14
2800	1.62	7900	2.55	13000	3.27		
2900	1.65	8000	2.56	13100	3.32		
3000	1.66	8100	2.56	13200	3.32		
3100	1.69	8200	2.57	13300	3.32		
3200	1.71	8300	2.59	13400	3.35		
3300	1.74	8400	2.62	13500	3.38		
3400	1.76	8500	2.67	13600	3.39		
3500	1.78	8600	2.65	13700	3.42		
3600	1.80	8700	2.68	13800	3.47		
3700	1.85	8800	2.68	13900	3.45		
3800	1.88	8900	2.68	14000	3.49		
3900	1.90	9000	2.74	14100	3.50		
4000	1.91	9100	2.74	14200	3.55		
4100	1.93	9200	2.76	14300	3.59		
4200	1.96	9300	2.78	14400	3.58		
4300	1.97	9400	2.79	14500	3.56		
4400	1.99	9500	2.80	14600	3.57		
4500	2.02	9600	2.83	14700	3.57		
4600	2.02	9700	2.84	14800	3.57		
4700	2.04	9800	2.86	14900	3.64		
4800	2.05	9900	2.92	15000	3.64		

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner, S/N 4295,
Sucoflex P103, HL 4295

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	5000	2.09	10200	2.97	15400	3.63
30	0.18	5100	2.12	10300	3.01	15500	3.65
50	0.23	5200	2.13	10400	3.00	15600	3.63
100	0.31	5300	2.16	10500	3.05	15700	3.64
200	0.38	5400	2.19	10600	3.09	15800	3.64
300	0.43	5500	2.21	10700	3.05	15900	3.66
400	0.52	5600	2.21	10800	3.09	16000	3.71
500	0.60	5700	2.24	10900	3.10	16100	3.67
600	0.67	5800	2.24	11000	3.08	16200	3.71
700	0.72	5900	2.25	11100	3.11	16300	3.70
800	0.78	6000	2.27	11200	3.12	16400	3.71
900	0.83	6100	2.25	11300	3.12	16500	3.72
1000	0.89	6200	2.29	11400	3.20	16600	3.84
1100	0.94	6300	2.34	11500	3.16	16700	3.78
1200	0.98	6400	2.37	11600	3.16	16800	3.85
1300	1.03	6500	2.33	11700	3.20	16900	3.88
1400	1.06	6600	2.34	11800	3.19	17000	3.85
1500	1.11	6700	2.39	11900	3.21	17100	3.88
1600	1.14	6800	2.46	12000	3.28	17200	3.92
1700	1.19	6900	2.45	12100	3.23	17300	3.90
1800	1.22	7000	2.44	12200	3.26	17400	4.00
1900	1.26	7100	2.43	12300	3.30	17500	4.02
2000	1.30	7200	2.44	12400	3.25	17600	4.00
2100	1.34	7300	2.51	12500	3.26	17700	3.96
2200	1.37	7400	2.54	12600	3.30	17800	4.01
2300	1.40	7500	2.49	12700	3.26	17900	4.02
2400	1.44	7600	2.52	12800	3.34	18000	4.08
2500	1.47	7700	2.59	12900	3.37		
2600	1.50	7800	2.57	13000	3.30		
2700	1.55	7900	2.55	13100	3.35		
2800	1.58	8000	2.57	13200	3.31		
2900	1.60	8100	2.58	13300	3.33		
3000	1.63	8200	2.64	13400	3.42		
3100	1.64	8300	2.70	13500	3.43		
3200	1.67	8400	2.65	13600	3.40		
3300	1.69	8500	2.66	13700	3.47		
3400	1.73	8600	2.68	13800	3.45		
3500	1.74	8700	2.70	13900	3.43		
3600	1.76	8800	2.74	14000	3.52		
3700	1.79	8900	2.74	14100	3.51		
3800	1.82	9000	2.76	14200	3.54		
3900	1.85	9100	2.82	14300	3.55		
4000	1.87	9200	2.79	14400	3.52		
4100	1.90	9300	2.82	14500	3.52		
4200	1.92	9400	2.83	14600	3.56		
4300	1.93	9500	2.83	14700	3.55		
4400	1.94	9600	2.86	14800	3.55		
4500	1.97	9700	2.93	14900	3.59		
4600	1.99	9800	2.89	15000	3.56		
4700	2.01	9900	2.91	15100	3.59		
4800	2.02	10000	2.94	15200	3.59		
4900	2.04	10100	2.94	15300	3.59		

Cable loss
Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type
Suhner Switzerland, HL 4535

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	1700	1.79	4400	3.53
15	0.13	1800	1.86	4500	3.60
20	0.15	1900	1.93	4600	3.72
30	0.18	2000	2.00	4700	3.80
40	0.21	2100	2.06	4800	3.87
50	0.24	2200	2.13	4900	3.94
60	0.26	2300	2.19	5000	3.99
70	0.29	2400	2.25	5100	4.06
80	0.31	2500	2.32	5200	4.12
90	0.33	2600	2.38	5300	4.17
100	0.35	2700	2.45	5400	4.25
150	0.43	2800	2.51	5500	4.31
200	0.50	2900	2.57	5600	4.40
300	0.63	3000	2.64	5700	4.47
400	0.74	3100	2.73	5800	4.54
500	0.85	3200	2.79	5900	4.64
600	0.94	3300	2.86	6000	4.73
700	1.03	3400	2.91	6100	4.79
800	1.12	3500	2.97	6200	4.89
900	1.20	3600	3.02	6300	5.00
1000	1.28	3700	3.07	6400	5.06
1100	1.35	3800	3.14	6500	5.13
1200	1.43	3900	3.20		
1300	1.50	4000	3.25		
1400	1.58	4100	3.32		
1500	1.65	4200	3.38		
1600	1.72	4300	3.46		

Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT