

# FCC Part 15 EMI TEST REPORT

of

E.U.T. : 5372 miniPCie card  
FCC ID. : NGJ-5372  
Model No. : 5372

for

APPLICANT : LIGHTSPEED International Co.  
ADDRESS : No.20 Lane 526 Niupu East Rd. Hsinchu Taiwan  
30091

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 17-06-RBF-035

# TEST REPORT CERTIFICATION

Applicant : LIGHTSPEED International Co.  
No.20 Lane 526 Niupu East Rd. Hsinchu Taiwan 30091

Manufacturer : LIGHTSPEED International Co.  
No.20 Lane 526 Niupu East Rd. Hsinchu Taiwan 30091

## Description of EUT

- a) Type of EUT : 5372 miniPCie card
- b) Trade Name : LIGHTSPEED
- c) Model No. : 5372
- d) Power Supply : 3.3Vdc

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC

## Summary of Tests

Test	Results
Radiated Emission	<b>Pass</b>
Conducted Emission	<b>Pass</b>
Emission Bandwidth	<b>Pass</b>
Output Power	<b>Pass</b>
100 kHz Bandwidth of Band Edges	<b>Pass</b>
Power Density	<b>Pass</b>
Out-of-Band Conducted Emission	<b>Pass</b>
Duty Cycle	<b>N.A.</b>

Date Test Item Received : Jun. 27, 2017  
Date Test Campaign Completed : Aug. 02, 2017  
Date of Issue : Aug. 08, 2017

Test Engineer : Brian Huang  
(Brian Huang, Engineer)

Approve & Authorized Signer : S. S. Liou  
S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN



<b>Table of Contents</b>	<b>Page</b>
<b>1 GENERAL INFORMATION.....</b>	<b>1</b>
1.1 Product Description.....	1
1.2 Characteristics of Device .....	1
1.3 Test Methodology .....	1
1.4 Test Facility.....	1
<b>2 PROVISIONS APPLICABLE.....</b>	<b>2</b>
2.1 Definition .....	2
2.2 Requirement for Compliance .....	3
2.3 Restricted Bands of Operation .....	5
2.4 Labeling Requirement.....	5
2.5 User Information .....	6
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
3.1 Justification .....	7
3.2 Devices for Tested System.....	7
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument .....	10
4.4 Radiated Emission Data .....	11
4.5 Field Strength Calculation .....	29
4.6 Photos of Radiation Measuring Setup.....	30
<b>5 CONDUCTED EMISSION MEASUREMENT.....</b>	<b>32</b>
5.1 Standard Applicable .....	32
5.2 Measurement Procedure.....	32
5.3 Conducted Emission Data .....	33
5.4 Result Data Calculation .....	35
5.5 Conducted Measurement Equipment .....	35
5.6 Photos of Conduction Measuring Setup.....	36
<b>6 ANTENNA REQUIREMENT .....</b>	<b>37</b>
6.1 Standard Applicable .....	37
6.2 Antenna Construction and Directional Gain.....	37
<b>7 EMISSION BANDWIDTH MEASUREMENT.....</b>	<b>38</b>
7.1 Standard Applicable .....	38
7.2 Measurement Procedure.....	38

7.3 Measurement Equipment .....	38
7.4 Measurement Data .....	39
<b>8 OUTPUT POWER MEASUREMENT .....</b>	<b>58</b>
8.1 Standard Applicable .....	58
8.2 Measurement Procedure.....	58
8.3 Measurement Equipment .....	58
8.4 Measurement Data .....	59
9.1 Standard Applicable .....	61
9.2 Measurement Procedure.....	61
9.3 Measurement Equipment .....	61
9.4 Measurement Data .....	62
<b>10 POWER DENSITY MEASUREMENT .....</b>	<b>69</b>
10.1 Standard Applicable .....	69
10.2 Measurement Procedure.....	69
10.3 Measurement Equipment .....	69
10.4 Measurement Data .....	70
<b>11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT .....</b>	<b>90</b>
11.1 Standard Applicable .....	90
11.2 Measurement Procedure.....	90
11.3 Measurement Equipment .....	90
11.4 Measurement Data .....	91
<b>12. DUTY CYCLE .....</b>	<b>110</b>
12.1 Standard Applicable .....	110
12.2 Measurement Equipment .....	110
12.3 Measurement Data .....	110

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : 5372 miniPCie card
- b) Trade Name : LIGHTSPEED
- c) Model No. : 5372
- d) Power Supply : 3.3Vdc

## 1.2 Characteristics of Device

Frequency : 2412~2462 MHz

Working Channel : 1~11

Modulation : BPSK, QPSK, CCK and OFDM(BPSK/QPSK/16-QAM)

Transmission Rate : 11n: Max 300Mbps, 11g:6/9/12/18/24/36/48/54Mbps,  
11b:1/2/5.5/11Mbps

## 1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v04.

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

## 1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreases with the logarithm of the frequency

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### (3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



**(4) Bandwidth Requirement**

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

**(5) Output Power Requirement**

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**(6) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

**(7) Power Density Requirement**

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

The antenna used:

Antenna 1: AN2400-6001RS (7dBi)

Antenna 2: AN2400-5002BRS (5dBi)

Antenna 3: AN2400-3901BRS (2dBi)

Antenna 1 has the greatest antenna gain so it was chosen for conducted and radiated spurious emission test.

#### 3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
5372 miniPCie card *	LIGHTSPEED International Co.	5372	---
Notebook PC	IBM	Thinkpad X21	1.8 Unshielded AC Power Core

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


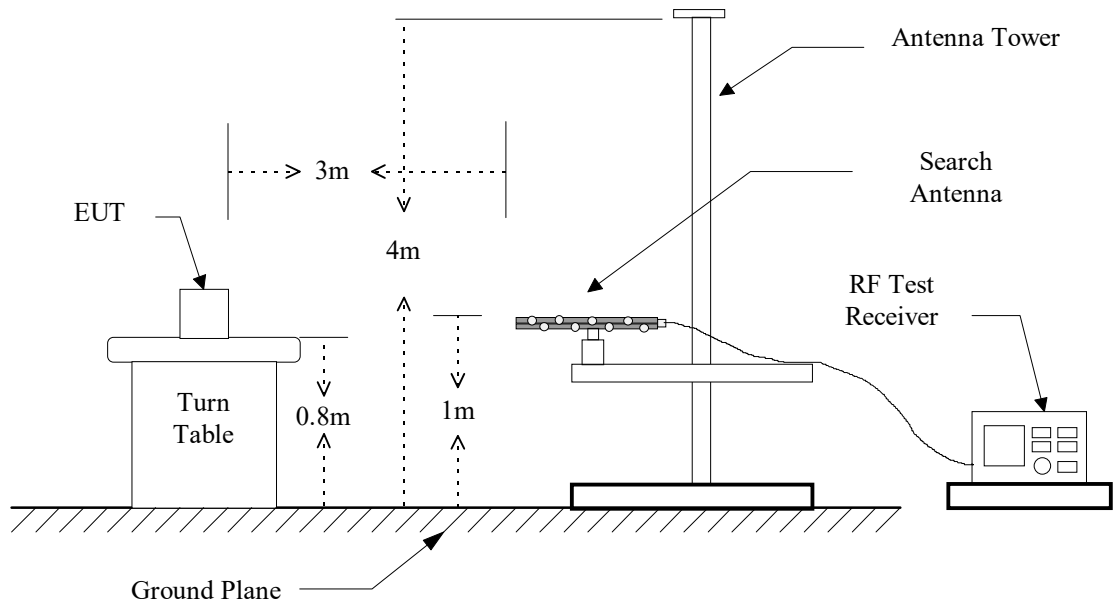


Figure 2 : Frequencies measured above 1 GHz configuration

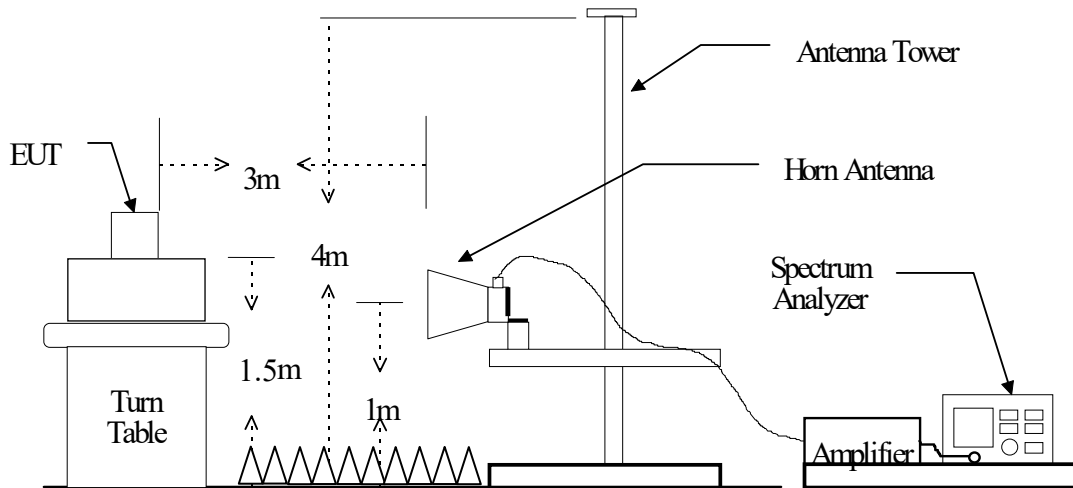

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2016/11/10	2017/11/09
Bi-Log Antenna	ETC	MCTD 2786	2017/07/12	2018/07/11
Horn Antenna	EMCO	3115	2016/10/05	2017/10/04
Horn Antenna	EMCO	3116	2016/10/05	2017/10/04
Amplifier	HP	8447D	2016/12/28	2017/12/27
Amplifier	HP	83051A	2017/07/17	2018/07/16
LOOP Antenna	EMCO	6512	2016/10/12	2017/10/11

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW  $\geq 1/T$ , when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 4.4 Radiated Emission Data

#### 4.4.1 RF Portion

##### A. (802.11b)

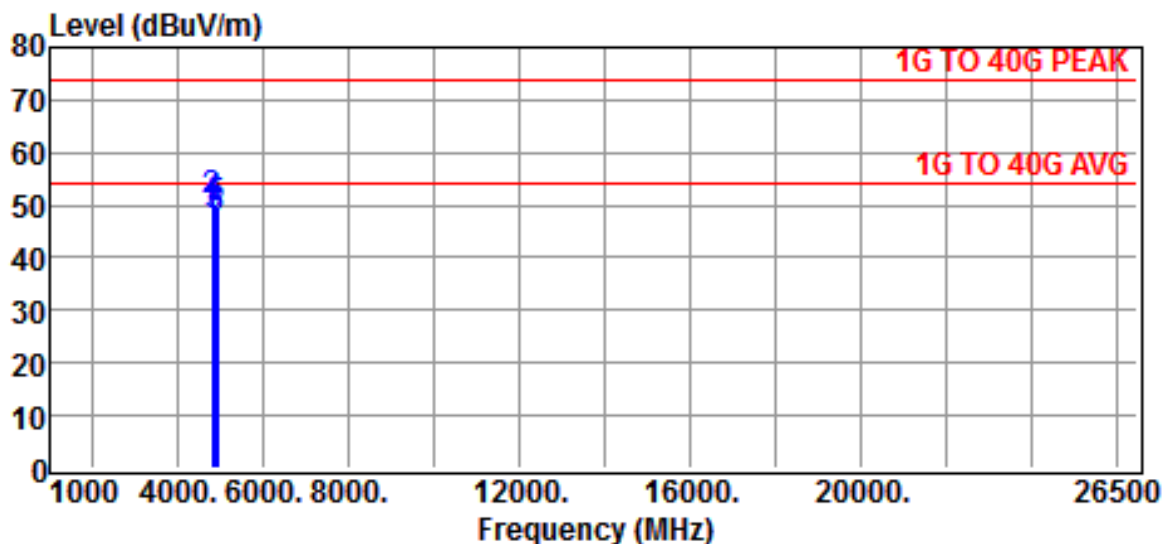


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11B Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	47.19	1.31	48.50	54.00	-5.50	Average
4824.0000	49.49	1.31	50.80	74.00	-23.20	Peak
4874.0000	46.53	1.47	48.00	54.00	-6.00	Average
4874.0000	48.73	1.47	50.20	74.00	-23.80	Peak
4924.0000	45.55	1.65	47.20	54.00	-6.80	Average
4924.0000	47.85	1.65	49.50	74.00	-24.50	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result



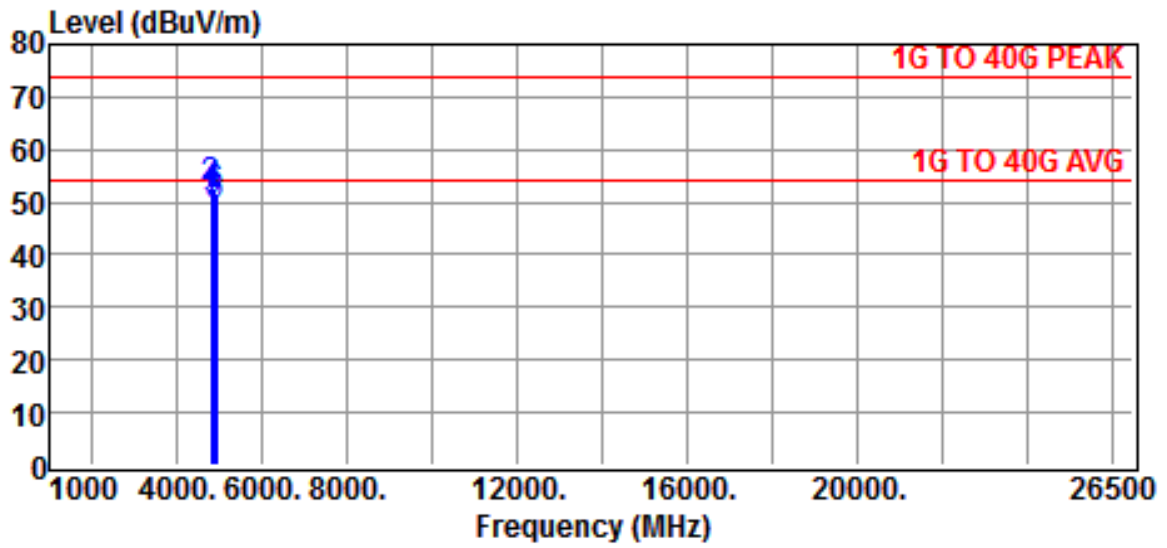


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11B Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	49.19	1.31	50.50	54.00	-3.50	Average
4824.0000	51.39	1.31	52.70	74.00	-21.30	Peak
4874.0000	48.63	1.47	50.10	54.00	-3.90	Average
4874.0000	50.73	1.47	52.20	74.00	-21.80	Peak
4924.0000	47.55	1.65	49.20	54.00	-4.80	Average
4924.0000	49.75	1.65	51.40	74.00	-22.60	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

**B. (802.11g)**

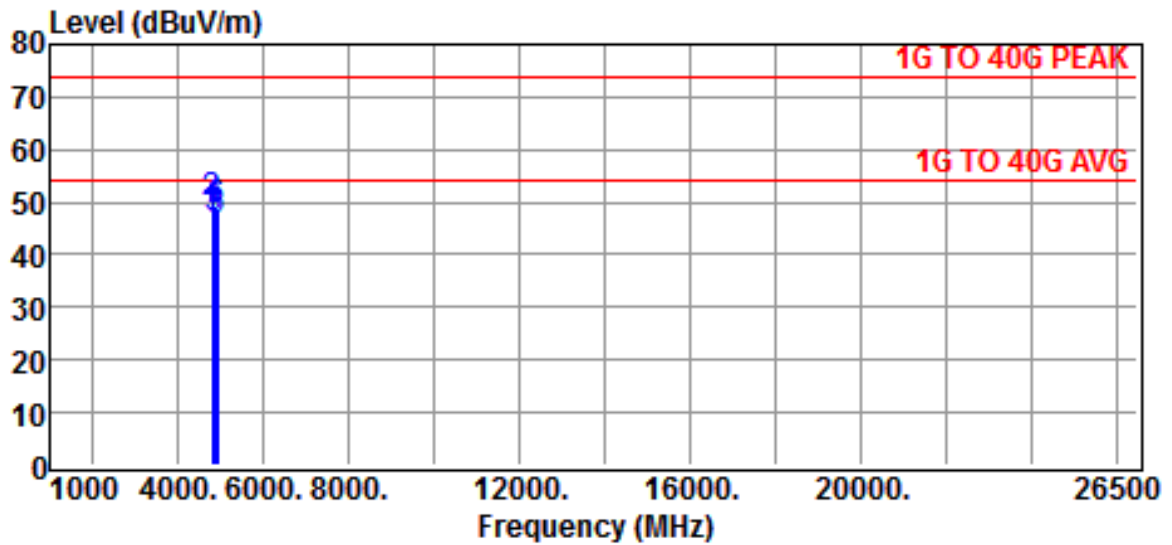


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11G Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	45.89	1.31	47.20	54.00	-6.80	Average
4824.0000	48.29	1.31	49.60	74.00	-24.40	Peak
4874.0000	45.33	1.47	46.80	54.00	-7.20	Average
4874.0000	47.63	1.47	49.10	74.00	-24.90	Peak
4924.0000	44.75	1.65	46.40	54.00	-7.60	Average
4924.0000	46.85	1.65	48.50	74.00	-25.50	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

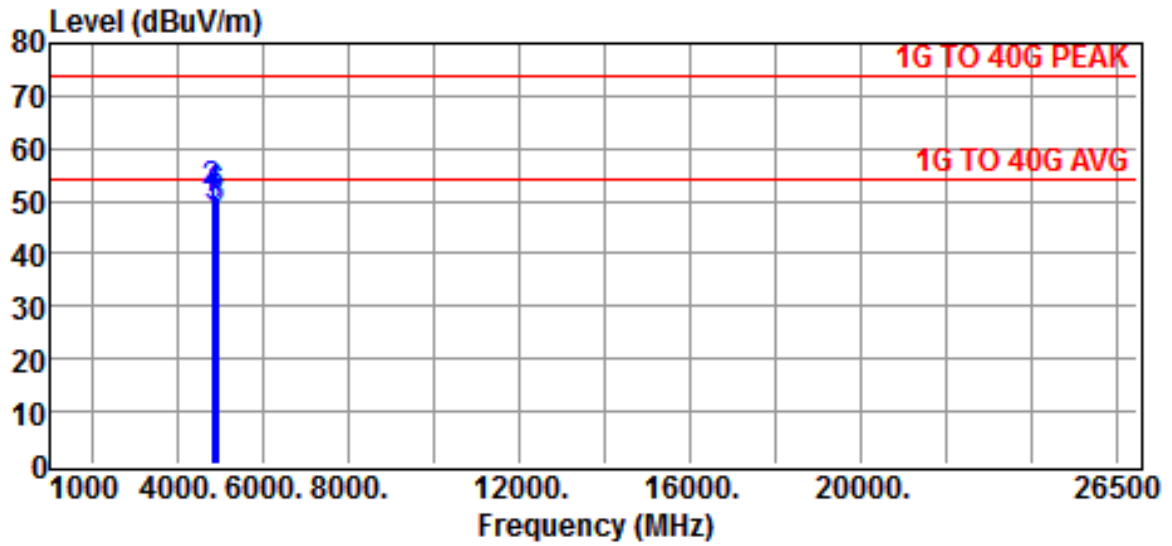


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11G Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	48.19	1.31	49.50	54.00	-4.50	Average
4824.0000	50.49	1.31	51.80	74.00	-22.20	Peak
4874.0000	47.63	1.47	49.10	54.00	-4.90	Average
4874.0000	49.83	1.47	51.30	74.00	-22.70	Peak
4924.0000	46.85	1.65	48.50	54.00	-5.50	Average
4924.0000	49.15	1.65	50.80	74.00	-23.20	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

**C. (802.11n HT-20)**

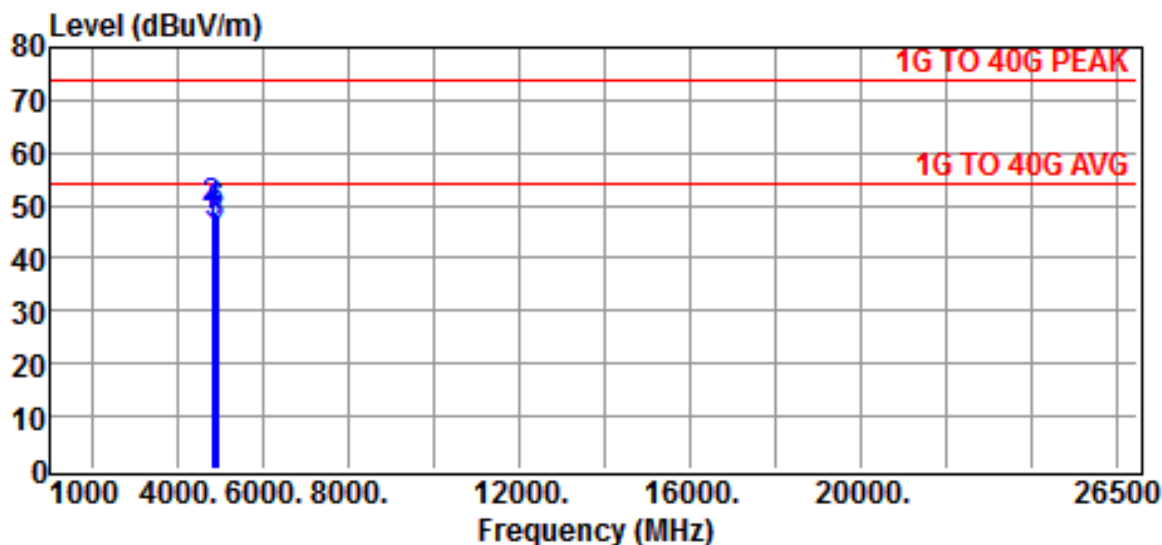


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N20 Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	45.69	1.31	47.00	54.00	-7.00	Average
4824.0000	48.19	1.31	49.50	74.00	-24.50	Peak
4874.0000	45.23	1.47	46.70	54.00	-7.30	Average
4874.0000	47.53	1.47	49.00	74.00	-25.00	Peak
4924.0000	44.55	1.65	46.20	54.00	-7.80	Average
4924.0000	46.75	1.65	48.40	74.00	-25.60	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

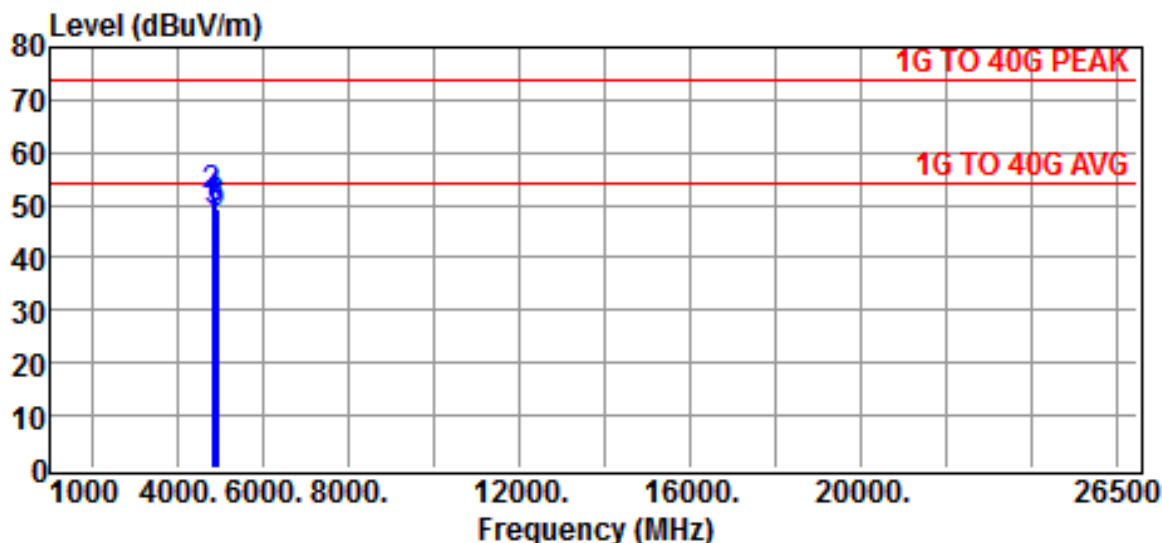


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N20 Mode		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	47.89	1.31	49.20	54.00	-4.80	Average
4824.0000	50.19	1.31	51.50	74.00	-22.50	Peak
4874.0000	47.33	1.47	48.80	54.00	-5.20	Average
4874.0000	49.53	1.47	51.00	74.00	-23.00	Peak
4924.0000	46.65	1.65	48.30	54.00	-5.70	Average
4924.0000	47.85	1.65	49.50	74.00	-24.50	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

**D. (802.11n HT-40)**

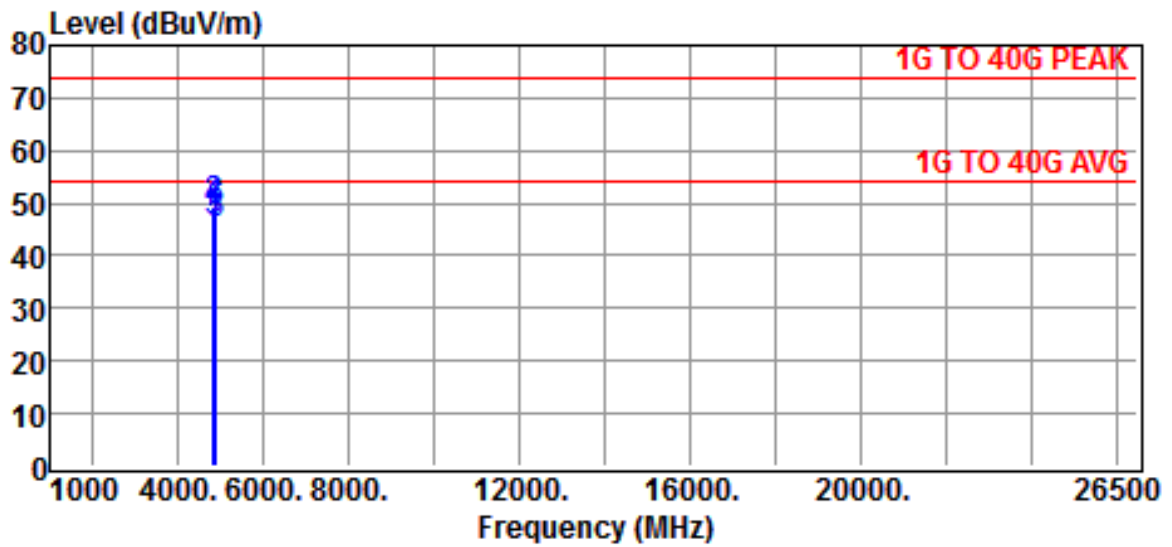


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N40 Mode		
Test Mode	:TX RX-LO 2422 - MI 2437 - HI 2452MHz		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4844.0000	45.63	1.37	47.00	54.00	-7.00	Average
4844.0000	47.93	1.37	49.30	74.00	-24.70	Peak
4874.0000	45.03	1.47	46.50	54.00	-7.50	Average
4874.0000	47.33	1.47	48.80	74.00	-25.20	Peak
4904.0000	44.61	1.59	46.20	54.00	-7.80	Average
4904.0000	46.81	1.59	48.40	74.00	-25.60	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

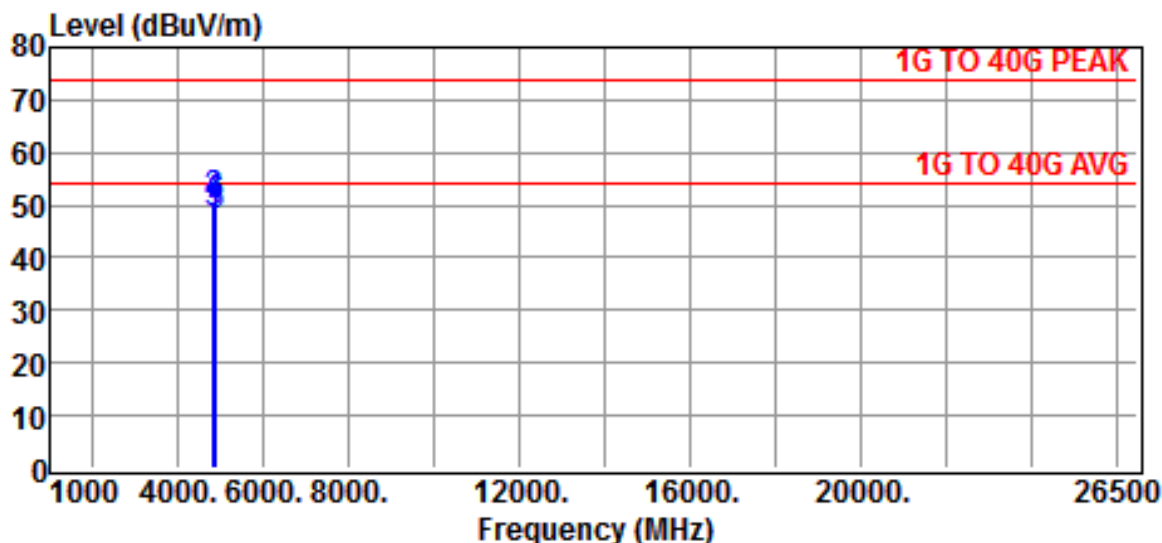

Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N40 Mode		
Test Mode	:TX RX-LO 2422 - MI 2437 - HI 2452MHz		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4844.0000	47.53	1.37	48.90	54.00	-5.10	Average
4844.0000	49.63	1.37	51.00	74.00	-23.00	Peak
4874.0000	46.73	1.47	48.20	54.00	-5.80	Average
4874.0000	48.93	1.47	50.40	74.00	-23.60	Peak
4904.0000	46.11	1.59	47.70	54.00	-6.30	Average
4904.0000	48.41	1.59	50.00	74.00	-24.00	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

### 4.4.2 Radiated Emission of Restricted bands

Mode: 802.11b

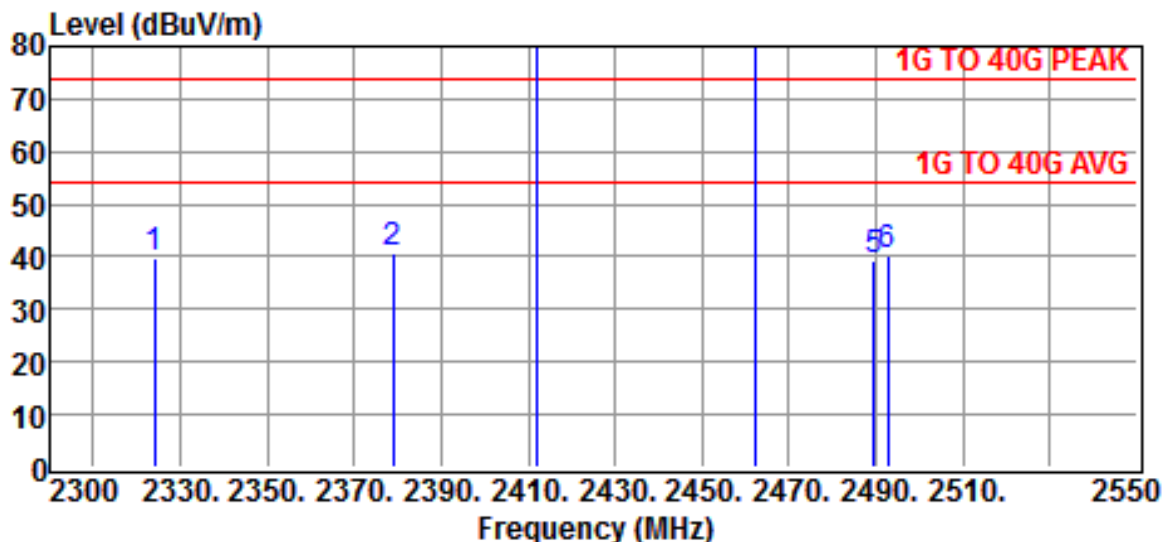


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11B Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2324.0000	45.59	-5.76	39.83	54.00	-14.17	Peak
2379.0000	46.31	-5.63	40.68	54.00	-13.32	Peak
2412.0000	110.85	-5.56	105.29	-	-	Peak
2462.0000	109.52	-5.45	104.07	-	-	Peak
2489.5000	44.78	-5.36	39.42	54.00	-14.58	Peak
2492.7500	45.68	-5.36	40.32	54.00	-13.68	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.



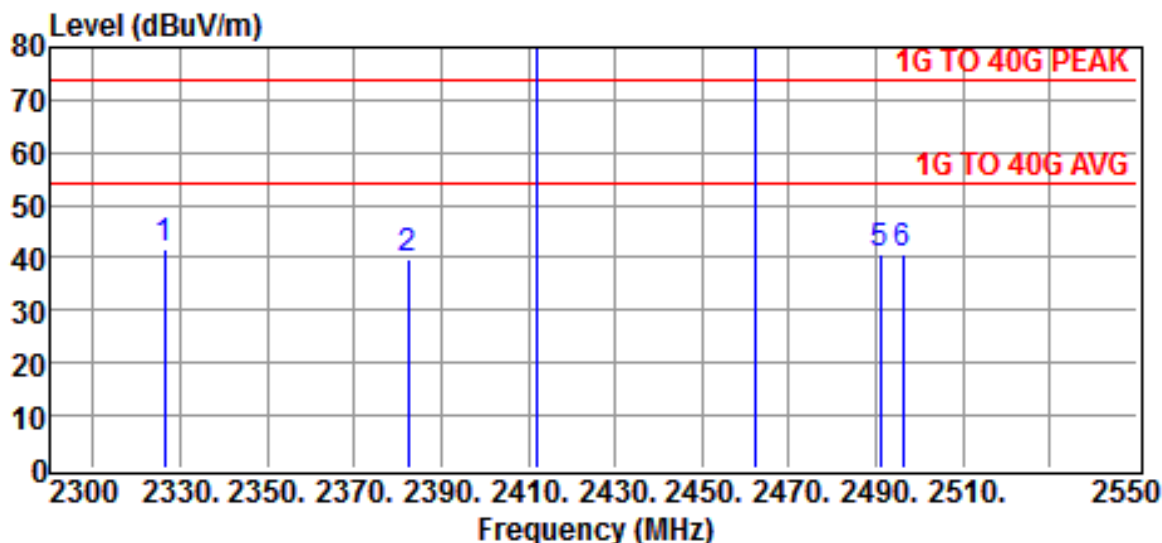


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11B Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2326.5000	47.52	-5.76	41.76	54.00	-12.24	Peak
2382.5000	45.51	-5.63	39.88	54.00	-14.12	Peak
2412.0000	115.59	-5.56	110.03	-	-	Peak
2462.0000	114.85	-5.45	109.40	-	-	Peak
2491.0000	46.26	-5.36	40.90	54.00	-13.10	Peak
2496.2500	46.12	-5.36	40.76	54.00	-13.24	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

**Mode: 802.11g**

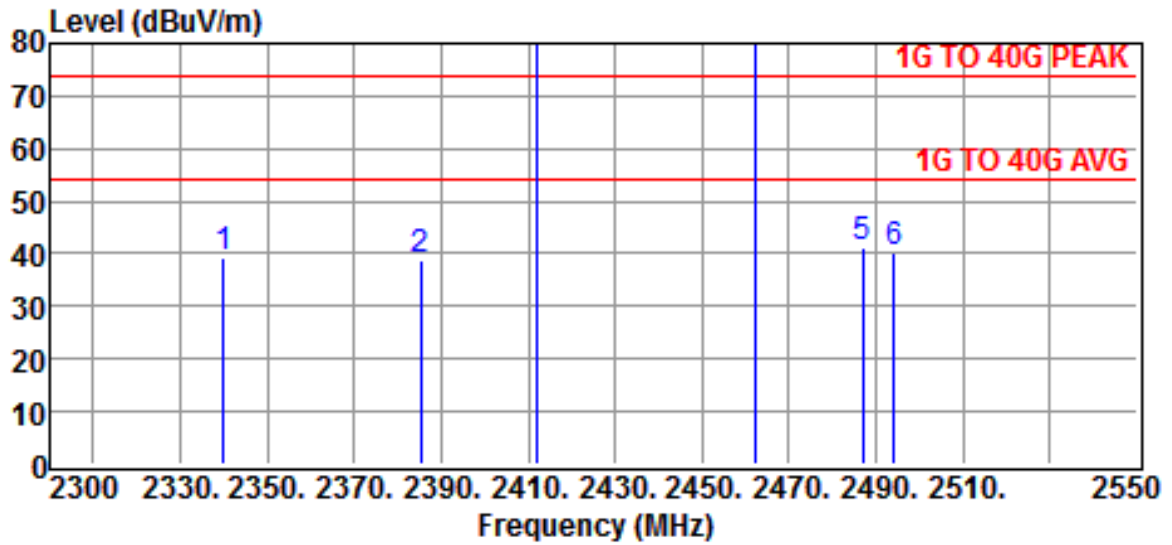


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11G Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2340.0000	45.06	-5.71	39.35	54.00	-14.65	Peak
2385.2500	44.55	-5.63	38.92	54.00	-15.08	Peak
2412.0000	107.85	-5.56	102.29	-	-	Peak
2462.0000	106.52	-5.45	101.07	-	-	Peak
2487.0000	46.69	-5.40	41.29	54.00	-12.71	Peak
2494.2500	45.45	-5.36	40.09	54.00	-13.91	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

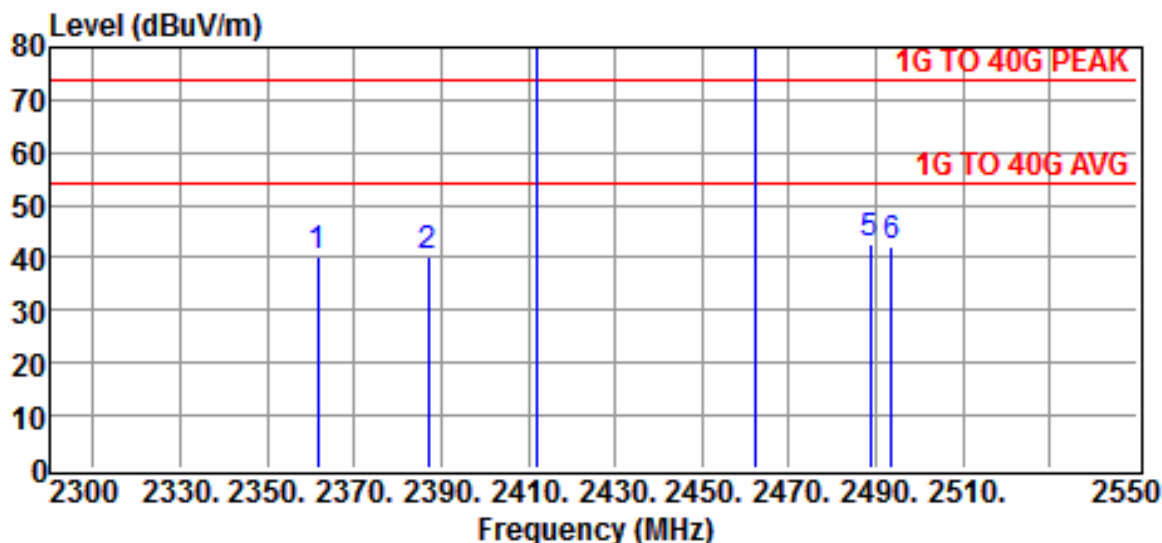


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11G Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2361.7500	45.80	-5.67	40.13	54.00	-13.87	Peak
2387.0000	45.62	-5.60	40.02	54.00	-13.98	Peak
2412.0000	107.85	-5.56	102.29	-	-	Peak
2462.0000	106.52	-5.45	101.07	-	-	Peak
2488.7500	47.91	-5.36	42.55	54.00	-11.45	Peak
2493.5000	47.66	-5.36	42.30	54.00	-11.70	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

**Mode: 802.11n HT-20**

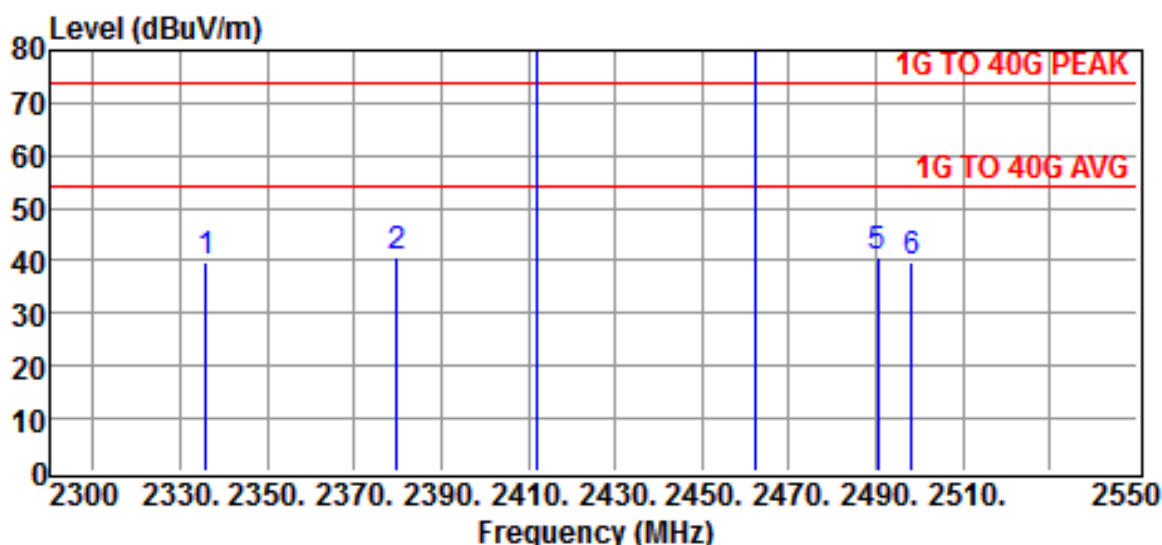


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N20 Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2336.0000	45.43	-5.71	39.72	54.00	-14.28	Peak
2379.7500	46.25	-5.63	40.62	54.00	-13.38	Peak
2412.0000	107.32	-5.56	101.76	-	-	Peak
2462.0000	106.12	-5.45	100.67	-	-	Peak
2490.2500	46.32	-5.36	40.96	54.00	-13.04	Peak
2498.2500	45.29	-5.36	39.93	54.00	-14.07	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

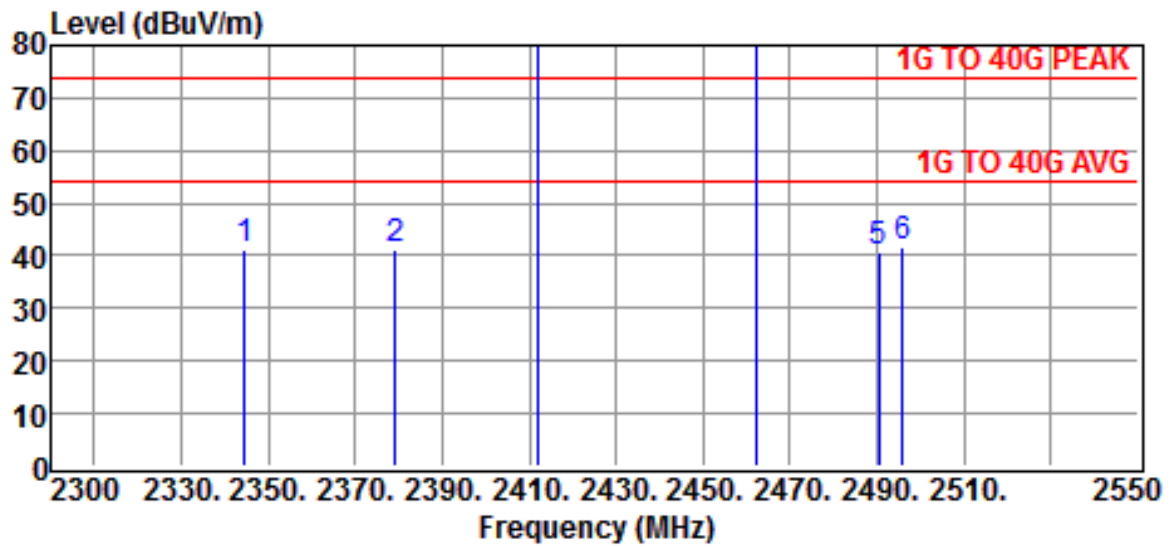


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N20 Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2344.5000	46.76	-5.71	41.05	54.00	-12.95	Peak
2379.2500	46.80	-5.63	41.17	54.00	-12.83	Peak
2412.0000	112.15	-5.56	106.59	-	-	Peak
2462.0000	111.31	-5.45	105.86	-	-	Peak
2490.2500	46.32	-5.36	40.96	54.00	-13.04	Peak
2496.0000	46.99	-5.36	41.63	54.00	-12.37	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

**Mode: 802.11n HT-40**

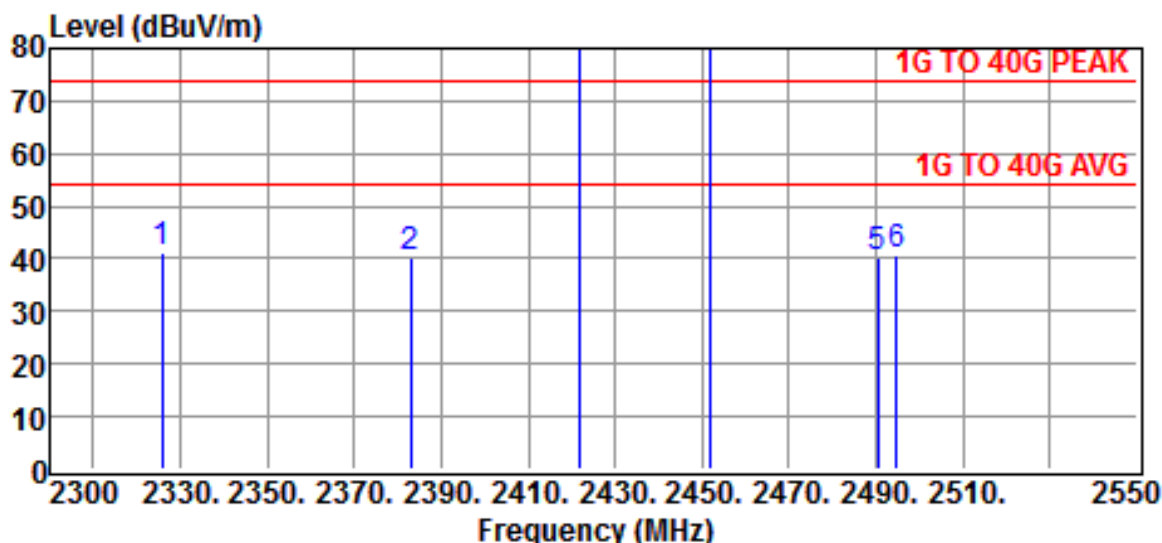


Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N40 Mode		
Test Mode	:OPERATION MODE		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2325.7500	47.14	-5.76	41.38	54.00	-12.62	Peak
2383.0000	45.71	-5.63	40.08	54.00	-13.92	Peak
2422.0000	106.45	-5.52	100.93	-	-	Peak
2452.0000	105.22	-5.48	99.74	-	-	Peak
2490.2500	45.76	-5.36	40.40	54.00	-13.60	Peak
2494.7500	46.10	-5.36	40.74	54.00	-13.26	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

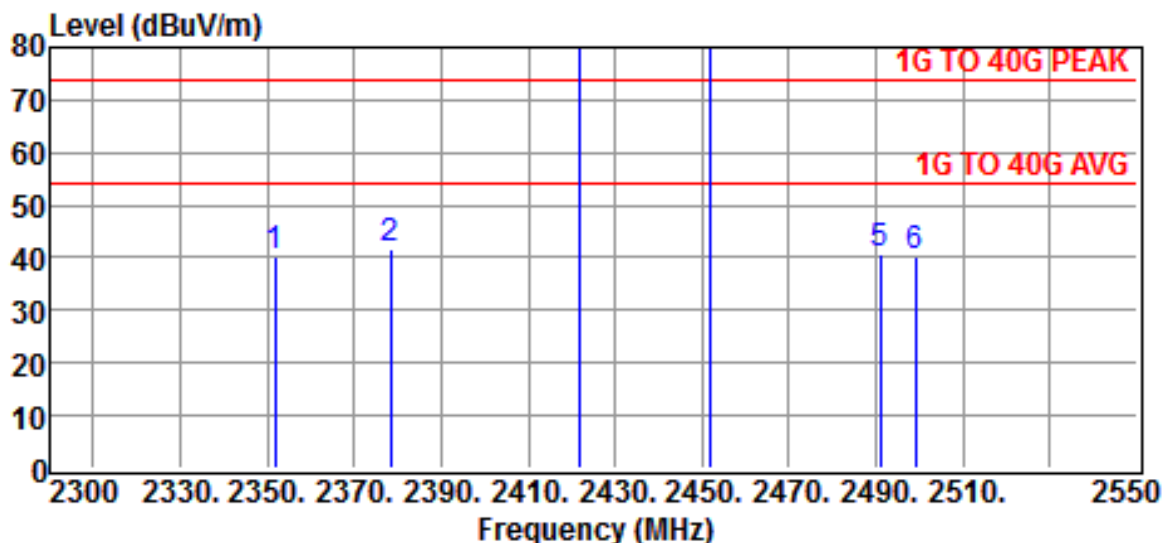

Site	:Chamber #2	Date	:2017-08-02
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:802.11N40 Mode		
Test Mode	:OPERATION MODE		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2351.7500	45.77	-5.67	40.10	54.00	-13.90	Peak
2378.5000	47.51	-5.63	41.88	54.00	-12.12	Peak
2422.0000	111.62	-5.52	106.10	-	-	Peak
2452.0000	110.57	-5.48	105.09	-	-	Peak
2491.0000	46.13	-5.36	40.77	54.00	-13.23	Peak
2499.0000	45.54	-5.36	40.18	54.00	-13.82	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.3 Other Emission

a) Emission frequencies below 1 GHz

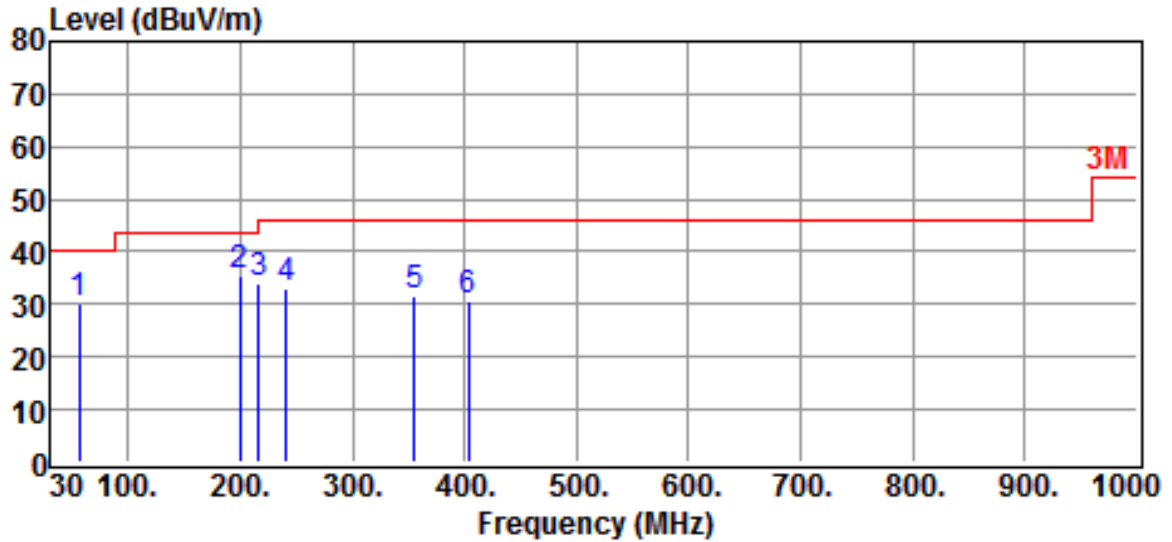


Site	:Chamber #2	Date	:2017-08-03
Limit	:3M	Ant. Pol.	:HORIZONTAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:Operation		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
56.1900	42.91	-12.52	30.39	40.00	-9.61	QP
199.7500	43.83	-8.16	35.67	43.50	-7.83	QP
216.2400	41.64	-7.40	34.24	46.00	-11.76	QP
241.4600	39.32	-6.26	33.06	46.00	-12.94	QP
354.9500	33.83	-2.44	31.39	46.00	-14.61	QP
403.4500	32.13	-1.40	30.73	46.00	-15.27	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result



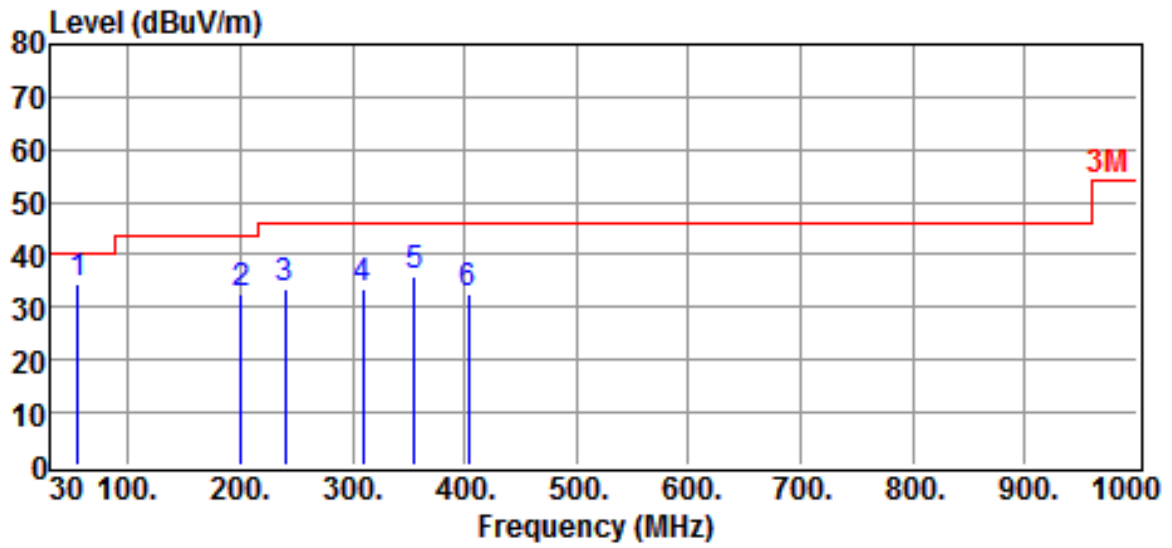

Site	:Chamber #2	Date	:2017-08-03
Limit	:3M	Ant. Pol.	:VERTICAL
EUT	:5372 miniPCie card	Model	:5372
Power Rating	:DC 5V from USB	Temp.	:25 °C
Engineer	:Brian Huang	Humi.	:65 %
Test Mode	:Operation		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
55.2200	46.58	-12.29	34.29	40.00	-5.71	QP
200.7200	40.68	-8.02	32.66	43.50	-10.84	QP
239.5200	40.12	-6.52	33.60	46.00	-12.40	QP
309.3600	36.62	-3.27	33.35	46.00	-12.65	QP
354.9500	38.30	-2.44	35.86	46.00	-10.14	QP
403.4500	33.91	-1.40	32.51	46.00	-13.49	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

**b) Emission frequencies Above 1GHz**

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

**c) Emission frequencies below 30MHz (9kHz - 30MHz)**

According to exploratory test no any obvious emissions were detected from 9 kHz to 30MHz. All emissions were greater than 20 dB below the limit. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:



$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where


$$\text{Corrected Factor} = \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

## 4.6 Photos of Radiation Measuring Setup

(Below 1GHz)

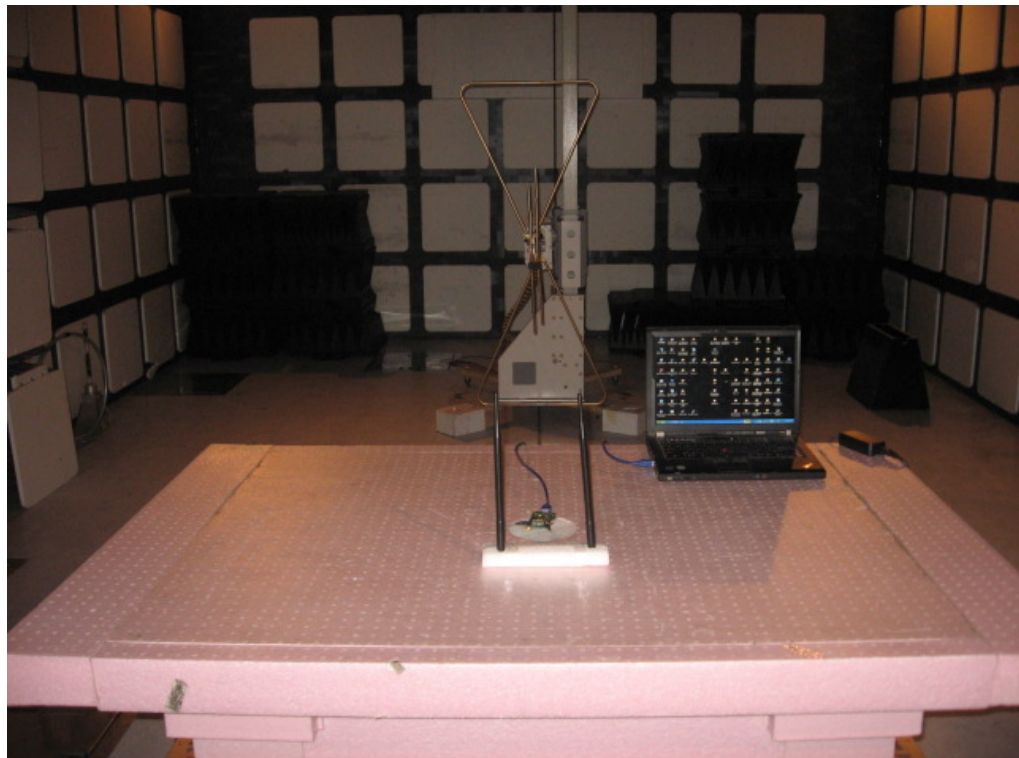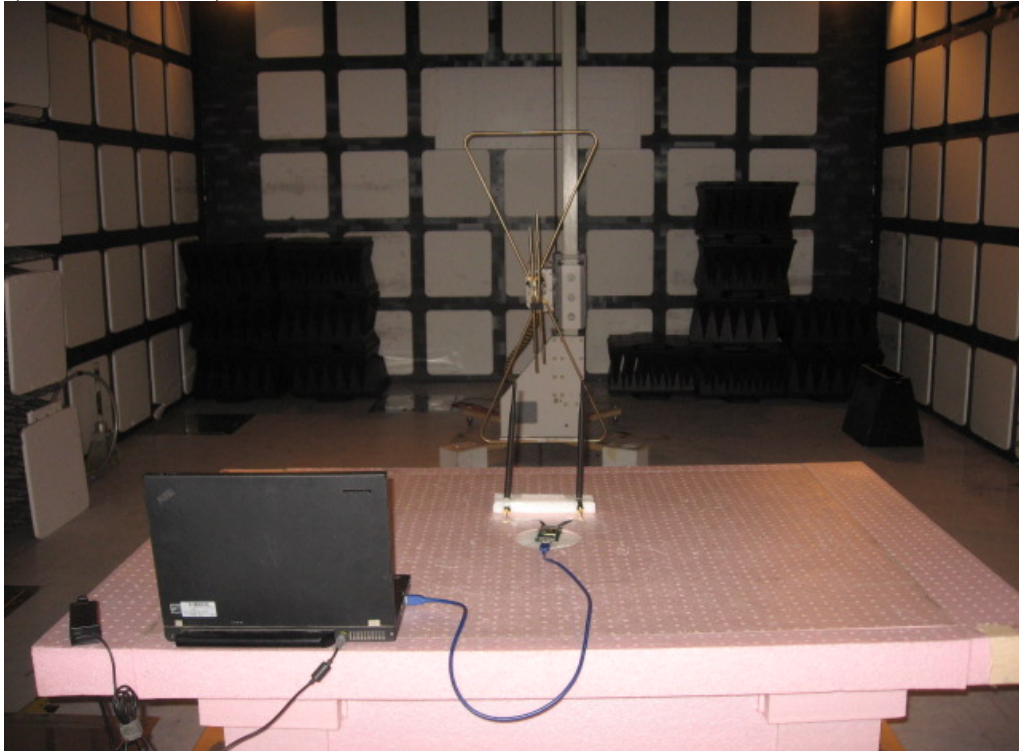

(Above 1GHz)

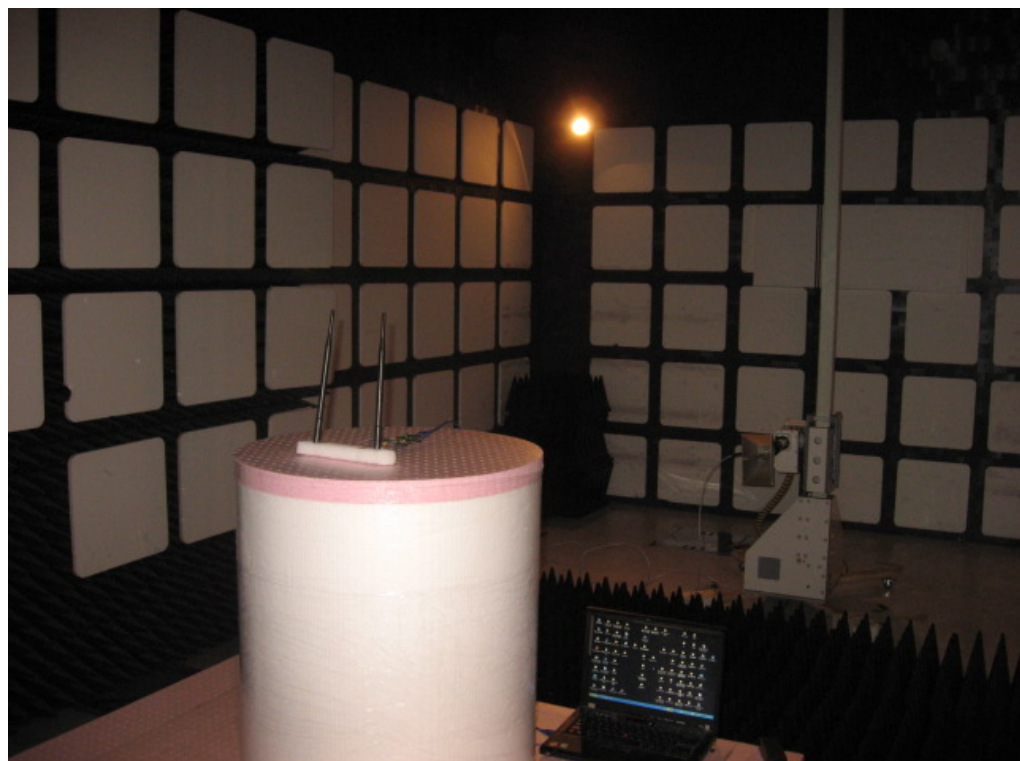

## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.


### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

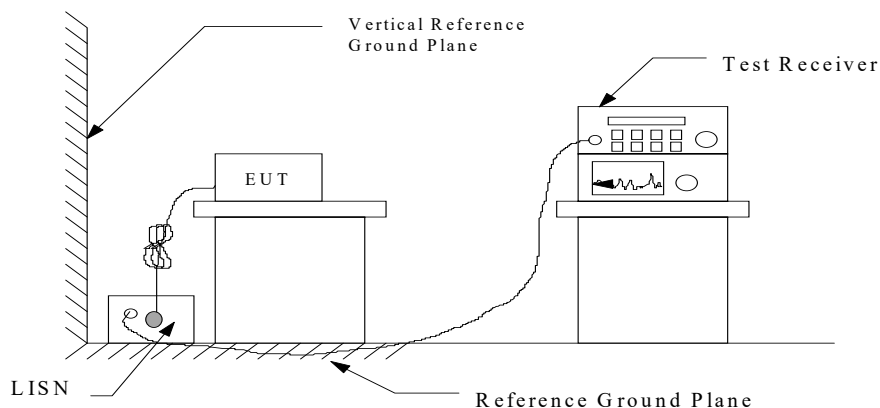

### 5.3 Conducted Emission Data

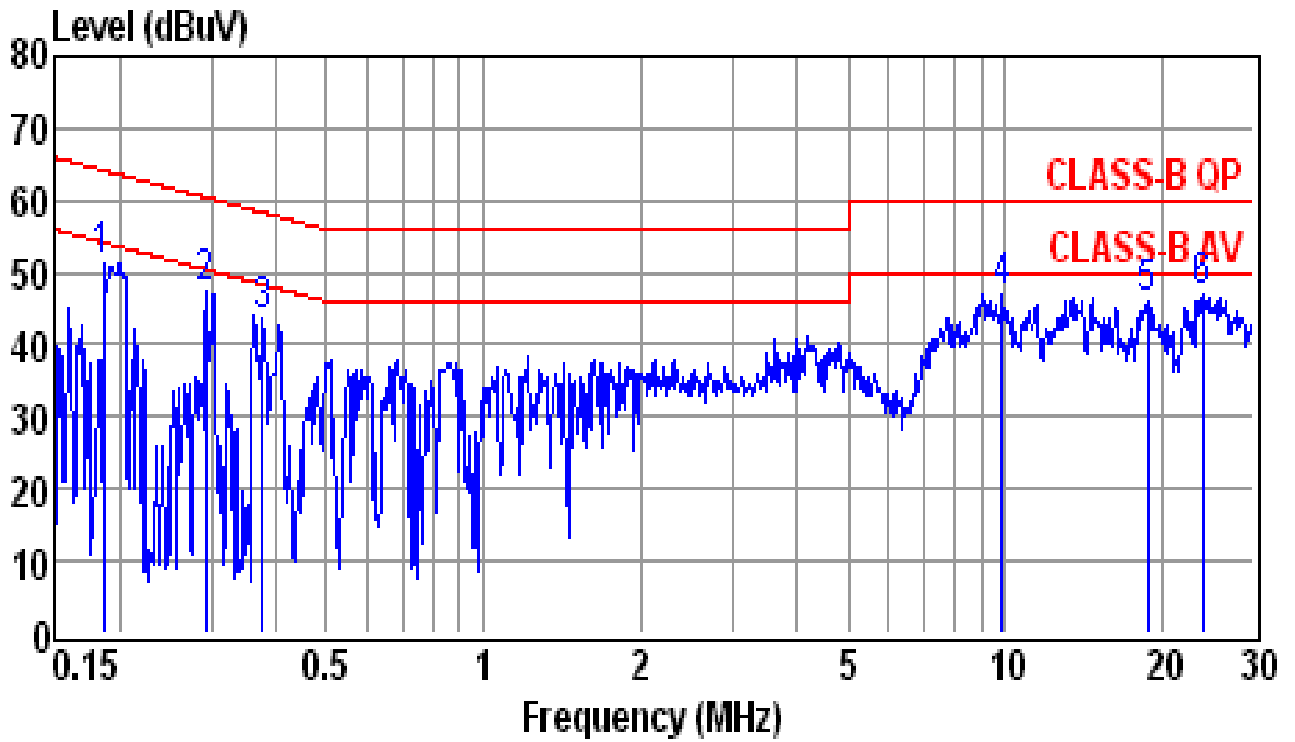


Site : conducted #1 Date : 08-03-2017  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 65% Test Mode : WIFI  
 EUT : 5372 miniPCie card  
 Power Rating : 120Vac 60Hz (Power to Notebook PC)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1864	41.24	10.17	51.41	64.20	-12.79	QP
0.2940	37.19	10.18	47.37	60.41	-13.04	QP
0.3771	33.35	10.19	43.54	58.34	-14.80	QP
9.8610	36.47	10.60	47.07	60.00	-12.93	QP
18.8200	35.03	11.10	46.13	60.00	-13.87	QP
24.0150	35.62	11.13	46.75	60.00	-13.25	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

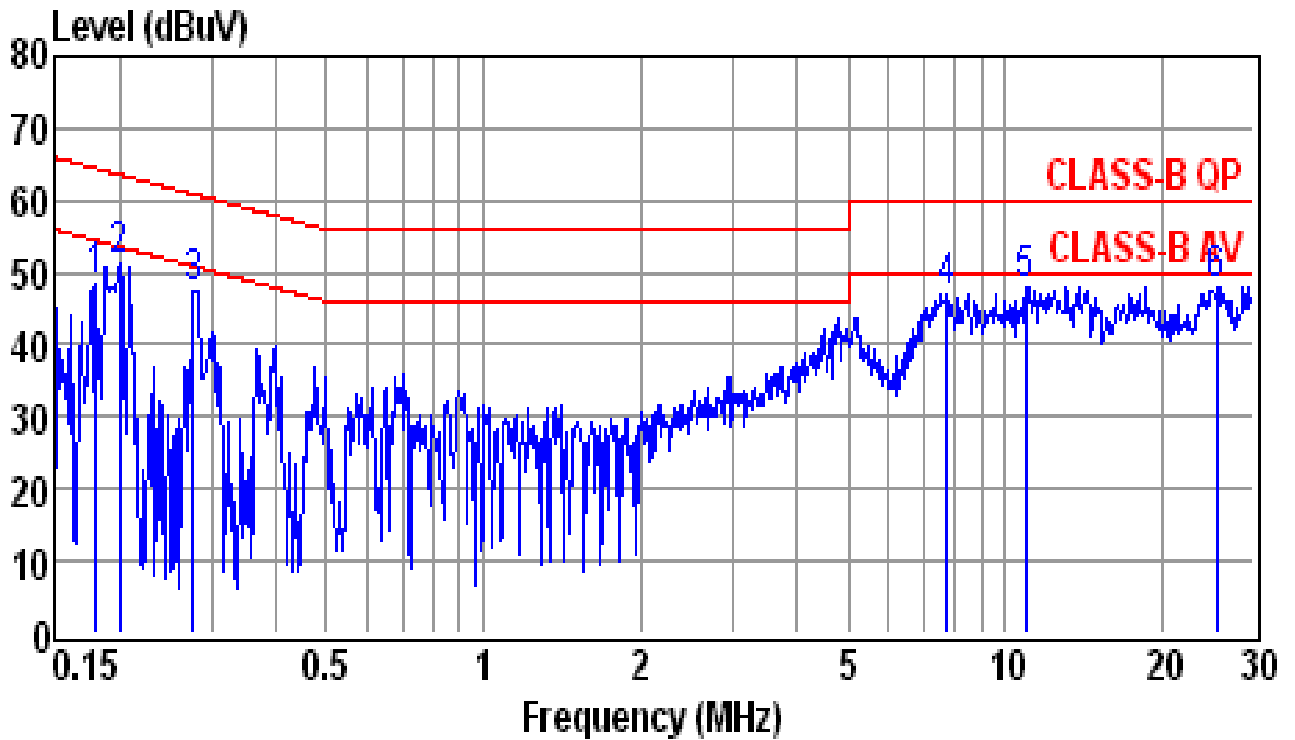

Site : conducted #1 Date : 08-03-2017  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 65% Test Mode : WIFI  
 EUT : 5372 miniPCie card  
 Power Rating : 120Vac 60Hz (Power to Notebook PC)

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1806	38.28	10.18	48.46	64.46	-16.00	QP
0.2008	41.04	10.18	51.22	63.58	-12.36	QP
0.2773	37.39	10.18	47.57	60.90	-13.33	QP
7.7280	36.47	10.55	47.02	60.00	-12.98	QP
10.9630	37.01	10.72	47.73	60.00	-12.27	QP
25.4560	36.46	11.42	47.88	60.00	-12.12	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$RESULT = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2016/12/05	2017/12/05
LISN	Rohde & Schwarz	ESH2-Z5	2017/04/01	2018/03/31



## 5.6 Photos of Conduction Measuring Setup



## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **6.2 Antenna Construction and Directional Gain**

The following antenna are used.

Antenna 1: AN2400-6001RS (7dBi)

Antenna 2: AN2400-5002BRS (5dBi)

Antenna 3: AN2400-3901BRS (2dBi)

The greatest antenna gain is 7 dBi which is 1dB greater than 6 dBi. Hence the output power shall be reduced by 1 dB.

Please see internal photos and the antenna specifications.

## 7 EMISSION BANDWIDTH MEASUREMENT


### 7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
  - 1) Set RBW = 100 kHz.
  - 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - 3) Detector = Peak.
  - 4) Trace mode = max hold.
  - 5) Sweep = auto couple.
  - 6) Allow the trace to stabilize.
  - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

## 7.4 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

### A. 802.11b @1 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 9.04 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 9.04 MHz
- c) Channel High: 6 dB Emission Bandwidth is 9.04 MHz

### B. 802.11g @6 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 16.32 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 16.32 MHz
- c) Channel High: 6 dB Emission Bandwidth is 16.32 MHz

### C. 802.11n HT-20 @6.5 Mbps

ANT 0

- a) Channel Low: 6 dB Emission Bandwidth is 17.36 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.36 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.36 MHz

ANT 1

- a) Channel Low: 6 dB Emission Bandwidth is 17.36 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.36 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.36 MHz

### D. 802.11n HT-40 @13.5 Mbps

ANT 0

- a) Channel Low: 6 dB Emission Bandwidth is 35.4 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 35.4 MHz
- c) Channel High: 6 dB Emission Bandwidth is 35.4 MHz

ANT 1

- a) Channel Low: 6 dB Emission Bandwidth is 35.4 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 35.4 MHz
- c) Channel High: 6 dB Emission Bandwidth is 35.4 MHz

**Note :** *The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).*

### 802.11b / Channel Low




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz -2.58 dB  
SWT 5 ms 9.040000000 MHz

Ref 20 dBm

Att 40 dB

1 PK  
VIEW

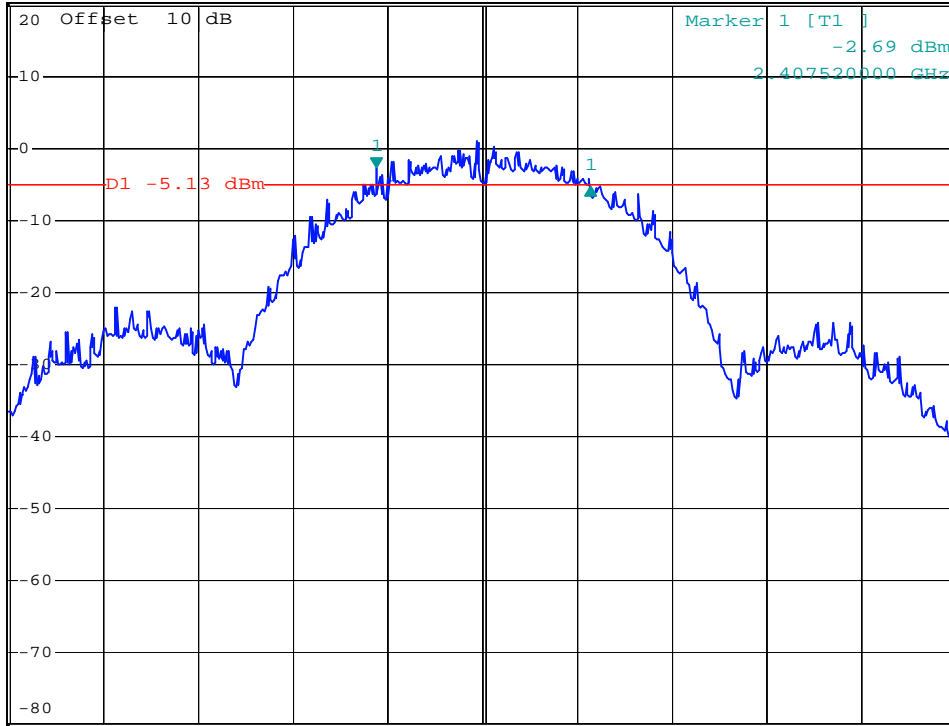

### 802.11b / Channel Mid




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz 0.44 dB  
SWT 5 ms 9.040000000 MHz

Ref 20 dBm

Att 40 dB

1 PK  
VIEW

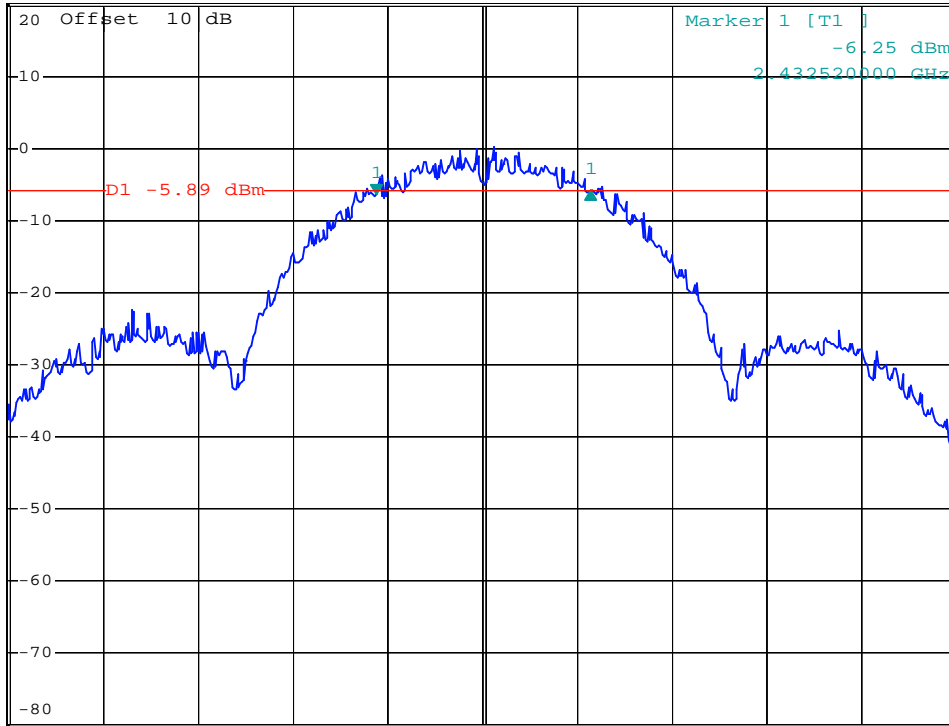

Center 2.437 GHz


4 MHz/

Span 40 MHz

### 802.11b / Channel High



\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz -1.45 dB  
SWT 5 ms 9.040000000 MHz

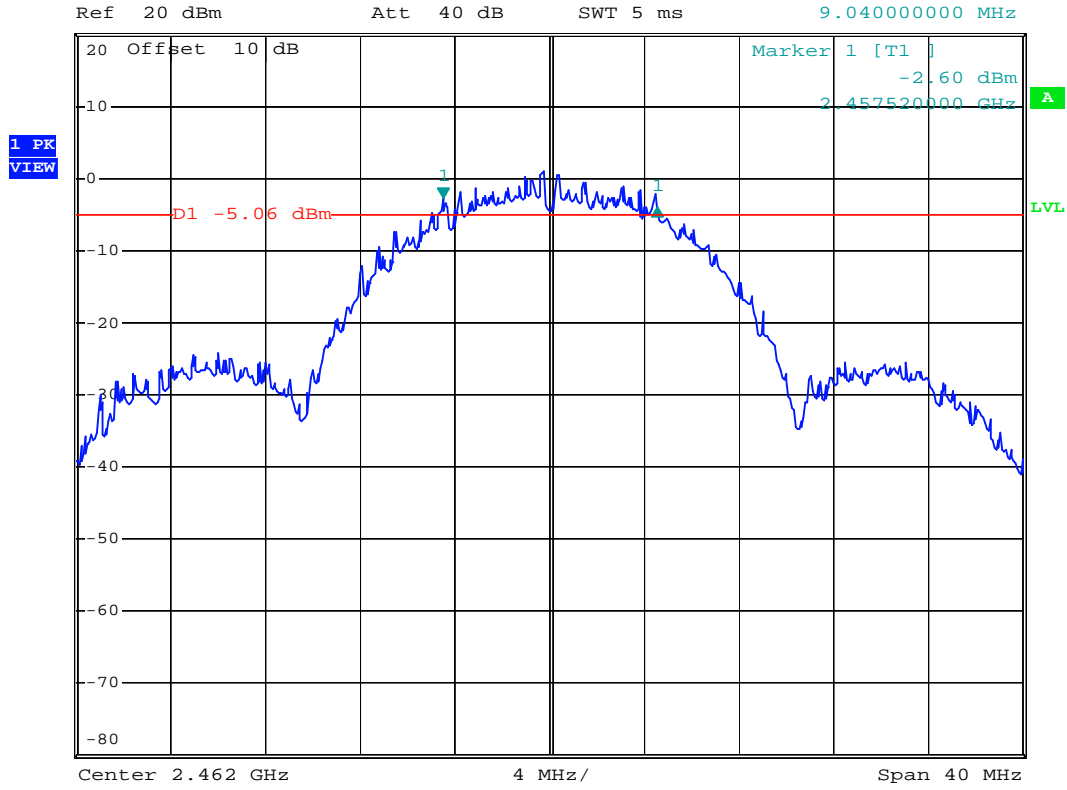

### 802.11g / Channel Low




\*RBW 100 kHz Delta 1 [T1 ]  
VEW 300 kHz 1.37 dB  
SWT 5 ms 16.32000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

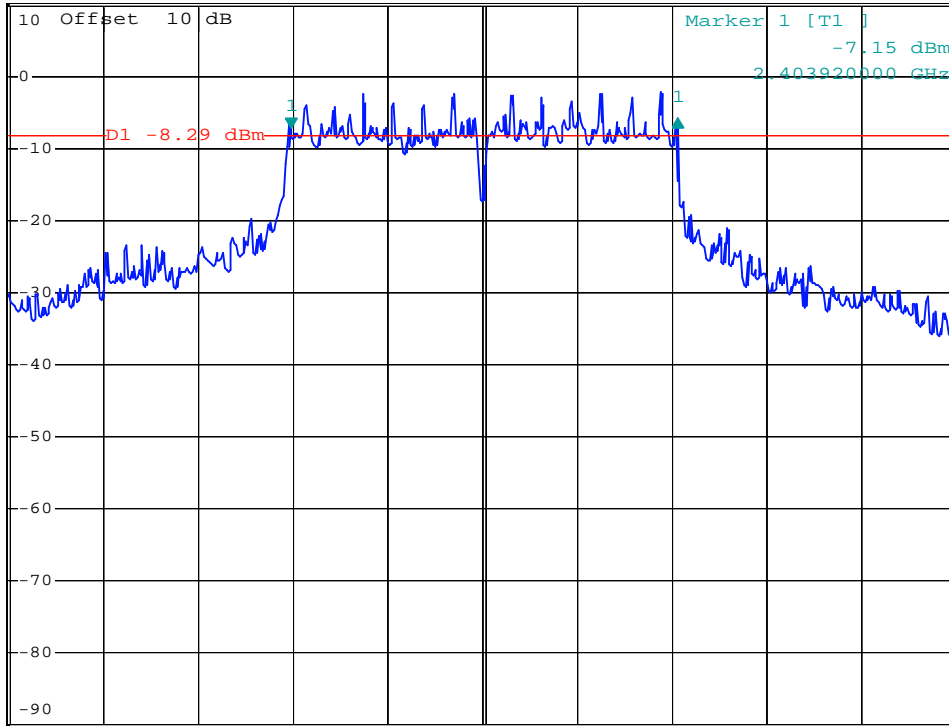

Center 2.412 GHz

4 MHz/

Span 40 MHz



### 802.11g / Channel Mid




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz 0.20 dB  
SWT 5 ms 16.320000000 MHz

Ref 10 dBm

Att 30 dB


1 PK  
VIEW

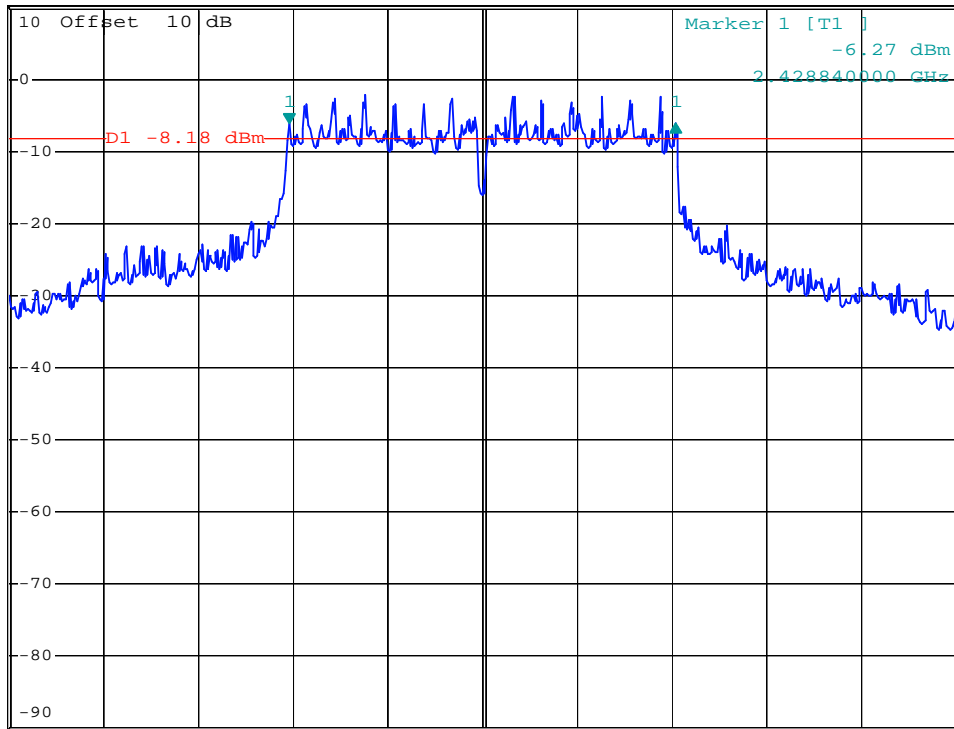


### 802.11g / Channel High



\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz 0.22 dB  
SWT 5 ms 16.320000000 MHz

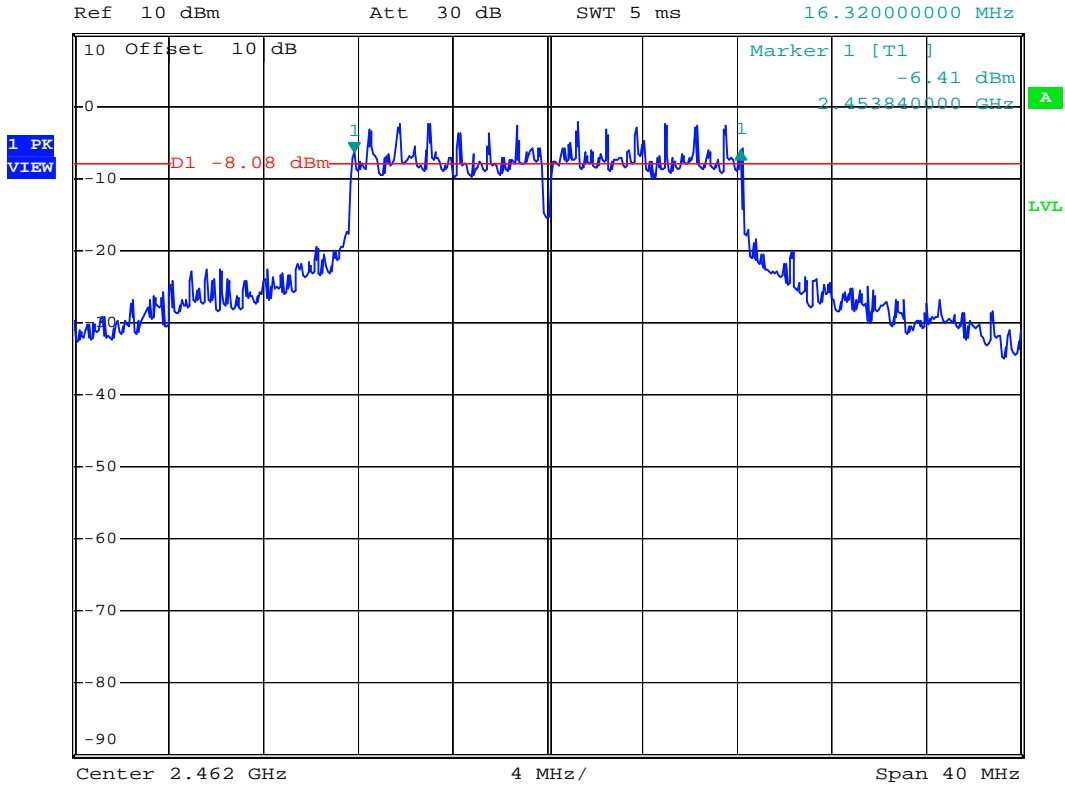

### 802.11n HT-20/ Channel Low (ANT 0)

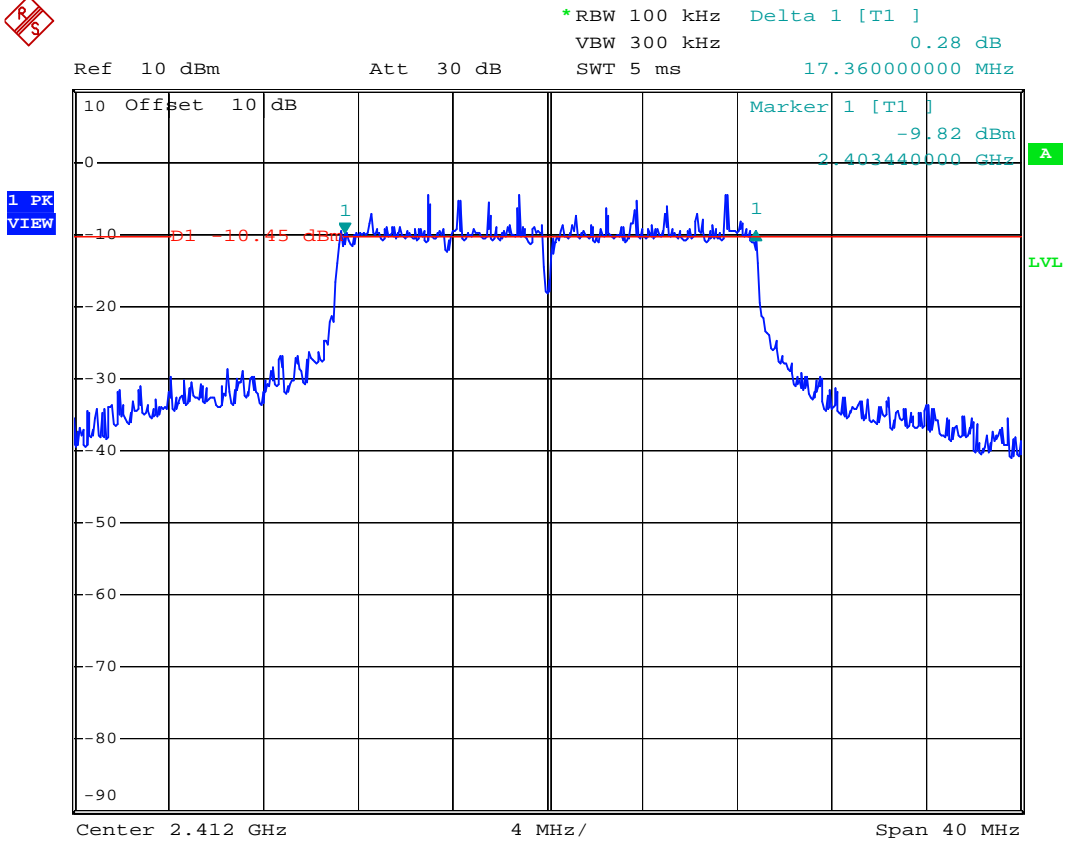

### 802.11n HT-20/ Channel Mid (ANT 0)




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz -0.23 dB  
SWT 5 ms 17.360000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

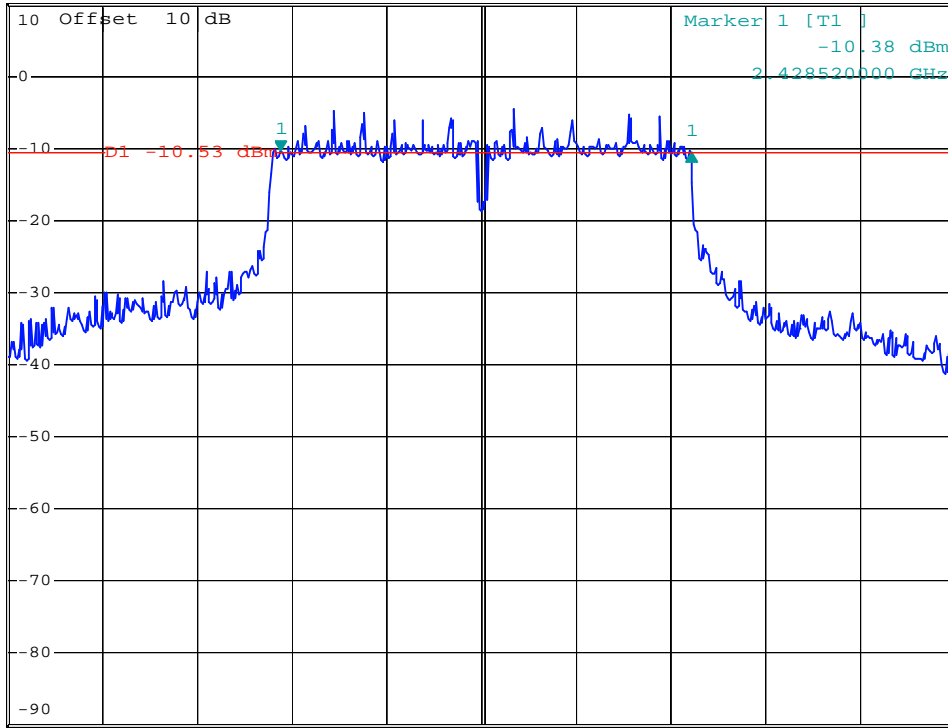

Center 2.437 GHz

4 MHz/

Span 40 MHz

### 802.11n HT-20/ Channel High (ANT 0)




\*RBW 100 kHz    Delta 1 [T1 ]  
VBW 300 kHz                    0.99 dB  
SWT 5 ms                        17.360000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

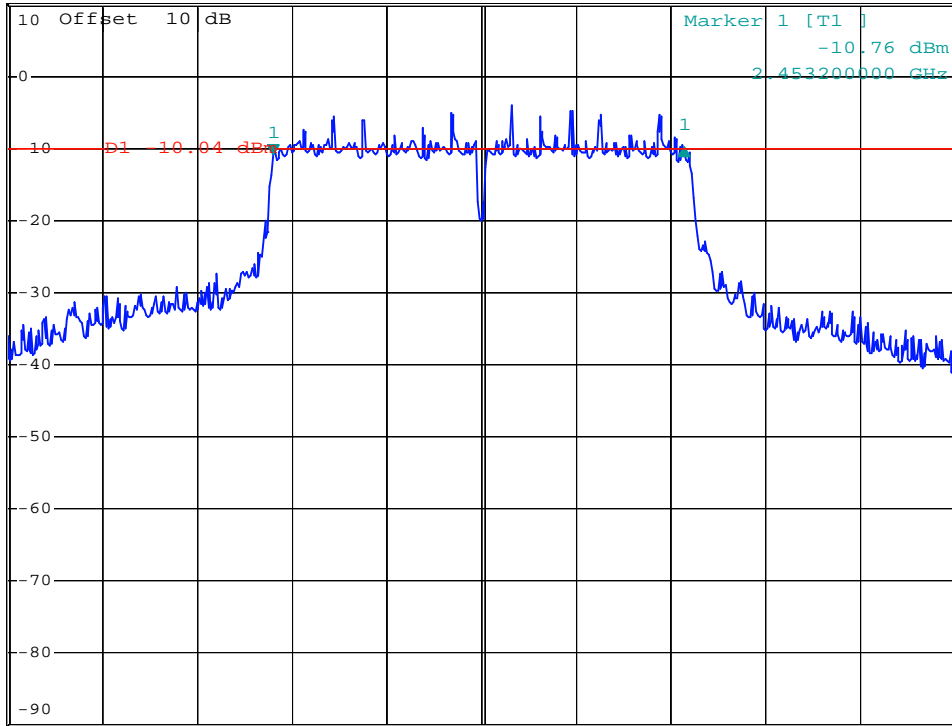

### 802.11n HT-20/ Channel Low (ANT 1)




\*RBW 100 kHz    Delta 1 [T1 ]  
VBW 300 kHz                    0.40 dB  
SWT 5 ms                        17.360000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

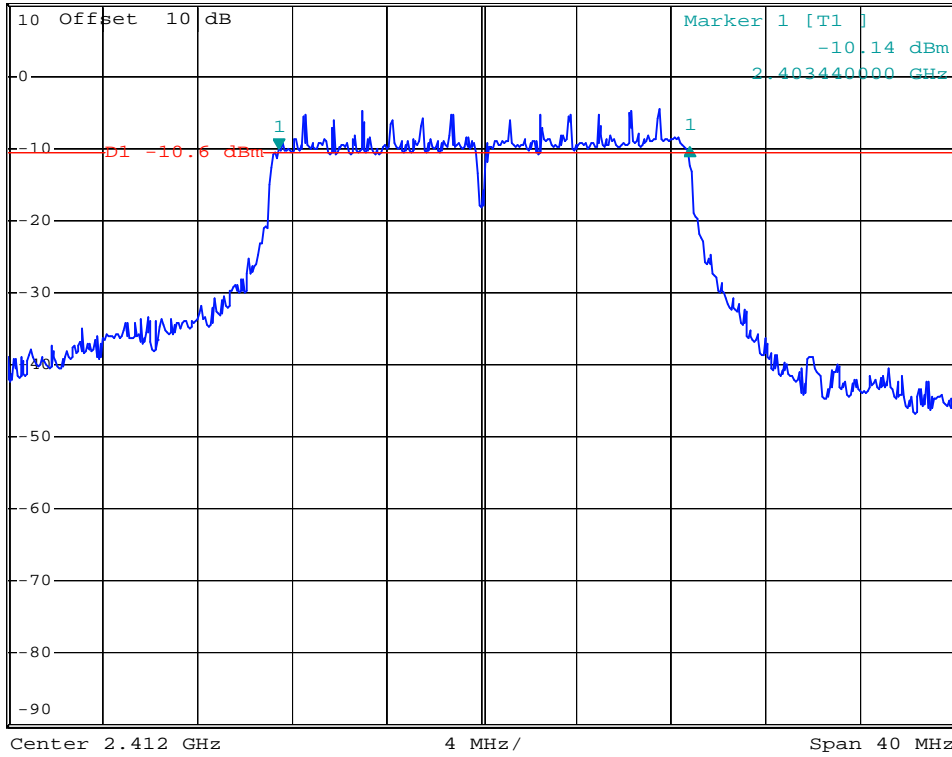

### 802.11n HT-20/ Channel Mid (ANT 1)




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz 0.82 dB  
SWT 5 ms 17.360000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

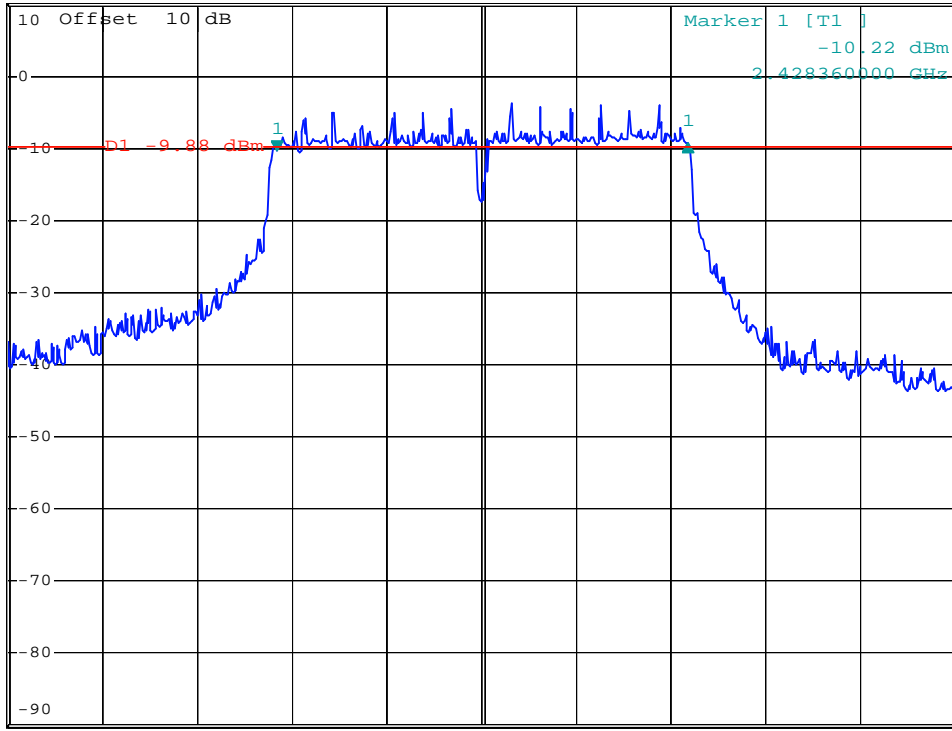

### 802.11n HT-20/ Channel High (ANT 1)




\*RBW 100 kHz    Delta 1 [T1 ]  
VBW 300 kHz                    -0.50 dB  
SWT 5 ms                            17.360000000 MHz

Ref 10 dBm


Att 30 dB

1 PK  
VIEW

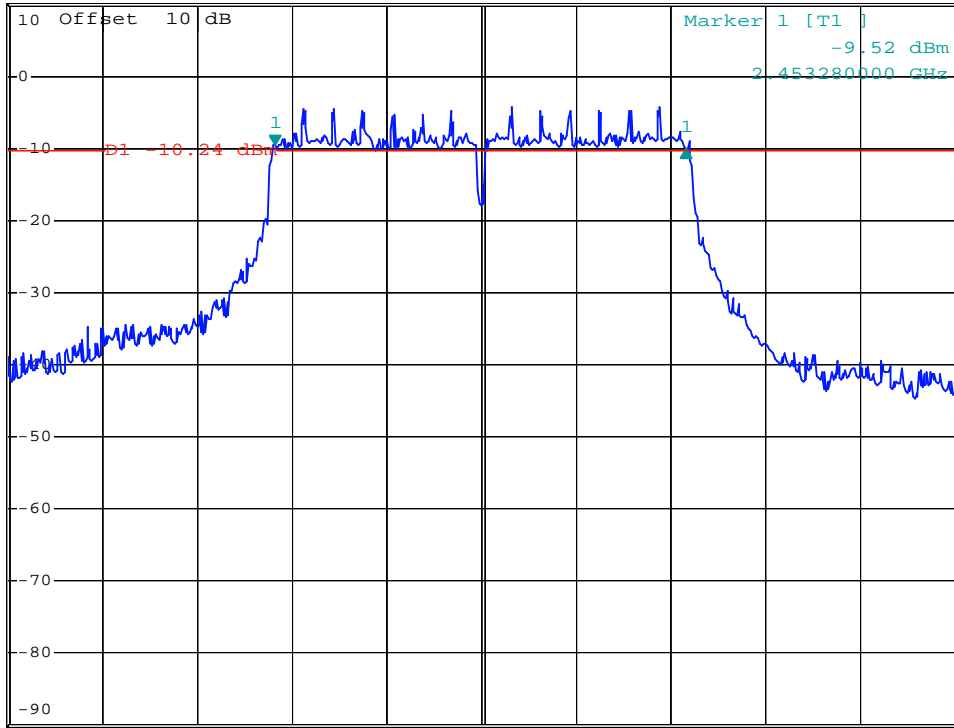





### 802.11n HT-40/ Channel Low (ANT 0)

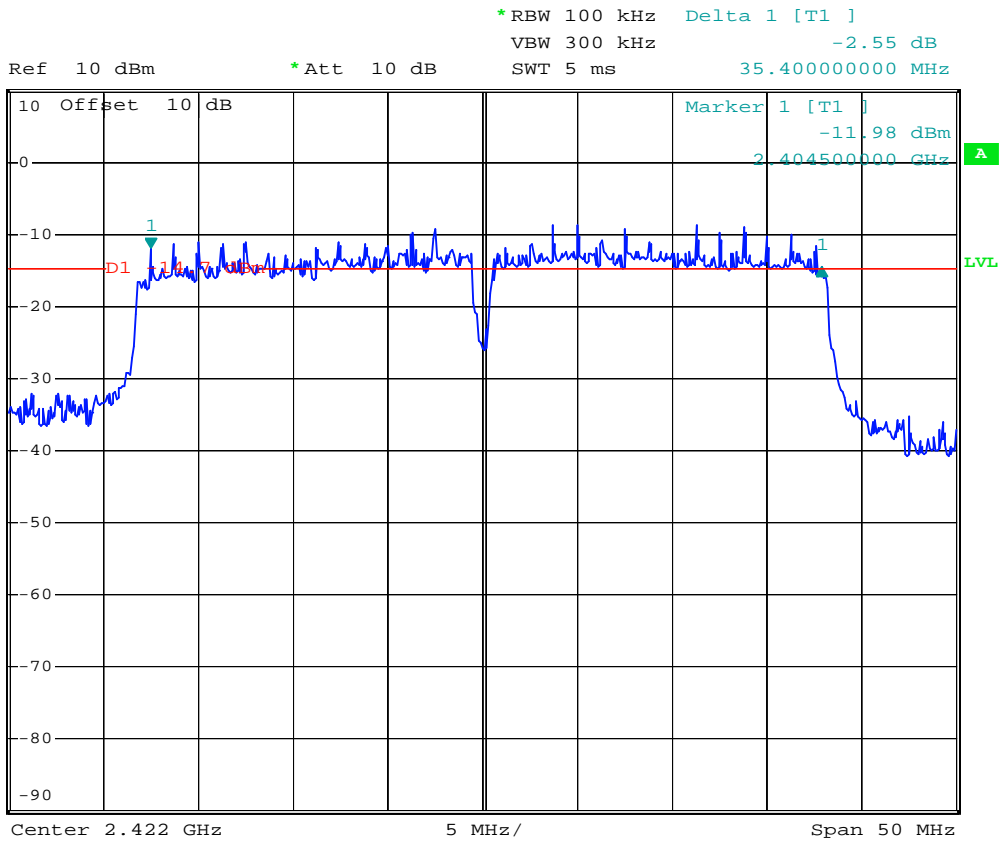

### 802.11n HT-40/ Channel Mid (ANT 0)

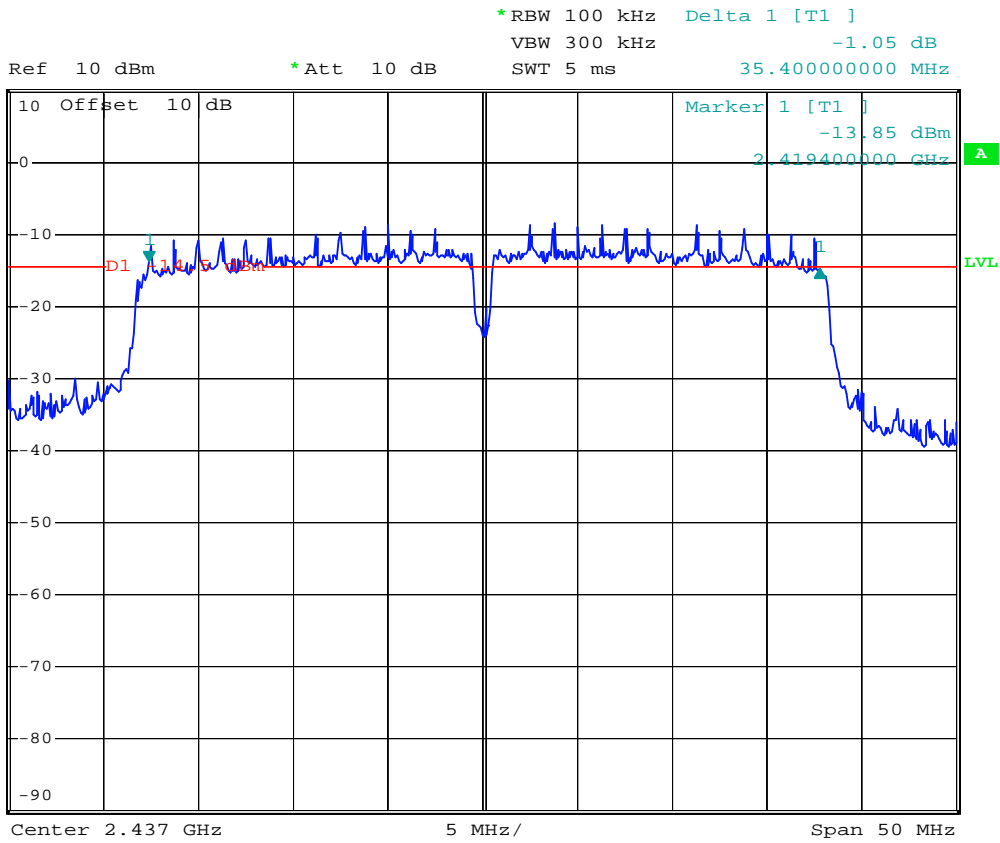

### 802.11n HT-40/ Channel High (ANT 0)

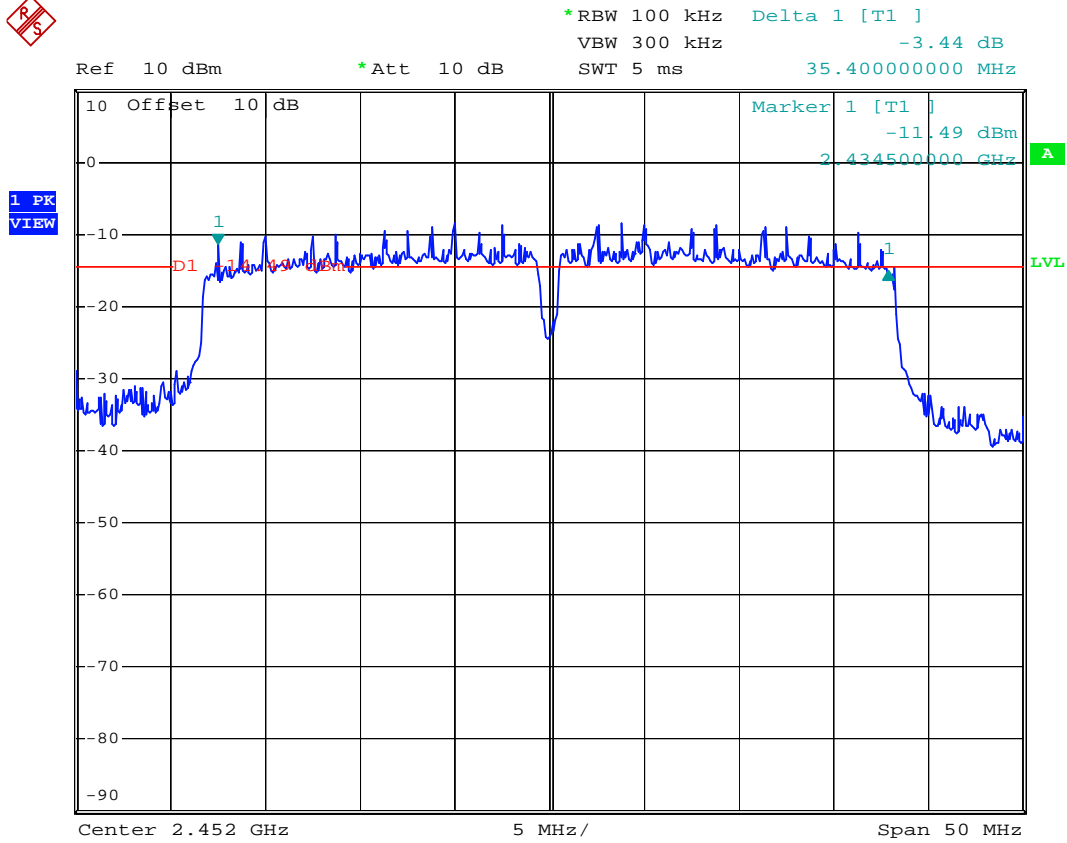

### 802.11n HT-40/ Channel Low (ANT 1)




\*RBW 100 kHz    Delta 1 [T1 ]  
VBW 300 kHz                    0.90 dB  
SWT 5 ms                        35.40000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

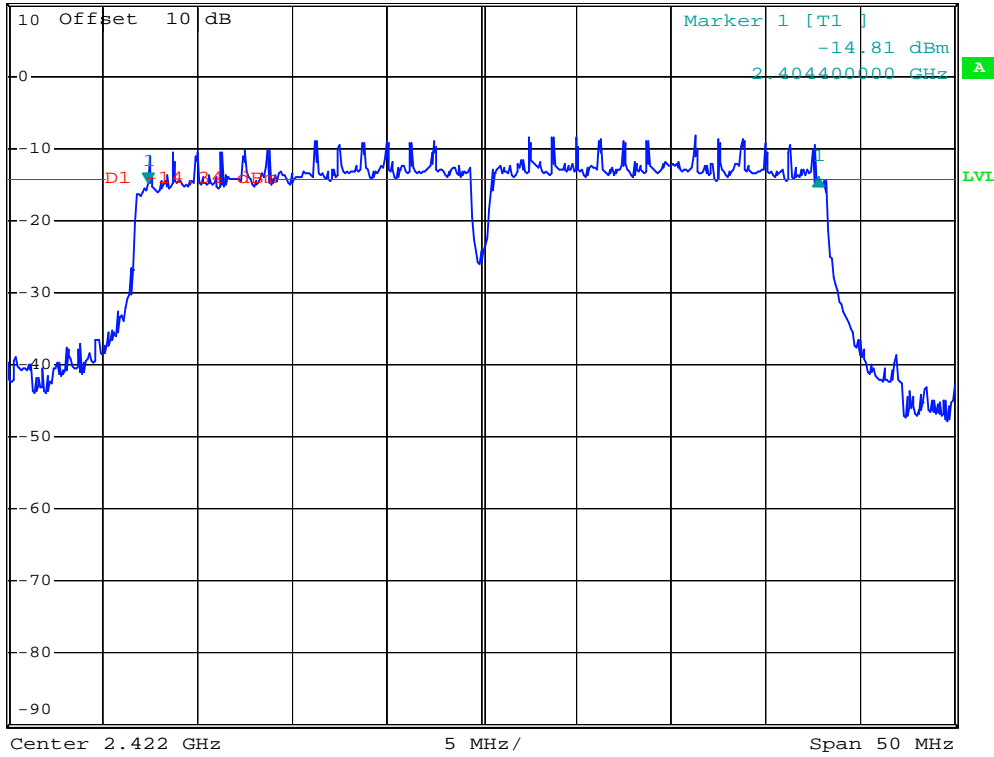

### 802.11n HT-40/ Channel Mid (ANT 1)




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz 0.66 dB  
SWT 5 ms 35.40000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

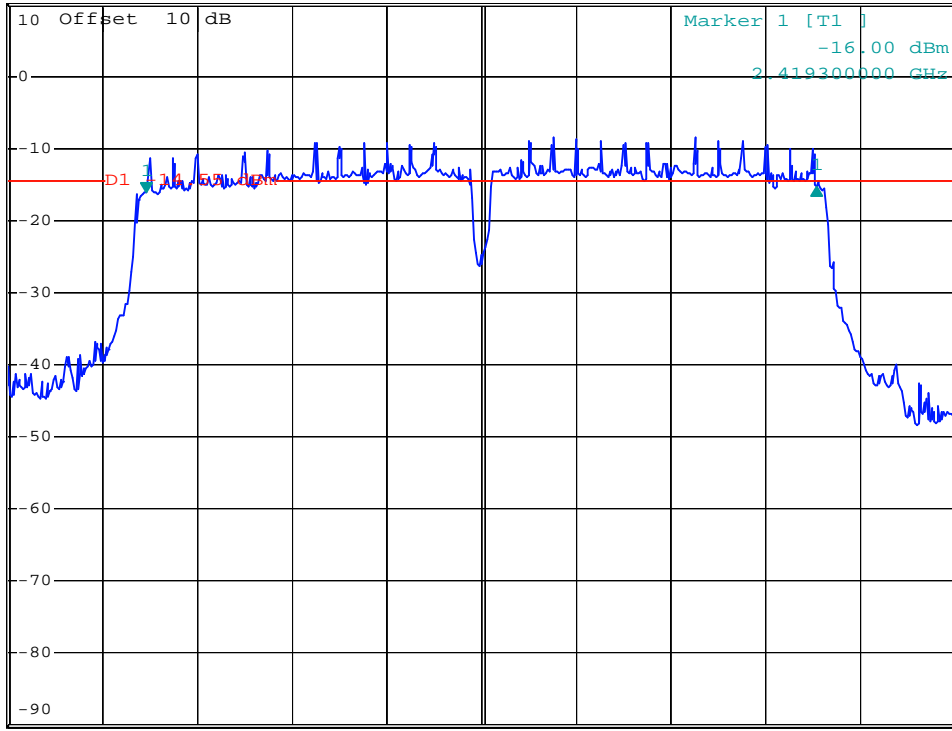

### 802.11n HT-40/ Channel High (ANT 1)




\*RBW 100 kHz Delta 1 [T1 ]  
VBW 300 kHz -0.03 dB  
SWT 5 ms 35.40000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

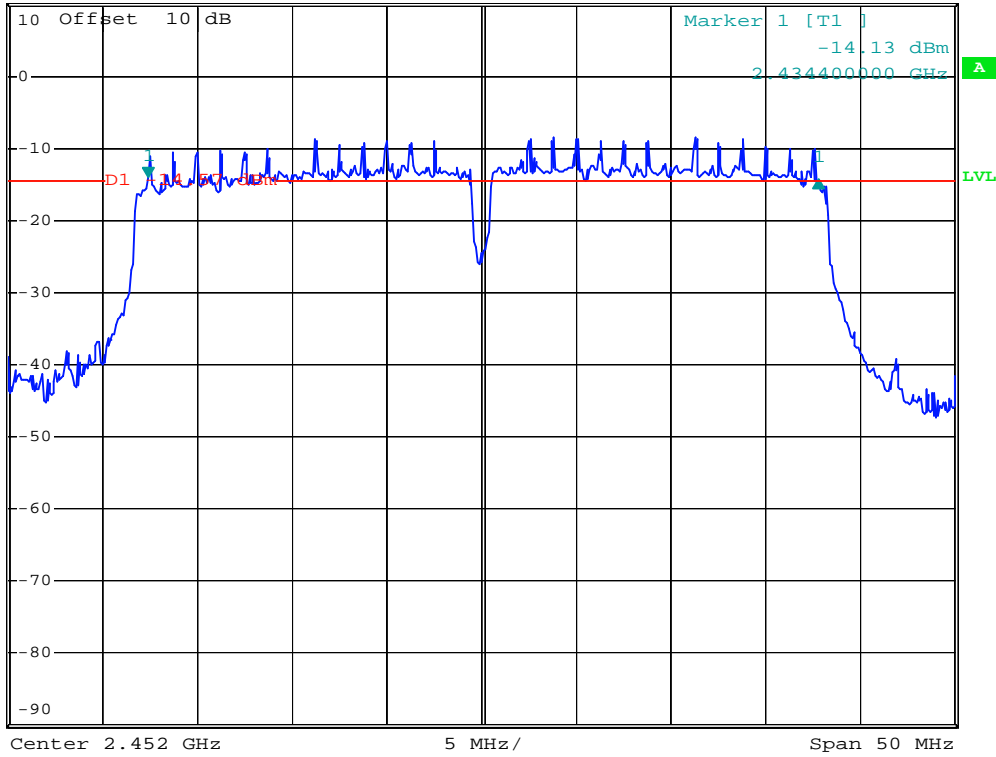

## 8 OUTPUT POWER MEASUREMENT

### 8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### 8.2 Measurement Procedure

Measurement Procedure:

#### 9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER +SENSOR	ANRITSU	ML2487A +MA2491A	2017/05/11	2018/05/10
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

### 8.4 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

#### A. 802.11b @1 Mbps

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	15.89	<b>38.815</b>
	Channel Mid:2437MHz	15.77	<b>37.757</b>
	Channel High:2462MHz	15.75	<b>37.584</b>

#### B. 802.11g @6 Mbps

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	12.86	<b>19.320</b>
	Channel Mid:2437MHz	12.72	<b>18.707</b>
	Channel High:2462MHz	12.69	<b>18.578</b>

#### C. 802.11n HT-20 @6.5 Mbps

##### ANT 0

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	12.81	<b>19.099</b>
	Channel Mid:2437MHz	12.78	<b>18.967</b>
	Channel High:2462MHz	12.73	<b>18.750</b>

##### ANT 1

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	13.01	<b>19.999</b>
	Channel Mid:2437MHz	12.96	<b>19.770</b>
	Channel High:2462MHz	12.89	<b>19.454</b>

##### Total Power (ANT 0+ANT 1)

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	15.92	<b>39.098</b>
	Channel Mid:2437MHz	15.88	<b>38.737</b>
	Channel High:2462MHz	15.82	<b>38.204</b>



**D. 802.11n HT-40 @13.5 Mbps****ANT 0**

Output Peak Power		dBm	mW
<b>O ANT peration</b>	Channel Low:2422MHz	11.72	<b>14.859</b>
	Channel Mid:2437MHz	11.82	<b>15.205</b>
	Channel High:2452MHz	11.86	<b>15.346</b>

**ANT 1**

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	11.15	<b>13.032</b>
	Channel Mid:2437MHz	11.24	<b>13.305</b>
	Channel High:2462MHz	11.30	<b>13.490</b>

**Total Power (ANT 0+ANT 1)**

Output Peak Power		dBm	mW
<b>Operation</b>	Channel Low:2412MHz	14.45	<b>27.891</b>
	Channel Mid:2437MHz	14.55	<b>28.510</b>
	Channel High:2462MHz	14.60	<b>28.836</b>

**Note : The expanded uncertainty: 2dB.**

## 9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW greater than RBW with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

## 9.4 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

### A. 802.11b @1 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

### B. 802.11g @6 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

### C. 802.11n HT-20 @6.5 Mbps



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

### D. 802.11n HT-40 @13.5 Mbps



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

**Note : The expanded uncertainty: 2dB.**



### 802.11b

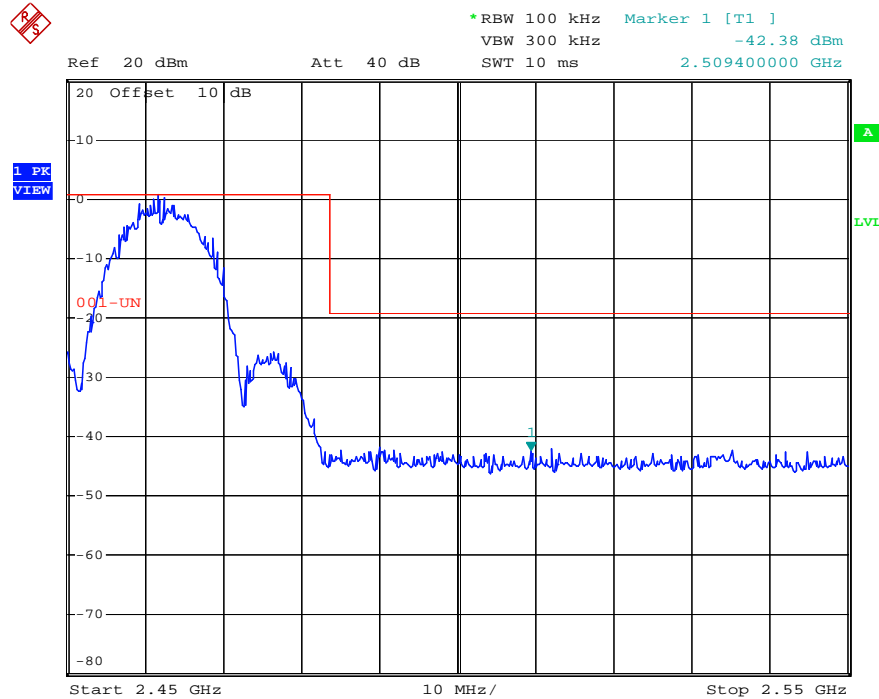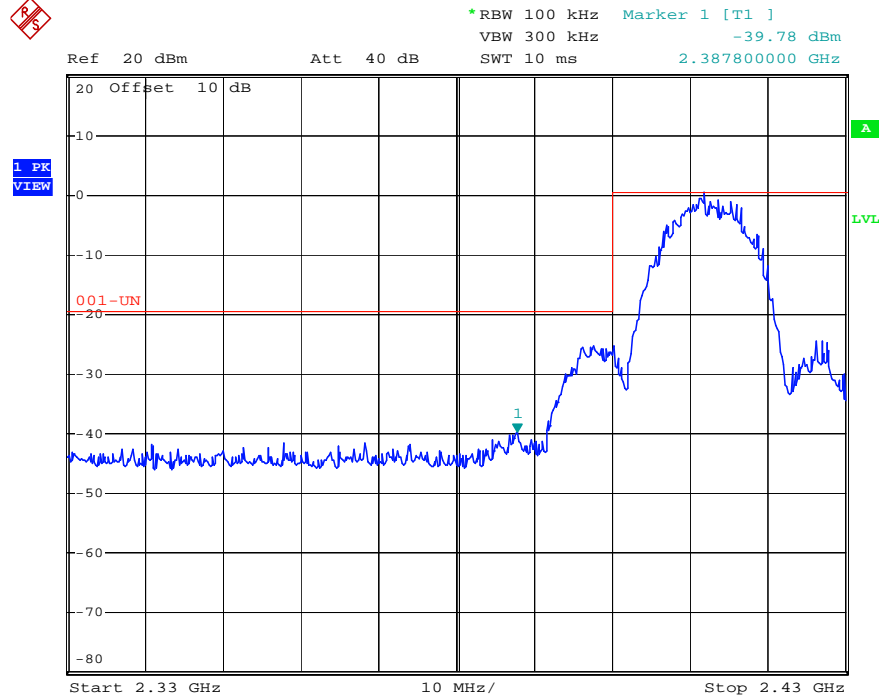



### 802.11g

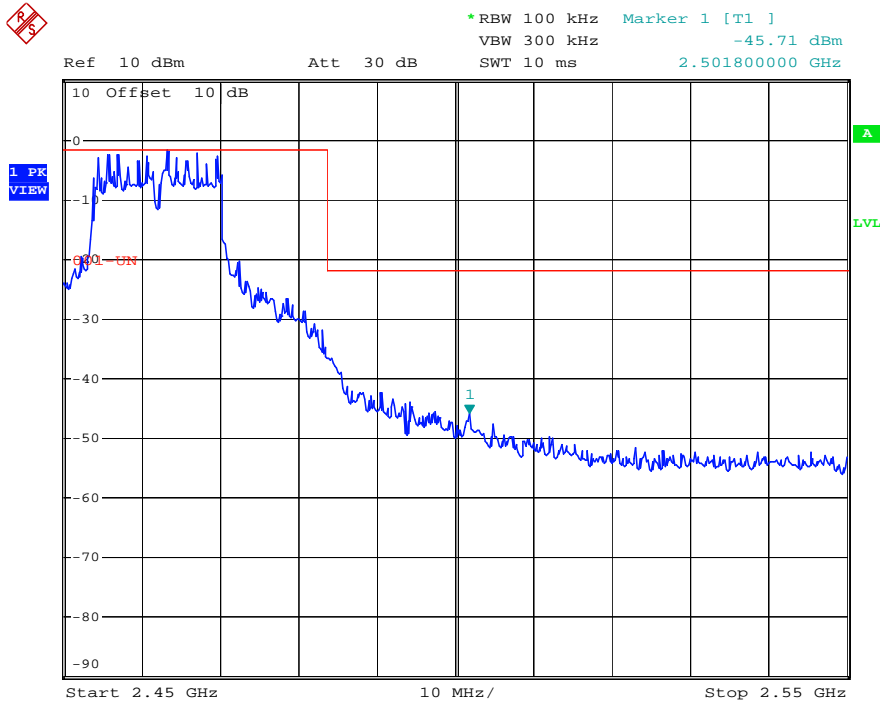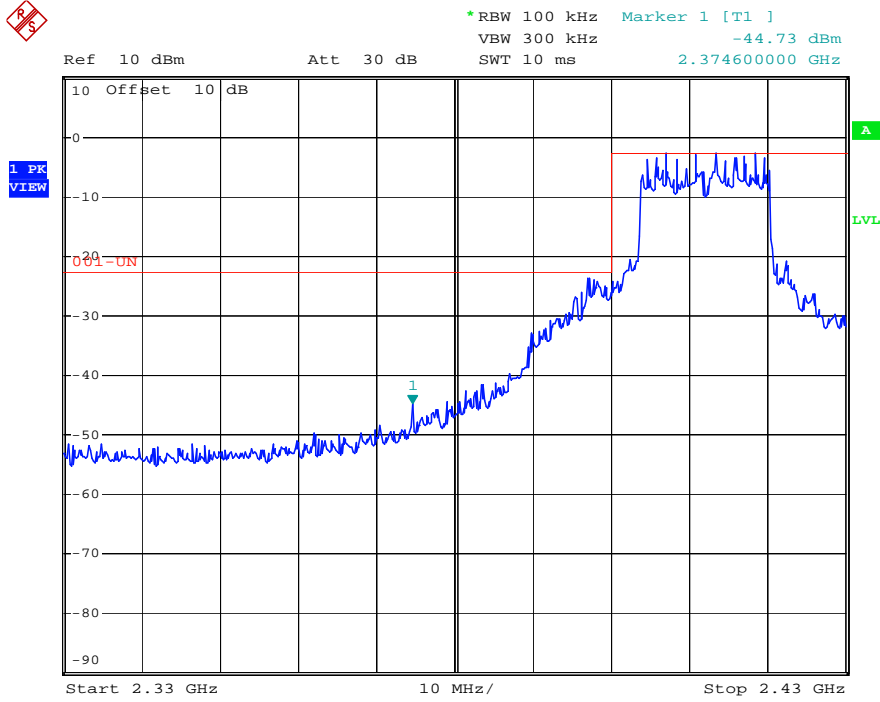



### 802.11n HT-20 (ANT 0)

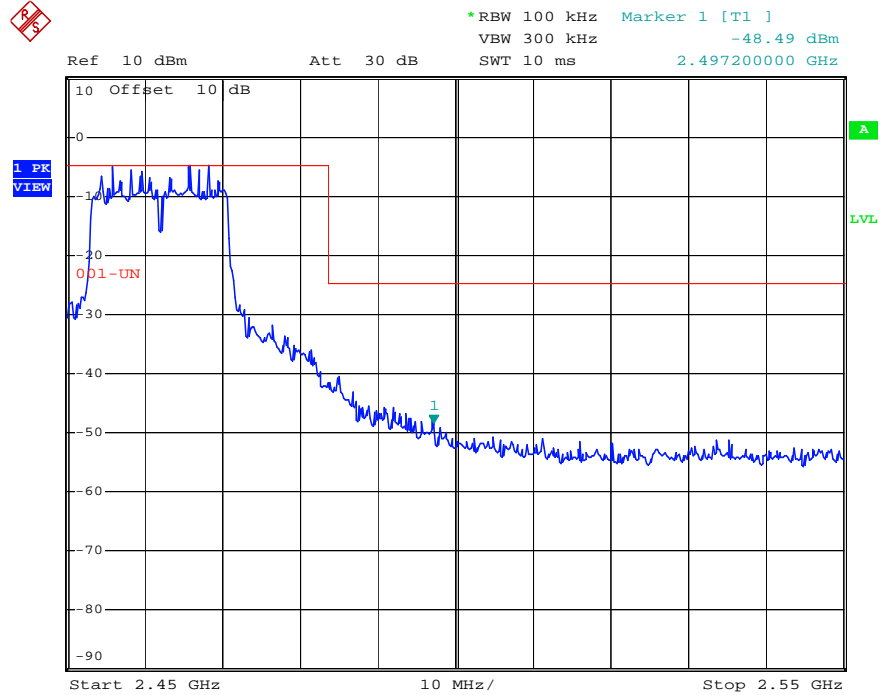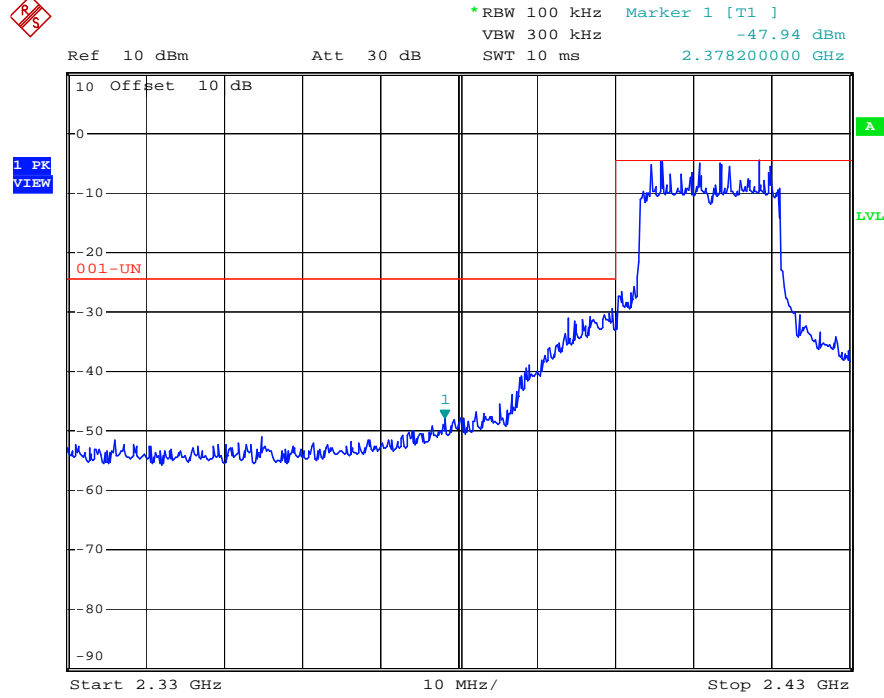

### 802.11n HT-20 (ANT 1)

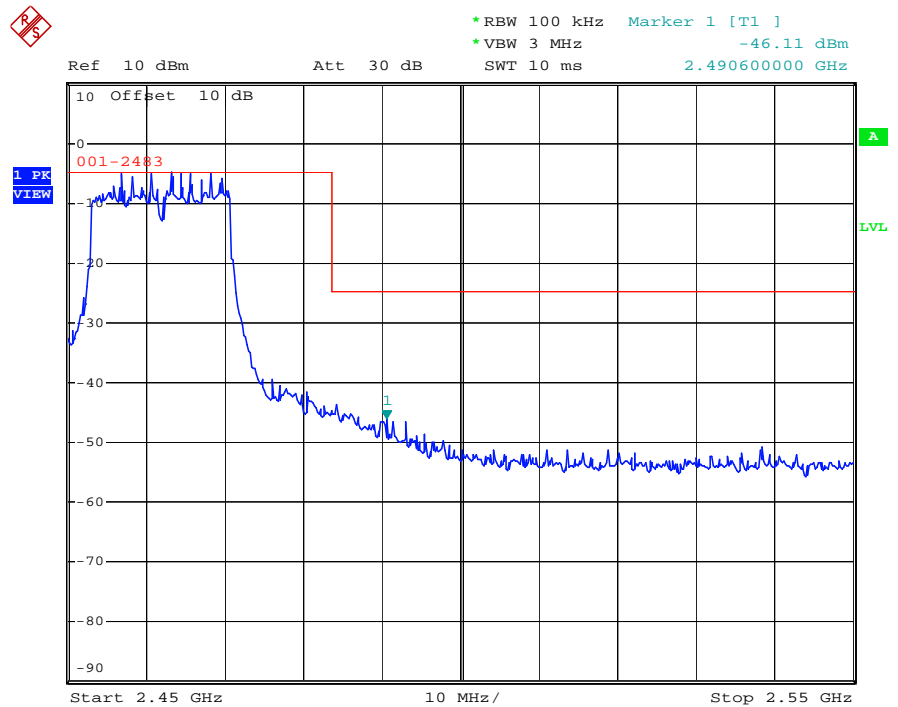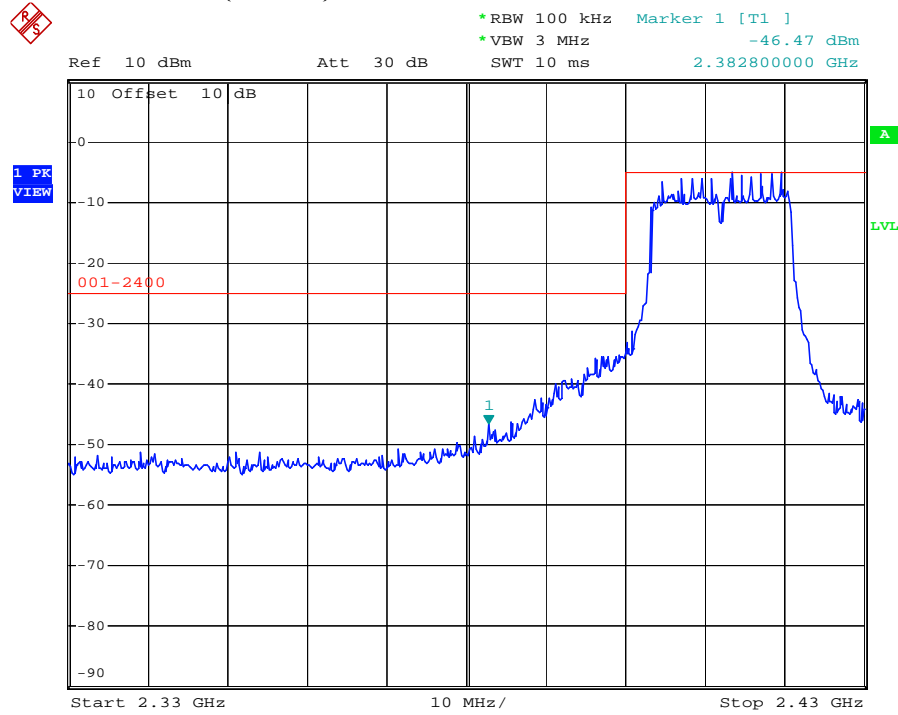

### 802.11n HT-40 (ANT 0)

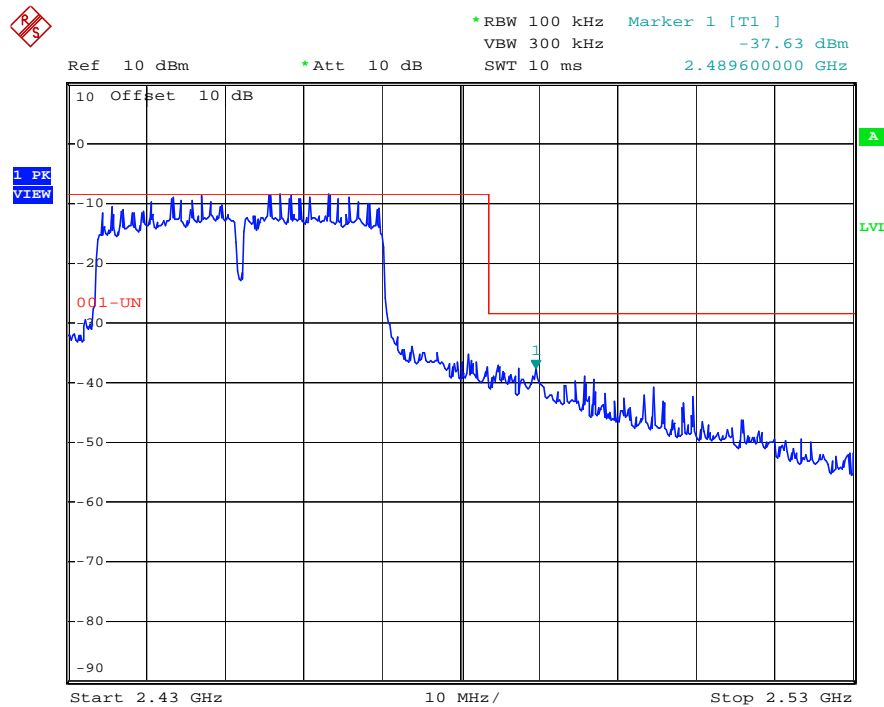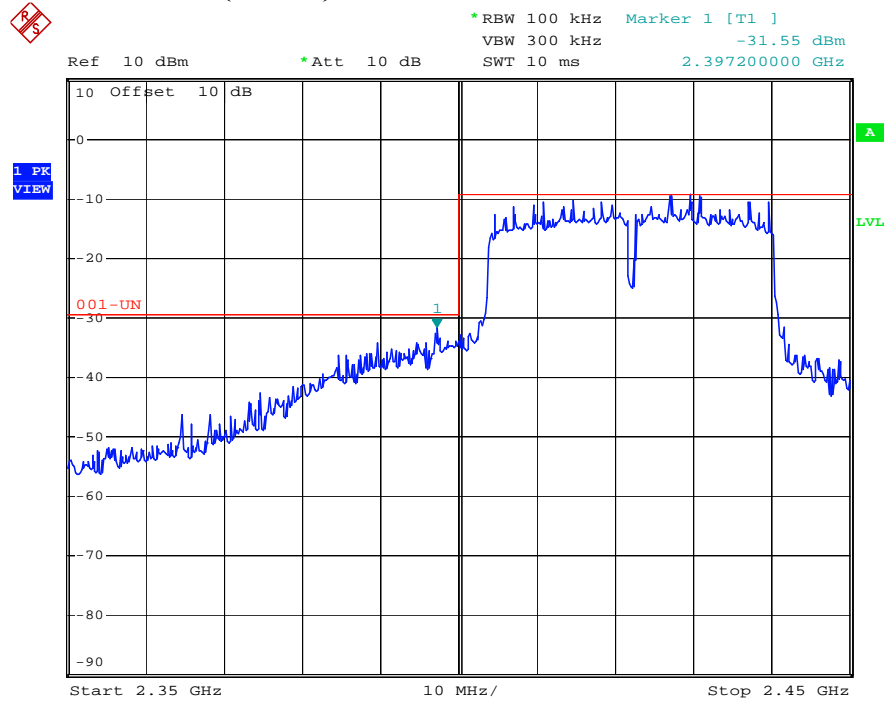





### 802.11n HT-40 (ANT 1)



\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -38.24 dBm  
SWT 10 ms 2.397600000 GHz

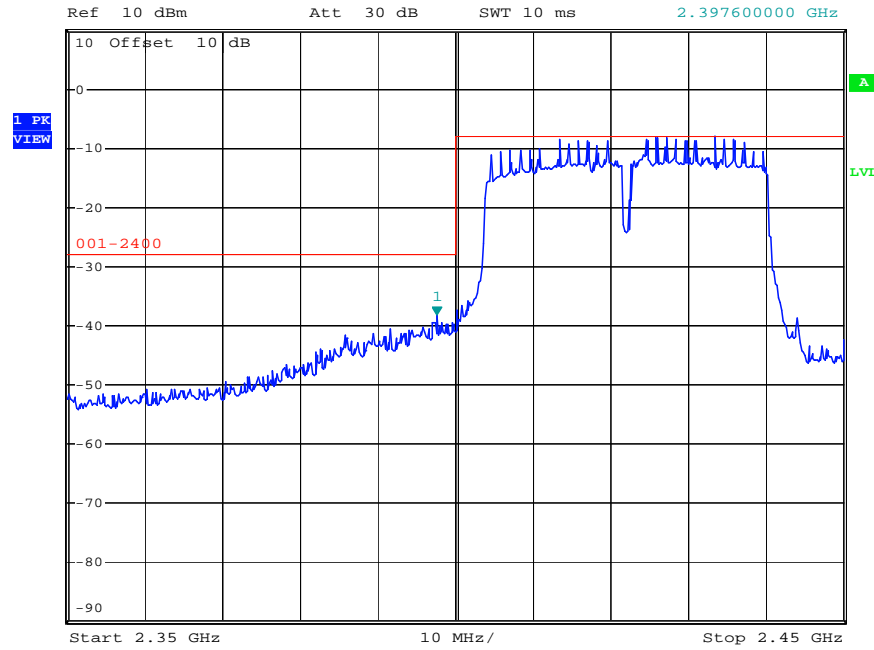

\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -43.18 dBm  
SWT 10 ms 2.484600000 GHz

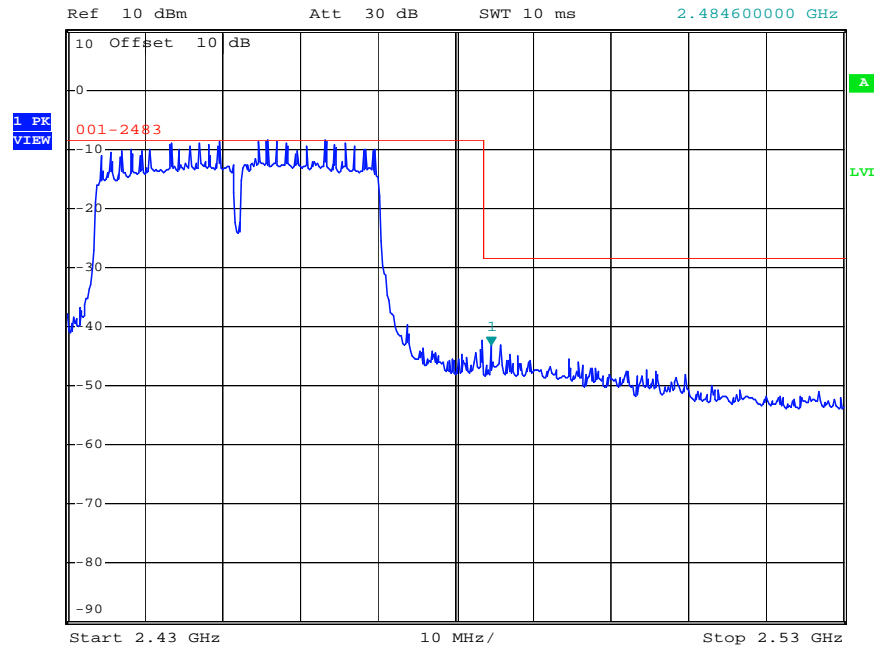

## 10 POWER DENSITY MEASUREMENT

### 10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

### 10.2 Measurement Procedure

#### Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq 3 \times \text{RBW}$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

### 10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

## 10.4 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

### A. 802.11b @1 Mbps

- a) Channel Low: Maximun PSD is -13.51 dBm
- b) Channel Mid: Maximun PSD is -14.10 dBm
- c) Channel High: Maximun PSD is -13.93 dBm

### B. 802.11g @6 Mbps

- a) Channel Low: Maximun PSD is -19.90 dBm
- b) Channel Mid: Maximun PSD is -19.81 dBm
- c) Channel High: Maximun PSD is -19.75 dBm

### C. 802.11n HT-20 @6.5 Mbps

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log (N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
ANT 0	2412	-21.19	3.01	-18.18	8.00	Pass
	2437	-21.46	3.01	-18.45	8.00	Pass
	2462	-21.48	3.01	-18.47	8.00	Pass
ANT 1	2412	-21.03	3.01	-18.02	8.00	Pass
	2437	-20.31	3.01	-17.30	8.00	Pass
	2462	-20.96	3.01	-17.95	8.00	Pass

**D. 802.11n HT-40 @13.5 Mbps**

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log(N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
ANT 0	2422	-23.07	3.01	-20.06	8.00	Pass
	2437	-22.38	3.01	-19.37	8.00	Pass
	2452	-22.91	3.01	-19.90	8.00	Pass
ANT 1	2422	-24.45	3.01	-21.44	8.00	Pass
	2437	-22.87	3.01	-19.86	8.00	Pass
	2452	-23.50	3.01	-20.49	8.00	Pass

**Note : The expanded uncertainty: 2dB.**

### 802.11b / Channel Low




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -13.51 dBm  
SWT 1.7 s      2.411310000 GHz

Ref 20 dBm

Att 40 dB

1 PK  
VIEW

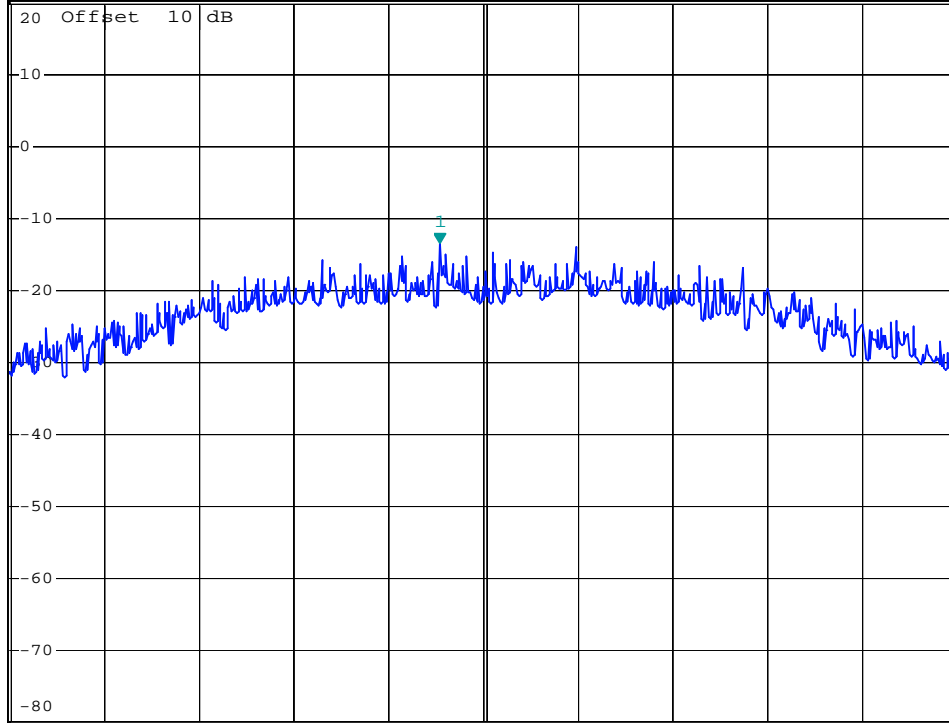

### 802.11b / Channel Mid




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -14.10 dBm  
SWT 1.7 s      2.438470000 GHz

Ref 20 dBm

Att 40 dB

1 PK  
VIEW

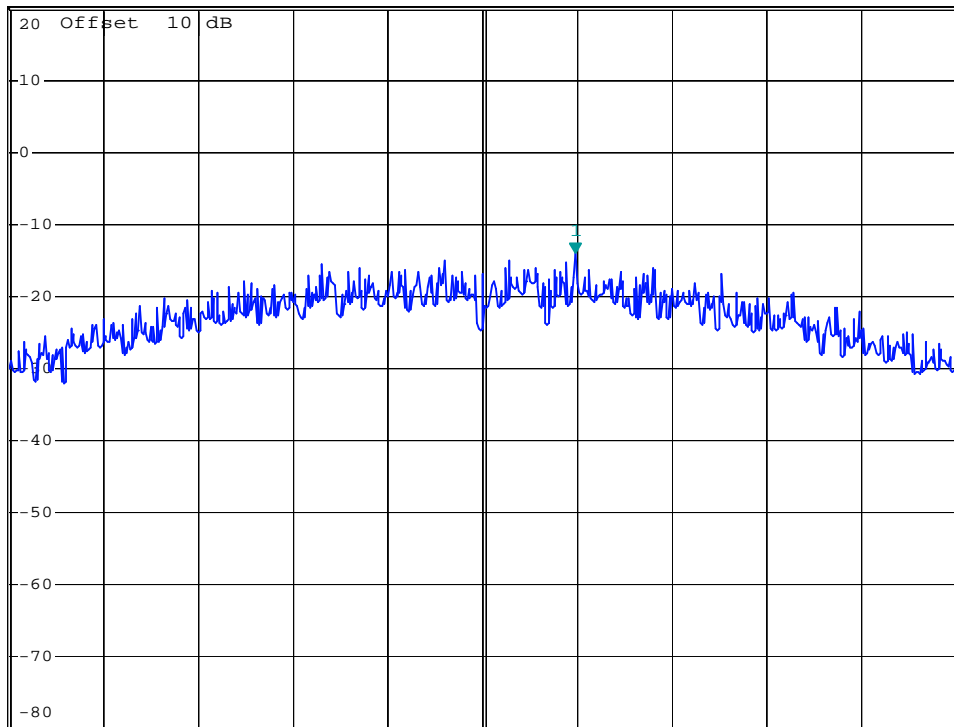

Center 2.437 GHz

1.5 MHz/

Span 15 MHz

### 802.11b / Channel High




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -13.93 dBm  
SWT 1.7 s      2.460710000 GHz

Ref 20 dBm

Att 40 dB

1 PK  
VIEW

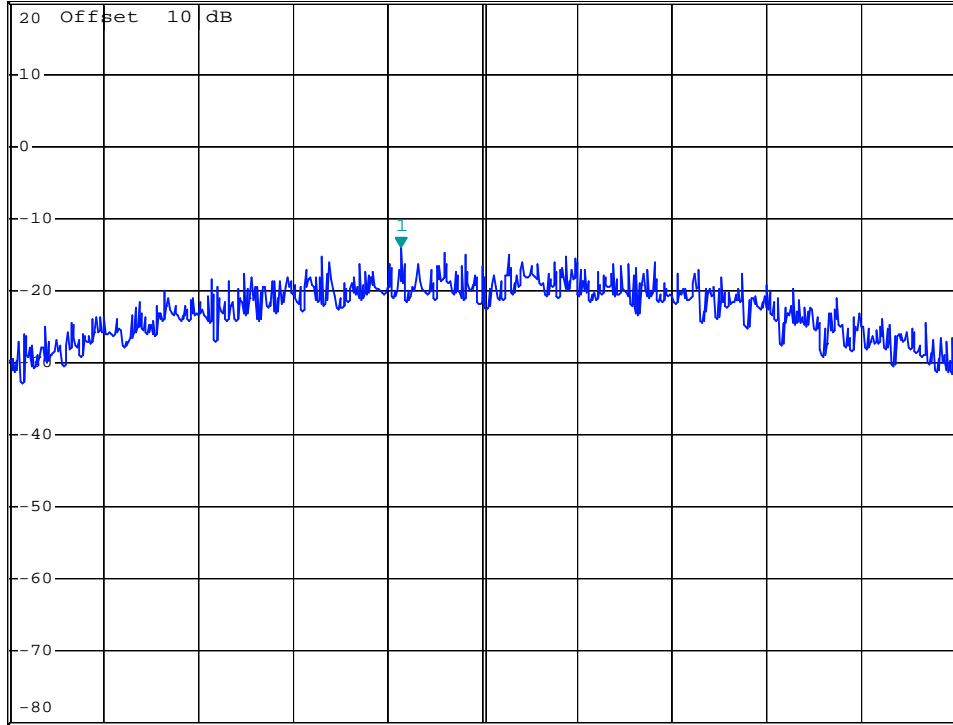

Center 2.462 GHz


1.5 MHz/

Span 15 MHz

### 802.11g / Channel Low



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -19.90 dBm  
SWT 2.8 s      2.418200000 GHz

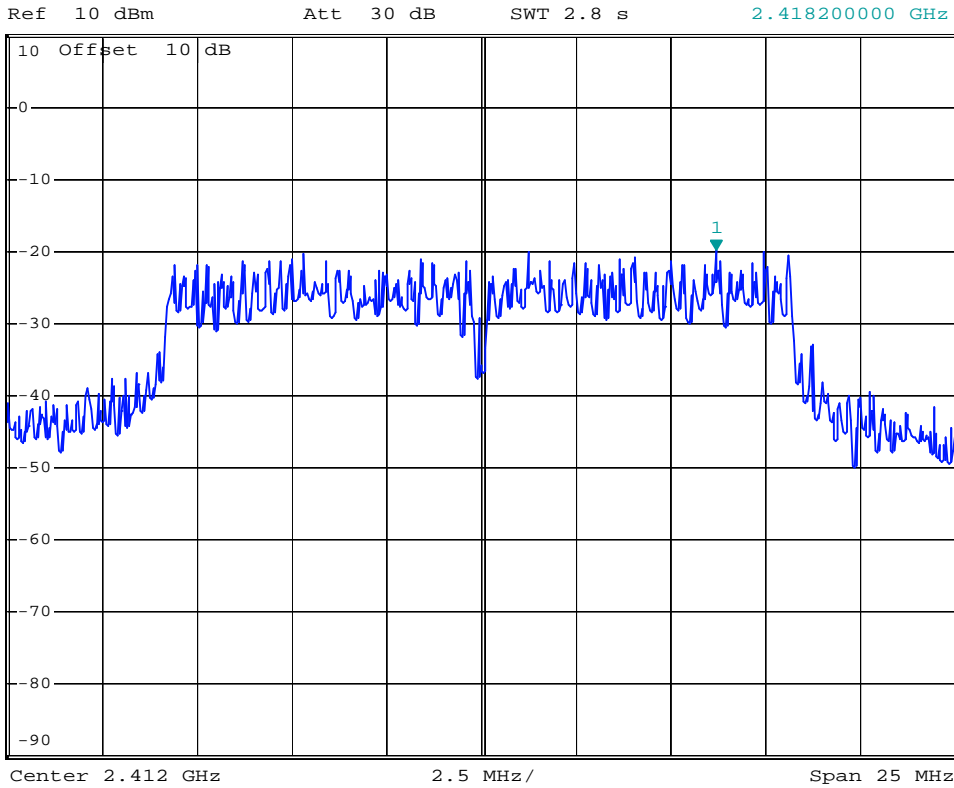




### 802.11g / Channel Mid



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -19.81 dBm  
SWT 2.8 s      2.438250000 GHz

Ref 10 dBm

Att 30 dB

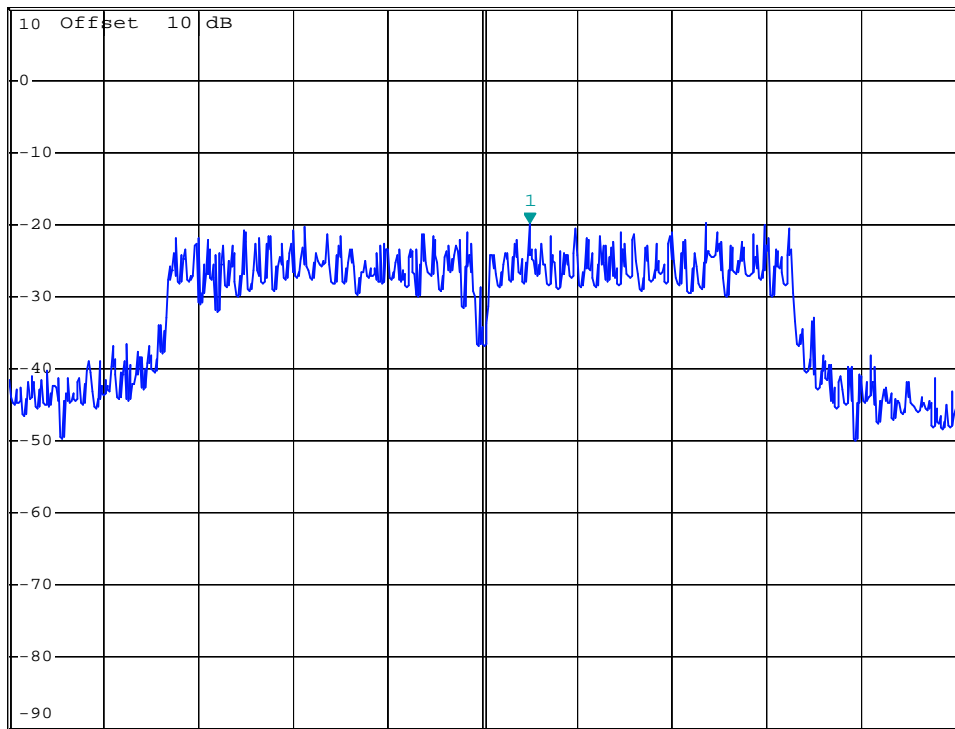

Center 2.437 GHz

2.5 MHz/

Span 25 MHz

### 802.11g / Channel High




\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -19.75 dBm  
SWT 2.8 s    2.463250000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

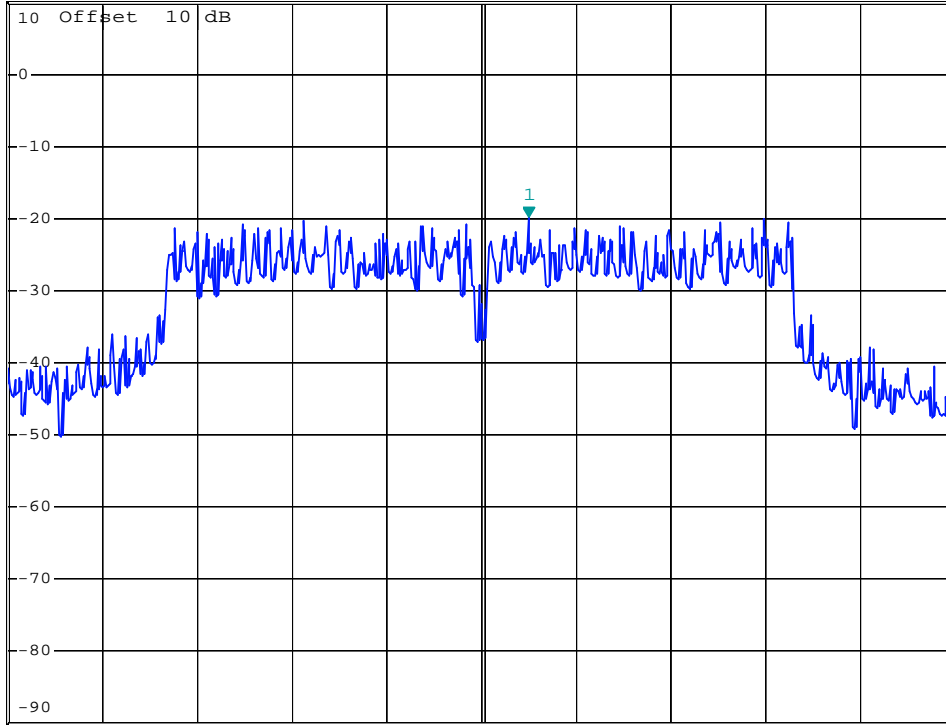

Center 2.462 GHz

2.5 MHz/


Span 25 MHz

### 802.11n HT-20/Channel Low

ANT 0



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -21.19 dBm  
SWT 3 s          2.414160000 GHz

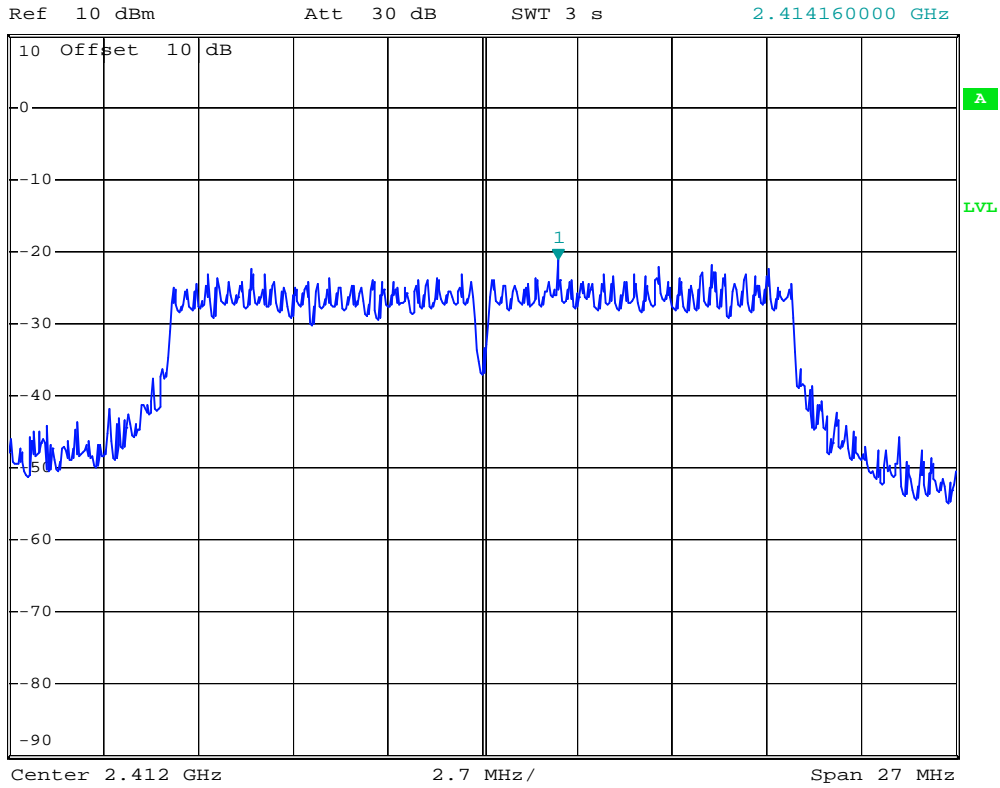

### 802.11n HT-20/ Channel Mid

ANT 0




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -21.46 dBm  
SWT 3 s          2.445100000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

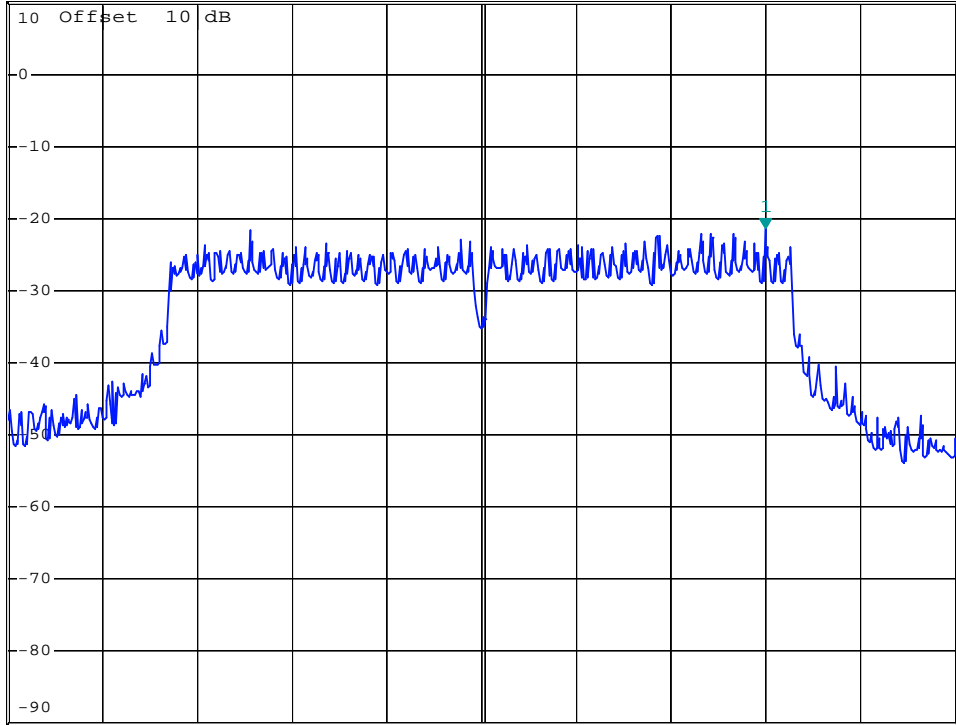

Center 2.437 GHz

2.7 MHz/


Span 27 MHz

### 802.11n HT-20/ Channel High

ANT 0



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -21.48 dBm  
SWT 3 s          2.464160000 GHz

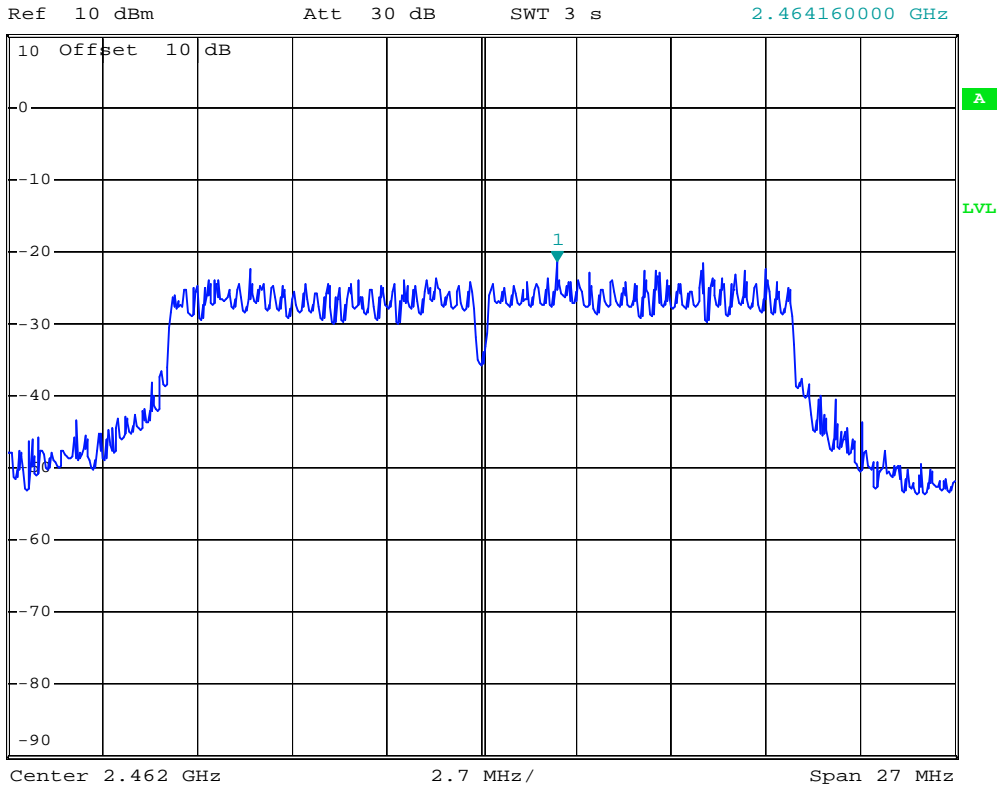


### 802.11n HT-20/Channel Low

ANT 1



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -21.03 dBm  
SWT 3 s          2.418264000 GHz

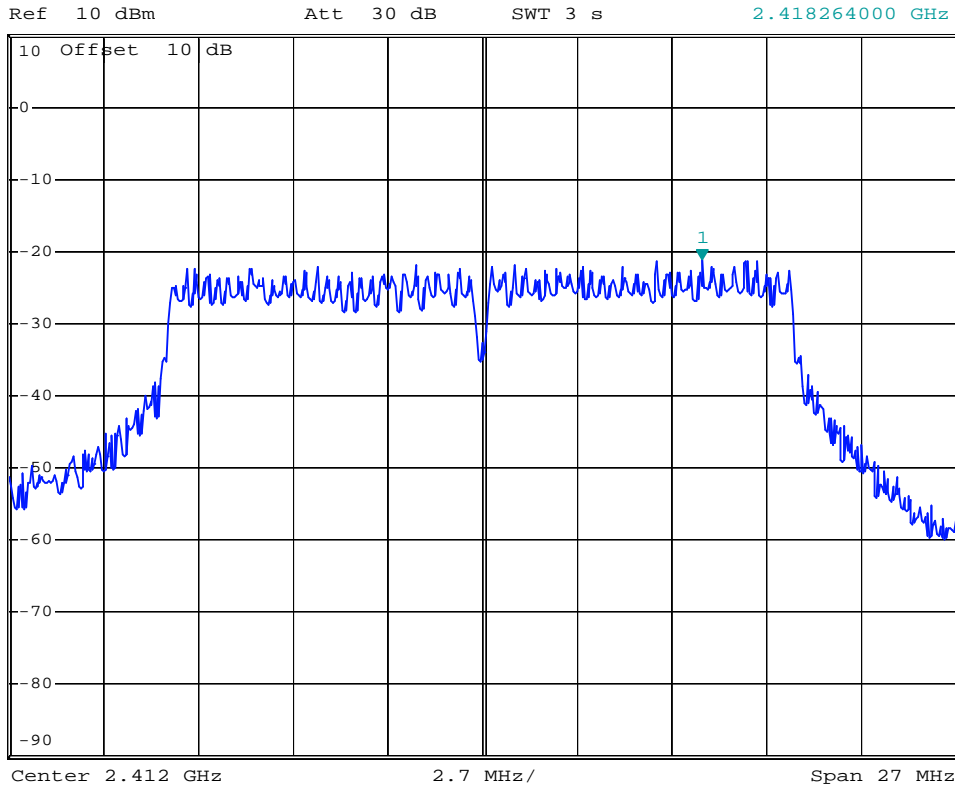


### 802.11n HT-20/ Channel Mid

ANT 1



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -20.31 dBm  
SWT 3 s          2.444506000 GHz

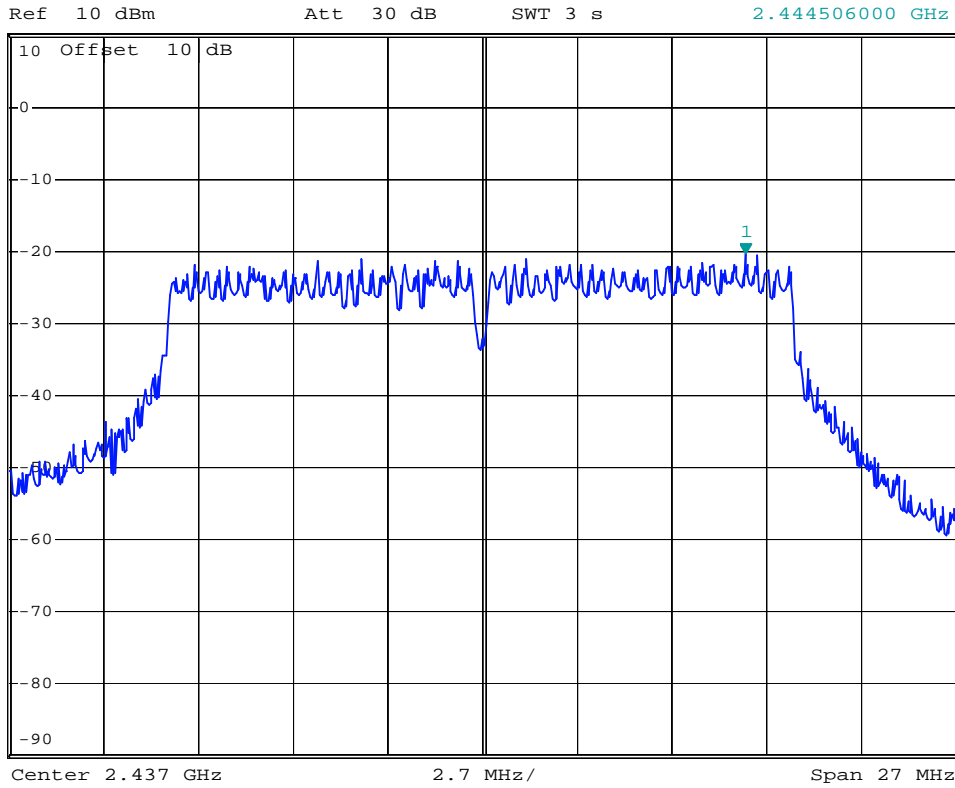


### 802.11n HT-20/ Channel High

ANT 1



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -20.96 dBm  
SWT 3 s          2.468264000 GHz

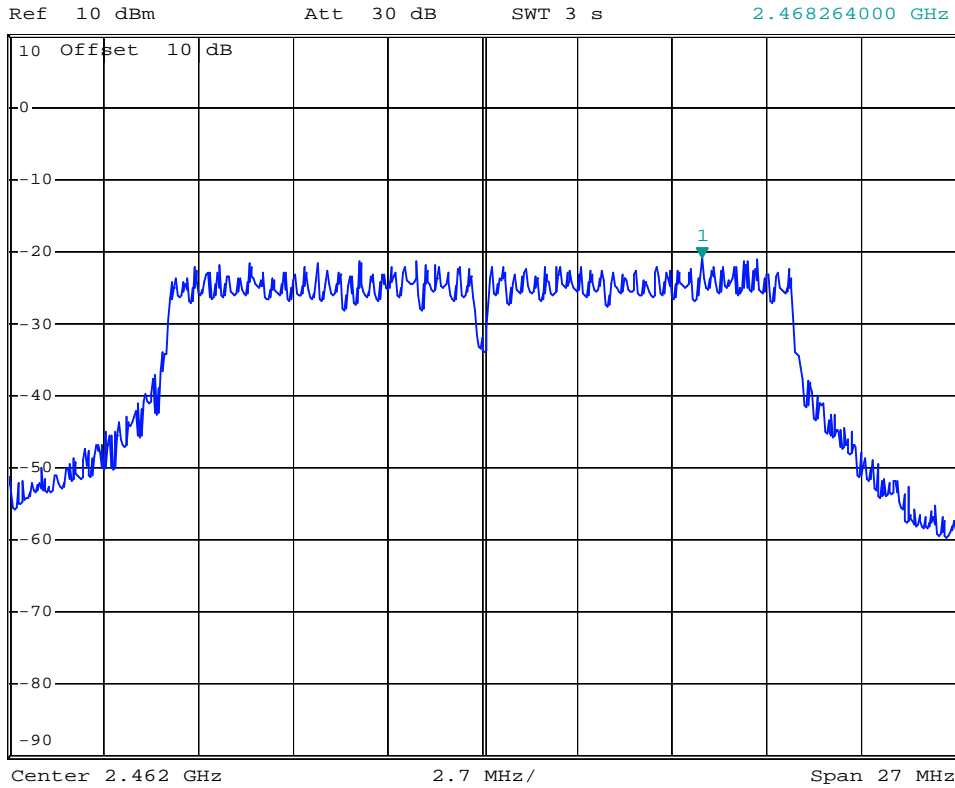



### 802.11n HT-40/ Channel Low

### ANT 0




\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -23.07 dBm  
SWT 6 s        2.420920000 GHz

Ref 10 dBm

\*Att 10 dB

1 PK  
VIEW

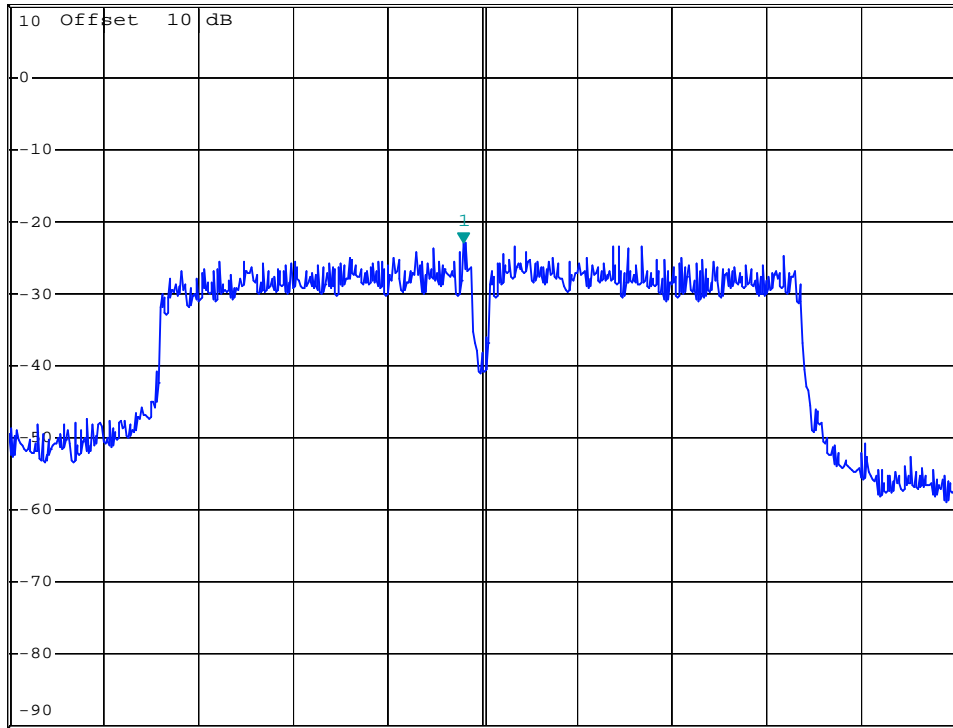

Center 2.422 GHz

5.4 MHz/

Span 54 MHz

### 802.11n HT-40 Channel Mid


ANT 0



\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -22.38 dBm  
SWT 6 s        2.430088000 GHz

Ref 10 dBm

\*Att 10 dB

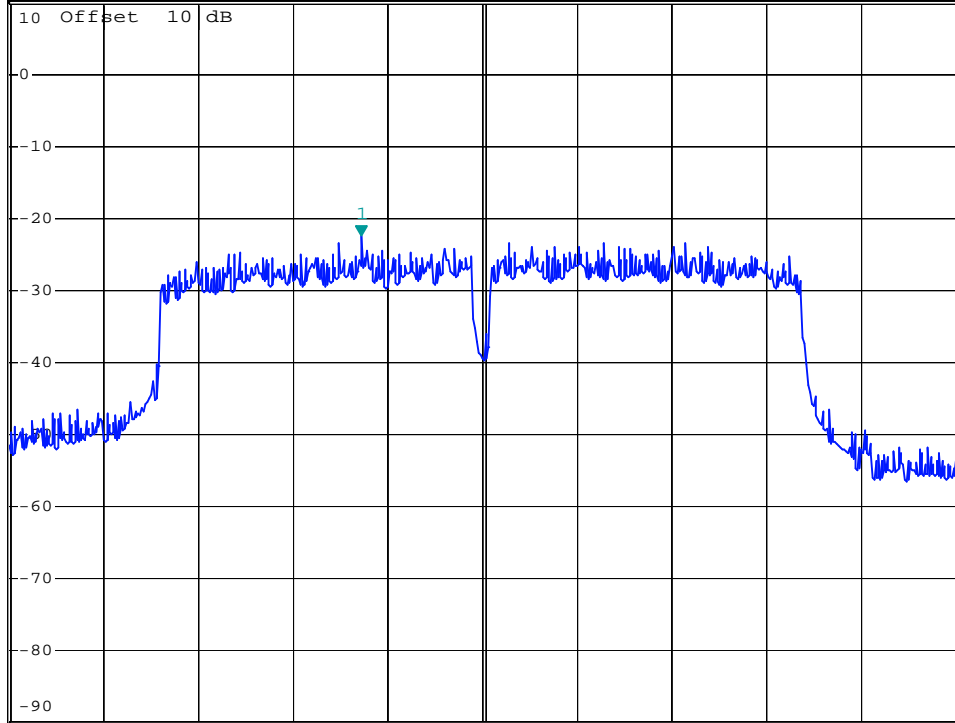

Center 2.437 GHz

5.4 MHz/


Span 54 MHz

1 PK  
VIEW

### 802.11n HT-40/ Channel High ANT 0



\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -22.91 dBm  
SWT 6 s        2.446924000 GHz

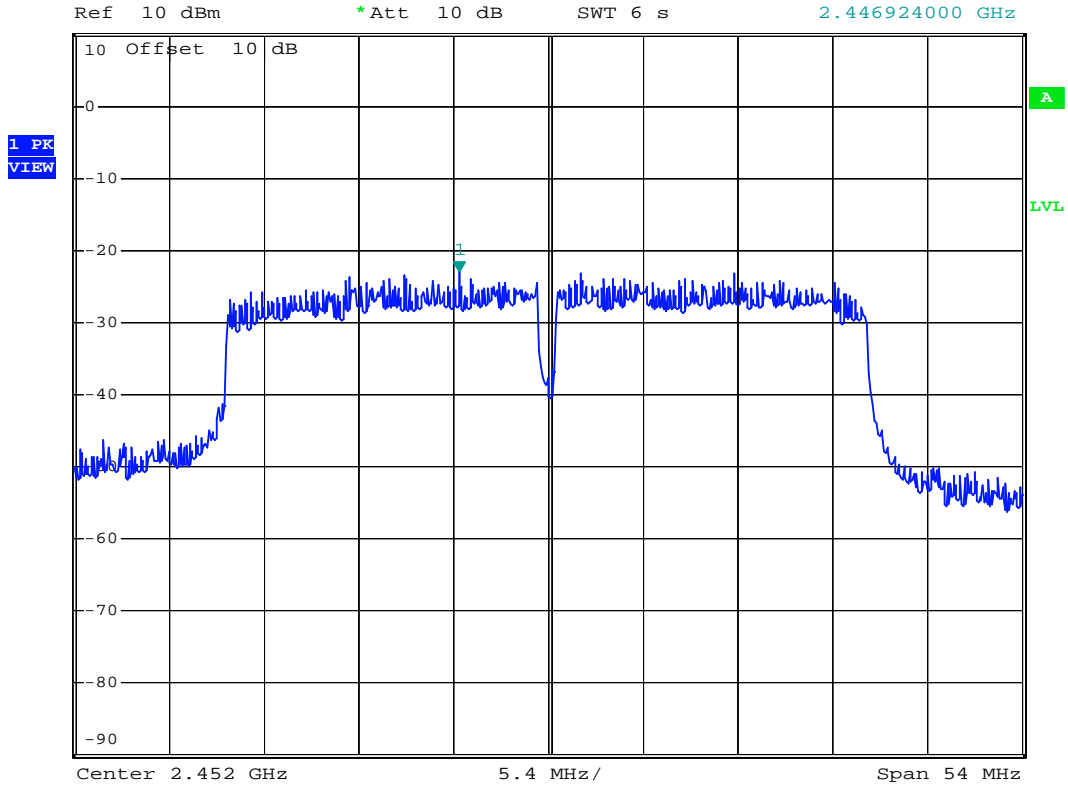

### 802.11n HT-40/ Channel Low

#### ANT 1




\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -24.45 dBm  
SWT 6 s        2.438524000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

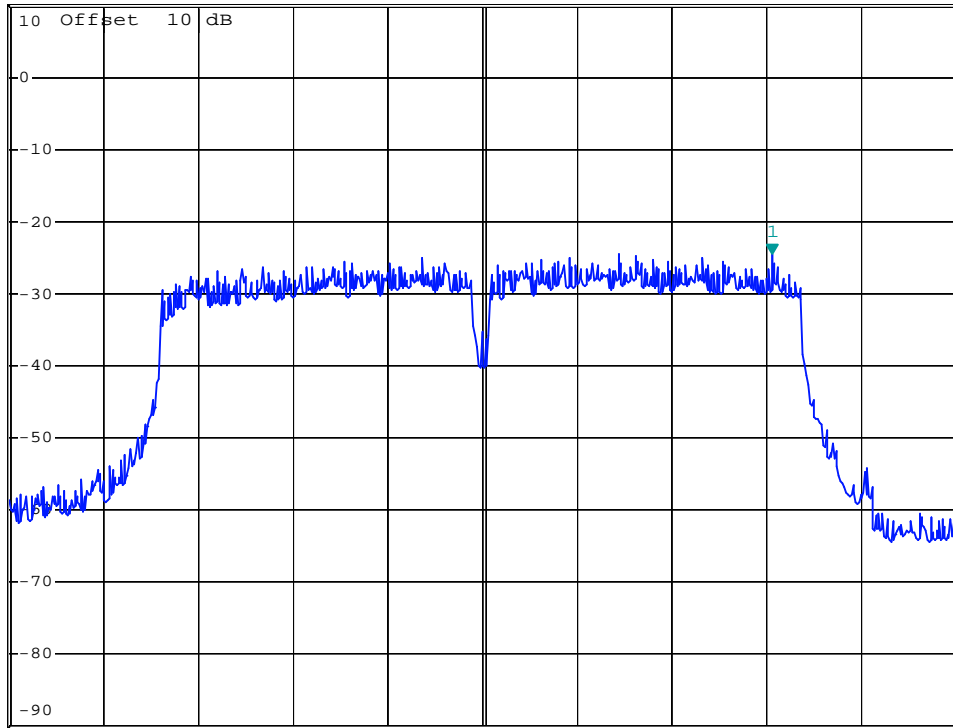

A


LVL

### 802.11n HT-40 Channel Mid

ANT 1



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -22.87 dBm  
SWT 6 s          2.449528000 GHz

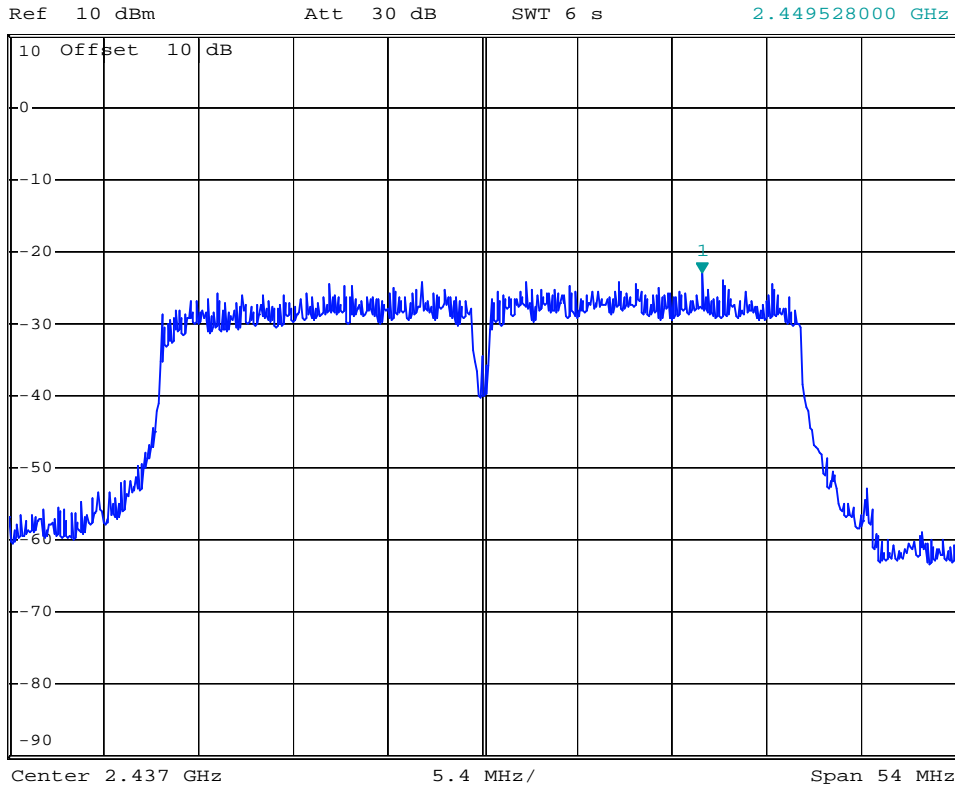

### 802.11n HT-40/ Channel High

ANT 1




\*RBW 3 kHz    Marker 1 [T1 ]  
VBW 10 kHz    -23.50 dBm  
SWT 6 s        2.454484000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

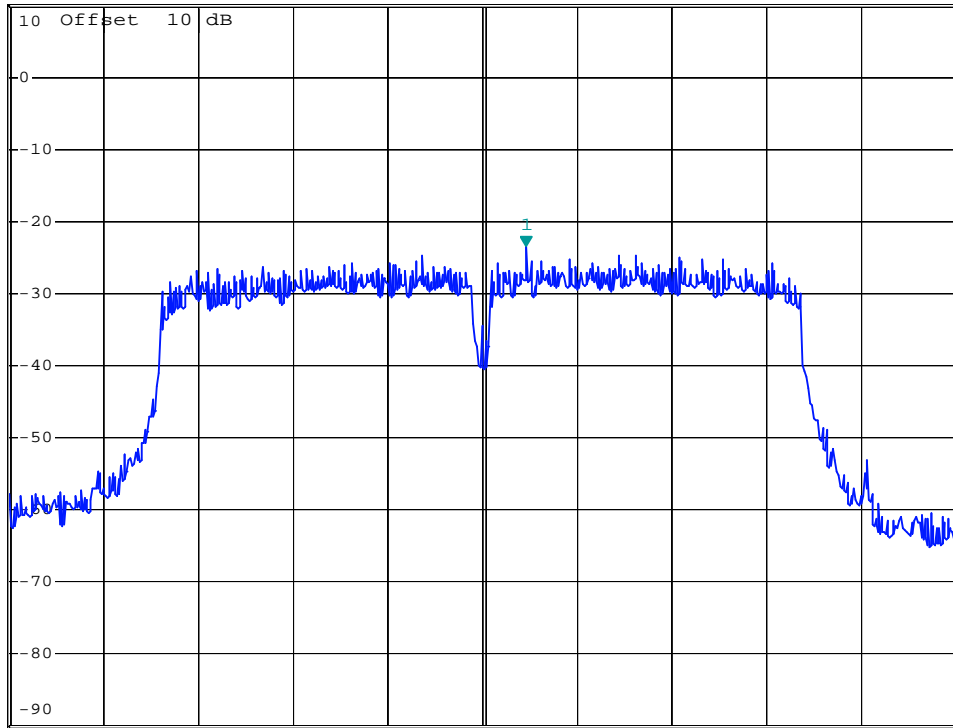

Center 2.452 GHz

5.4 MHz/

Span 54 MHz

## 11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

### 11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

## 11.4 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

### A. 802.11b @1 Mbps

#### Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

### B. 802.11g @6 Mbps

#### Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

### C. 802.11n HT-20 @6.5 Mbps

#### Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

### D. 802.11n HT-40 @13.5 Mbps

#### Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.


*Note : The expanded uncertainty: 2dB.*




### 802.11b / Channel Low



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

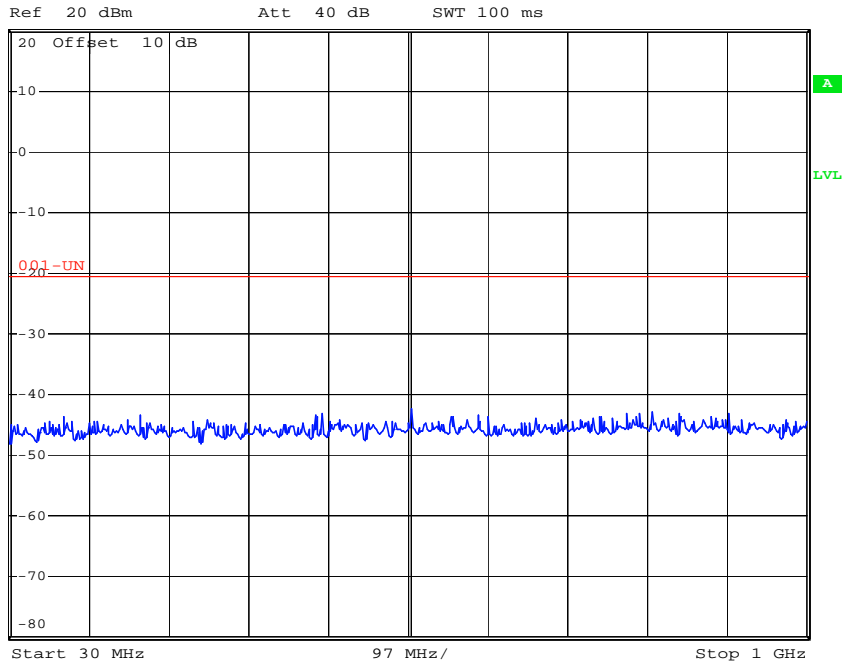


\*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -0.59 dBm  
SWT 2.6 s      2.377000000 GHz

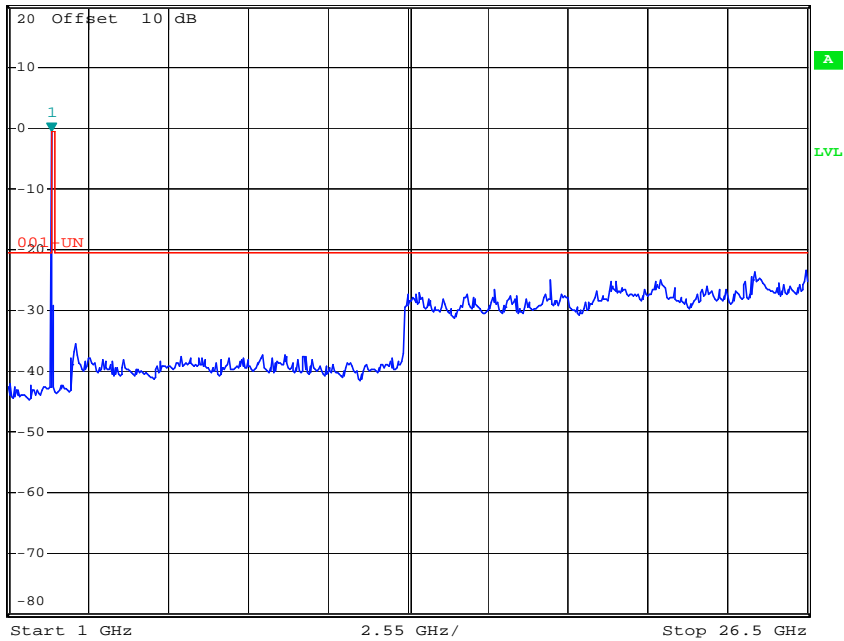


### 802.11b / Channel Mid



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

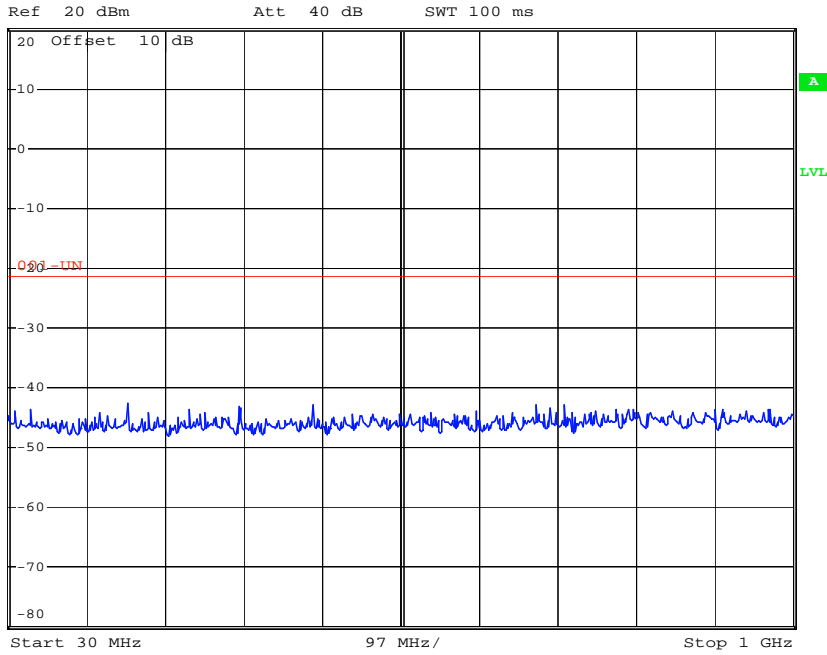


\*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -1.27 dBm  
SWT 2.6 s      2.428000000 GHz

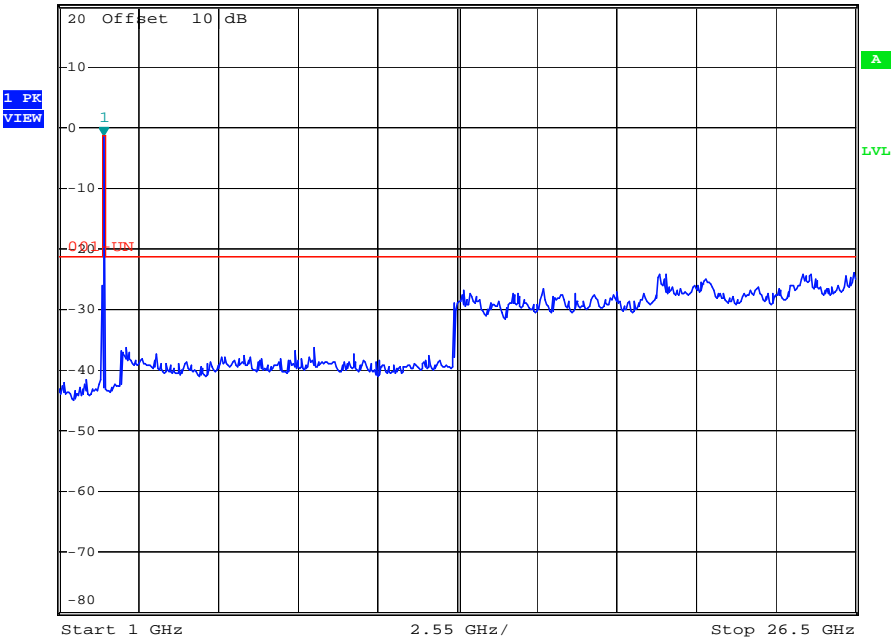


### 802.11b / Channel High



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

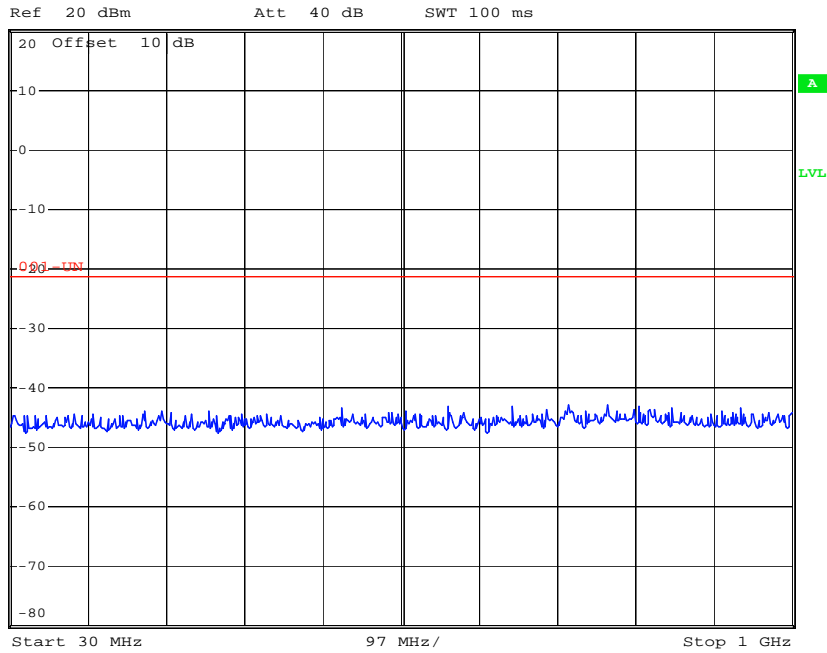


\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -1.37 dBm  
SWT 2.6 s 2.428000000 GHz

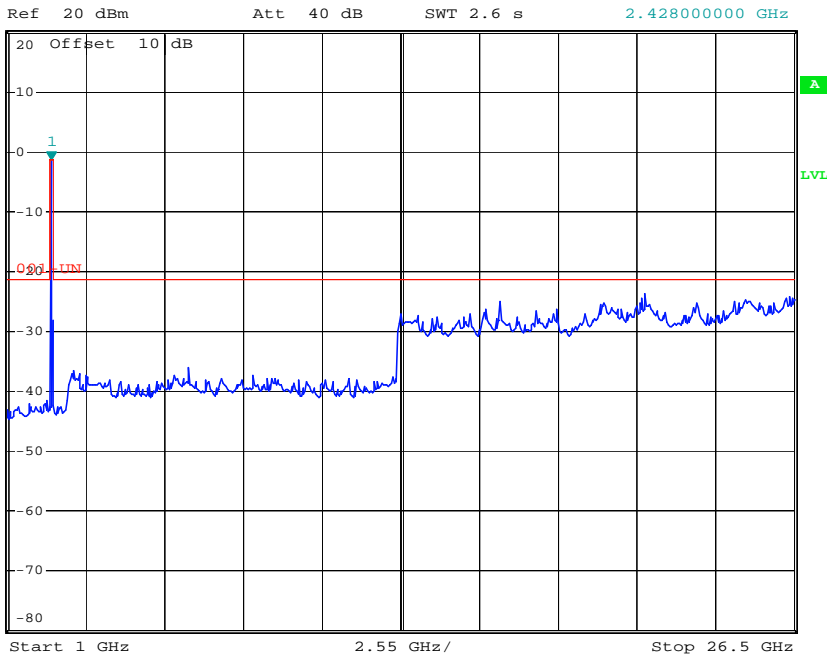


### 802.11g / Channel Low



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

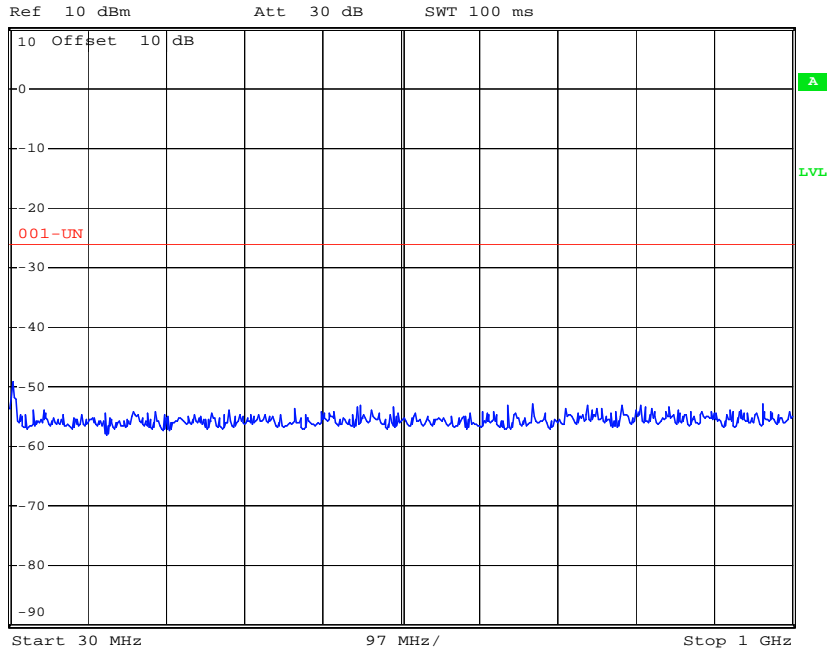


\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -6.11 dBm  
SWT 2.6 s 2.377000000 GHz

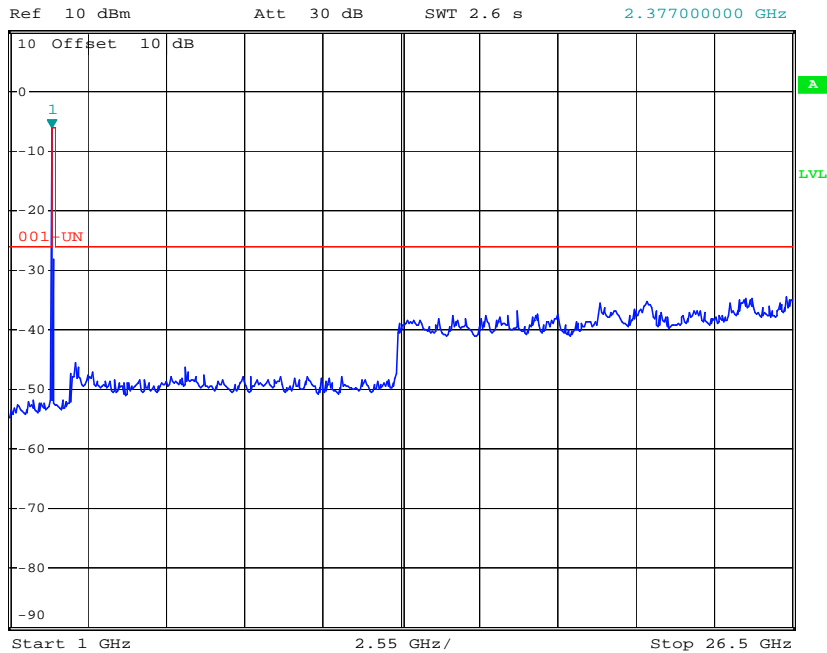


### 802.11g / Channel Mid



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

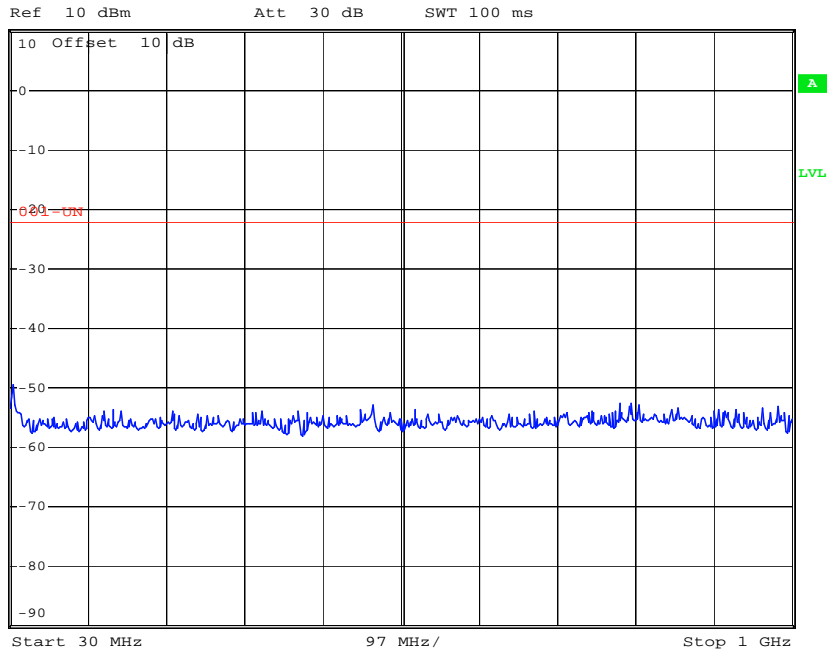

\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -2.21 dBm  
SWT 2.6 s 2.428000000 GHz

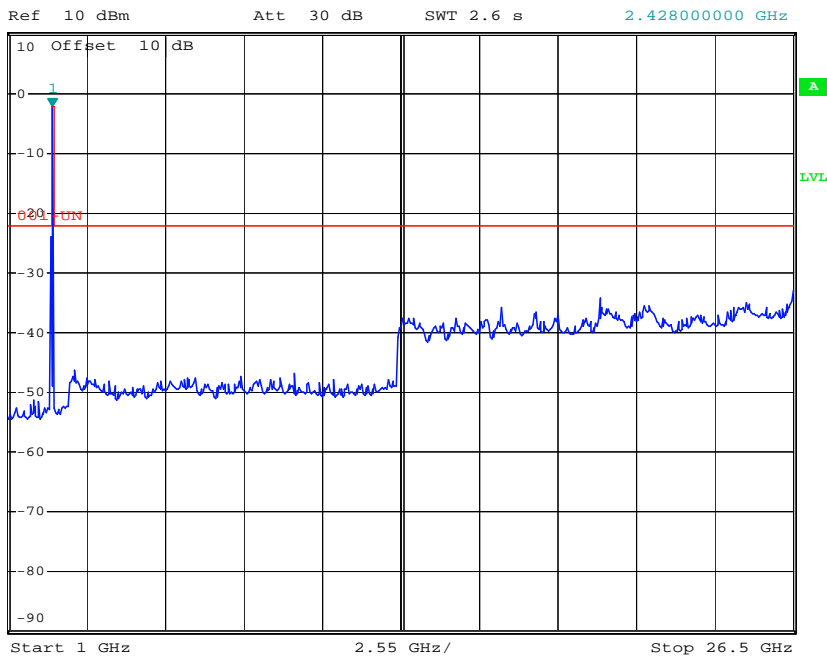


### 802.11g / Channel High



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

Ref 10 dBm


Att 30 dB

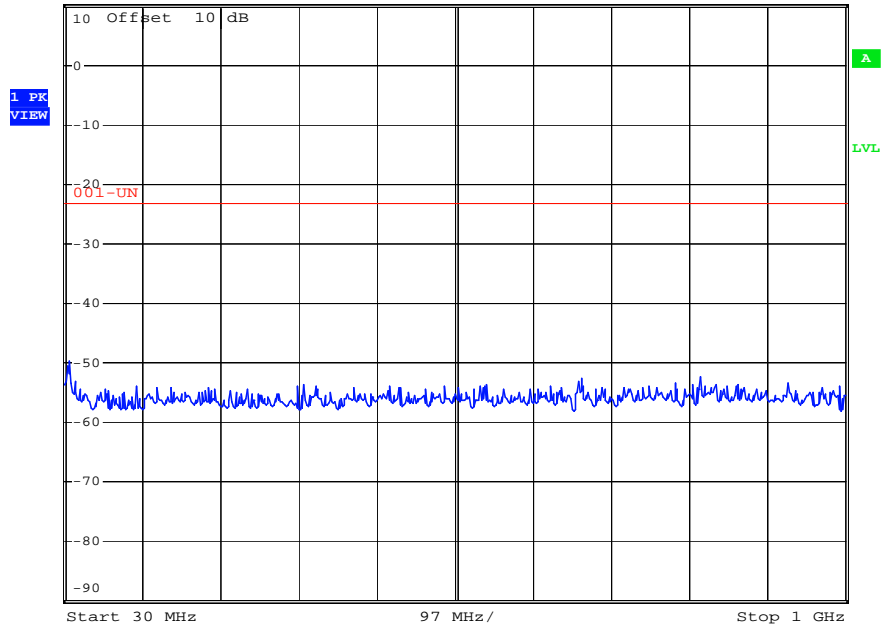

\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -3.12 dBm  
SWT 2.6 s 2.428000000 GHz

Ref 10 dBm


Att 30 dB

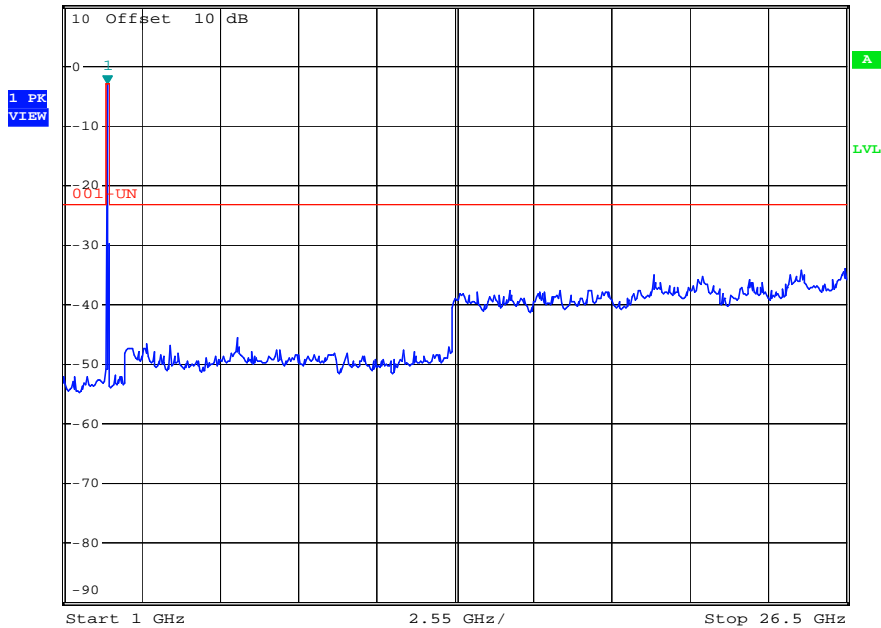


### 802.11n HT-20/ Channel Low (ANT 0)



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

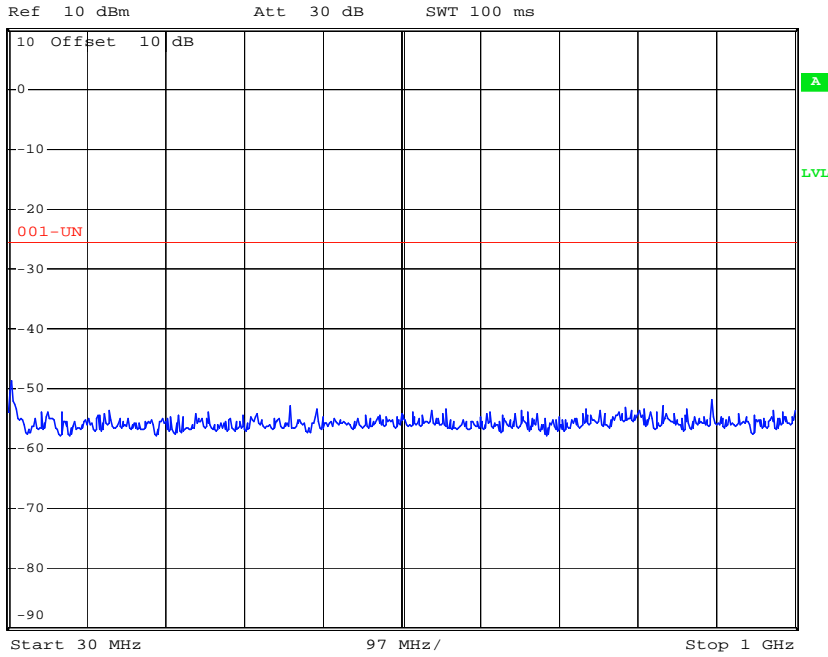


\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -5.45 dBm  
SWT 2.6 s 2.377000000 GHz

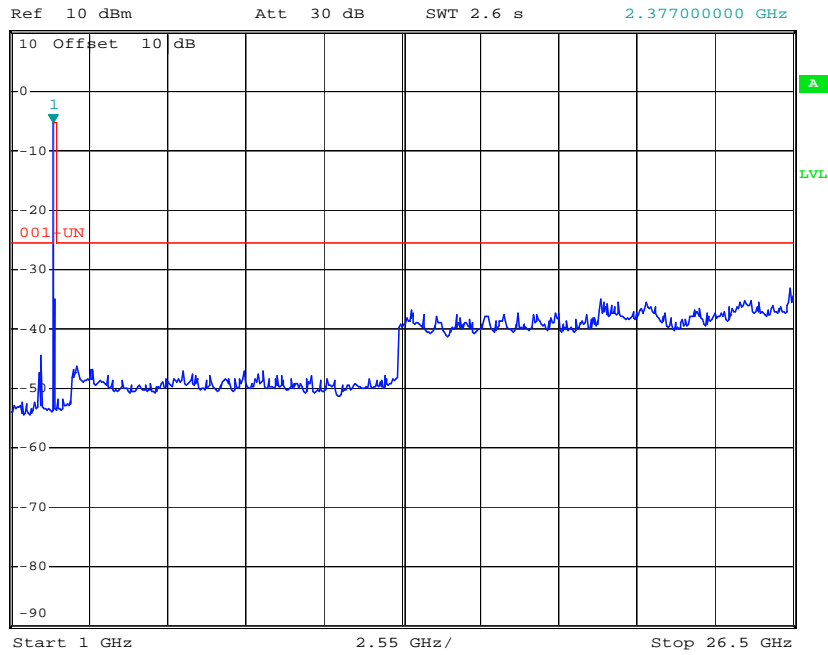


### 802.11n HT-20/ Channel Mid (ANT 0)



\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms


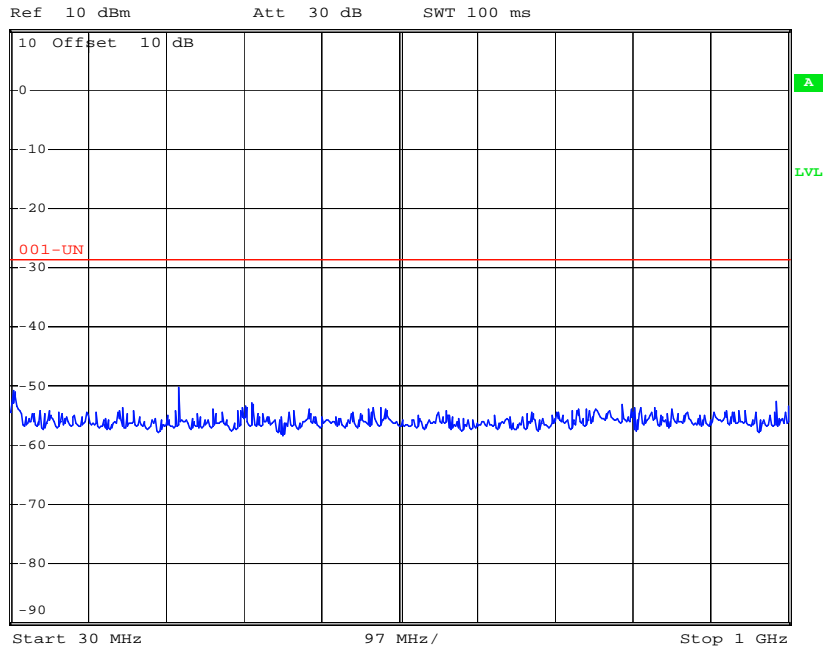


\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -8.75 dBm  
SWT 2.6 s 2.428000000 GHz


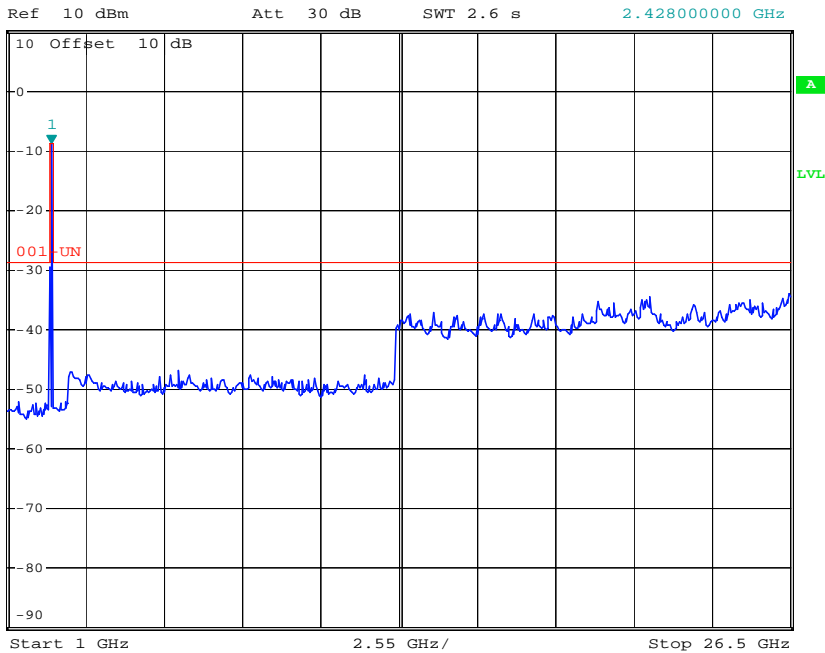






### 802.11n HT-20/ Channel High (ANT 0)

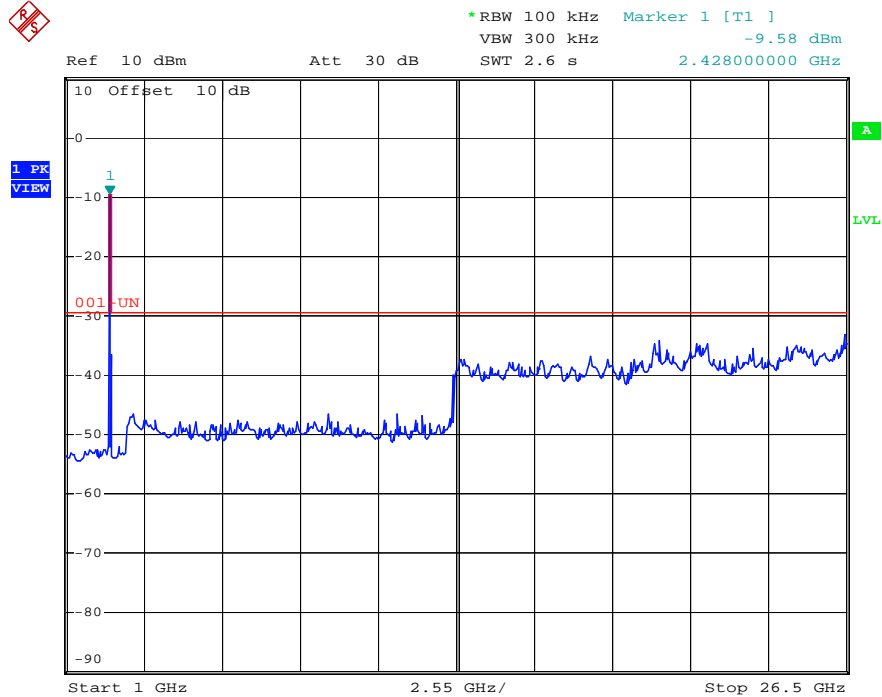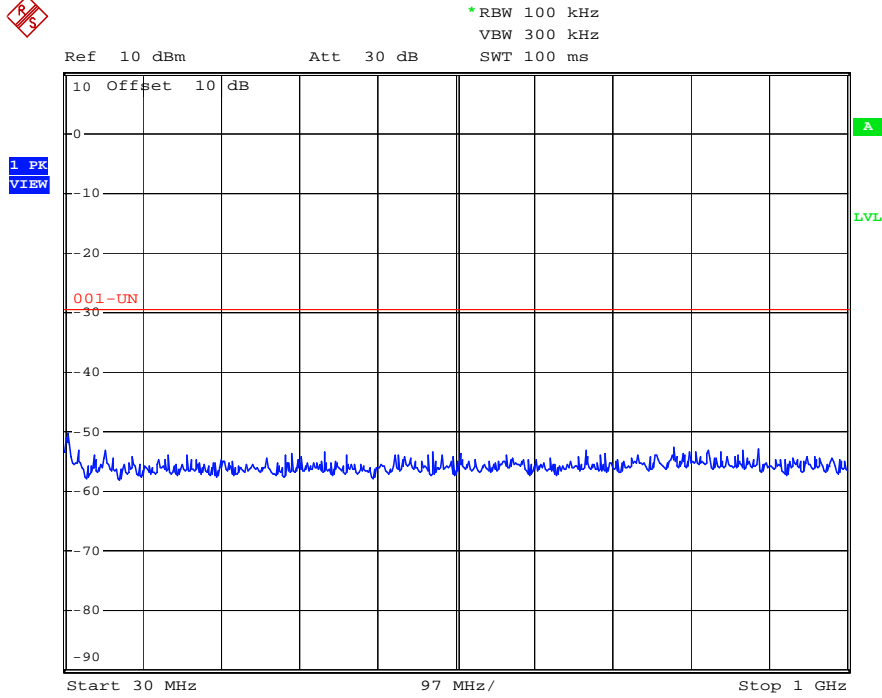

### 802.11n HT-20/ Channel Low (ANT 1)

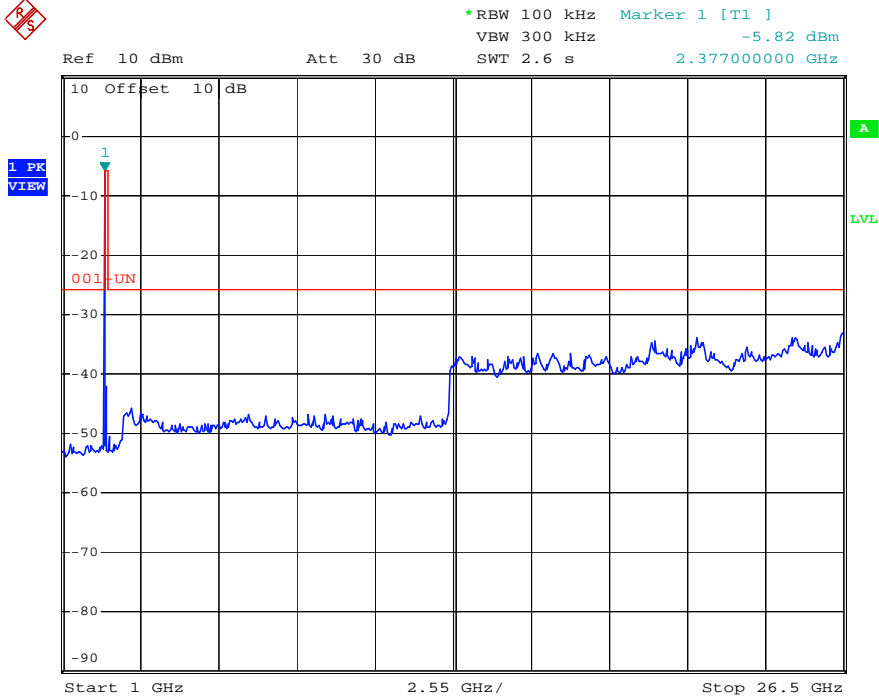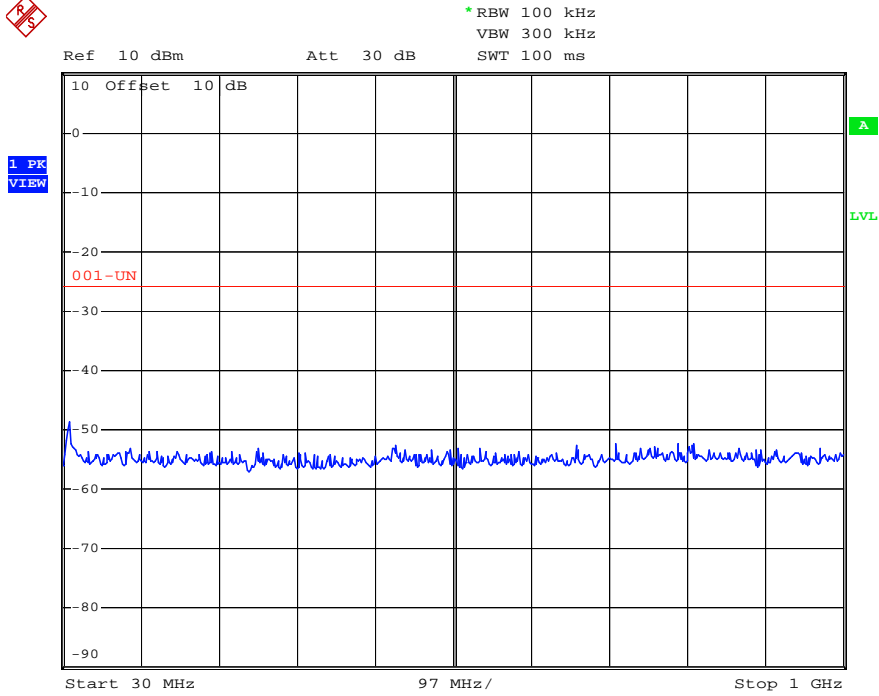


### 802.11n HT-20/ Channel Mid (ANT 1)

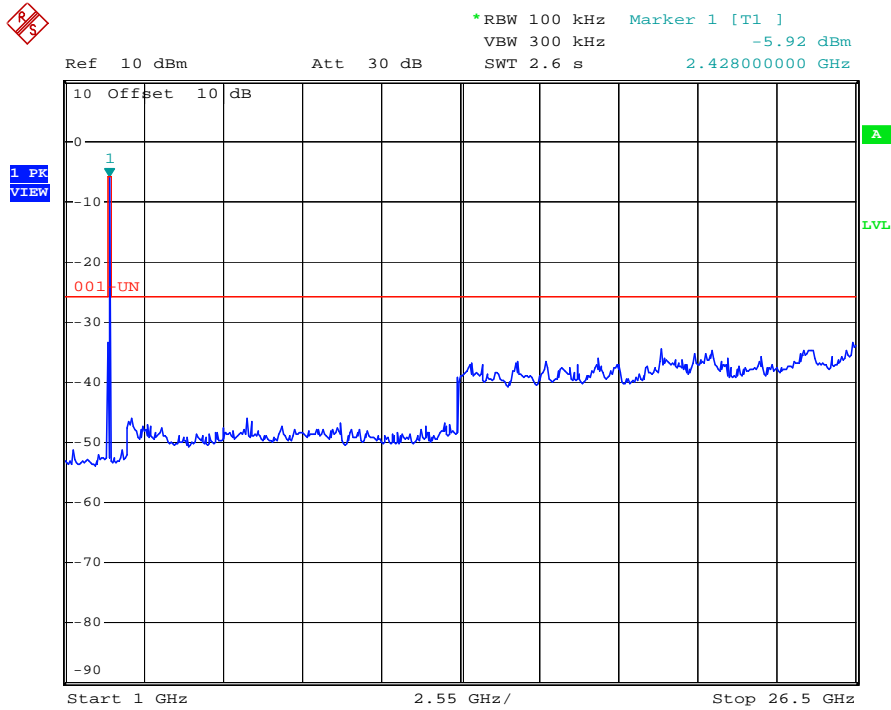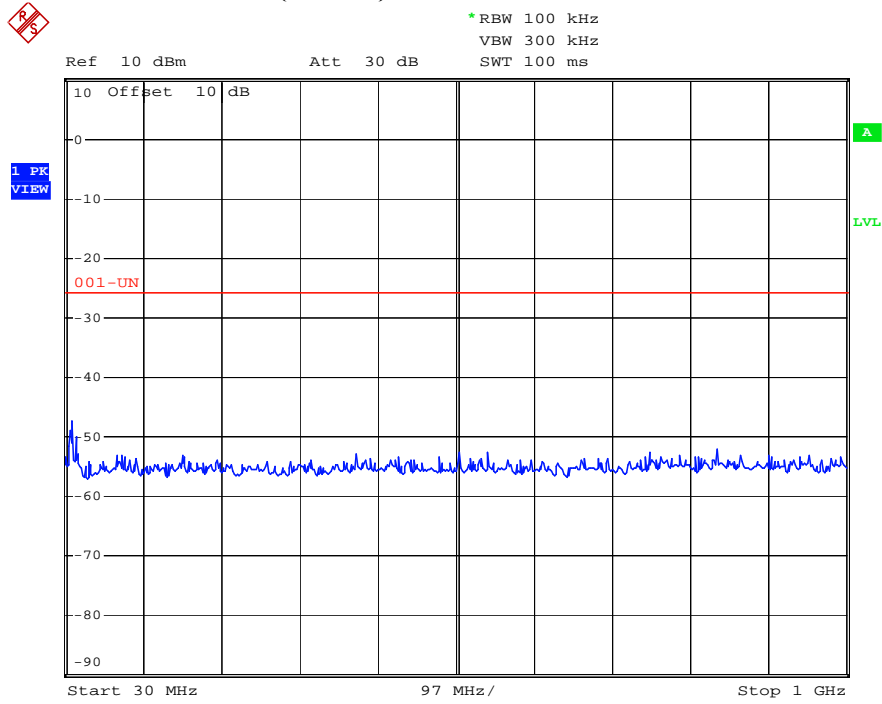


### 802.11n HT-20/ Channel High (ANT 1)





\*RBW 100 kHz  
\*VBW 300 kHz  
SWT 100 ms

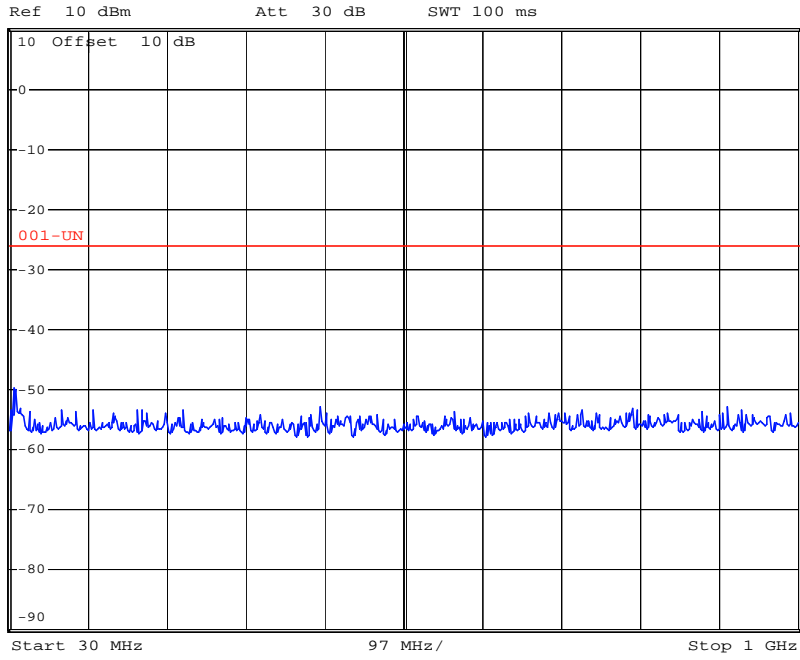



\*RBW 100 kHz Marker 1 [T1 ]  
\*VBW 3 MHz -5.98 dBm  
SWT 2.6 s 2.428000000 GHz

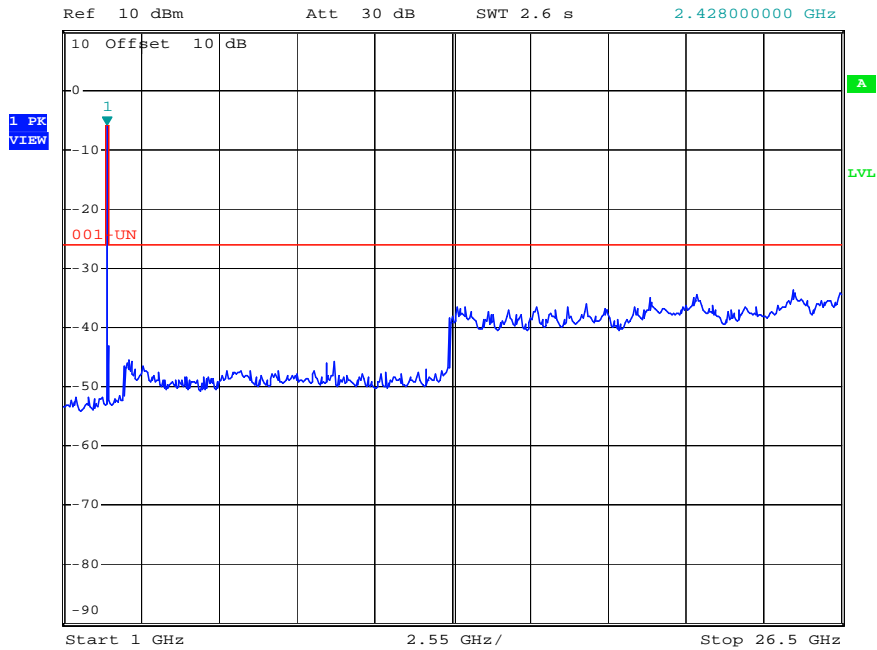



### 802.11n HT-40/ Channel Low (ANT 0)

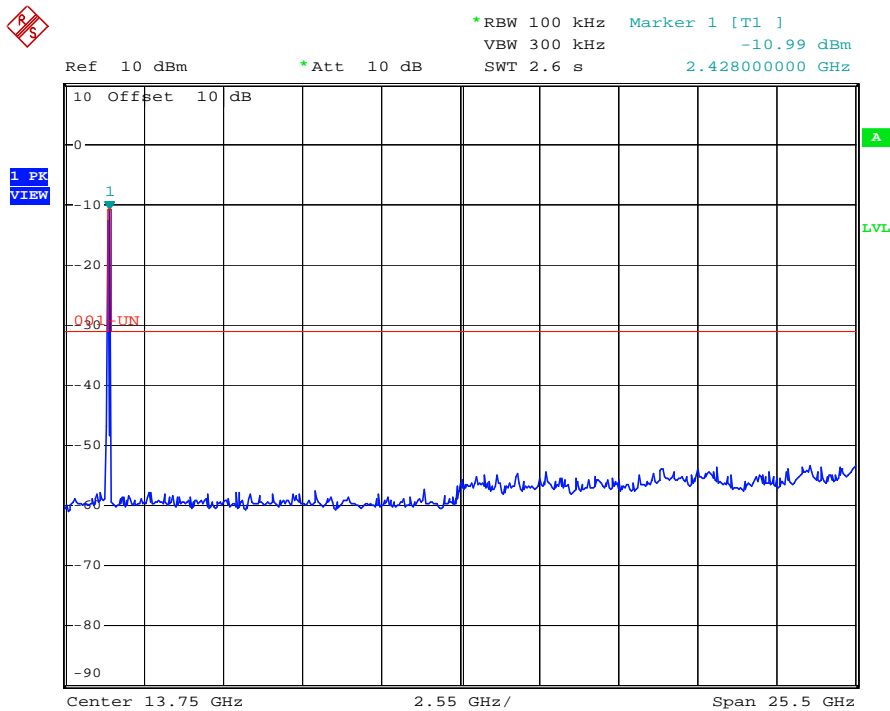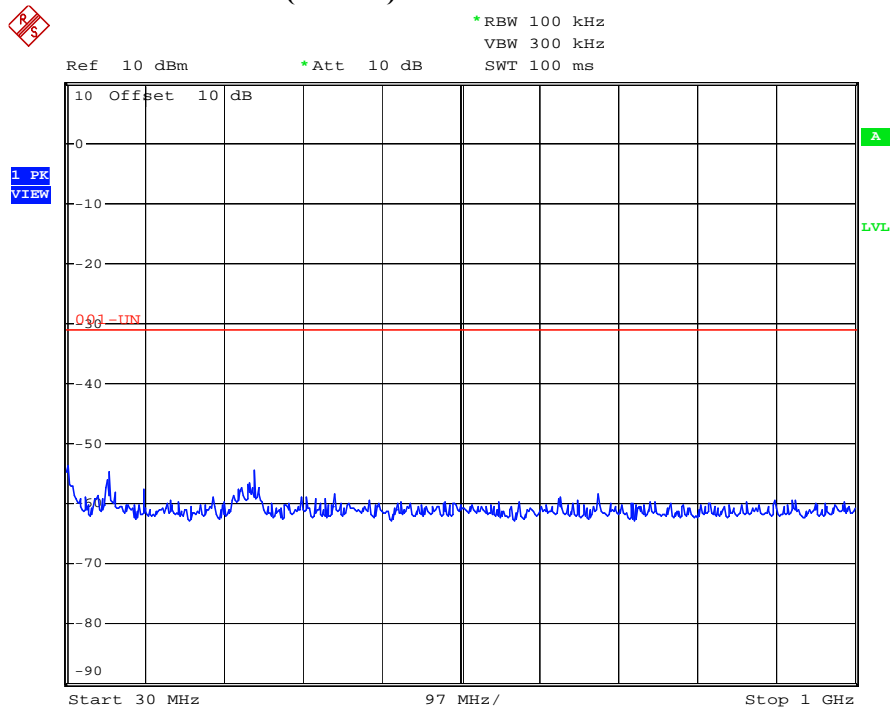



### 802.11n HT-40/ Channel Mid (ANT 0)

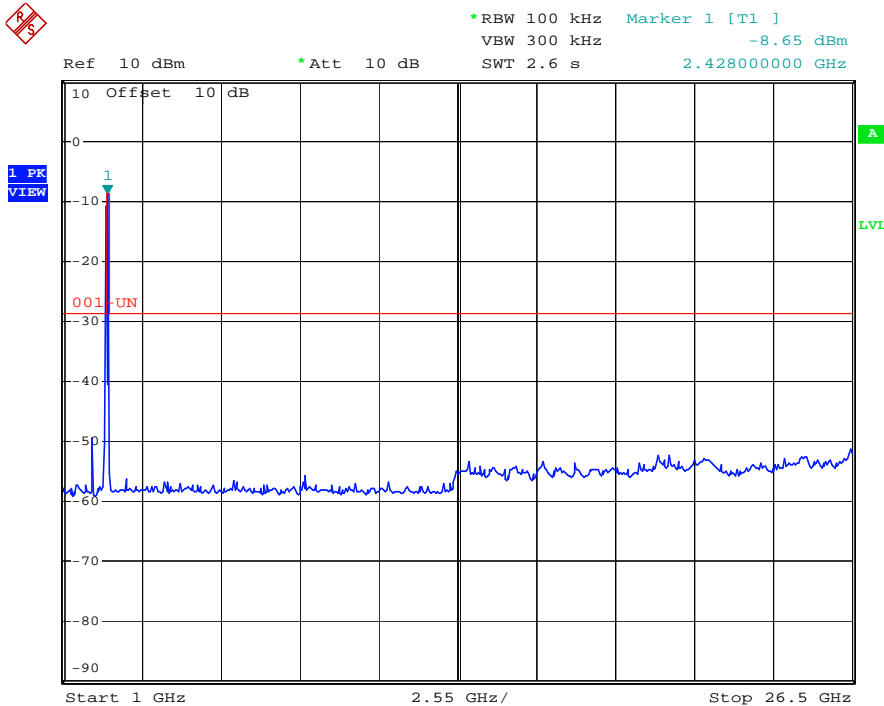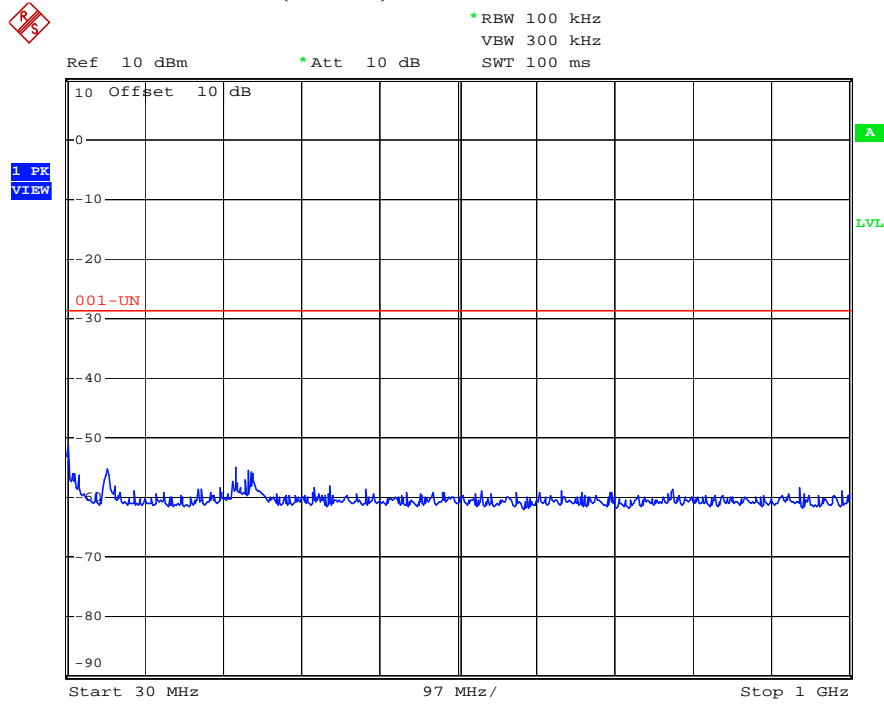

### 802.11n HT-40/ Channel High (ANT 0)

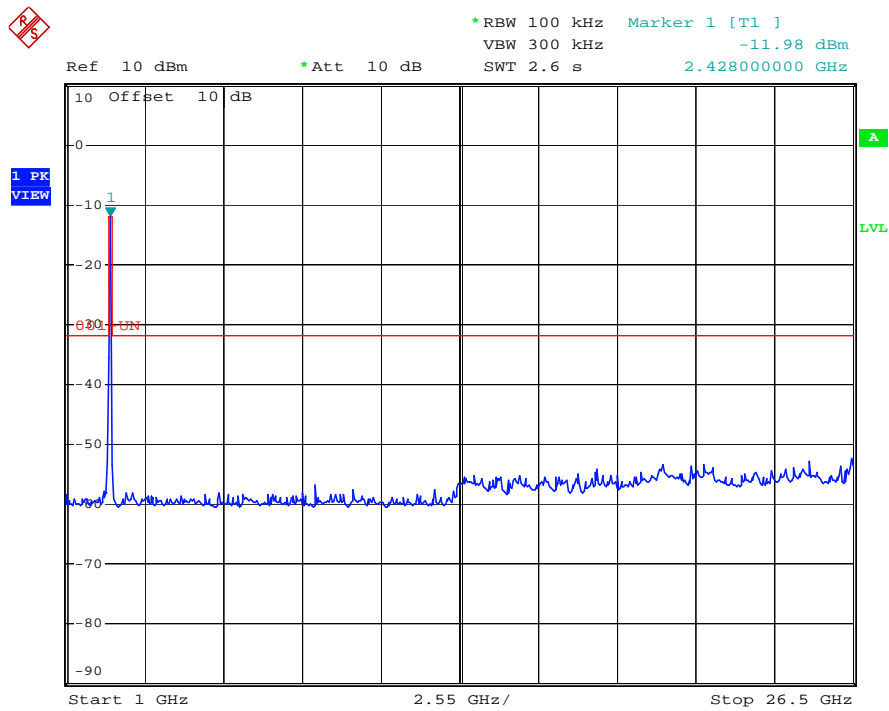
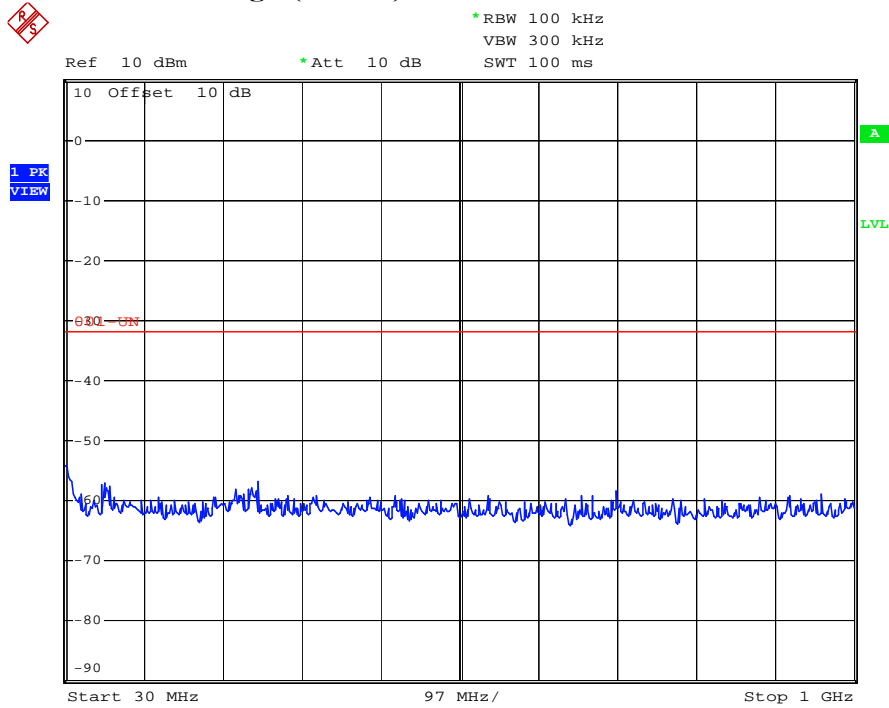


### 802.11n HT-40/ Channel Low (ANT 1)

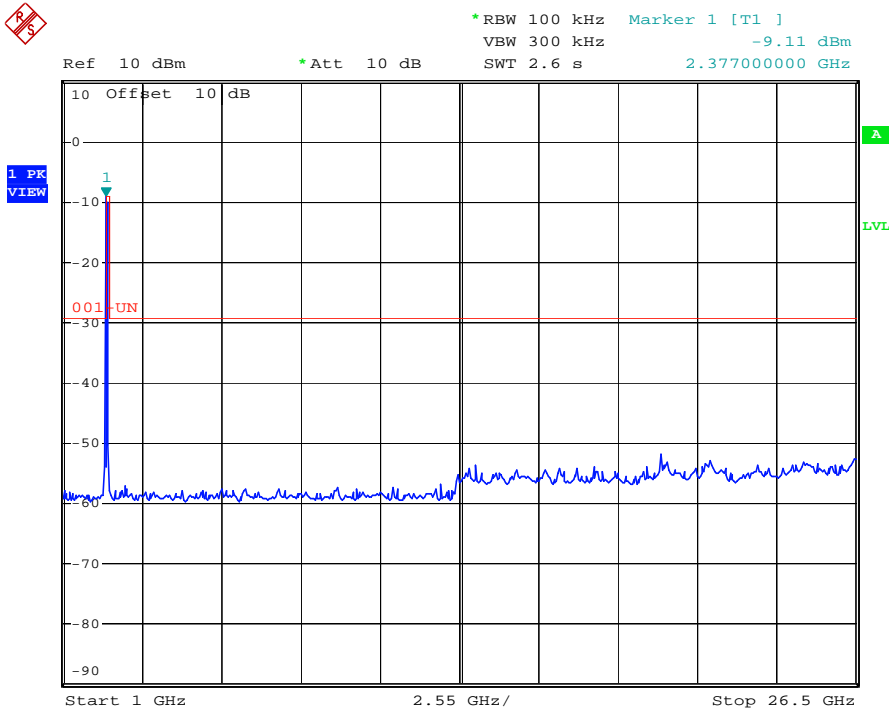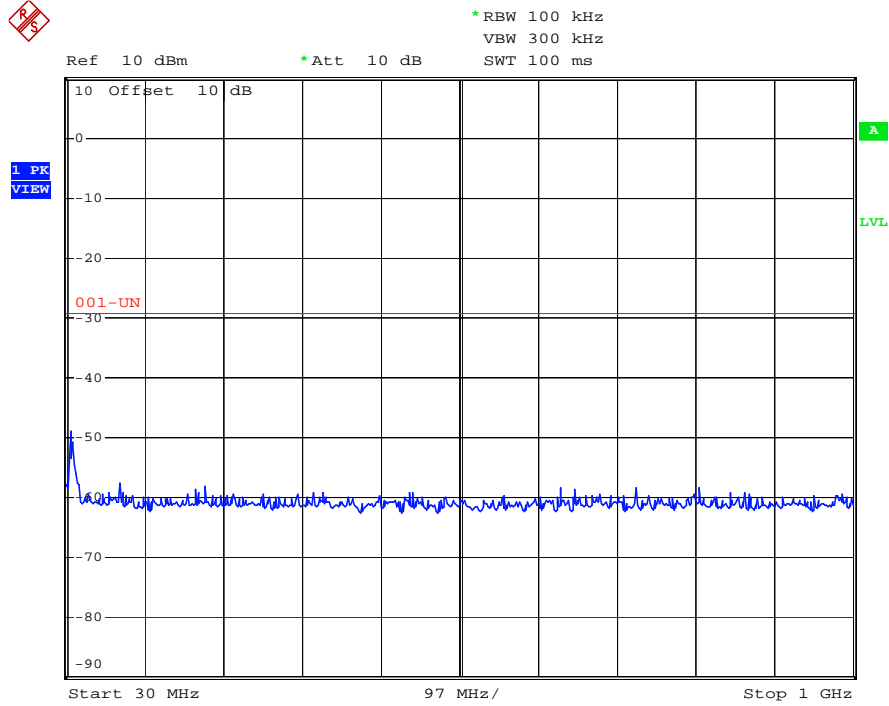



### 802.11n HT-40/ Channel Mid (ANT 1)

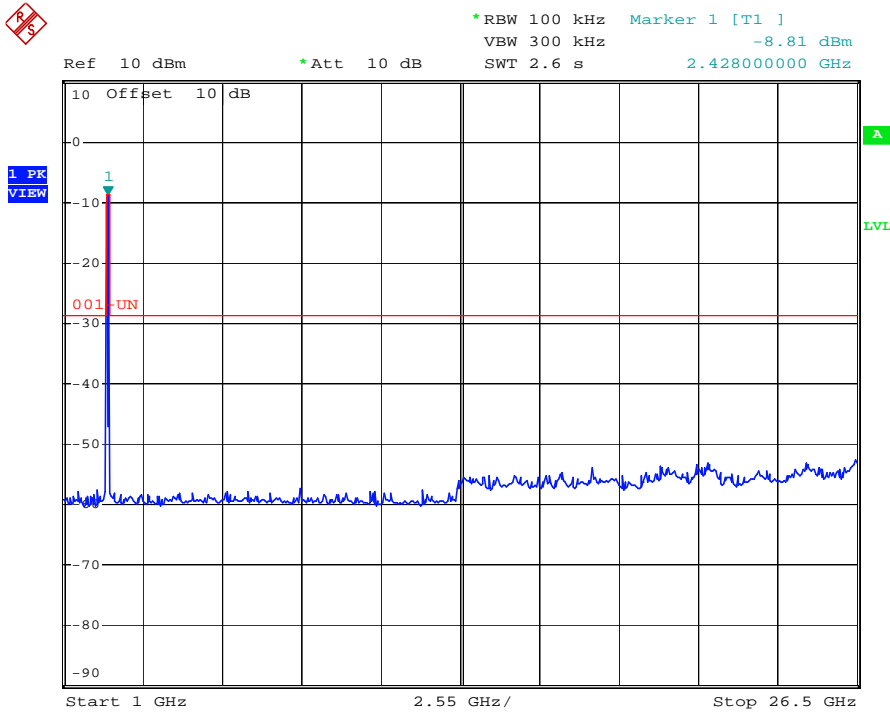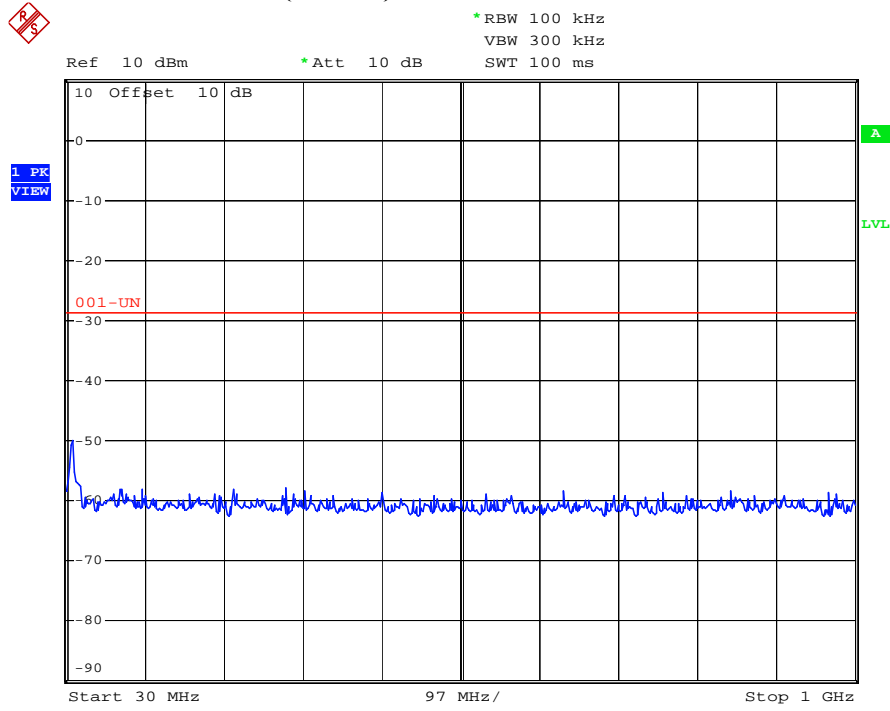


### 802.11n HT-40/ Channel High (ANT 1)




\*RBW 100 kHz  
VBW 300 kHz  
SWT 100 ms

Ref 10 dBm \*Att 10 dB

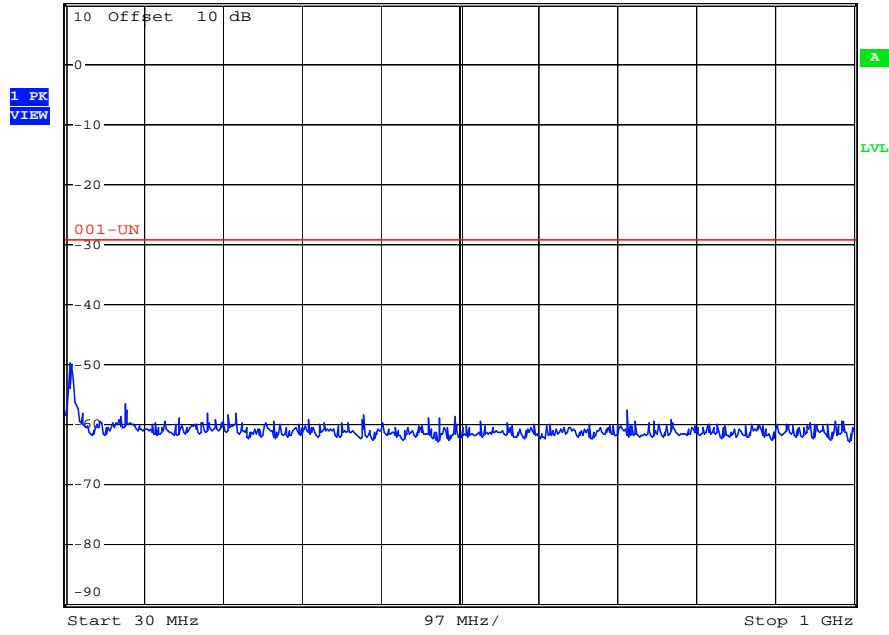

\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -9.34 dBm  
SWT 2.6 s 2.428000000 GHz

Ref 10 dBm \*Att 10 dB

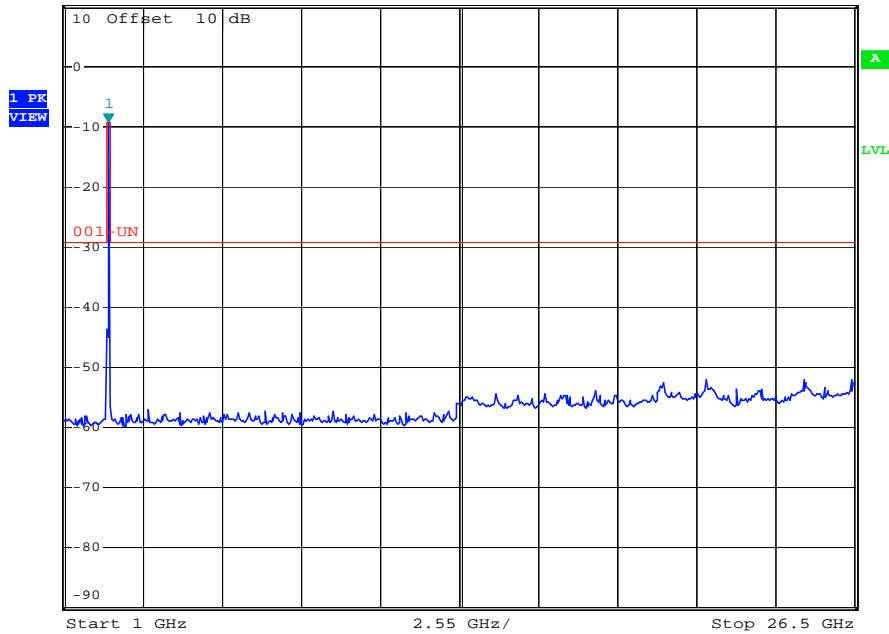

## 12. DUTY CYCLE

### 12.1 Standard Applicable

None. Reference only.

### 12.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02

### 12.3 Measurement Data

Test Date : Jul. 14, 2017      Temperature : 23 °C      Humidity : 55 %

#### Duty Cycle Calculation



Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
802.11b	1.02	0.98	96.1	1.020	3
802.11g	0.42	0.196	46.7	5.102	10
802.11n HT-20 (ANT 0)	0.75	0.70	93.3	1.428	3
802.11n HT-20 (ANT 1)	0.75	0.70	93.3	1.428	3
802.11n HT-40 (ANT 0)	0.75	0.68	90.7	1.471	3
802.11n HT-40 (ANT 1)	0.75	0.68	90.7	1.471	3

Note:



1. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is  $>1/T$  where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots..



### 802.11b

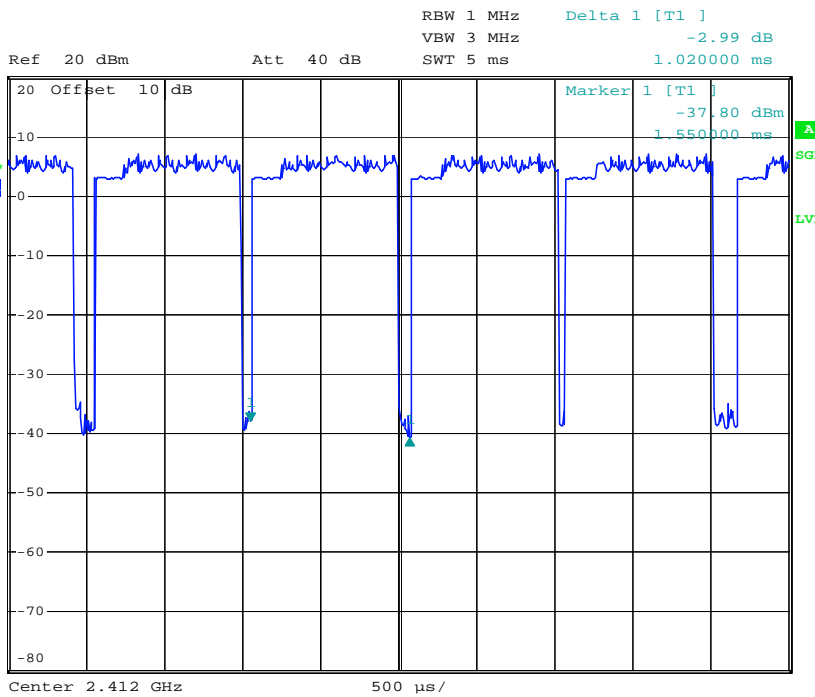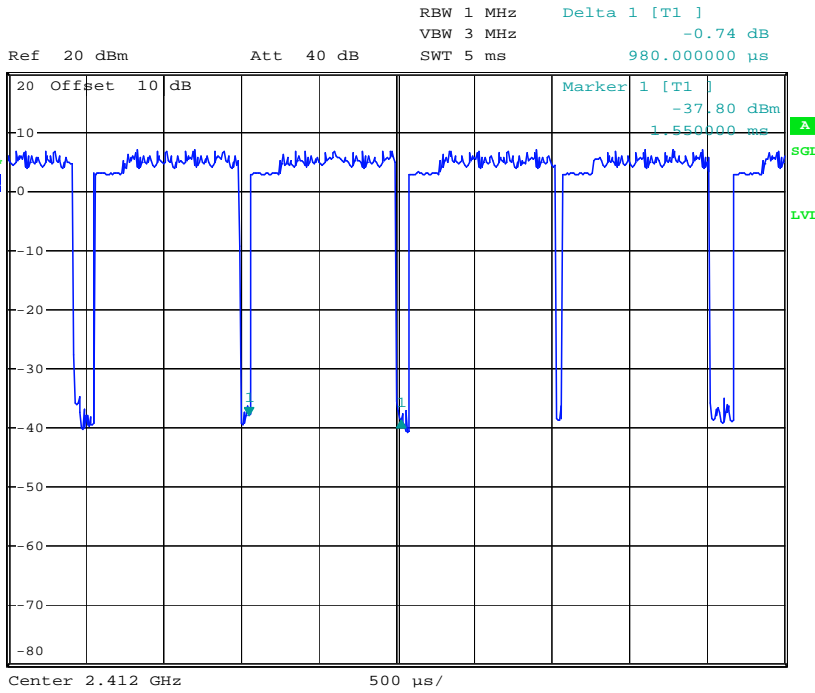



### 802.11g

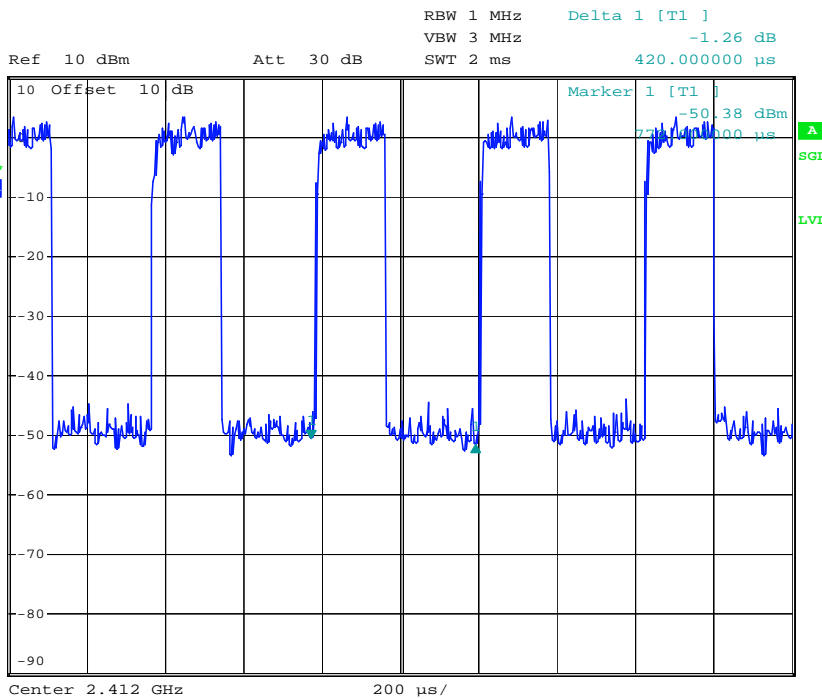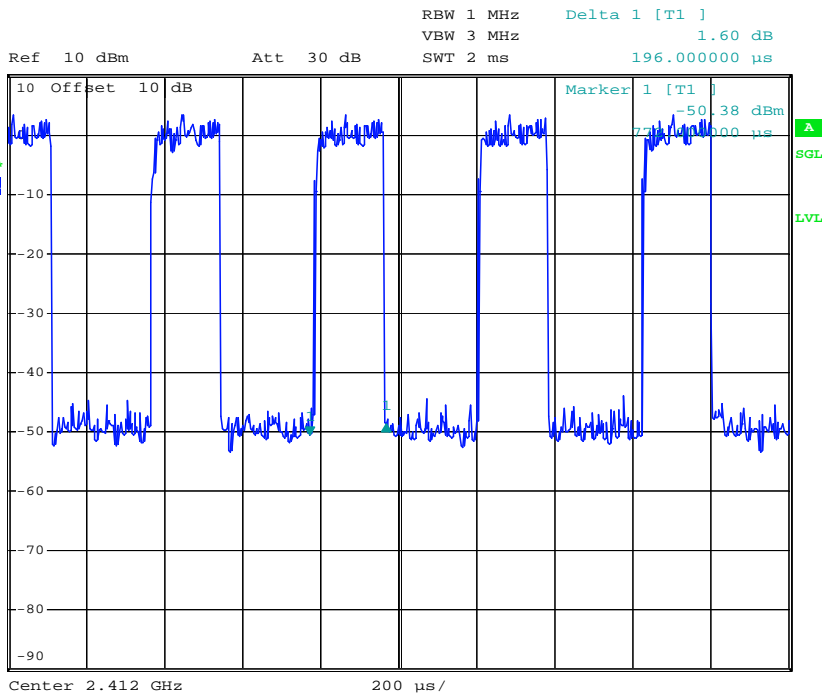



### 802.11n HT-20 (ANT 0)

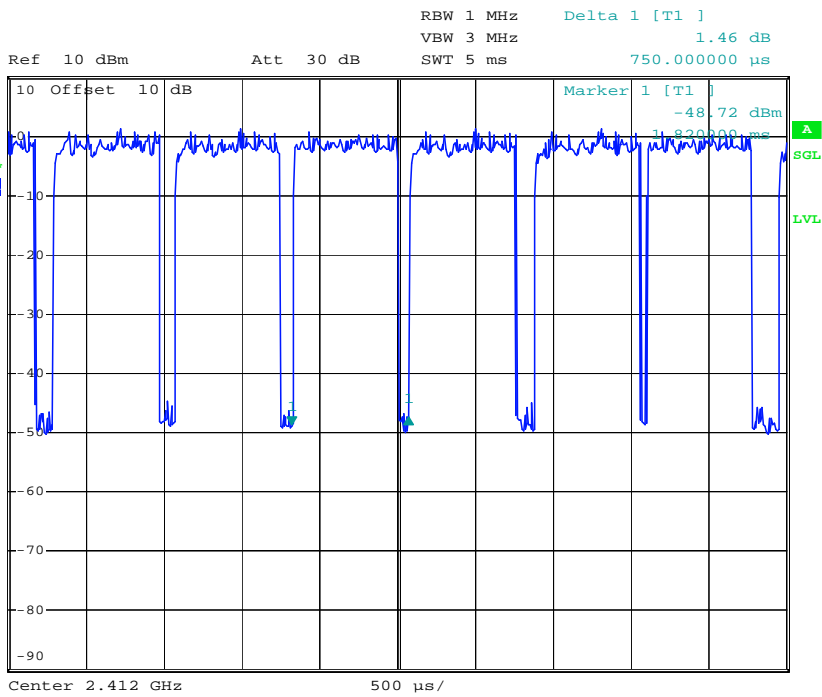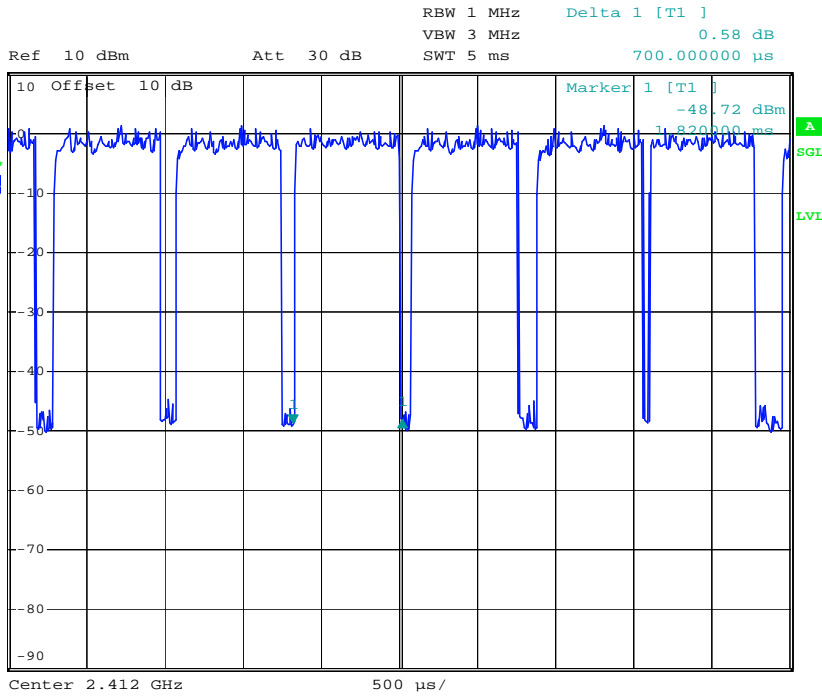

### 802.11n HT-20 (ANT 1)

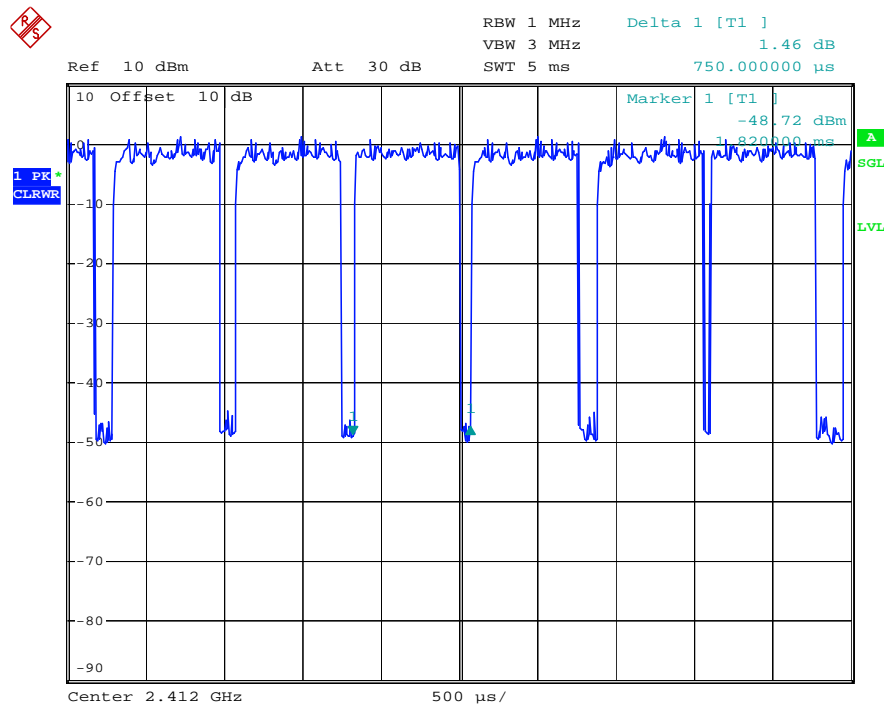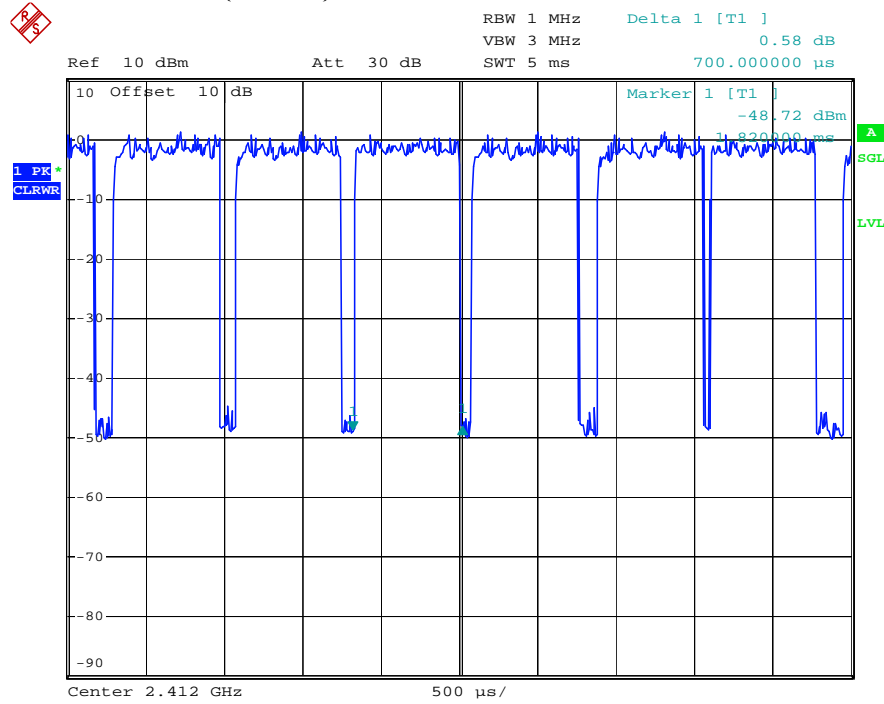

### 802.11n HT-40 (ANT 0)

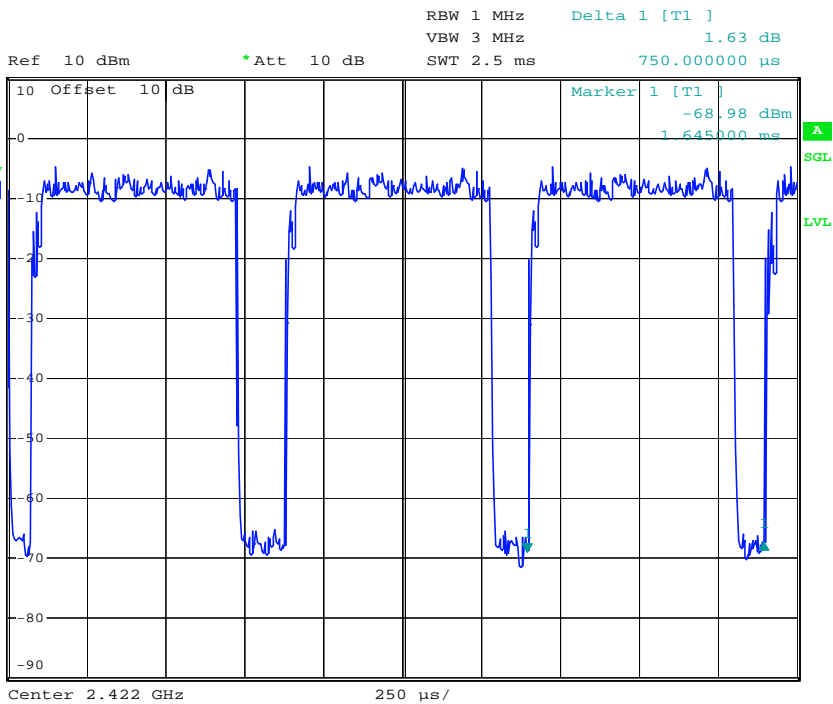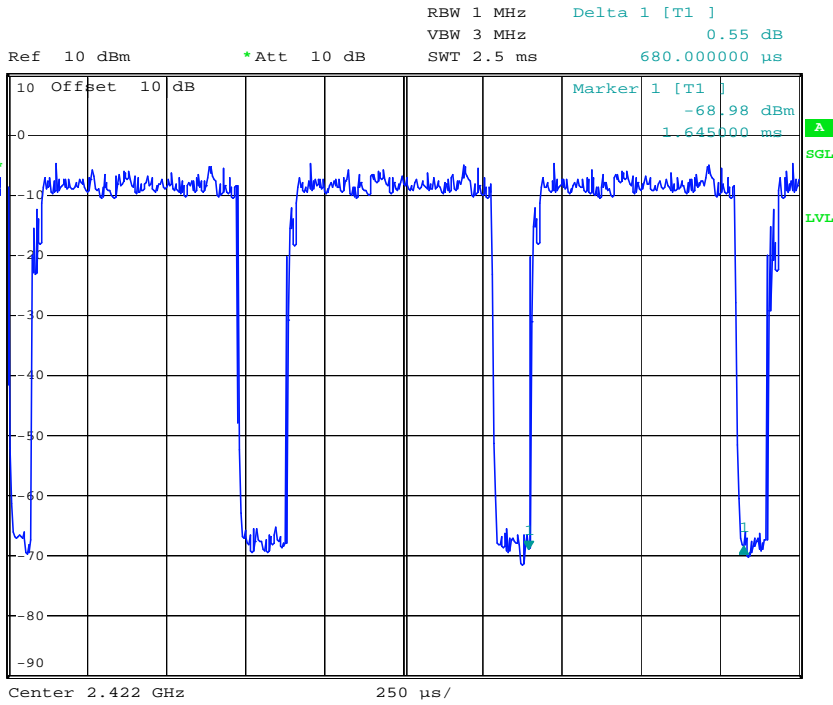



### 802.11n HT-40 (ANT 1)

