



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



#### 802.11b DSSS Modulation



**NOTE 1:** The band edge emission plot on the next page shows 51.20dBc between carrier maximum power and local maximum emission in restrict band (2.3656GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.36dBuV/m (Peak), so the maximum field strength in restrict band is  $107.36 - 51.20 = 56.16$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 59.60dBc between carrier maximum power and local maximum emission in restrict band (2.3696GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.12dBuV/m (Average), so the maximum field strength in restrict band is  $104.12 - 59.60 = 44.52$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 51.35dBc between carrier maximum power and local maximum emission in restrict band (2.4993GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.49dBuV/m (Peak), so the maximum field strength in restrict band is  $108.49 - 51.35 = 57.14$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 60.34dBc between carrier maximum power and local maximum emission in restrict band (2.5000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.69dBuV/m (Average), so the maximum field strength in restrict band is  $104.69 - 60.34 = 44.35$ dBuV/m which is under 54dBuV/m limit.

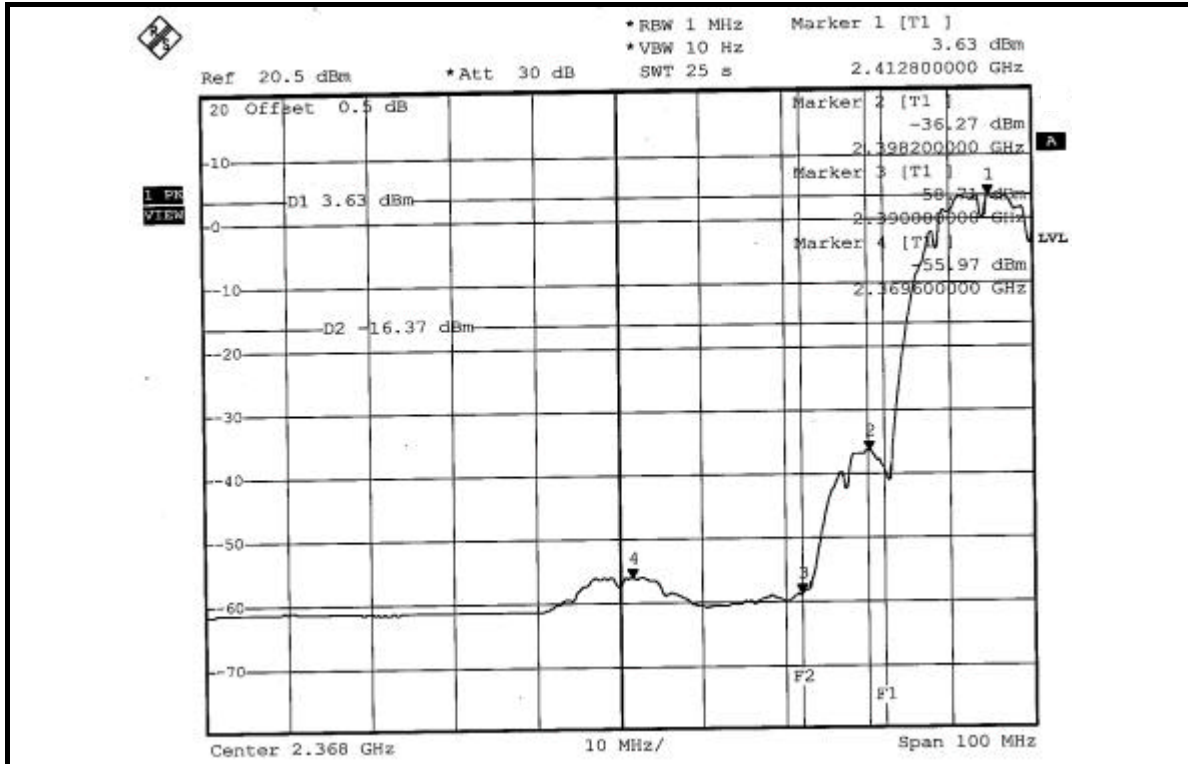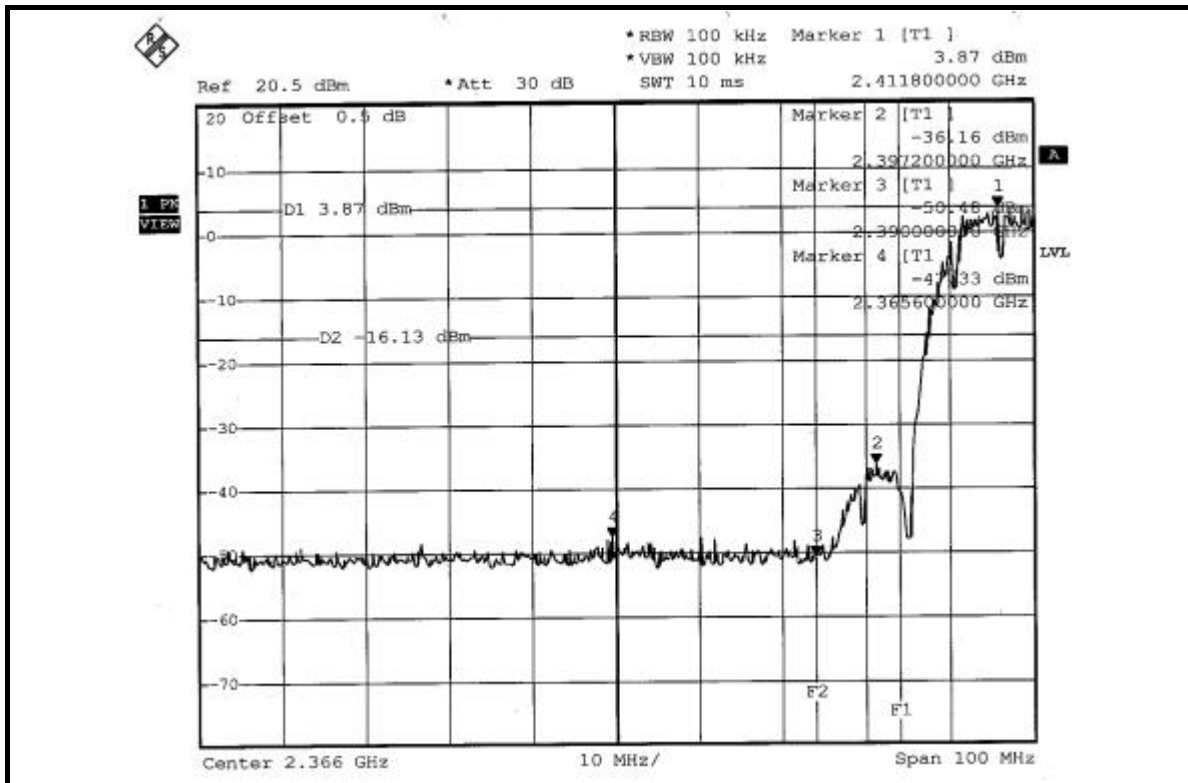

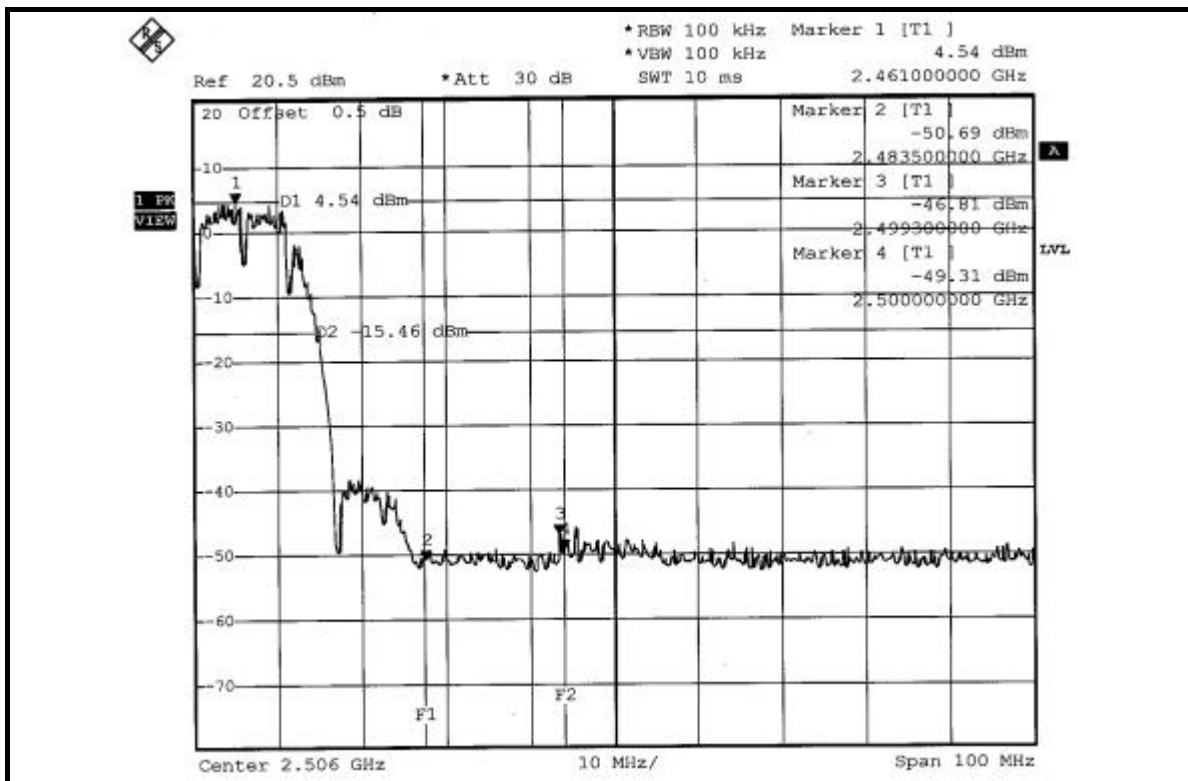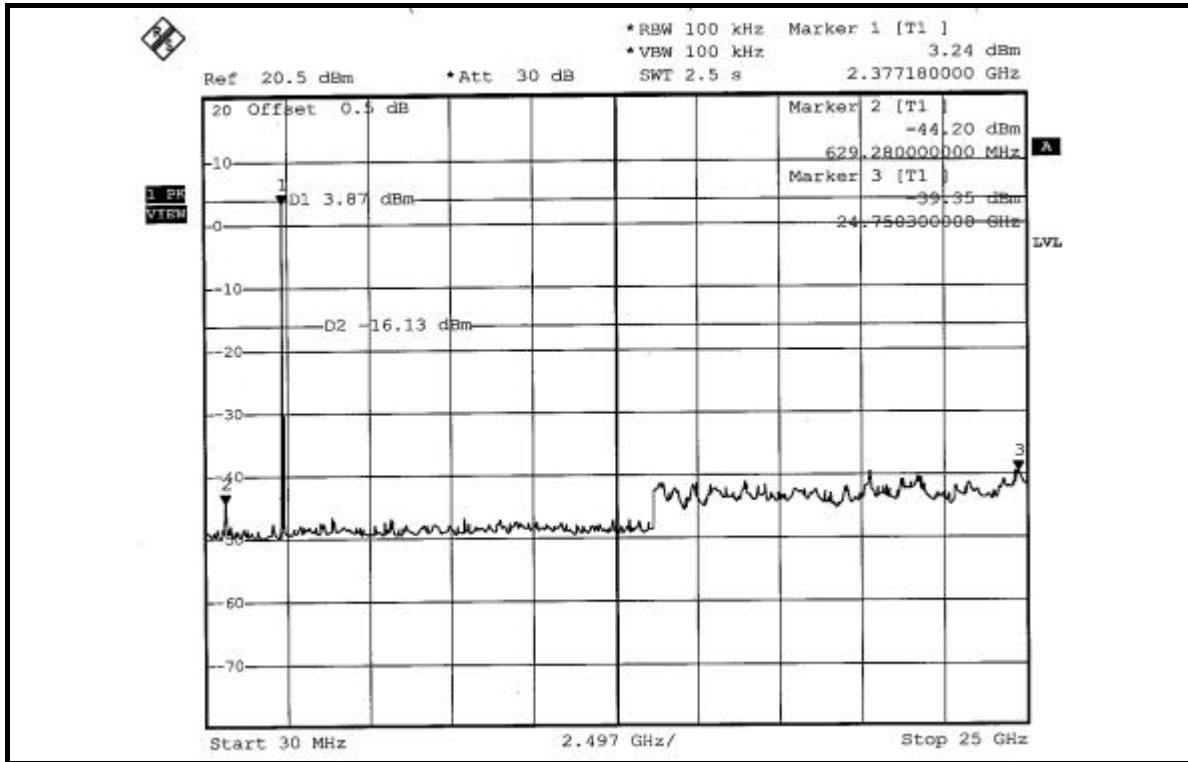

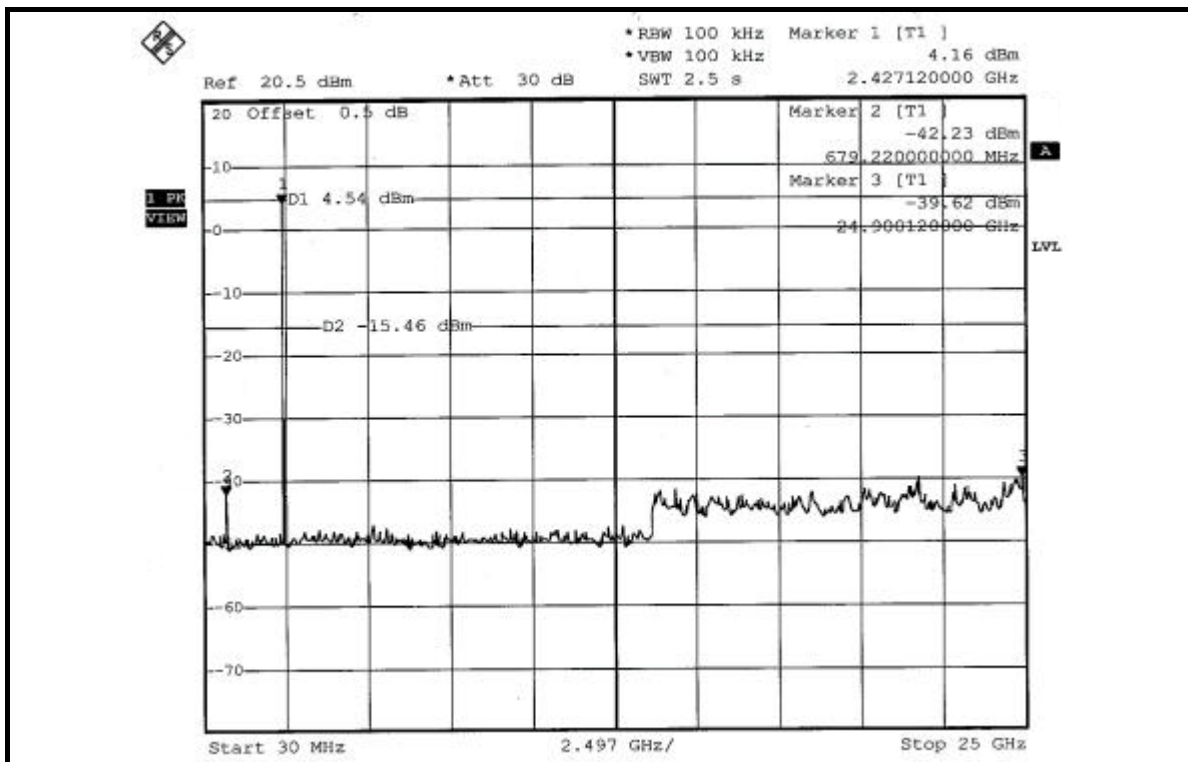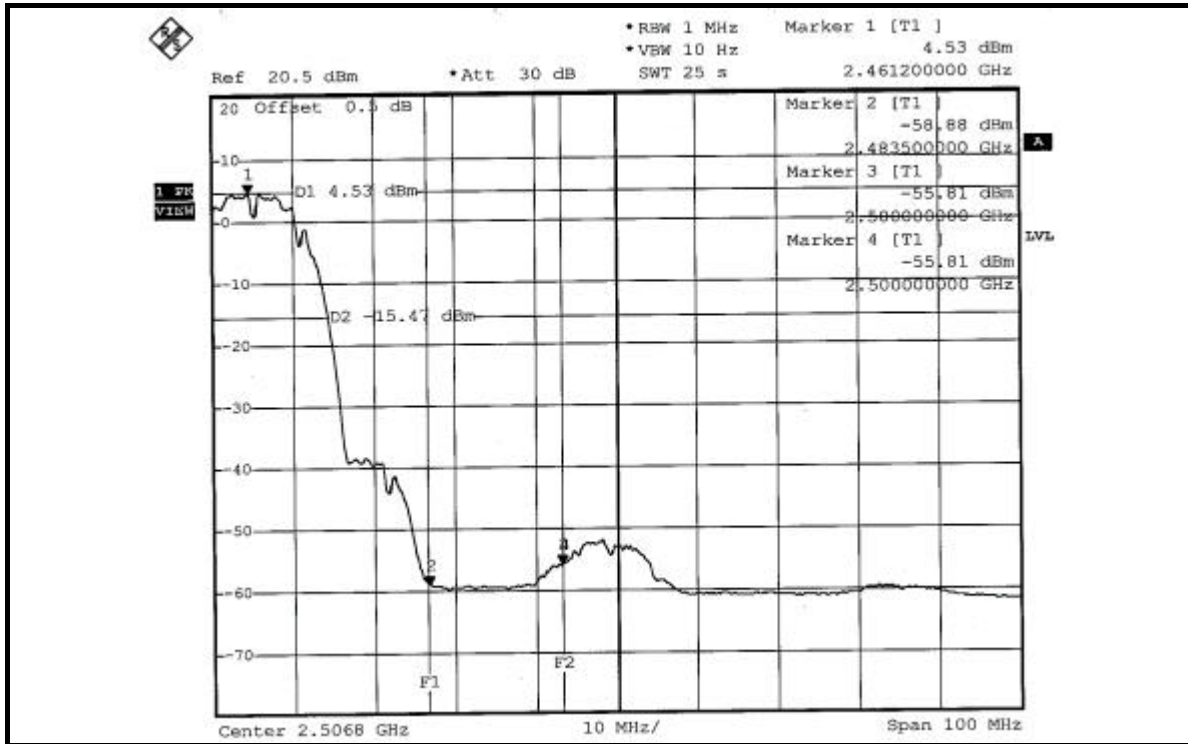



### 802.11g OFDM Modulation



**NOTE 1:** The band edge emission plot on the next page shows 47.87dBc between carrier maximum power and local maximum emission in restrict band (2.3468GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.42dBuV/m (Peak), so the maximum field strength in restrict band is  $108.42-47.87=60.55$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on the next page shows 50.25dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.20dBuV/m (Average), so the maximum field strength in restrict band is  $99.20-50.25=48.95$ dBuV/m which is under 54dBuV/m limit.



**NOTE 2:** The band edge emission plot on the next second page shows 47.06dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.22dBuV/m (Peak), so the maximum field strength in restrict band is  $108.22-47.06=61.16$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 50.91dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.42dBuV/m (Average), so the maximum field strength in restrict band is  $98.42-50.91=47.51$ dBuV/m which is under 54dBuV/m limit.

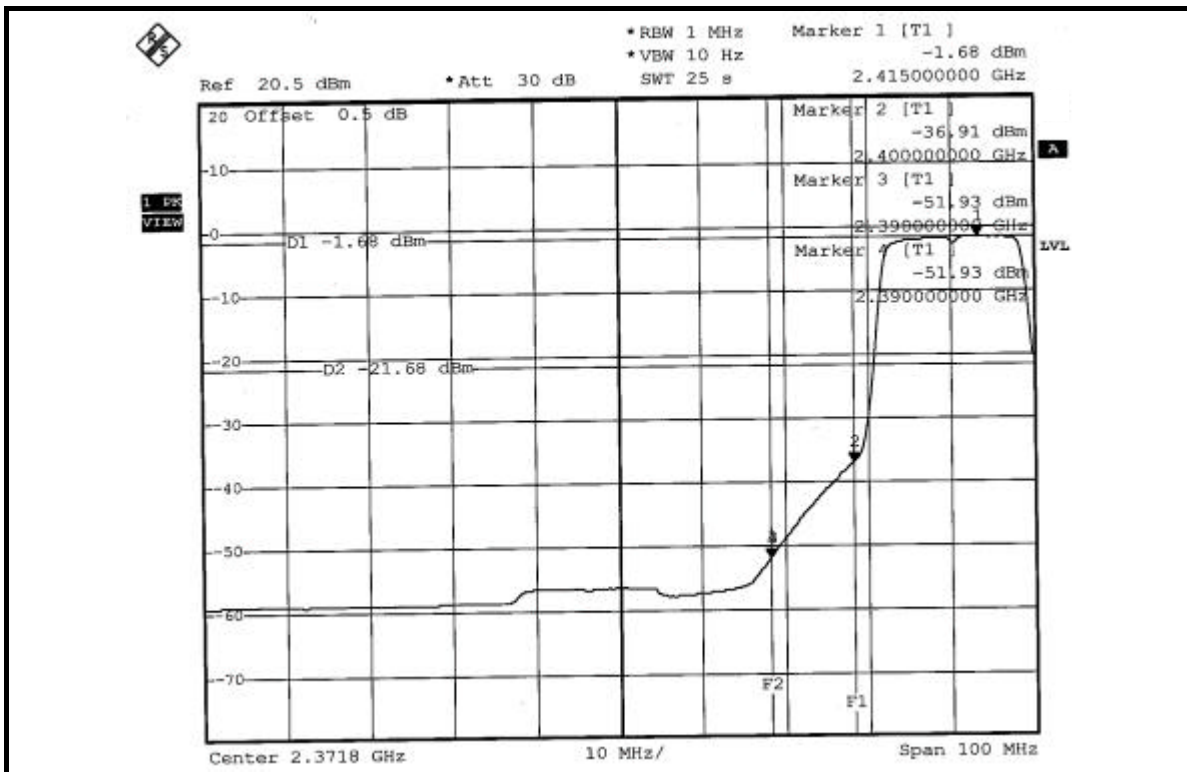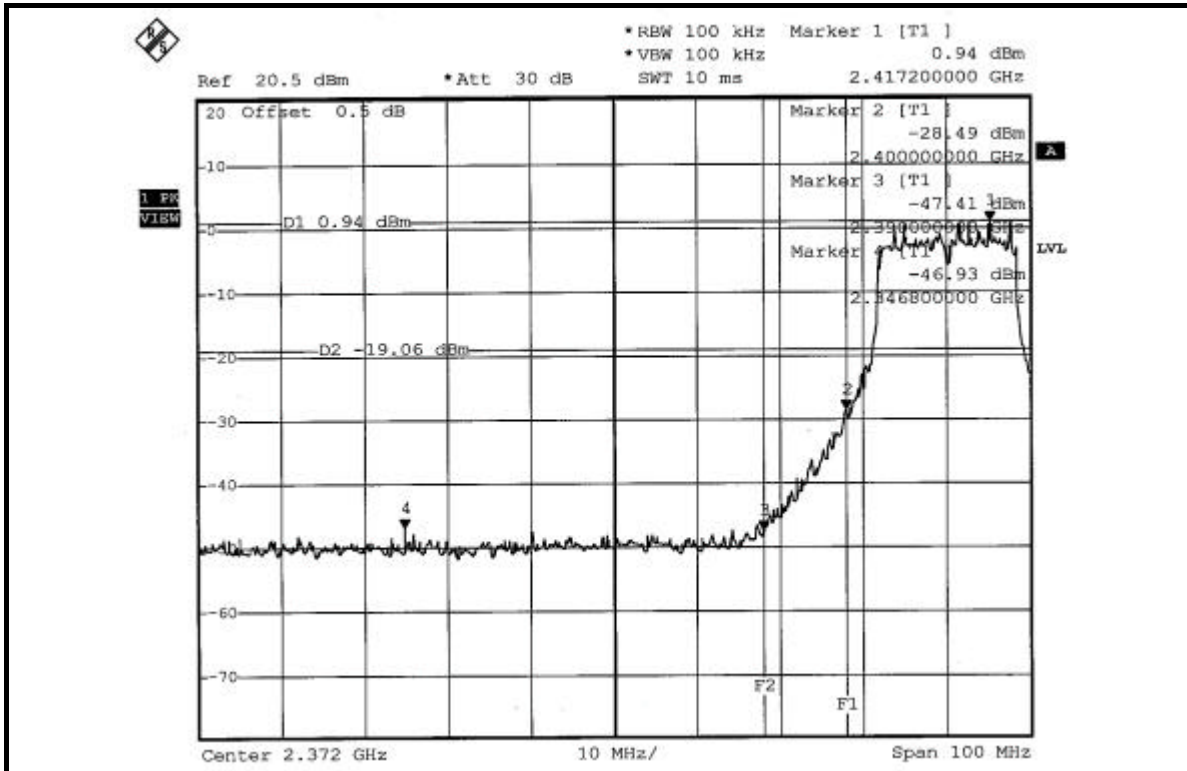

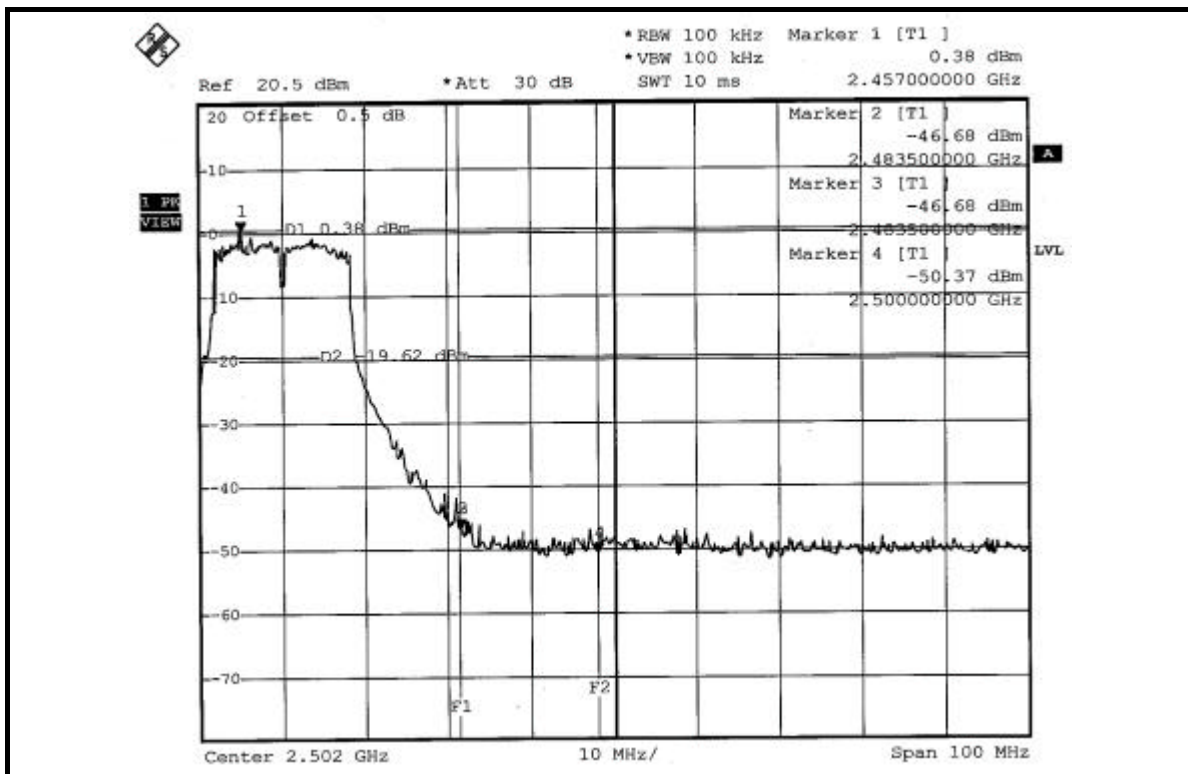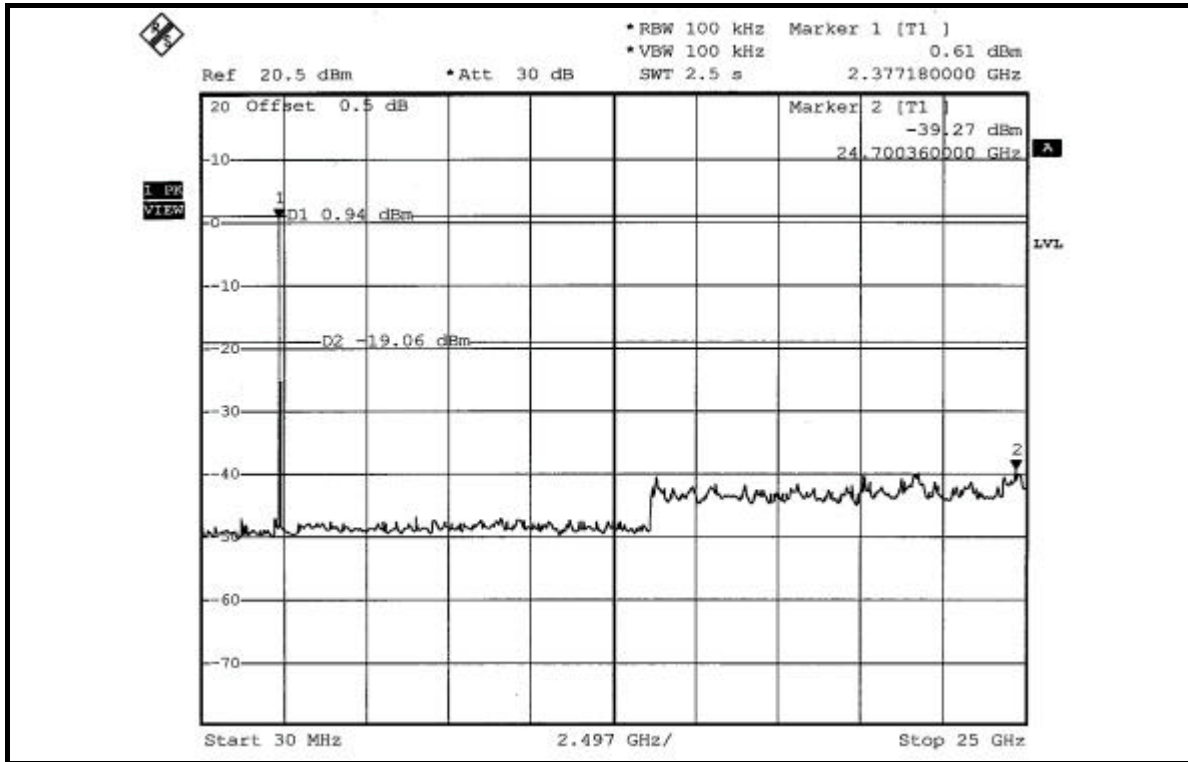



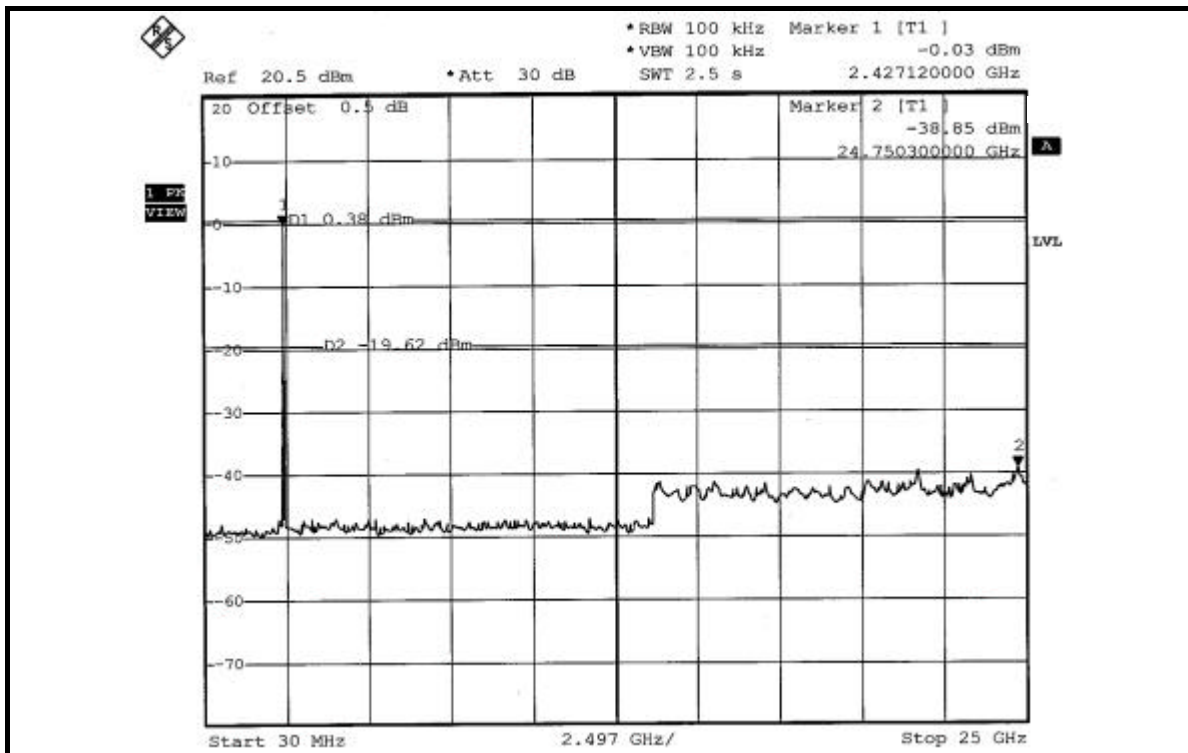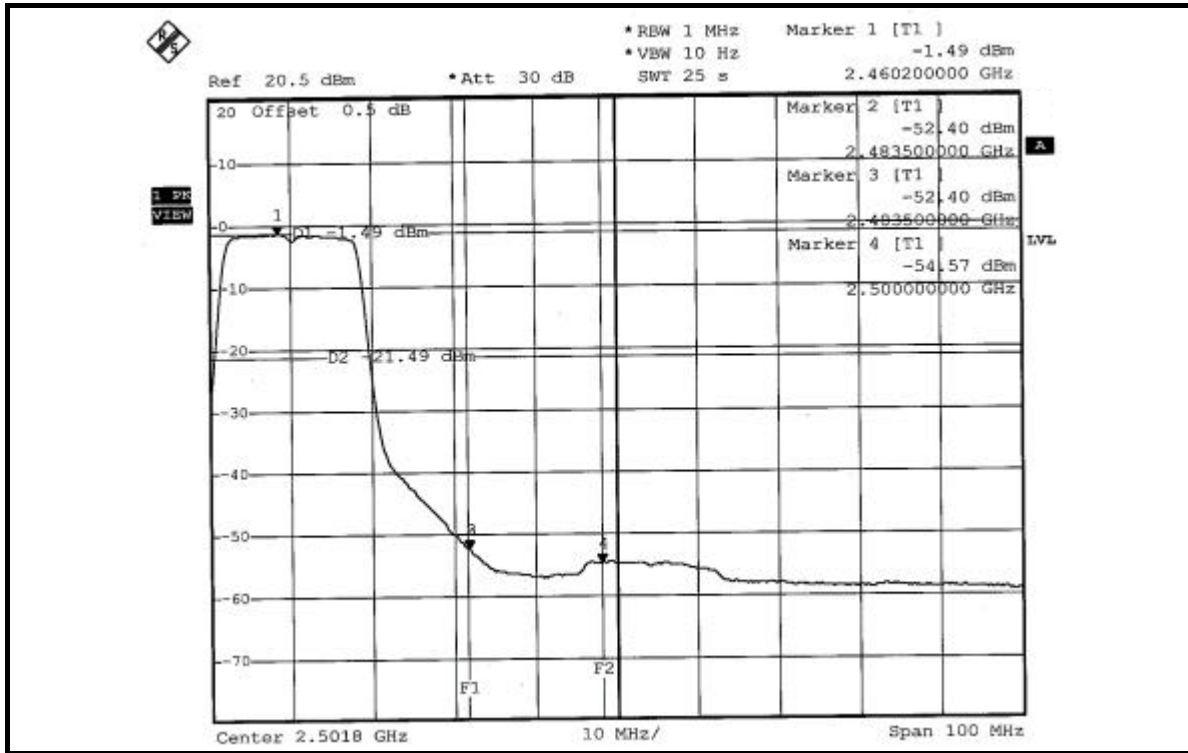

## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 1.96dBi.



## 5. TEST TYPES AND RESULTS (FOR 802.11a 5745~5825MHz Band)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
    - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
    - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 07, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  - The test was performed in HwaYa Shielded Room 1.
  - The VCCI Site Registration No. is C-2040.


### 5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

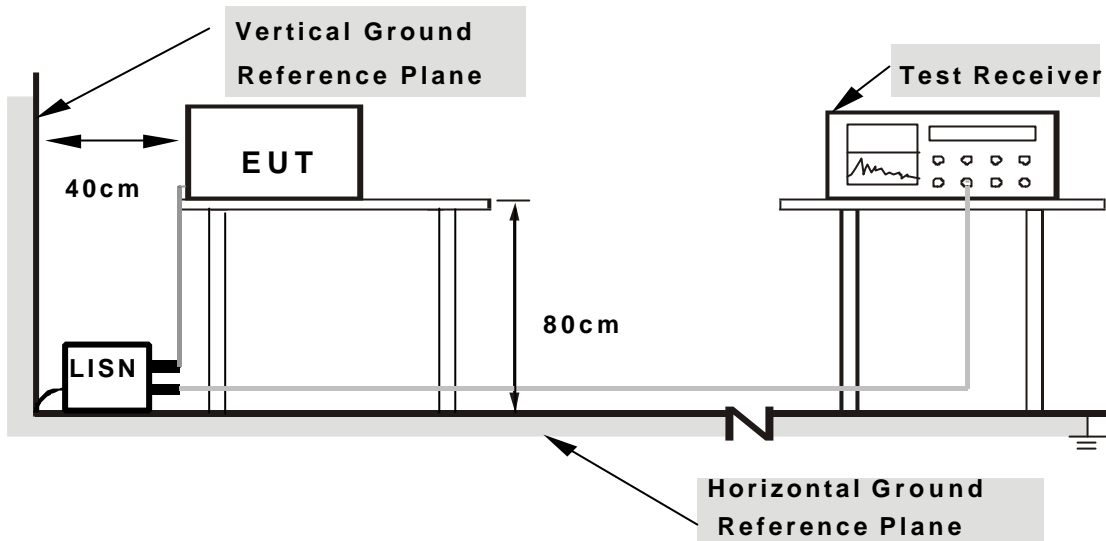

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6


### 5.1.7 TEST RESULTS

#### Conducted Worst-Case Data

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.10	42.90	-	43.00	-	63.11	53.11	-20.11	-
2	0.318	0.10	30.07	-	30.17	-	59.77	49.77	-29.60	-
3	0.537	0.12	21.26	-	21.38	-	56.00	46.00	-34.62	-
4	1.527	0.20	29.24	-	29.44	-	56.00	46.00	-26.56	-
5	9.629	0.46	30.79	-	31.25	-	60.00	50.00	-28.75	-
6	13.906	0.59	33.76	-	34.35	-	60.00	50.00	-25.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

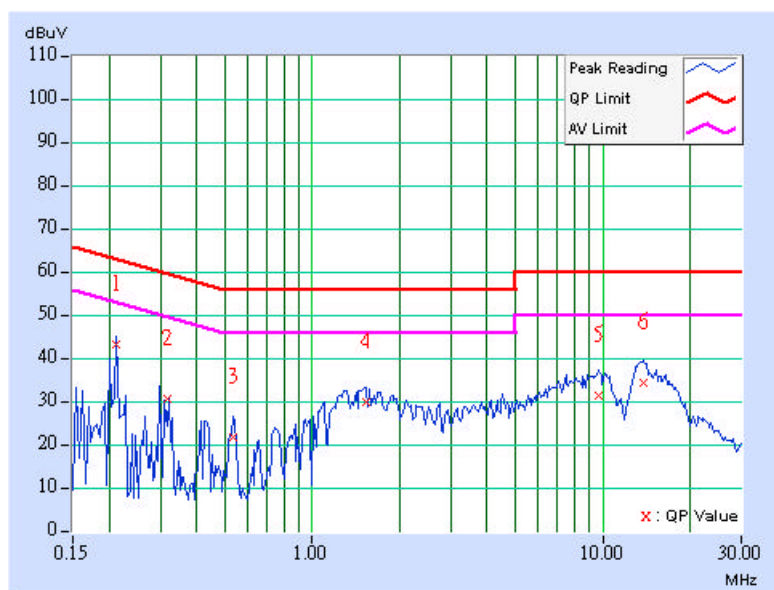

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.10	43.04	-	43.14	-	63.26	53.26	-20.12	-
2	0.314	0.10	31.70	-	31.80	-	59.86	49.86	-28.06	-
3	0.525	0.10	23.59	-	23.69	-	56.00	46.00	-32.31	-
4	1.453	0.15	25.44	-	25.59	-	56.00	46.00	-30.41	-
5	9.738	0.46	31.05	-	31.51	-	60.00	50.00	-28.49	-
6	13.695	0.51	33.85	-	34.36	-	60.00	50.00	-25.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

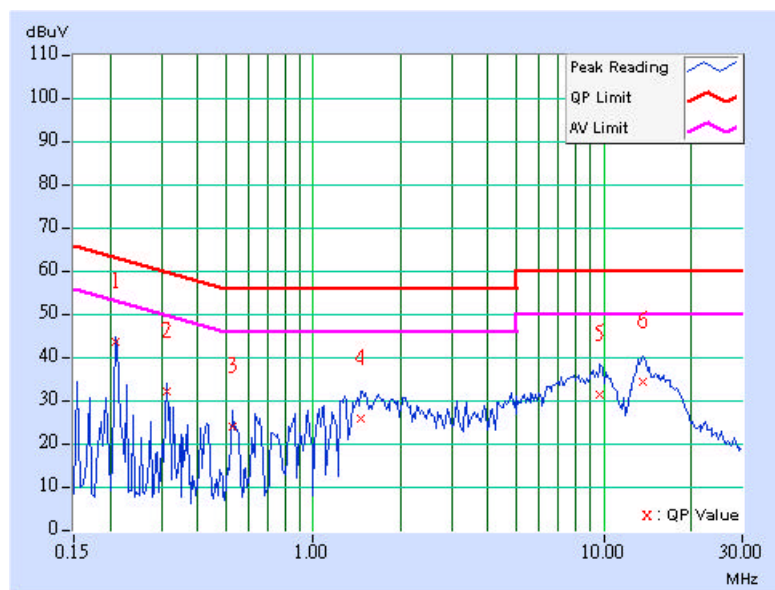

## 5.2 RADIATED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.





## 5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 20, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 22, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 26, 2007
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	214380/4	Jan. 16, 2007
RF signal cable HUBER+SUHNER	SUCOFLEX 104	219266/4	Jan. 16, 2007
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	900619	Nov. 13, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 1.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC4924-2.

### 5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.2.5 TEST SETUP

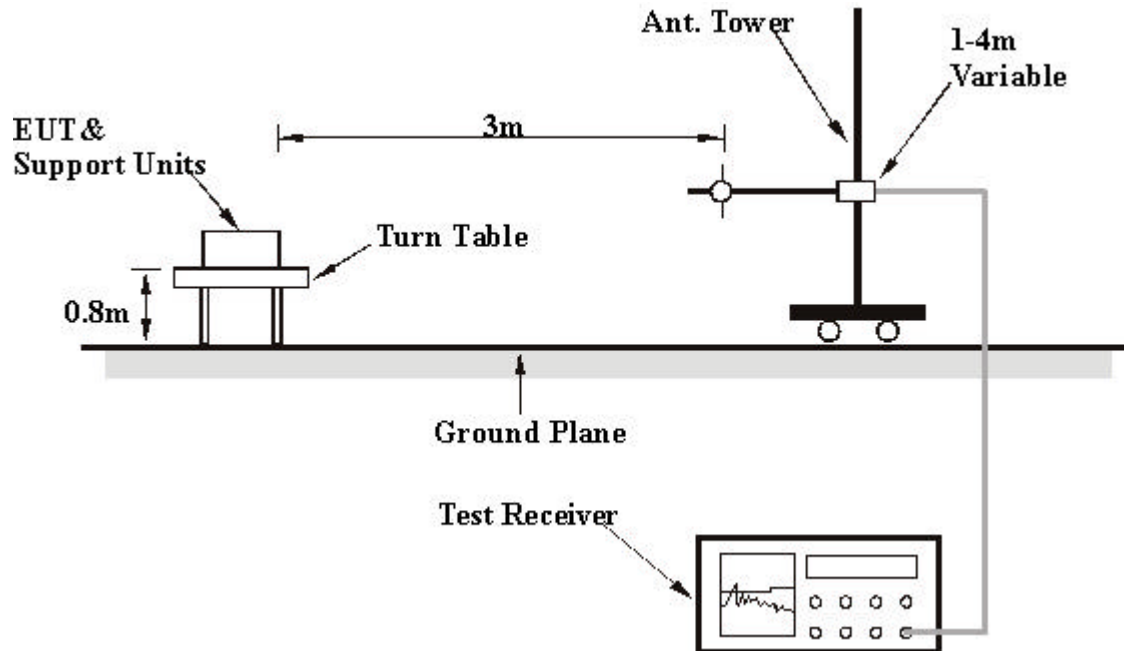

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



## 5.2.7 TEST RESULTS

### Below 1GHz Worst-Case Data

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.98	33.31 QP	43.50	-10.19	1.00 H	199	24.32	8.99
2	133.03	41.79 QP	43.50	-1.71	1.00 H	199	29.26	12.53
3	168.02	38.40 QP	43.50	-5.10	1.50 H	235	25.48	12.91
4	199.12	41.35 QP	43.50	-2.15	1.00 H	199	30.46	10.89
5	232.16	37.84 QP	46.00	-8.16	1.00 H	199	25.95	11.88
6	265.21	35.44 QP	46.00	-10.56	1.00 H	199	22.10	13.34
7	698.70	34.60 QP	46.00	-11.40	1.50 H	283	10.49	24.11
8	838.66	37.38 QP	46.00	-8.62	2.00 H	310	10.86	26.52
9	846.43	36.04 QP	46.00	-9.96	1.50 H	211	9.42	26.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	33.67 QP	43.50	-9.83	1.50 V	169	21.14	12.53
2	164.13	36.70 QP	43.50	-6.80	1.00 V	196	23.55	13.15
3	199.12	37.93 QP	43.50	-5.57	1.50 V	169	27.04	10.89
4	333.25	34.72 QP	46.00	-11.28	1.00 V	169	18.66	16.06
5	566.51	34.72 QP	46.00	-11.28	1.00 V	163	13.12	21.60
6	698.70	35.59 QP	46.00	-10.41	1.00 V	163	11.49	24.11
7	813.39	37.00 QP	46.00	-9.00	1.00 V	220	10.82	26.18
8	836.71	37.78 QP	46.00	-8.22	1.00 V	271	11.28	26.50
9	850.32	36.15 QP	46.00	-9.85	1.50 V	169	9.47	26.68

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



### 802.11a OFDM modulation

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	47.07 PK	74.00	-26.93	1.00 H	102	12.40	34.67
1	#3830.00	40.51 AV	54.00	-13.49	1.00 H	102	5.84	34.67
2	5725.00	71.66 PK	84.20	-12.54	1.34 H	217	32.73	38.92
2	5725.00	58.67 AV	74.21	-15.54	1.34 H	217	19.75	38.92
3	*5745.00	104.20 PK			1.31 H	220	65.22	38.98
3	*5745.00	94.21 AV			1.31 H	220	55.23	38.98
4	#11490.00	64.65 PK	74.00	-9.35	1.44 H	106	13.46	51.19
4	#11490.00	51.52 AV	54.00	-2.48	1.44 H	106	0.33	51.19
5	17235.00	65.99 PK	84.20	-18.21	1.44 H	20	12.59	53.41
5	17235.00	52.43 AV	74.21	-21.78	1.44 H	20	-0.97	53.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	45.20 PK	74.00	-28.80	1.73 V	237	10.53	34.67
1	#3830.00	37.22 AV	54.00	-16.78	1.73 V	237	2.55	34.67
2	5725.00	69.05 PK	79.59	-10.54	1.68 V	238	30.12	38.92
2	5725.00	56.94 AV	69.32	-12.38	1.68 V	238	18.02	38.92
3	*5745.00	99.59 PK			1.58 V	241	60.61	38.98
3	*5745.00	89.32 AV			1.58 V	241	50.34	38.98
4	#11490.00	67.31 PK	74.00	-6.69	1.61 V	77	16.13	51.19
4	#11490.00	52.92 AV	54.00	-1.08	1.61 V	77	1.73	51.19
5	17235.00	65.14 PK	79.59	-14.45	1.61 V	20	11.74	53.41
5	17235.00	52.69 AV	69.32	-16.63	1.61 V	20	-0.71	53.41

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. "\*" : Fundamental frequency
  6. "#" The radiated frequency falling in the restricted band.
  7. The limit value is defined as per 15.247

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	45.78 PK	74.00	-28.22	1.58 H	75	11.03	34.75
1	#3856.00	39.53 AV	54.00	-14.47	1.58 H	75	4.78	34.75
2	*5785.00	106.56 PK			1.30 H	218	67.48	39.08
2	*5785.00	97.02 AV			1.30 H	218	57.94	39.08
3	#11570.00	66.04 PK	74.00	-7.96	1.57 H	117	15.02	51.02
3	#11570.00	51.01 AV	54.00	-2.99	1.57 H	117	-0.01	51.02
4	17355.00	65.30 PK	86.56	-21.26	1.27 H	21	11.42	53.88
4	17355.00	52.93 AV	77.02	-24.09	1.27 H	21	-0.95	53.88

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.00	44.37 PK	74.00	-29.63	1.13 V	233	9.62	34.75
1	#3856.00	38.02 AV	54.00	-15.98	1.13 V	233	3.27	34.75
2	*5785.00	101.89 PK			1.66 V	237	62.81	39.08
2	*5785.00	91.42 AV			1.66 V	237	52.34	39.08
3	#11570.00	69.29 PK	74.00	-4.71	1.47 V	76	18.27	51.02
3	#11570.00	52.94 AV	54.00	-1.06	1.47 V	76	1.92	51.02
4	17355.00	65.45 PK	81.89	-16.44	1.47 V	246	11.57	53.88
4	17355.00	52.95 AV	71.42	-18.47	1.47 V	246	-0.93	53.88

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The her emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. "\*" : Fundamental frequency
  6. "#" The radiated frequency falling in the restricted band.
  7. The limit value is defined as per 15.247



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	46.43 PK	74.00	-27.57	1.17 H	76	11.60	34.83
1	#3883.00	41.05 AV	54.00	-12.95	1.17 H	76	6.22	34.83
2	*5825.00	106.73 PK			1.38 H	216	67.55	39.19
2	*5825.00	97.11 AV			1.38 H	216	57.92	39.19
3	5850.00	76.91 PK	86.73	-9.82	1.29 H	218	37.66	39.25
3	5850.00	60.88 AV	77.11	-16.23	1.29 H	218	21.63	39.25
4	#11650.00	66.75 PK	74.00	-7.25	1.52 H	116	15.95	50.80
4	#11650.00	51.67 AV	54.00	-2.33	1.52 H	116	0.87	50.80
5	17475.00	66.02 PK	86.73	-20.71	1.22 H	15	11.61	54.41
5	17475.00	52.15 AV	77.11	-24.96	1.22 H	15	-2.26	54.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.00	45.29 PK	74.00	-28.71	1.15 V	265	10.46	34.83
1	#3883.00	38.18 AV	54.00	-15.82	1.15 V	265	3.35	34.83
2	*5825.00	101.88 PK			1.63 V	237	62.69	39.19
2	*5825.00	91.96 AV			1.63 V	237	52.77	39.19
3	5850.00	69.79 PK	81.88	-12.09	1.64 V	235	30.54	39.25
3	5850.00	57.57 AV	71.96	-14.39	1.64 V	235	18.32	39.25
4	#11650.00	71.50 PK	74.00	-2.50	1.46 V	72	20.70	50.80
4	#11650.00	52.98 AV	54.00	-1.02	1.46 V	72	2.17	50.80
5	17475.00	66.08 PK	81.88	-15.80	1.46 V	235	11.66	54.41
5	17475.00	52.85 AV	71.96	-19.11	1.46 V	235	-1.56	54.41

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value
  5. "\*" : Fundamental frequency
  6. "#" The radiated frequency falling in the restricted band.
  7. The limit value is defined as per 15.247



### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTES:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




### 5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.3.5 TEST SETUP

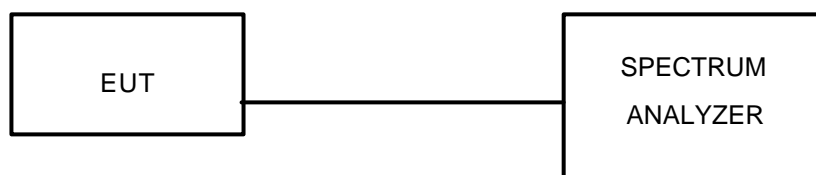

### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




### 5.3.7 TEST RESULTS

#### 802.11a OFDM Modulation


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 70%RH, 991hPa
<b>TESTED BY</b>	Lori Chiu		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	5745	16.56	0.5	PASS
3	5785	16.56	0.5	PASS
5	5825	16.48	0.5	PASS


CH 1

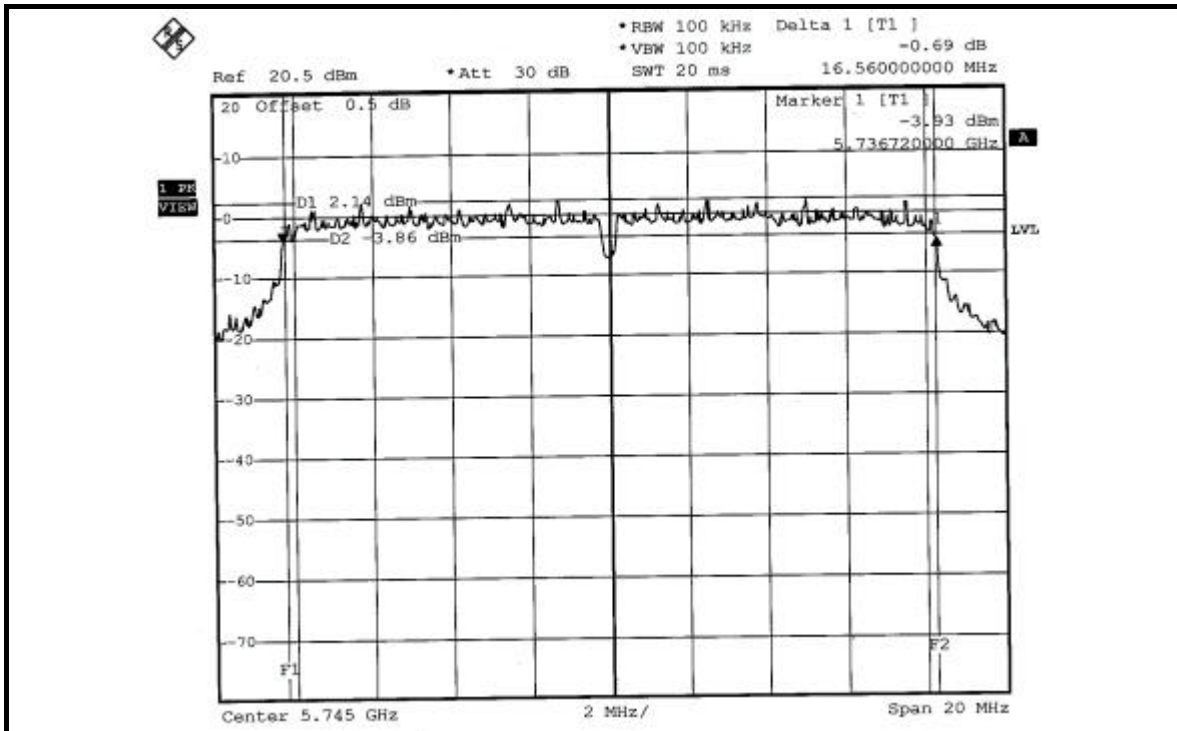

CH 3

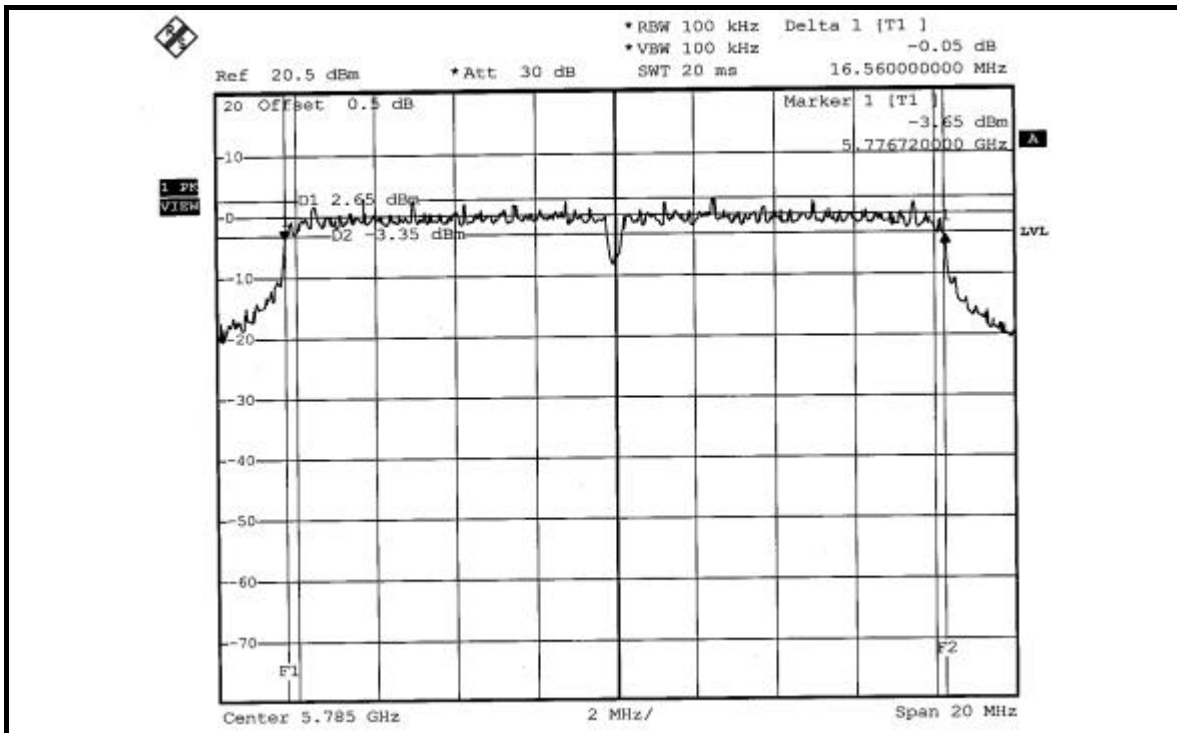

CH 5

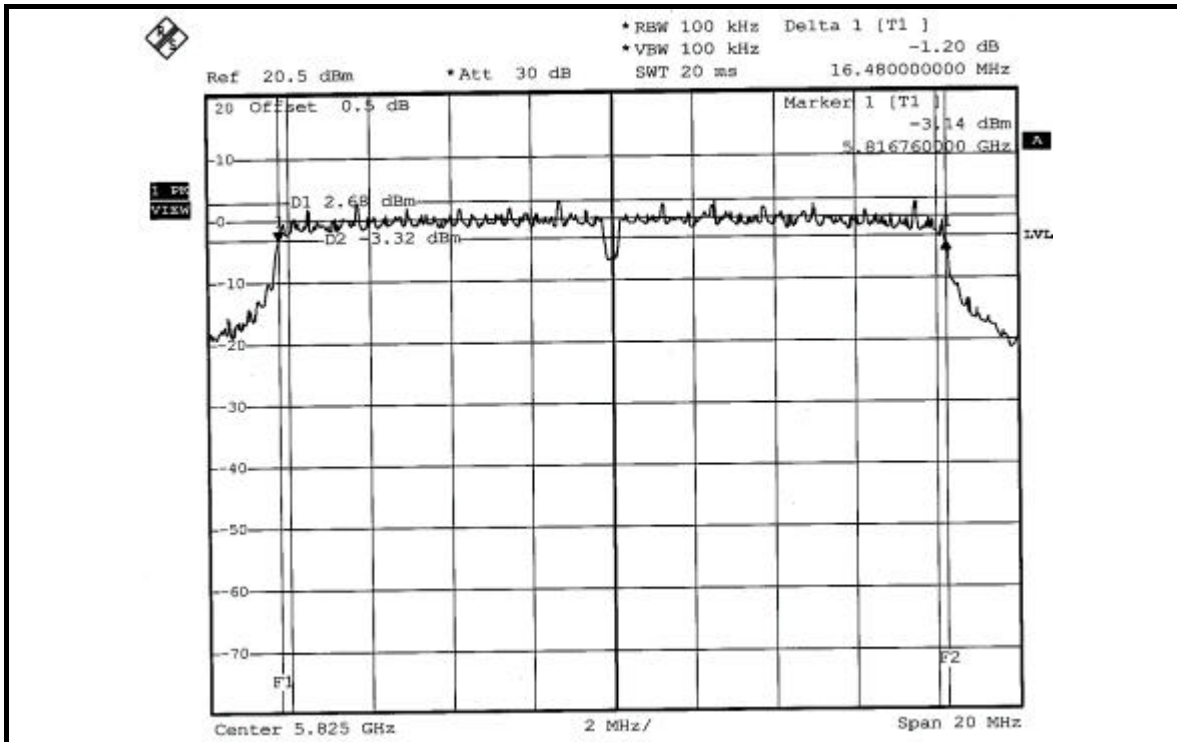



## 5.4 MAXIMUM PEAK OUTPUT POWER

### 5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 30, 2006
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Jan. 16, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

### 5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.4.5 TEST SETUP



### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



### 5.4.7 TEST RESULTS

#### 802.11a OFDM modulation

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 70%RH, 991hPa
<b>TESTED BY</b>	Lori Chiu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	31.769	15.02	30	PASS
3	5785	31.769	15.02	30	PASS
5	5825	31.915	15.04	30	PASS



## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTES:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



### 5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP



### 5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6




### 5.5.7 TEST RESULTS

#### 802.11a OFDM modulation


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 70%RH, 991hPa
<b>TESTED BY</b>	Lori Chiu		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	5745	-12.67	8	PASS
3	5785	-12.40	8	PASS
5	5825	-12.44	8	PASS

CH 1

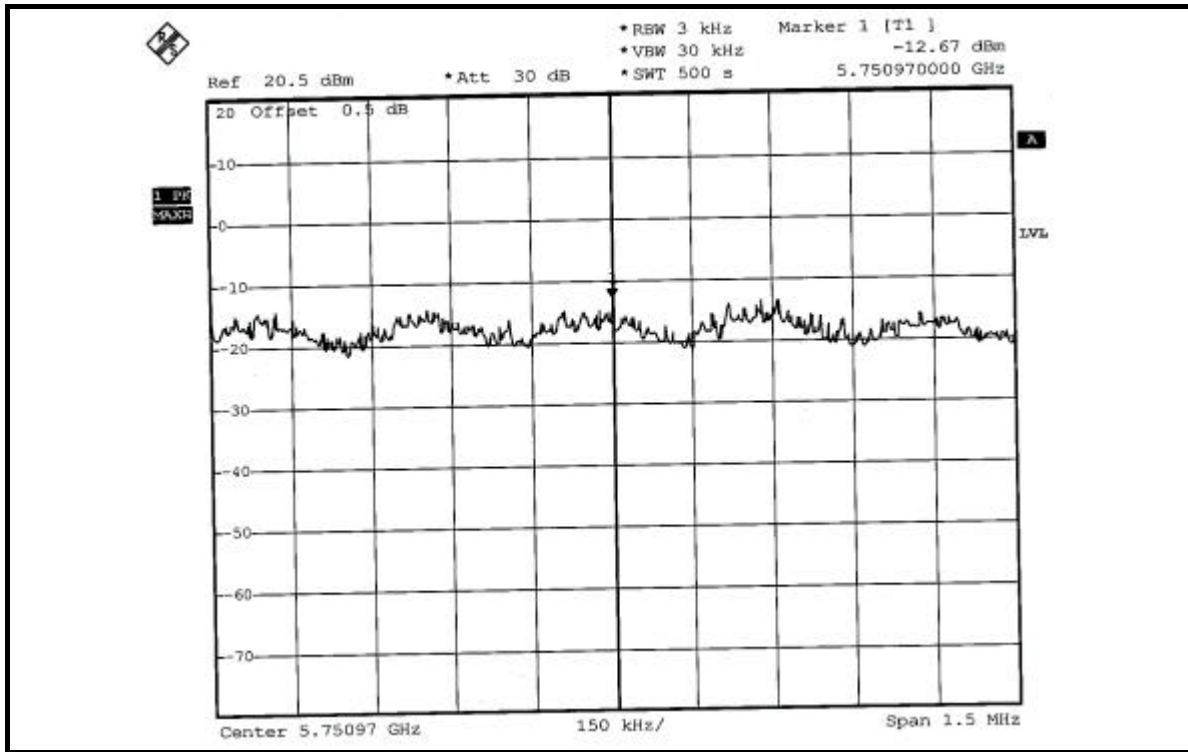

CH 3

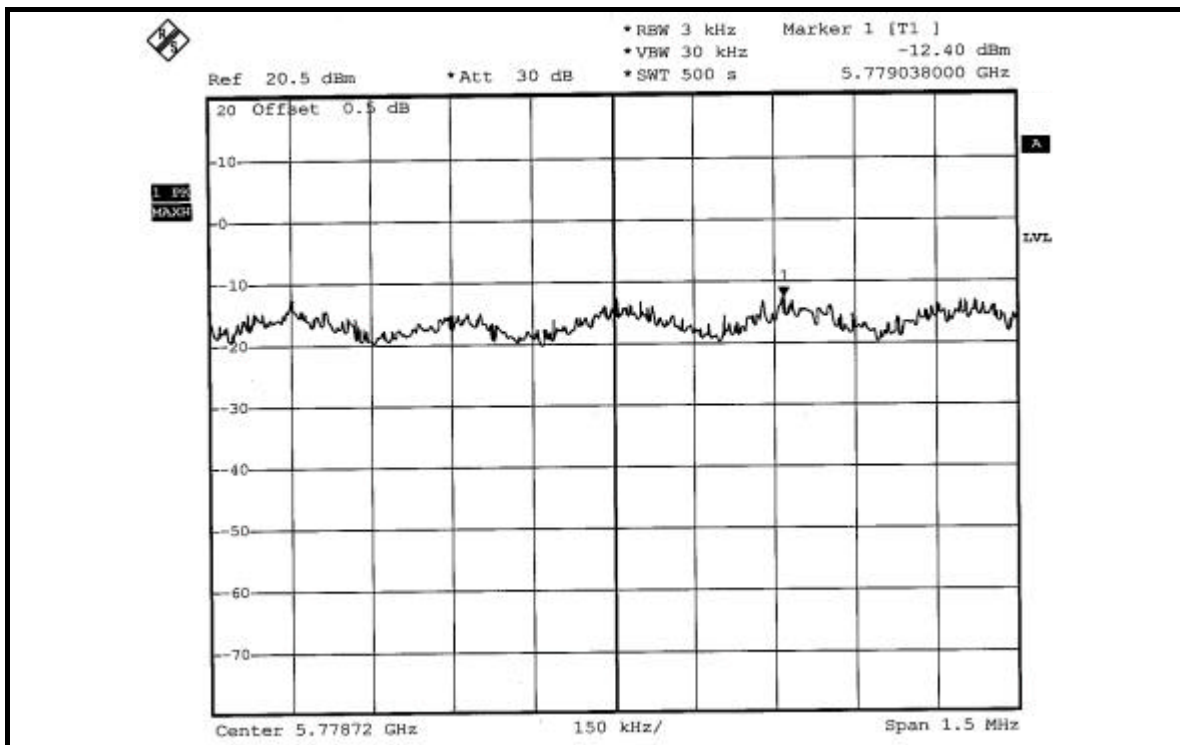





## 5.6 BAND EDGES MEASUREMENT

### 5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

#### NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation







### 5.6.5 EUT OPERATING CONDITION

Same as Item 5.9.6



### 5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

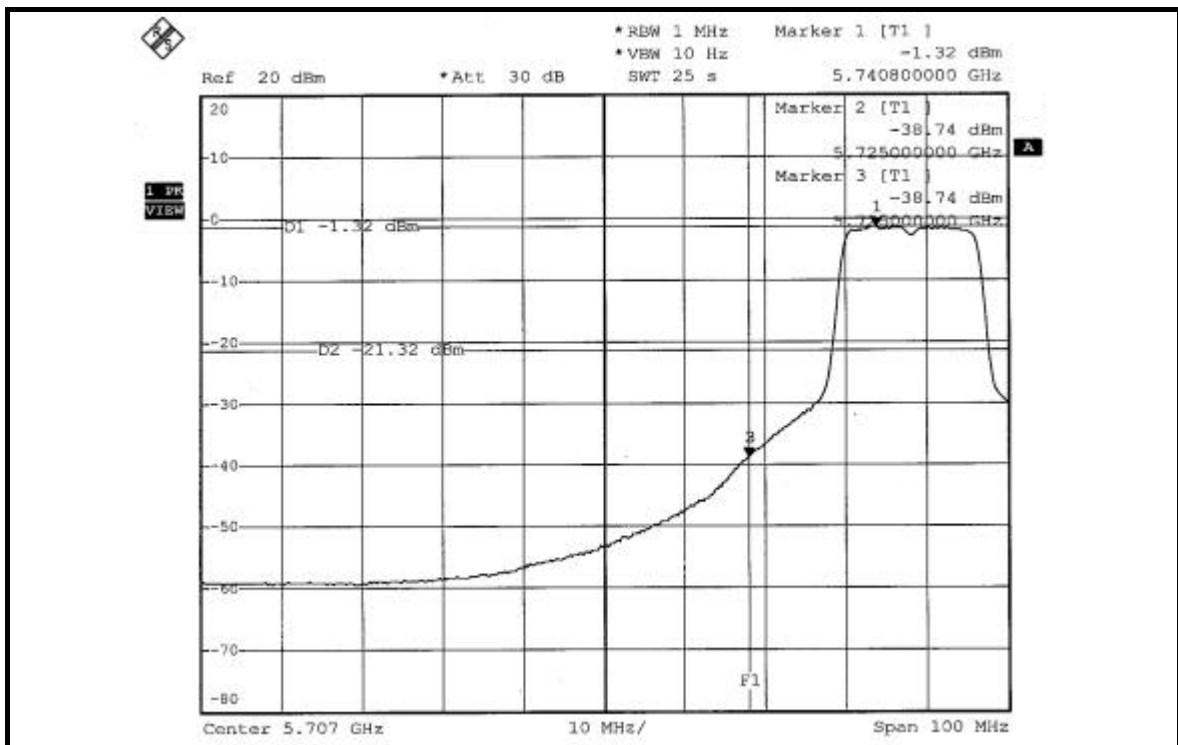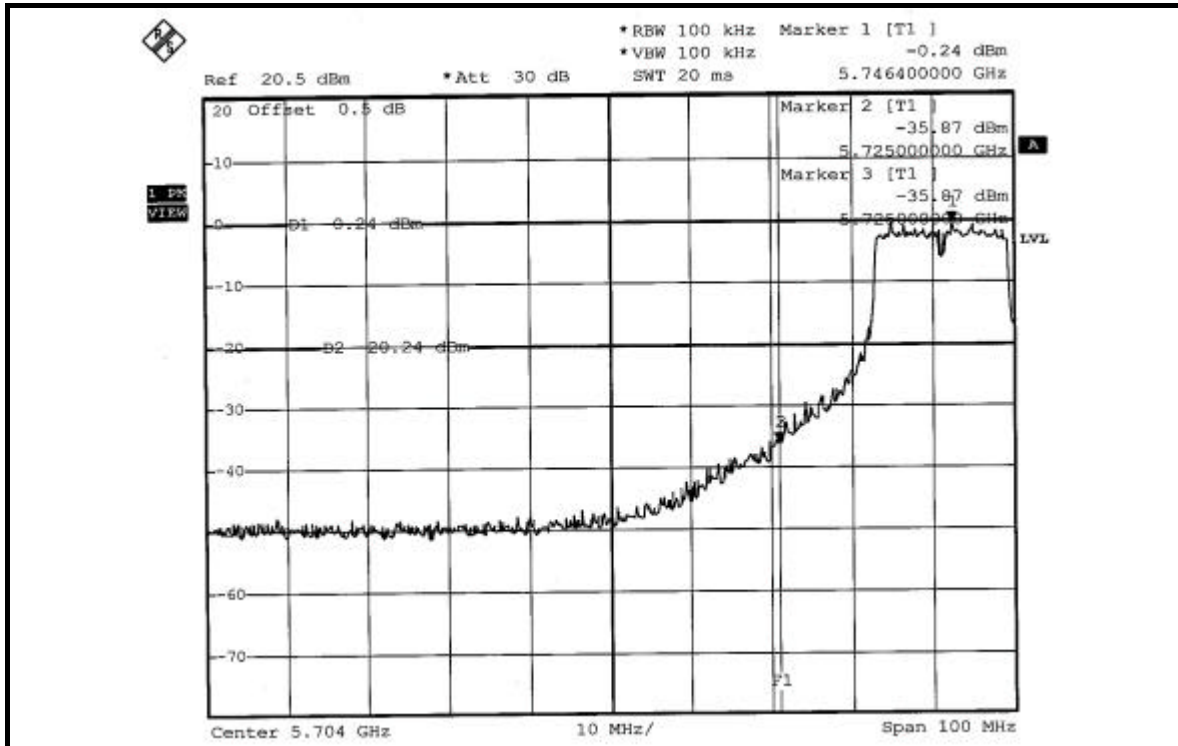

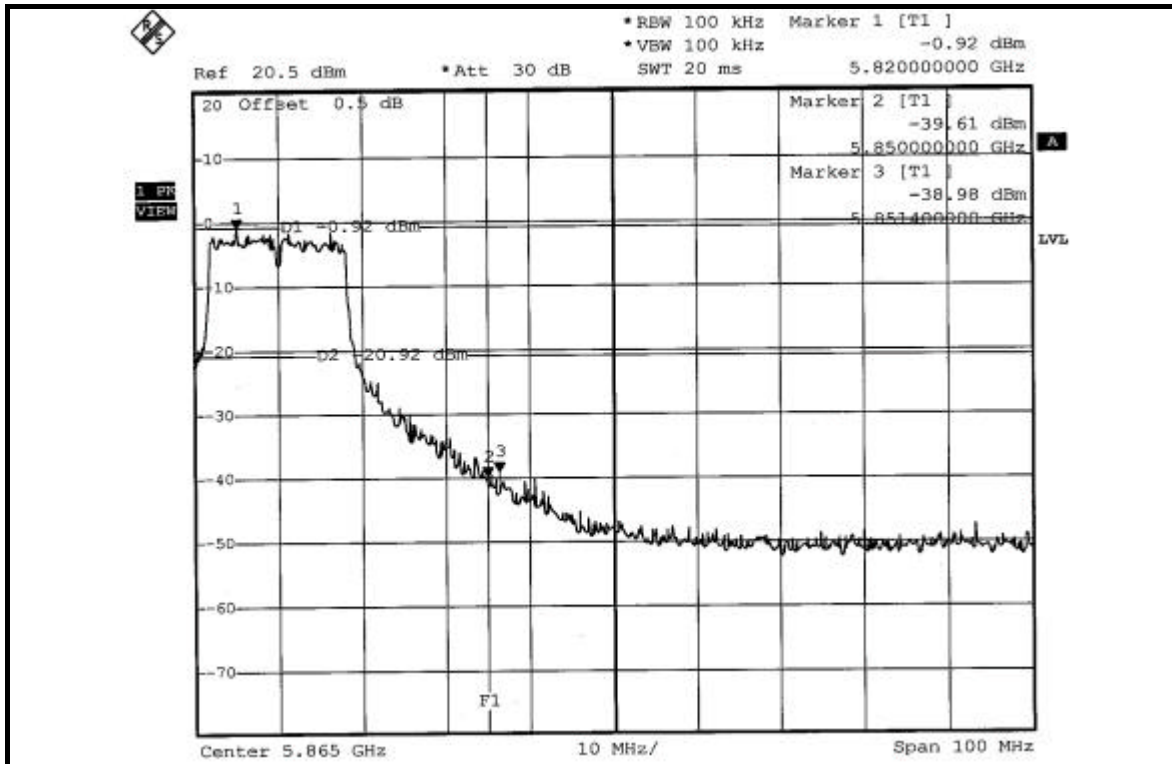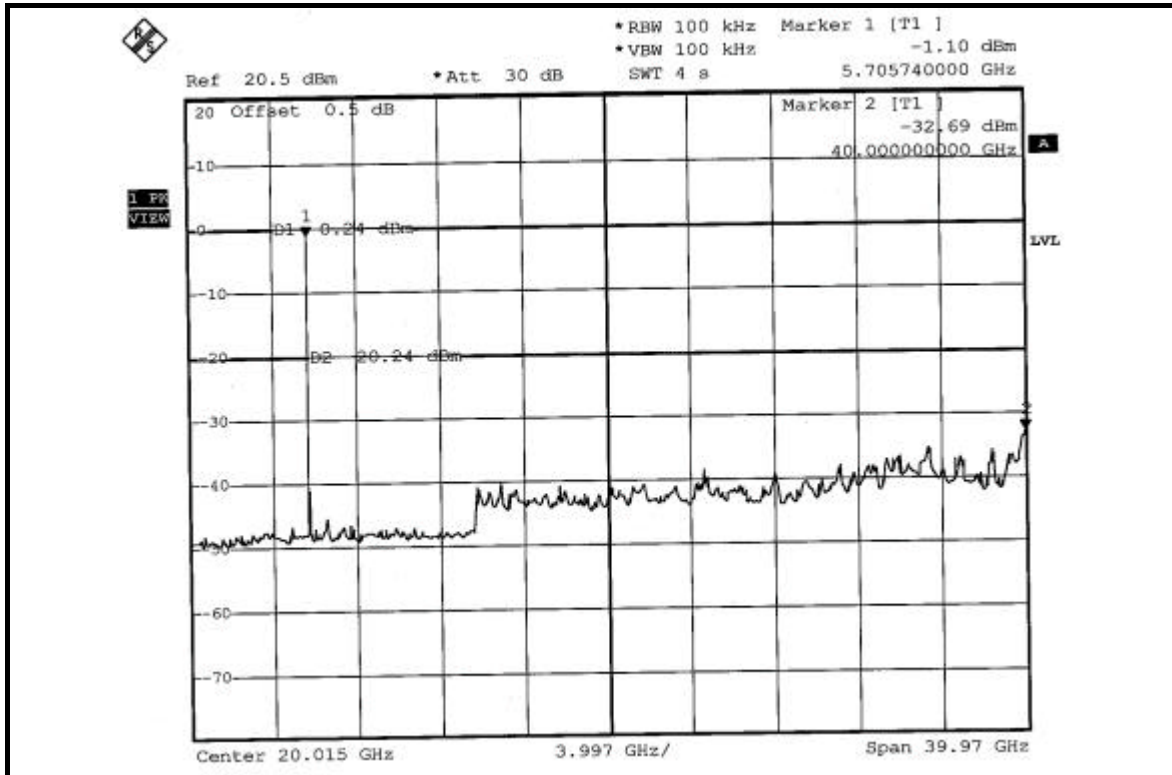



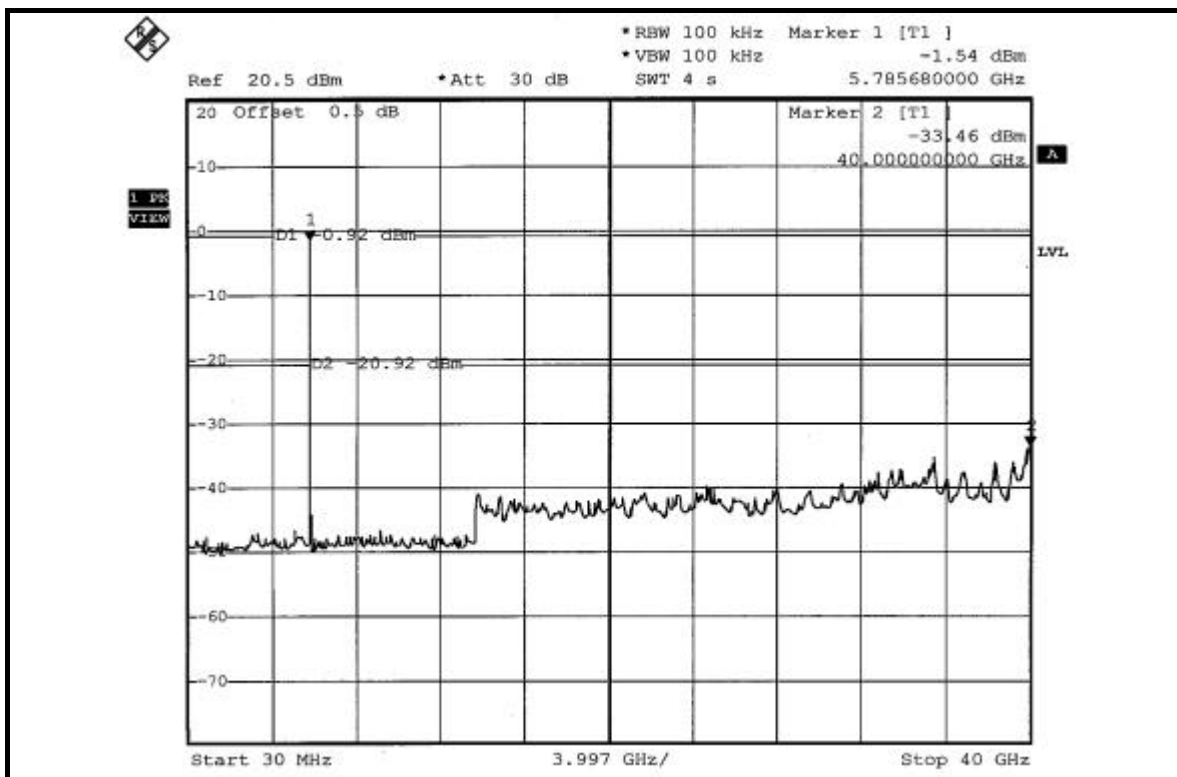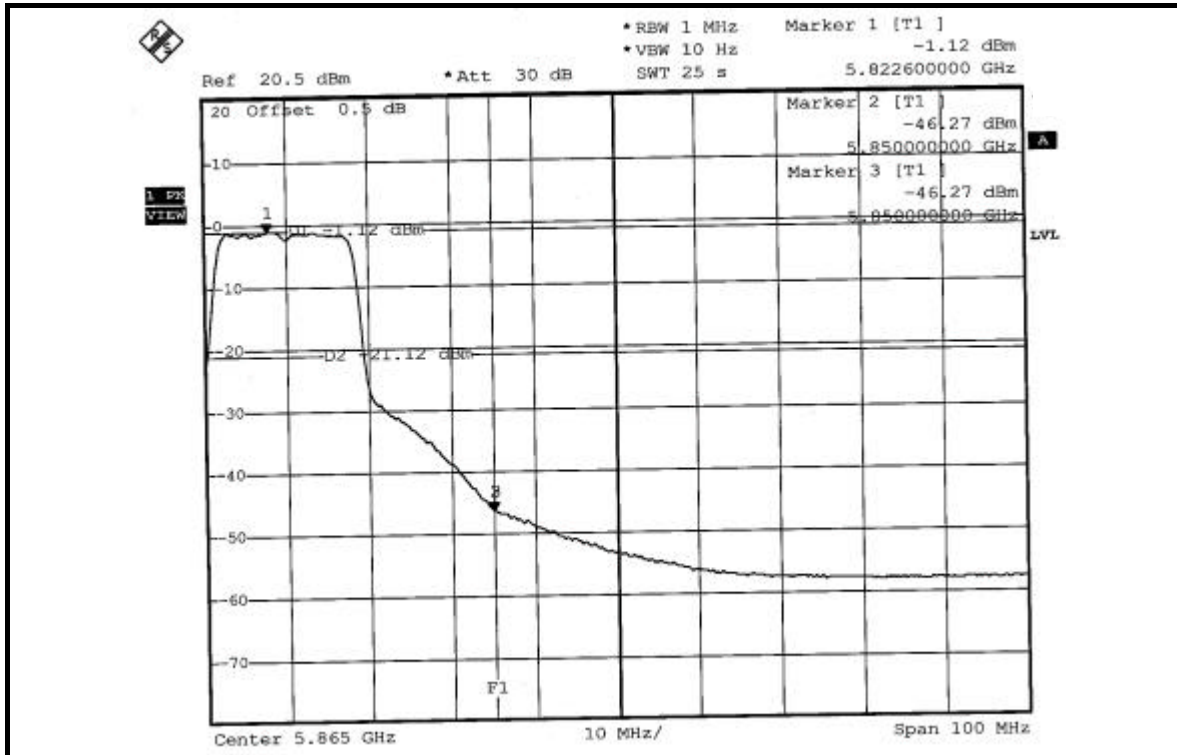

## **5.7 ANTENNA REQUIREMENT**

### **5.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **5.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is 1.12dBi.



## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Linko RF Lab.**  
Tel: 886-3-3270910  
Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.