

FCC 15.231 & RSS-210 Above 70MHz Test Report

for

Powertech Industrial Co Ltd

**10F., No.407, Sec. 2, Zhong Shan Rd., Zhonghe Dist., New
Taipei City 23558, Taiwan (R.O.C.)**

Product Name : Door Sensor
Model Name : NS-CH1XGS8
(For FCC ID)
Model Name : NS-CH1XGS8-C
(For IC)
FCC ID : NHS-NS-CH1XGS8
IC : 3653A-CH1XGS8

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
1. REVISION RECORD OF TEST REPORT.....	4
2. SUMMARY OF TEST RESULTS.....	5
3. GENERAL INFORMATION.....	6
3.1. Description of Application.....	6
3.2. Description of EUT.....	7
3.3. EUT Specifications Assessed in Current Report.....	7
3.4. Antenna Information.....	7
3.5. Description of Key Components.....	7
3.6. Test Configuration.....	8
3.7. Tested Supporting System List.....	8
3.8. Setup Configuration.....	9
3.9. Operating Condition of EUT.....	9
3.10. Description of Test Facility.....	10
3.11. Measurement Uncertainty.....	10
4. MEASUREMENT EQUIPMENT LIST.....	11
4.1. Radiated Emission Measurement.....	11
4.2. RF Conducted Measurement.....	11
5. CONDUCTED EMISSION.....	12
6. RADIATED SPURIOUS EMISSION.....	13
6.1. Block Diagram of Test Setup.....	13
6.2. Radiated Emission Limits.....	14
6.3. Test Procedure.....	15
6.4. Measurement Result Explanation.....	16
6.5. Test Results.....	17
7. EMISSION BANDWIDTH MEASUREMENT.....	18
7.1. Block Diagram of Test Setup.....	18
7.2. Specification Limits.....	18
7.3. Test Procedure.....	18
7.4. Test Results.....	18
8. PERIODIC OPERATED MEASUREMENT.....	19
8.1. Block Diagram of Test Setup.....	19
8.2. Specification Limits.....	19
8.3. Test Procedure.....	19
8.4. Test Results.....	19
9. DEVIATION TO TEST SPECIFICATIONS.....	20
 APPENDIX A TEST DATA AND PLOTS	
APPENDIX B TEST PHOTOGRAPHS	

TEST REPORT CERTIFICATION

Applicant : Powertech Industrial Co Ltd
Manufacturer : DONGGUAN QUAN SHENG ELECTRIC CO LTD
EUT Description
(1) Product : Door Sensor
(2) Model : (1)NS-CH1XGS8 (2)NS-CH1XGS8-C
(3) Power Rating : DC 3V

Applicable Standards:

47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 4), November 2014
RSS-210 (Issue 9), August 2016
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2017. 12. 18

Reviewed by: Annie Yu (Annie Yu/Administrator)

Approved by: Ben Cheng (Ben Cheng/Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2017. 12. 18	Original Report	EM-F170790

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	N/A, Note
15.209/15.231(b)	RSS-Gen §8.9 RSS-210 Annex A table A1	Radiated Spurious Emission and Fundamental Frequency	PASS
15.231(c)	RSS-Gen §6.6	Emission Bandwidth	PASS
15.231(a)(1)	RSS-210 Annex A A1.1(a)	Periodic Operated	PASS
15.203	RSS-Gen §8.3	Antenna Requirement	Compliance

Note: The EUT only employs battery power for operation, so it is unnecessary to test.

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Powertech Industrial Co Ltd 10F, No. 407, Chung Shan Rd., Sec 2 Chung Ho City, Taipei Hsien 235, Taiwan						
Manufacture	DONGGUAN QUAN SHENG ELECTRIC CO LTD CHU-TANG 2ND INDUSTRIAL PARK HOU-CHIEH TOWN DONGGUAN GUANGDONG 523963 CHINA						
Product	Door Sensor						
Model	(1)NS-CH1XGS8 (2)NS-CH1XGS8-C The difference of above models is in sales region. <table border="1"><thead><tr><th>Model</th><th>Sales Region</th></tr></thead><tbody><tr><td>NS-CH1XGS8</td><td>USA</td></tr><tr><td>NS-CH1XGS8-C</td><td>Canada</td></tr></tbody></table>	Model	Sales Region	NS-CH1XGS8	USA	NS-CH1XGS8-C	Canada
Model	Sales Region						
NS-CH1XGS8	USA						
NS-CH1XGS8-C	Canada						

3.2. Description of EUT

Test Model	NS-CH1XGS8
Serial Number	N/A
Product HW version	N/A
Product SW version	N/A
Radio HW version	N/A
Radio SW version	N/A
Power Rating	DC 3.0V
RF Features	FSK
Transmit Type	1T1R
Accessories	N/A
Date of Receipt	2017. 10. 26
Date of Test	2017. 11. 06 ~ 10

3.3. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation
---	433.55 – 434.45	3	FSK

Channel List	
Channel Number	Frequency (MHz)
1	433.55
2	434.00
3	434.45

3.4. Antenna Information


No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	---	---	Spring Coil Antenna	---	---

3.5. Description of Key Components

None.

3.6. Test Configuration

Duty Cycle

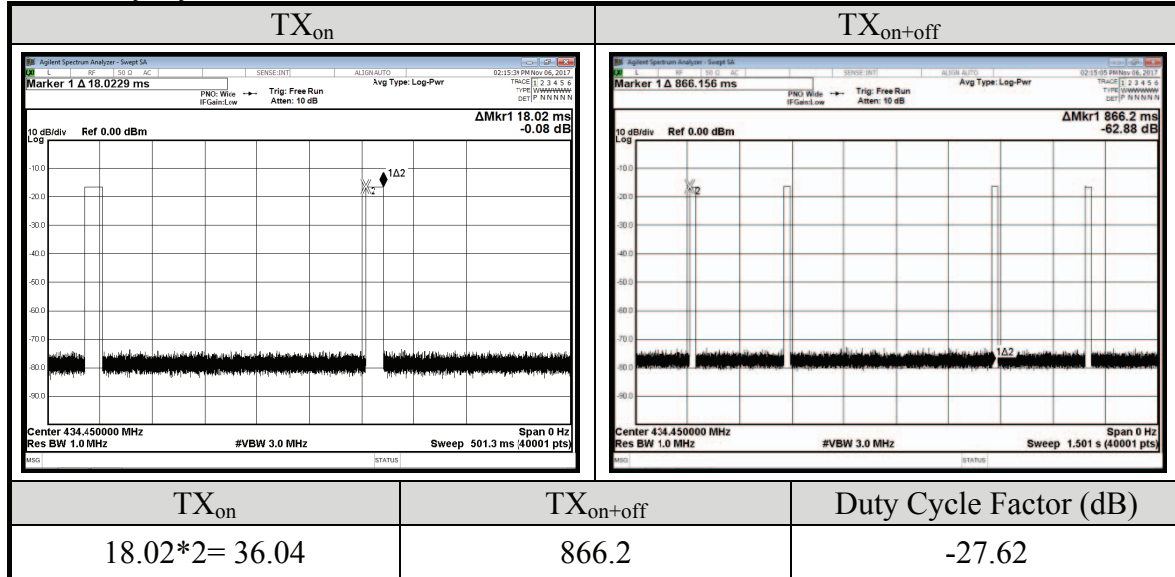

Item	Test Channel
Radiated Spurious Emission and Fundamental Frequency	1/2/3
Emission Bandwidth	1/2/3
Periodic Operated	1/2/3

Note 1:

Mobile Device, and 3 axis were assessed, and the worst axis was Stand.

Lie

Side

Stand

Portable Device

Lie

Side

Stand

3.7. Tested Supporting System List

None.

3.8. Setup Configuration

3.8.1. EUT Configuration for Radiated Emission



3.8.2. EUT Configuration for RF Conducted Test Items



3.9. Operating Condition of EUT

To Set EUT on RF function under continues transmitting.

3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: sales@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724 (3) FCC OET Designation No. TW1004 & TW1090 & TW1724
Test Facilities	(1) Semi-Anechoic Chamber (IC Test Site Registration No.: 5183B-1) (2) Fully Anechoic Chamber (IC Test Site Registration No.: 5183B-4)

3.11. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiation Test (Distance: 3m)	9kHz~30MHz	± 0.5dB
	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
Emission Bandwidth (20dB)	± 0.2kHz
Periodic Operated	± 0.05s

4. MEASUREMENT EQUIPMENT LIST

4.1. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2017. 09. 13	1 Year
2.	Spectrum Analyzer	Agilent	N9010A-526	MY52220368	2016. 12. 01	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2017. 06. 19	1 Year
4.	Amplifier	HP	8447D	2944A06305	2017. 02. 16	1 Year
5.	Amplifier	Sonoma	310N	187161	2017. 06. 08	1 Year
6.	Loop Antenna	R & S	HFH2-Z2	891847/27	2016. 12. 23	1 Year
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2017. 01. 21	1 Year
8.	Horn Antenna	ETS-Lindgren	3117	00135902	2017. 03. 08	1 Year
9.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2017. 04. 24	1 Year
10.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2017. 04. 24	1 Year
11.	Test Software	Audix	e3	V.6.1206197	N.C.R.	N.C.R.
12.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2017. 01. 03	1 Year
2.	Wide Band Antenna	Diamond	RH799	N/A	N.C.R.	N.C.R.
3.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2017. 04. 21	1 Year

5. CONDUCTED EMISSION

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC 15.207 and RSS-Gen §8.8】


6. RADIATED SPURIOUS EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.8


6.1.2. Setup Diagram for 9kHz-30MHz

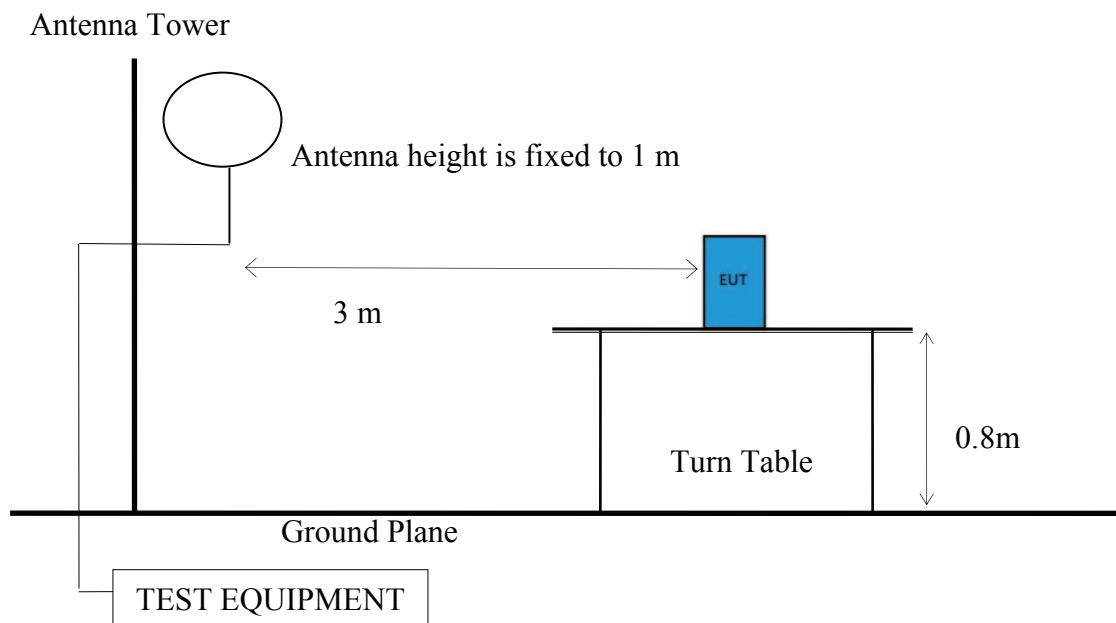

6.1.3. Setup Diagram for 30MHz-1000MHz

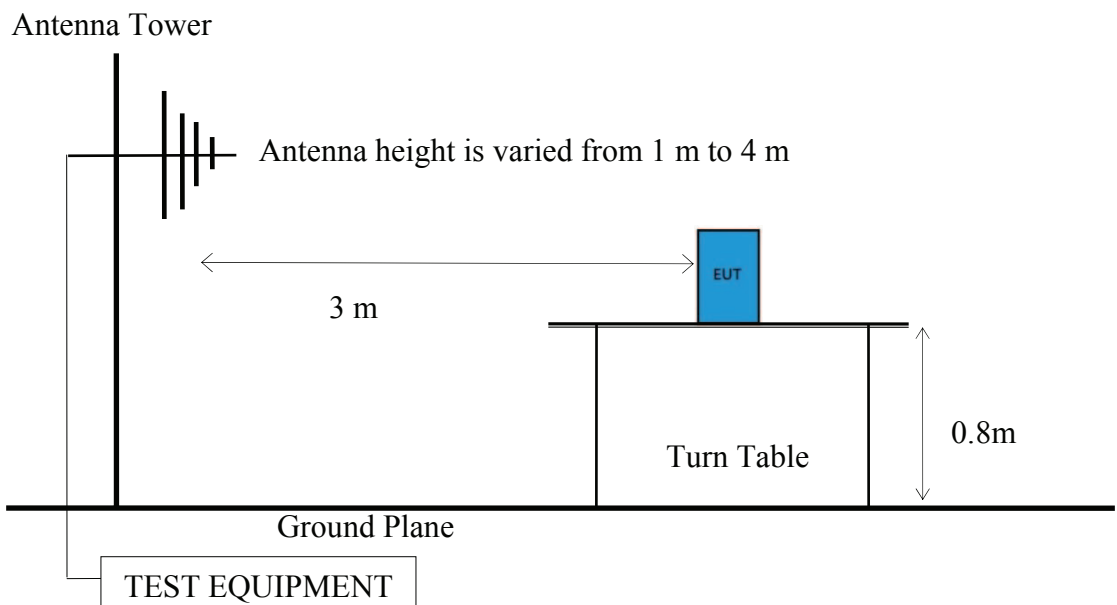

6.1.4. Setup Diagram for above 1GHz

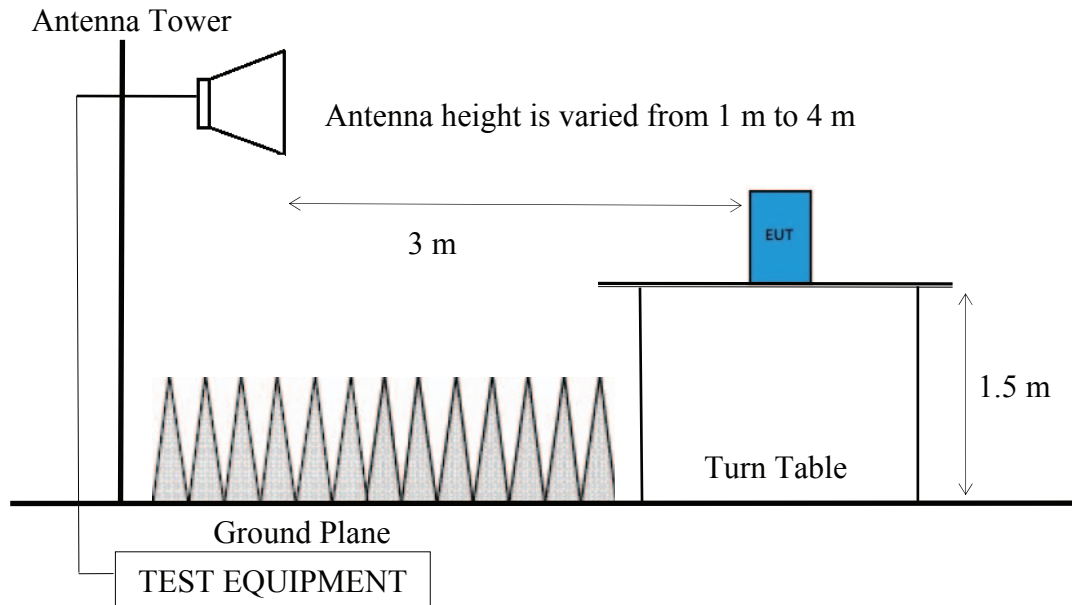

6.2. Radiated Emission Limits

6.2.1. General Limit

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6 must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6	2400/kHz
0.490 - 1.705	30	87.6	24000/kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limite for Fundamental Frequency

In addition to the provisions of §15.205/RSS-210 Annex A table A1, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹:Linear Interpolations

Remark : (1) $\text{dB}\mu\text{V}/\text{m} = 20 \log (\mu\text{V}/\text{m})$

(2) The tighter limit applies to the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) Where limit of Fundamental Freq. is calculated by:

$$41.6667 \times 433.55 - 7083.3333 = 10981.264485 \mu\text{V}/\text{m} = 80.81 \text{dB}\mu\text{V}/\text{m}$$

$$41.6667 \times 433.99 - 7083.3333 = 10999.597833 \mu\text{V}/\text{m} = 80.83 \text{dB}\mu\text{V}/\text{m}$$

$$41.6667 \times 434.45 - 7083.3333 = 11018.764515 \mu\text{V}/\text{m} = 80.84 \text{dB}\mu\text{V}/\text{m}$$

(5) The limits in this table are based on CFR 47 Part 15.231(b).

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level.

In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

(1) RBW = 9kHz with peak and average detector.

(2) Detector: average and peak (9kHz-490kHz)

Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1)RBW = 120KHz
- (2)VBW $\geq 3 \times$ RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:**Peak Detector:**

- (1)RBW = 1MHz
- (2)VBW $\geq 3 \times$ RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average detector for finally measurement.

Average Detector: **Option 1:**

- (1)RBW = 1MHz
- (2)VBW $\geq 1/ T$.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.

 Option 2:

Average Emission Level= Peak Emission Level+ D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading

Average Emission Level l=Antenna Factor + Cable Loss + Meter Reading

Average Emission Level= Peak Emission Level+ DCCF

Duty Cycle Correction Factor (DCCF)= $20\log(TX_{on}/TX_{on+off})$ presented in section 3.6


ERP= Peak Emission Level-95.2dB-2.14dB

6.5. Test Results

Please refer to Appendix A.

7. EMISSION BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

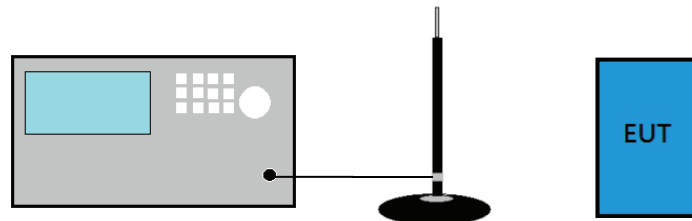

7.2. Specification Limits

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

7.3. Test Procedure


- (1) Set RBW close to 1-5 % of OBW.
- (2) Set $VBW \geq RBW$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

7.4. Test Results

Please refer to Appendix A

8. PERIODIC OPERATED MEASUREMENT

8.1. Block Diagram of Test Setup

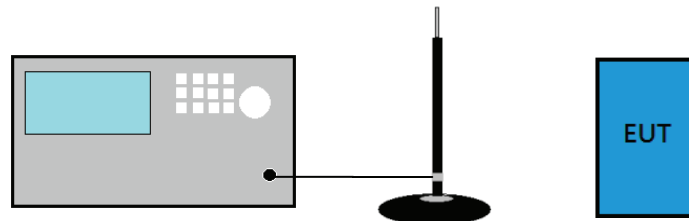

8.2. Specification Limits

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released

8.3. Test Procedure

- (1) Span = zero
- (2) RBW \geq 100kHz
- (3) VBW \geq RBW
- (4) Sweep = 5s
- (5) Detector function = peak
- (6) Trace = single sweep

8.4. Test Results

Please refer to Appendix A

9. DEVIATION TO TEST SPECIFICATIONS

【NONE】



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan*

APPENDIX A

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPDNDIX A

TEST DATA AND PLOTS

(Model: (1)NS-CH1XGS8 (2)NS-CH1XGS8-C)

TABLE OF CONTENTS

A.1 RADIATED SPURIOUS EMISSION	2
A.1.1 Emissions Applied to General Requirement.....	2
A.1.2 Fundamental Frequency	11
A.2 EMISSION BANDWIDTH MEASUREMENT	14
A.2.1 Emission Bandwidth.....	14
A.2.2 Measurement Plots	15
A.3 PERIODIC OPERATED MEASUREMENT	16
A.3.1 Periodic Operated	16
A.3.2 Measurement Plots	17

A.1 RADIATED SPURIOUS EMISSION

Test Date	2017/11/10	Temp./Hum.	23°C/50%
Test Voltage	DC 3V (Via Battery)		

A.1.1 Emissions Applied to General Requirement

A.1.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.1.1.2 Frequency Below 1 GHz

Mode	TX 433.55MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	12.04	2.29	7.44	21.77	43.50	21.73	Peak
328.76	14.47	4.71	3.11	22.29	46.00	23.71	Peak
441.28	16.47	5.94	19.22	41.63	46.00	4.37	Peak
452.92	16.61	6.04	19.72	42.37	46.00	3.63	Peak
743.92	19.03	7.33	1.71	28.07	46.00	17.93	Peak
867.11	20.17	7.99	16.53	44.69	46.00	1.31	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
867.11	44.69	-27.62	17.07	46.00	28.93	Average

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
55.22	8.44	1.66	14.28	24.38	40.00	15.62	Peak
101.78	12.04	2.29	7.81	22.14	43.50	21.36	Peak
248.25	12.65	3.80	4.84	21.29	46.00	24.71	Peak
323.91	14.36	4.65	9.02	28.03	46.00	17.97	Peak
619.76	18.43	6.82	2.32	27.57	46.00	18.43	Peak
937.92	20.78	8.43	1.17	30.38	46.00	15.62	Peak

Mode	TX 433.99MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	12.04	2.29	7.43	21.76	43.50	21.74	Peak
410.24	16.08	5.66	9.10	30.84	46.00	15.16	Peak
425.76	16.27	5.79	23.42	45.48	46.00	0.52	Peak
446.13	16.53	5.98	11.92	34.43	46.00	11.57	Peak
684.75	18.50	7.03	3.10	28.63	46.00	17.37	Peak
868.08	20.19	8.00	22.29	50.48	46.00	-4.48	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
868.08	50.48	-27.62	22.86	46.00	23.14	Average

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	12.04	2.29	7.15	21.48	43.50	22.02	Peak
323.91	14.36	4.65	9.02	28.03	46.00	17.97	Peak
420.91	16.21	5.75	5.47	27.43	46.00	18.57	Peak
616.85	18.43	6.81	0.91	26.15	46.00	19.85	Peak
750.71	19.08	7.35	1.26	27.69	46.00	18.31	Peak
894.27	20.39	8.14	1.42	29.95	46.00	16.05	Peak

Mode	TX 434.45MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
101.78	12.04	2.29	8.12	22.45	43.50	21.05	Peak
324.88	14.36	4.65	4.53	23.54	46.00	22.46	Peak
450.01	16.57	6.01	19.45	42.03	46.00	3.97	Peak
640.13	18.45	6.89	1.44	26.78	46.00	19.22	Peak
766.23	19.26	7.44	1.75	28.45	46.00	17.55	Peak
869.05	20.19	8.00	20.33	48.52	46.00	-2.52	Peak

Emission Frequency (MHz)	Peak Emission Level (dB μ V/m)	DCCF (dB)	Average Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
869.05	48.52	-27.62	20.90	46.00	25.10	Average

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
54.25	8.67	1.64	10.87	21.18	40.00	18.82	Peak
101.78	12.04	2.29	7.03	21.36	43.50	22.14	Peak
249.22	12.70	3.80	4.67	21.17	46.00	24.83	Peak
323.91	14.36	4.65	9.32	28.33	46.00	17.67	Peak
716.76	18.71	7.18	1.43	27.32	46.00	18.68	Peak
869.05	20.19	8.00	6.77	34.96	46.00	11.04	Peak

A.2.1.3 Frequency Above 1 GHz

Mode	TX 433.55MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1300.00	28.04	4.81	26.64	59.49	74.00	14.51	Peak
1736.00	29.68	5.68	16.30	51.66	74.00	22.34	Peak
2168.00	31.84	6.30	32.10	70.24	74.00	3.76	Peak
3036.00	32.89	7.51	23.76	64.16	74.00	9.84	Peak
3900.00	33.21	8.63	15.83	57.67	74.00	16.33	Peak
4336.00	33.83	9.19	7.88	50.90	74.00	23.10	Peak
4768.00	34.21	9.52	8.35	52.08	74.00	21.92	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1300.00	59.49	-27.62	31.87	54.00	22.13	Average
1736.00	51.66	-27.62	24.04	54.00	29.96	Average
2168.00	70.24	-27.62	42.62	54.00	11.38	Average
3036.00	64.16	-27.62	36.54	54.00	17.46	Average
3900.00	57.67	-27.62	30.05	54.00	23.95	Average
4336.00	50.9	-27.62	23.28	54.00	30.72	Average
4768.00	52.08	-27.62	24.46	54.00	29.54	Average

Mode	TX 433.55MHz
------	--------------

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1300.00	28.04	4.81	22.79	55.64	74.00	18.36	Peak
1736.00	29.68	5.68	6.91	42.27	74.00	31.73	Peak
2168.00	31.84	6.30	20.92	59.06	74.00	14.94	Peak
3036.00	32.89	7.51	15.10	55.50	74.00	18.50	Peak
3900.00	33.21	8.63	10.45	52.29	74.00	21.71	Peak
4336.00	33.83	9.19	5.69	48.71	74.00	25.29	Peak
4768.00	34.21	9.52	10.06	53.79	74.00	20.21	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1300.00	55.64	-27.62	28.02	54.00	25.98	Average
1736.00	42.27	-27.62	14.65	54.00	39.35	Average
2168.00	59.06	-27.62	31.44	54.00	22.56	Average
3036.00	55.50	-27.62	27.88	54.00	26.12	Average
3900.00	52.29	-27.62	24.67	54.00	29.33	Average
4336.00	48.71	-27.62	21.09	54.00	32.91	Average
4768.00	53.79	-27.62	26.17	54.00	27.83	Average

Mode	TX 433.99MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
1304.00	28.04	4.81	22.50	55.35	74.00	18.65	Peak
1736.00	29.68	5.68	16.12	51.48	74.00	22.52	Peak
2172.00	31.84	6.30	18.29	56.43	74.00	17.57	Peak
2604.00	32.42	6.84	6.50	45.76	74.00	28.24	Peak
3040.00	32.89	7.51	18.77	59.17	74.00	14.83	Peak
3472.00	32.81	8.14	7.98	48.93	74.00	25.07	Peak
3904.00	33.21	8.63	13.01	54.85	74.00	19.15	Peak
4340.00	33.83	9.19	11.23	54.25	74.00	19.75	Peak
4776.00	34.21	9.52	9.34	53.07	74.00	20.93	Peak

Emission Frequency (MHz)	Peak Emission Level (dB μ V/m)	DCCF (dB)	Average Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1304.00	55.35	-27.62	27.73	54.00	26.27	Average
1736.00	51.48	-27.62	23.86	54.00	30.14	Average
2172.00	56.43	-27.62	28.81	54.00	25.19	Average
2604.00	45.76	-27.62	18.14	54.00	35.86	Average
3040.00	59.17	-27.62	31.55	54.00	22.45	Average
3472.00	48.93	-27.62	21.31	54.00	32.69	Average
3904.00	54.85	-27.62	27.23	54.00	26.77	Average
4340.00	54.25	-27.62	26.63	54.00	27.37	Average
4776.00	53.07	-27.62	25.45	54.00	28.55	Average

Mode	TX 433.99MHz
------	--------------

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1304.00	28.04	4.81	22.30	55.15	74.00	18.85	Peak
2172.00	31.84	6.30	14.83	52.97	74.00	21.03	Peak
3040.00	32.89	7.51	11.38	51.78	74.00	22.22	Peak
3904.00	33.21	8.63	13.06	54.90	74.00	19.10	Peak
4340.00	33.83	9.19	7.46	50.48	74.00	23.52	Peak
4776.00	34.21	9.52	10.12	53.85	74.00	20.15	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1304.00	55.15	-27.62	27.53	54.00	26.47	Average
2172.00	52.97	-27.62	25.35	54.00	28.65	Average
3040.00	51.78	-27.62	24.16	54.00	29.84	Average
3904.00	54.9	-27.62	27.28	54.00	26.72	Average
4340.00	50.48	-27.62	22.86	54.00	31.14	Average
4776.00	53.85	-27.62	26.23	54.00	27.77	Average

Mode	TX 434.45MHz
------	--------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1304.00	28.04	4.81	24.04	56.89	74.00	17.11	Peak
1740.00	29.80	5.69	15.25	50.74	74.00	23.26	Peak
2172.00	31.84	6.30	19.73	57.87	74.00	16.13	Peak
2608.00	32.44	6.87	18.58	57.89	74.00	16.11	Peak
3040.00	32.89	7.51	19.46	59.86	74.00	14.14	Peak
3476.00	32.80	8.16	15.31	56.27	74.00	17.73	Peak
3912.00	33.21	8.63	8.14	49.98	74.00	24.02	Peak
4344.00	33.86	9.21	16.12	59.19	74.00	14.81	Peak
4780.00	34.21	9.52	5.25	48.98	74.00	25.02	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1304.00	56.89	-27.62	29.27	54.00	24.73	Average
1740.00	50.74	-27.62	23.12	54.00	30.88	Average
2172.00	57.87	-27.62	30.25	54.00	23.75	Average
2608.00	57.89	-27.62	30.27	54.00	23.73	Average
3040.00	59.86	-27.62	32.24	54.00	21.76	Average
3476.00	56.27	-27.62	28.65	54.00	25.35	Average
3912.00	49.98	-27.62	22.36	54.00	31.64	Average
4344.00	59.19	-27.62	31.57	54.00	22.43	Average
4780.00	48.98	-27.62	21.36	54.00	32.64	Average

Mode	TX 434.45MHz
------	--------------


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1304.00	28.04	4.81	21.00	53.85	74.00	20.15	Peak
1740.00	29.80	5.69	7.31	42.80	74.00	31.20	Peak
2172.00	31.84	6.30	15.61	53.75	74.00	20.25	Peak
2608.00	32.44	6.87	9.31	48.62	74.00	25.38	Peak
3040.00	32.89	7.51	12.20	52.60	74.00	21.40	Peak
3476.00	32.80	8.16	9.72	50.68	74.00	23.32	Peak
3908.00	33.21	8.63	8.34	50.18	74.00	23.82	Peak
4344.00	33.86	9.21	13.76	56.83	74.00	17.17	Peak
4780.00	34.21	9.52	2.99	46.72	74.00	27.28	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1304.00	53.85	-27.62	26.23	54.00	27.77	Average
1740.00	42.80	-27.62	15.18	54.00	38.82	Average
2172.00	53.75	-27.62	26.13	54.00	27.87	Average
2608.00	48.62	-27.62	21.00	54.00	33.00	Average
3040.00	52.60	-27.62	24.98	54.00	29.02	Average
3476.00	50.68	-27.62	23.06	54.00	30.94	Average
3908.00	50.18	-27.62	22.56	54.00	31.44	Average
4344.00	56.33	-27.62	28.71	54.00	25.29	Average
4780.00	46.72	-27.62	19.10	54.00	34.90	Average

A.1.2 Fundamental Frequency

Mode	TX 433.55MHz
------	--------------

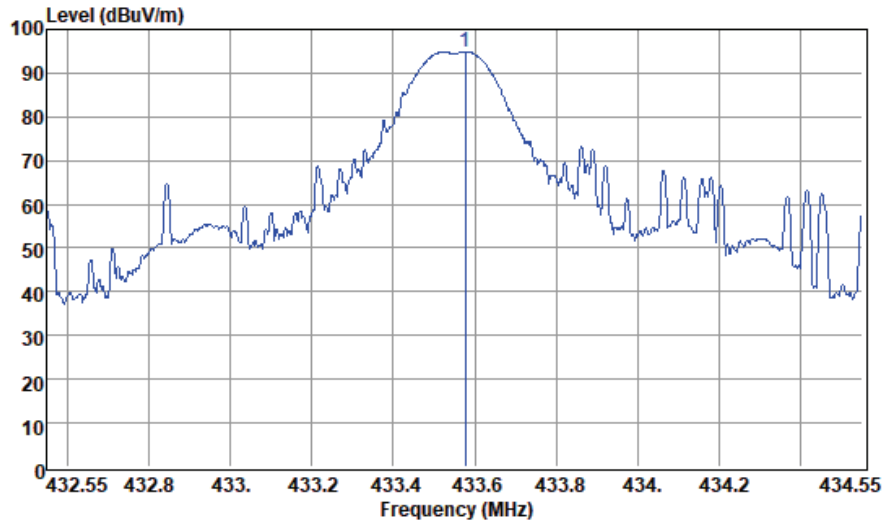

```

Site no.      : AUDIX No.1 3m Chamber      Data no.   : 2
Dis. / Ant.  : 3m CBL6112D 33821        Ant. pol.  : HORIZONTAL
Limit        :
Env. / Ins.  : 23°C / 50% N9010A        Engineer   : Martin
EUT         : NS-CH1XGS8
Power Rating : DC 3V
Test Mode    : Tx 433.55MHz
    
```


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
433.58	16.38	5.87	72.64	94.89	100.81	5.92	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
433.58	94.89	-27.62	67.27	80.81	13.54	Average

Remark: Horizontal is the strongest polarization and peak value has complied with average limit, so vertical won't be listed in test report.

Mode	TX 433.99MHz
------	--------------

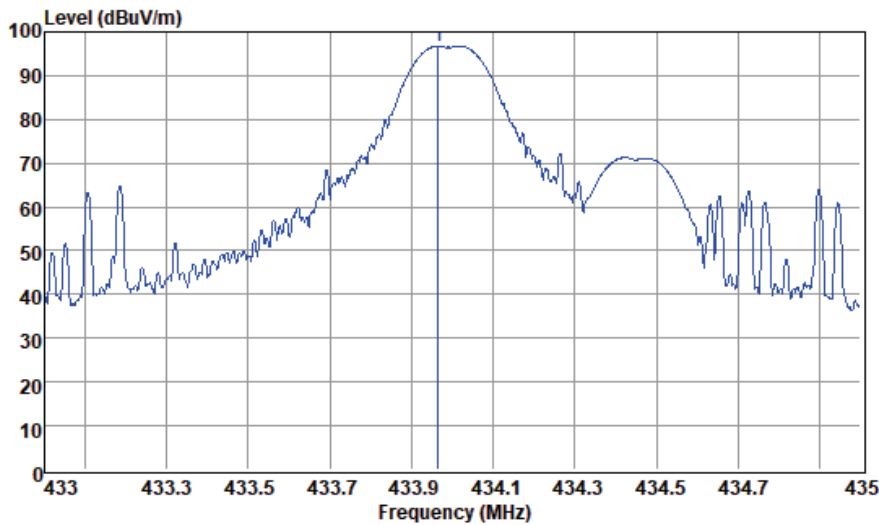

Site no. : AUDIX No.1 3m Chamber	Data no. : 4
Dis. / Ant. : 3m CBL6112D 33821	Ant. pol. : HORIZONTAL
Limit :	
Env. / Ins. : 23°C / 50% N9010A	Engineer : Martin
EUT : NS-CH1XGS8	
Power Rating : DC 3V	
Test Mode : Tx 433.99MHz	


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
433.97	16.38	5.87	74.54	96.79	100.83	4.04	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
433.97	96.79	-27.62	69.17	80.83	11.66	Average

Remark: Horizontal is the strongest polarization and peak value has complied with average limit, so vertical won't be listed in test report.

Mode	TX 434.45MHz
------	--------------

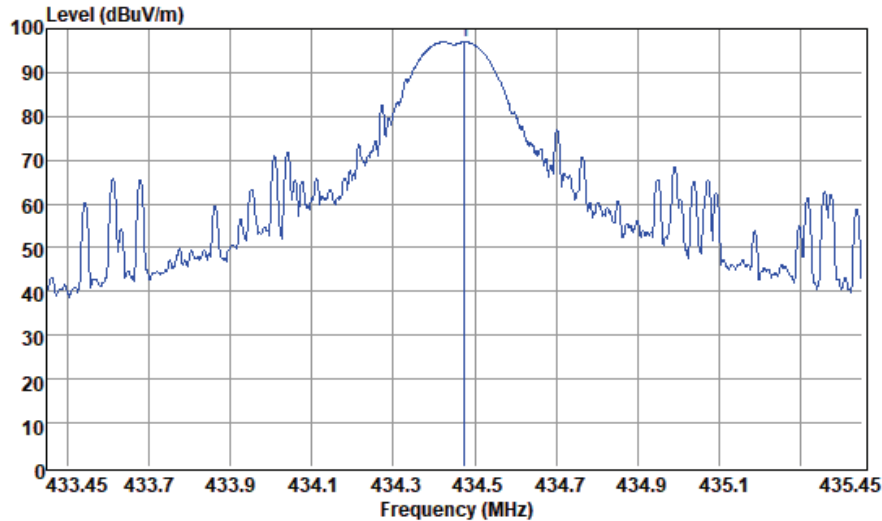

```

Site no.      : AUDIX No.1 3m Chamber      Data no.   : 6
Dis. / Ant.  : 3m CBL6112D 33821        Ant. pol.  : HORIZONTAL
Limit        :
Env. / Ins.  : 23*C / 50% N9010A         Engineer   : Martin
EUT         : NS-CH1XGS8
Power Rating : DC 3V
Test Mode    : Tx 434.45MHz
    
```

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
434.47	16.38	5.87	74.69	96.94	100.84	3.90	Peak

Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
434.47	96.94	-27.62	69.32	80.84	11.52	Average

Remark: Horizontal is the strongest polarization and peak value has complied with average limit, so vertical won't be listed in test report.




A.2 EMISSION BANDWIDTH MEASUREMENT

Test Date	2017/11/06	Temp./Hum.	24°C/55%
Frequency	TX 433.55MHz TX 434.00MHz TX 434.45MHz	Test Voltage	DC 3V (Via Battery)

A.2.1 Emission Bandwidth

Center Frequency (MHz)	20dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Tolerance (%)	Limit (%)
433.55	0.08948	0.088008	0.021	0.25
434.00	0.08888	0.089715	0.020	0.25
434.45	0.08949	0.087608	0.021	0.25

A.2.2 Measurement Plots

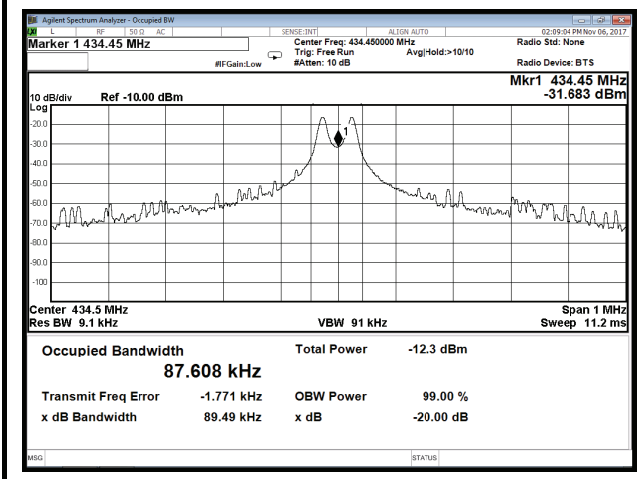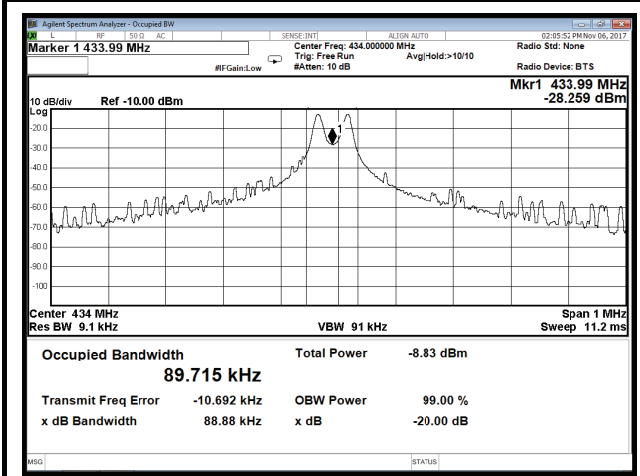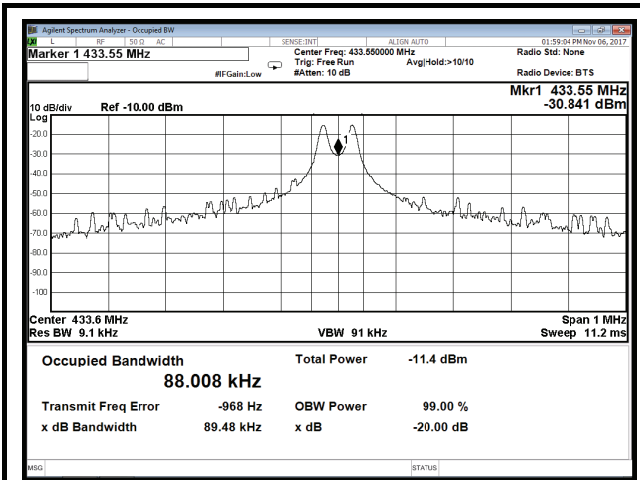

A.3 PERIODIC OPERATED MEASUREMENT


Test Date	2017/11/06	Temp./Hum.	24°C/55%
Frequency	TX 433.55MHz TX 434.00MHz TX 434.45MHz	Test Voltage	DC 3V (Via Battery)

A.3.1 Periodic Operated

Center Frequency (MHz)	Time (Sec.)	Limit (Sec.)
All Frequencies	2.34	< 5
	2.34	< 5
	2.34	< 5

Note: Time= 0.26*3 (Three transmissions in each frequency)*3 (The Transmitter transmit with three frequencies sequence) = 2340ms= 2.34 Sec.

A.3.2 Measurement Plots

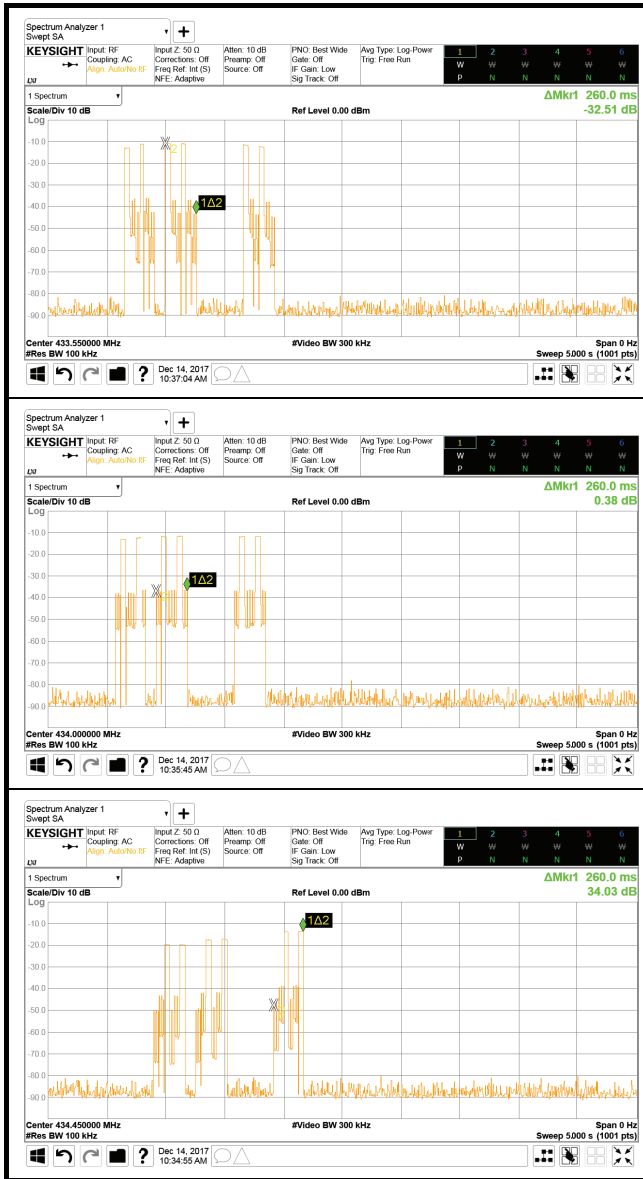



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: (1)NS-CH1XGS8 (2)NS-CH1XGS8-C)