



FCC TEST REPORT

REPORT NO.: RF921202R07

MODEL NO.: NL-5354CB Plus Aries2

RECEIVED: October 15, 2003

TESTED: October 28, 2003 ~ January 05, 2004

APPLICANT: SENAO INTERNATIONAL CO., LTD.

ADDRESS: 2F, No. 531 CHUNG CHENG RD., HSIN-TIEN,
TAIPEI, TAIWAN, R. O. C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 173 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
3.	GENERAL INFORMATION.....	8
3.1	GENERAL DESCRIPTION OF EUT	8
3.2	DESCRIPTION OF TEST MODES.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	11
3.5	CONFIGURATION OF SYSTEM UNDER TEST	11
4.	EST TYPES AND RESULTS (For Part 802.11b & draft 802.11g)	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS	25
4.2.8	TEST RESULTS (A).....	27
4.2.9	TEST RESULTS (B).....	30
4.2.10	TEST RESULTS (C).....	33
4.3	6dB BANDWIDTH MEASUREMENT.....	34
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	34
4.3.2	TEST INSTRUMENTS	34
4.3.3	TEST PROCEDURE	35
4.3.4	DEVIATION FROM TEST STANDARD	35
4.3.5	TEST SETUP	35
4.3.6	EUT OPERATING CONDITIONS	35
4.3.7	TEST RESULTS (A)	36
4.3.8	TEST RESULTS (B)	40
4.3.9	TEST RESULTS (C).....	44
4.4	MAXIMUM PEAK OUTPUT POWER	46
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	46
4.4.2	TEST INSTRUMENTS	46
4.4.3	TEST PROCEDURES	47
4.4.4	DEVIATION FROM TEST STANDARD	47
4.4.5	TEST SETUP	47



4.4.6	EUT OPERATING CONDITIONS	47
4.4.7	TEST RESULTS (A)	48
4.4.8	TEST RESULTS (B)	49
4.4.9	TEST RESULTS (C)	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2	TEST INSTRUMENTS	50
4.5.3	TEST PROCEDURE	51
4.5.4	DEVIATION FROM TEST STANDARD	51
4.5.5	TEST SETUP	51
4.5.6	EUT OPERATING CONDITION	51
4.5.7	TEST RESULTS (A)	52
4.5.8	TEST RESULTS (B)	56
4.5.9	TEST RESULTS (C)	60
4.6	BAND EDGES MEASUREMENT	62
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS	62
4.6.3	TEST PROCEDURE	62
4.6.4	DEVIATION FROM TEST STANDARD	62
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS (A)	63
4.6.7	TEST RESULTS (B)	68
4.6.8	TEST RESULTS (C)	73
4.7	ANTENNA REQUIREMENT	78
4.7.1	STANDARD APPLICABLE	78
4.7.2	ANTENNA CONNECTED CONSTRUCTION	78
5.	TEST TYPES AND RESULTS (For part 802.11a)	79
5.1	CONDUCTED EMISSION MEASUREMENT	79
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	79
5.1.2	TEST INSTRUMENTS	79
5.1.3	TEST PROCEDURES	80
5.1.4	DEVIATION FROM TEST STANDARD	80
5.1.5	TEST SETUP	81
5.1.6	EUT OPERATING CONDITIONS	81
5.1.7	TEST RESULTS	82
5.2	RADIATED EMISSION MEASUREMENT	84
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	84
5.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	85
5.2.3	TEST INSTRUMENTS	86
5.2.4	TEST PROCEDURES	87
5.2.5	DEVIATION FROM TEST STANDARD	87
5.2.6	TEST SETUP	88
5.2.7	EUT OPERATING CONDITIONS	88
5.2.8	TEST RESULTS	89
5.2.9	TEST RESULTS	90
5.2.10	TEST RESULTS	96
5.3	PEAK TRANSMIT POWER MEASUREMENT	101



5.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	101
5.3.2	TEST INSTRUMENTS	101
5.3.3	TEST PROCEDURE	102
5.3.4	DEVIATION FROM TEST STANDARD	102
5.3.5	TEST SETUP	102
5.3.6	EUT OPERATING CONDITIONS	102
5.3.7	TEST RESULTS	103
5.4	PEAK POWER EXCURSION MEASUREMENT	127
5.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	127
5.4.2	TEST INSTRUMENTS	127
5.4.3	TEST PROCEDURE	128
5.4.4	DEVIATION FROM TEST STANDARD	128
5.4.5	TEST SETUP	128
5.4.6	EUT OPERATING CONDITIONS	128
5.4.7	TEST RESULTS	129
5.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	142
5.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	142
5.5.2	TEST INSTRUMENTS	142
5.5.3	TEST PROCEDURES	142
5.5.4	DEVIATION FROM TEST STANDARD	142
5.5.5	TEST SETUP	143
5.5.6	EUT OPERATING CONDITIONS	143
5.5.7	TEST RESULTS	144
5.5.8	TEST RESULTS	151
5.6	FREQUENCY STABILITY	157
5.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	157
5.6.2	TEST INSTRUMENTS	157
5.6.3	TEST PROCEDURE	157
5.6.4	DEVIATION FROM TEST STANDARD	158
5.6.5	TEST SETUP	158
5.6.6	EUT OPERATING CONDITION	158
5.6.7	TEST RESULTS	159
5.7	BAND EDGES MEASUREMENT	160
5.7.1	TEST INSTRUMENTS	160
5.7.2	TEST PROCEDURE	160
5.7.3	EUT OPERATING CONDITION	160
5.7.4	TEST RESULTS	161
5.8	ANTENNA REQUIREMENT	170
5.8.1	STANDARD APPLICABLE	170
5.8.2	ANTENNA CONNECTED CONSTRUCTION	170
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	171
7.	INFORMATION ON THE TESTING LABORATORIES	173



1. CERTIFICATION

PRODUCT : Atheros 11a/g Card Bus Adapter
BRAND NAME : SENAO
MODEL NO. : NL-5354CB Plus Aries2
TEST ITEM: ENGINEERING SAMPLE
APPLICANT : SENAO INTERNATIONAL CO., LTD.
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from October 28, 2003 to January 05, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Wendy Liao, **DATE:** January 19, 2004

Wendy Liao

APPROVED BY: Ellis Wu, **DATE:** January 19, 2004

Ellis Wu / Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -11.21dB at 0.166MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.01dB at 2390.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

Note: The information of measurement uncertainty is available upon the customer's request.



APPLIED STANDARD: FCC Part 15, Subpart E			
Standard Section	Test Type	Result	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.45dB at 0.173MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit Minimum passing margin is -1.47dB at 10520.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Atheros 11a/g Card Bus Adapter
MODEL NO.	NL-5354CB Plus Aries2
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	54/48/36/24/18/12/9/6/11/5.5/2/1Mbps *(Turbo mode : up to 108Mbps)
FREQUENCY RANGE	802.11b and draft 802.11g: 2412~2462MHz 802.11a: 5.15~5.35GHz and 5.725~5.825GHz
NUMBER OF CHANNEL	802.11b and 802.11g: 11 / 1 for Turbo mode 802.11a: 12 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b and 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	802.11b and draft 802.11g: 22.00dBm 802.11a: 17.88dBm
DATA CABLE	NA
ANTENNA TYPE	Printed antenna with 0dBi antenna gain
I/O PORTS	PCMCIA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11g technology.
2. IEEE 802.11a, 802.11b, and Draft 802.11g Compliant.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

For 802.11b and draft 802.11g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate of 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, was chosen for final test.
4. One turbo mode at frequency 2437MHz.
5. Test result A is for CCK technique, test result B is for OFDM technique and test result C is for OFDM technique in Turbo mode which presented in Section 4.

For 802.11a: Twelve channels are provided to this EUT for Normal mode.

Channel	Frequency	Channel	Frequency
1	5180 MHz	7	5300 MHz
2	5200 MHz	8	5320 MHz
3	5220 MHz	9	5745 MHz
4	5240 MHz	10	5765 MHz
5	5260 MHz	11	5785 MHz
6	5280 MHz	12	5805 MHz

Five channels are provided to this EUT for Turbo Mode.

Channel	Frequency	Channel	Frequency
1	5210 MHz	4	5760 MHz
2	5250 MHz	5	5800 MHz
3	5290 MHz		

NOTE:

1. The EUT was tested in both normal mode (channel bandwidth of approximately 30MHz) and turbo mode (channel bandwidth of approximately 60MHz).
2. "Normal Mode" allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
3. "Turbo Mode" allows data rates of up to 108Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).
4. Channel 1, 4, 5, 8, 9 and 12 are the closest frequencies to the band edge, were chosen for final test of Normal Mode.
5. Channel 1 ~ 5 were chosen for final test of turbo mode.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an Atheros 11a/g Card Bus Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247),
Subpart E (15.407). ANSI C63.4 : 1992**

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-0791UH-12800-123-5423	FCC DoC Approved
2	MODEM	ACEEX	1414	980020503	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

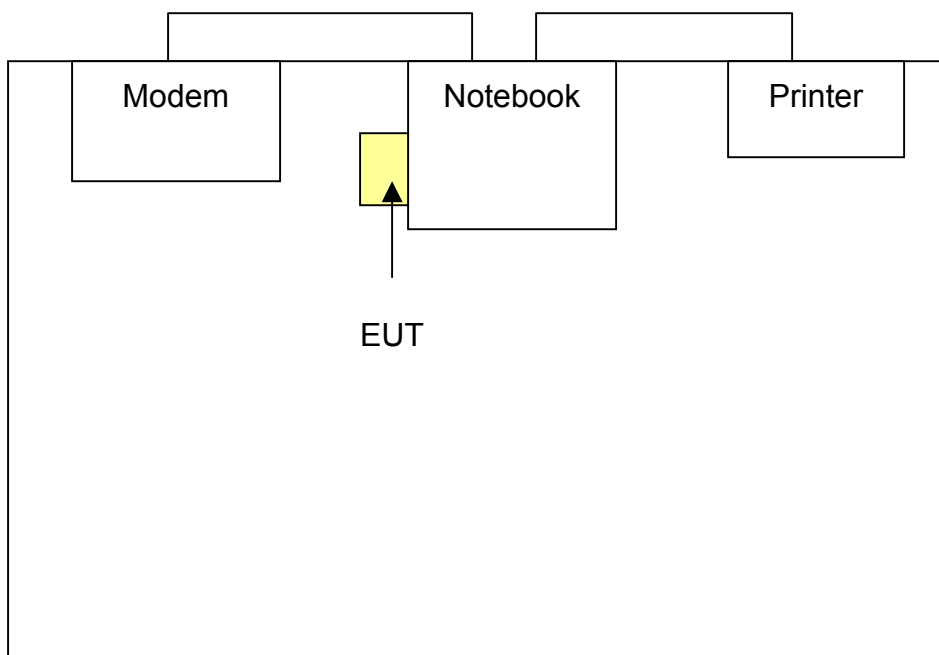



4. EST TYPES AND RESULTS (FOR PART 802.11b & draft 802.11g)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 04, 2005
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 09, 2004
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 19, 2004
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 19, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

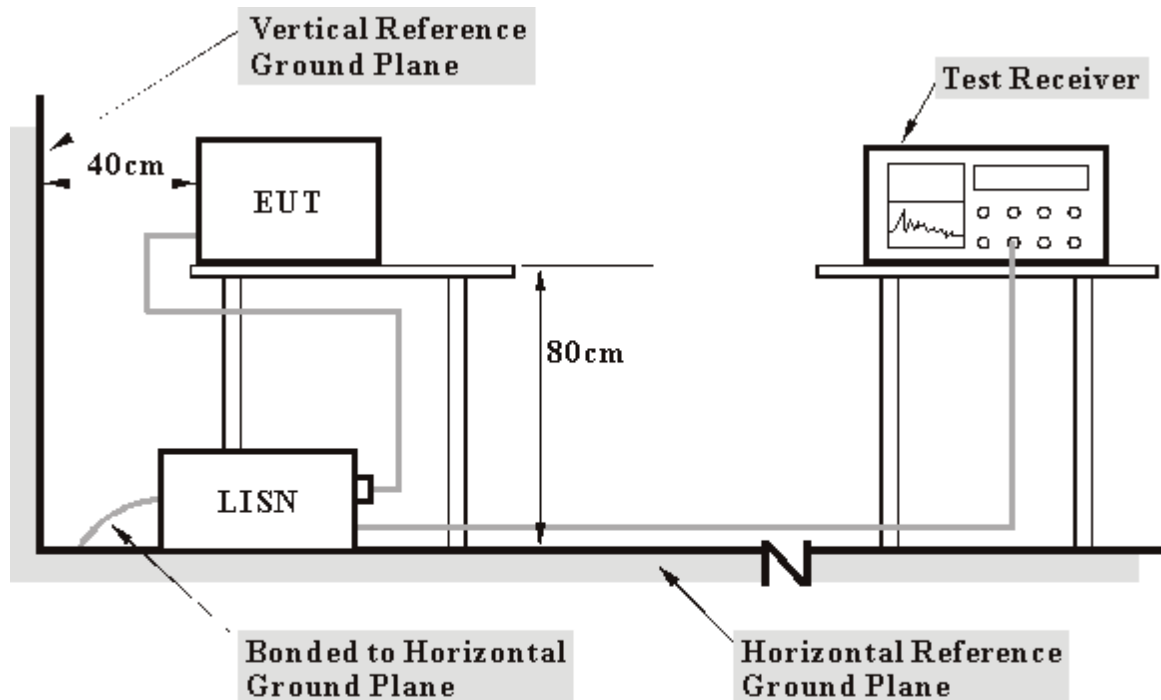

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT into the notebook system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeated c ~ e.




4.1.7 TEST RESULTS

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 1	6dB BANDWIDTH	9 kHz
		PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.06	52.71	-	52.77	-	64.98
2	0.224	0.06	49.33	-	49.39	-	62.66	52.66	-13.27	-
3	0.279	0.06	43.04	-	43.10	-	60.85	50.85	-17.75	-
4	0.334	0.06	36.61	-	36.67	-	59.36	49.36	-22.69	-
5	4.020	0.22	26.33	-	26.55	-	56.00	46.00	-29.45	-
6	19.426	0.63	26.68	-	27.31	-	60.00	50.00	-32.69	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

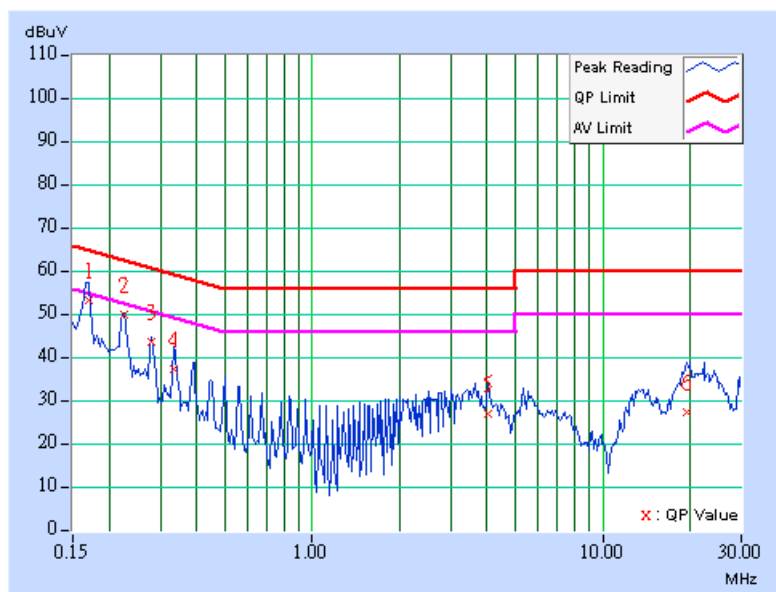




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 1	6dB BANDWIDTH	9 kHz
		PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.05	53.92	-	53.97	-	65.18
2	0.220	0.05	47.25	-	47.30	-	62.81	52.81	-15.51	-
3	0.279	0.05	42.05	-	42.10	-	60.85	50.85	-18.75	-
4	0.334	0.05	37.93	-	37.98	-	59.36	49.36	-21.38	-
5	3.846	0.20	34.53	-	34.73	-	56.00	46.00	-21.27	-
6	19.875	0.51	32.64	-	33.15	-	60.00	50.00	-26.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

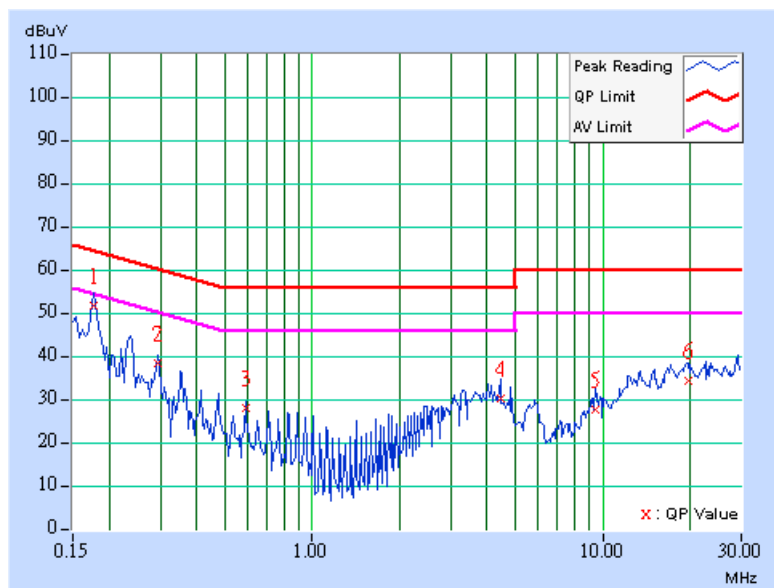




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 6	6dB BANDWIDTH	9 kHz
		PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.06	52.31	-	52.37	-	64.98	54.98	-12.62	-
2	0.224	0.06	46.96	-	47.02	-	62.66	52.66	-15.64	-
3	0.279	0.06	42.51	-	42.57	-	60.85	50.85	-18.28	-
4	0.338	0.06	36.24	-	36.30	-	59.26	49.26	-22.96	-
5	12.867	0.50	20.35	-	20.85	-	60.00	50.00	-39.15	-
6	22.324	0.76	29.20	-	29.96	-	60.00	50.00	-30.04	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

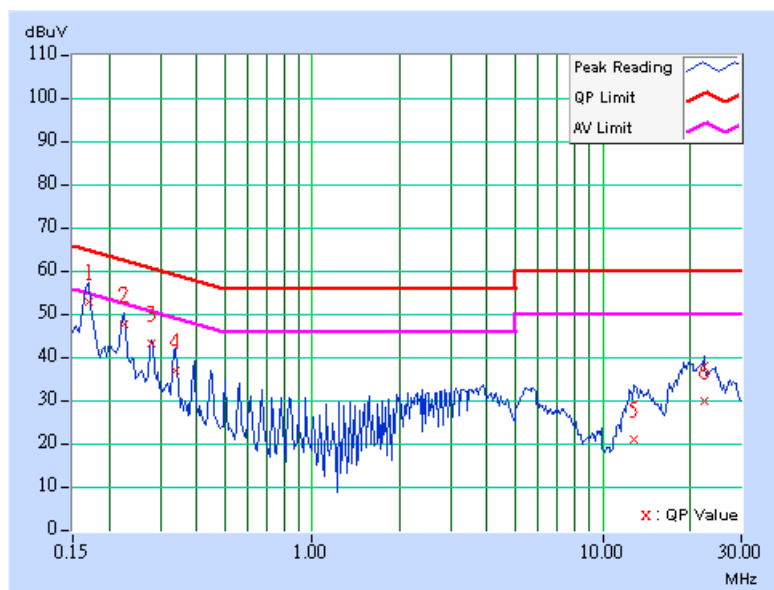




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 6	6dB BANDWIDTH	9 kHz
		PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.05	50.57	-	50.62	-	64.98
2	0.224	0.05	44.85	-	44.90	-	62.66	52.66	-17.76	-
3	0.279	0.05	40.11	-	40.16	-	60.85	50.85	-20.69	-
4	0.338	0.05	34.47	-	34.52	-	59.26	49.26	-24.74	-
5	3.922	0.21	33.72	-	33.93	-	56.00	46.00	-22.07	-
6	18.340	0.50	30.69	-	31.19	-	60.00	50.00	-28.81	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

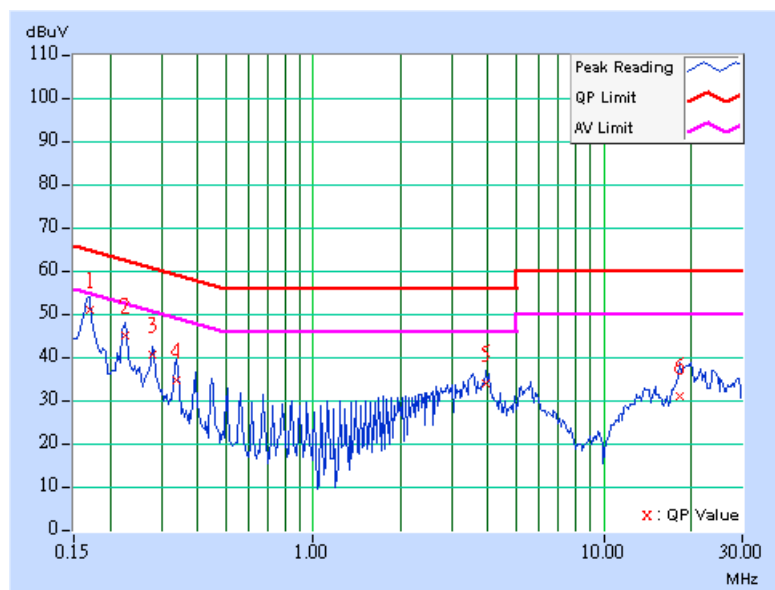




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 11	6dB BANDWIDTH	9 kHz
		PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.06	53.62	-	53.68	-	64.98
2	0.224	0.06	45.97	-	46.03	-	62.66	52.66	-16.63	-
3	0.283	0.06	41.27	-	41.33	-	60.73	50.73	-19.40	-
4	5.504	0.27	27.08	-	27.35	-	60.00	50.00	-32.65	-
5	18.914	0.62	27.61	-	28.23	-	60.00	50.00	-31.77	-
6	21.848	0.73	26.75	-	27.48	-	60.00	50.00	-32.52	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

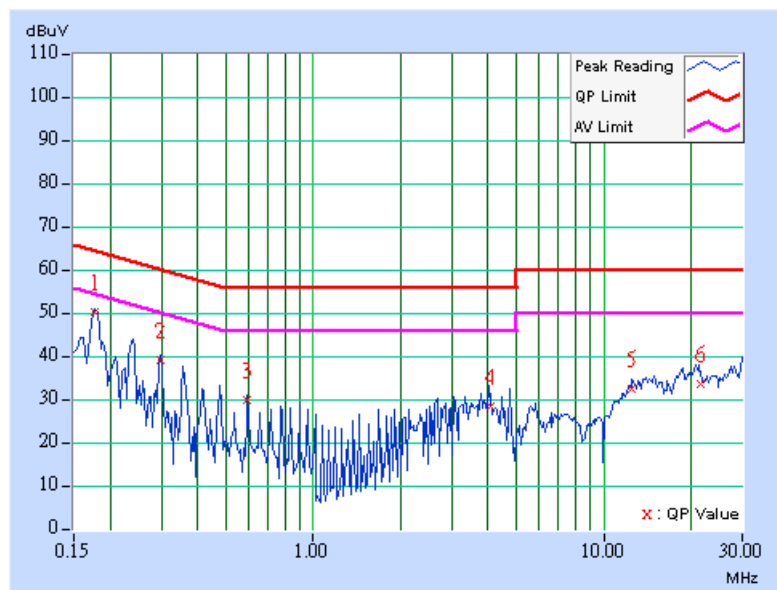




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 11	6dB BANDWIDTH	9 kHz
		PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.05	50.19	-	50.24	-	64.98
2	0.224	0.05	46.54	-	46.59	-	62.66	52.66	-16.07	-
3	0.283	0.05	39.27	-	39.32	-	60.73	50.73	-21.41	-
4	3.758	0.20	30.25	-	30.45	-	56.00	46.00	-25.55	-
5	18.691	0.50	26.30	-	26.80	-	60.00	50.00	-33.20	-
6	25.430	0.73	27.59	-	28.32	-	60.00	50.00	-31.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

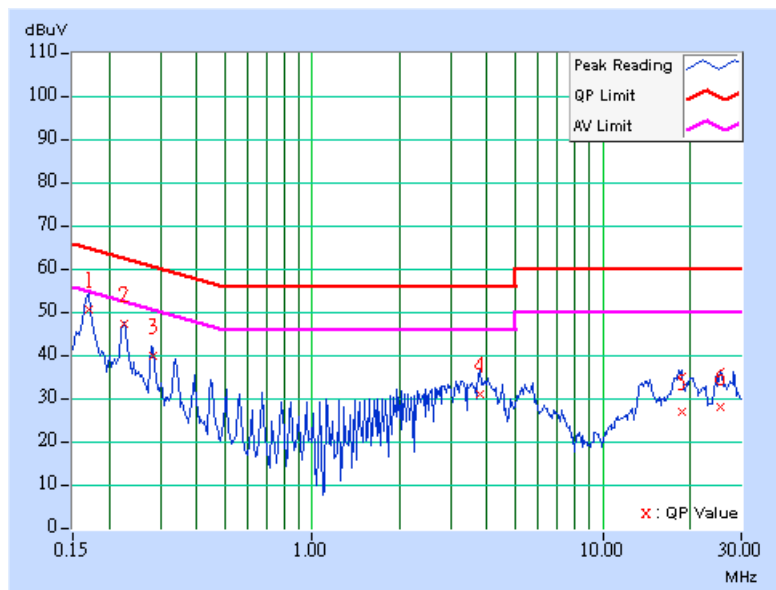



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
* HP Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* Broadband Horn Antenna	BBHA 9170	212	May 30, 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiate d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 04, 2005
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 04, 2005

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

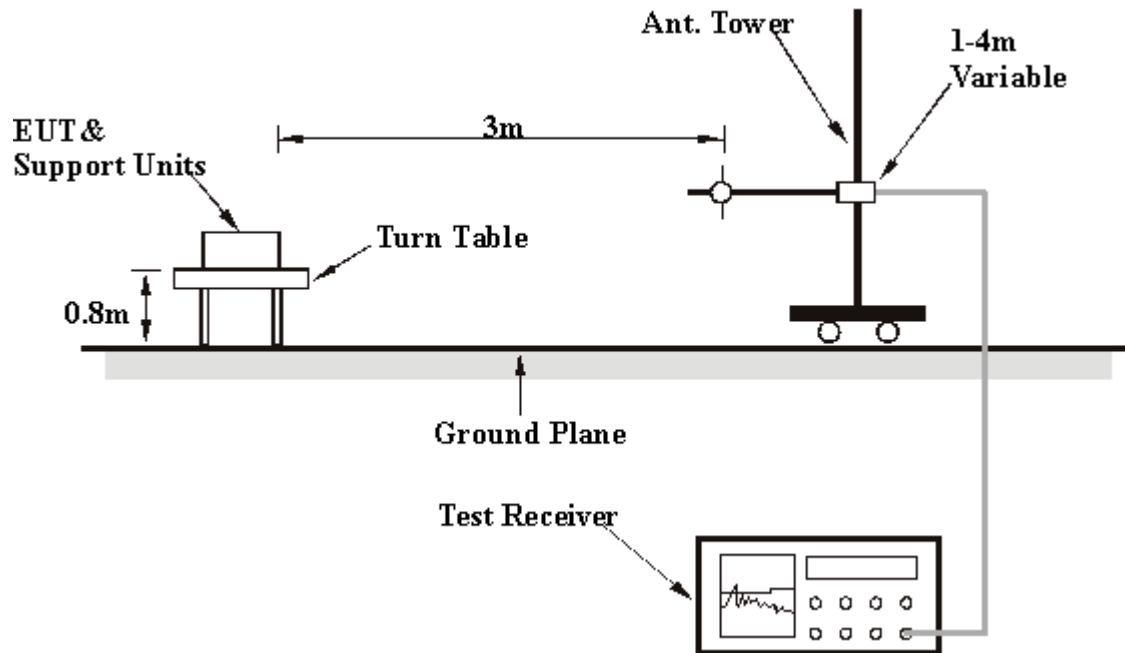

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 74 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	24.23 QP	40.00	-15.77	3.00 H	157	10.85	13.38
2	133.03	31.90 QP	43.50	-11.60	2.50 H	217	18.63	13.26
3	175.79	32.73 QP	43.50	-10.77	1.50 H	229	19.86	12.87
4	265.21	29.03 QP	46.00	-16.97	1.00 H	1	15.15	13.88
5	298.26	30.28 QP	46.00	-15.72	1.00 H	229	15.23	15.05
6	360.46	26.88 QP	46.00	-19.12	1.00 H	40	10.19	16.69
7	399.34	30.72 QP	46.00	-15.28	1.00 H	61	13.03	17.69
8	432.38	26.79 QP	46.00	-19.21	2.00 H	91	8.05	18.74
9	500.42	27.85 QP	46.00	-18.15	1.75 H	124	7.83	20.02
10	533.47	35.08 QP	46.00	-10.92	1.50 H	211	14.32	20.75
11	564.57	27.96 QP	46.00	-18.04	1.50 H	229	6.41	21.55
12	599.56	30.59 QP	46.00	-15.41	1.50 H	247	8.00	22.59
13	653.99	26.27 QP	46.00	-19.73	1.50 H	223	2.96	23.31
14	702.59	33.97 QP	46.00	-12.03	1.25 H	307	9.92	24.05
15	749.24	30.03 QP	46.00	-15.97	2.00 H	169	4.70	25.33
16	811.44	27.66 QP	46.00	-18.34	1.00 H	133	1.92	25.74
17	858.10	35.10 QP	46.00	-10.90	1.00 H	133	8.80	26.30
18	916.41	28.15 QP	46.00	-17.85	1.00 H	274	0.83	27.33
19	947.52	30.88 QP	46.00	-15.12	1.50 H	118	3.20	27.68

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 74 % RH, 991 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	28.37 QP	40.00	-11.63	1.25 V	250	14.99	13.38
2	133.03	33.06 QP	43.50	-10.44	1.25 V	85	19.80	13.26
3	175.79	32.81 QP	43.50	-10.69	1.00 V	49	19.94	12.87
4	300.20	30.32 QP	46.00	-15.68	1.25 V	55	15.22	15.10
5	350.74	32.54 QP	46.00	-13.46	2.50 V	88	16.10	16.44
6	399.34	32.58 QP	46.00	-13.42	1.00 V	130	14.88	17.69
7	467.37	29.22 QP	46.00	-16.78	1.00 V	169	9.67	19.55
8	498.48	31.42 QP	46.00	-14.58	1.00 V	97	11.43	19.99
9	531.52	37.38 QP	46.00	-8.62	1.00 V	94	16.67	20.71
10	564.57	29.13 QP	46.00	-16.87	1.25 V	4	7.58	21.55
11	599.56	30.90 QP	46.00	-15.10	1.00 V	163	8.32	22.59
12	630.66	29.90 QP	46.00	-16.10	1.00 V	172	6.90	23.00
13	702.59	40.18 QP	46.00	-5.82	1.50 V	169	16.13	24.05
14	733.69	27.77 QP	46.00	-18.23	1.50 V	169	2.87	24.90
15	766.73	27.49 QP	46.00	-18.51	1.75 V	61	2.05	25.44
16	799.78	29.05 QP	46.00	-16.95	1.50 V	136	3.43	25.62
17	858.10	37.29 QP	46.00	-8.71	1.25 V	166	10.99	26.30
18	912.53	29.96 QP	46.00	-16.04	1.25 V	163	2.68	27.28
19	947.52	33.02 QP	46.00	-12.98	1.25 V	340	5.34	27.68

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (A)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.13 PK	74.00	-13.87	1.00 H	275	30.48	29.65
1	2390.00	51.07 AV	54.00	-2.93	1.00 H	275	21.42	29.65
2	*2412.00	114.30 PK			1.00 H	275	84.58	29.72
2	*2412.00	105.24 AV			1.00 H	275	75.52	29.72
3	4824.00	54.74 PK	74.00	-19.26	1.85 H	3	19.29	35.45
3	4824.00	38.39 AV	54.00	-15.61	1.85 H	3	2.94	35.45
4	7236.00	60.45 PK	74.00	-13.55	2.00 H	283	19.82	40.63
4	7236.00	46.50 AV	54.00	-7.50	2.00 H	283	5.87	40.63
5	9648.00	57.54 PK	74.00	-16.46	1.79 H	307	13.08	44.46
5	9648.00	46.25 AV	54.00	-7.75	1.79 H	307	1.79	44.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.54 PK	74.00	-16.46	1.00 V	64	27.89	29.65
1	2390.00	48.58 AV	54.00	-5.42	1.00 V	64	18.93	29.65
2	*2412.00	111.71 PK			1.00 V	64	81.99	29.72
2	*2412.00	102.75 AV			1.00 V	64	73.03	29.72
3	4824.00	57.74 PK	74.00	-16.26	1.03 V	274	22.29	35.45
3	4824.00	41.84 AV	54.00	-12.16	1.03 V	274	6.39	35.45
4	7236.00	60.03 PK	74.00	-13.97	2.35 V	316	19.40	40.63
4	7236.00	46.01 AV	54.00	-7.99	2.35 V	316	5.38	40.63
5	9648.00	58.23 PK	74.00	-15.77	2.61 V	312	13.77	44.46
5	9648.00	49.81 AV	54.00	-4.19	2.61 V	312	5.35	44.46

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.46 PK			1.04 H	274	86.67	29.79
1	*2437.00	107.58 AV			1.04 H	274	77.79	29.79
2	4874.00	55.52 PK	74.00	-18.48	1.66 H	276	19.73	35.79
2	4874.00	37.84 AV	54.00	-16.16	1.66 H	276	2.05	35.79
3	7311.00	62.23 PK	74.00	-11.77	2.10 H	273	21.57	40.67
3	7311.00	46.62 AV	54.00	-7.38	2.10 H	273	5.96	40.67
4	9748.00	56.23 PK	74.00	-17.77	2.12 H	14	12.03	44.20
4	9748.00	42.05 AV	54.00	-11.95	2.12 H	14	-2.15	44.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.20 PK			1.24 V	33	83.41	29.79
1	*2437.00	103.50 AV			1.24 V	33	73.71	29.79
2	4874.00	59.38 PK	74.00	-14.62	1.24 V	33	23.59	35.79
2	4874.00	42.52 AV	54.00	-11.48	1.24 V	33	6.73	35.79
3	7310.00	65.06 PK	74.00	-8.94	2.00 V	266	24.40	40.66
3	7310.00	44.08 AV	54.00	-9.92	2.00 V	266	3.42	40.66

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.94 PK			1.00 H	275	83.09	29.85
1	*2462.00	104.80 AV			1.00 H	275	74.95	29.85
2	2483.50	55.85 PK	74.00	-18.15	1.00 H	275	25.94	29.91
2	2483.50	47.71 AV	54.00	-6.29	1.00 H	275	17.80	29.91
3	4924.00	54.18 PK	74.00	-19.82	2.07 H	308	18.09	36.09
3	4924.00	37.99 AV	54.00	-16.01	2.07 H	308	1.90	36.09
4	7386.00	60.21 PK	74.00	-13.79	1.96 H	273	19.18	41.02
4	7386.00	45.64 AV	54.00	-8.36	1.96 H	273	4.61	41.02
5	9848.00	48.96 PK	74.00	-25.04	2.25 H	294	4.86	44.10
6	12310.00	57.92 PK	74.00	-16.08	1.34 H	248	11.98	45.94
6	12310.00	44.51 AV	54.00	-9.49	1.34 H	248	-1.43	45.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.67 PK			1.00 V	75	80.82	29.85
1	*2462.00	101.68 AV			1.00 V	75	71.83	29.85
2	2462.00	53.58 PK	74.00	-20.42	1.00 V	75	23.73	29.85
2	2462.00	44.59 AV	54.00	-9.41	1.00 V	75	14.74	29.85
3	4924.00	57.20 PK	74.00	-16.80	1.52 V	91	21.11	36.09
3	4924.00	40.10 AV	54.00	-13.90	1.52 V	91	4.01	36.09
4	7386.00	60.32 PK	74.00	-13.68	2.54 V	322	19.29	41.02
4	7386.00	46.33 AV	54.00	-7.67	2.54 V	322	5.30	41.02
5	9848.00	57.03 PK	74.00	-16.97	1.00 V	230	12.93	44.10
5	9848.00	47.73 AV	54.00	-6.27	1.00 V	230	3.63	44.10

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.2.9 TEST RESULTS (B)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.13 PK	74.00	-11.87	1.00 H	0	32.48	29.65
1	2390.00	51.99 AV	54.00	-2.01	1.00 H	0	22.34	29.65
2	*2412.00	109.53 PK			1.00 H	0	79.81	29.72
2	*2412.00	99.39 AV			1.00 H	0	69.67	29.72
3	4824.00	51.50 PK	74.00	-22.50	1.85 H	215	16.05	35.45
3	4824.00	32.98 AV	54.00	-21.02	1.85 H	215	-2.47	35.45
4	7236.00	52.04 PK	74.00	-21.96	1.71H	230	11.41	40.63
4	7236.00	38.34 AV	54.00	-15.66	1.71H	230	-2.29	40.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.75 PK	74.00	-17.25	2.24 H	238	27.10	29.65
1	2390.00	47.03 AV	54.00	-6.97	2.24 H	238	17.38	29.65
2	*2412.00	104.15 PK			2.24 H	238	74.43	29.72
2	*2412.00	94.43 AV			2.24 H	238	64.71	29.72
3	4824.00	46.04 PK	74.00	-27.96	1.26 H	231	10.59	35.45
3	4824.00	32.50 AV	54.00	-21.50	1.26 H	231	-2.95	35.45

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.91 PK			1.22 H	99	80.12	29.79
1	*2437.00	99.52 AV			1.22 H	99	69.73	29.79
2	4874.00	45.52 PK	74.00	-28.48	1.61 H	170	9.73	35.79
2	4874.00	31.93 AV	54.00	-22.07	1.61 H	170	-3.86	35.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.70 PK			1.53 V	168	73.91	29.79
1	*2437.00	93.44 AV			1.53 V	168	63.65	29.79
2	4874.00	46.13 PK	74.00	-27.87	1.14 V	273	10.34	35.79
2	4874.00	32.04 AV	54.00	-21.96	1.14 V	273	-3.75	35.79

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency



EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.51 PK			1.26 H	96	79.66	29.85
1	*2462.00	100.72 AV			1.26 H	96	70.87	29.85
2	2483.60	59.51 PK	74.00	-14.49	1.26 H	96	29.60	29.91
2	2483.60	50.72 AV	54.00	-3.28	1.26 H	96	20.81	29.91
3	4924.00	49.05 PK	74.00	-24.95	1.00 H	24	12.96	36.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.65 PK			1.03 V	65	74.80	29.85
1	*2462.00	94.27 AV			1.03 V	65	64.42	29.85
2	2483.60	54.65 PK	74.00	-19.35	1.03 V	65	24.74	29.91
2	2483.60	44.27 AV	54.00	-9.73	1.03 V	65	14.36	29.91
3	4924.00	47.70 PK	74.00	-26.30	1.35 V	147	11.61	36.09

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency



4.2.10 TEST RESULTS (C)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 60 % RH, 991 hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.83 PK			2.11 H	199	75.04	29.79
1	*2437.00	95.47 AV			2.11 H	199	65.68	29.79
2	2483.50	52.57 PK	74.00	-21.43	2.11 H	199	22.66	29.91
2	2483.50	43.24 AV	54.00	-10.76	2.11 H	199	13.33	29.91
3	2483.50	58.61 PK	74.00	-15.39	2.11 H	199	28.70	29.91
3	2483.50	49.25 AV	54.00	-4.75	2.11 H	199	19.34	29.91
4	4874.00	45.59 PK	74.00	-28.41	1.21 H	230	9.80	35.79
4	4874.00	31.89 AV	54.00	-22.11	1.21 H	230	-3.90	35.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.63 PK	74.00	-18.37	1.42 V	71	25.98	29.65
1	2390.00	46.31 AV	54.00	-7.69	1.42 V	71	16.66	29.65
2	*2437.00	101.85 PK			1.42 V	71	72.06	29.79
2	*2437.00	92.53 AV			1.42 V	71	62.74	29.79
3	2483.50	49.59 PK	74.00	-24.41	1.42 V	71	19.68	29.91
4	4874.00	44.98 PK	74.00	-29.02	1.25 V	275	9.19	35.79
4	4874.00	31.56 AV	54.00	-22.44	1.21 H	230	-4.23	35.79

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug.12, 2004

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS (A)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.04	0.5	PASS
6	2437	11.68	0.5	PASS
11	2462	11.60	0.5	PASS




CH1

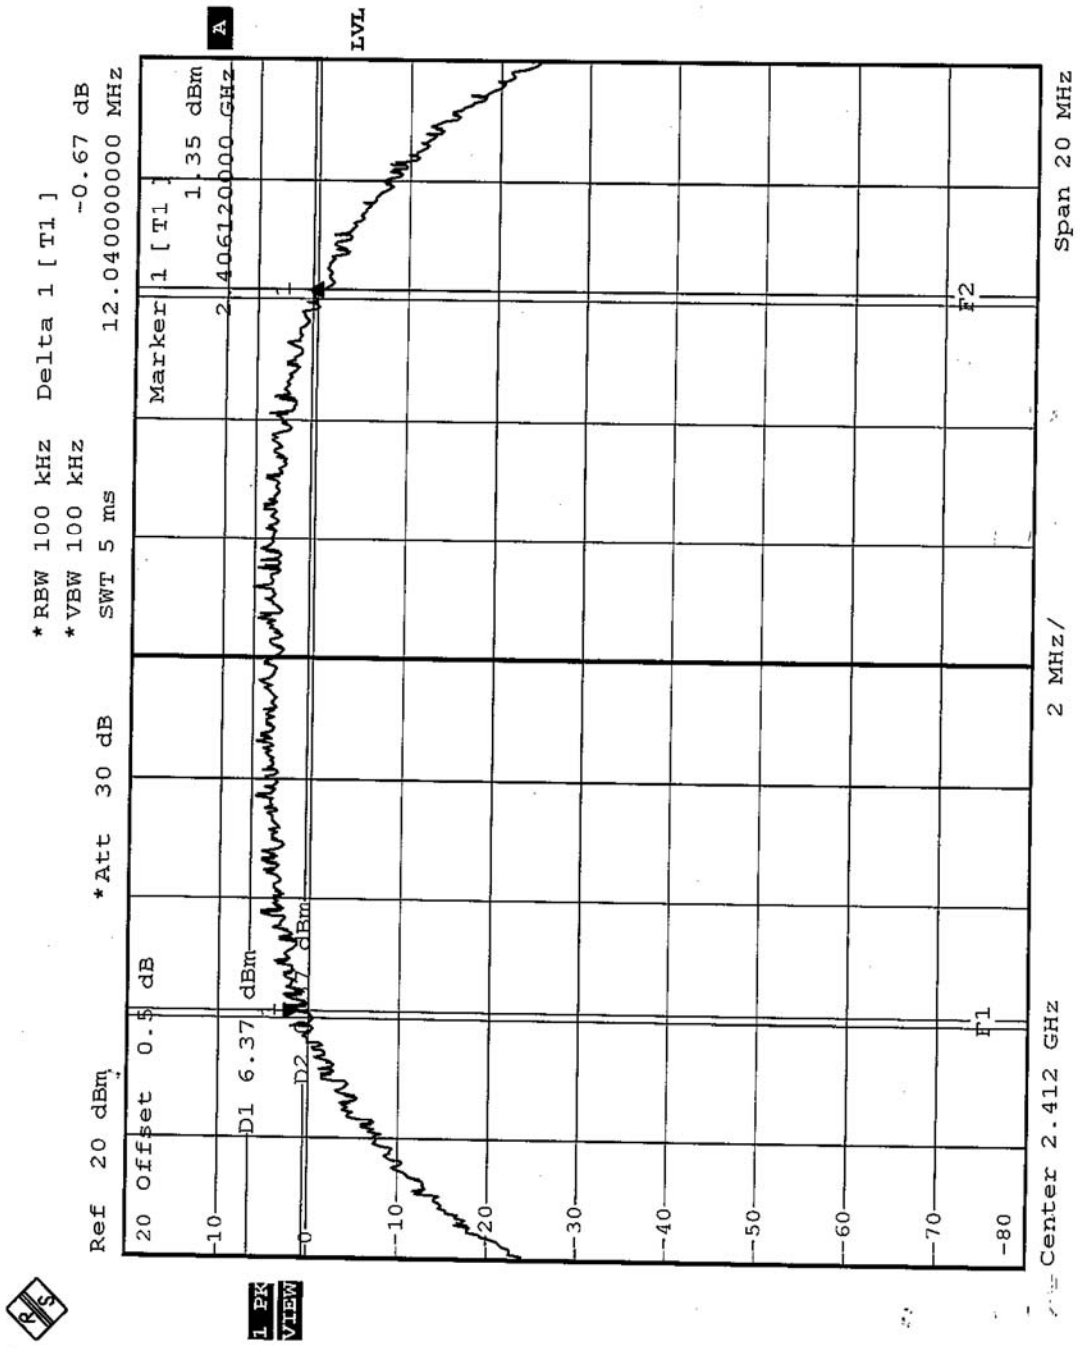




CH6

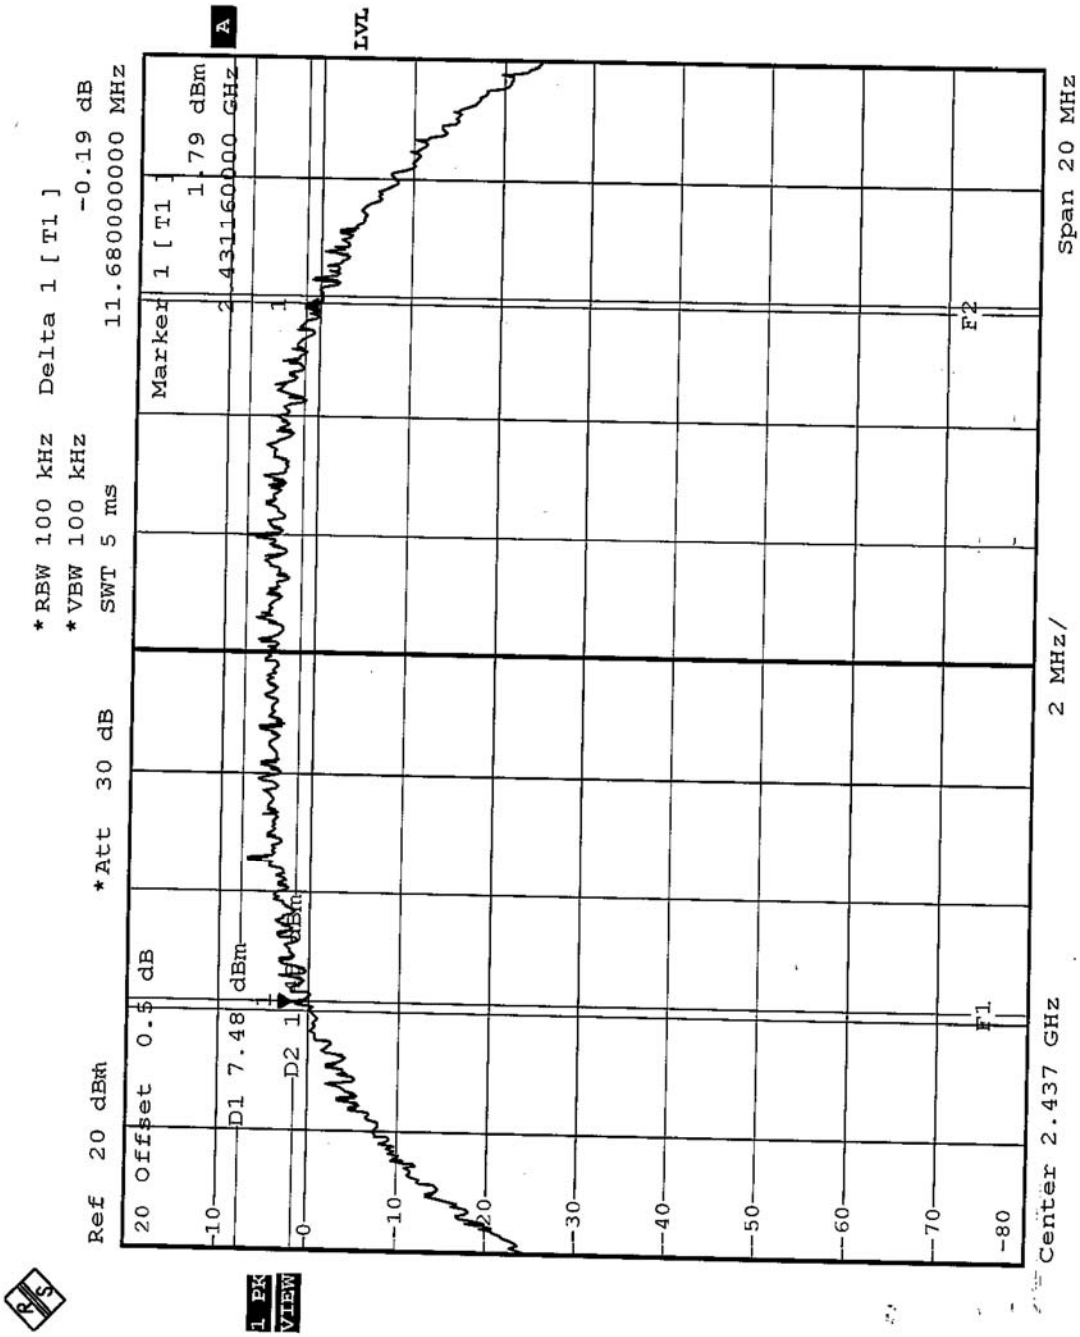



CH11

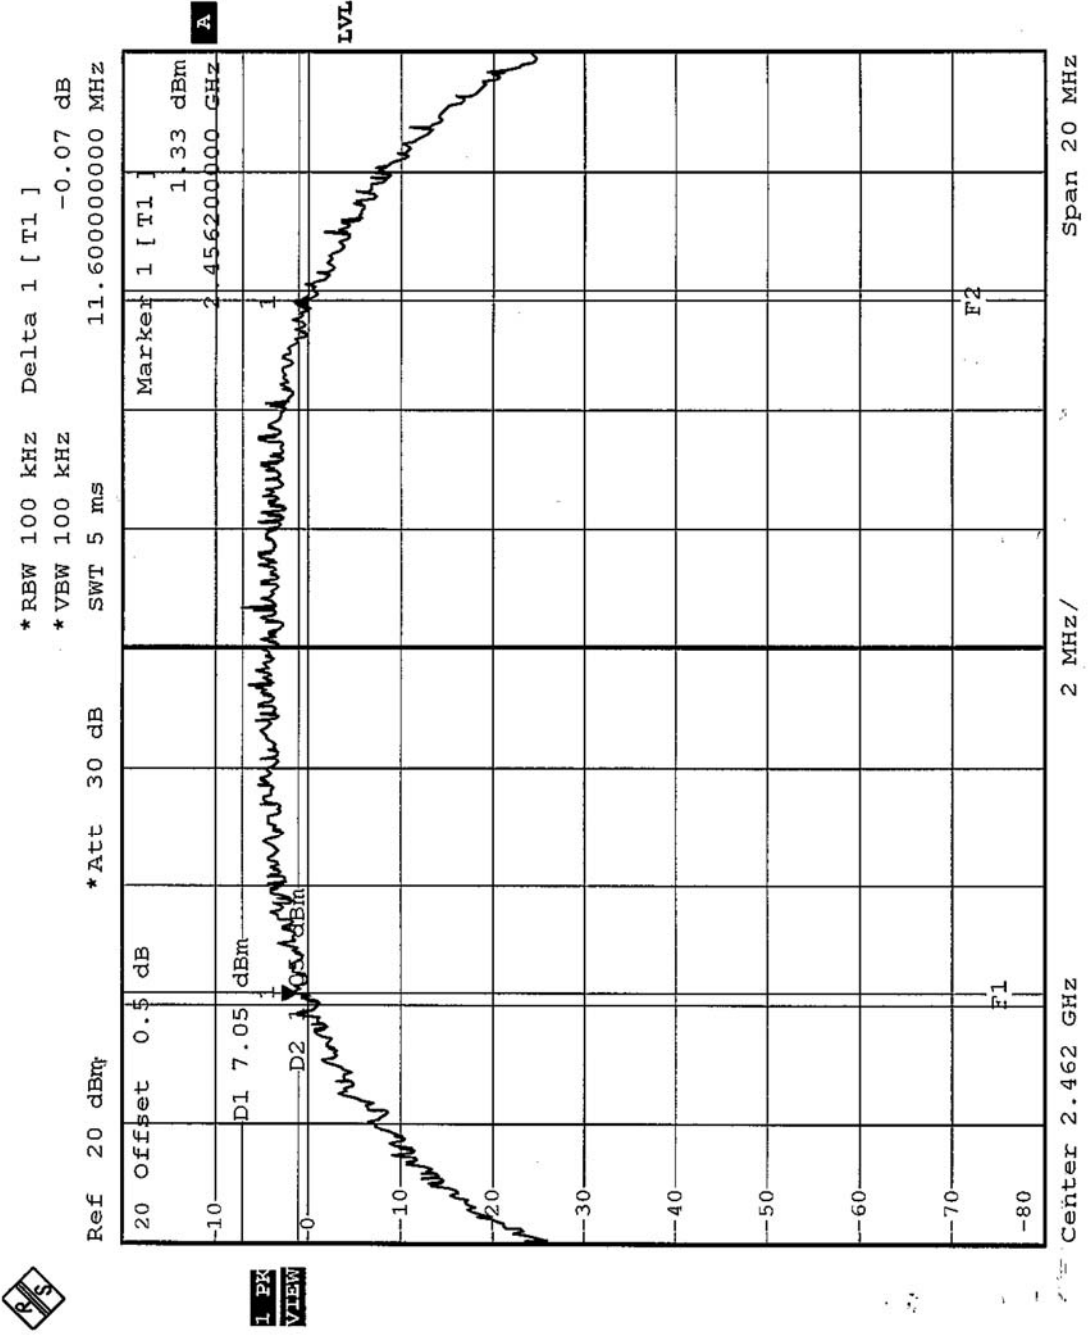




4.3.8 TEST RESULTS (B)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 60%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.40	0.5	PASS




CH1

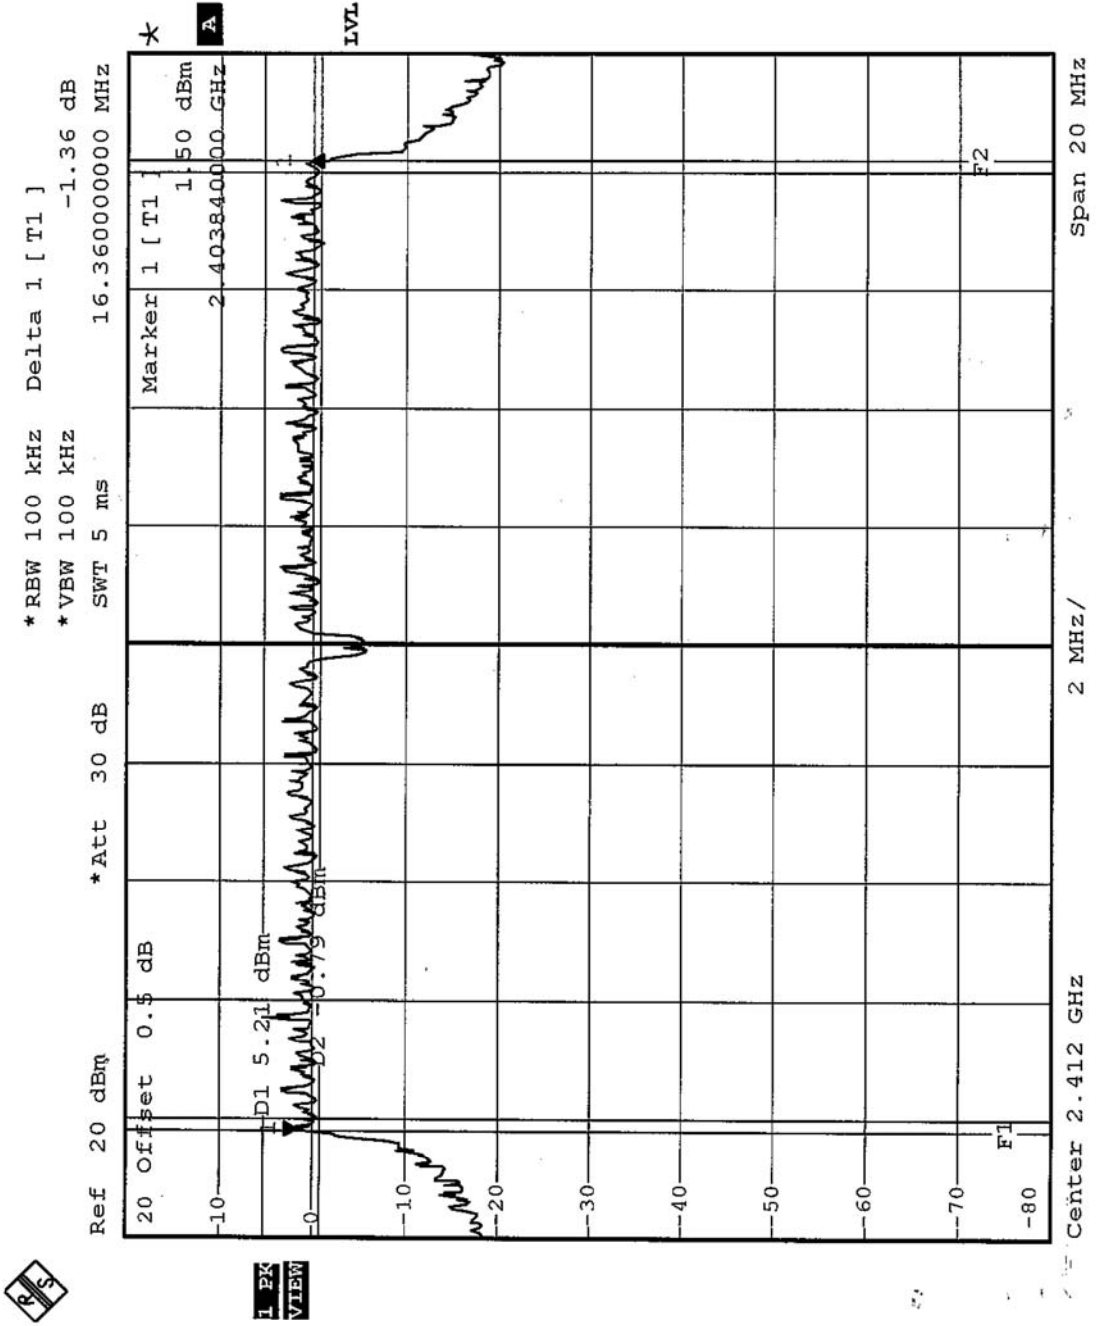




CH6

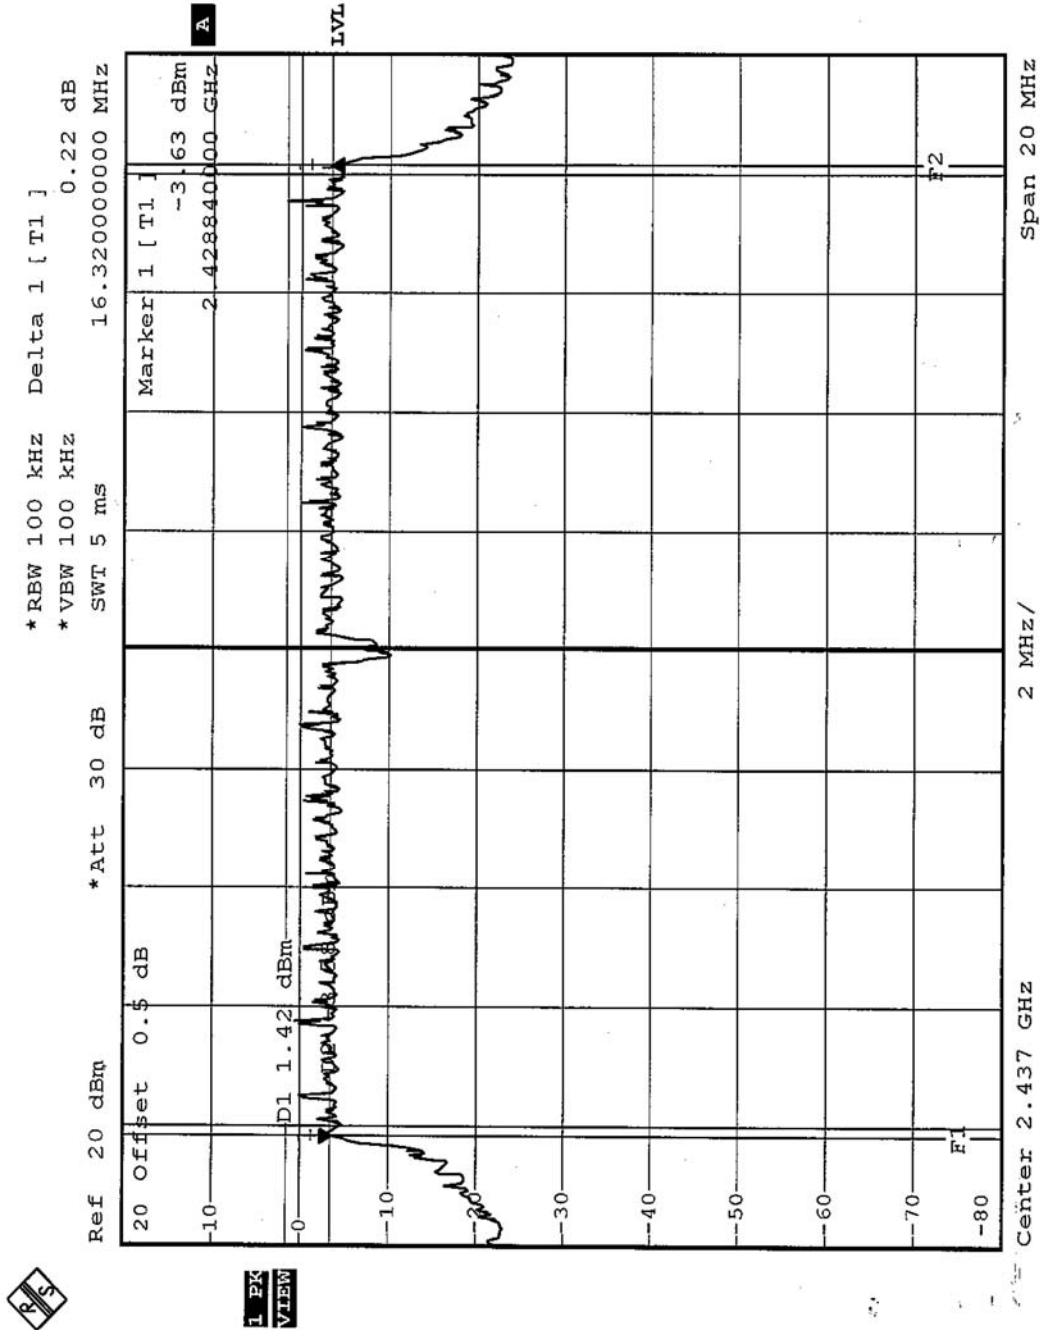



CH11

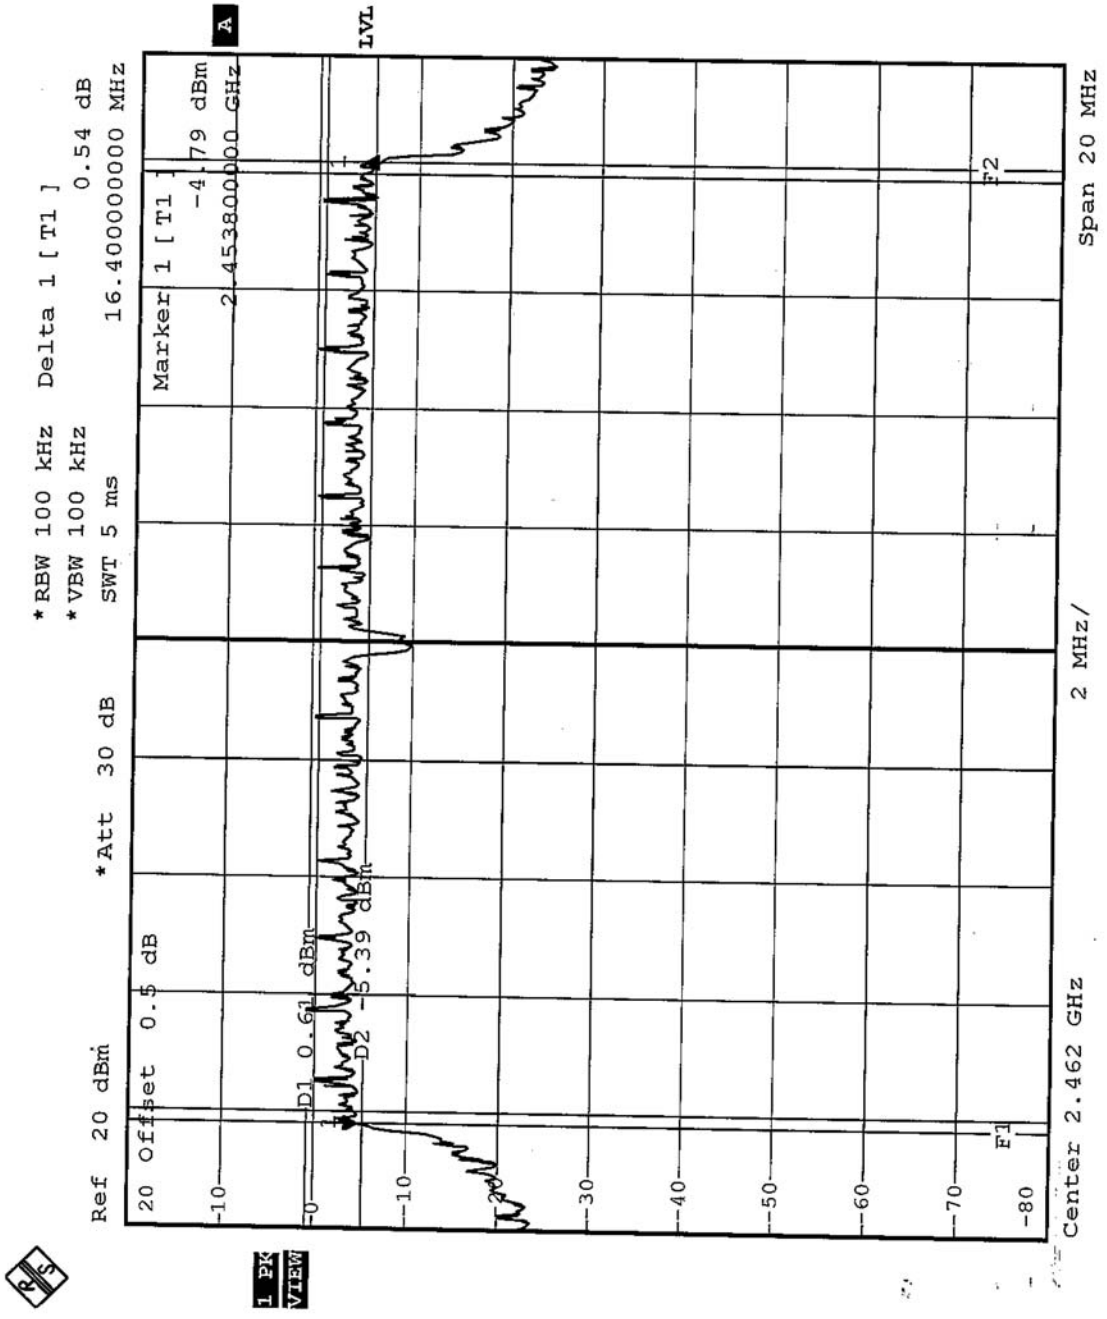




4.3.9 TEST RESULTS (C)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 60%RH, 991hPa
TEST MODE	OFDM	TESTED BY	Jamison Chan

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.79	0.5	PASS



CH6

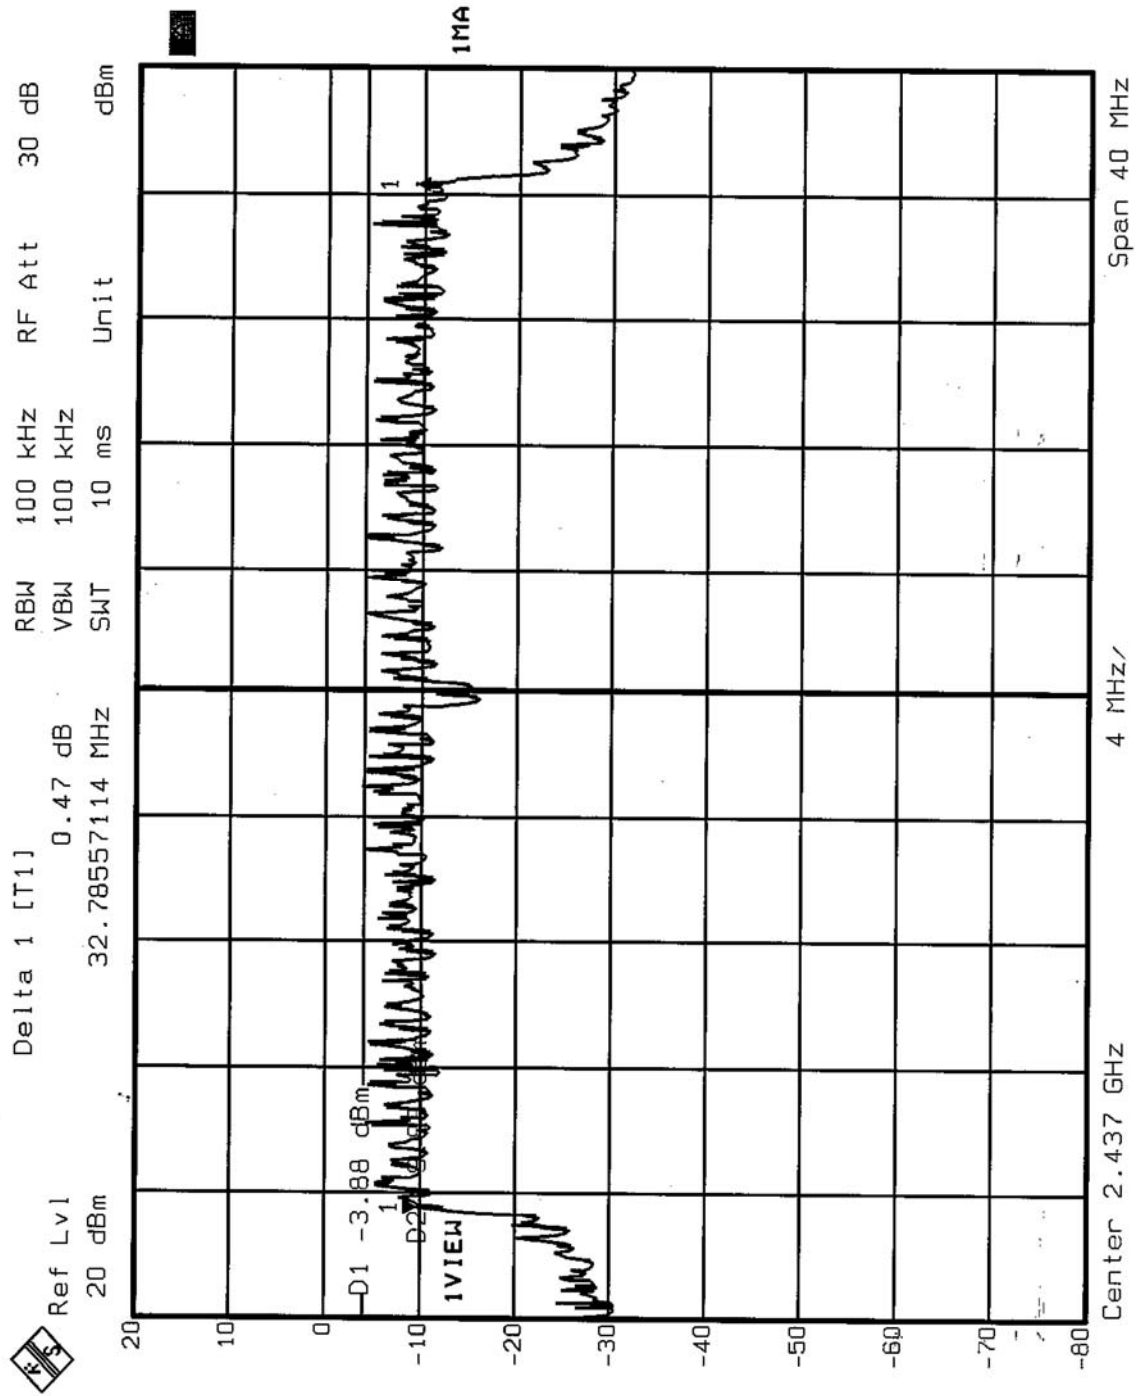



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

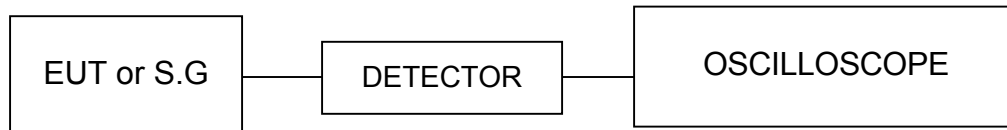

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS (A)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 991 hPa
TESTED BY: Jamison Chan			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20.03	30	PASS
6	2437	21.38	30	PASS
11	2462	18.92	30	PASS



4.4.8 TEST RESULTS (B)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 60%RH, 991 hPa
TESTED BY: Jamison Chan			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.62	30	PASS
6	2437	22.00	30	PASS
11	2462	21.12	30	PASS

4.4.9 TEST RESULTS (C)

EUT	Atheros 11g Card Bus Adapter	MODEL	NL-3054CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 60%RH, 991 hPa
TESTED BY: Jamison Chan			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	20.35	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS (A)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.95	8	PASS
6	2437	-4.13	8	PASS
11	2462	-4.37	8	PASS




CH1

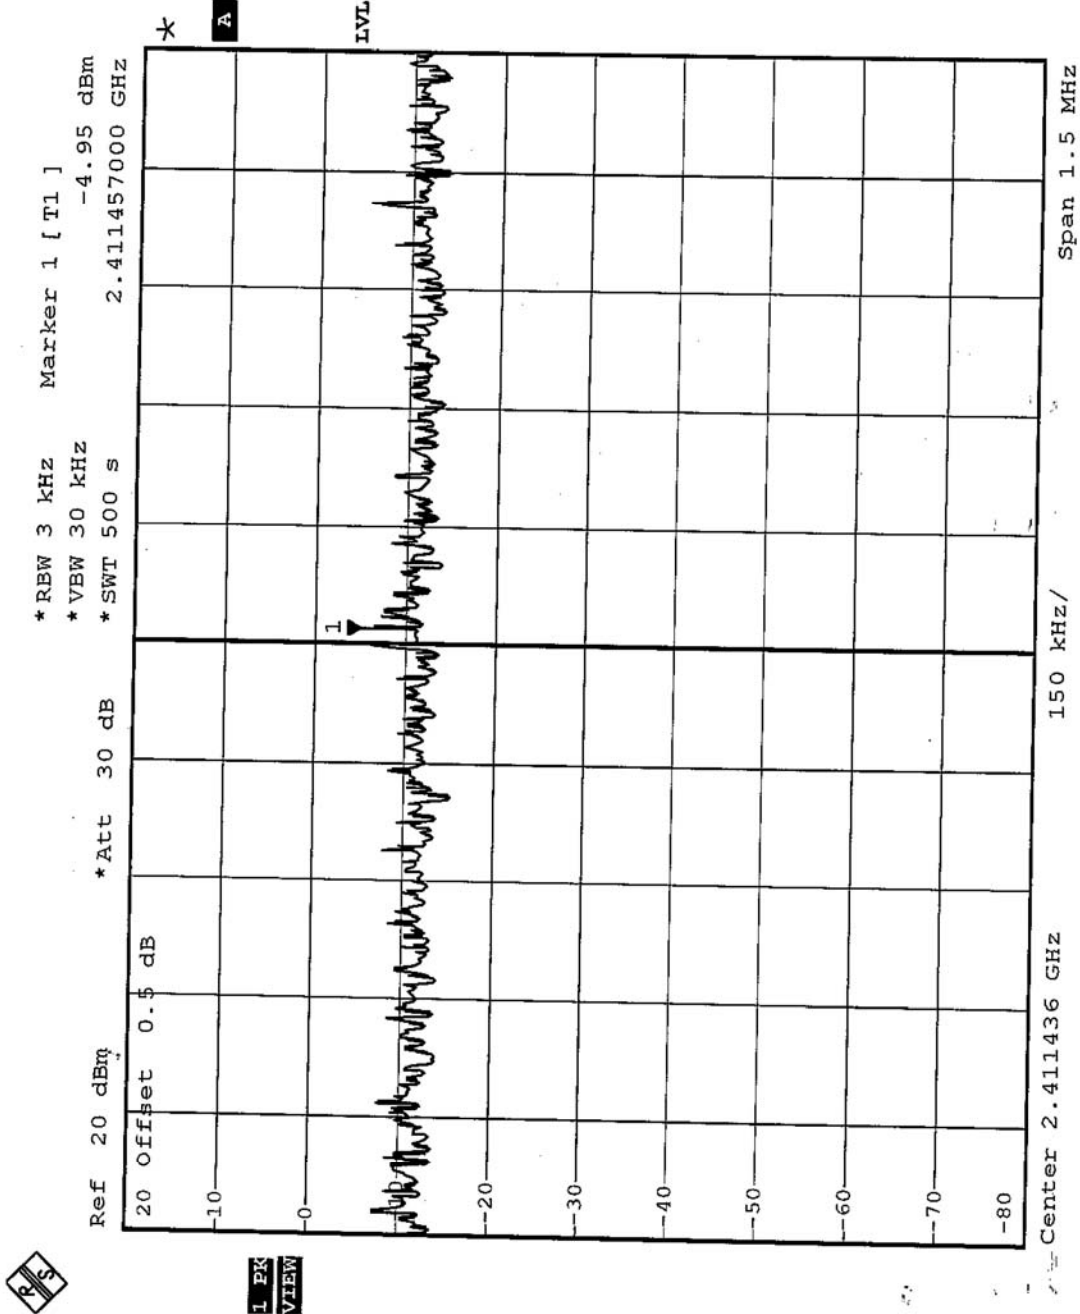




CH6

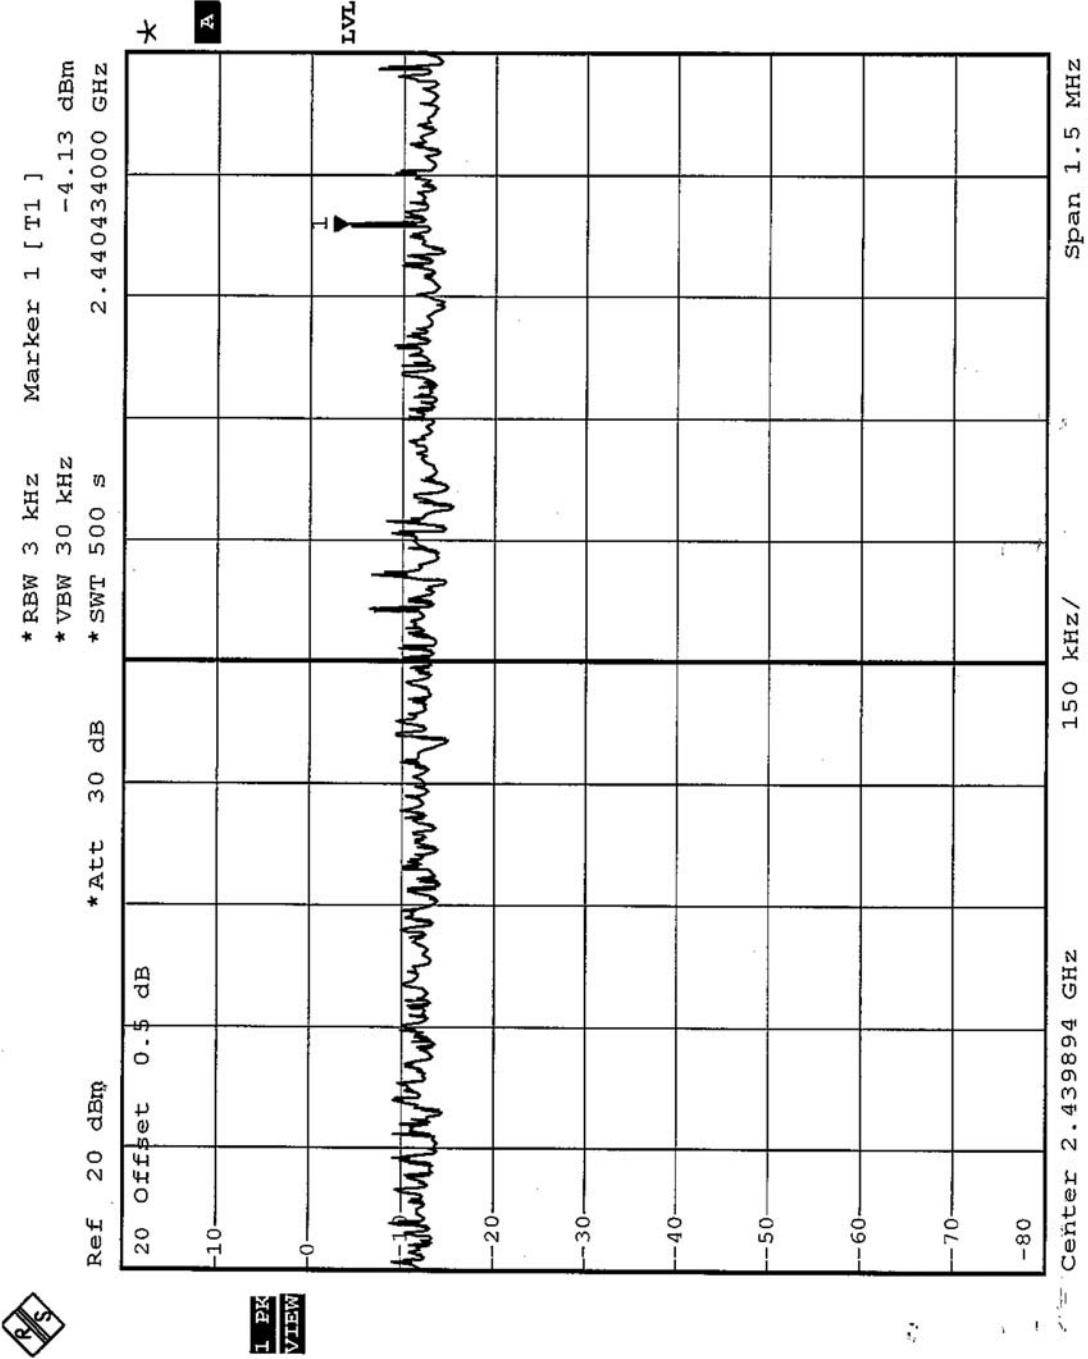

L PK VIEW



CH 11

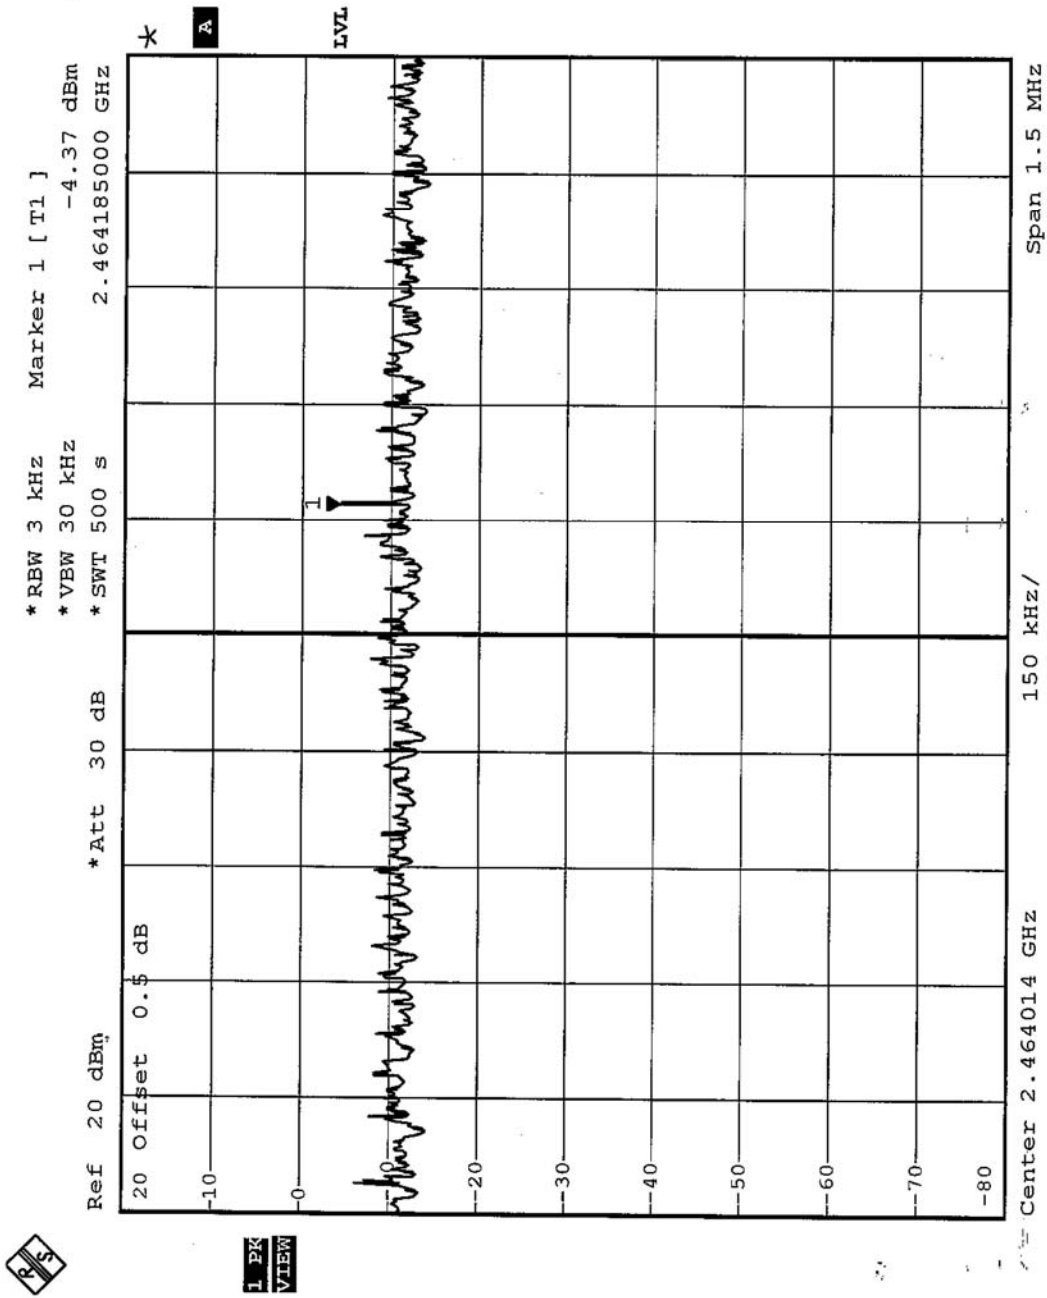




4.5.8 TEST RESULTS (B)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 60%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.19	8	PASS
6	2437	-12.83	8	PASS
11	2462	-13.01	8	PASS




CH1

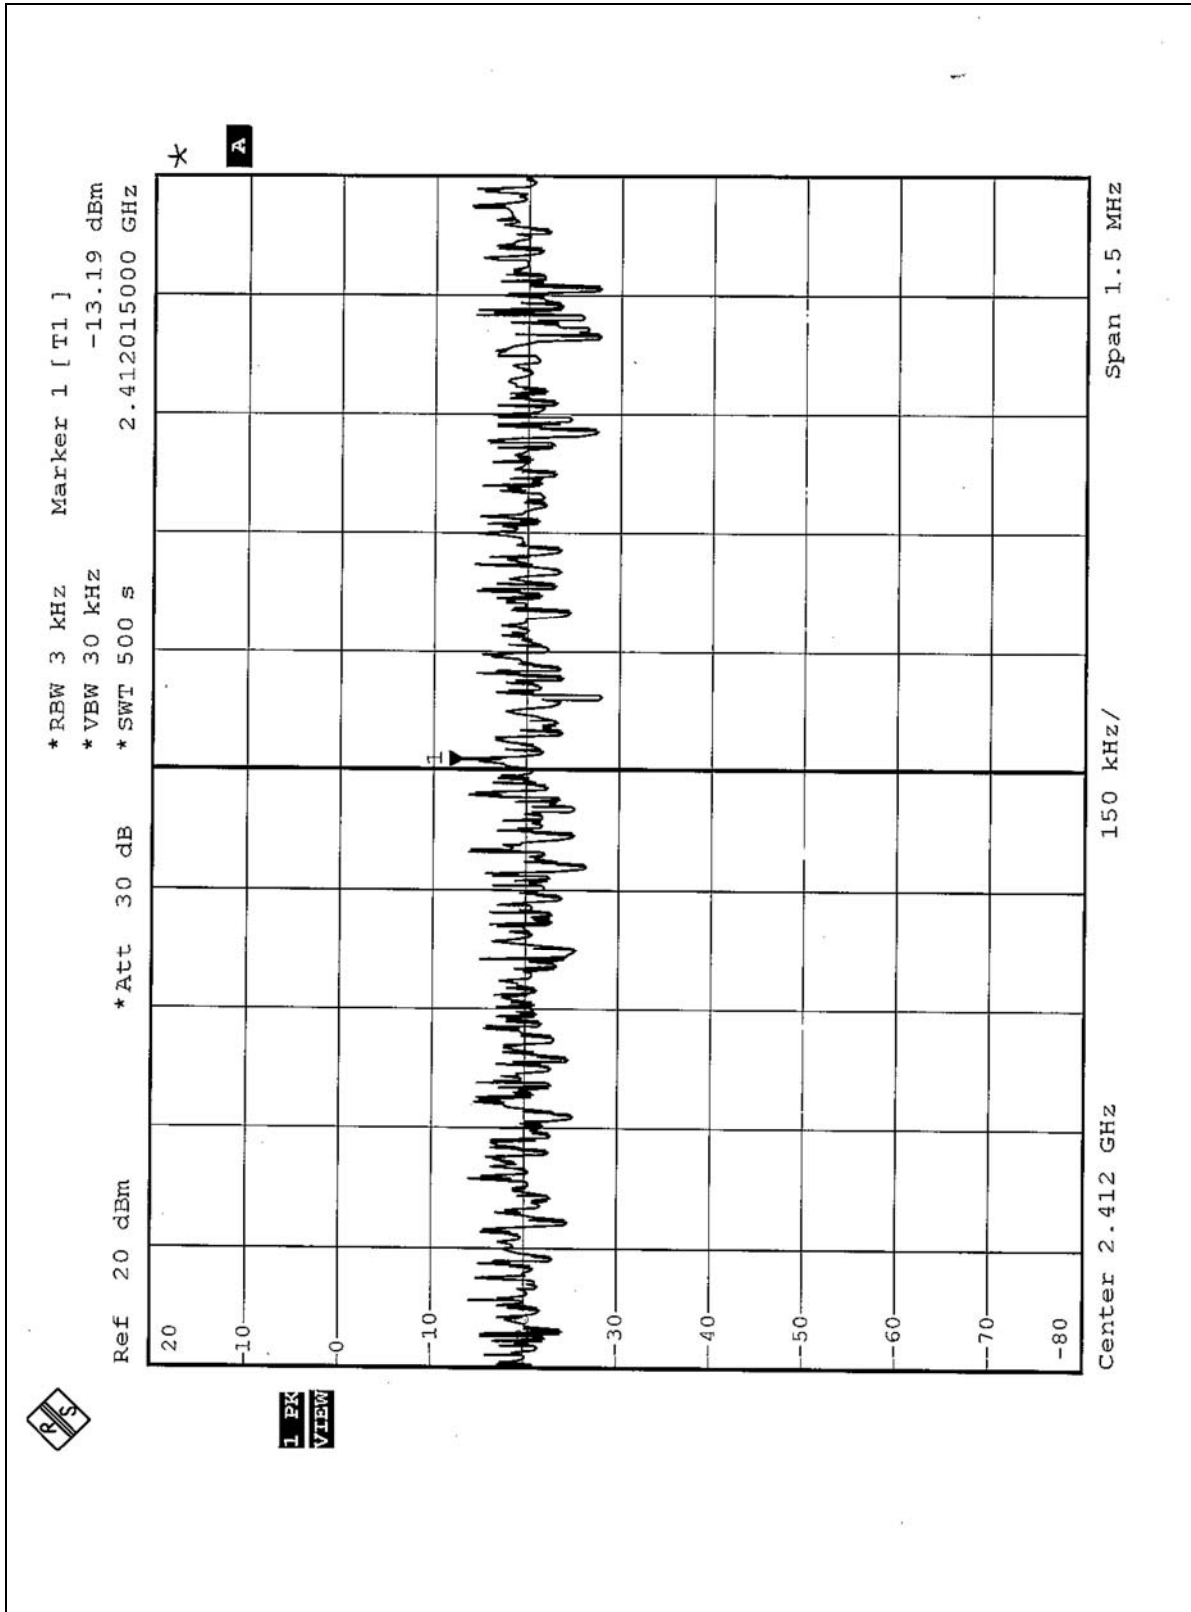




CH6

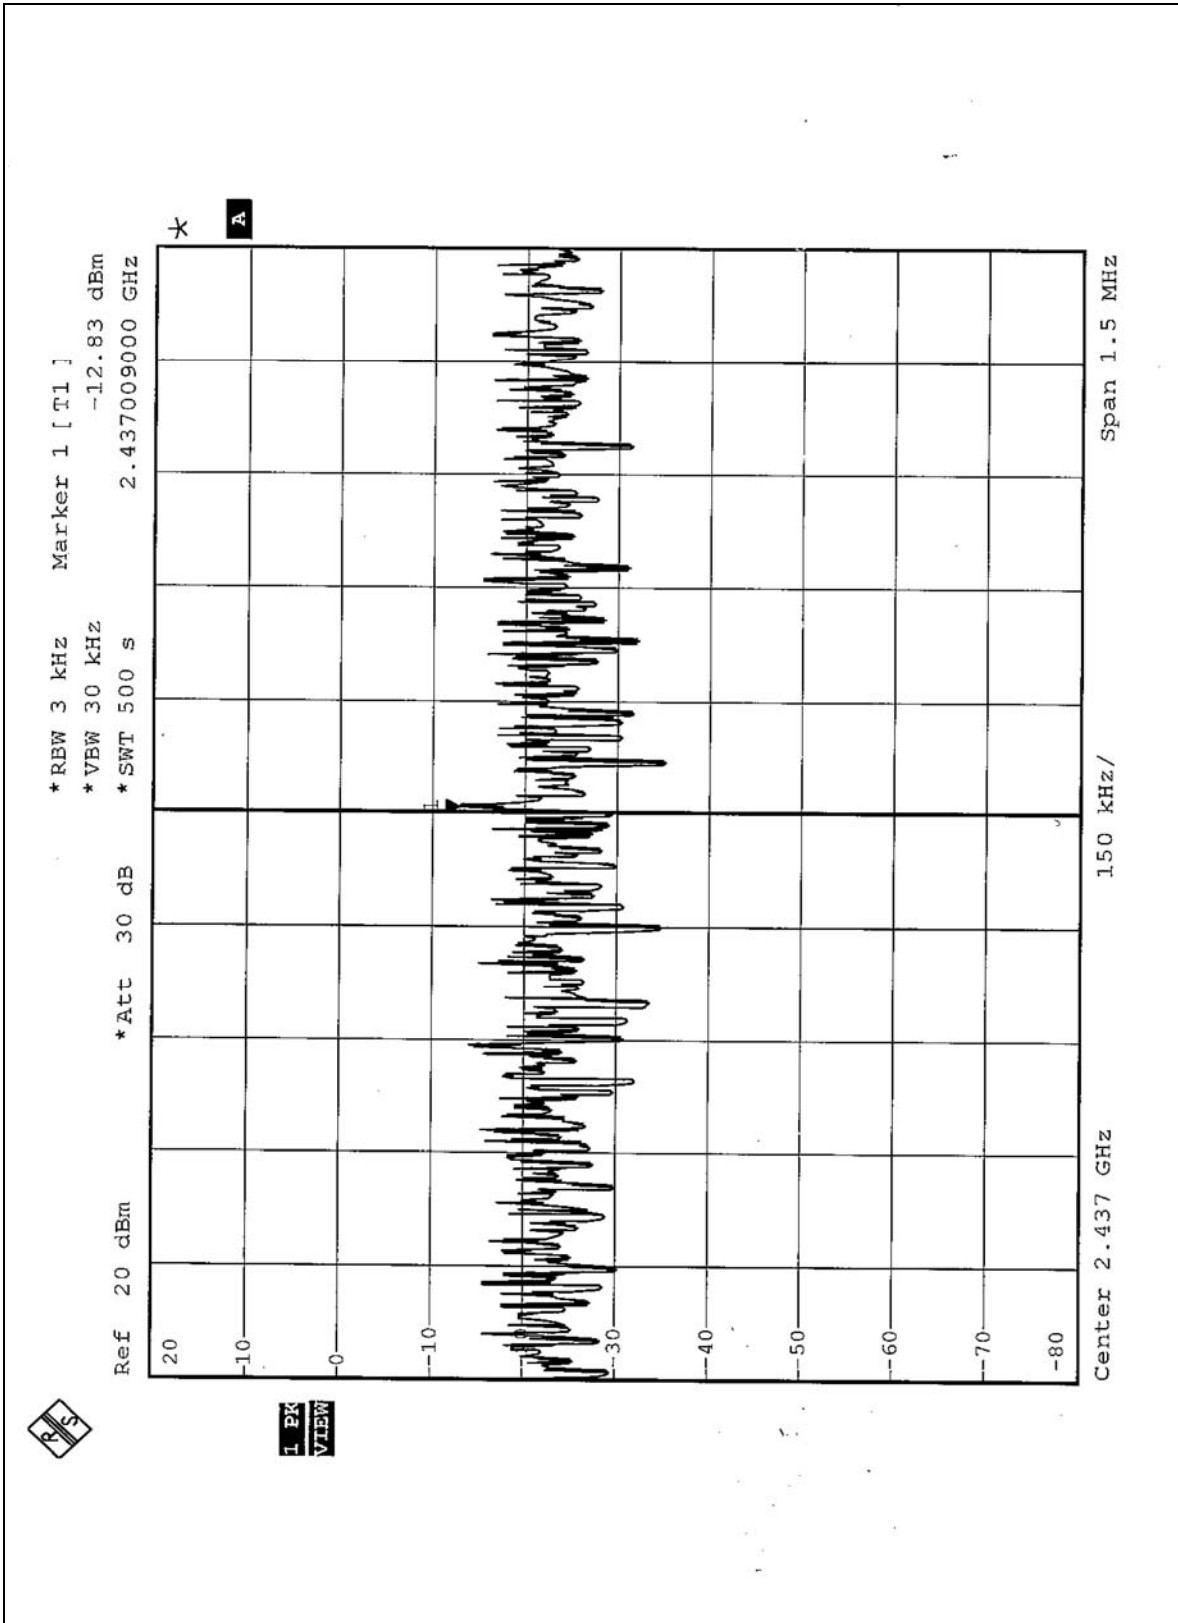



CH11

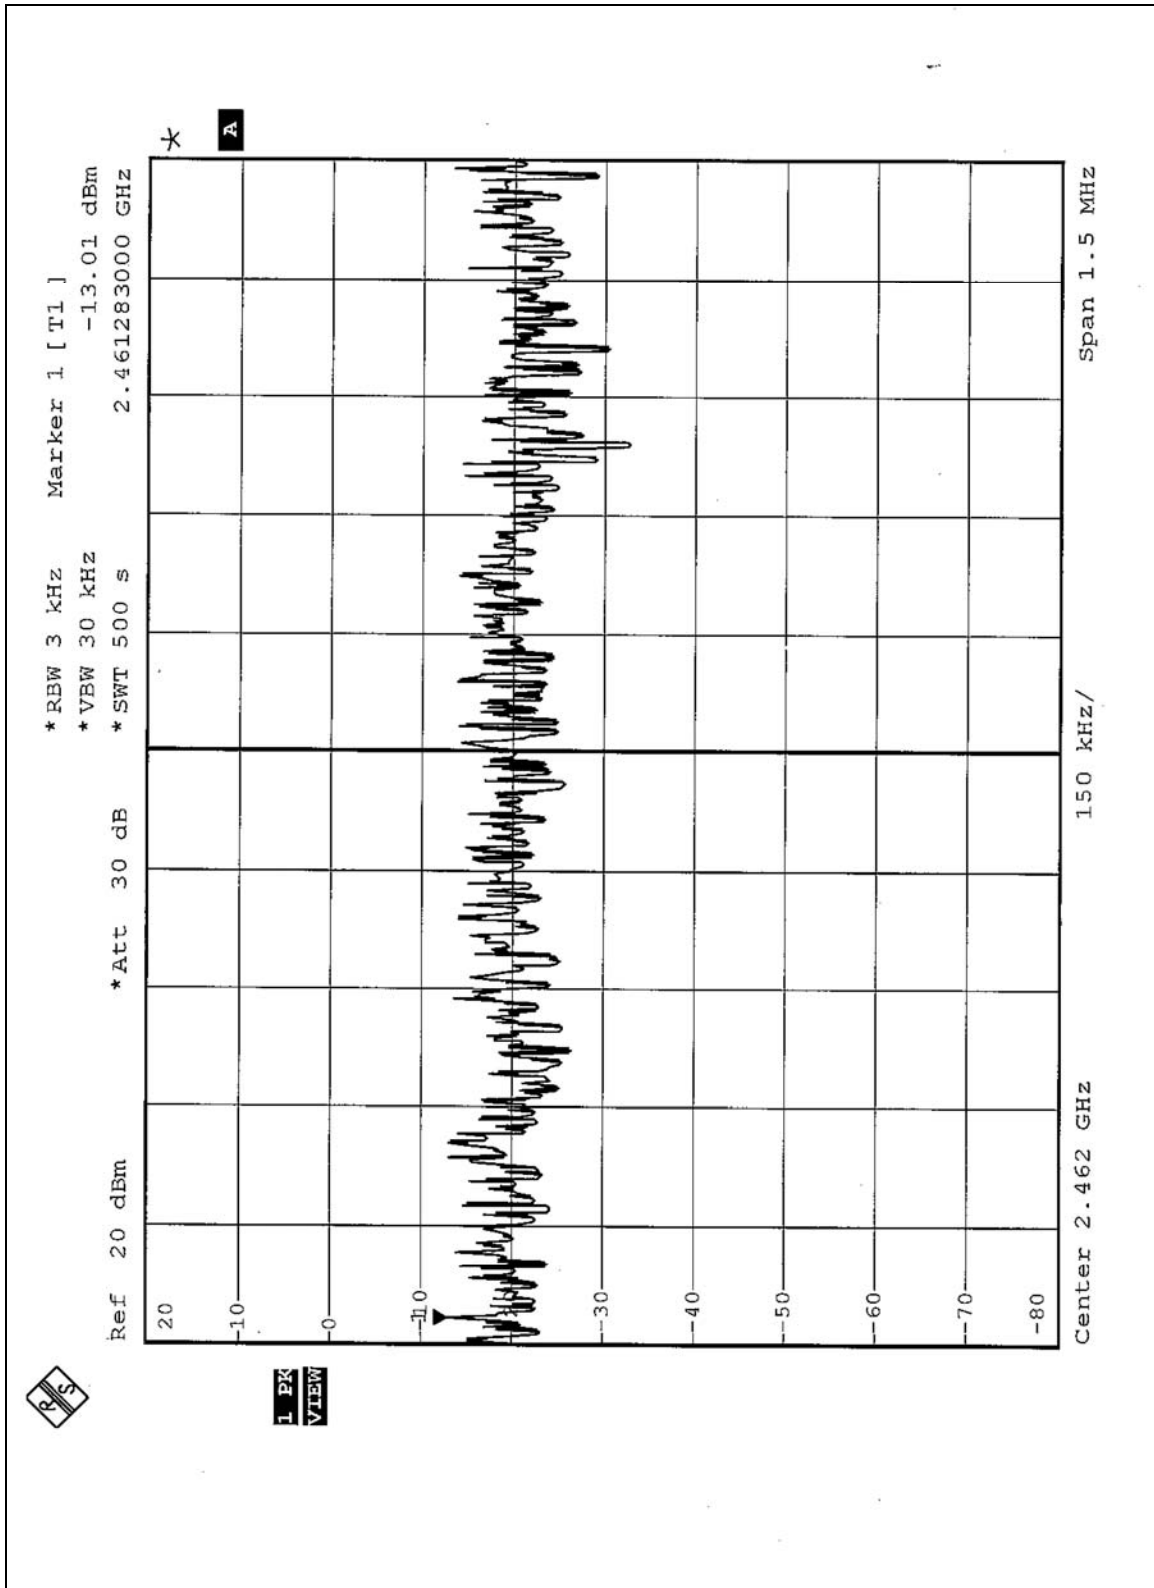




4.5.9 TEST RESULTS (C)

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27 deg. C, 60%RH, 991hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-12.77	8	PASS



CH6

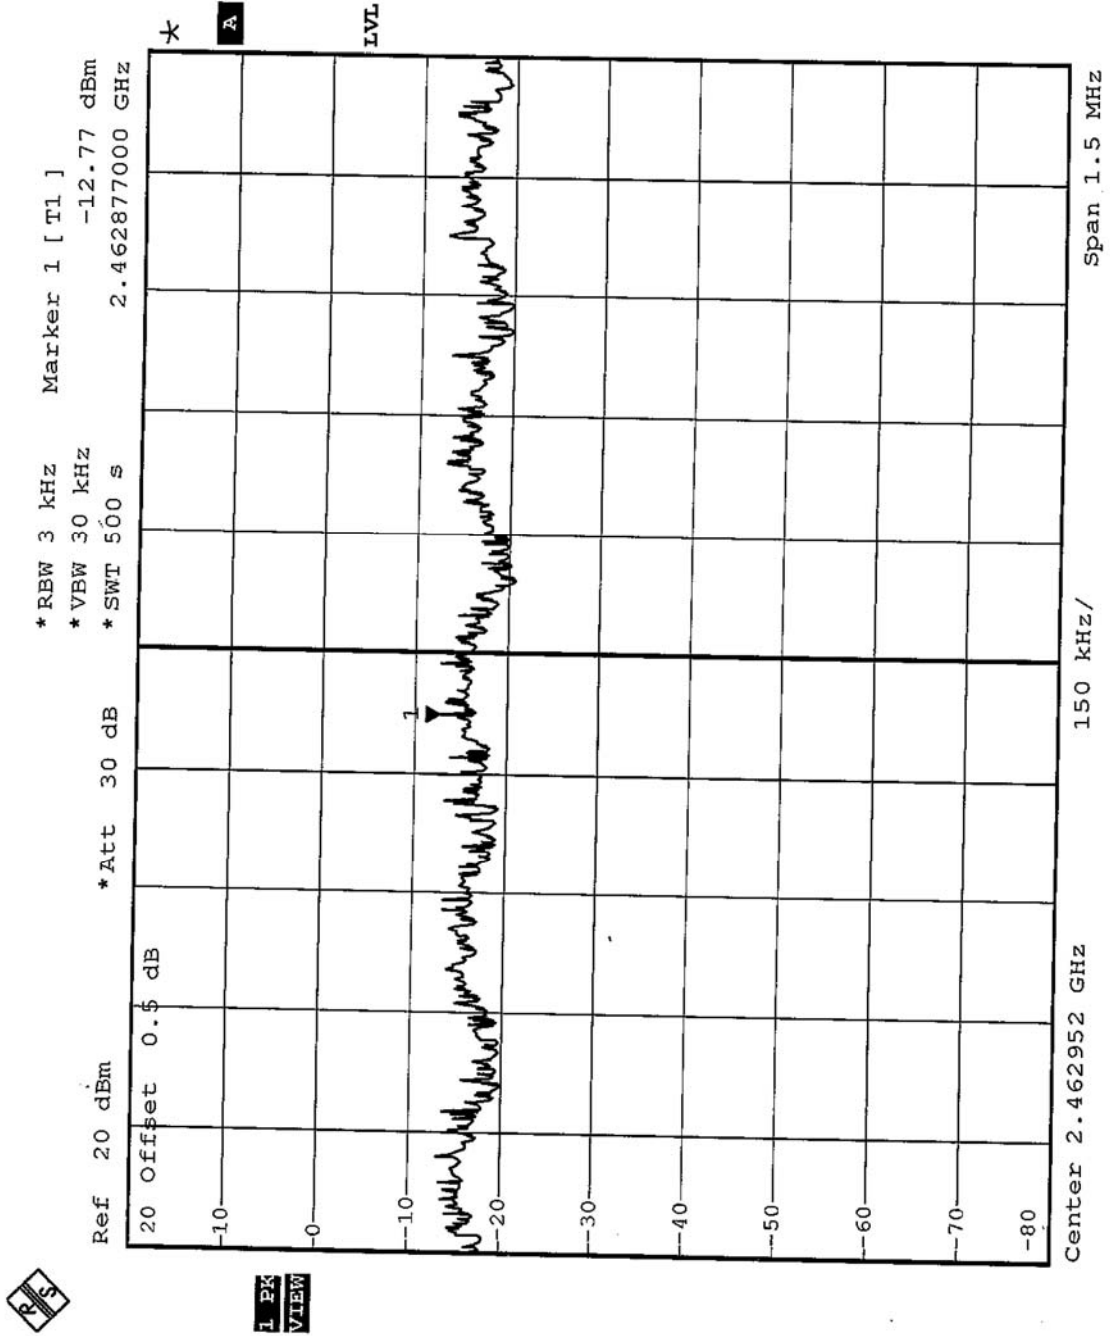



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6




4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following first pages shows 53.87dB delta between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 105.24dBuV/m, so the maximum field strength in restrict band is $105.24 - 53.87 = 51.37$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following second pages shows 53.75dB delta between carrier maximum power and local maximum emission in restrict band (2.4875GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 104.80dBuV/m, so the maximum field strength in restrict band is $104.80 - 53.75 = 51.05$ dBuV/m which is under 54 dBuV/m limit.

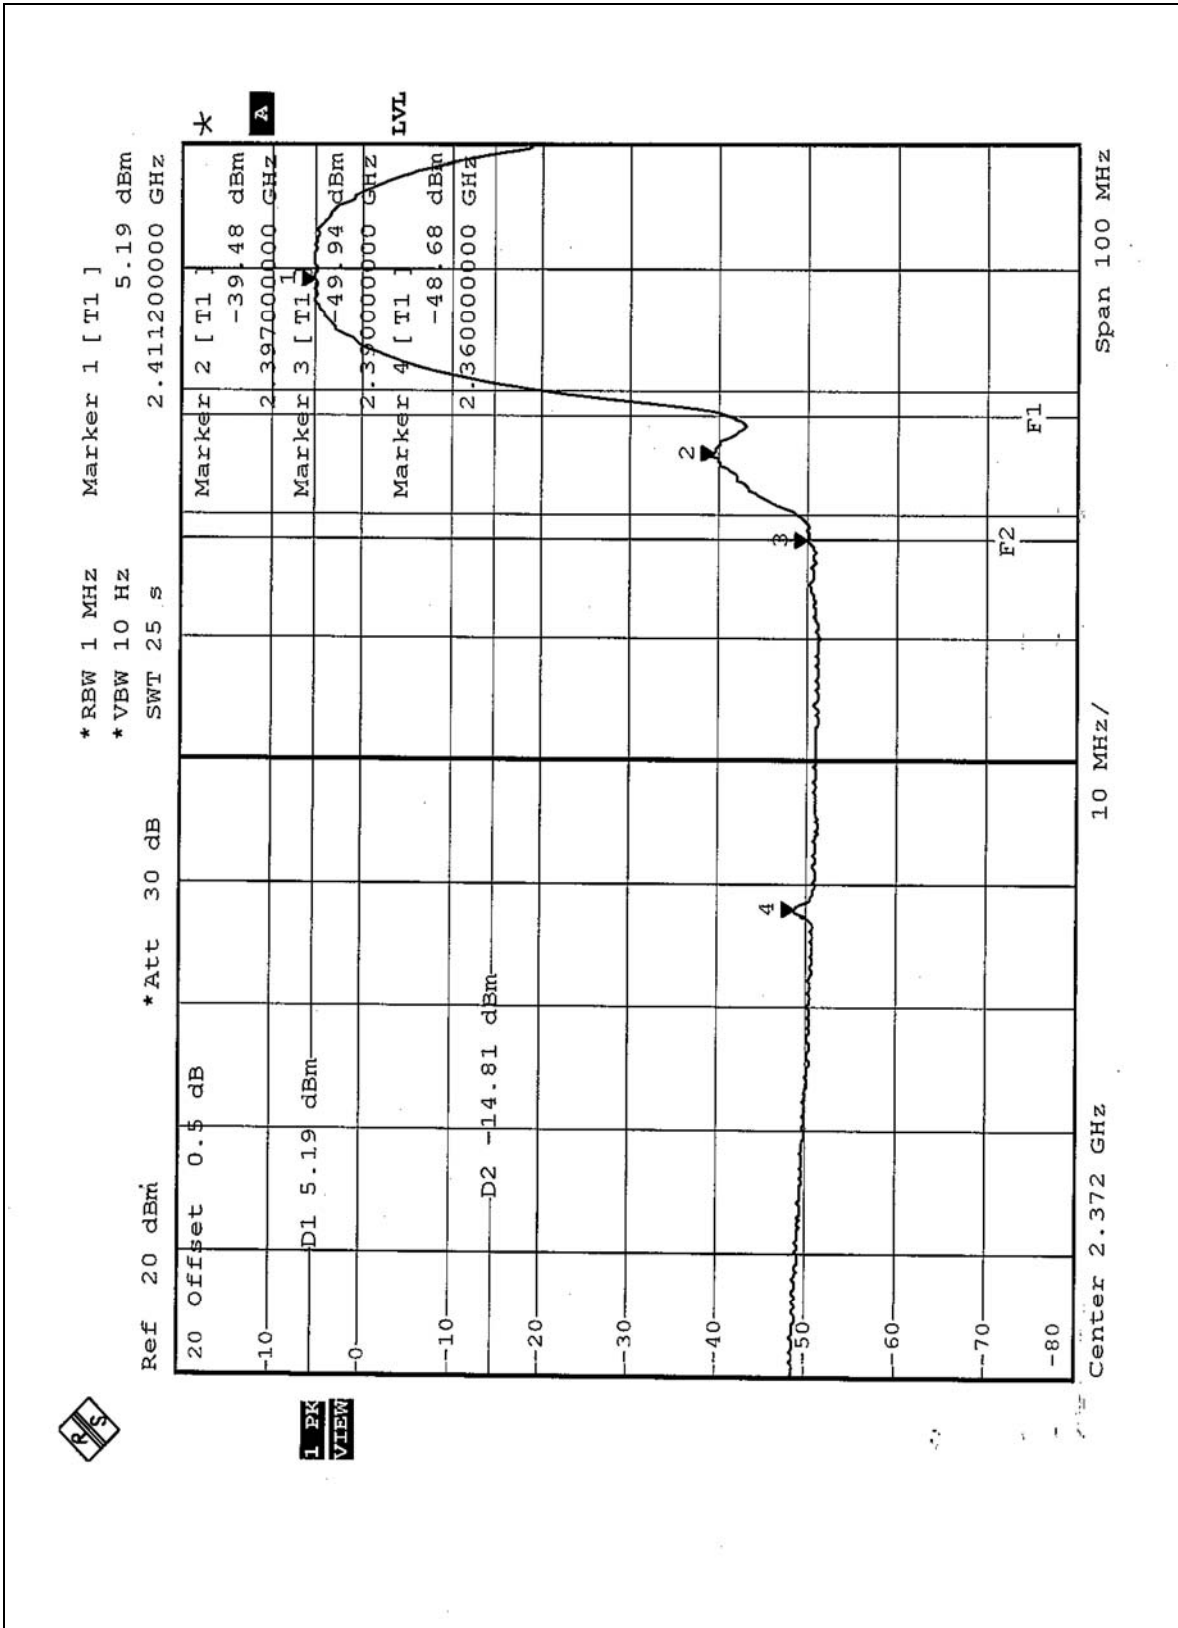

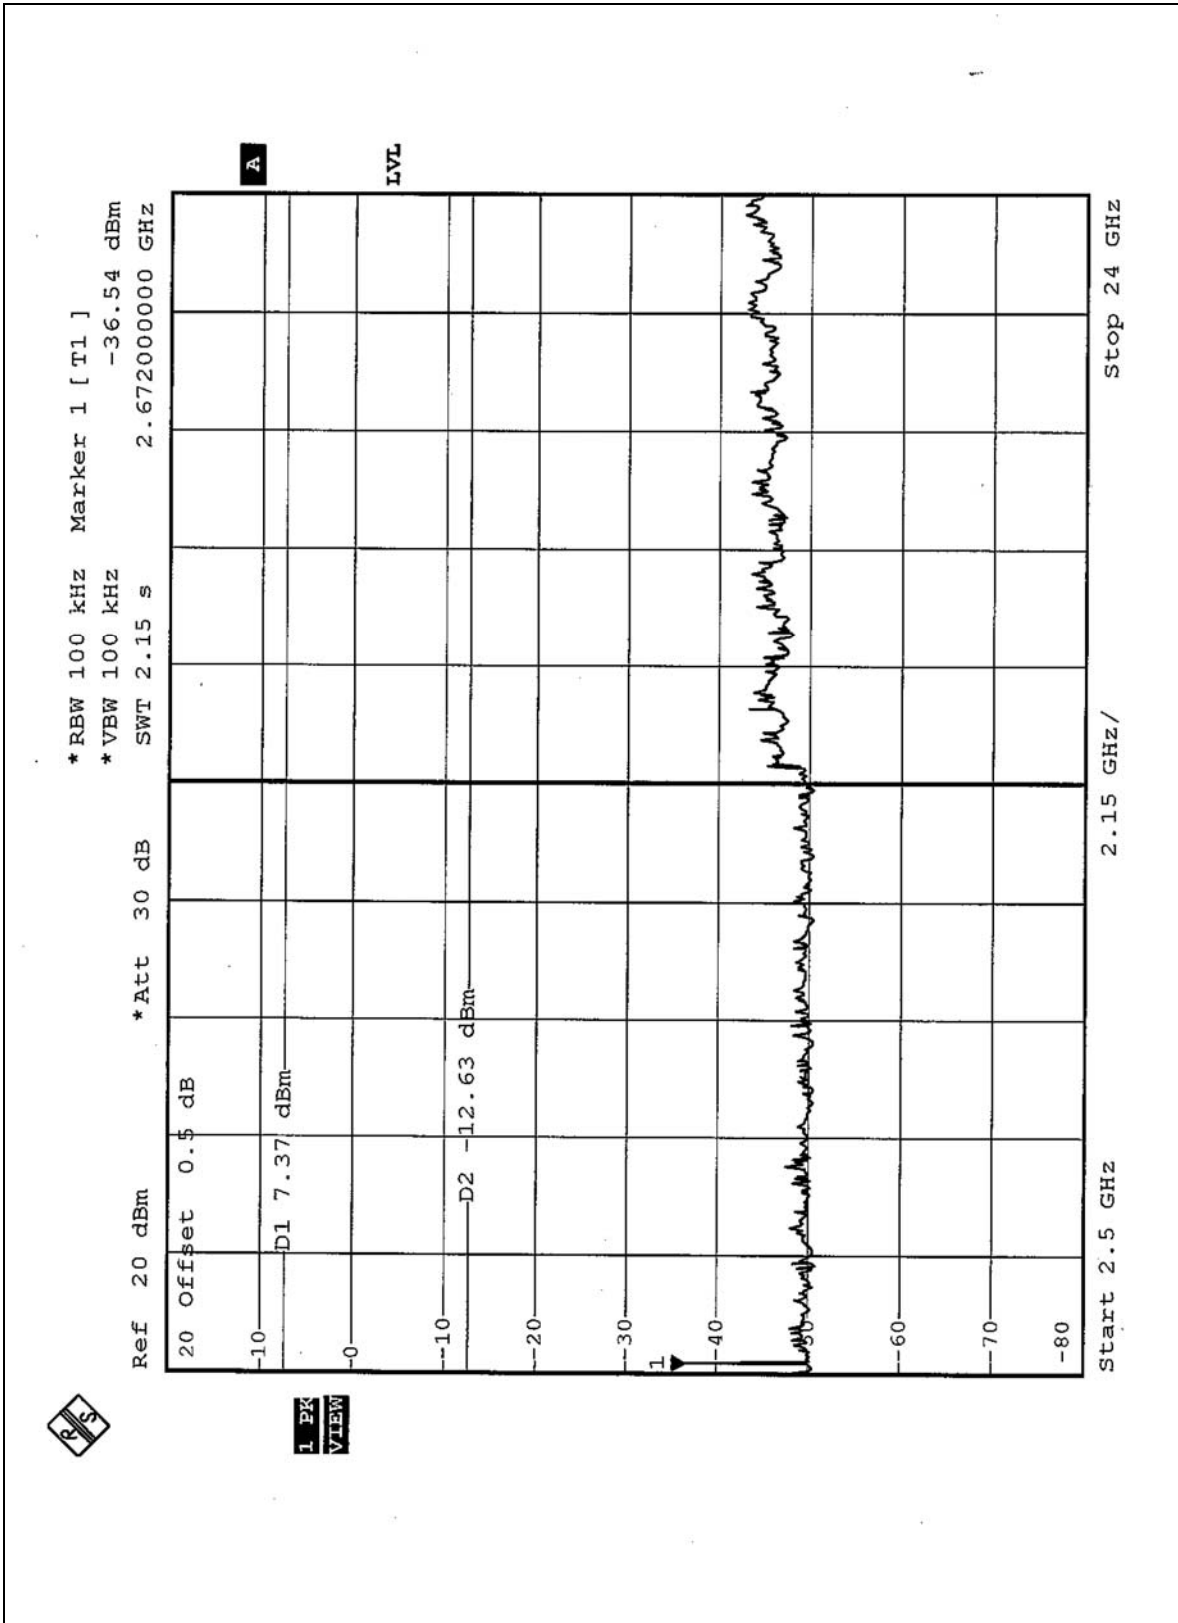

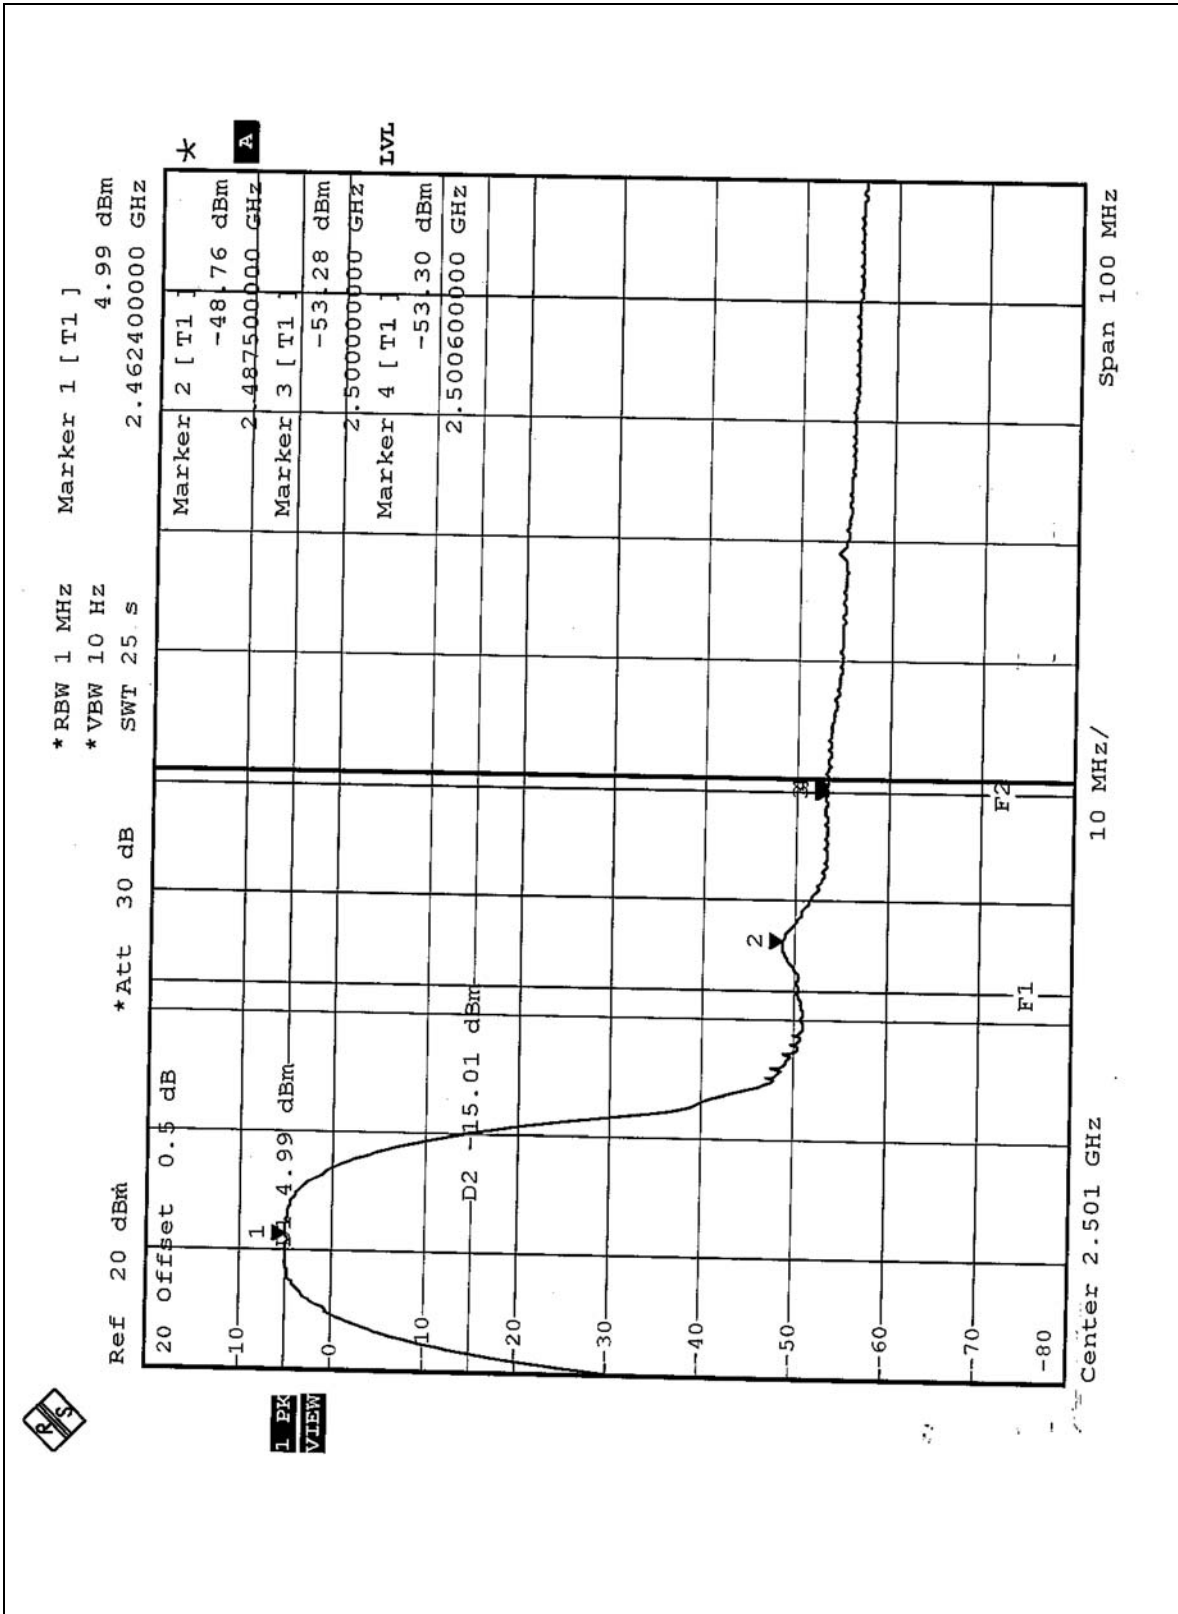

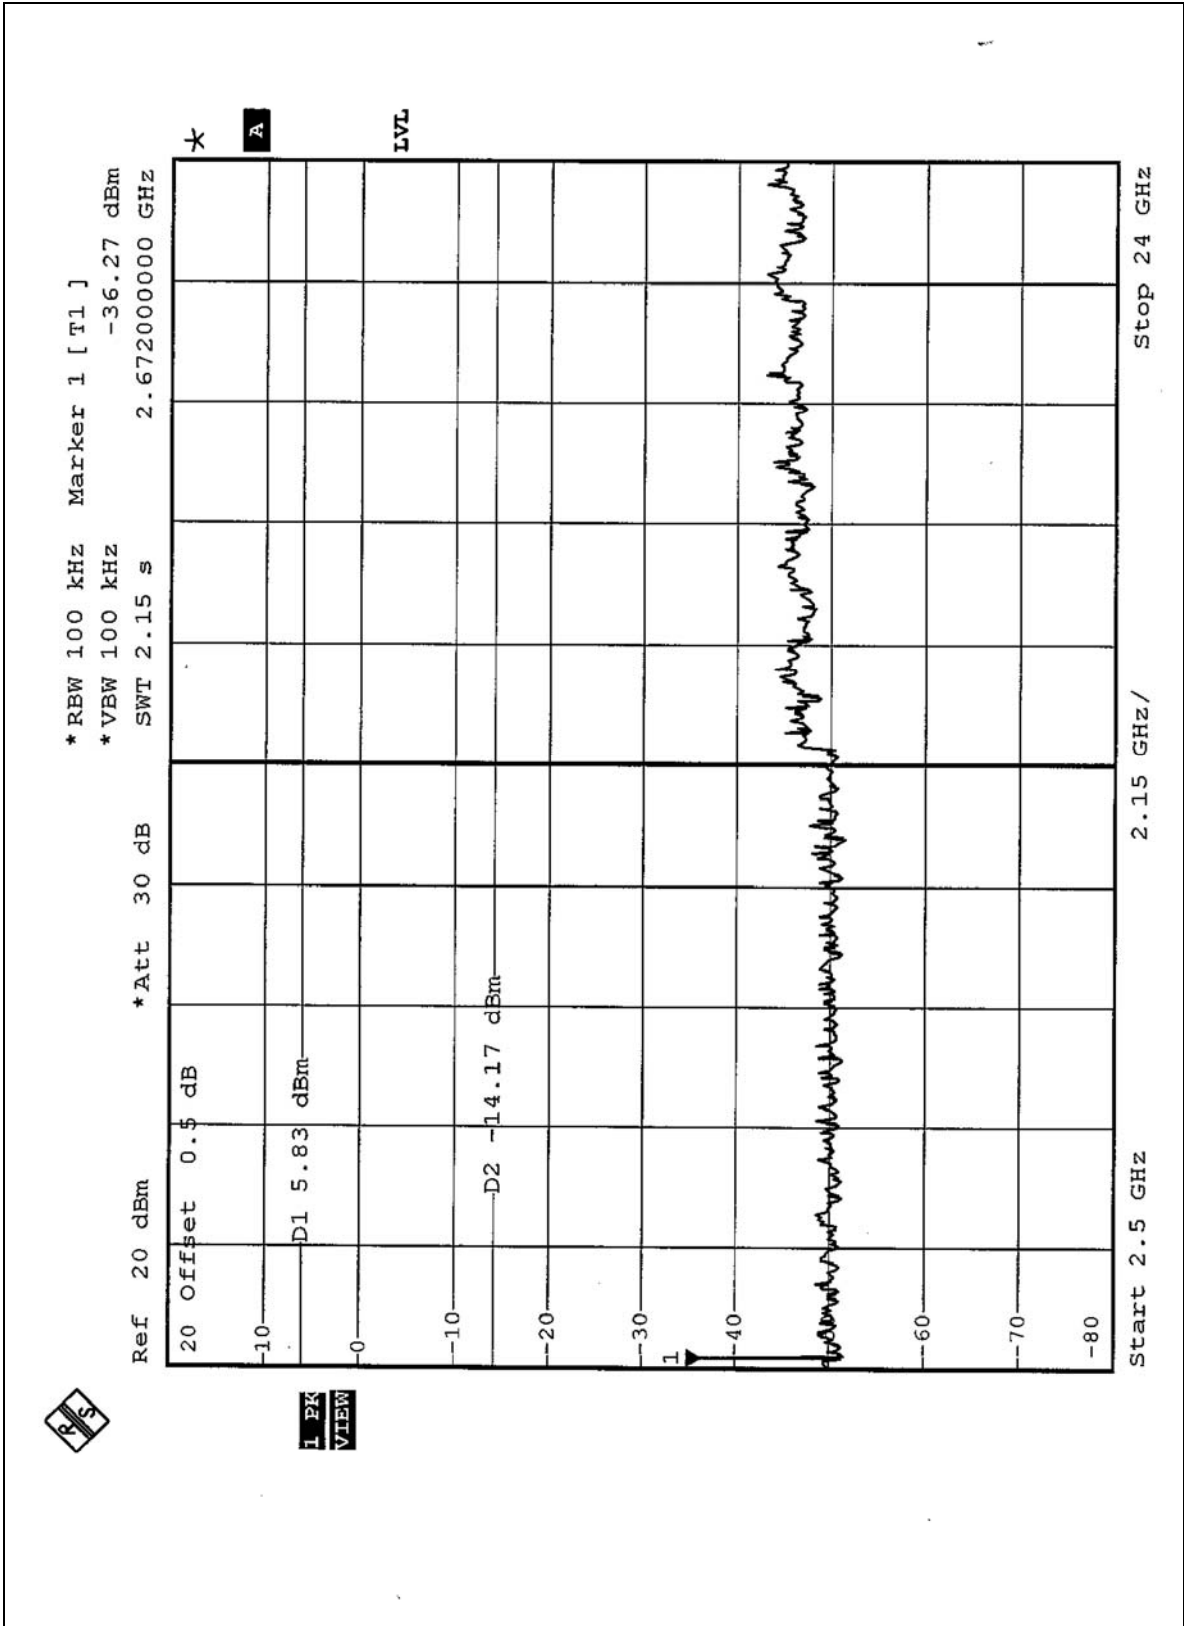




4.6.7 TEST RESULTS (B)


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following first pages shows 46.39dB delta between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 99.39dBuV/m, so the maximum field strength in restrict band is $99.39 - 46.39 = 53.00$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following second pages shows 48.26dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 100.72dBuV/m, so the maximum field strength in restrict band is $100.72 - 48.26 = 52.46$ dBuV/m which is under 54 dBuV/m limit.

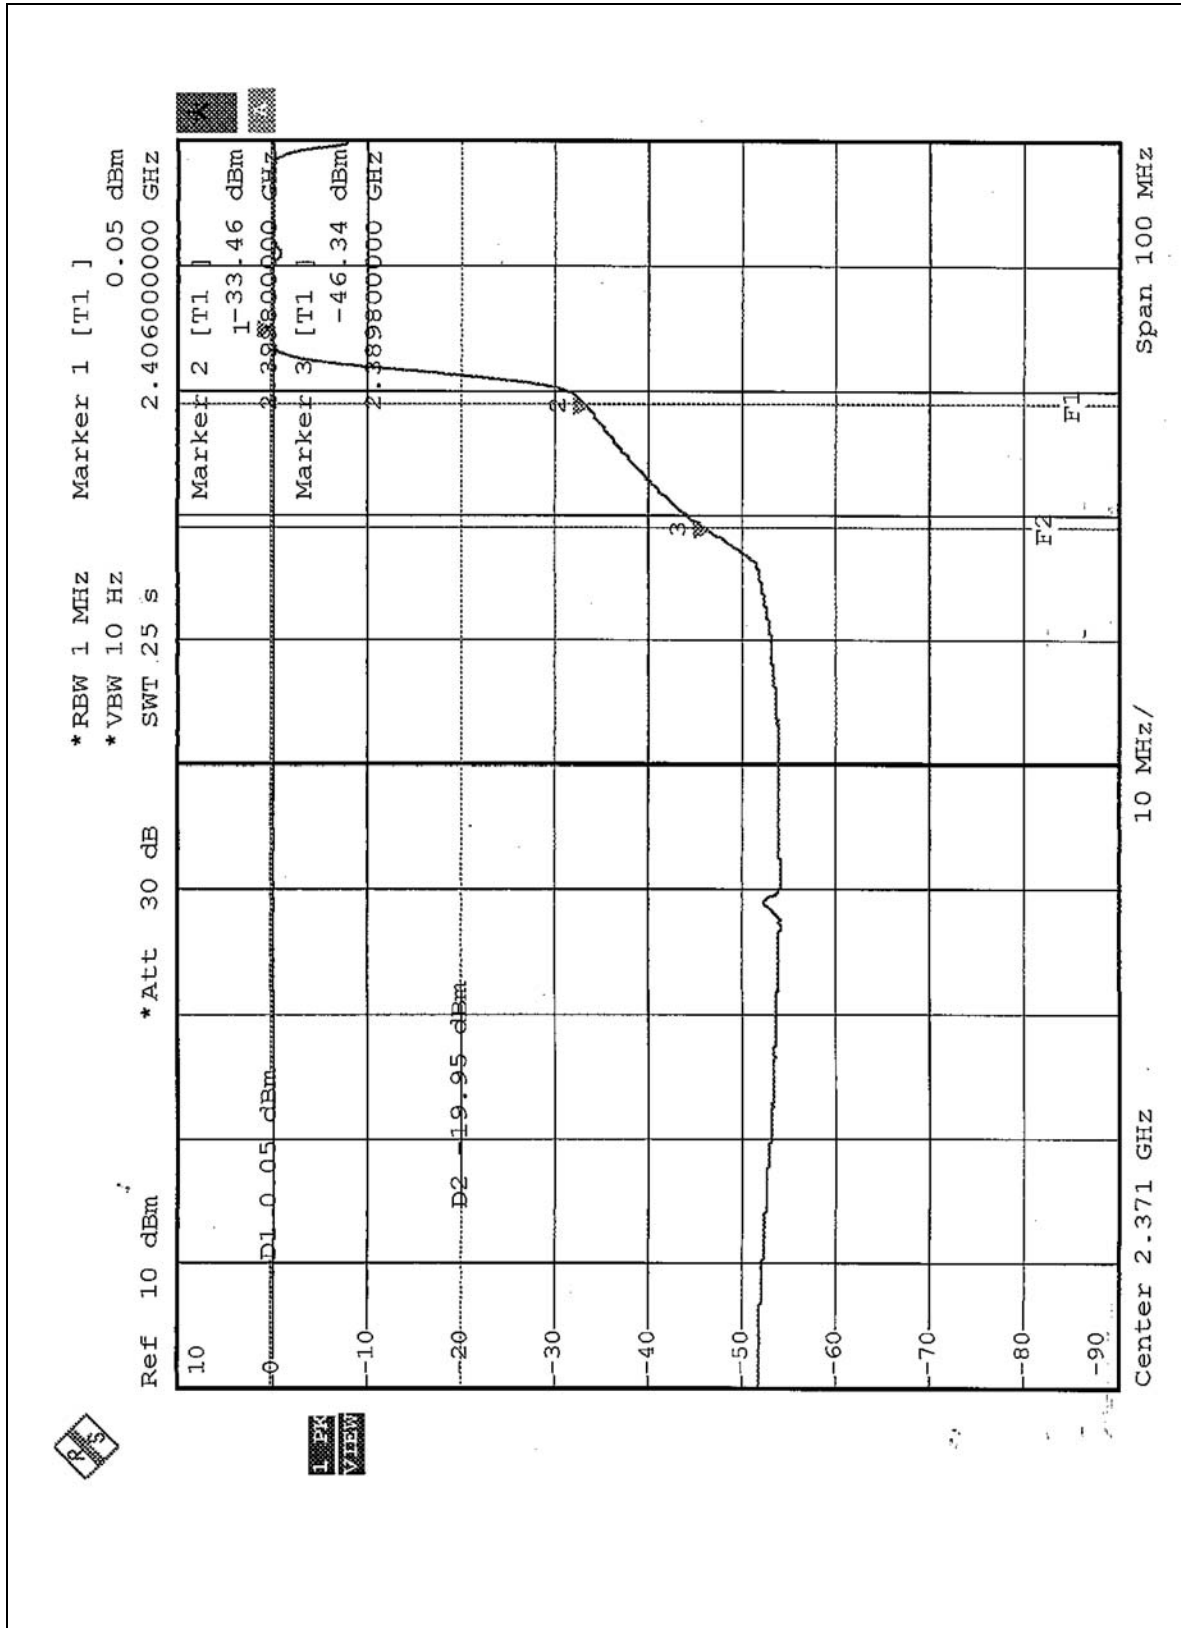

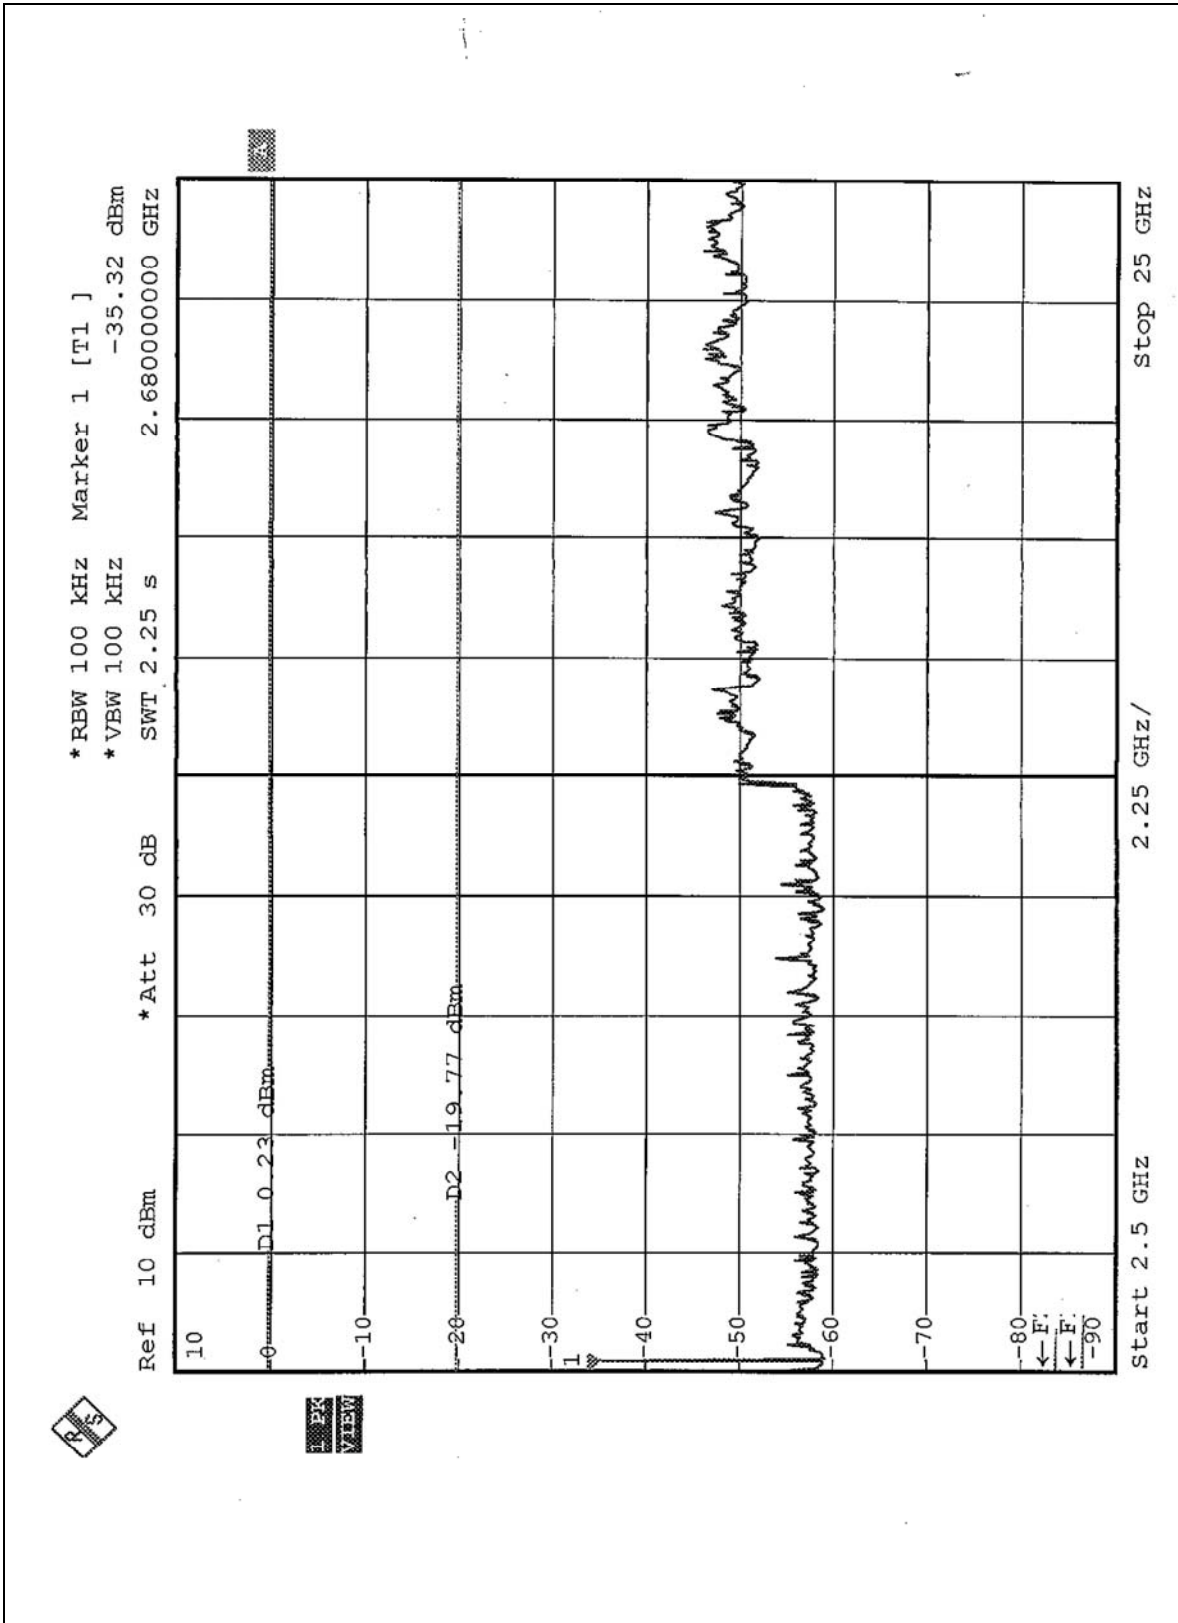

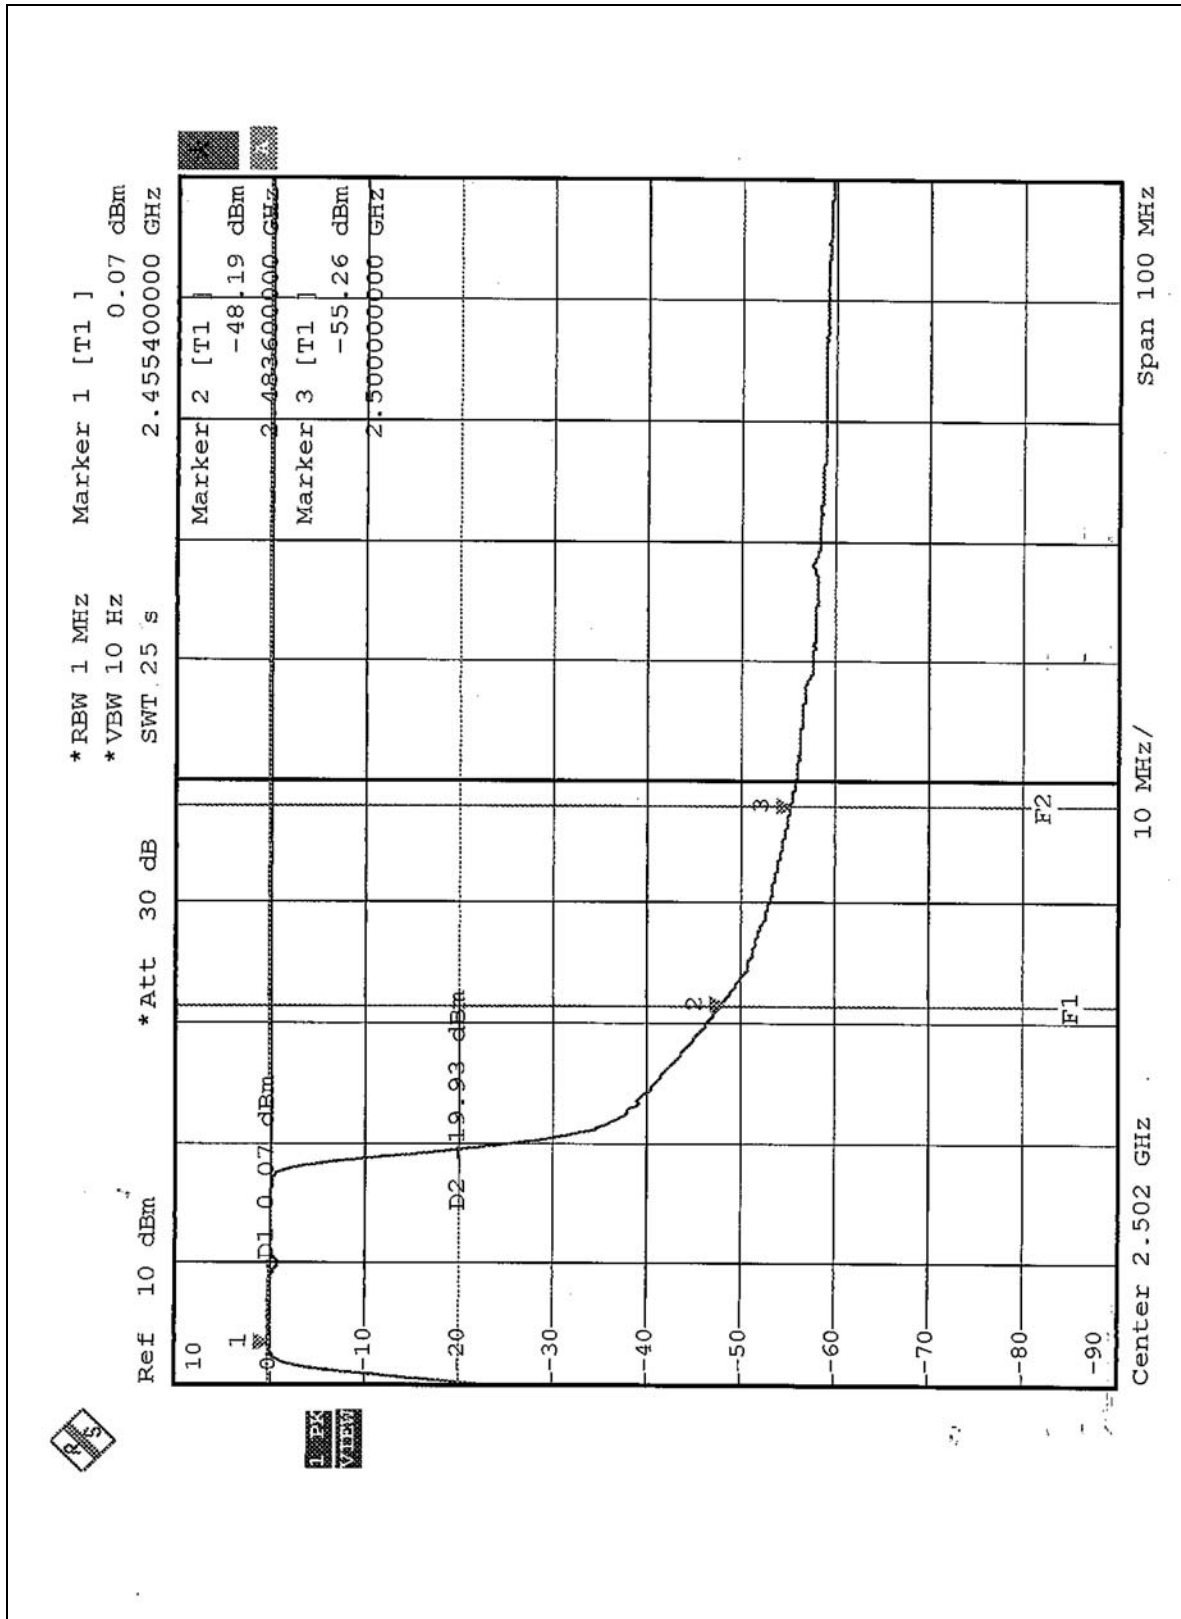

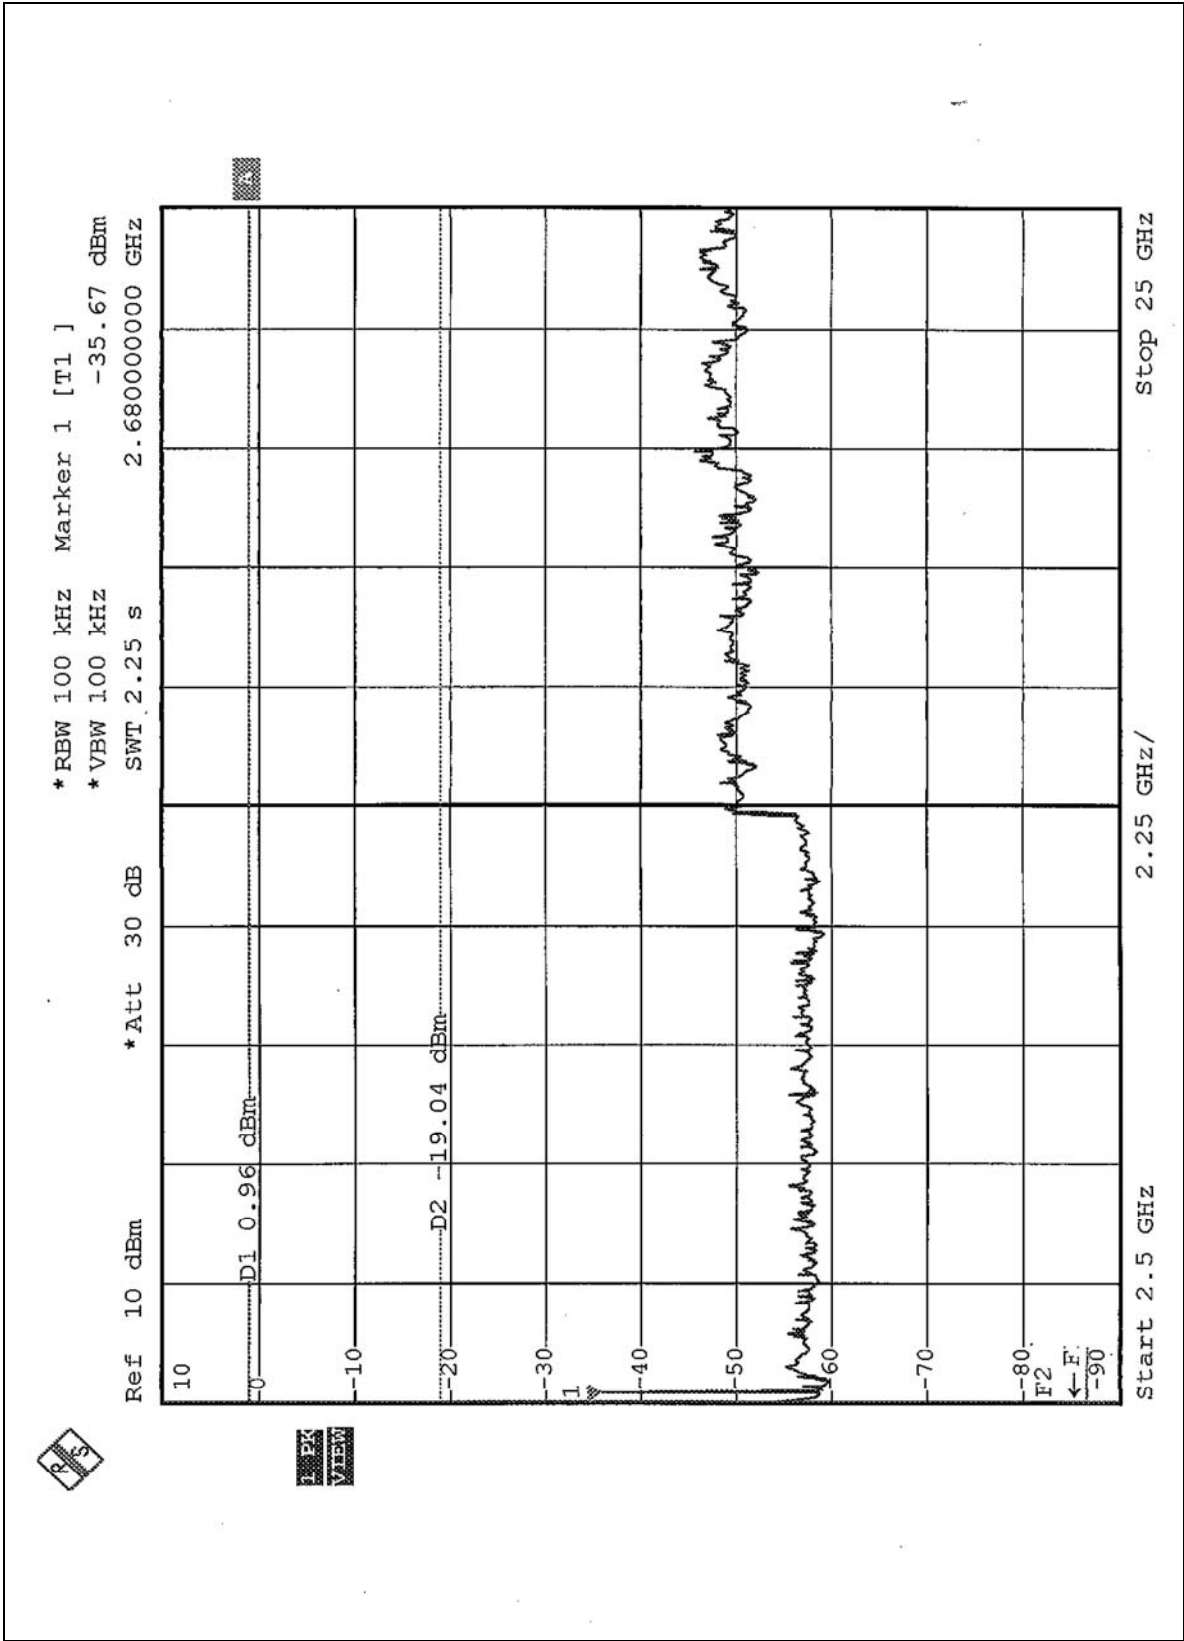




4.6.8 TEST RESULTS (C)


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:


The band edge emission plot on the following first pages shows 43.32dB delta between carrier maximum power and local maximum emission in restrict band (2.3899GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.10 is 95.47dBuV/m, so the maximum field strength in restrict band is $95.47-43.32=52.15$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following second pages shows 45.60dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.10 is 95.47dBuV/m, so the maximum field strength in restrict band is $95.47-45.60=49.87$ dBuV/m which is under 54 dBuV/m limit.

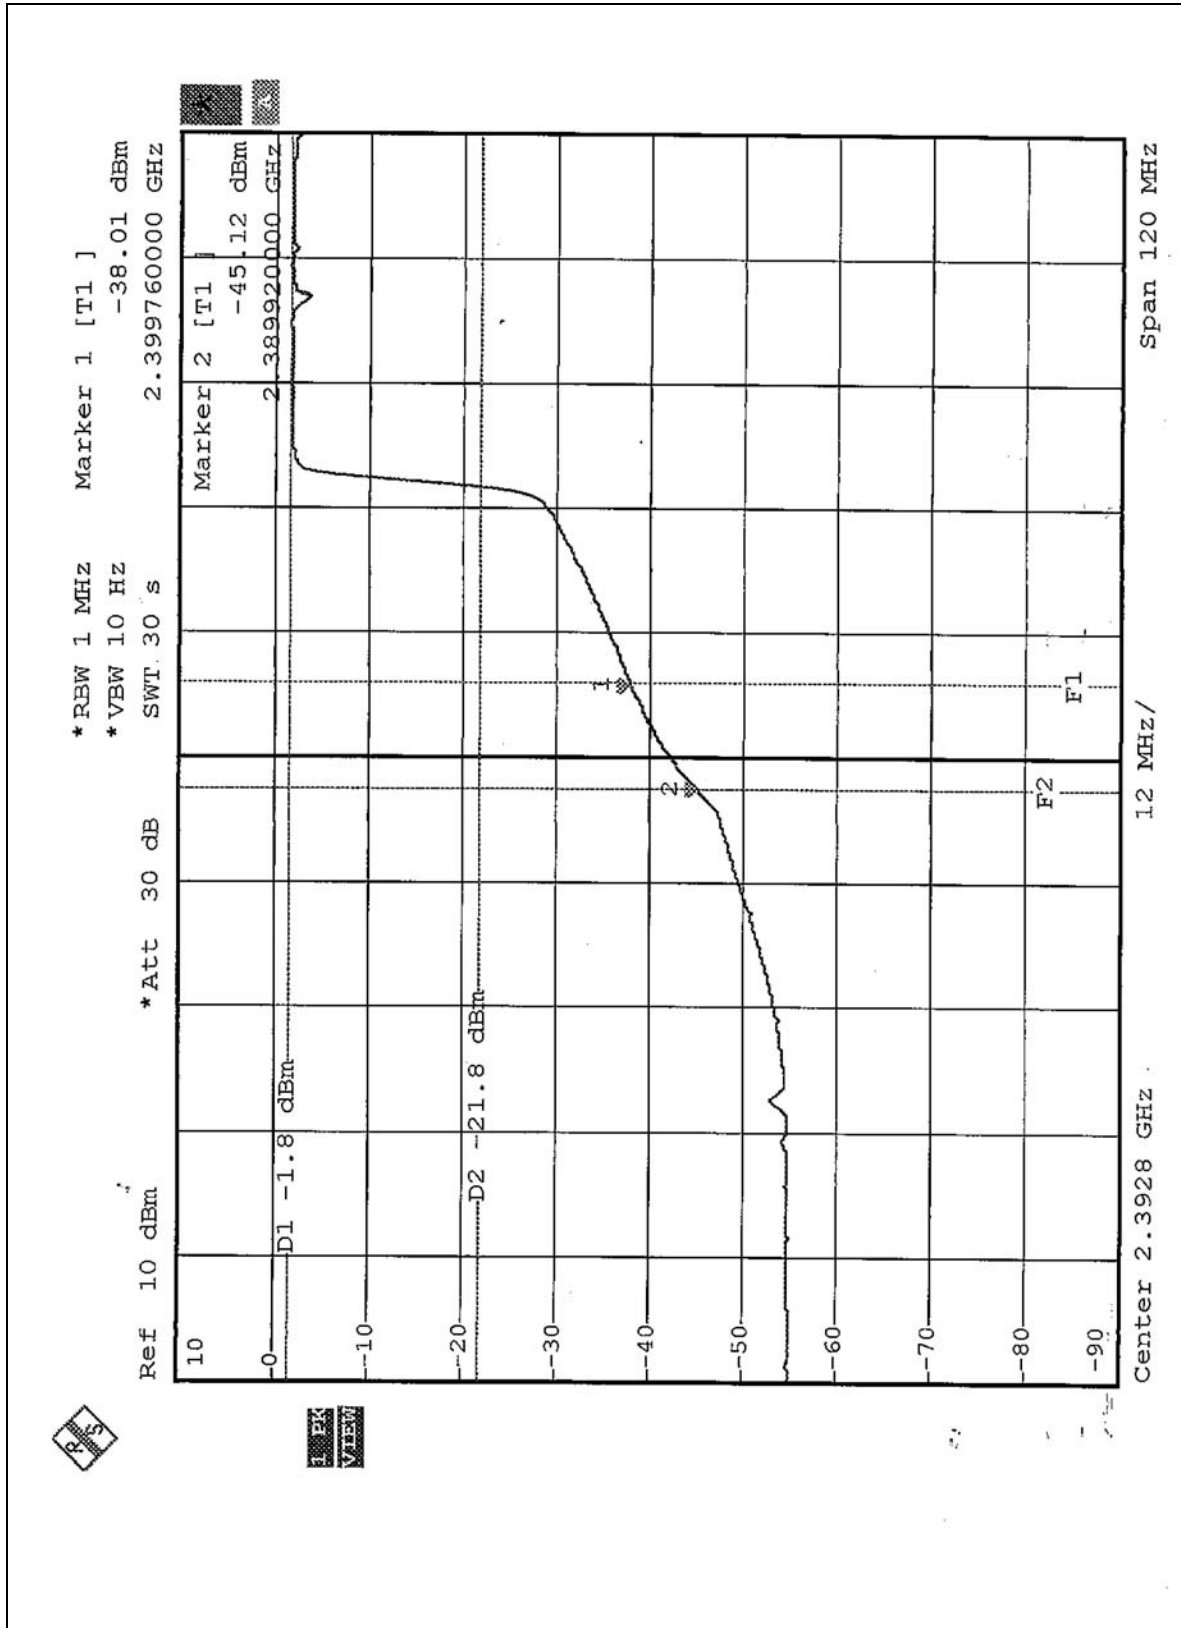

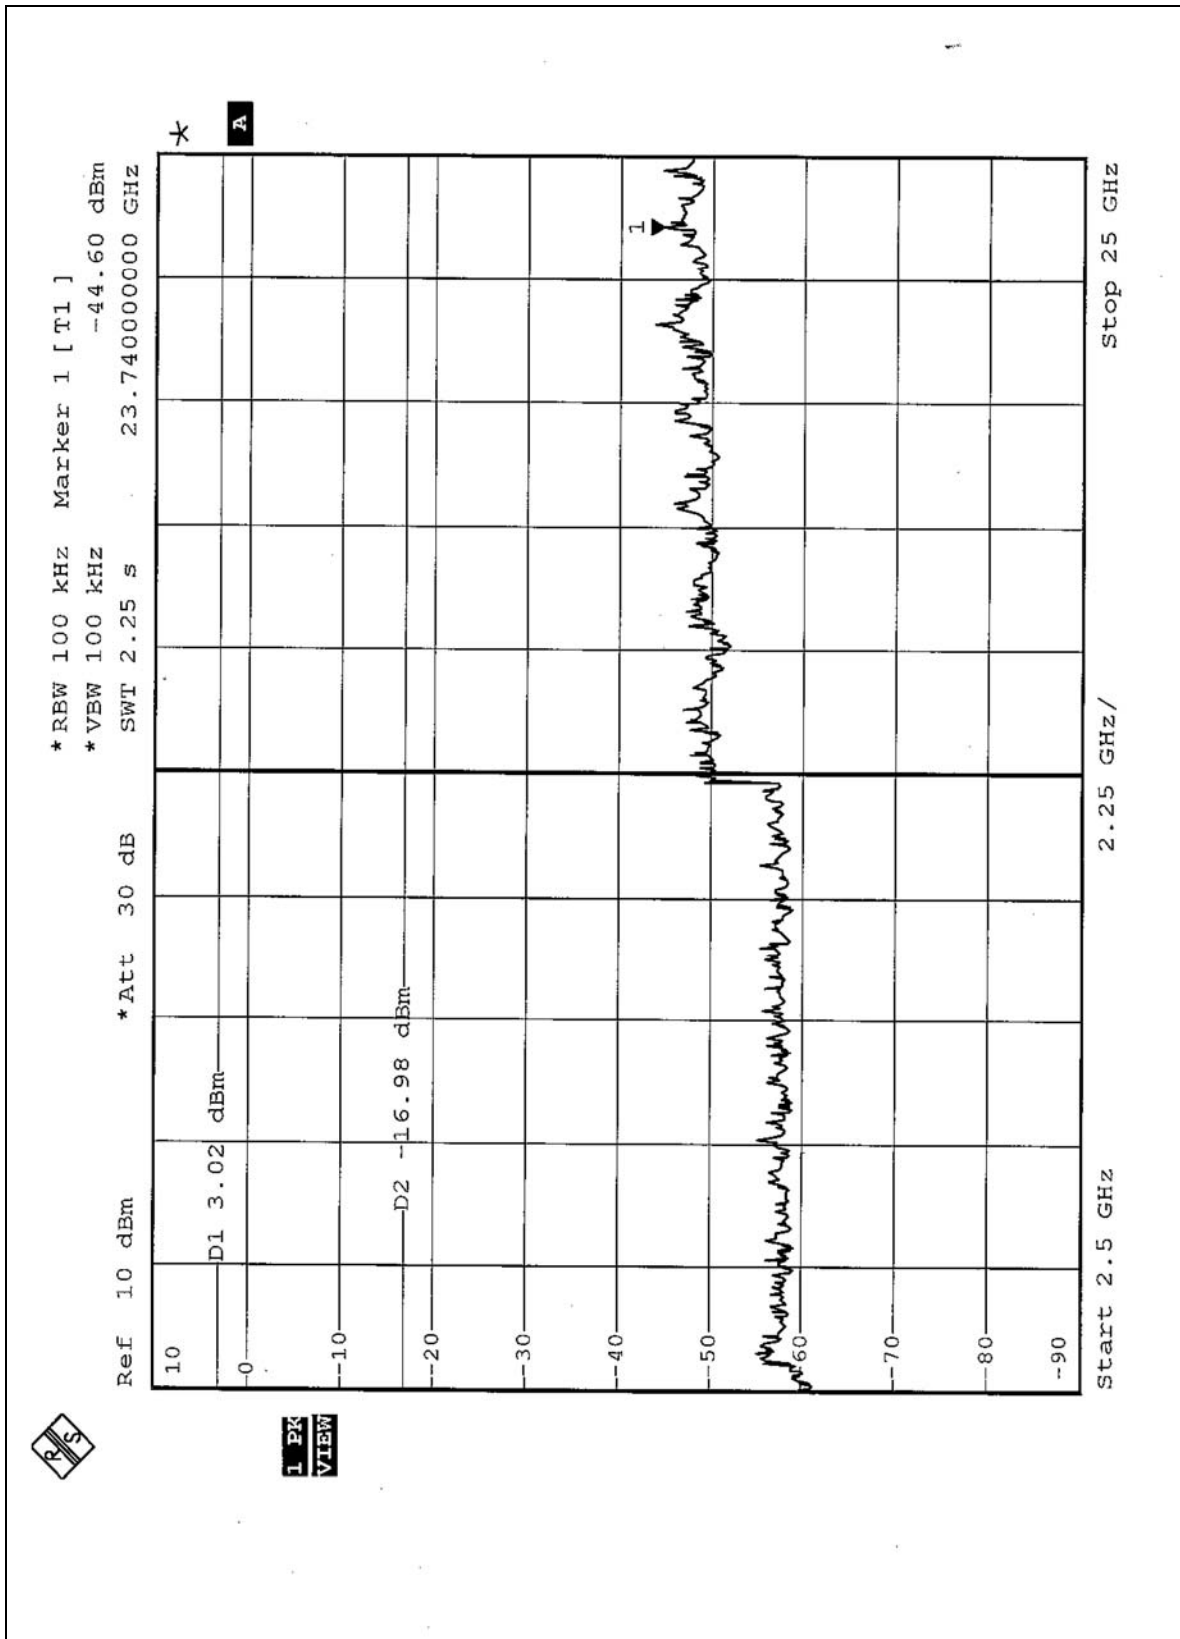

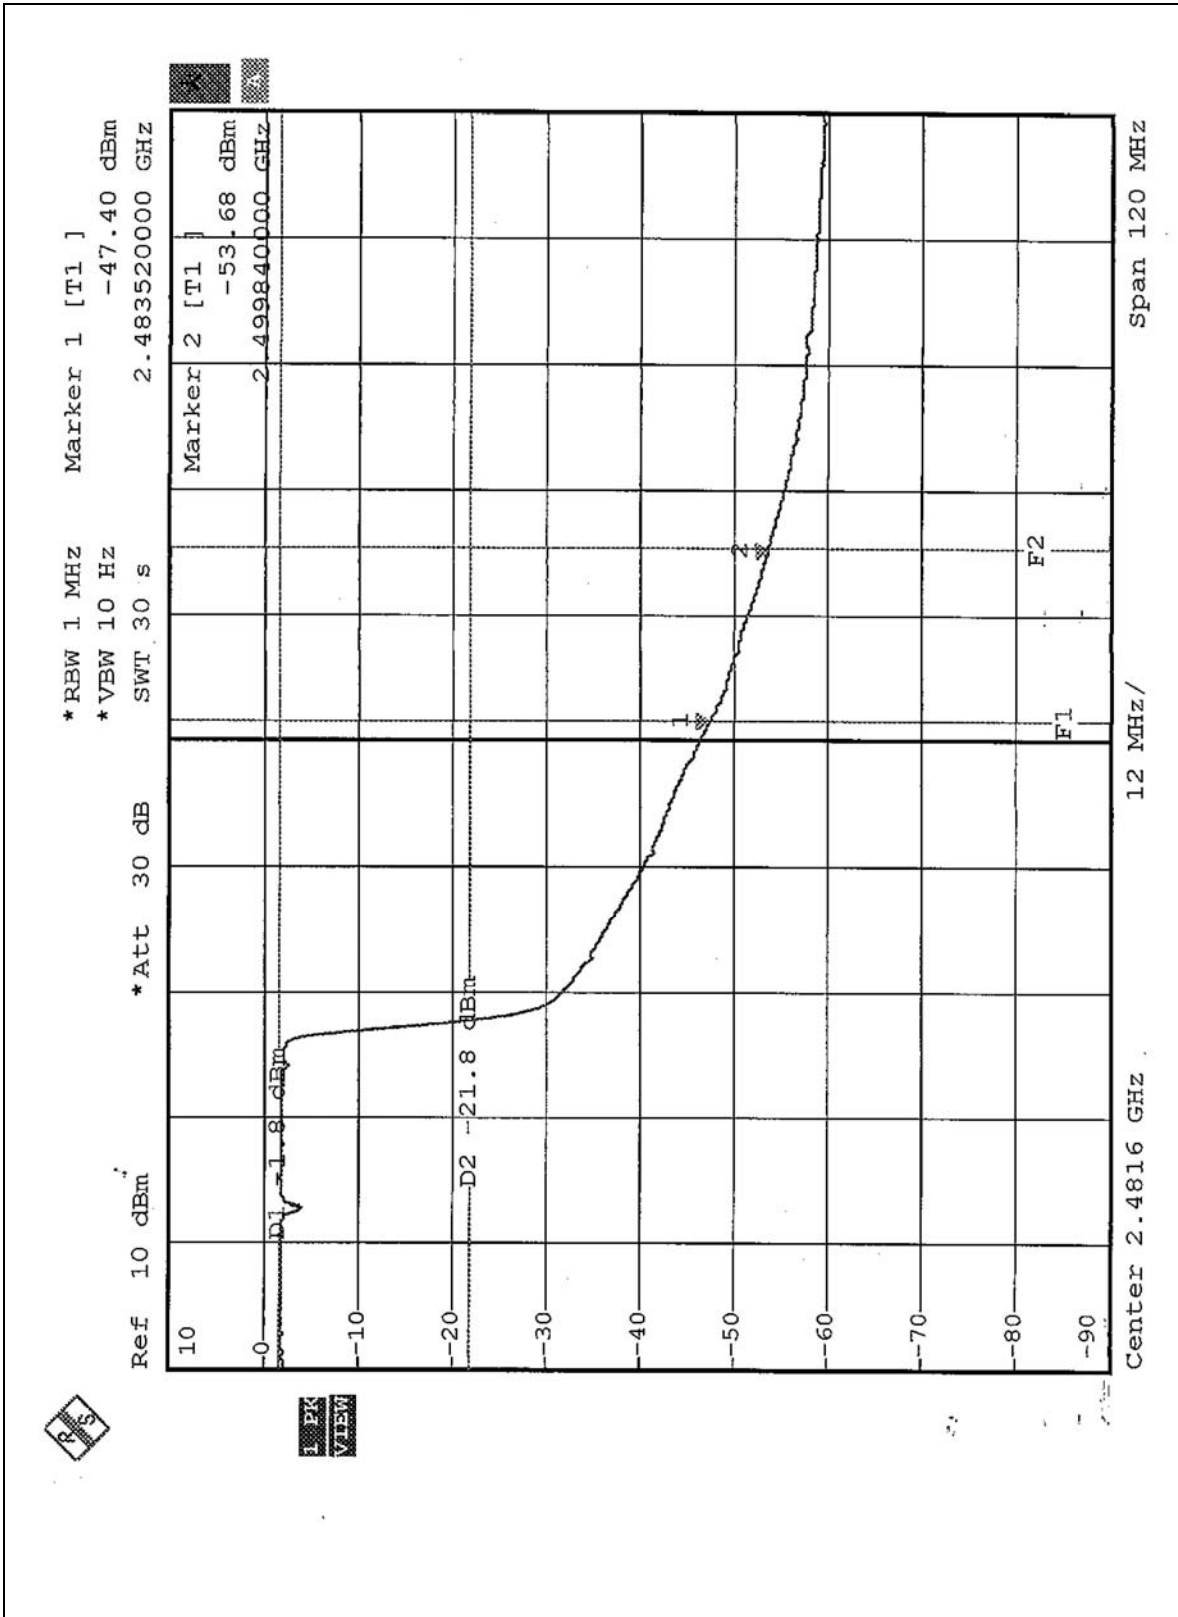

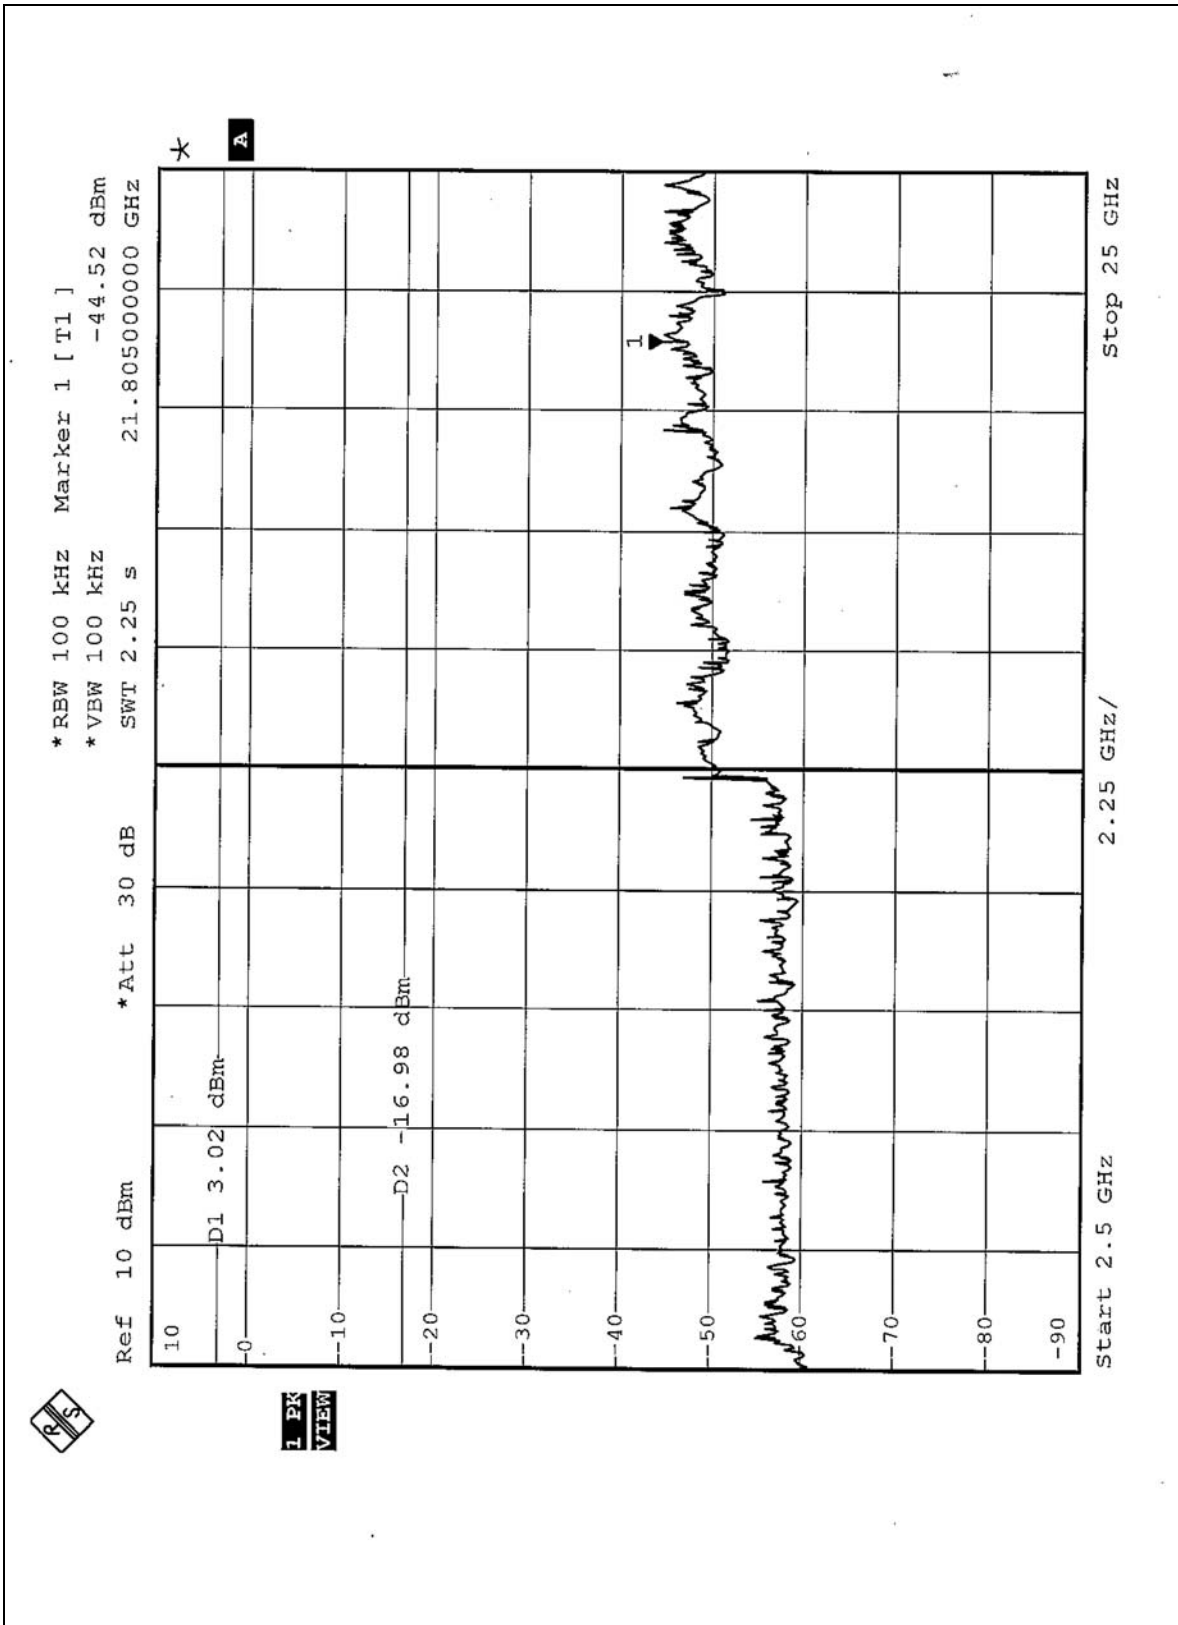



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without any antenna connector. And the maximum Gain of this antenna is 0dBi.



5. TEST TYPES AND RESULTS (FOR PART 802.11a)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 04, 2005
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 09, 2004
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 19, 2004
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 19, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

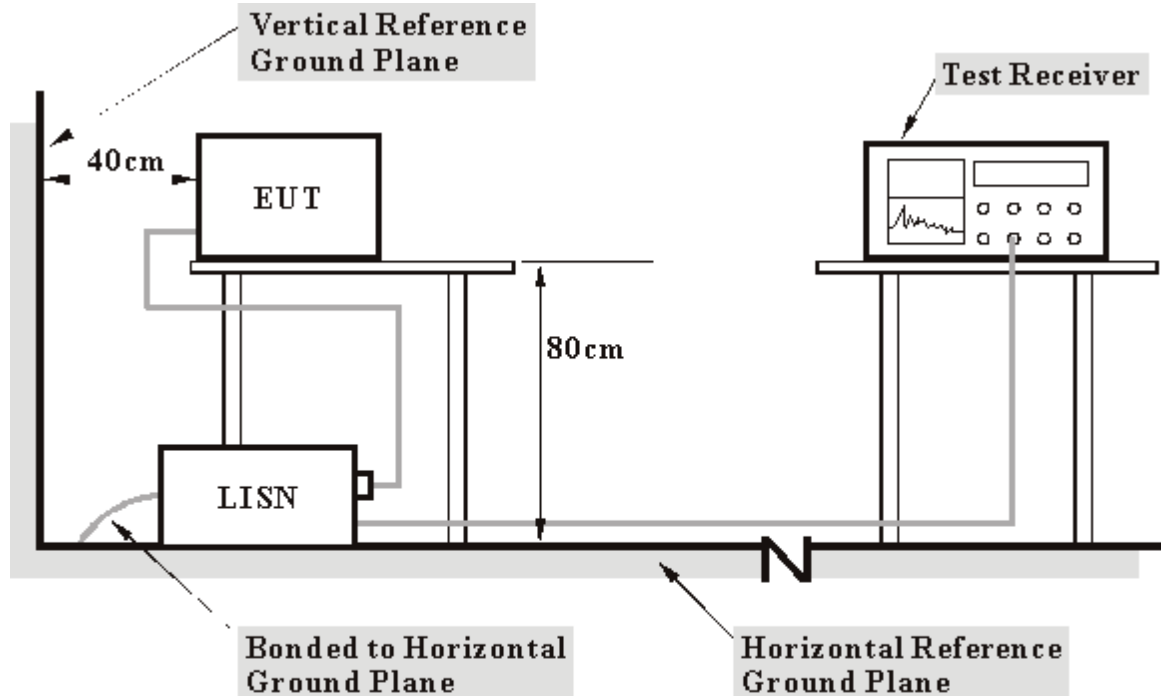

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
		6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	48.24	-	48.34	-	64.79	54.79	-16.45	-
2	0.232	0.10	40.92	-	41.02	-	62.38	52.38	-21.36	-
3	0.404	0.10	33.13	-	33.23	-	57.77	47.77	-24.54	-
4	3.586	0.28	31.95	-	32.23	-	56.00	46.00	-23.77	-
5	21.730	1.00	23.25	-	24.25	-	60.00	50.00	-35.75	-
6	27.238	1.20	21.79	-	22.99	-	60.00	50.00	-37.01	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

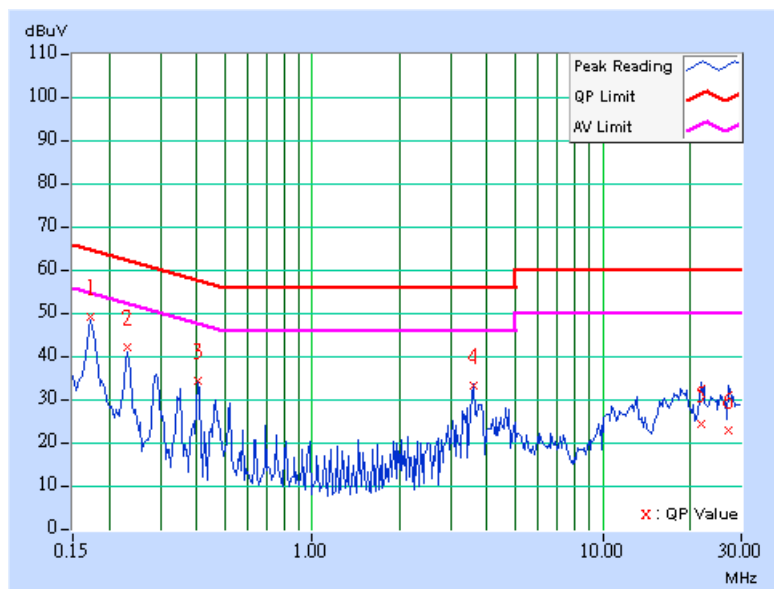




EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
		6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.10	47.60	-	47.70	-	64.79
2	0.231	0.10	40.54	-	40.64	-	62.40	52.40	-21.76	-
3	0.289	0.10	37.34	-	37.44	-	60.55	50.55	-23.11	-
4	0.348	0.10	31.99	-	32.09	-	59.00	49.00	-26.91	-
5	3.660	0.28	30.82	-	31.10	-	56.00	46.00	-24.90	-
6	17.188	0.74	28.83	-	29.57	-	60.00	50.00	-30.43	-
7	27.821	1.06	24.37	-	25.43	-	60.00	50.00	-34.57	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

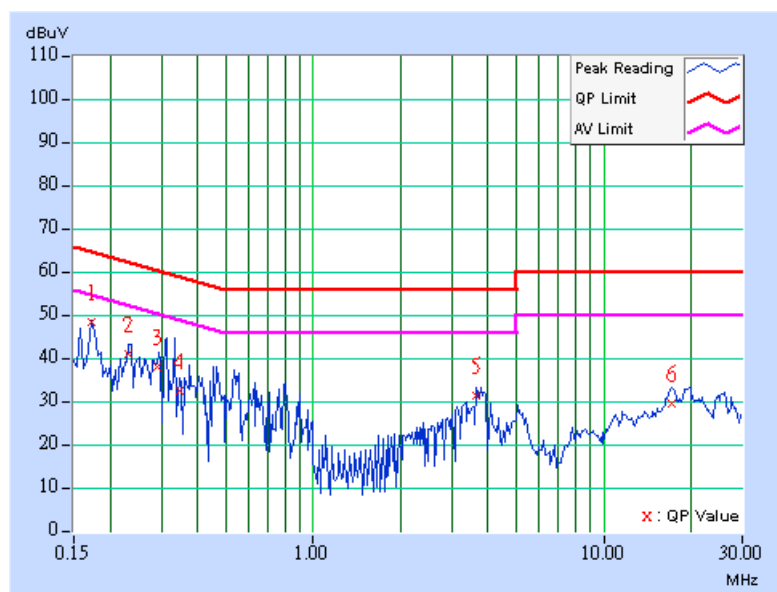



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \quad \text{where } P \text{ is the eirp (Watts)}$$



5.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiate d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 04, 2005
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 04, 2005

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



5.2.4 TEST PROCEDURES

- g. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- h. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- i. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- j. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- k. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- l. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.5 DEVIATION FROM TEST STANDARD

No deviation

5.2.6 TEST SETUP

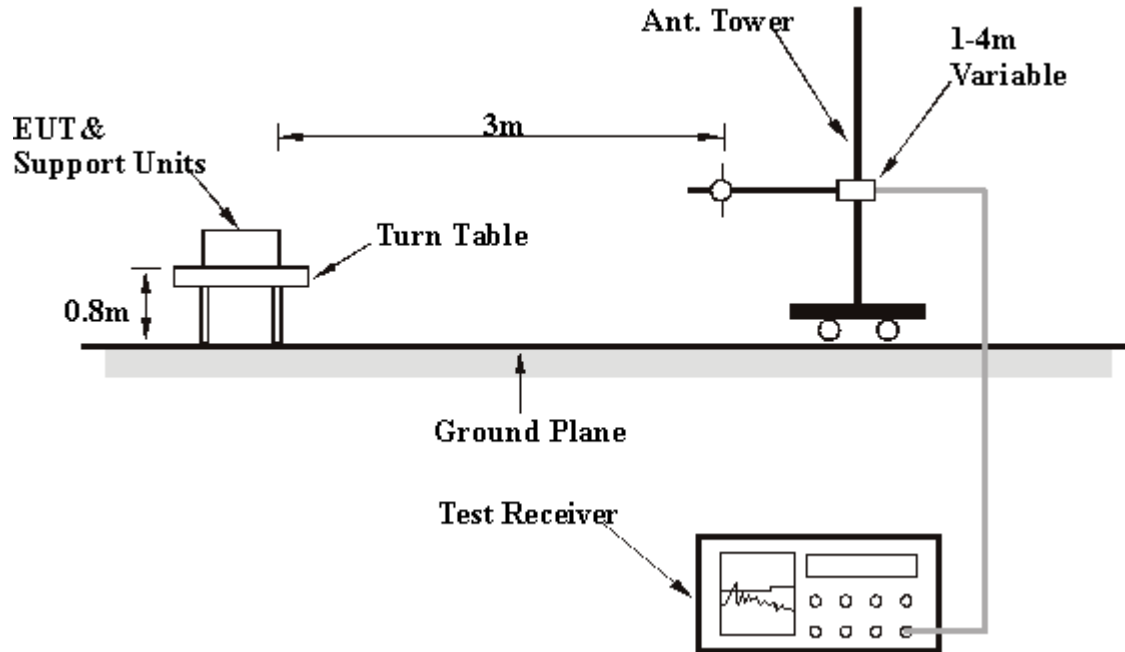

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6



5.2.8 TEST RESULTS

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 82%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.02	33.99 QP	40.00	-6.01	1.40 H	307	25.64	8.35
2	120.00	34.07 QP	43.50	-9.43	2.20 H	57	20.99	13.08
3	160.00	37.07 QP	43.50	-6.43	1.61 H	234	26.38	10.69
4	200.49	38.75 QP	43.50	-4.75	2.58 H	137	27.96	10.79
5	240.05	35.17 QP	46.00	-10.83	1.32 H	0	22.13	13.04
6	279.99	37.47 QP	46.00	-8.53	1.10 H	167	22.14	15.33
7	319.99	37.23 QP	46.00	-8.77	1.04 H	314	21.27	15.96
8	360.01	38.97 QP	46.00	-7.03	1.04 H	97	22.20	16.77
9	480.00	36.10 QP	46.00	-9.90	1.00 H	96	16.47	19.63
10	559.86	37.91 QP	46.00	-8.09	1.00 H	276	16.79	21.12
11	599.99	36.26 QP	46.00	-9.74	1.73 H	45	13.98	22.28
12	719.94	38.11 QP	46.00	-7.89	1.67 H	327	14.96	23.15

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.01	33.04 QP	40.00	-6.96	2.35 V	97	24.69	8.35
2	200.01	37.59 QP	43.50	-5.91	1.28 V	86	26.83	10.76
3	240.03	39.13 QP	46.00	-6.87	2.20 V	238	26.09	13.04
4	279.99	37.94 QP	46.00	-8.06	2.29 V	3	22.61	15.33
5	399.99	35.08 QP	46.00	-10.92	1.41 V	244	16.84	18.24
6	480.00	39.89 QP	46.00	-6.11	2.05 V	180	20.26	19.63
7	559.76	37.08 QP	46.00	-8.92	1.99 V	57	15.96	21.12
8	600.00	38.84 QP	46.00	-7.16	1.48 V	120	16.56	22.28
9	640.00	37.25 QP	46.00	-8.75	1.75 V	176	14.83	22.42
10	679.93	36.67 QP	46.00	-9.33	1.00 V	262	14.08	22.59
11	719.97	39.35 QP	46.00	-6.65	1.00 V	123	16.19	23.16
12	840.00	36.44 QP	46.00	-9.56	1.19 V	99	12.22	24.22

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



5.2.9 TEST RESULTS

NORMAL MODE

EUT	Atheros 11a/g Card Bus Adapter	MODEL	NL-5354CB Plus Aries2
FREQUENCY RANGE	Above 1000 MHz	CHANNEL	1
ENVIRONMENTAL CONDITIONS	15deg. C, 65%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
INPUT POWER (SYSTEM)	120Vac, 60Hz	TESTED BY	Hardaway Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	56.56 PK	74.00	-17.44	1.67 H	275	20.13	36.43
1	#5150.00	47.41 AV	54.00	-6.59	1.67 H	275	10.98	36.43
2	*5180.00	108.84 PK			1.67 H	275	72.38	36.46
2	*5180.00	99.69 AV			1.67 H	275	63.23	36.46
3	10360.00	62.28 PK	68.30	-6.02	1.24 H	219	16.95	45.33
4	#15540.00	62.20 PK	74.00	-11.80	1.25 H	210	14.51	47.69
4	#15540.00	49.44 AV	54.00	-4.56	1.25 H	210	1.75	47.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	56.15 PK	74.00	-17.85	1.30 V	210	19.72	36.43
1	#5150.00	47.17 AV	54.00	-6.83	1.30 V	210	10.74	36.43
2	*5180.00	108.43 PK			1.30 V	210	71.97	36.46
2	*5180.00	99.42 AV			1.30 V	210	62.96	36.46
3	10360.00	66.44 PK	68.30	-1.86	1.38 V	230	21.11	45.33
4	#15540.00	64.05 PK	74.00	-9.95	1.43 V	242	16.36	47.69
4	#15540.00	49.95 AV	54.00	-4.05	1.43 V	242	2.26	47.69

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” : Fundamental frequency
6. “# ” : The radiated frequency falling in the restricted band.