



June 12, 2000

**Senao International Co., LTD.**

2FL, No. 531 Chung Cheng Rd., Hsin-Tien City  
Taipei Hsien, Taiwan  
R.O.C.

**Attn.: Mr. Havin Lu**

**Subject: Verification Testing in accordance with SAR (Specific Absorption Rate) requirements using guidelines established in:**

**IEEE C95.1-1991,  
FCC OET Bulletin 65 (Supplement C)  
Industry Canada RSS-102 (Issue 1)**

**Product: EnGenius  
Model: SN-920 Ultra**

Dear Mr. Lu,

The product sample has been tested in accordance with **SAR (Specific Absorption Rate) requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) and Industry Canada RSS-102 (Issue 1)**, and the results and observation were recorded in the engineering report, Our File No.: ELT-002Q

Enclosed you will find a copy of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,


Tri Minh Luu, P.Eng  
Vice President - Engineering

Encl.

3000 Bristol Circle,  
Oakville, Ontario, Canada  
L6H 6G4

Telephone (905) 829-1570  
Facsimile (905) 829-8050

# CERTIFICATE OF COMPLIANCE



June 12, 2000

**Senao International Co., LTD.**  
2FL, No. 531 Chung Cheng Rd., Hsin-Tien City  
Taipei Hsien, Taiwan  
R.O.C.

File No.: ELT-002Q

## NOT TRANSFERABLE

This Verification Certificate is hereby issued to the named GRANTEE and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below:

**GRANTEE'S NAME:** Senao International Co., LTD.

**PRODUCT UNDER TEST:** EnGenius

**MODEL NO.:** SN-920 Ultra

**FCC ID:** NI3-SN-920U

**APPLICABLE STANDARDS:** SAR (Specific Absorption Rate) requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) and Industry Canada RSS-102(Issue 1)

**EQUIPMENT TYPE:** SST Cordless Phone

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA) & IC (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


**Approved by: Tri M. Luu, P.Eng.  
V.P. – Engineering**

## UltraTech

---

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Telephone (905) 829-1570  
Facsimile (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca)

# ENGINEERING TEST REPORT



**EnGenius**

**Model No.: SN-920 Ultra**

*Applicant:* **Senao International Co., LTD.**  
*2FL, No. 531 Chung Cheng Rd., Hsin-Tien City  
Taipei Hsien, Taiwan  
R.O.C.*

**Tested in Accordance With**

**SAR (Specific Absorption Rate) Requirements  
using guidelines established in IEEE C95.1-1991,  
FCC OET Bulletin 65 (Supplement C) and  
Industry Canada RSS-102(Issue 1)**

**UltraTech's File No.: ELT-002Q**

This Test report is Issued under the Authority of Tri M. Luu, Professional Engineer, Vice President of Engineering UltraTech Group of Labs Date: .....	
Report Prepared by: JaeWook Choi .....	Tested by: JaeWook Choi, SAR Engineer .....
Issued Date: June 12, 2000	Test Dates: June 08, 2000

*The results in this Test Report apply only to the sample(s) tested, which has been randomly selected.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Telephone (905) 829-1570 Facsimile (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca)

## TABLE OF CONTENTS

<b>EXHIBIT 1.</b>	<b>INTRODUCTION</b> .....	<b>3</b>
1.1.	SCOPE.....	3
1.2.	REFERENCES.....	3
<b>EXHIBIT 2.</b>	<b>SUMMARY OF TEST RESULTS &amp; GENERAL STATEMENT OF CERTIFICATION</b> .....	<b>4</b>
<b>EXHIBIT 3.</b>	<b>GENERAL INFORMATION</b> .....	<b>5</b>
3.1.	APPLICANT AND MANUFACTURER.....	5
3.2.	DEVICE UNDER TEST (DUT).....	5
3.3.	PHOTOGRAPH OF DUT.....	6
3.4.	LIST OF DUT'S ACCESSORIES:.....	9
3.5.	SPECIAL CHANGES ON THE DUT'S HARDWARE/SOFTWARE FOR TESTING PURPOSES.....	10
3.6.	ANCILLARY EQUIPMENT.....	10
3.7.	GENERAL TEST CONFIGURATIONS.....	10
3.7.1.	<i>General</i> .....	10
3.7.1.1.	Equipment Configuration.....	10
3.7.1.2.	Exercising Equipment.....	10
3.7.2.	<i>Specific Operating Conditions</i> .....	10
3.8.	GENERAL BLOCK DIAGRAM OF TEST SETUP.....	11
<b>EXHIBIT 4.</b>	<b>SUMMARY OF TEST RESULTS</b> .....	<b>12</b>
4.1.	LOCATION OF TESTS.....	12
4.2.	SUMMARY OF SAR TEST RESULTS.....	12
<b>EXHIBIT 5.</b>	<b>RADIO INFORMATION</b> .....	<b>13</b>
5.1.	MEASUREMENT.....	13
5.2.	SAR MEASUREMENT DATA.....	14
5.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSE.....	14
<b>EXHIBIT 6.</b>	<b>MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR SAR</b> .....	<b>15</b>
6.1.	LOCATION OF TEST.....	15
6.2.	MEASUREMENT SYSTEM SPECIFICATIONS.....	15
6.3.	TEST PROCEDURES.....	15
6.4.	PHANTOM.....	15
6.5.	SIMULATED TISSUE.....	16
6.5.1.	<i>Preparation</i> .....	16
6.6.	MEASUREMENT OF ELECTRICAL CHARACTERISTICS OF SIMULATED TISSUE.....	16
6.6.1.	<i>Description of the slotted coaxial waveguide</i> .....	16
6.7.	SYSTEM DESCRIPTION.....	18
6.8.	DATA EXTRAPOLATION (CURVE FITTING).....	19
6.9.	INTERPOLATION AND GRAM AVERAGING.....	19
6.10.	POWER MEASUREMENT.....	20
6.11.	POSITIONING OF D.U.T. ....	20
<b>ANNEX A:</b>	<b>WAIST WITH FIXED ANTENNA SAR MEASUREMENT</b> .....	<b>32</b>
<b>ANNEX B:</b>	<b>WAIST WITH RETRACTABLE ANTENNA FULLY EXTENDED SAR MEASUREMENT</b> .....	<b>33</b>

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

---

ANNEX C: WAIST WITH RETRACTABLE ANTENNA FULLY RETRACTED SAR MEASUREMENT .....	34
ANNEX D: HEAD LEFT EAR WITH FIXED ANTENNA SAR MEASUREMENT .....	35
ANNEX E: HEAD LEFT EAR WITH RETRACTABLE ANTEENA FULLY EXTENDED SAR MEASUREMENT.....	36
ANNEX F: HEAD LEFT EAR WITH RETRACTABLE ANTENNA FULLY RETRACTED SAR MEASUREMENT.....	37
ANNEX G: TISSUE CALIBRATION .....	38

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q

June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	SAR (Specific Absorption Rate) Requirements IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) , Industry Canada RSS-102 (Issue 1).
<b>Title</b>	Safety Levels with respect to human exposure to Radio Frequency Electromagnetic Fields Guideline for Evaluating the Environmental Effects of Radio frequency Radiation
<b>Purpose of Test:</b>	To show compliance with Federal regulated SAR requirements in Canada and the US.
<b>Method of Measurements:</b>	IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) and Industry Canada RSS-102(Issue 1)
<b>Exposure Category</b>	<input checked="" type="checkbox"/> General population, uncontrolled exposure <input type="checkbox"/> occupational, controlled exposure

### 1.2. REFERENCES

The methods and procedures used for the measurements contained in this report are details in the following reference standards:

Publications	Year	Title
Industry Canada RSS102	1999	"Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields"
NCRP Report No.86	1986	"Biological Effects and Exposure Criteria for radio Frequency Electromagnetic Fields"
FCC OET Bulletin 65	1997	"Evaluating Compliance with FCC Guidelines for Human Exposure to radio Frequency Fields"
ANSI/IEEE C95.3	1992	"Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave"
ANSI/IEEE C95.1	1992	"Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz"

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 2. SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

SAR Limits	Test Requirements	Compliance (Yes/No)
<p><b>General population/Uncontrolled exposure</b></p> <p>0.08W/kg whole body average and spatial peak SAR of 1.6W/kg, averaged over 1gram of tissue Hands, wrist, feet and ankles have a peak SAR not to exceed 4 W/kg, averaged over 10 grams of tissue.</p>	<p>Requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102 (Issue 1).</p>	<p>Yes</p>
<p><b>Occupational/Controlled Exposure</b></p> <p>0.4W/kg whole body average and spatial peak SAR of 8W/kg, averaged over 1gram of tissue Hands, wrist, feet and ankles have a peak SAR not to exceed 20 W/kg, averaged over 10 grams of tissue.</p>	<p>Requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102 (Issue 1).</p>	<p>N/A</p>

### TESTIMONIAL AND STATEMENT OF CERTIFICATION

*THIS IS TO CERTIFY:*

- 1) *THAT the application was prepared either by, or under the direct supervision of the undersigned.*
- 2) *THAT the measurement data supplied with the application was taken under my direction and supervision.*
- 3) *THAT the data was obtained on representative production units, representative.*
- 4) *THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.*

*Certified by:*

-----  
*Tri Minh Luu, P. Eng.  
V.P., Engineering*

DATE: June 12, 2000

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 3. GENERAL INFORMATION

### 3.1. APPLICANT AND MANUFACTURER

<b>APPLICANT:</b>	
<b>Name:</b>	Senao International Co., LTD.
<b>Address:</b>	2FL, No. 531 Chung Cheng Rd., Hsin-Tien City Taipei Hsien, Taiwan R.O.C.
<b>Contact Person:</b>	Mr. Havin Lu Phone #: +886-2-2218-3588 Fax #: +886-2-2218-5635

<b>MANUFACTURER:</b>	
<b>Name:</b>	Senao International Co., LTD.
<b>Address:</b>	2FL, No. 531 Chung Cheng Rd., Hsin-Tien City Taipei Hsien, Taiwan R.O.C.
<b>Contact Person:</b>	Mr. Havin Lu Phone #: +886-2-2218-3588 Fax #: +886-2-2218-5635

### 3.2. DEVICE UNDER TEST (DUT)

The following information are supplied by the applicant.

<b>Manufacturer</b>	Senao International Co., LTD.
<b>Trade Name</b>	EnGenius
<b>Type/Model Number</b>	SN-920 Ultra
<b>Serial Number</b>	No. 27
<b>Type of Equipment</b>	SST Cordless Phone
<b>Frequency of Operation</b>	902 MHz ~ 928 MHz
<b>Rated RF Power</b>	0.9 W pk
<b>Antenna Type</b>	Fixed Dipole & Retractable Dipole
<b>External Power Supply</b>	Ni-MH Battery (m/n : SN-920-BA) 4.8V/ 750mAh
<b>Primary User Functions of DUT:</b>	Voice Radio Communication Through Air

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 3.3. PHOTOGRAPH OF DUT



< Front View >

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



< Rear View >

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



< Fixed Antenna and Retractable Antenna >

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q

June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.4. LIST OF DUT'S ACCESSORIES:



< Hand-Free Headset and adapter >



< Leather case with belt-clip – front view and rear view >

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q

June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.5. SPECIAL CHANGES ON THE DUT'S HARDWARE/SOFTWARE FOR TESTING PURPOSES

None

### 3.6. ANCILLARY EQUIPMENT

None

### 3.7. GENERAL TEST CONFIGURATIONS

#### 3.7.1. General

##### 3.7.1.1. *Equipment Configuration*

Power and signal distribution, grounding, interconnecting cabling and physical placement of equipment of a test system shall simulate the typical application and usage in so far as is practicable, and shall be in accordance with the relevant product specifications of the manufacturer.

The configuration that tends to maximize the DUT's emission or minimize its immunity is not usually intuitively obvious and in most instances selection will involve some trial and error testing. For example, interface cables may be moved or equipment re-orientated during initial stages of testing and the effects on the results observed.

Only configurations within the range of positions likely to occur in normal use need to be considered.

The configuration selected shall be fully detailed and documented in the test report, together with the justification for selecting that particular configuration.

##### 3.7.1.2. *Exercising Equipment*

The exercising equipment and other auxiliary equipment shall be sufficiently decoupled from the EUT so that the performance of such equipment does not significantly influence the test results.


#### 3.7.2. Specific Operating Conditions

##### SAR Measurement against waist with retractable antenna fully retracted

The SAR reading was so low as to be under the SAR test system's sensitivity when the DUT was positioned against the waist with the belt-clip equipped and the antenna fully retracted. In this case, the DUT was positioned against the waist \*without\* the belt-clip in order to obtain the SAR reading.

### 3.8. GENERAL BLOCK DIAGRAM OF TEST SETUP

The EUT was configured as normal intended use. The following block diagram shows the equipment arrangement during tests:

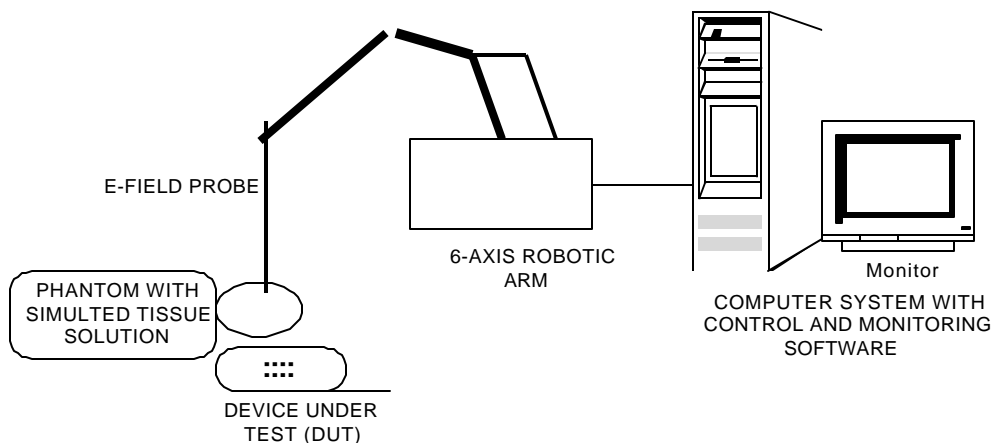

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in:

3000 Bristol Circle, Oakville, Ontario, Canada.

### 4.2. SUMMARY OF SAR TEST RESULTS

The maximum SAR was found to be 1.45 W/Kg on the waist at 915 MHz measured on the fixed antenna configuration. The DUT was found to be in compliance with the 1.6 W/Kg limit.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 5. RADIO INFORMATION

### 5.1. MEASUREMENT

EUT Information		Condition	
Radio Type	SST Cordless Phone	Robot Type	6 Axis
Model Number	SN-920 ULTRA	Scan Type	SAR
Serial Number	No. 27	Measured Field	E
Frequency Band (MHz)	902 ~ 928	Phantom Type	Open Back Full Body, Head Left Ear
Frequency Tested (MHz)	902, 915, 928	Phantom Position	Waist, Left Ear
Nominal Output Power (W)	0.9 pk	Room Temperature	24 ± 1 °C
Antenna Type	Fixed Dipole & Retractable Dipole		
Signal Type	Spread Spectrum		
Duty Cycle	1.68 ms TX over a 4 ms frame		

Type of Tissue	Brain	Muscle	
Target Frequency (MHz)	915	915	
Target Dielectric Constant	45.8	55.9	
Target Conductivity (S/m)	0.77	0.98	
Composition (by weight)	DI Water (44.01%) Sugar (55.93%) HEC (0.05%) Bactericide (0.01%)	DI Water (55.03 %) Sugar (44.40 %) Salt (0.51%) HEC (0.05 %) Bactericide (0.01%)	
Measured Dielectric Constant	45.5	55.0	
Measured Conductivity (S/m)	0.80	0.94	
Probe Name	E	E	
Probe Orientation	Isotropic	Isotropic	
Probe Offset (mm)	3.0	3.0	
Sensor Factor	10.8	10.8	
Conversion Factor	0.66	0.77	
Calibration Date (MM/DD/YY)	03/24/99	03/24/99	

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 5.2. SAR MEASUREMENT DATA

Maximum Field at ( 5 , 115 )				
DUT Positioning	Frequency (MHz)	Measured Power (dBm)	SAR (W/Kg)	DUT Configuration
Waist	915	24.6 avg	1.45	Fixed antenna

DUT Positioning	Frequency (MHz)	Measured Power (dBm)	SAR (W/Kg)	DUT Configuration
Waist	902	24.3 avg	1.32	Fixed antenna
	915	24.6 avg	1.45	
	928	24.6 avg	1.45	
	902	24.7 avg	0.32	Retractable antenna fully extended
	915	24.8 avg	0.35	
	928	24.6 avg	0.37	
	902	25.0 avg	0.16	Retractable antenna fully retracted
	915	24.8 avg	0.17	
	928	24.4 avg	0.17	
Head – Left Ear	902	24.3 avg	0.22	Fixed Antenna
	915	24.6 avg	0.21	
	928	24.6 avg	0.26	
	902	24.7 avg	1.10	Retractable antenna fully extended
	915	24.8 avg	1.23	
	928	24.6 avg	1.10	
	902	25.0 avg	0.01	Retractable antenna fully retracted
	915	24.8 avg	0.00	
	928	24.4 avg	0.01	

## 5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSE

None

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q

June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR SAR

### 6.1. LOCATION OF TEST

All tests were performed at Ultratech Group of Labs located at:

3000 Bristol Circle, Oakville, Ontario, Canada.

### 6.2. MEASUREMENT SYSTEM SPECIFICATIONS

Positioner	Probe
Type : 3D Near Field Scanner	Sensor : E-Field
Location Repeatability : 0.1mm	Spatial Resolution : 0.1 cm <sup>3</sup>
Speed 180 °/sec	Isotropic Response : ± 0.25 dB
AC motors	Dynamic Range : 2 µW/g to 100 mW/g
Computer	Phantom
Type : 166 MHz Pentium	Tissue : Simulated Tissue with electrical characteristics similar to those of the human at normal body temperature.
Memory : 32 Meg. RAM	Shell : Fiberglass human shell shaped (1.5 mm thick)
Operating System : Windows NT	
Monitor : 17" SVGA	

### 6.3. TEST PROCEDURES

In the SAR measurement, the positioning of the probes must be performed with sufficient accuracy to obtain repeatable measurements in the presence of rapid spatial attenuation phenomena. The accurate positioning of the E-field probe is accomplished by using a high precision robot. The robot can be taught to position the probe sensor following a specific pattern of points. In a first sweep, the sensor is positioned as close as possible to the interface, with the sensor enclosure touching the inside of the fiberglass shell. The SAR is measured on a grid of points, which covers the curved surface of the phantom in an area larger than the size of the DUT. After the initial scan, a high- resolution grid is used to locate the absolute maximum measured energy point. At this location, attenuation versus depth scan will be accomplished by the measurement system to calculate the SAR value.

### 6.4. PHANTOM

The phantom used in the evaluation of the RF exposure of the user of the wireless device is a clear fiberglass enclosure 1.5 mm thick, shaped like a human head or body and filled with a mixture simulating the dielectric characteristics of the brain, muscle or other types of human tissue. The maximum width of the cranial model is 17 cm, the cephalic index is 0.7 and the crown circumference of the cranial model is 61 cm. The ear is 6 mm above the outer surface of the shell.

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.5. SIMULATED TISSUE

Simulated Tissue: Suggested in a paper by George Hartsgrrove and colleagues in University of Ottawa Ref.: Bioelectromagnetics 8:29-36 (1987)

Ingredient	Quantity
Water	40.4 %
Sugar	56.0 %
Salt	2.5 %
HEC	1.0 %
Bactericide	0.1 %

Table. Example of composition of simulated tissue.

This simulated tissue is mainly composed of water, sugar and salt. At higher frequencies, in order to achieve the proper conductivity, the solution does not contain salt. Also, at these frequencies, D.I. water and alcohol is preferred.

Tissue Density : Approximately 1.25 g/cm<sup>3</sup>

### 6.5.1. Preparation

We determine the volume needs and carefully measure all components. A clean container is used were the ingredients will be mixed. A stirring paddle and a hand drill is used to stir the mixture. First we heat the DI water to about 40 °C to help the ingredients to dissolve and then we pour the salt and the bactericide. We stir until all the ingredients are completely dissolved. We continue stirring slowly while adding the sugar. We avoid high RPM from the mixing device to prevent air bubbles in the mixture. Later on, we add the HEC to maintain the solution homogeneous. Mixing time is approximately 30 to 40 min.

## 6.6. MEASUREMENT OF ELECTRICAL CHARACTERISTICS OF SIMULATED TISSUE


- 1) Network Analyzer HP8753C or others
- 2) Slotted Coaxial Waveguide

### 6.6.1. Description of the slotted coaxial waveguide

The cylindrical waveguide is constructed with copper tube of about 30 to 40 cm of length, generally 12.5 mm diameter, with connectors at both ends. Inside of this tube, a conductive rod about 6.3 mm is coaxial supported by the two ends connectors (radiator). A slot 3 mm wide start at the beginning of the tube to almost the two third of the tube length. The outer edge of the slotted tube is marked in centimeters (10 to 12) every 1 centimeter, 0.5 if higher frequencies. A saddle piece containing the sampling probe is inserted in the slot so the tip of the probe is close but not in contact with the inner conductor (radiator).

To measure the electrical characteristics of the liquid simulated tissue, we fill the coaxial waveguide, select CW frequency and measure amplitude and phase with the Network Analyzer for every point in the slot (typically 11). An effort is made to keep the results dielectric constant and conductivity within 5 % of published data.

## Electrical Characteristics Measurement Setup

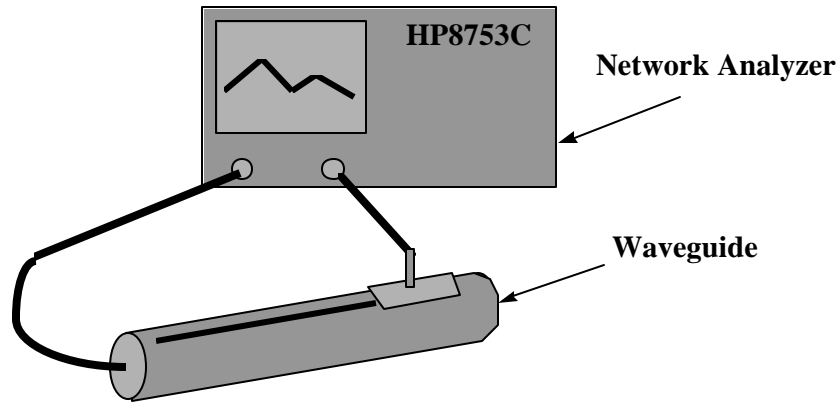

$$c = 3 \cdot 10^8 \text{ m/s}$$

$$A = \frac{\Delta A}{20} \ln_{10} \frac{1}{m}$$

$$q = \frac{\Delta q \cdot 2p}{360}$$

$$l = \frac{c}{f} \cdot \frac{100}{2.54} \text{ inches}$$

$$e_{re} = \frac{(A^2 + q^2) \cdot l^2}{4p^2}$$

$$q' = \frac{|A| \cdot l}{4p \sqrt{e_{re}}}$$

$$S = \tan(2q')$$

$$e_r = \frac{e_{re}}{\sqrt{(1 + S^2)}}$$

$$s = S \cdot 2p \cdot f \cdot 8.854 \cdot 10^{12} \cdot e_r \text{ (S/m)}$$

where;

$\Delta A$  is the amplitude attenuation in dB

$\Delta \theta$  is the phase change in degrees for 5 cm of wave propagation in the slotted line

$f$  is the frequency of interest in Hz

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.7. SYSTEM DESCRIPTION

The measurement system consists of an E-field probe, instrumentation amplifiers, RF transparent cable connecting the amplifiers to the computer, the robotics arm with its extension and proximity sensors, a phantom with simulated tissue and a radio holder to support the device under test. The E-field probe is a three channel device used to measure RF electric fields in the near vicinity of the source. The three sensors are mutually orthogonal positioned dipoles, and are constructed over a quartz substrate. Located in the center of the dipole is a Schottky diode. High impedance lines are connecting the sensor to the amplifier and then optically linked to the computer. The probe has an isotropic response and is transparent to the RF fields.

Calibration is performed by two steps:

- 1) Determination of free space E-field from amplified probe outputs in a test RF field. This calibration is performed in a TEM cell when the frequency is below 1 GHz and in a waveguide or some other methodologies above 1 GHz. For the free space calibration, we place the probe in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. This reading equate to  $1\text{mW}/\text{cm}^2$  if that power density is available in the correspondent cavity.
- 2) Correlation of the measured free space E-field, to temperature rise in a dielectric medium. E-field temperature correlation calibration is performed in a planar phantom filled with the appropriate simulated tissue.

For temperature correlation calibration, a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. First, the location of the maximum E-field close to the phantom's inner surface is determined as a function of power into the RF source; in this case, a dipole. Then, the E-field probe is moved sideways so that the temperature probe, while affixed to the E-field probe is placed at the previous location of the E-field probe. Finally, temperature changes for 30 seconds exposure at the same RF power levels used for the E-field measurement are recorded. The following equation relates SAR to initial temperature slope:

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- $\Delta t$  = exposure time (30 seconds),
- $C$  = heat capacity of tissue (brain or muscle),
- $\Delta T$  = temperature increase due to RF exposure.

The heat capacity used for brain simulated tissue is  $2.7 \text{ joules}^{\circ}\text{C}/\text{g}$  and  $3.0 \text{ joules}^{\circ}\text{C}/\text{g}$  for muscle.

SAR is proportional to  $\frac{\partial T}{\partial t}$ , the initial rate of tissue heating, before thermal diffusion takes place. Now, it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- $\sigma$  = Simulated tissue conductivity,
- $\rho$  = Tissue density ( $1.25 \text{ g}/\text{cm}^3$  for simulated tissue)

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.8. DATA EXTRAPOLATION (CURVE FITTING)

There is a distance from the center of the sensor (diode) to the end of the protective tube called 'probe offset'. To compensate we use an exponential curve fitting method to obtain the peak surface value from the voltages measured at the distance from the inner surface of the phantom. At the point where the highest voltage was recorded, the field is measured as close as possible to the phantom's surface and every 1mm along the `Z` axis for a distance of 50 mm. The appropriate exponential curve is obtained from all the points measured and used to define an exponential decay of the energy density versus depth.

$$E(z) = E_0 \cdot e^{-z/d} \text{ (mV)}$$

## 6.9. INTERPOLATION AND GRAM AVERAGING

The voltage, (1 cm) above the phantoms surface ( $E_{\text{tot}}$  1 cm), is needed to calculate the exposure over one gram of tissue. This SAR value that estimates the average over 1 gram of tissue, is obtained by taking the integral over 1  $\text{cm}^2$  surface of the measured field along the exponential decay curve of the energy density with depth.

$$SAR(mW/g) = \int_{v=1g} SAR(\bullet) dv = \int_{s=1\text{cm}^2} \int_0^{1\text{cm}} E(z) \cdot \frac{CF}{SensorFactor} dz ds$$

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>


File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.10. POWER MEASUREMENT

When ever possible, a conducted power measurement is performed. To accomplish this, we utilize a fully charged battery, a calibrated power meter and a cable adapter provided by the manufacturer. The data of the cable and related circuit losses are also provided by the manufacturer. The power measurement is then performed across the operational band and the channel with the highest output power is recorded.

Power measurement is performed before and after the SAR to verify if the battery was delivering full power for the time of test. A difference in output power would determinate a need for battery replacement and repetition the SAR test.

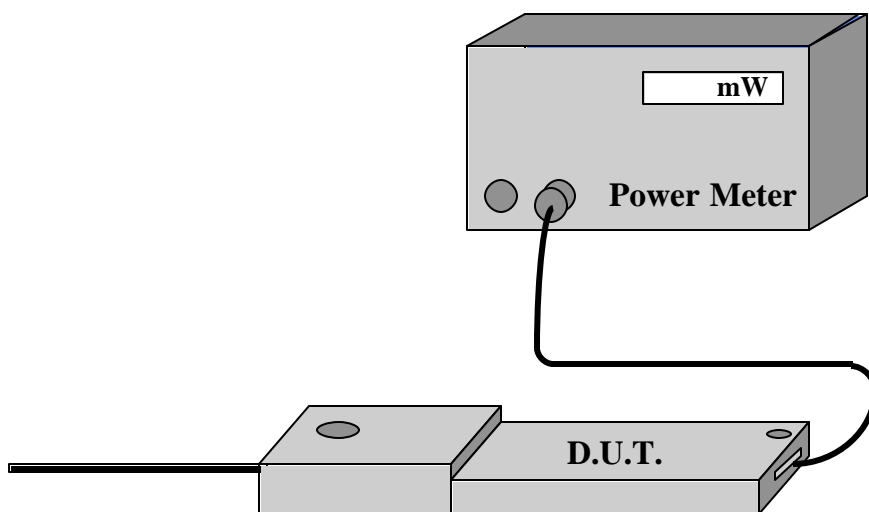

Measured Power Measured Power + Cable and Switching Mechanism Loss

## 6.11. POSITIONING OF D.U.T.

The clear fiberglass phantom shell have been previously marked with a highly visible line, so can easily be seen through the liquid simulated tissue. In the case of testing a cellular phone, this line is connecting the ear channel with the corner of the lips. The D.U.T. is then placed by centering the speaker with the ear channel and the center of the radio width with the corner of the mouth. At the same time the surface of the D.U.T. is always in contact with the phantoms shell. Three points contact; two in the ear region and one on the chin in addition to the previously describe alignment will assure repeatability of the test.

For HAND HELD devices (push-to-talk), or any other type of wireless transmitters, the D.U.T. will be positioned as suggested by manufacturer operational manuals .

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## Positions of the D.U.T



< Waist with fixed antenna >


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



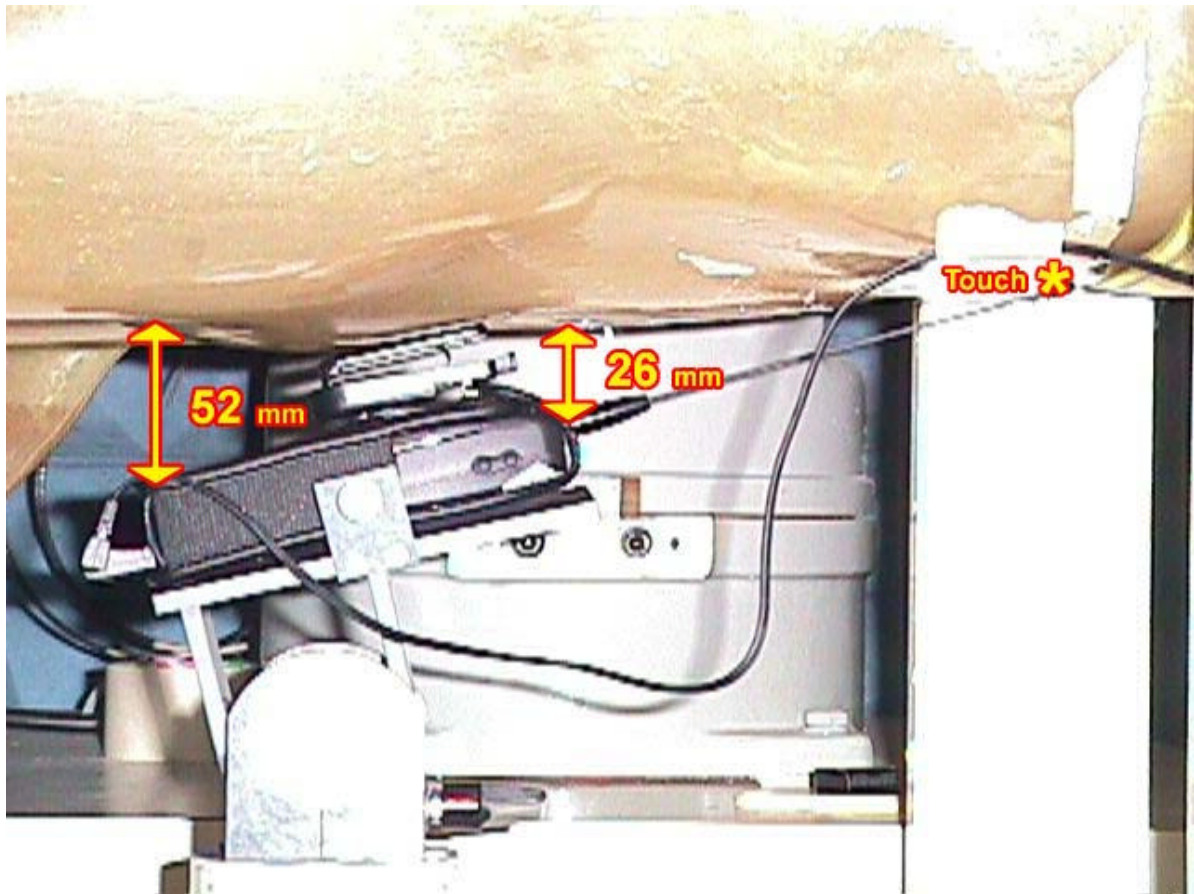


< Waist with fixed antenna >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

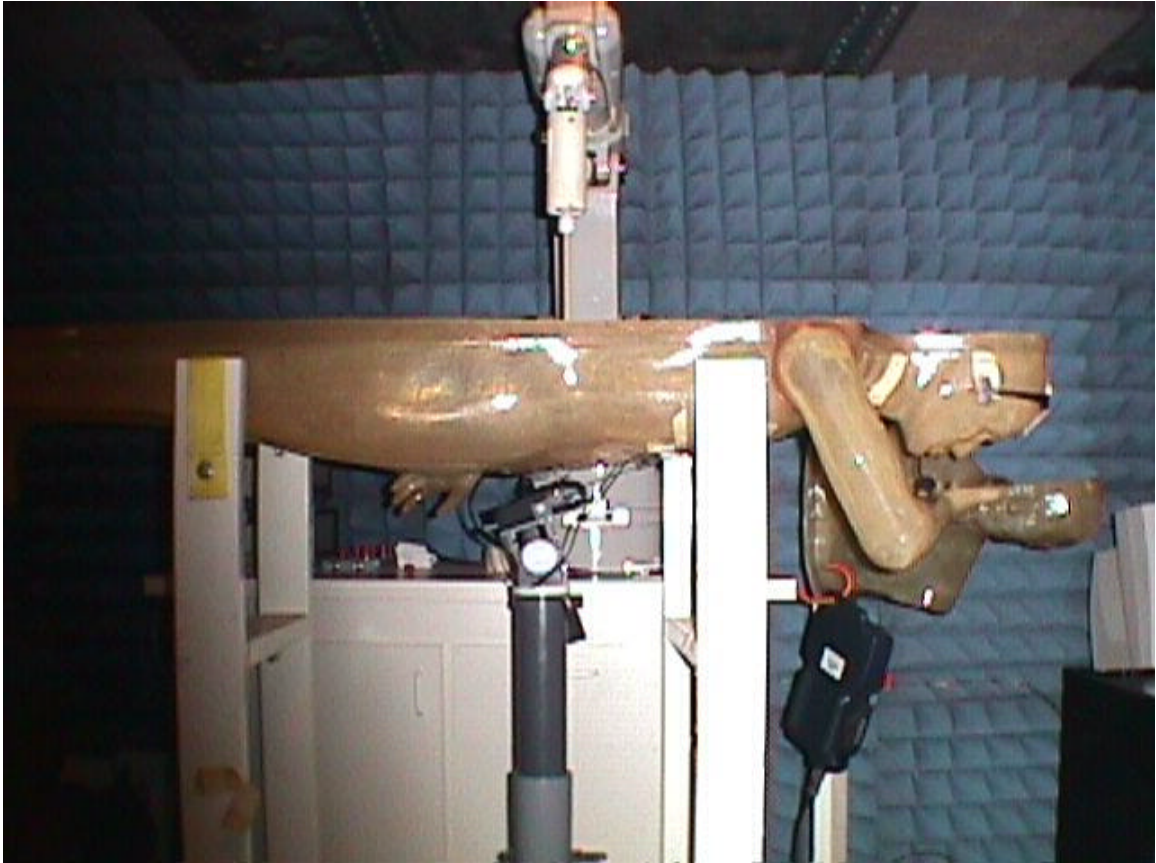

< Waist with retractable antenna fully extended >

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



< Waist with retractable antenna fully extended >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)





< Waist with retractable antenna fully retracted – Refer to 3.7.2. >


---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

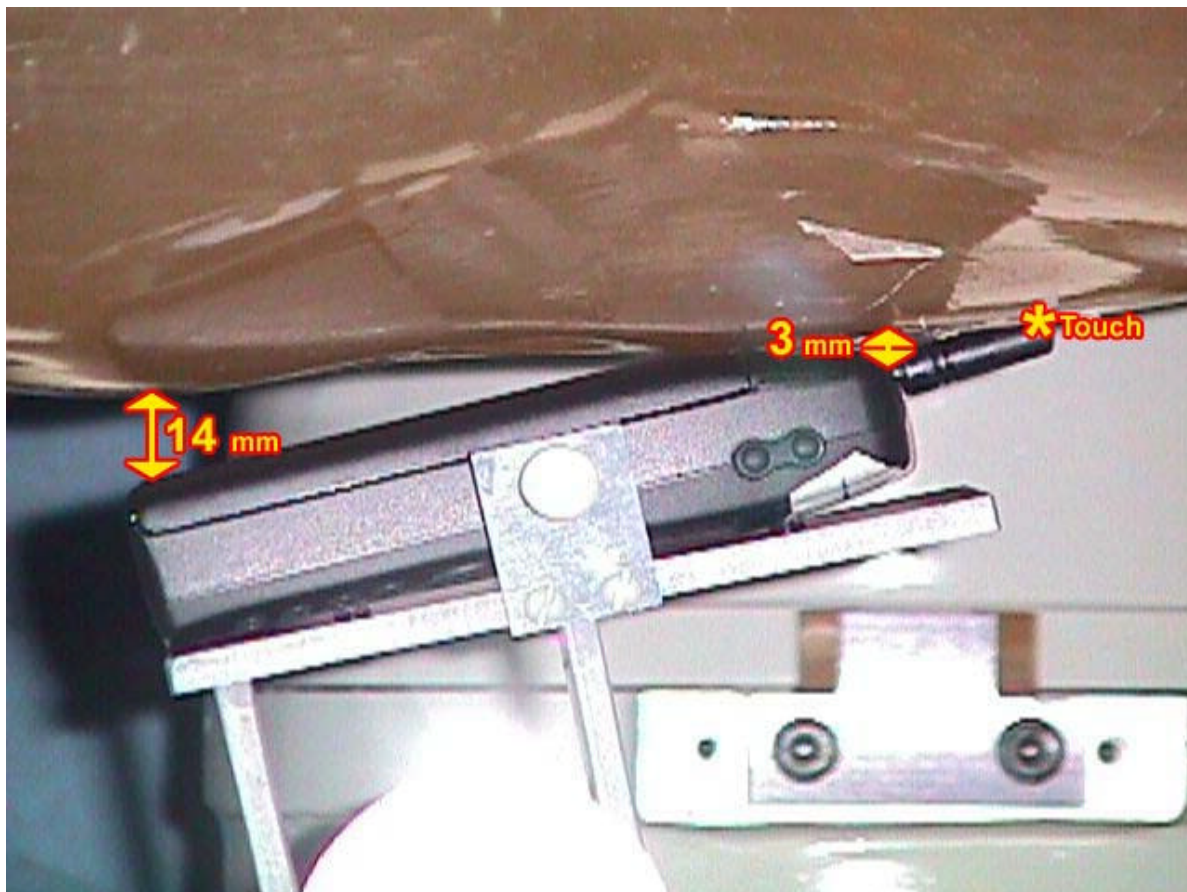


< Waist with retractable antenna fully retracted – Refer to 3.7.2. >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

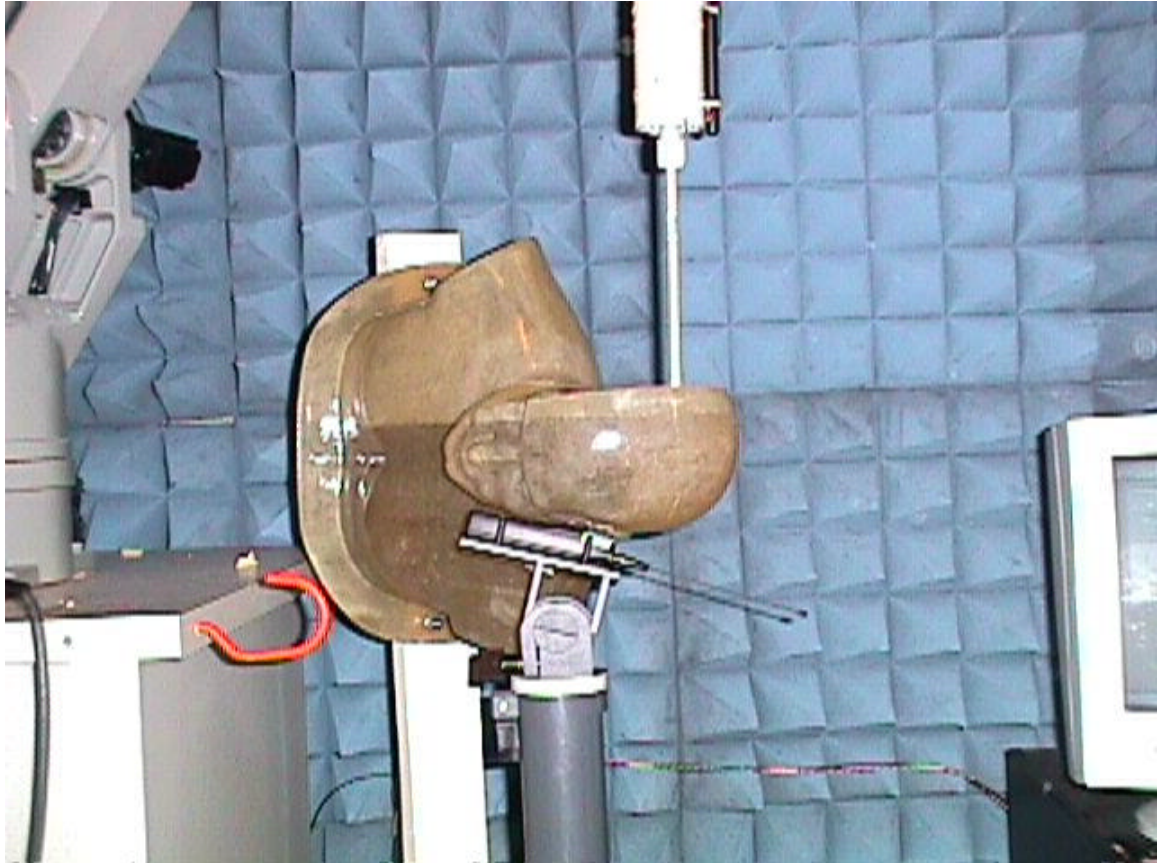

< Head left ear with fixed antenna >

---


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



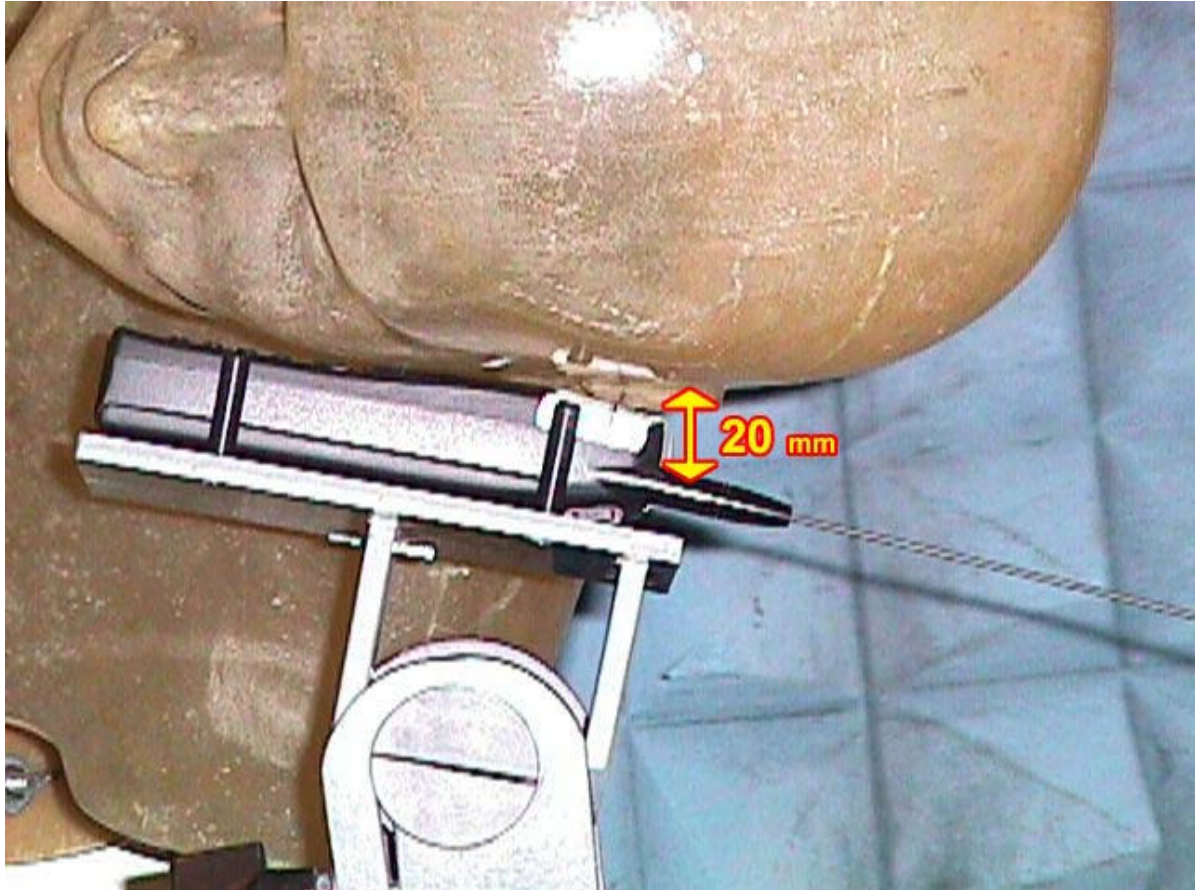


< Head left ear with fixed antenna >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

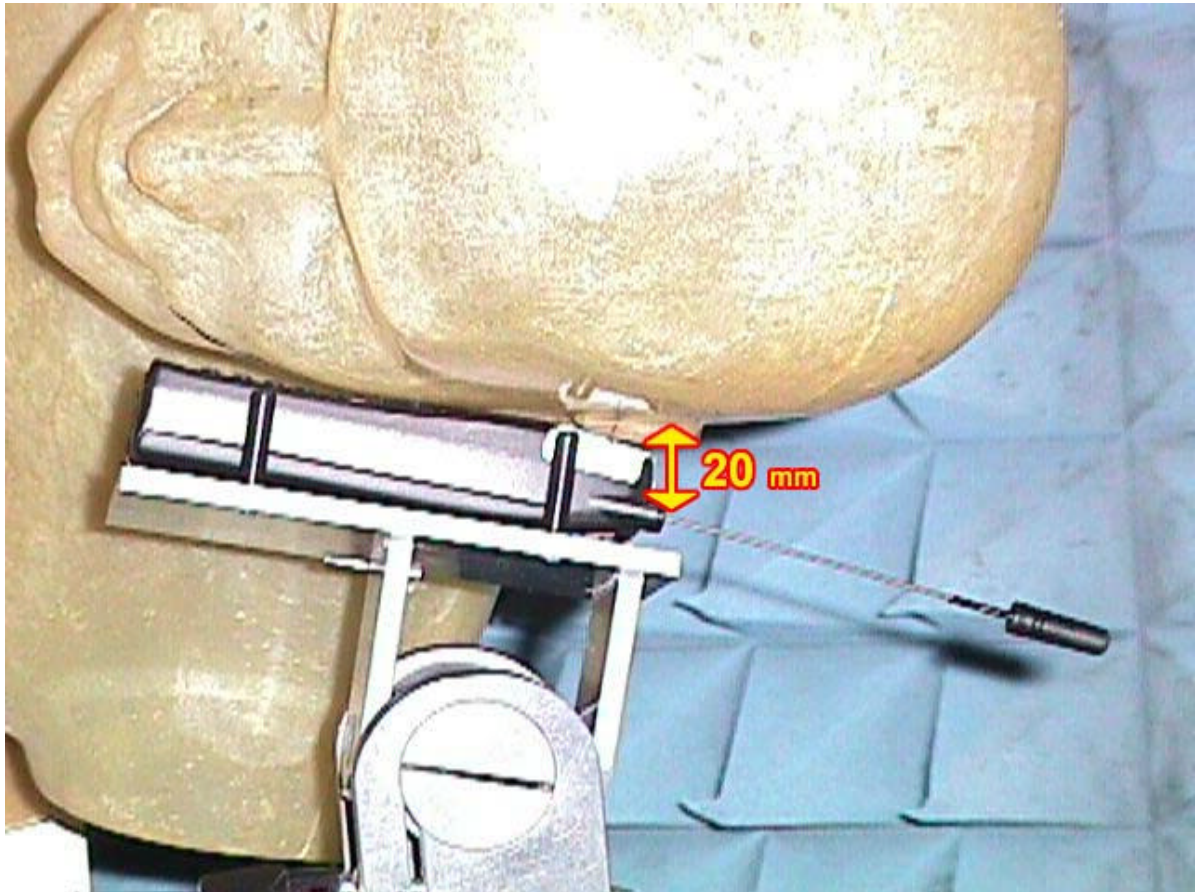

< Head left ear with retractable antenna fully extended >


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



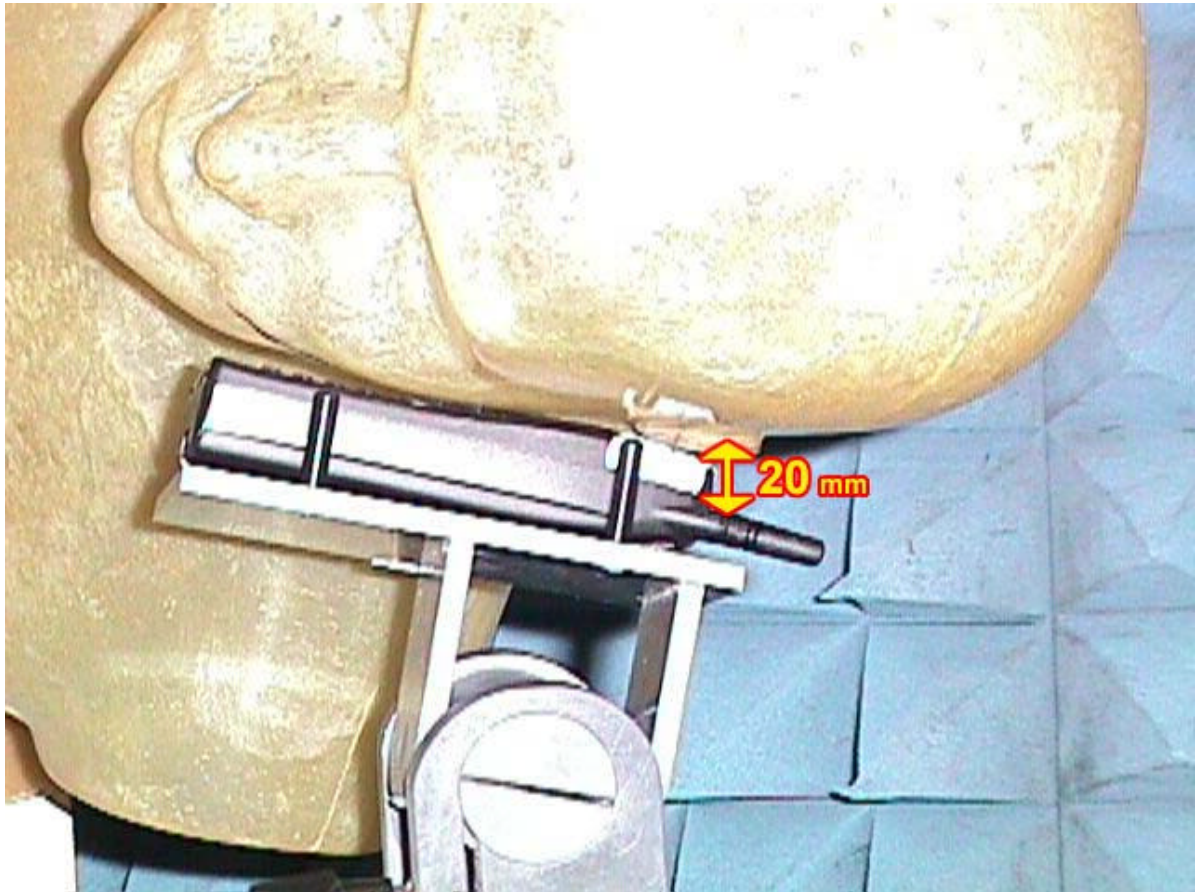

< Head left ear with retractable antenna fully retracted >


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### Maximum Field Location (see Page. 13 & 14 for details)

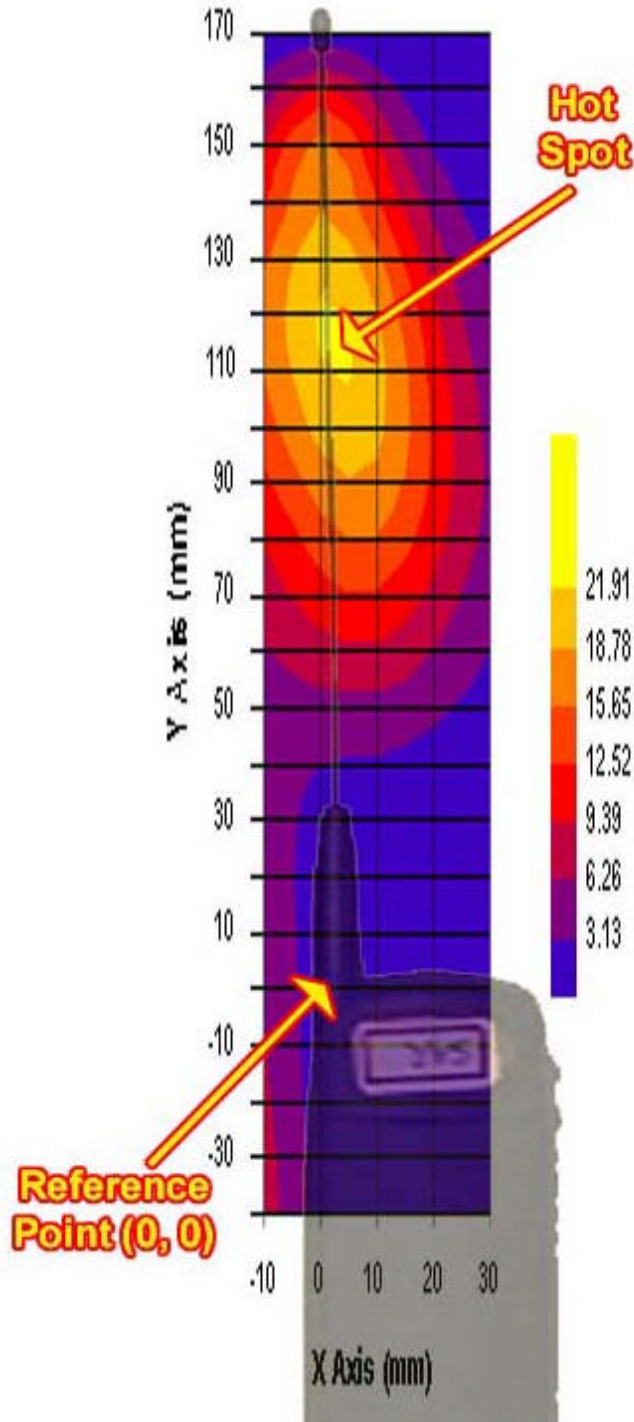

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **ANNEX A: Waist with fixed antenna SAR MEASUREMENT**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ELT-002Q**  
**June 12, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 6/7/00  
Time : 6:23:11 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.2 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.3 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------



Location of Maximum Field :


X = 0                      Y = 115


Measured Values (mV) :


22.36	20.00	17.92	16.35	15.00	13.86
12.60	11.73	10.74	10.01	9.22	

<u>Peak Voltage (mV)</u>	: 28.51	<u>1 Cm Voltage (mV)</u>	: 11.86	<u>SAR (W/Kg)</u>	: 1.32
--------------------------	---------	--------------------------	---------	-------------------	--------

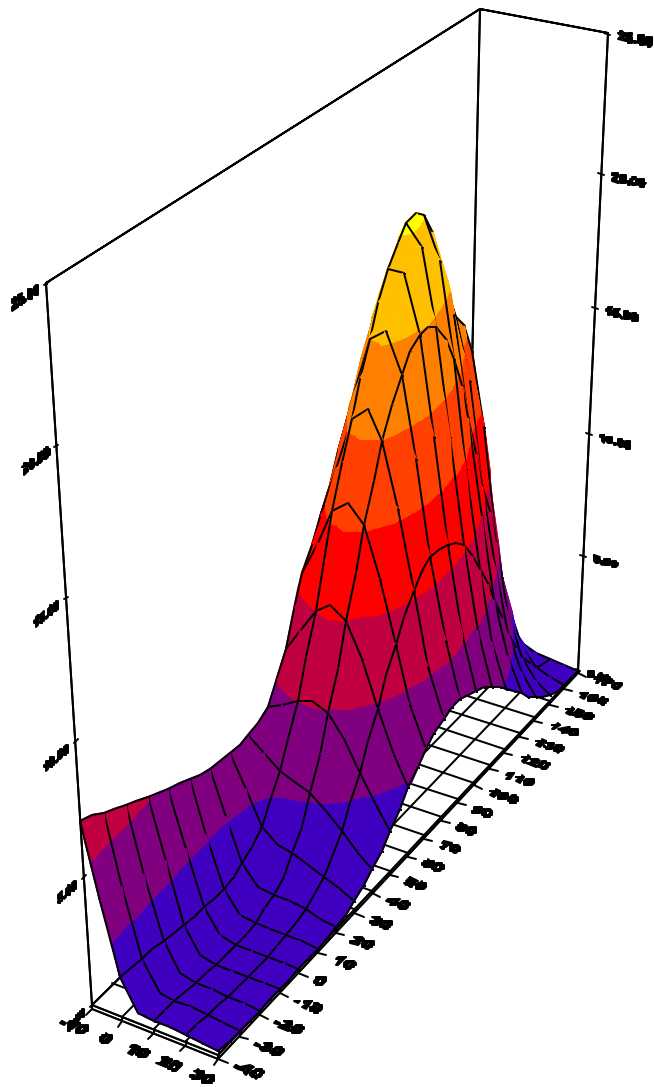


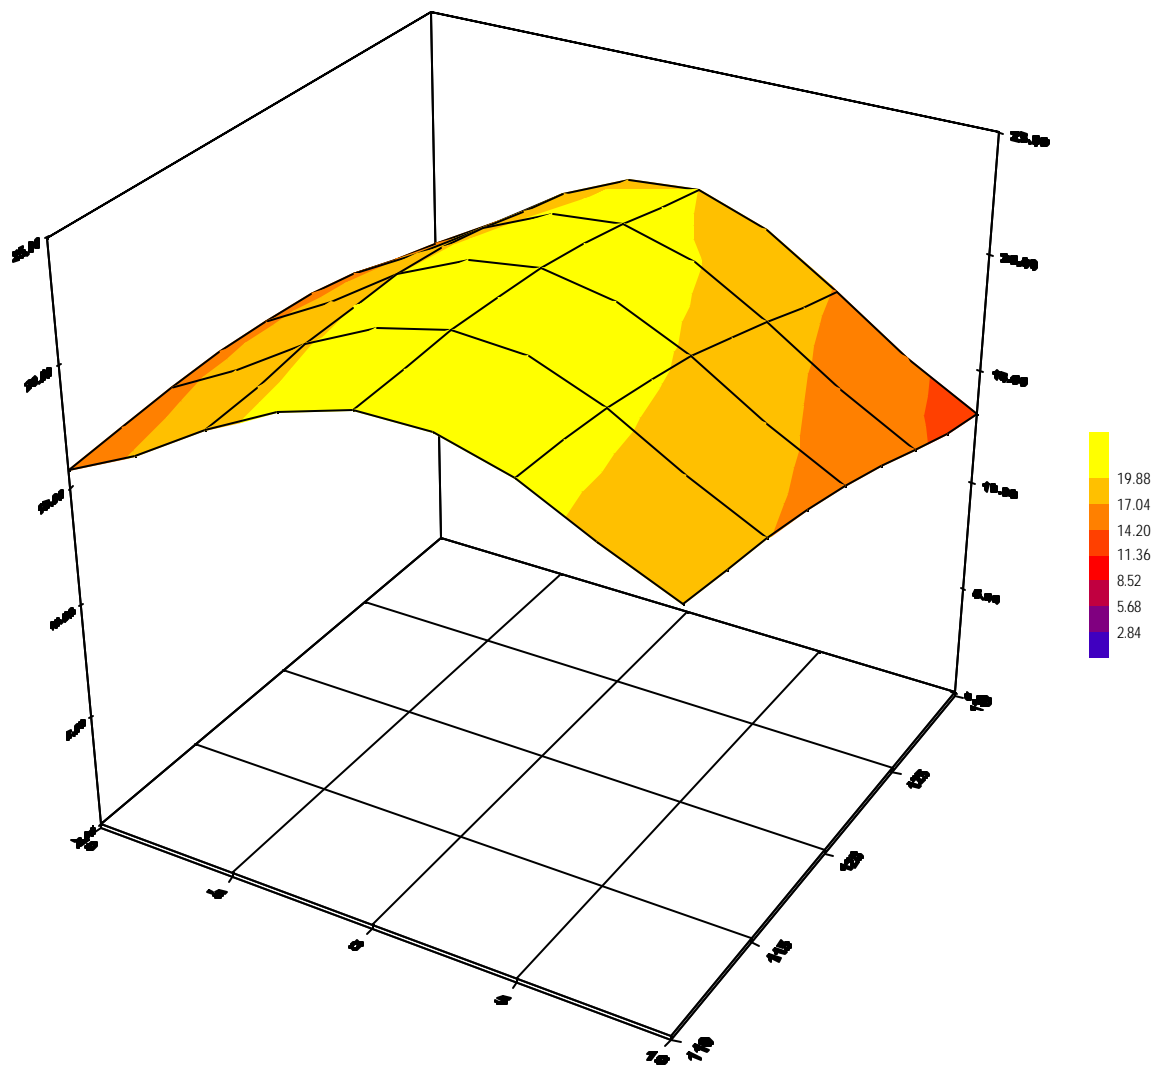


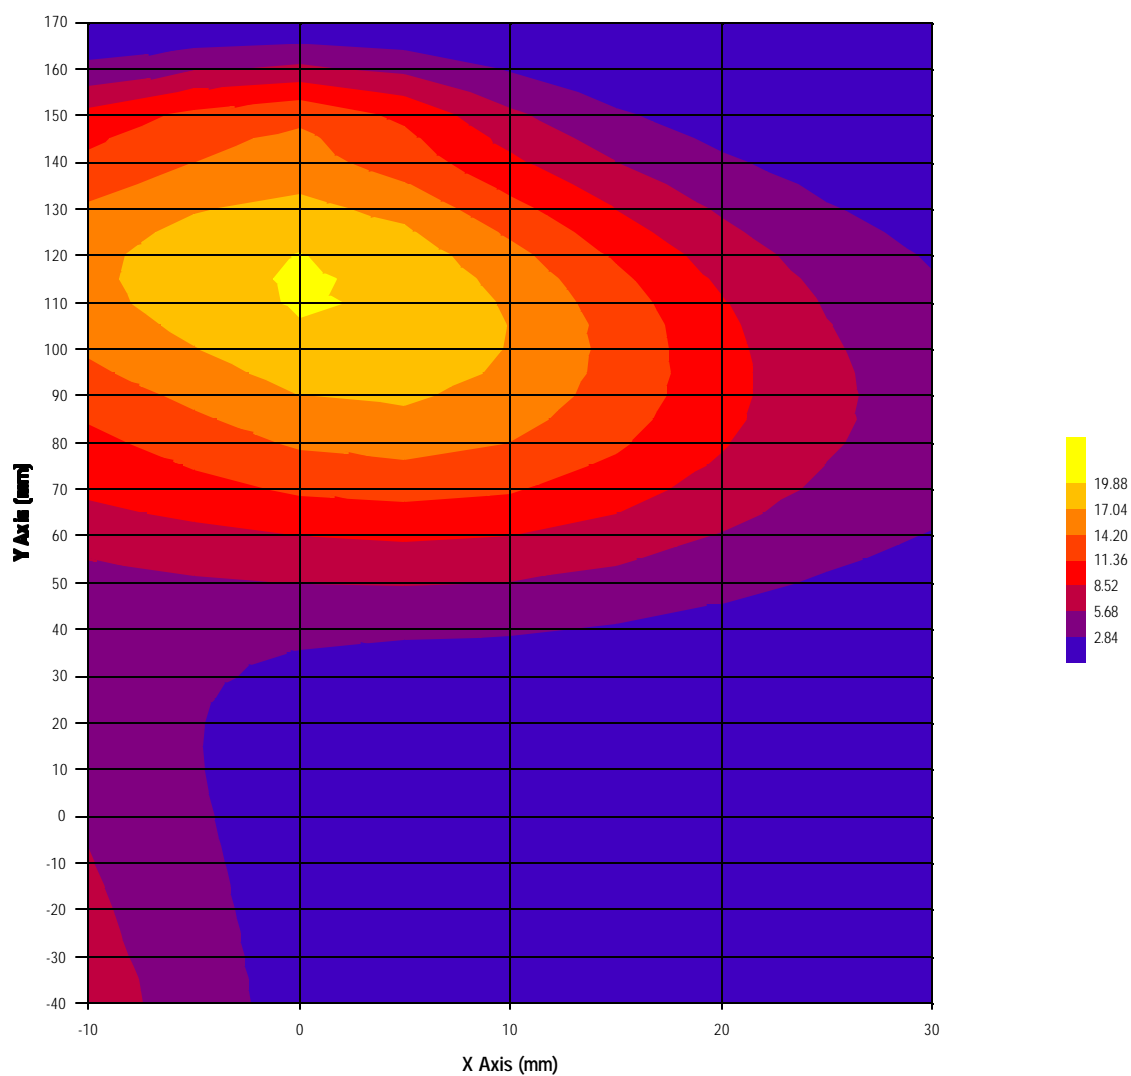

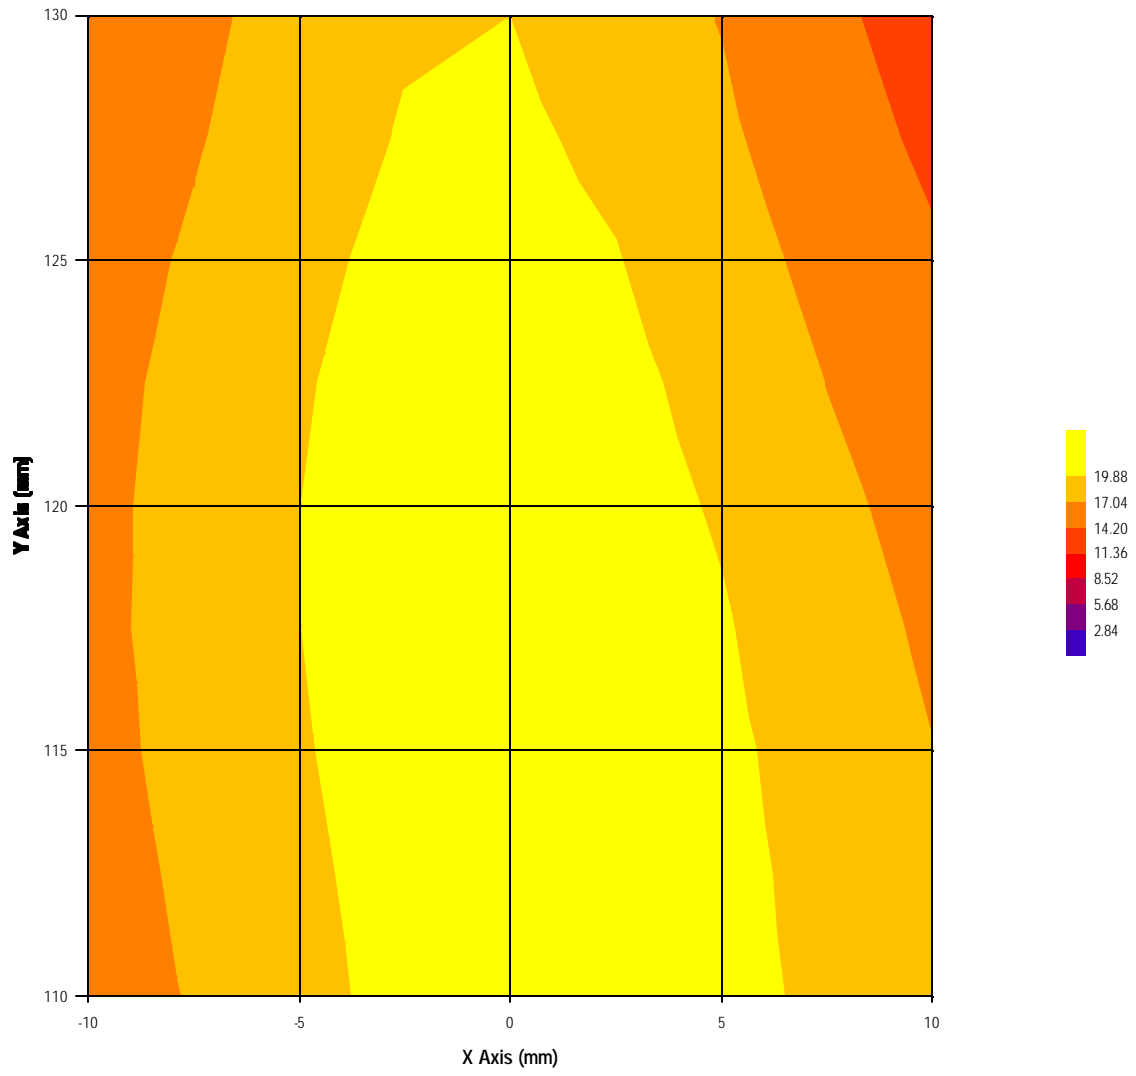



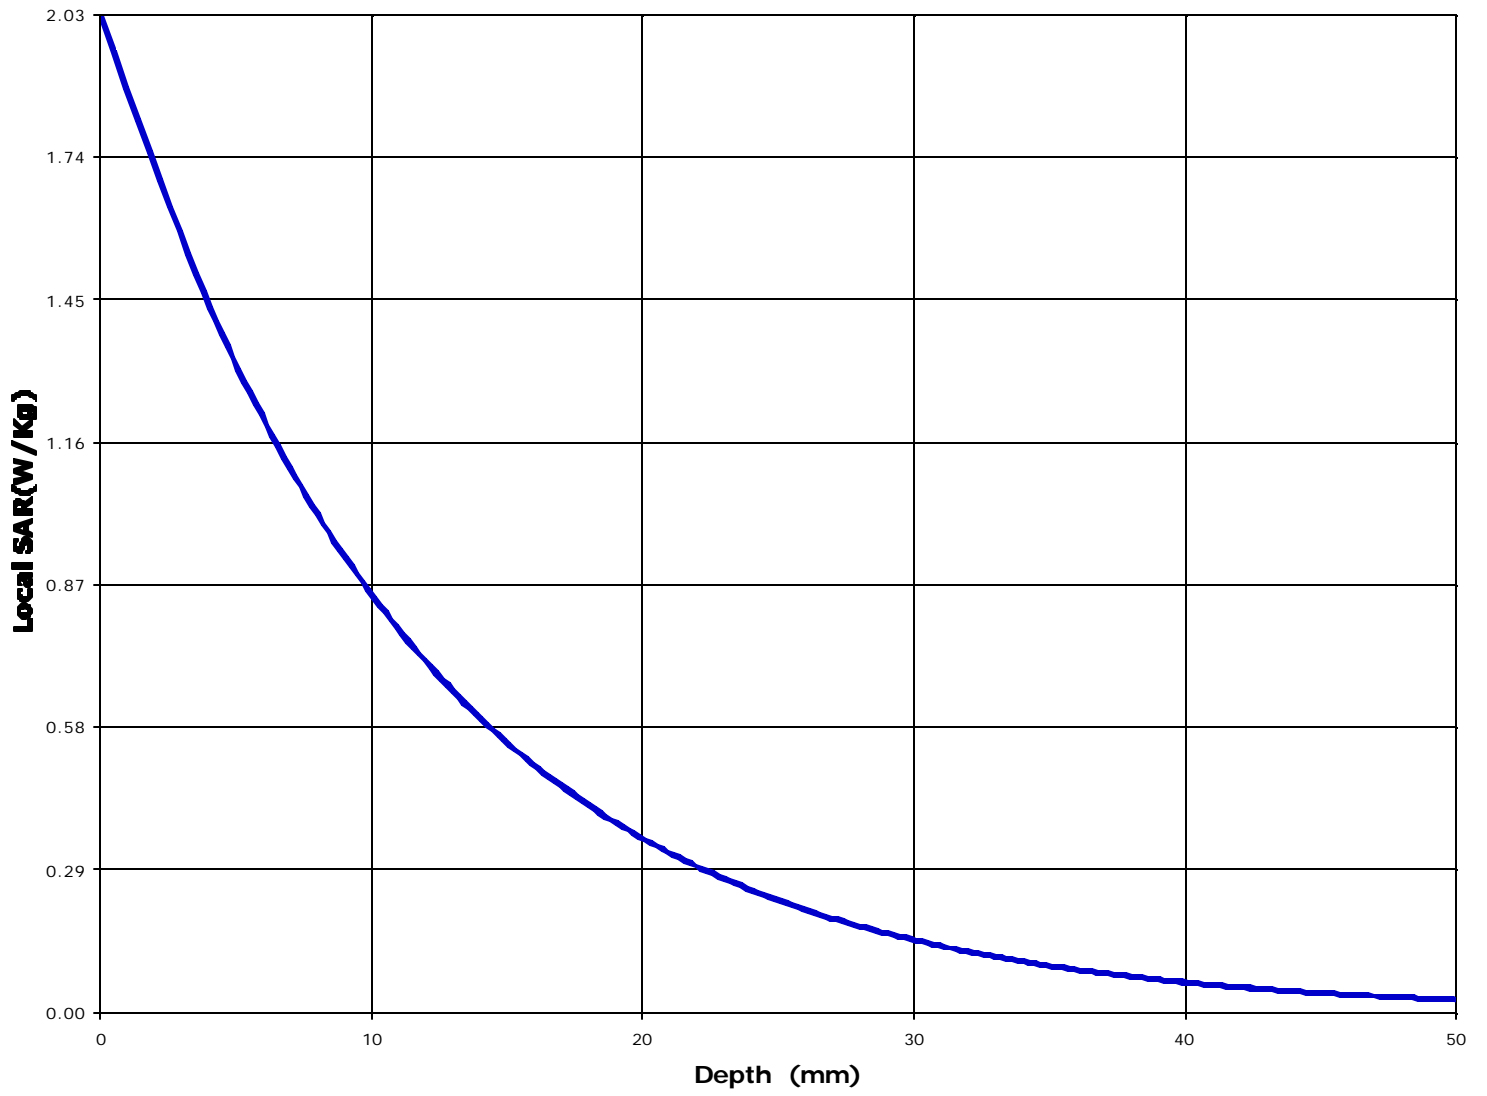

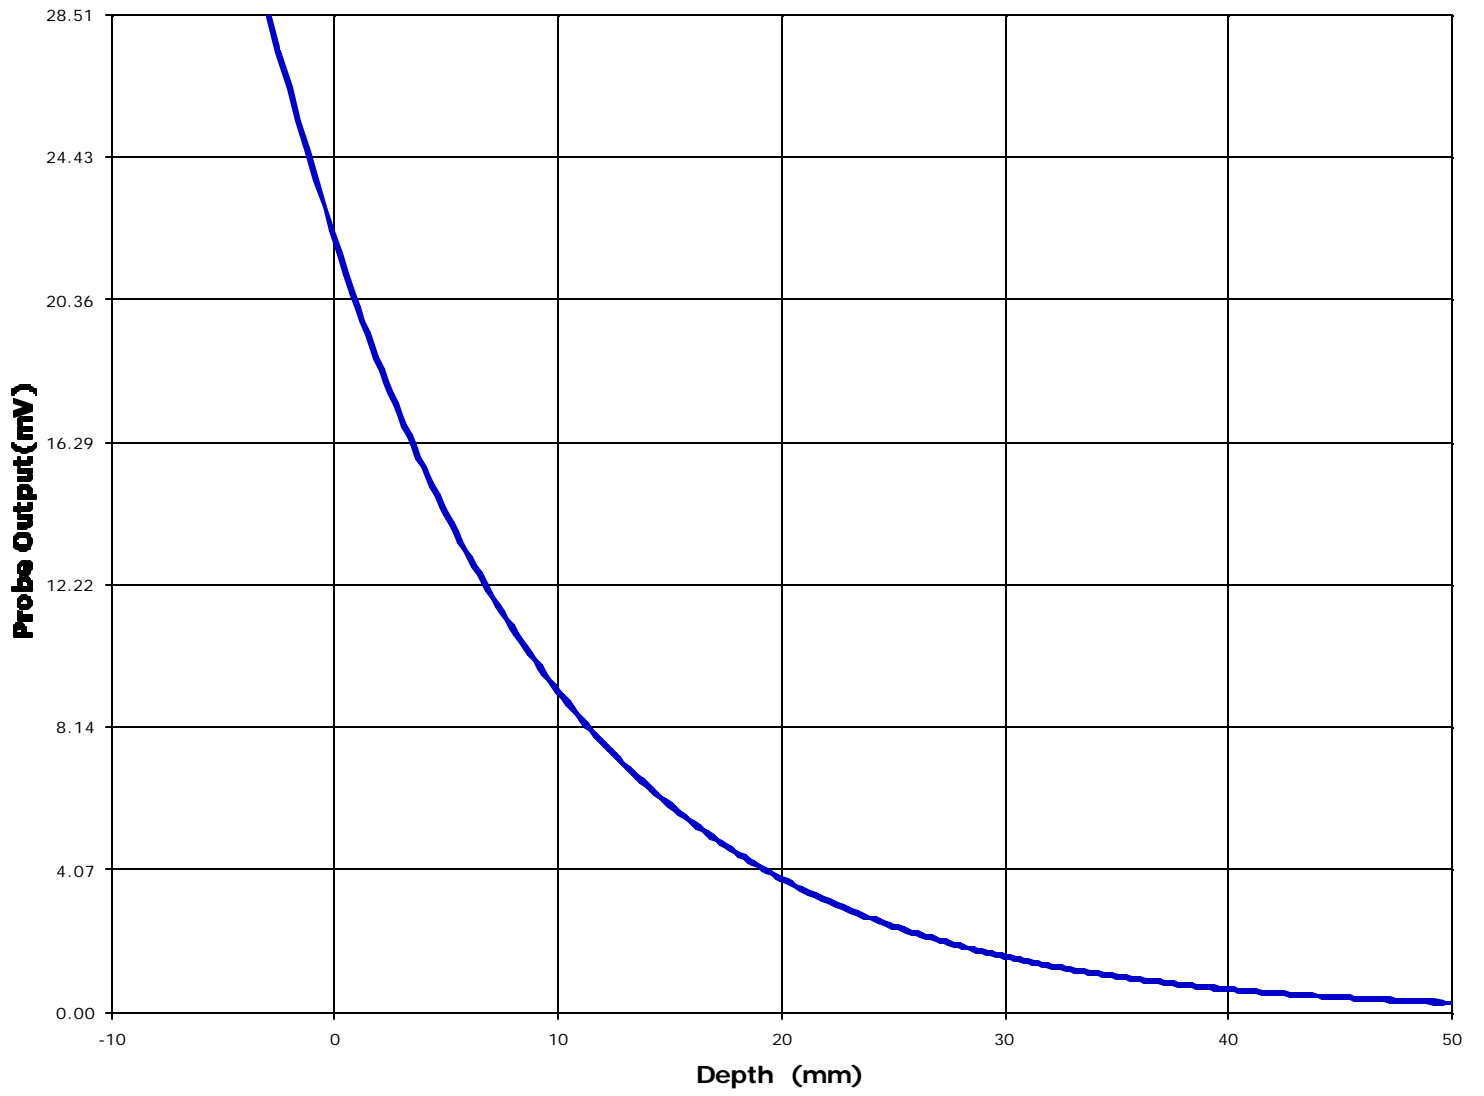

Test Information

Date : 6/7/00  
Time : 5:30:03 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------



Location of Maximum Field :


X = 5                      Y = 115


Measured Values (mV) :


24.67	22.04	19.76	18.22	16.65	15.37
14.25	13.08	12.16	11.32	10.42	

<u>Peak Voltage (mV)</u>	: 31.25	<u>1 Cm Voltage (mV)</u>	: 13.21	<u>SAR (W/Kg)</u>	: 1.45
--------------------------	---------	--------------------------	---------	-------------------	--------

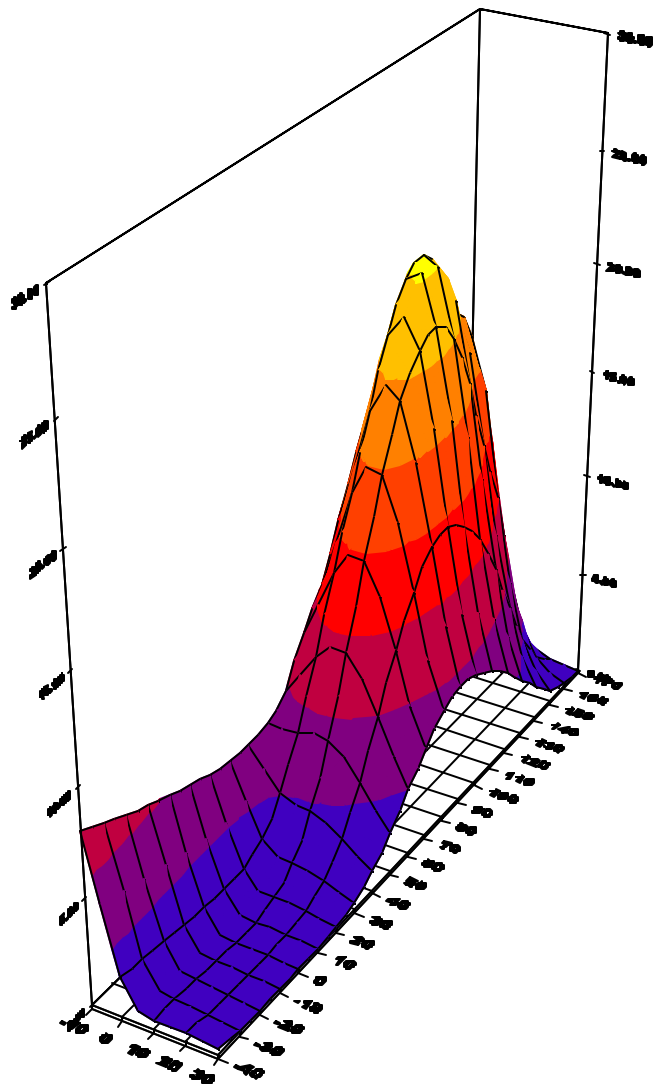


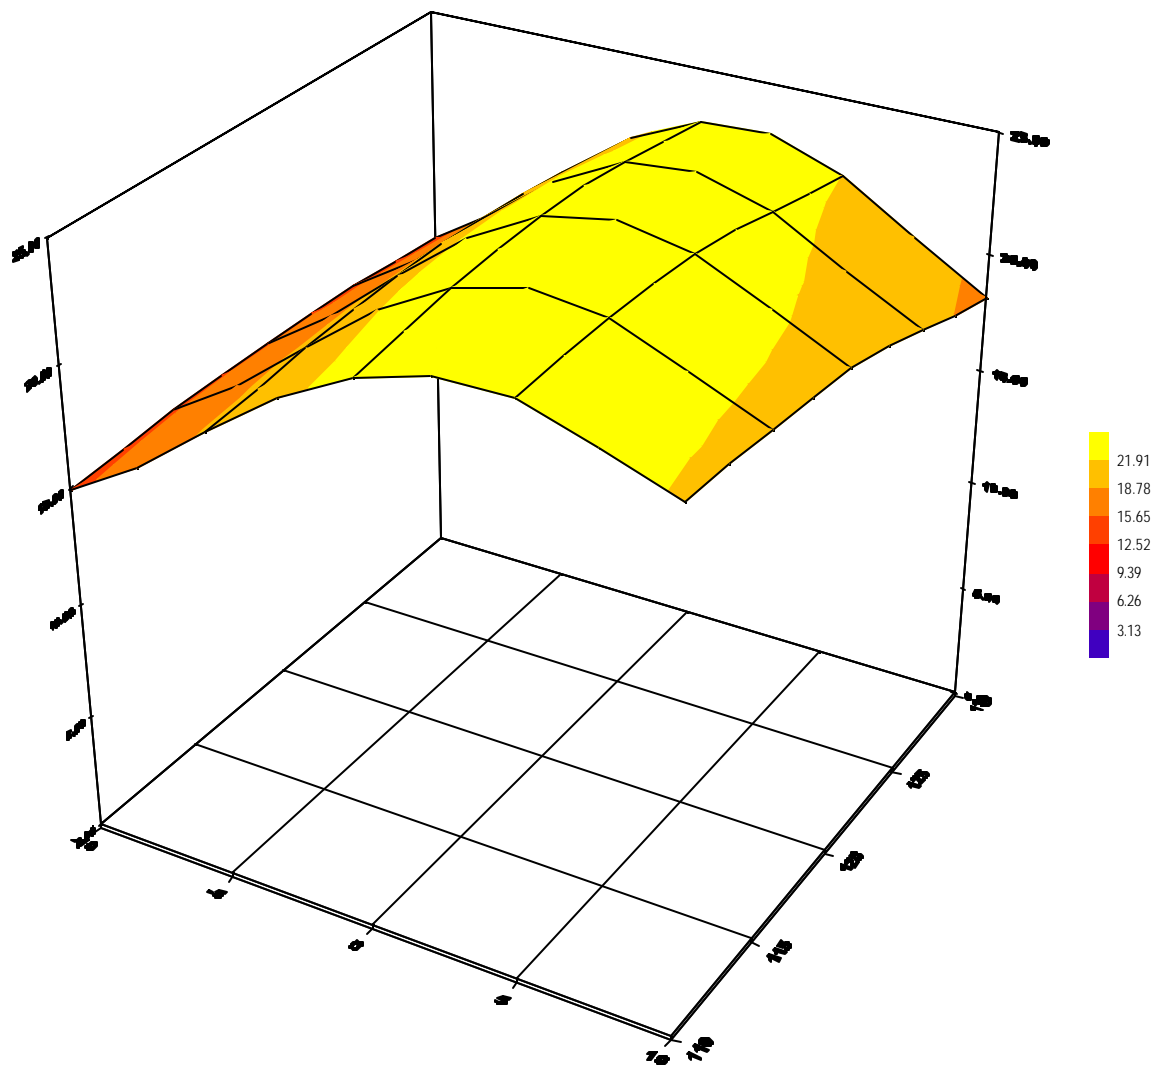


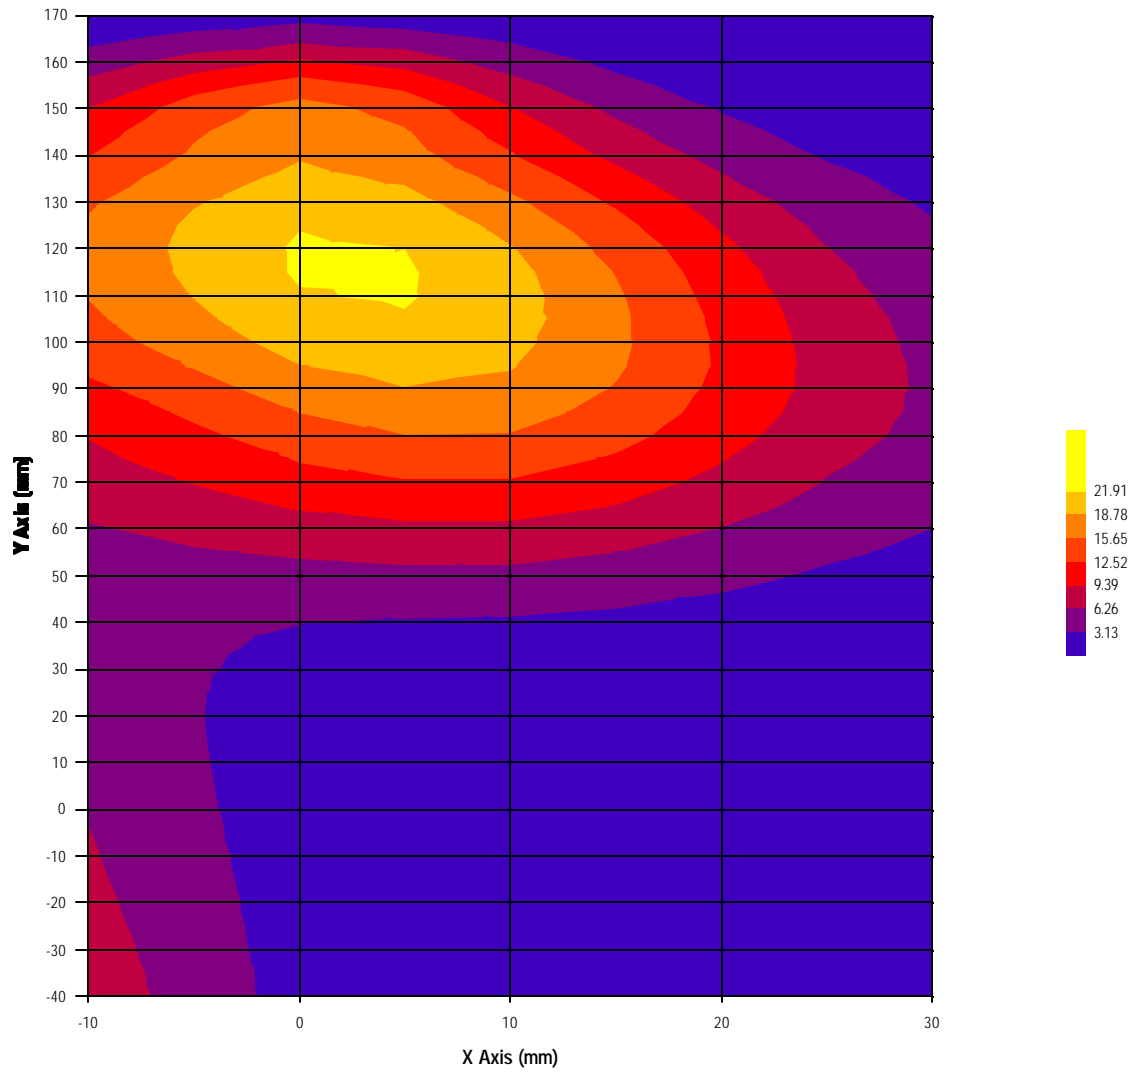

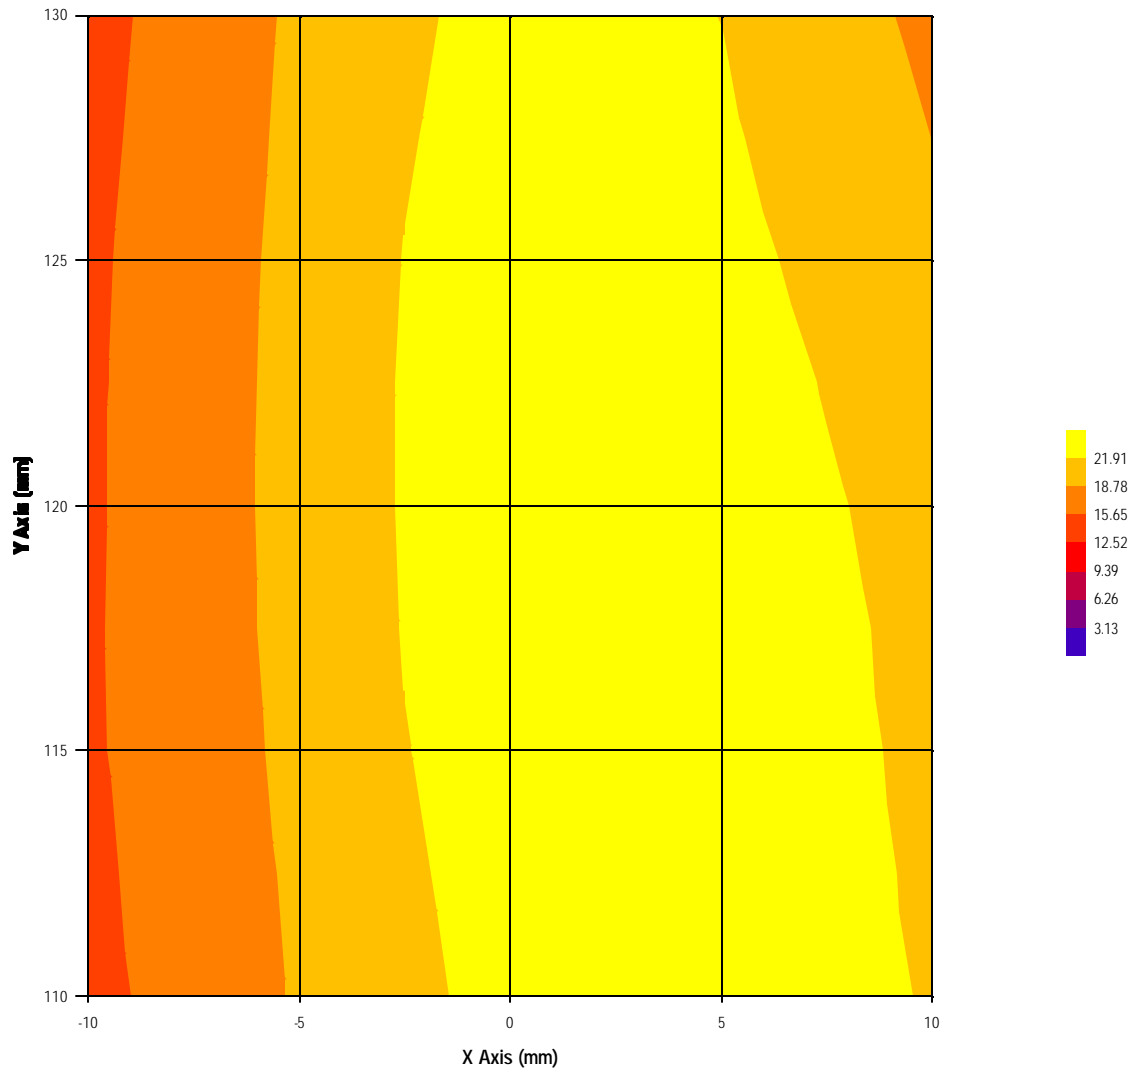



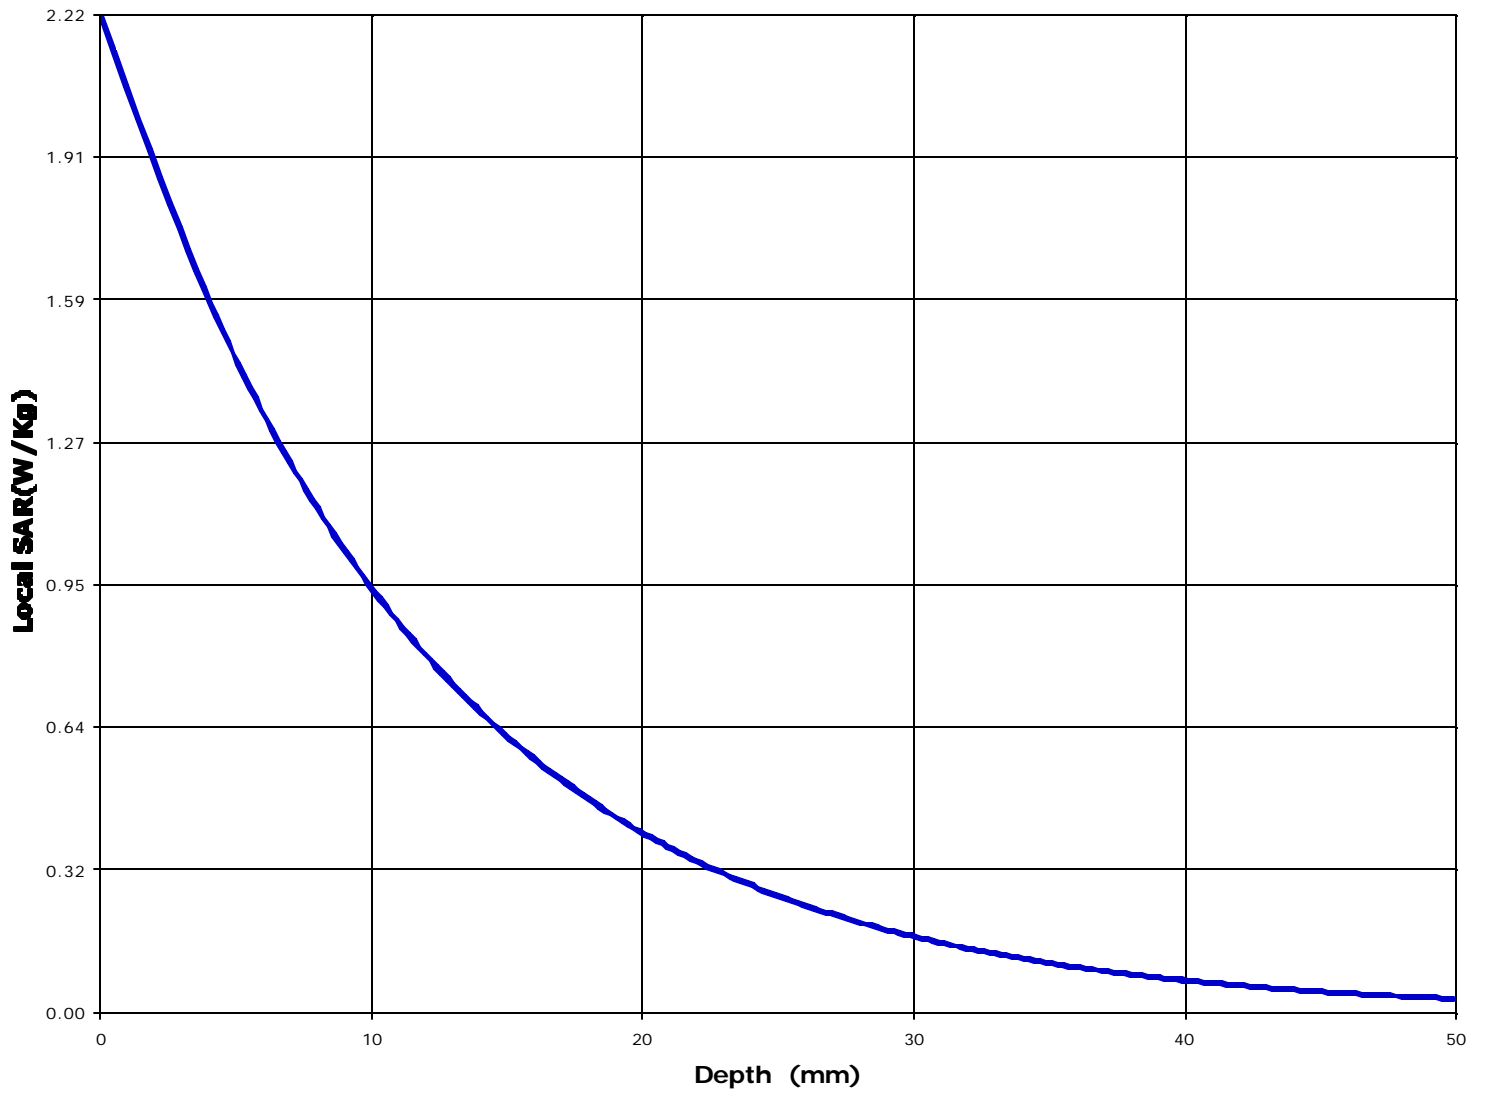

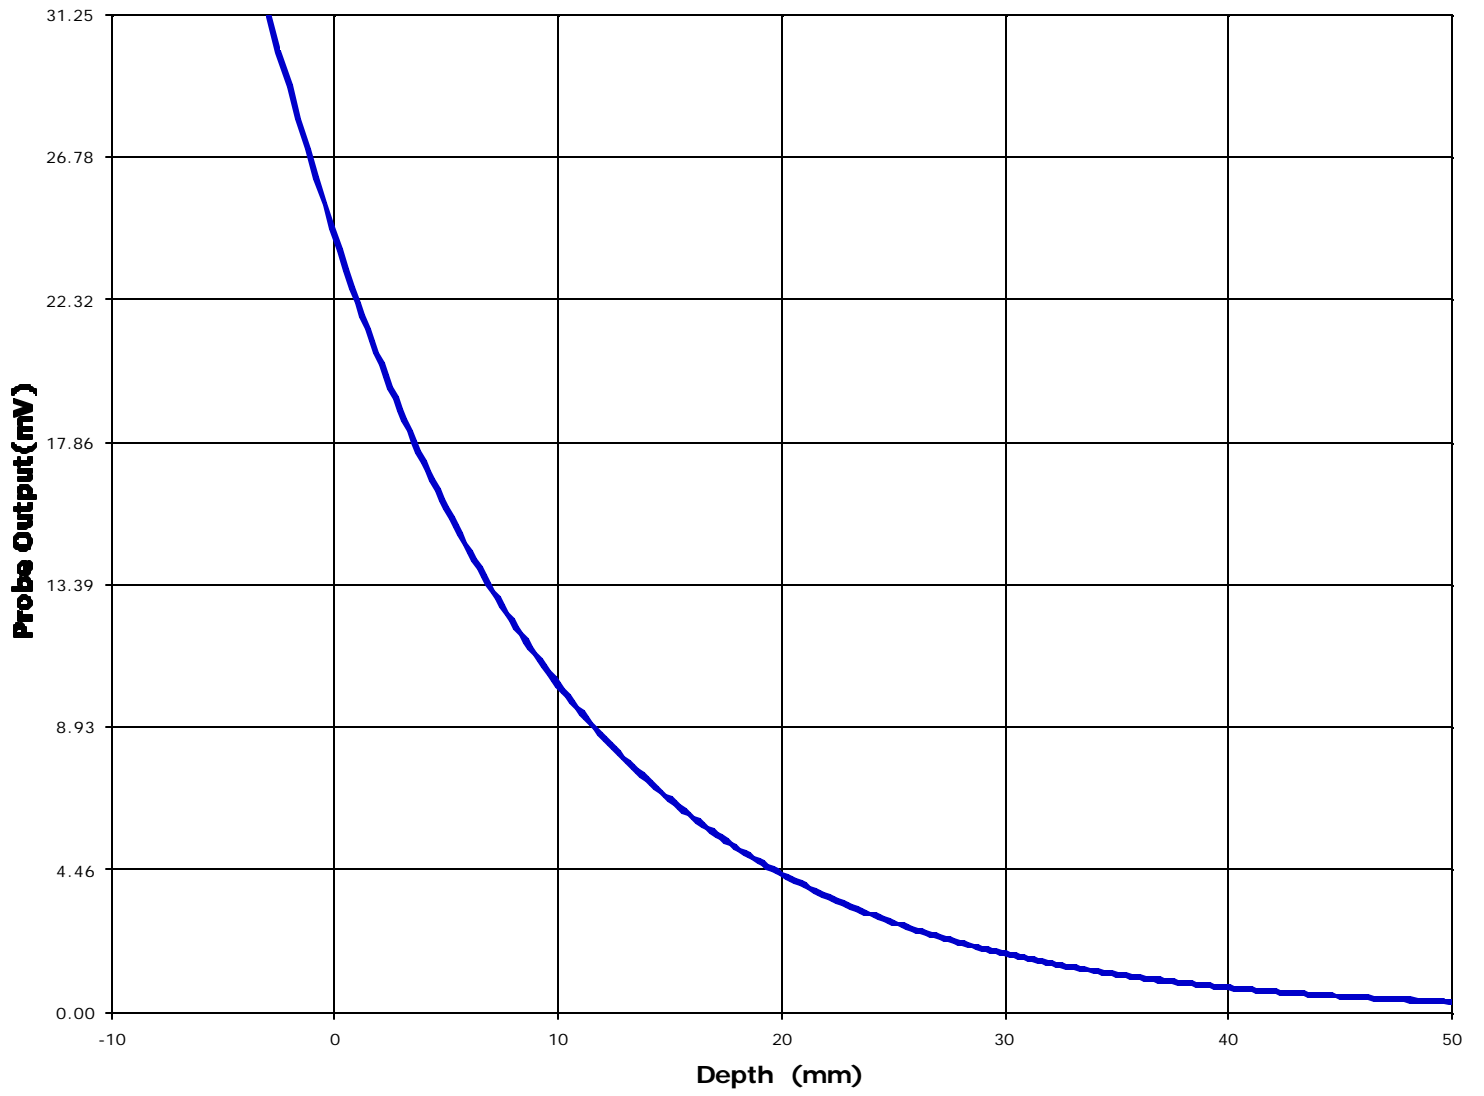

Test Information

Date : 6/7/00  
Time : 5:55:54 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 10                      Y = 110


Measured Values (mV) :


24.33	21.88	19.73	18.06	16.68	15.33
14.18	13.02	12.05	11.18	10.41	

<u>Peak Voltage (mV)</u>	: 30.89	<u>1 Cm Voltage (mV)</u>	: 13.16	<u>SAR (W/Kg)</u>	: 1.45
--------------------------	---------	--------------------------	---------	-------------------	--------

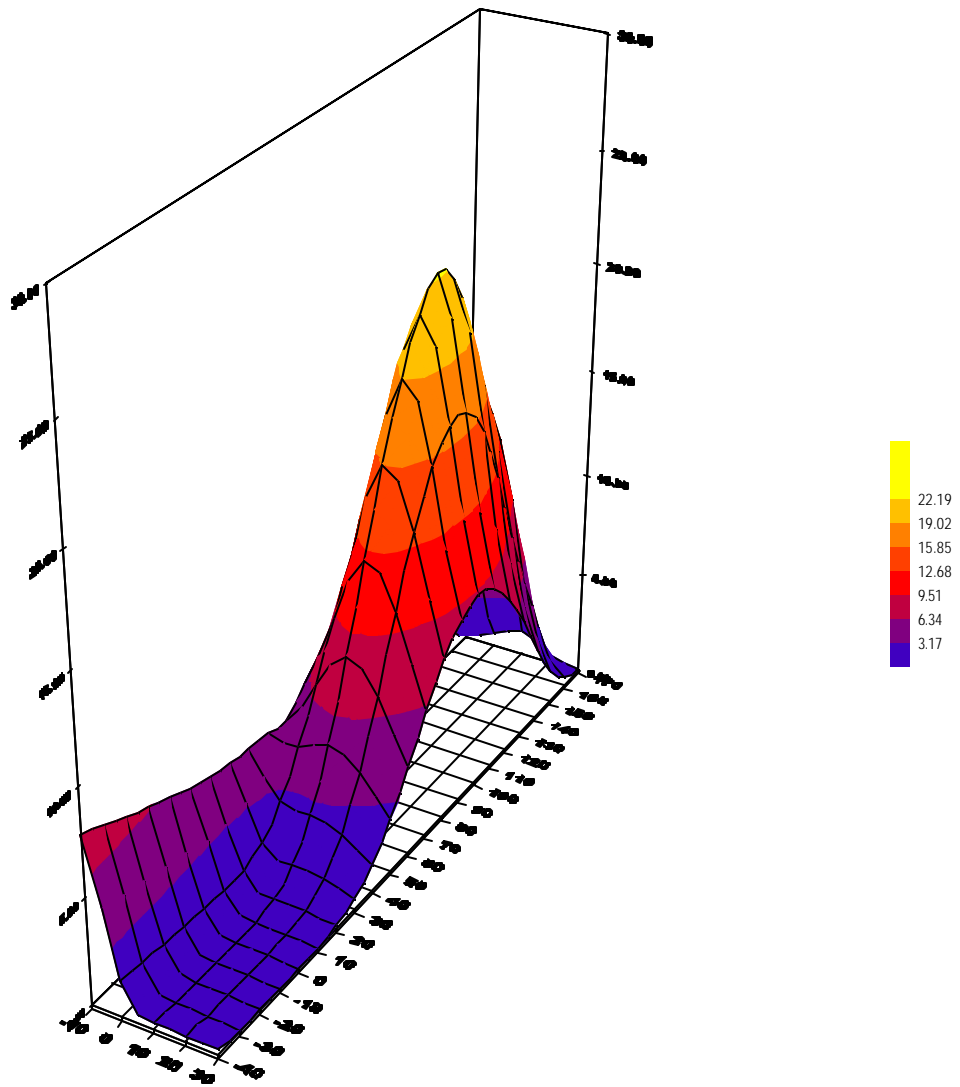


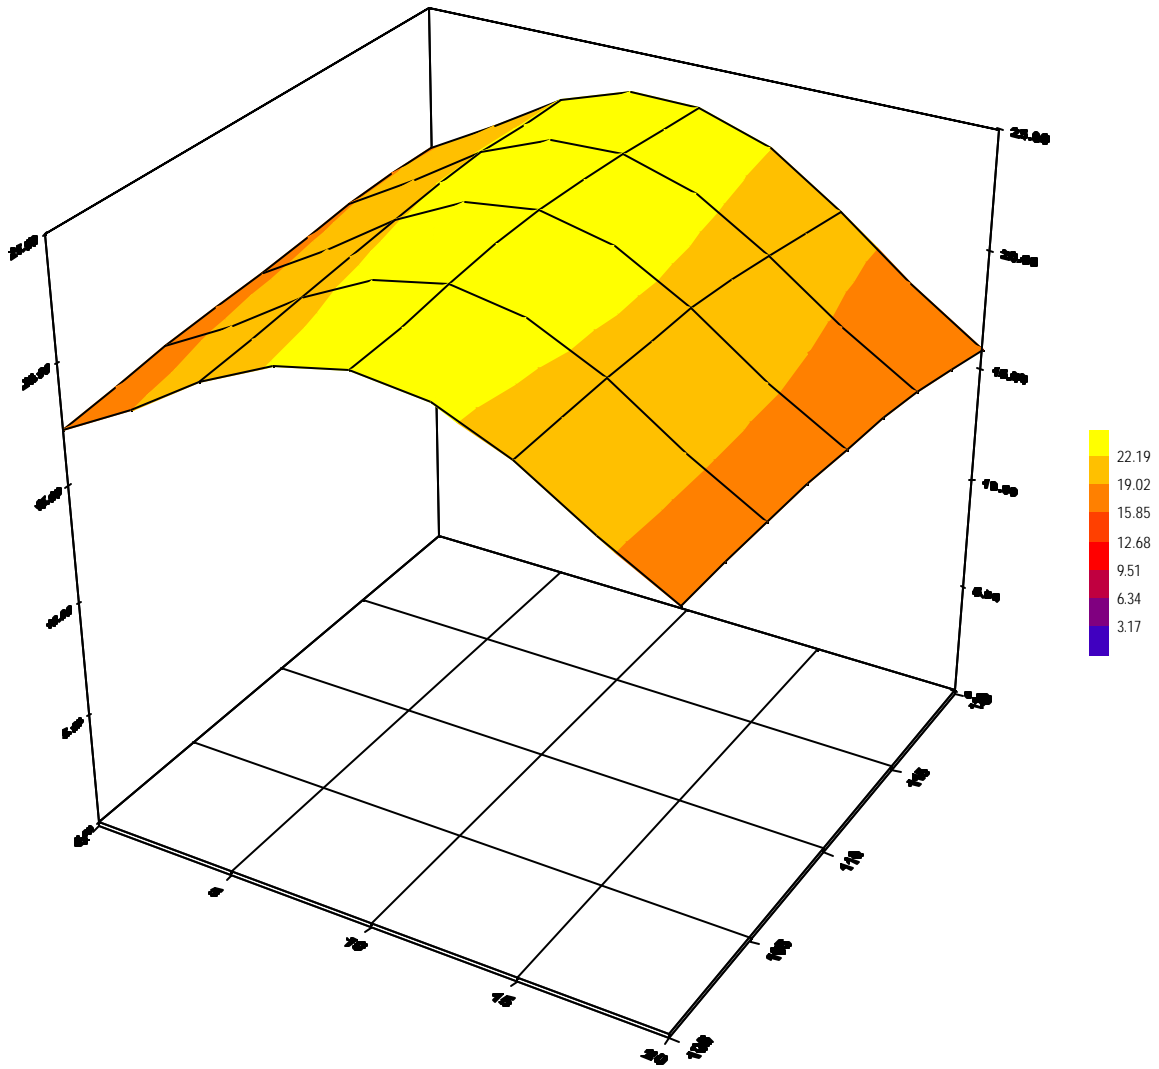


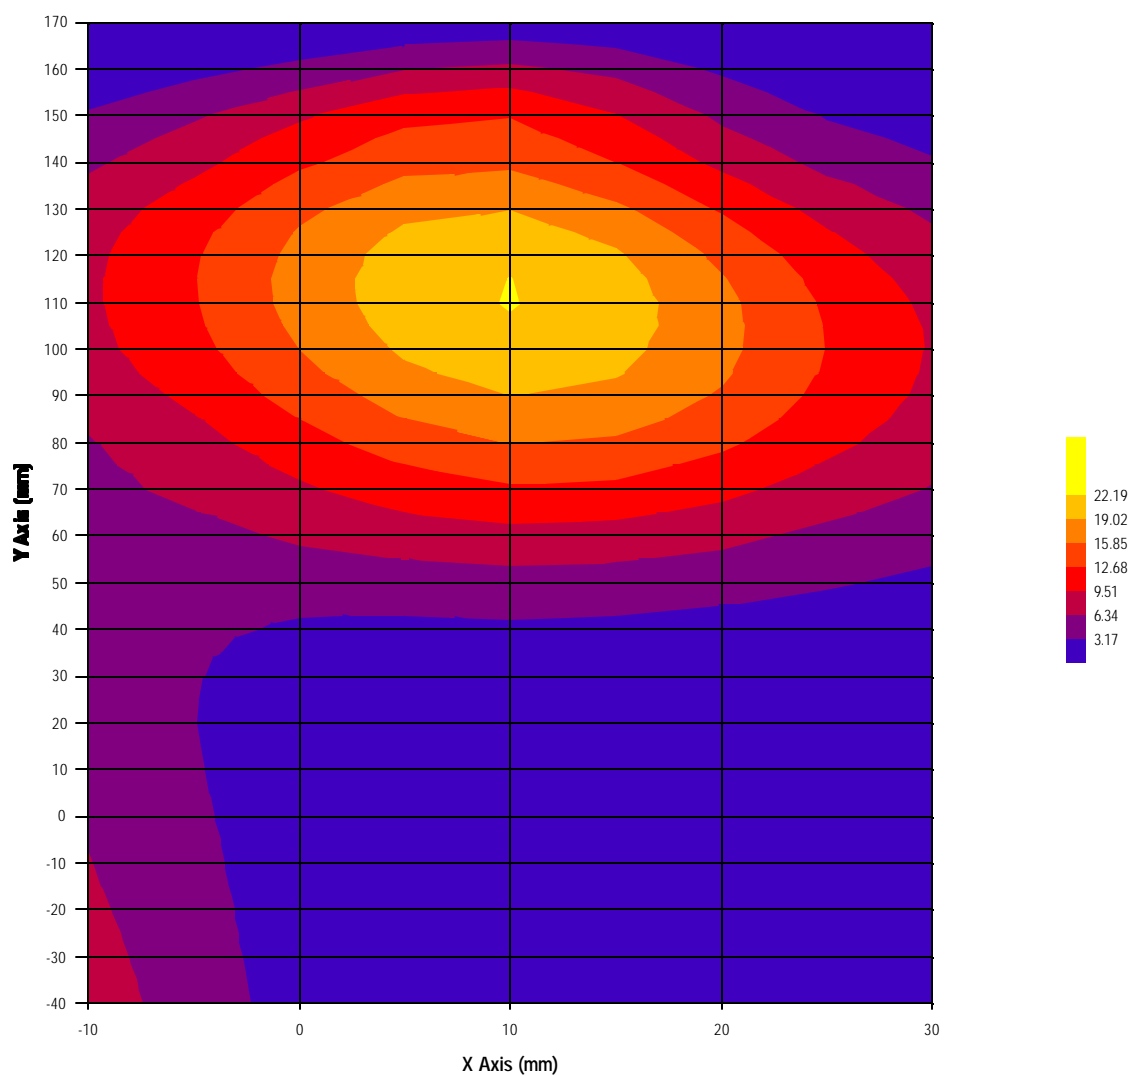

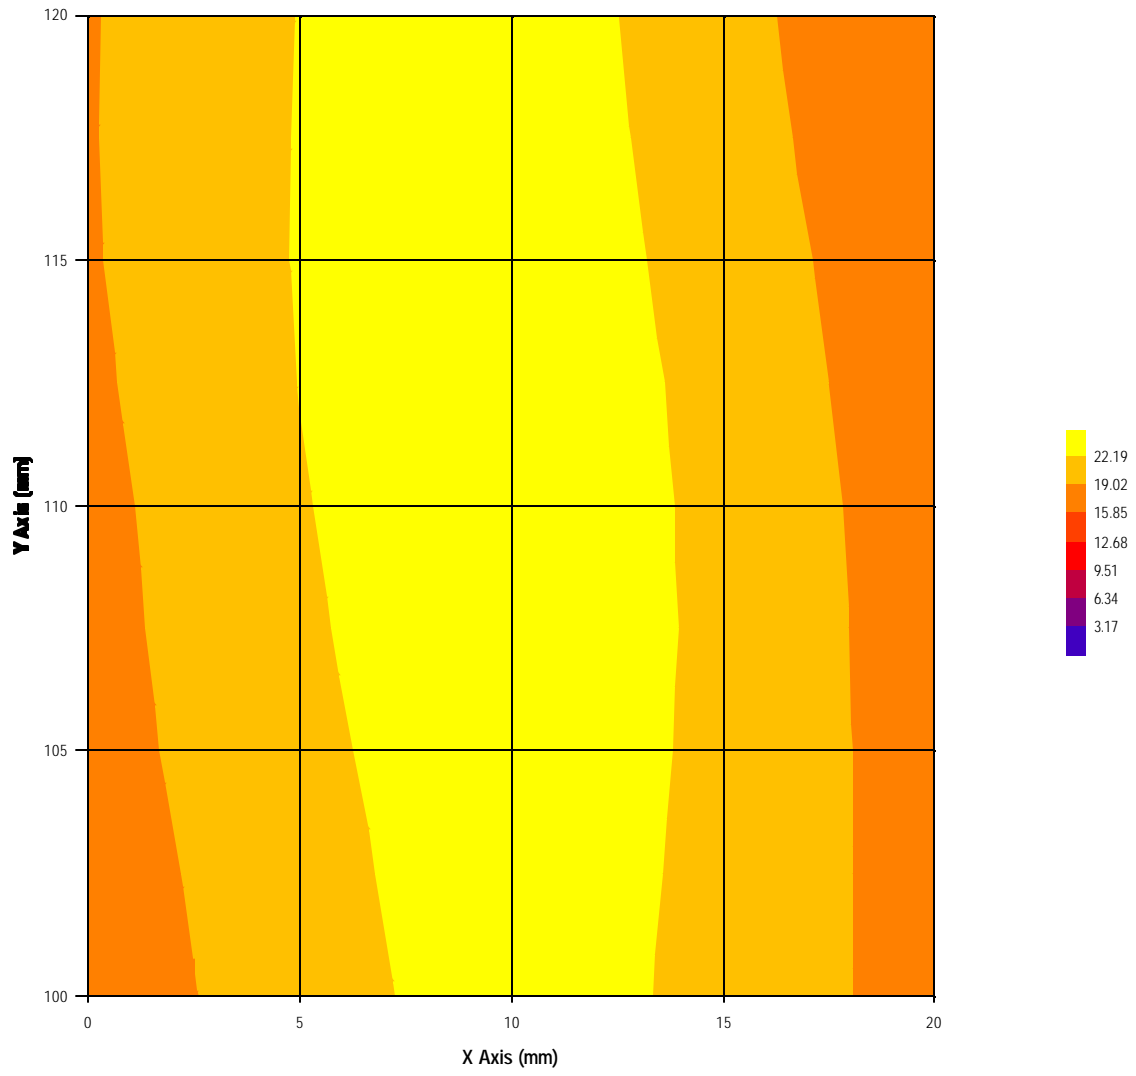



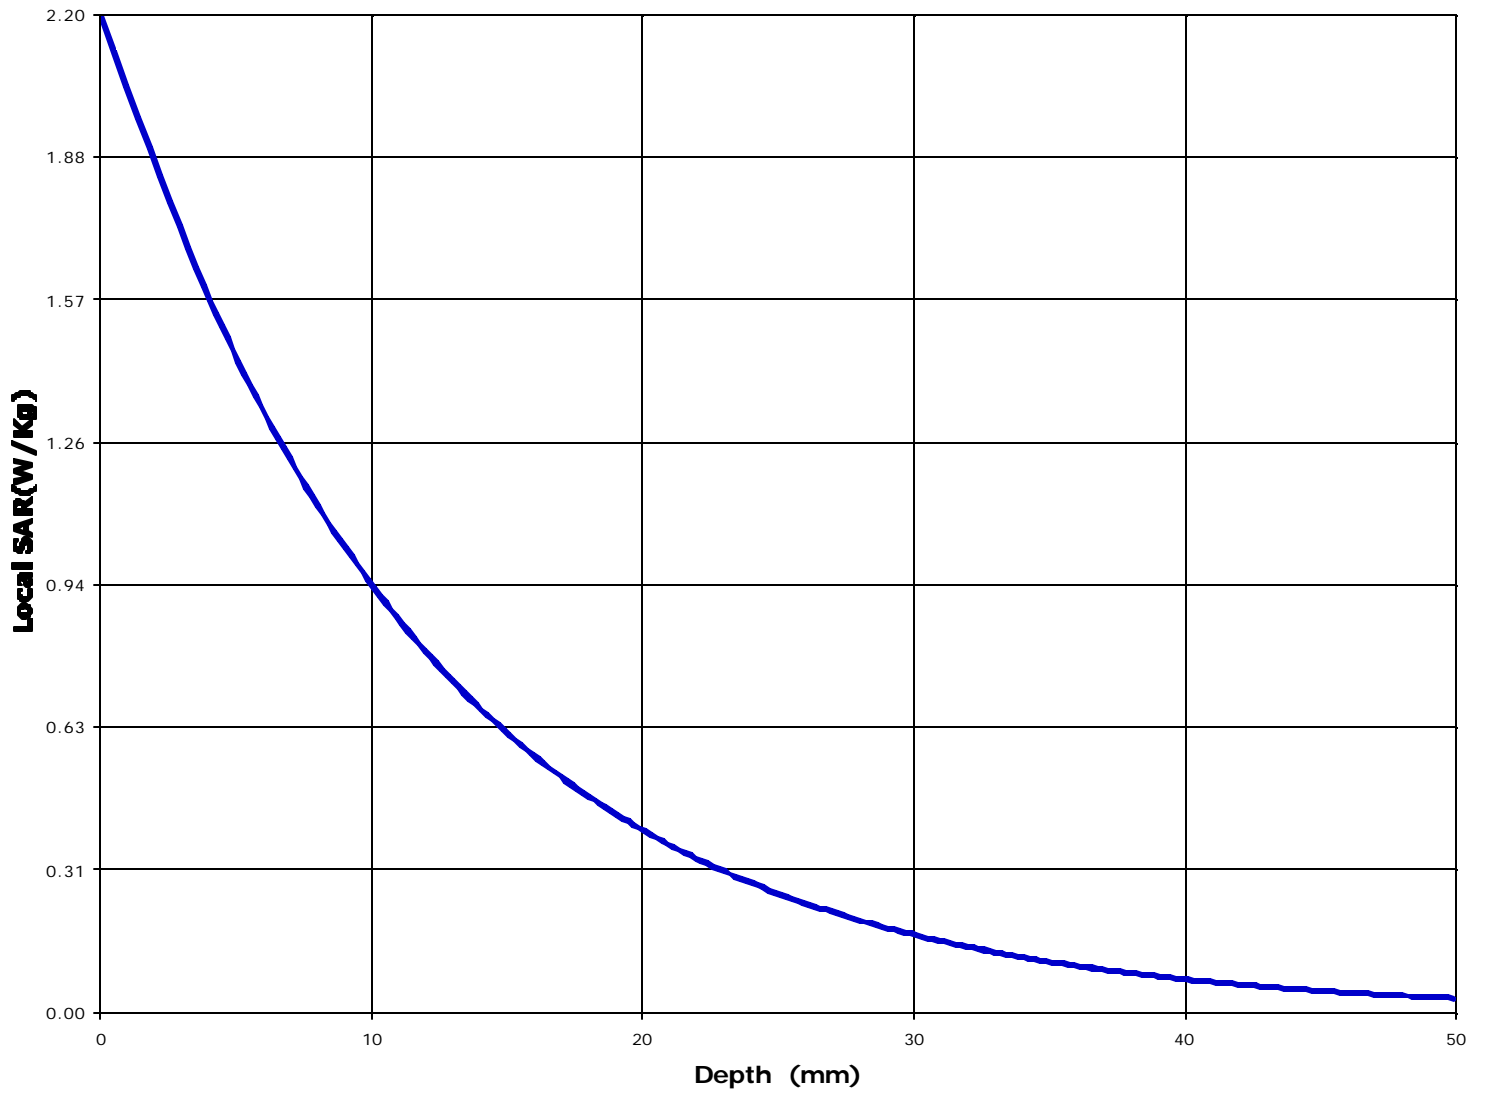

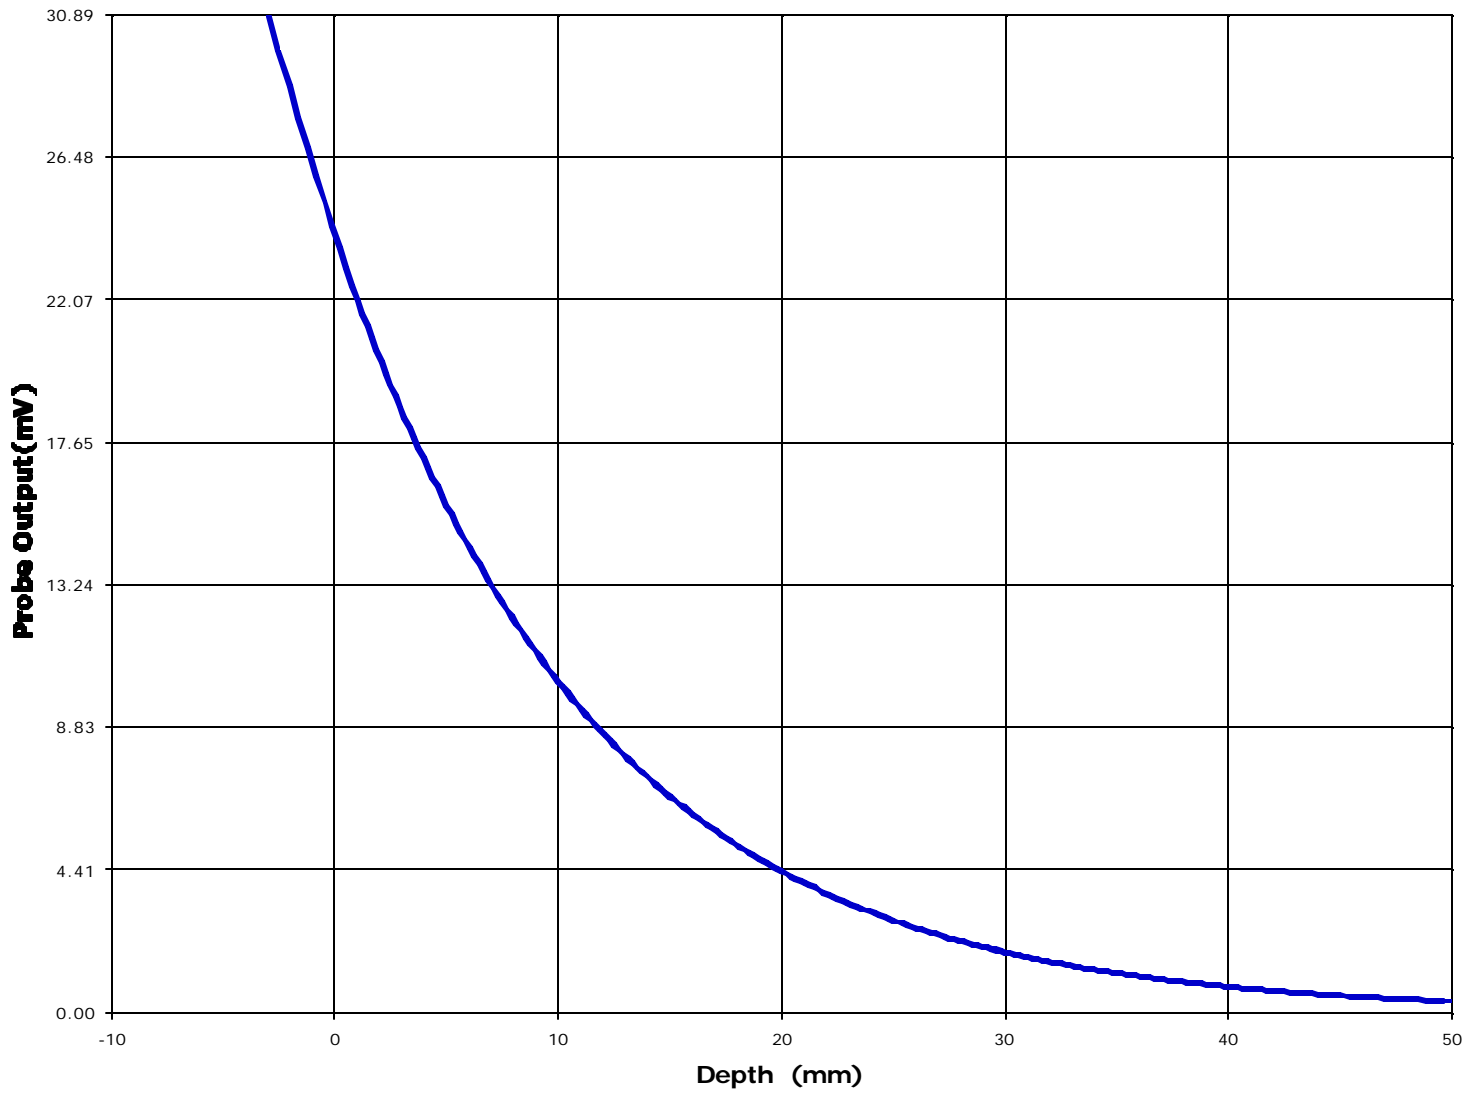

## **ANNEX B: Waist with retractable antenna fully extended SAR MEASUREMENT**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ELT-002Q**  
**June 12, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 6/8/00  
Time : 10:19:01 AM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.6 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.7 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------


Location of Maximum Field :


X = -5                      Y = 25


Measured Values (mV) :


4.92	4.46	4.07	3.78	3.46	3.25
2.99	2.77	2.60	2.41	2.26	

<u>Peak Voltage (mV)</u>	: 6.18	<u>1 Cm Voltage (mV)</u>	: 2.76	<u>SAR (W/Kg)</u>	: 0.32
--------------------------	--------	--------------------------	--------	-------------------	--------

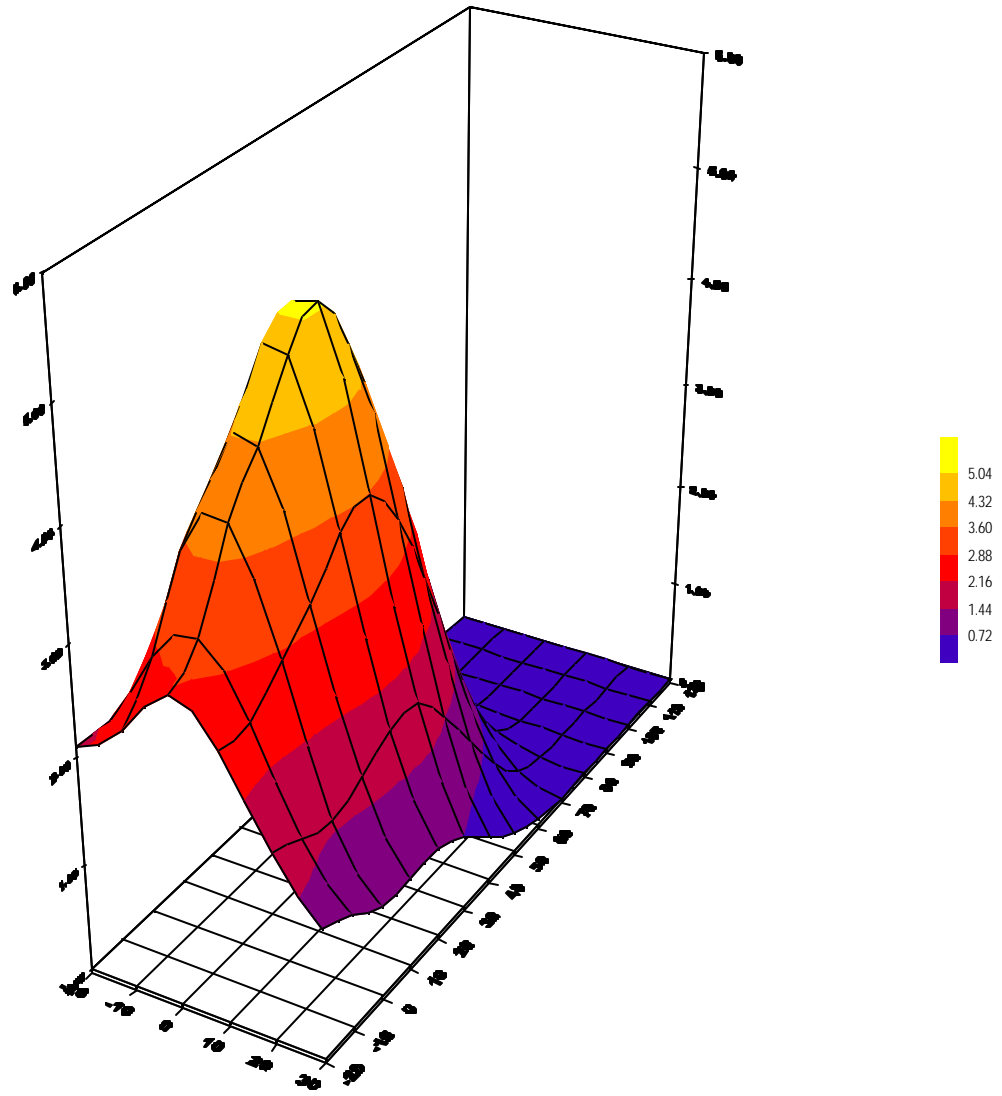


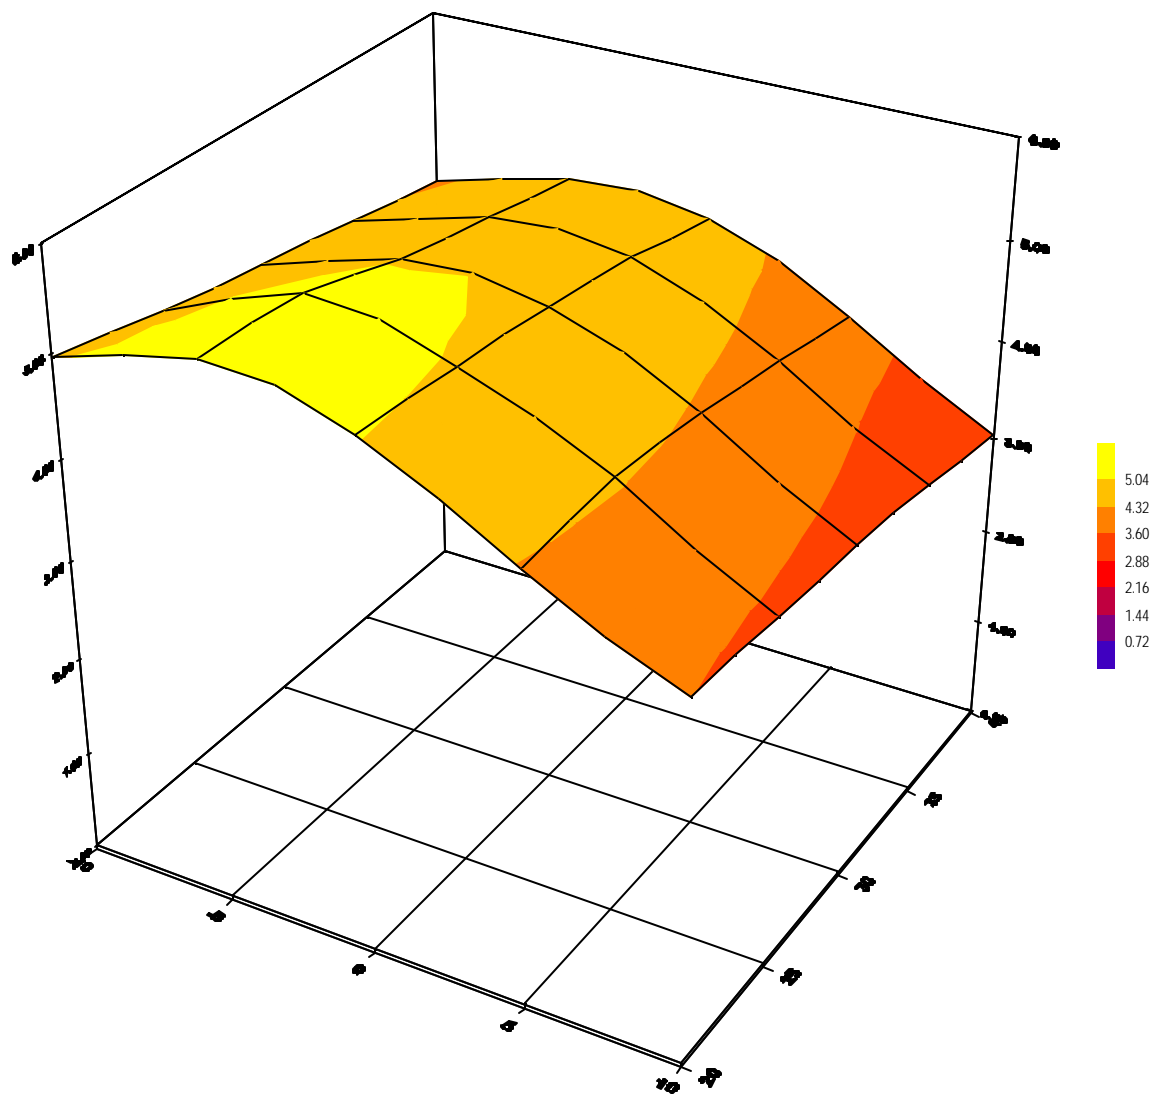


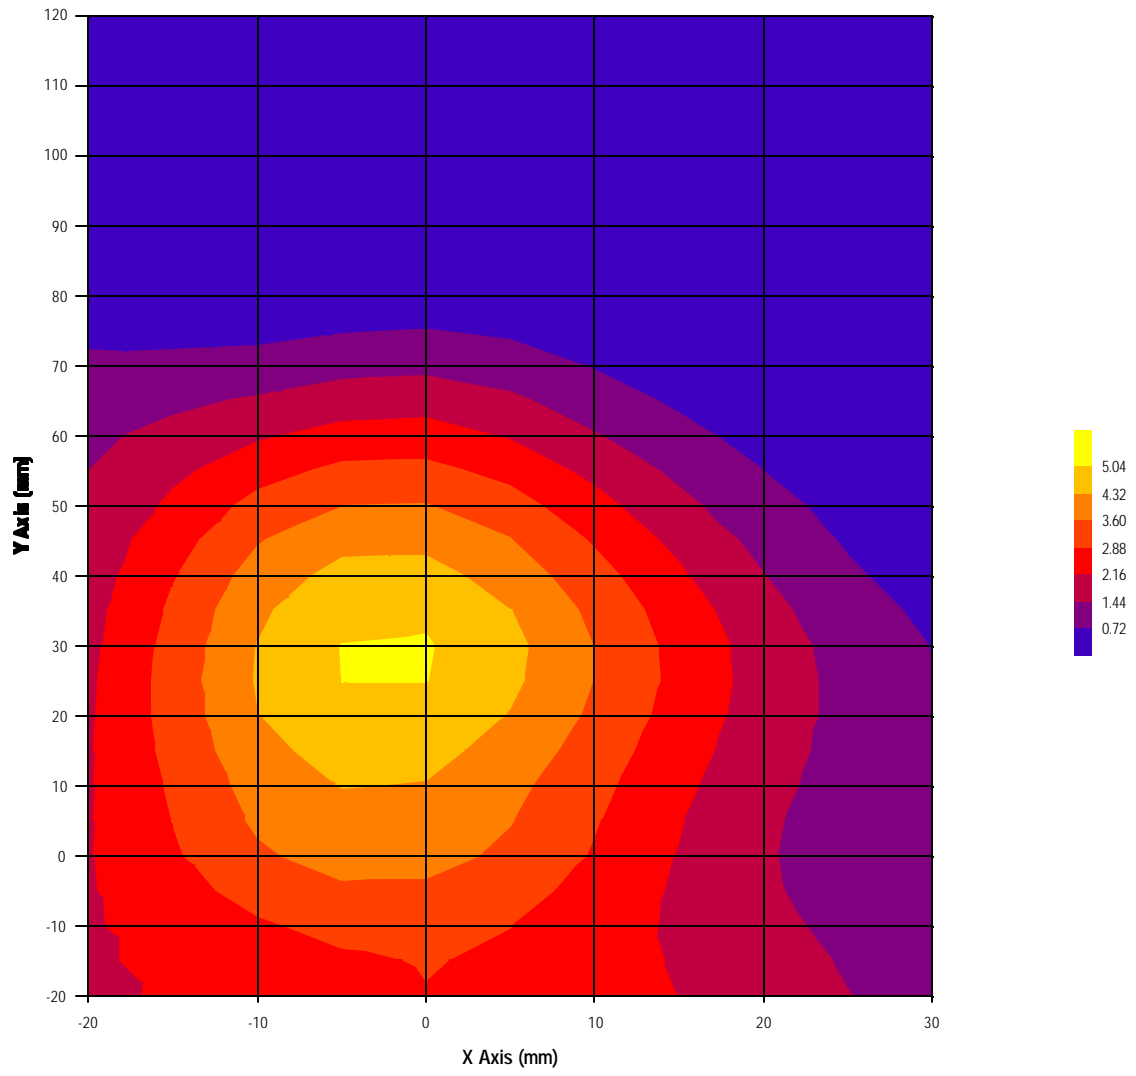

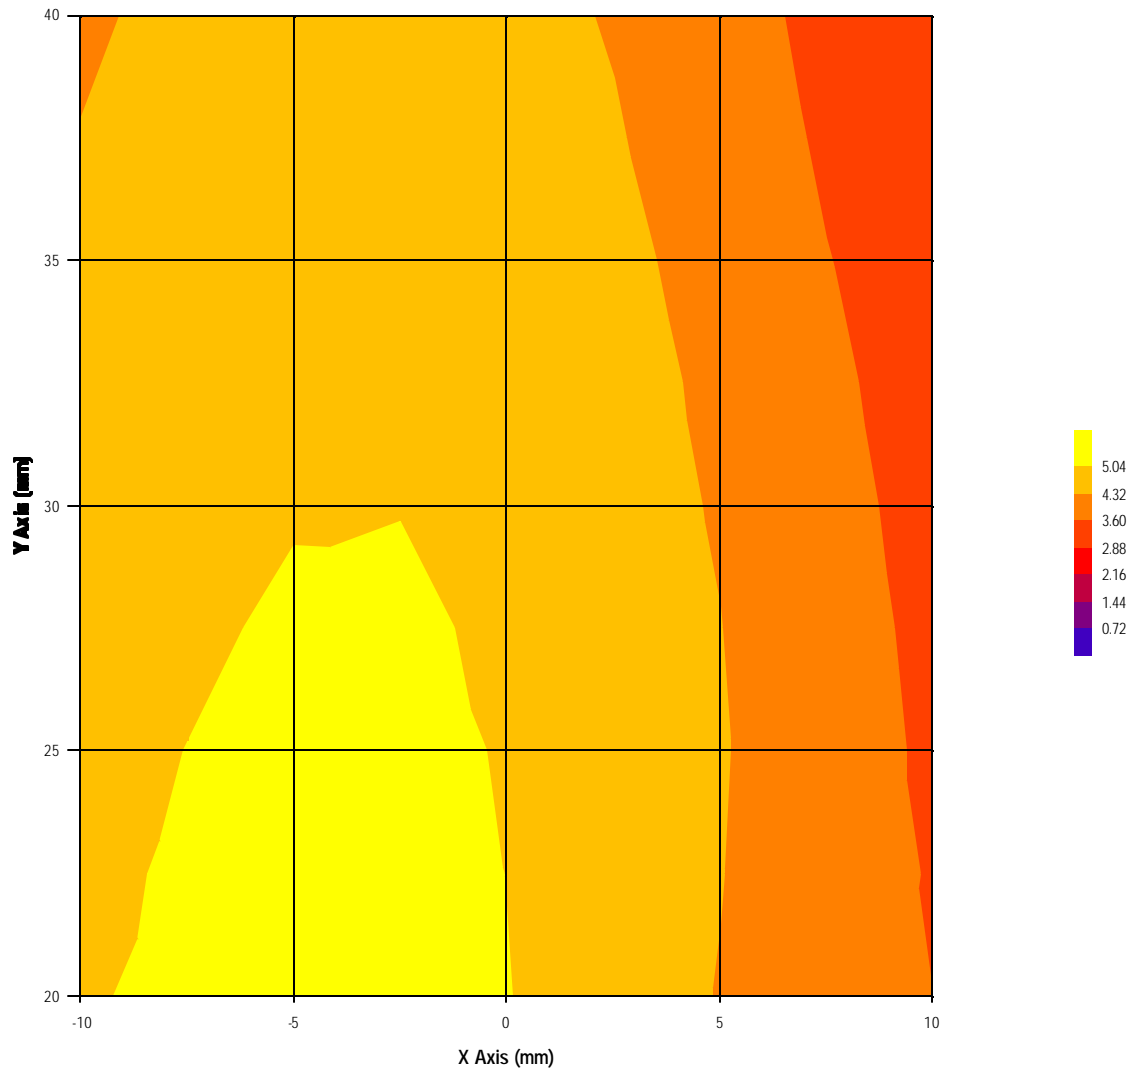



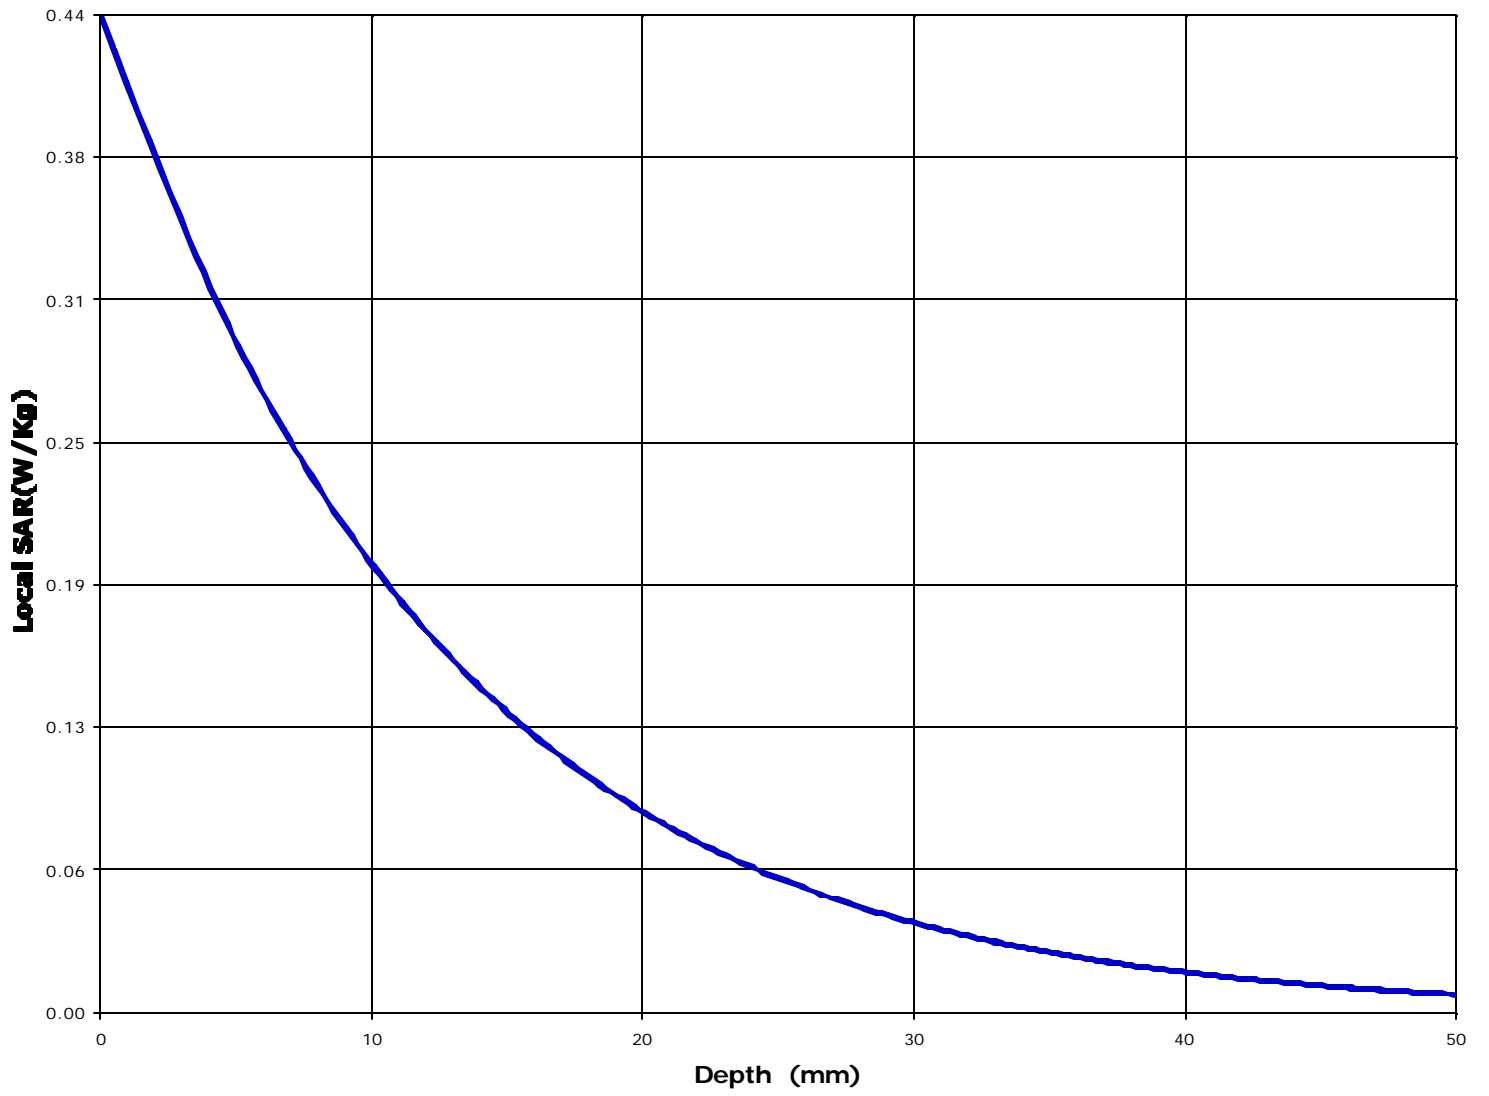

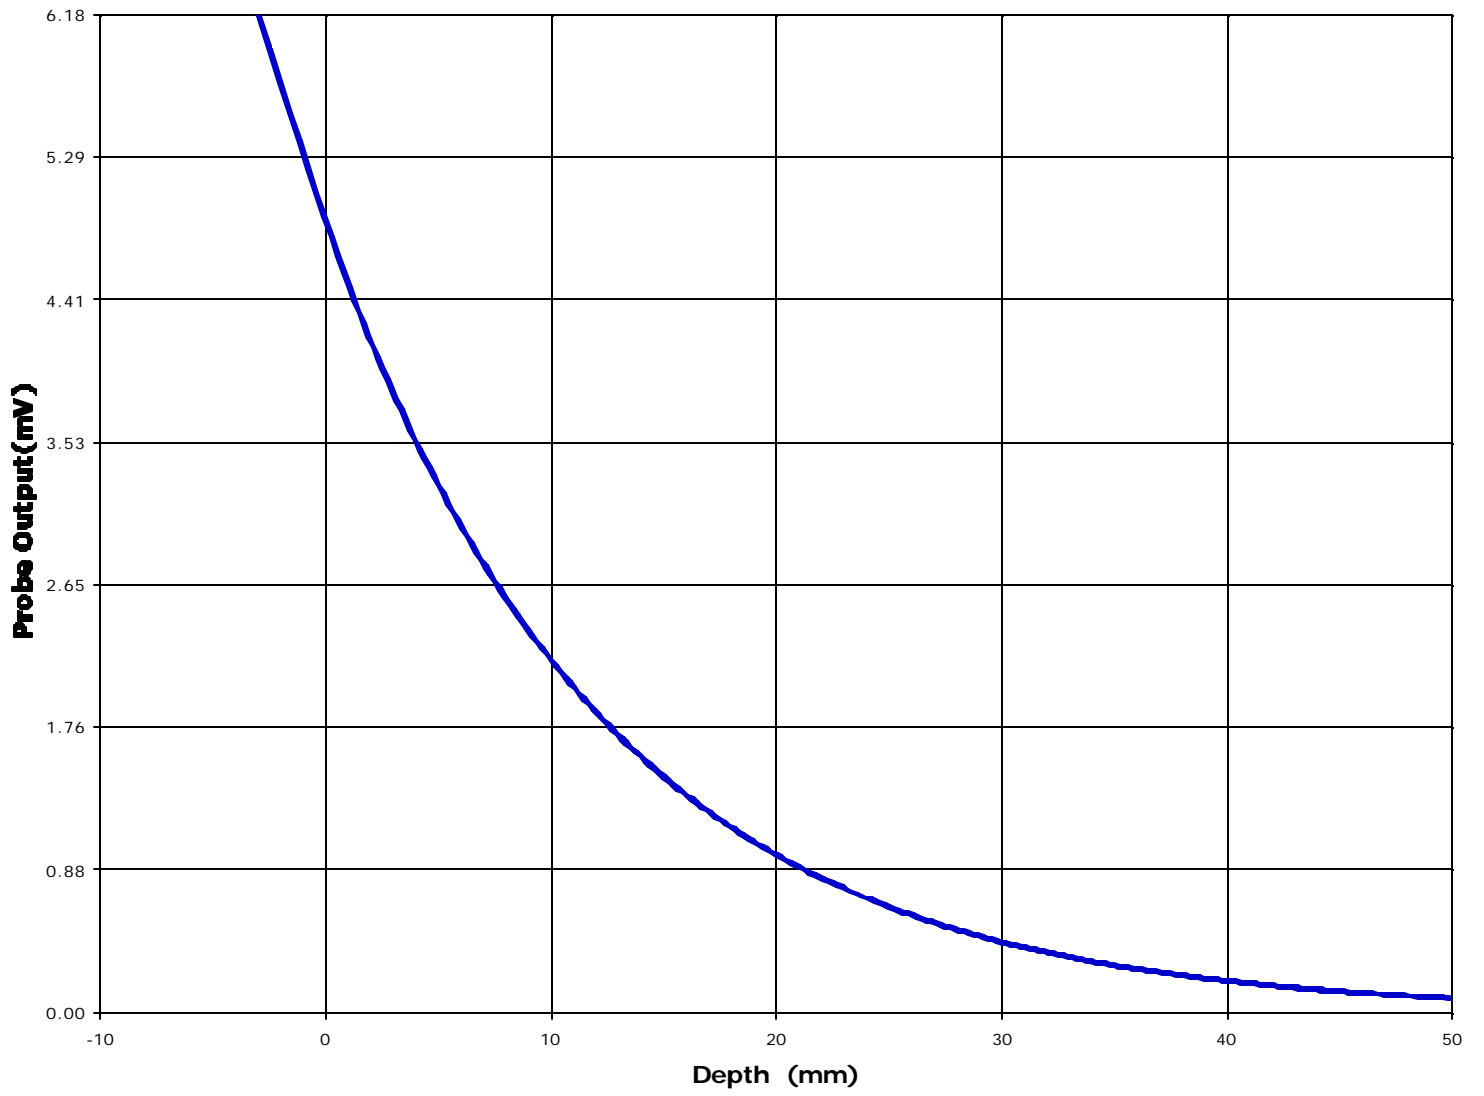

Test Information

Date : 6/8/00  
Time : 9:55:55 AM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.7 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.8 avg

Amplifier Setting :

Channel 1	: .00418	Channel 2	: .00386	Channel 3	: .00299
-----------	----------	-----------	----------	-----------	----------


Location of Maximum Field :


X = -5                      Y = 35


Measured Values (mV) :


5.98	5.48	4.93	4.52	4.16	3.95
3.66	3.36	3.13	2.93	2.69	


<u>Peak Voltage (mV)</u>	: 7.54	<u>1 Cm Voltage (mV)</u>	: 3.36	<u>SAR (W/Kg)</u>	: 0.35
--------------------------	--------	--------------------------	--------	-------------------	--------

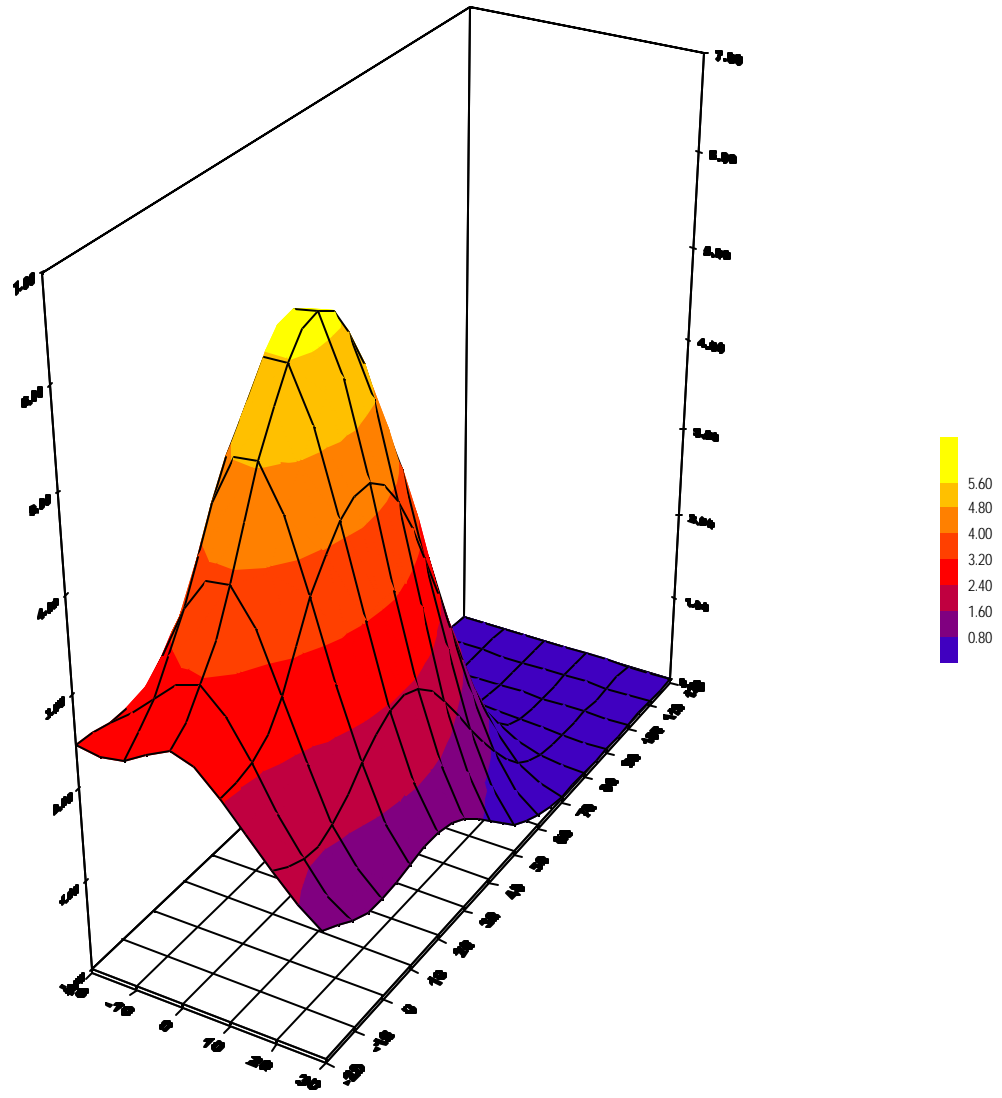

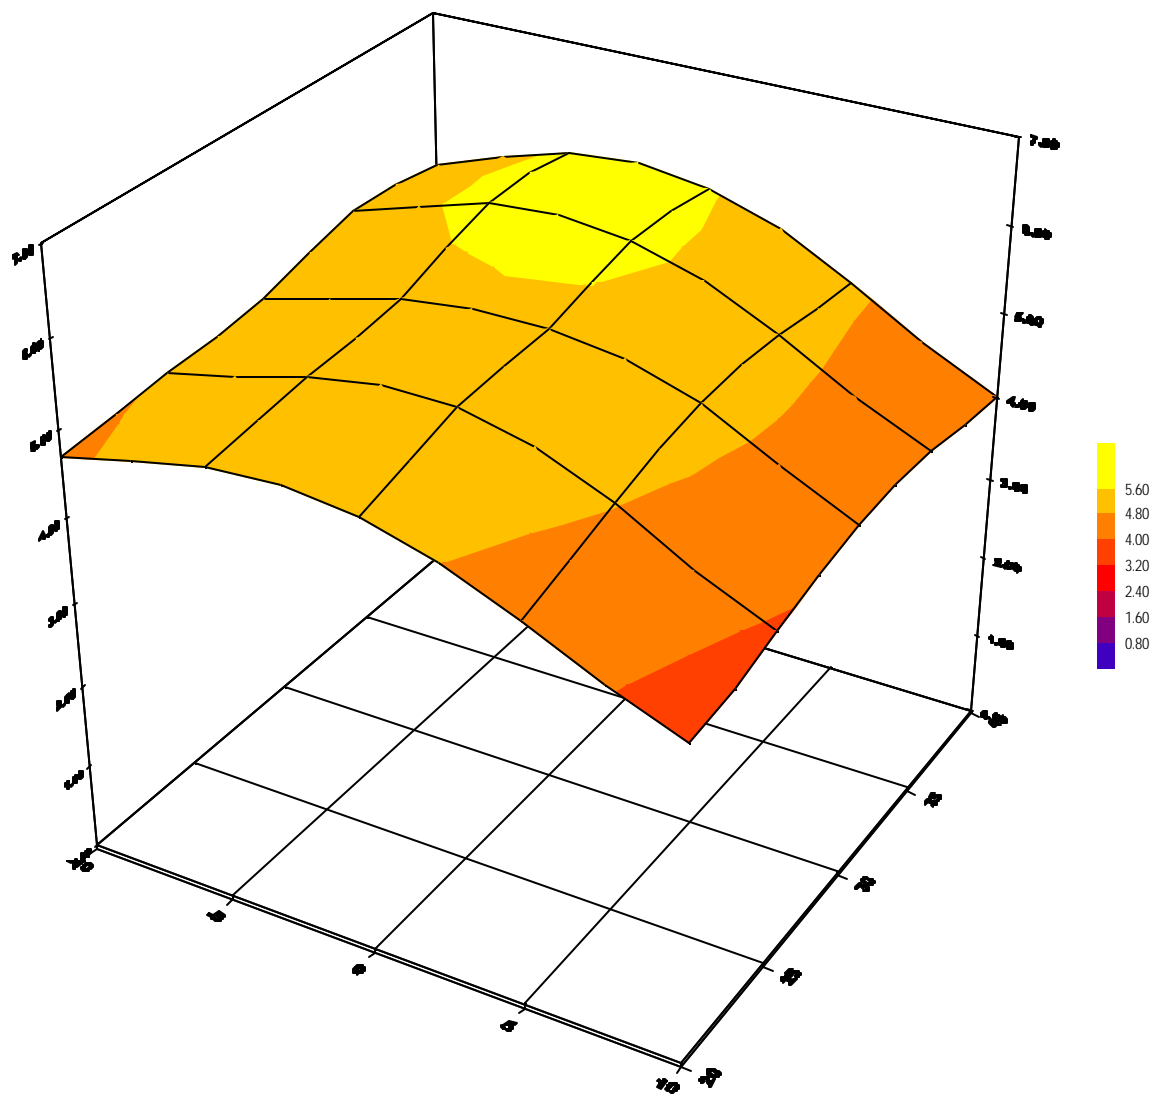


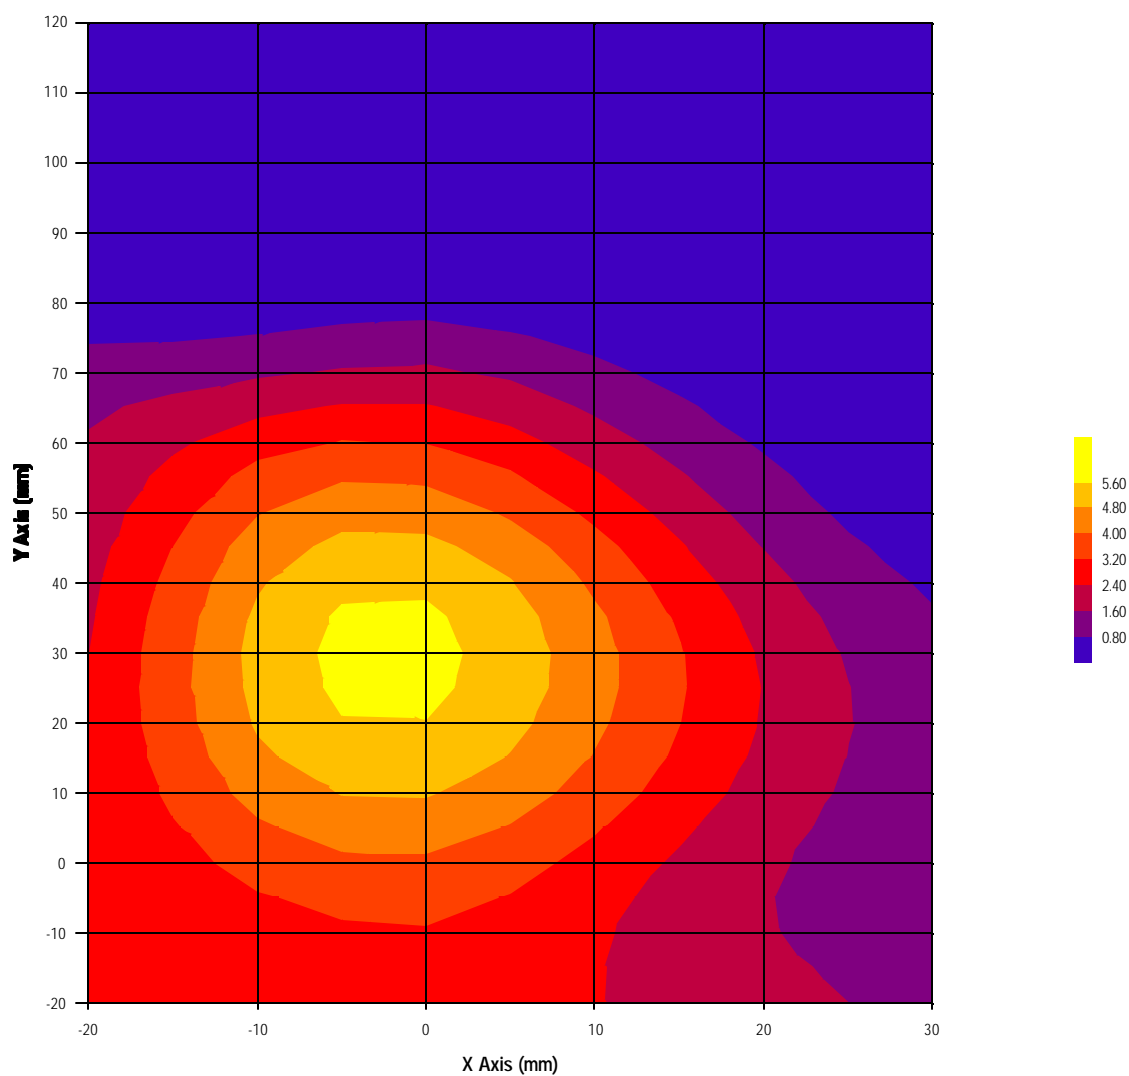

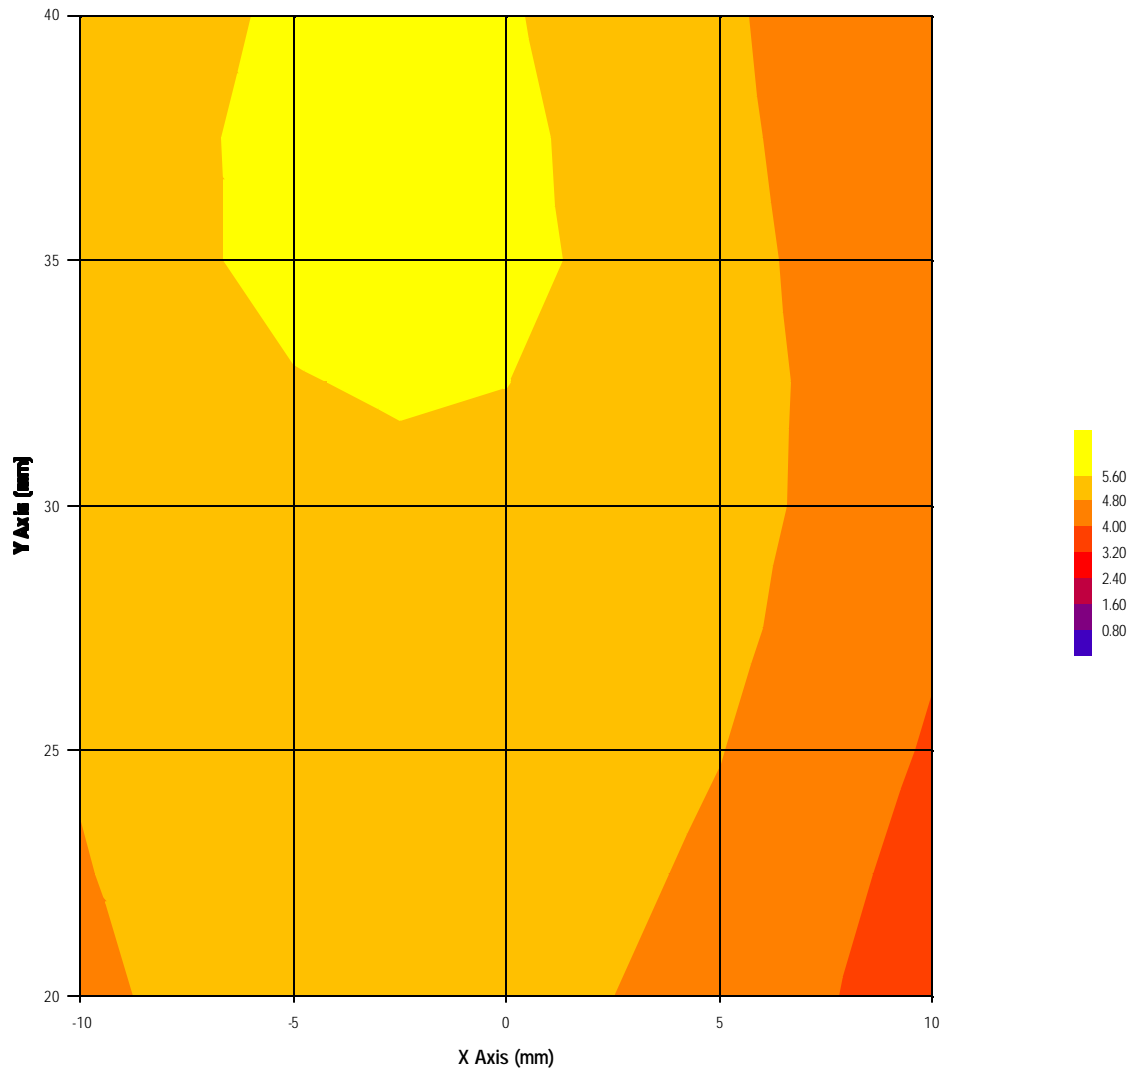

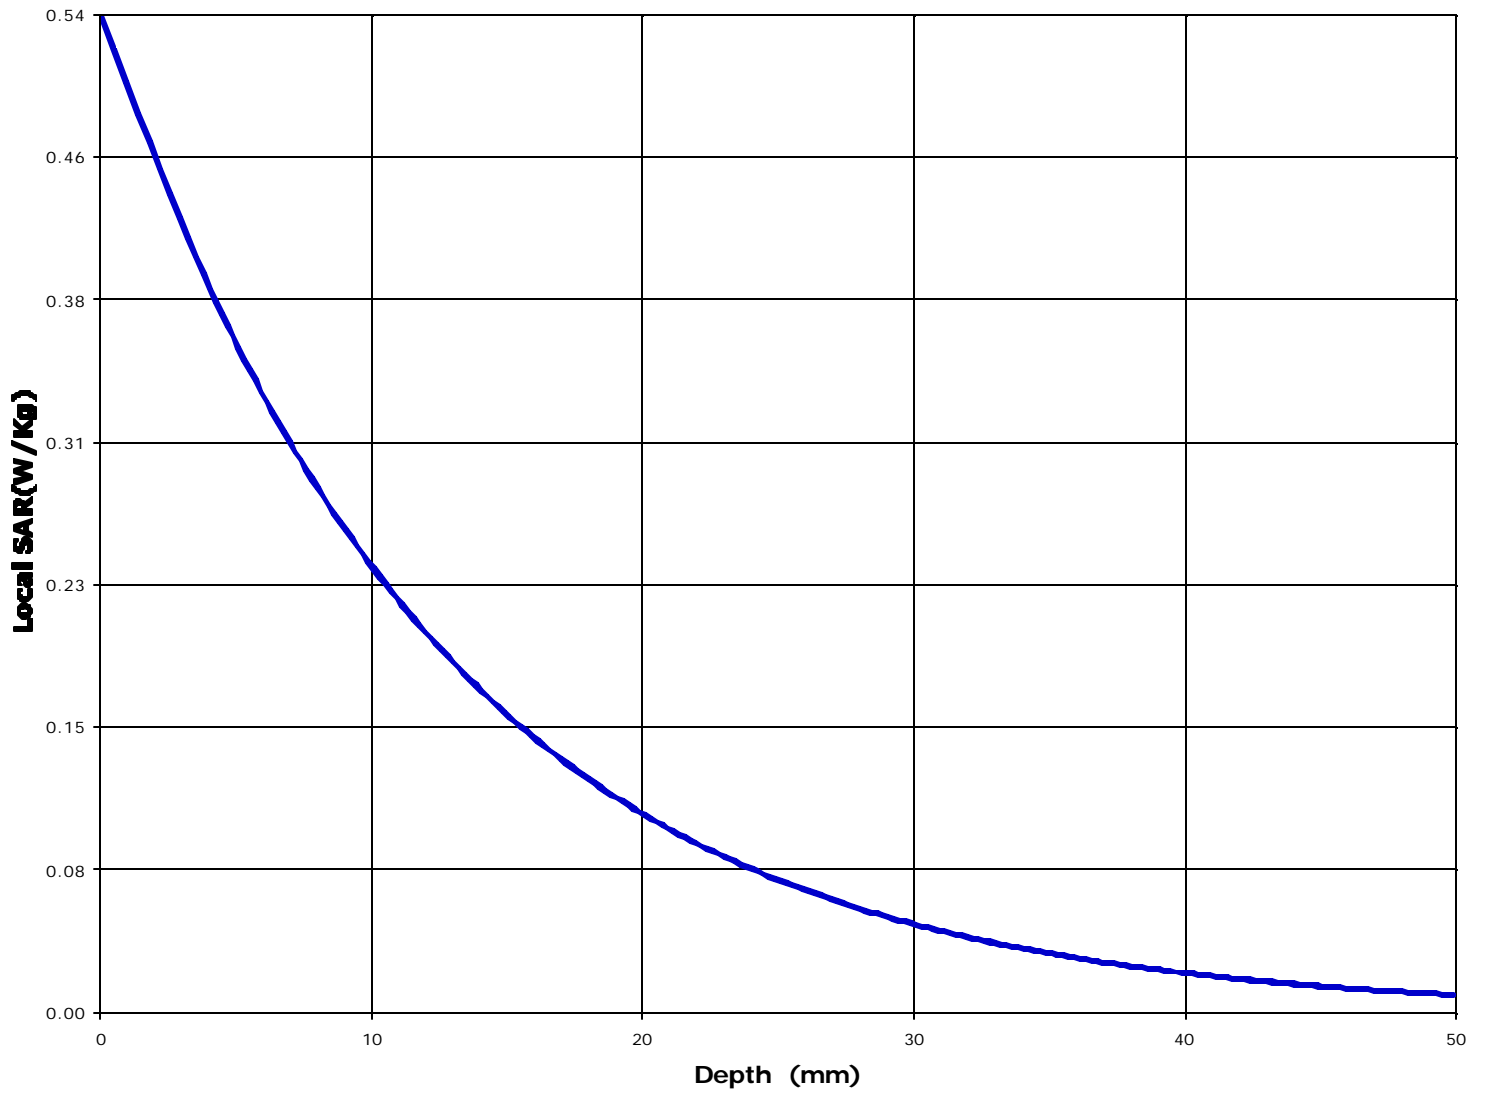



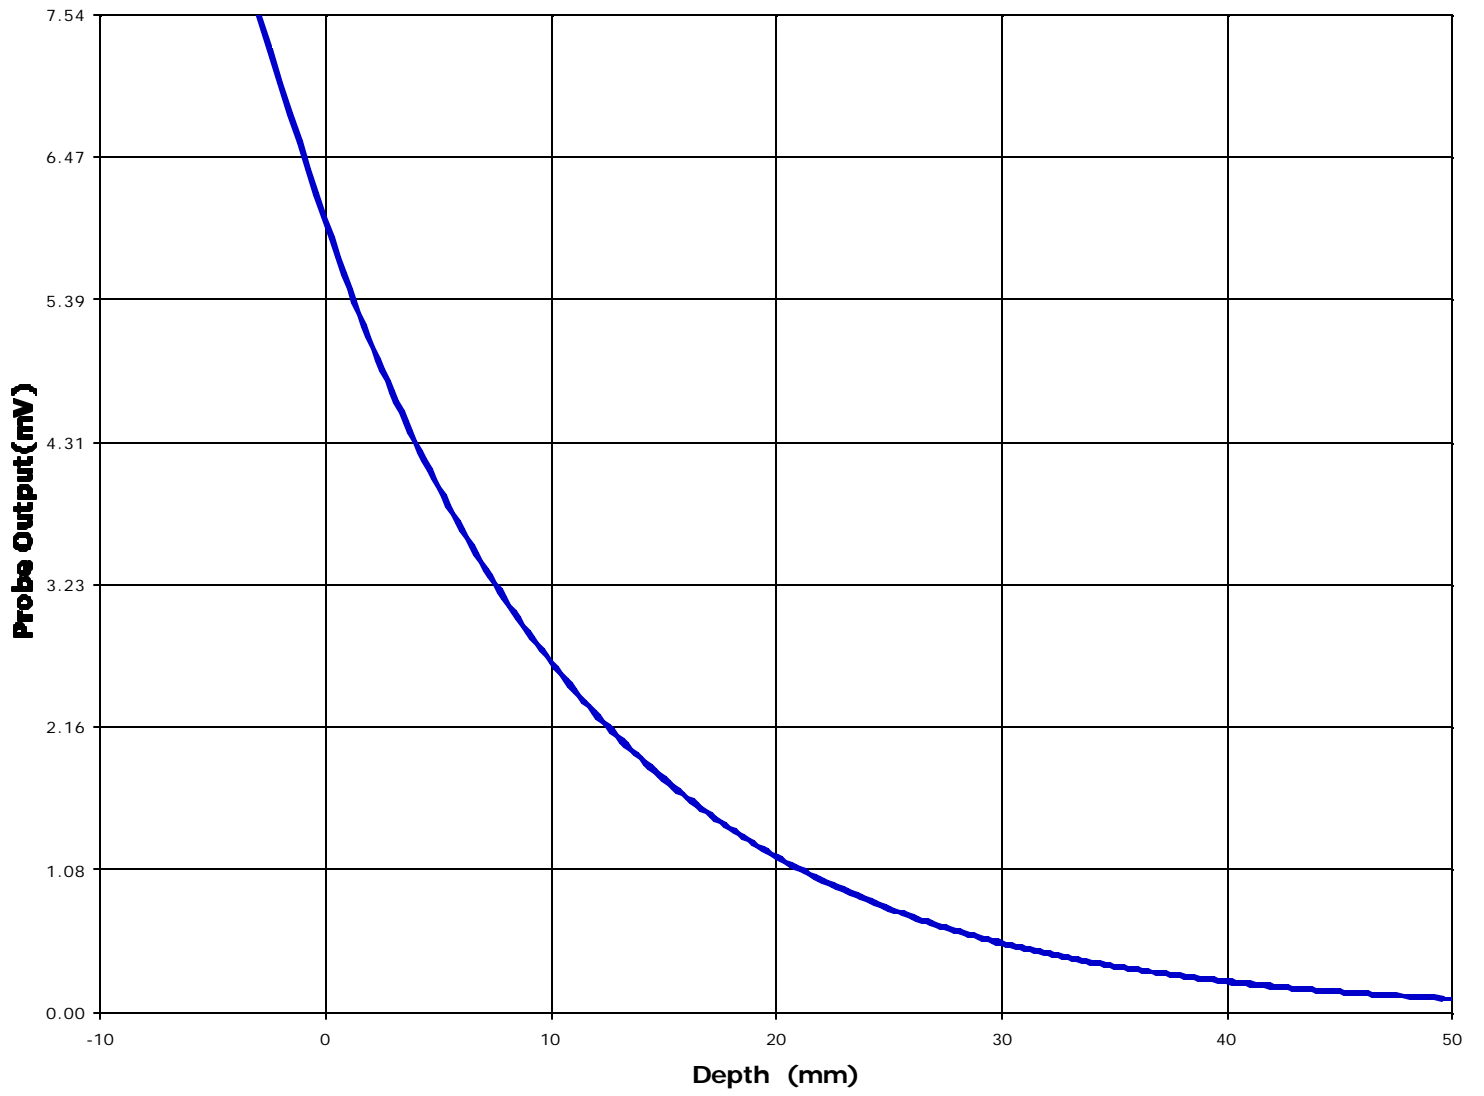

Test Information

Date : 6/8/00  
Time : 11:16:08 AM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------


Location of Maximum Field :


X = -5                      Y = 30


Measured Values (mV) :


6.06	5.49	5.02	4.63	4.32	3.96
3.70	3.41	3.21	2.98	2.76	


<u>Peak Voltage (mV)</u>	: 7.59	<u>1 Cm Voltage (mV)</u>	: 3.42	<u>SAR (W/Kg)</u>	: 0.37
--------------------------	--------	--------------------------	--------	-------------------	--------

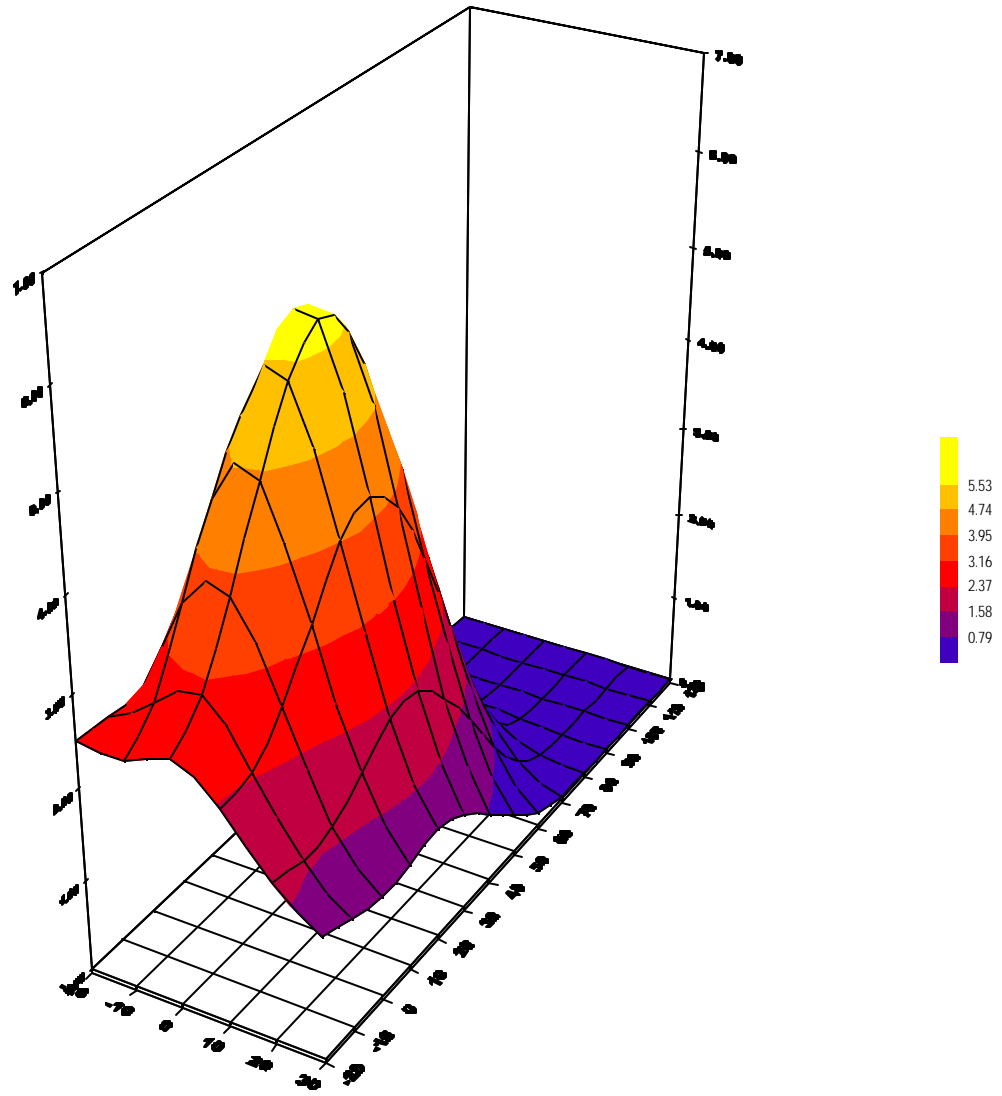


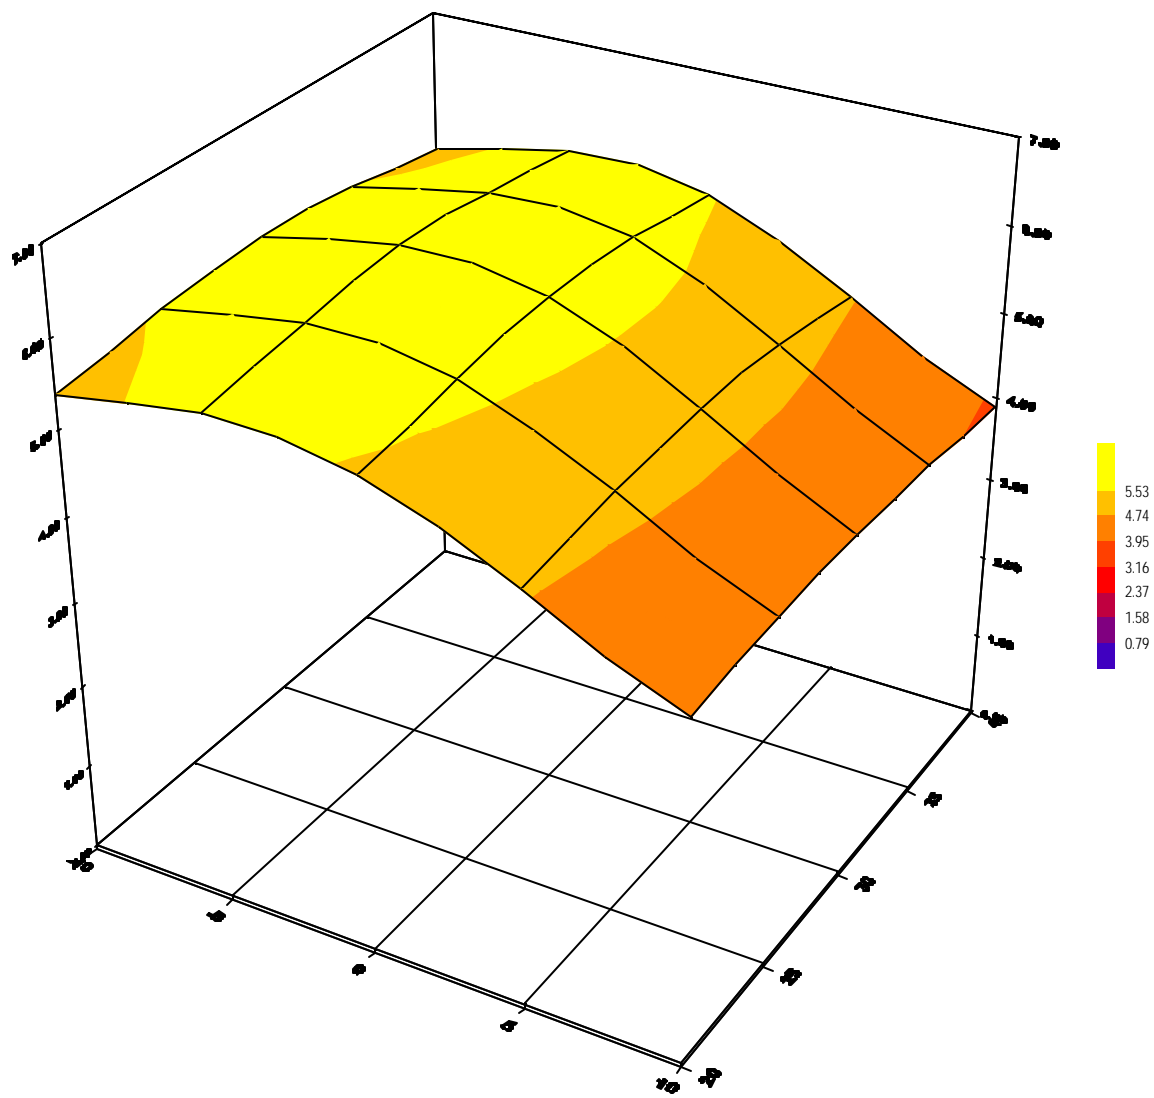

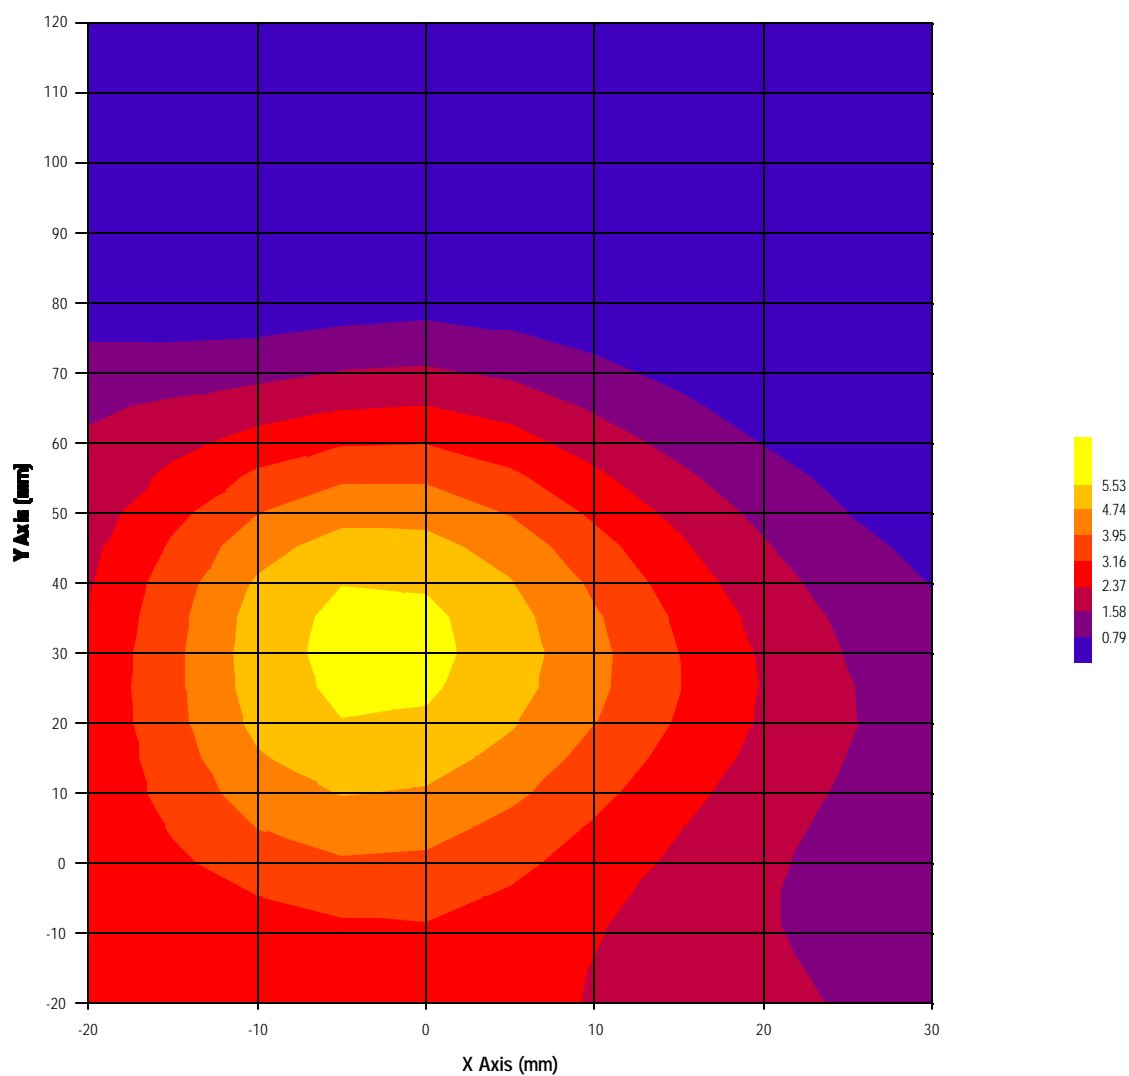

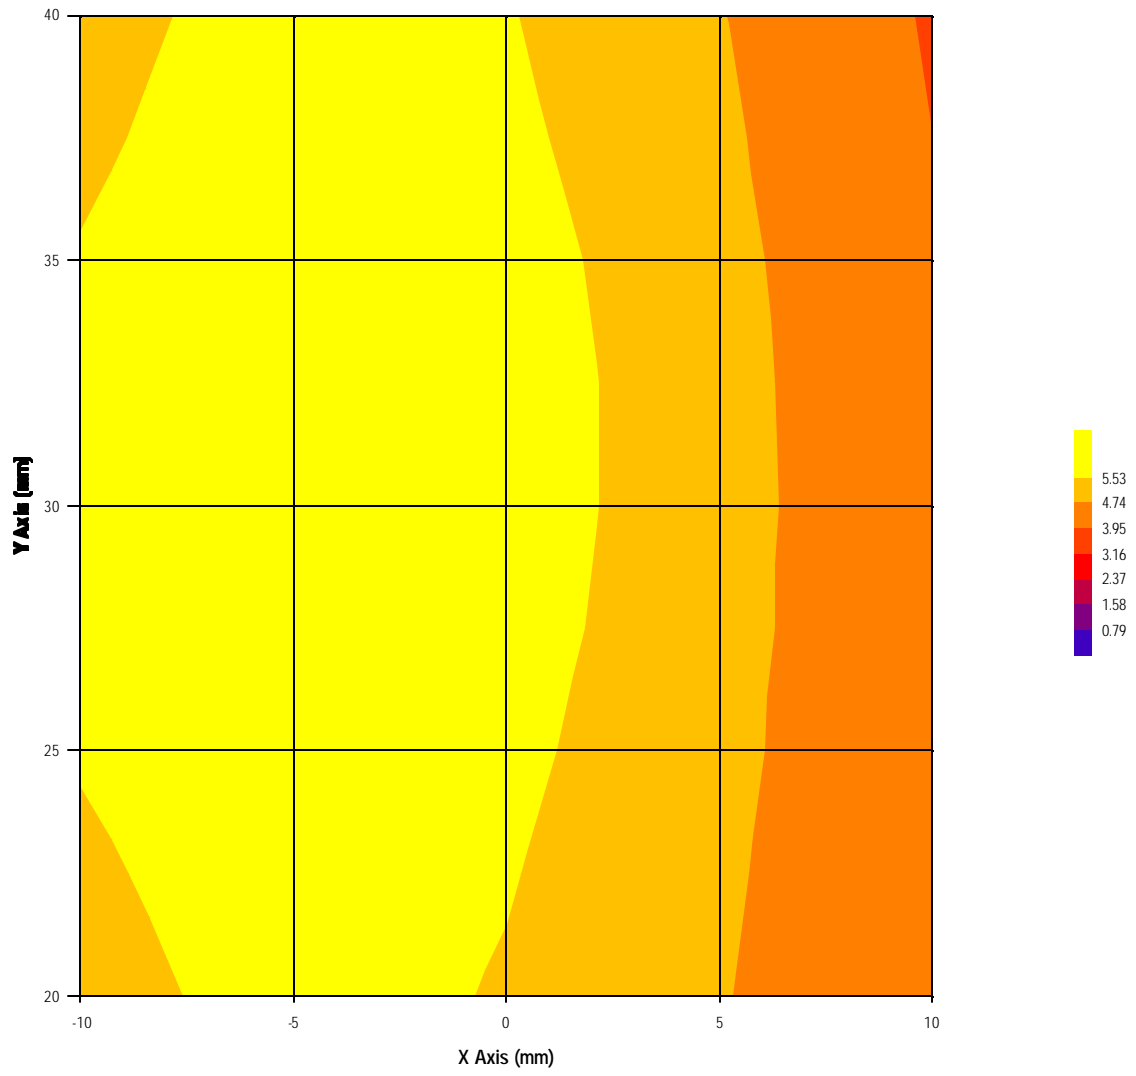

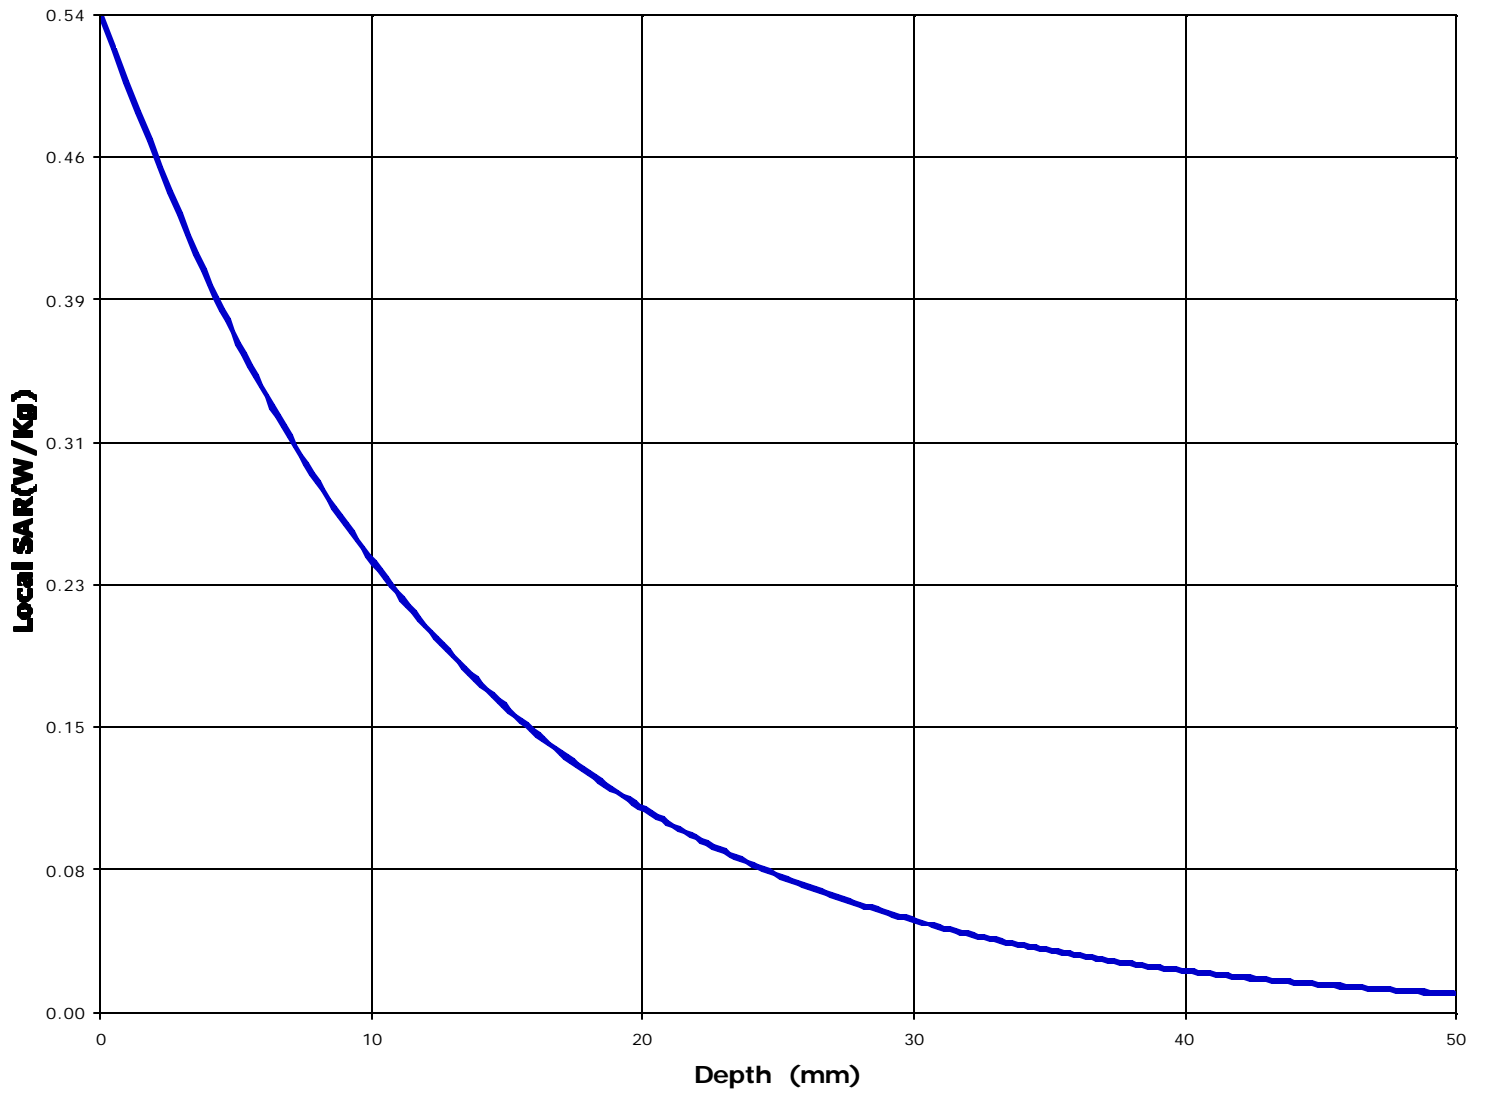

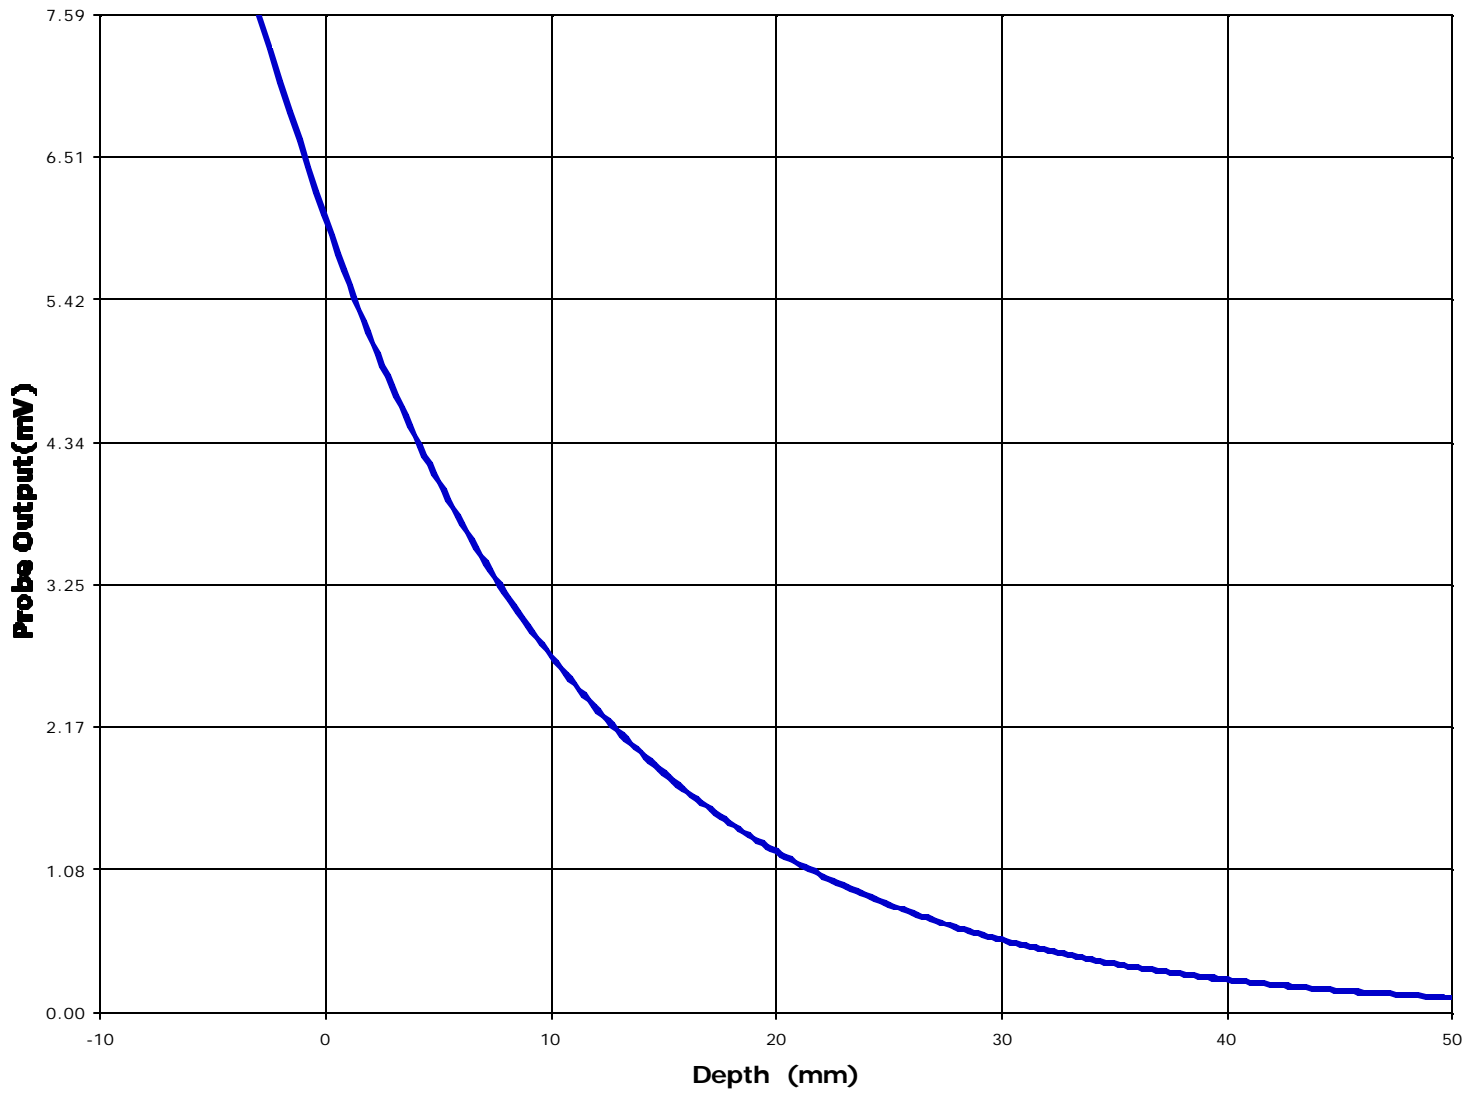



## **ANNEX C: Waist with retractable antenna fully retracted SAR MEASUREMENT**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ELT-002Q**  
**June 12, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 6/8/00  
Time : 2:45:09 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.9 avg
<u>Sensor Factor (mV)</u>	: 10.8		(conducted)
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 25.0 avg

Amplifier Setting :

Channel 1 : .00418	Channel 2 : .00386	Channel 3 : .00299
--------------------	--------------------	--------------------


Location of Maximum Field :


X = -2                      Y = 7


Measured Values (mV) :


3.42	1.93	1.18	0.76	0.50	0.36
0.24	0.16	0.07	0.03	0.00	


<u>Peak Voltage (mV)</u>	: 15.91	<u>1 Cm Voltage (mV)</u>	: 0.09	<u>SAR (W/Kg)</u>	: 0.16
--------------------------	---------	--------------------------	--------	-------------------	--------

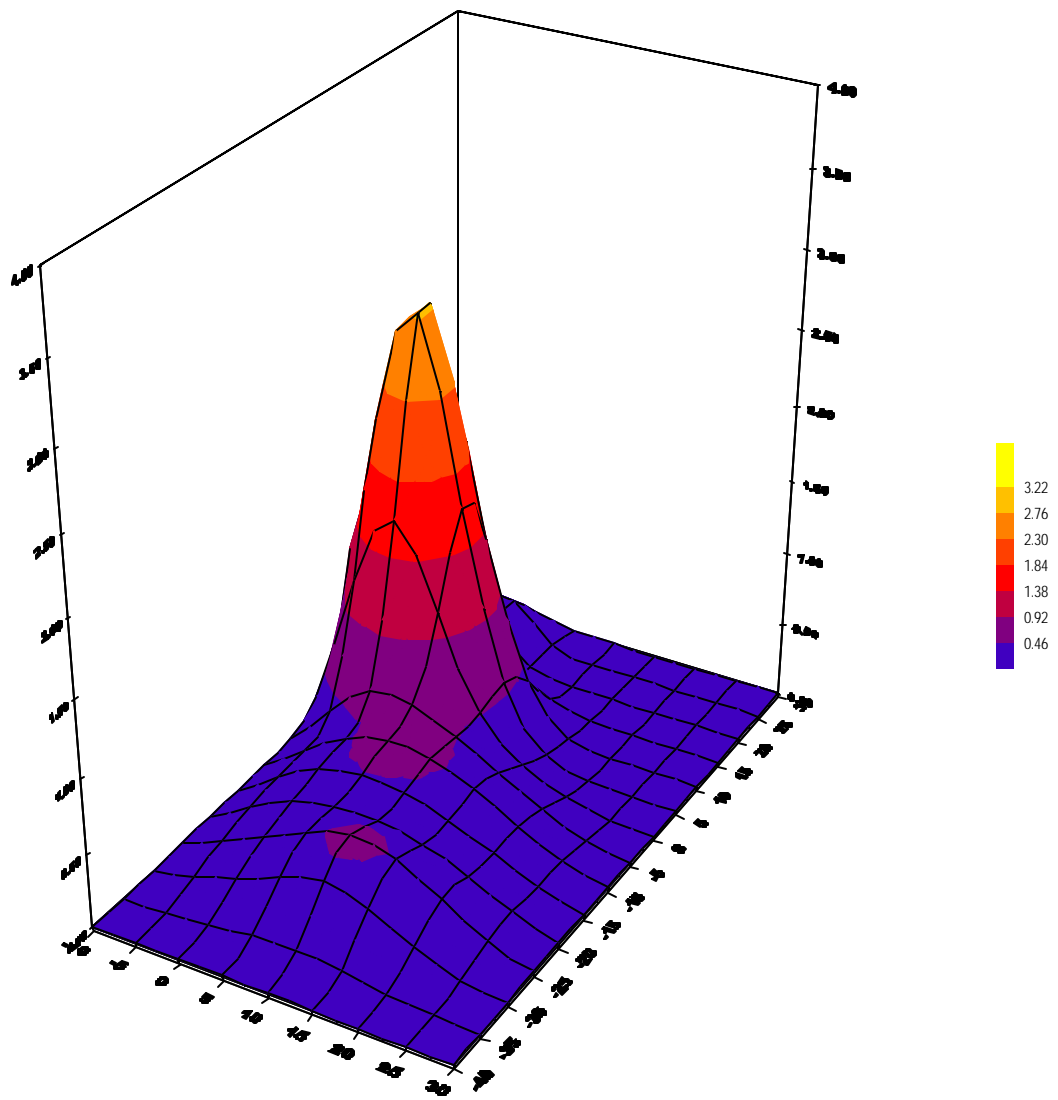


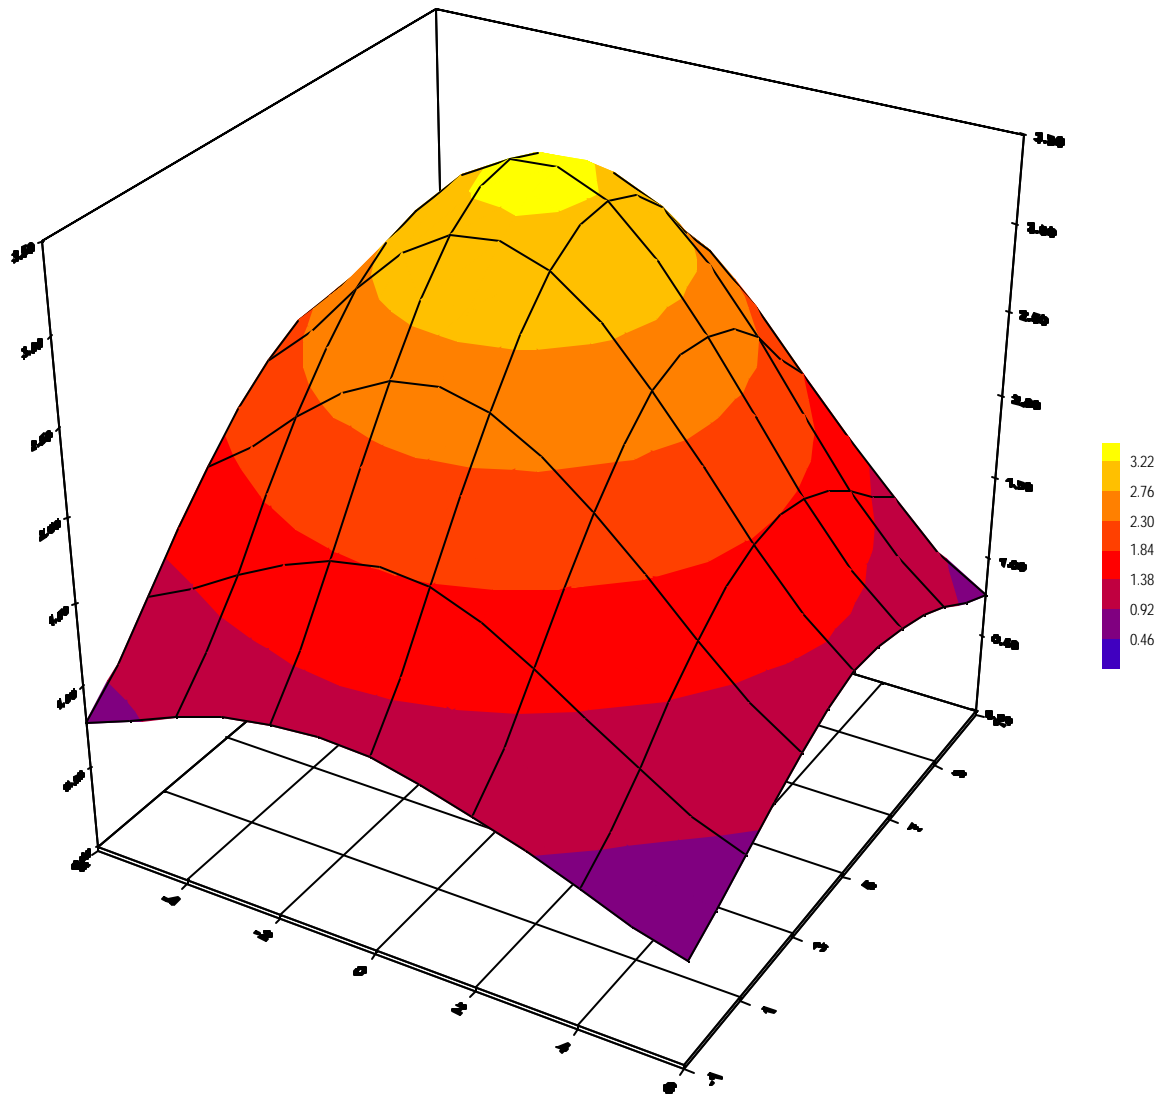

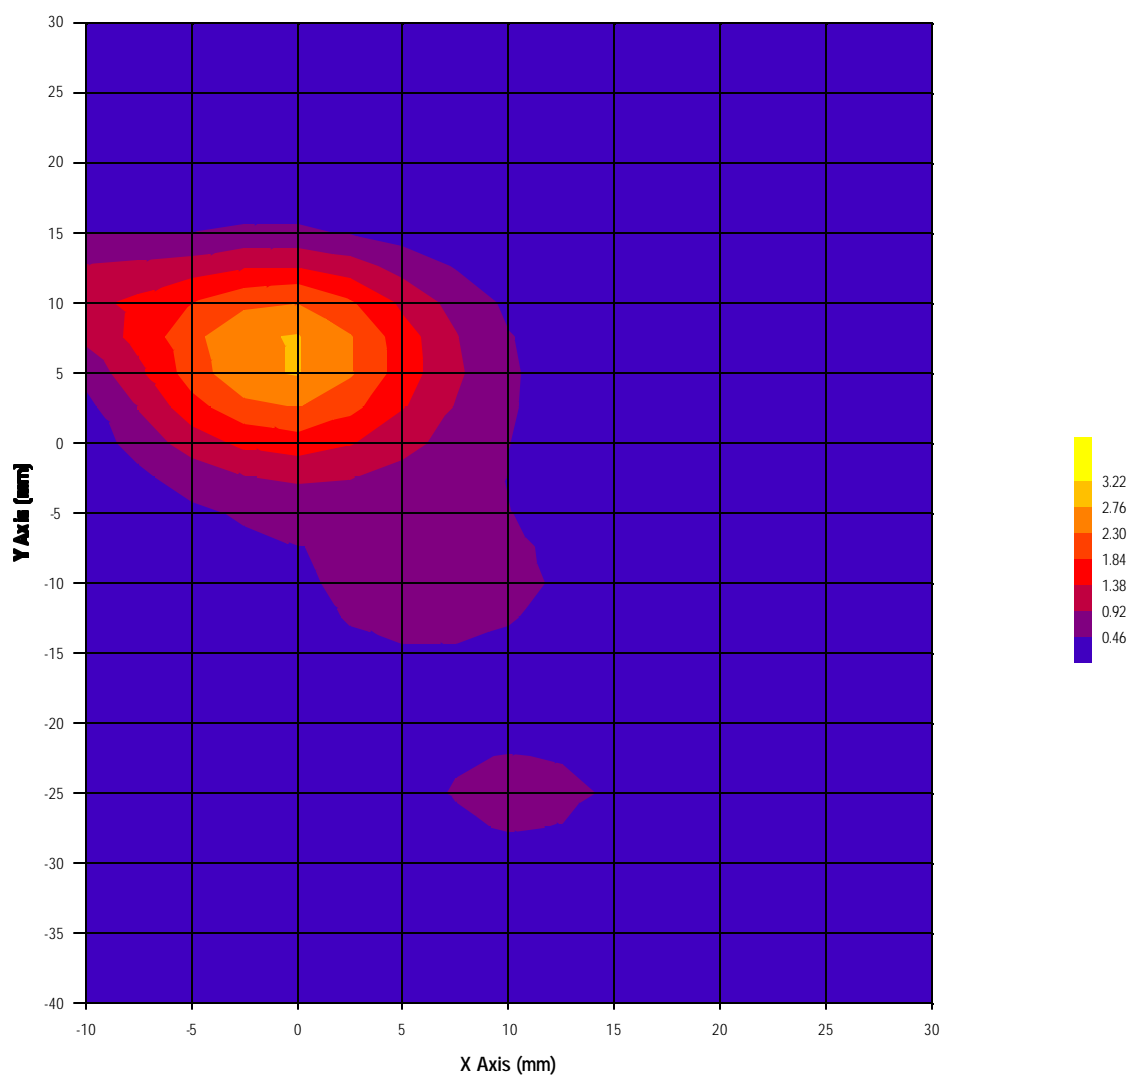

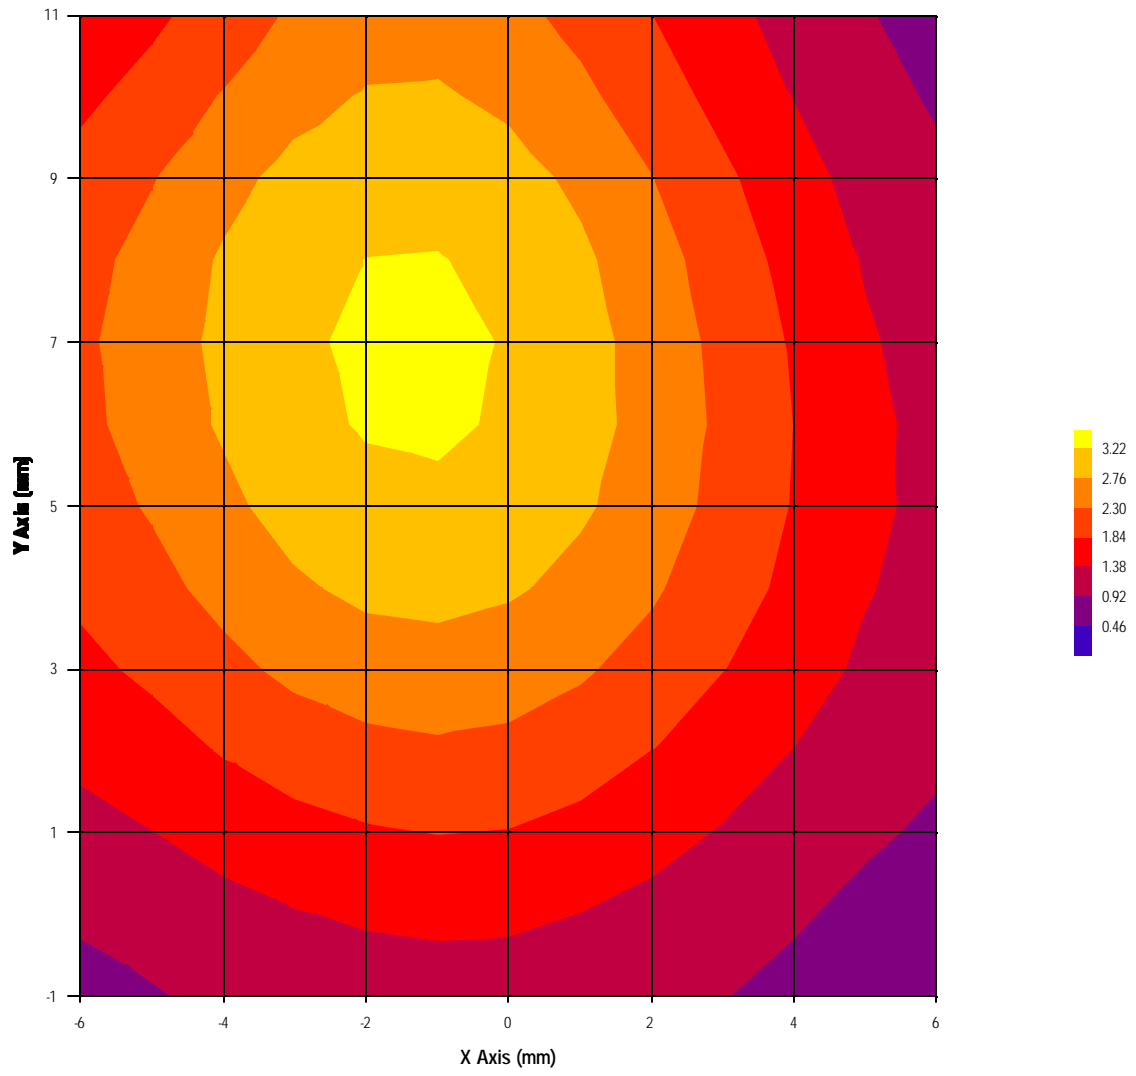

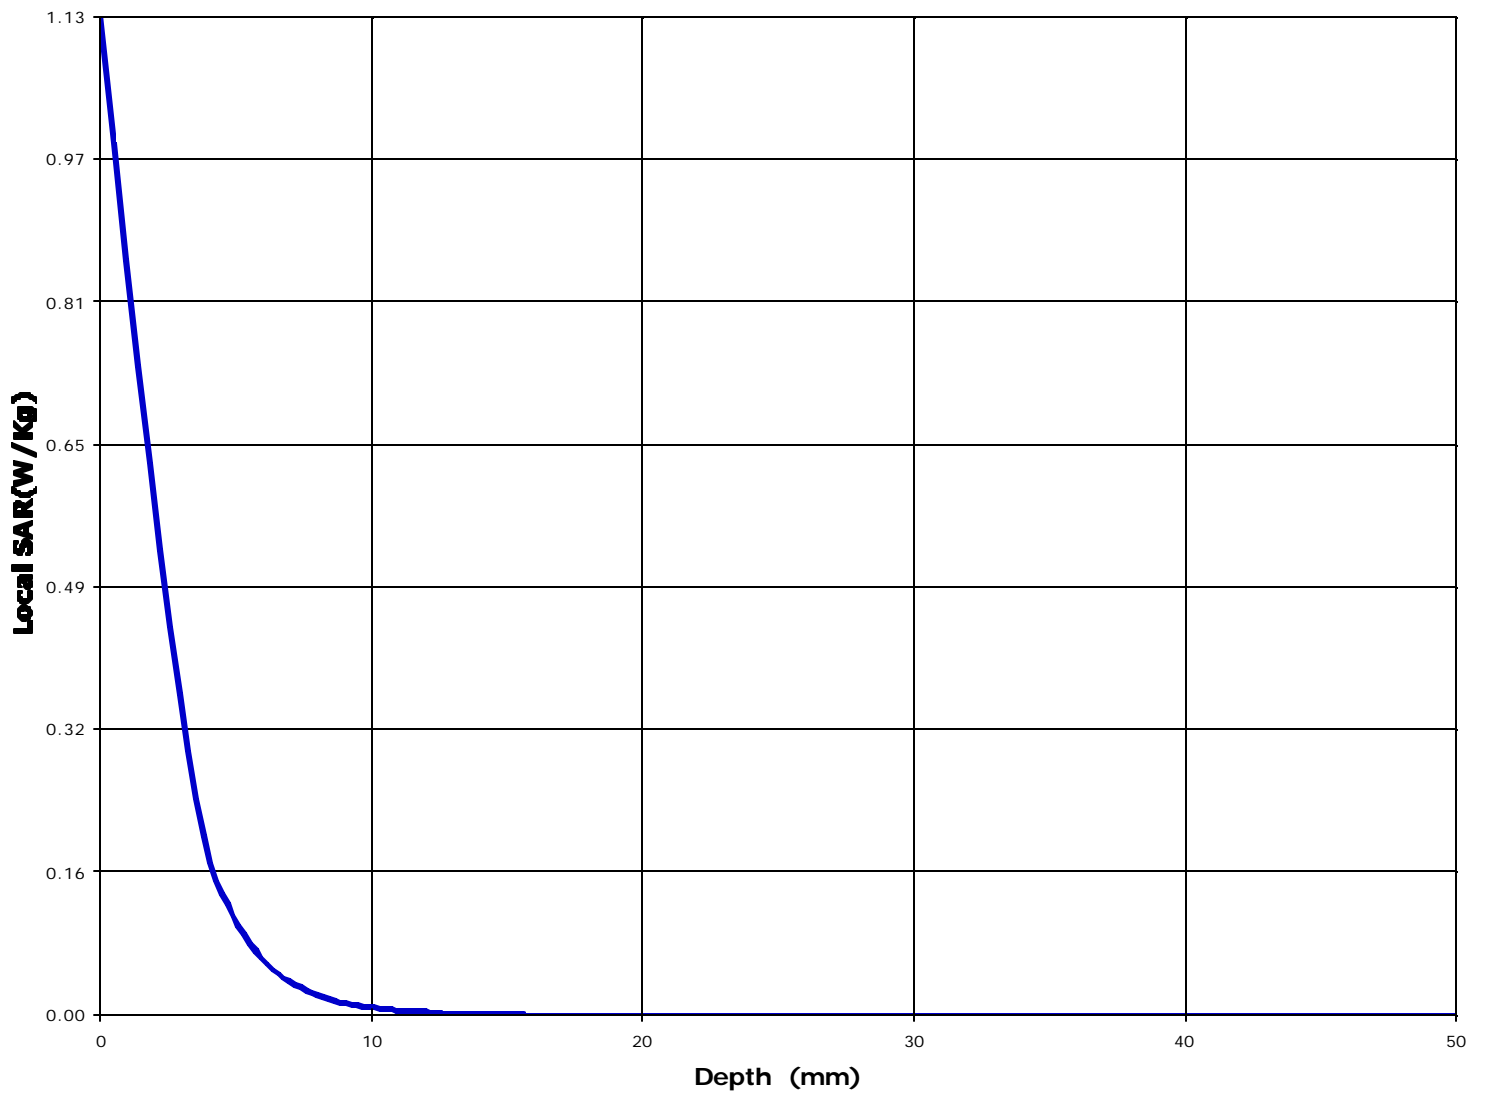

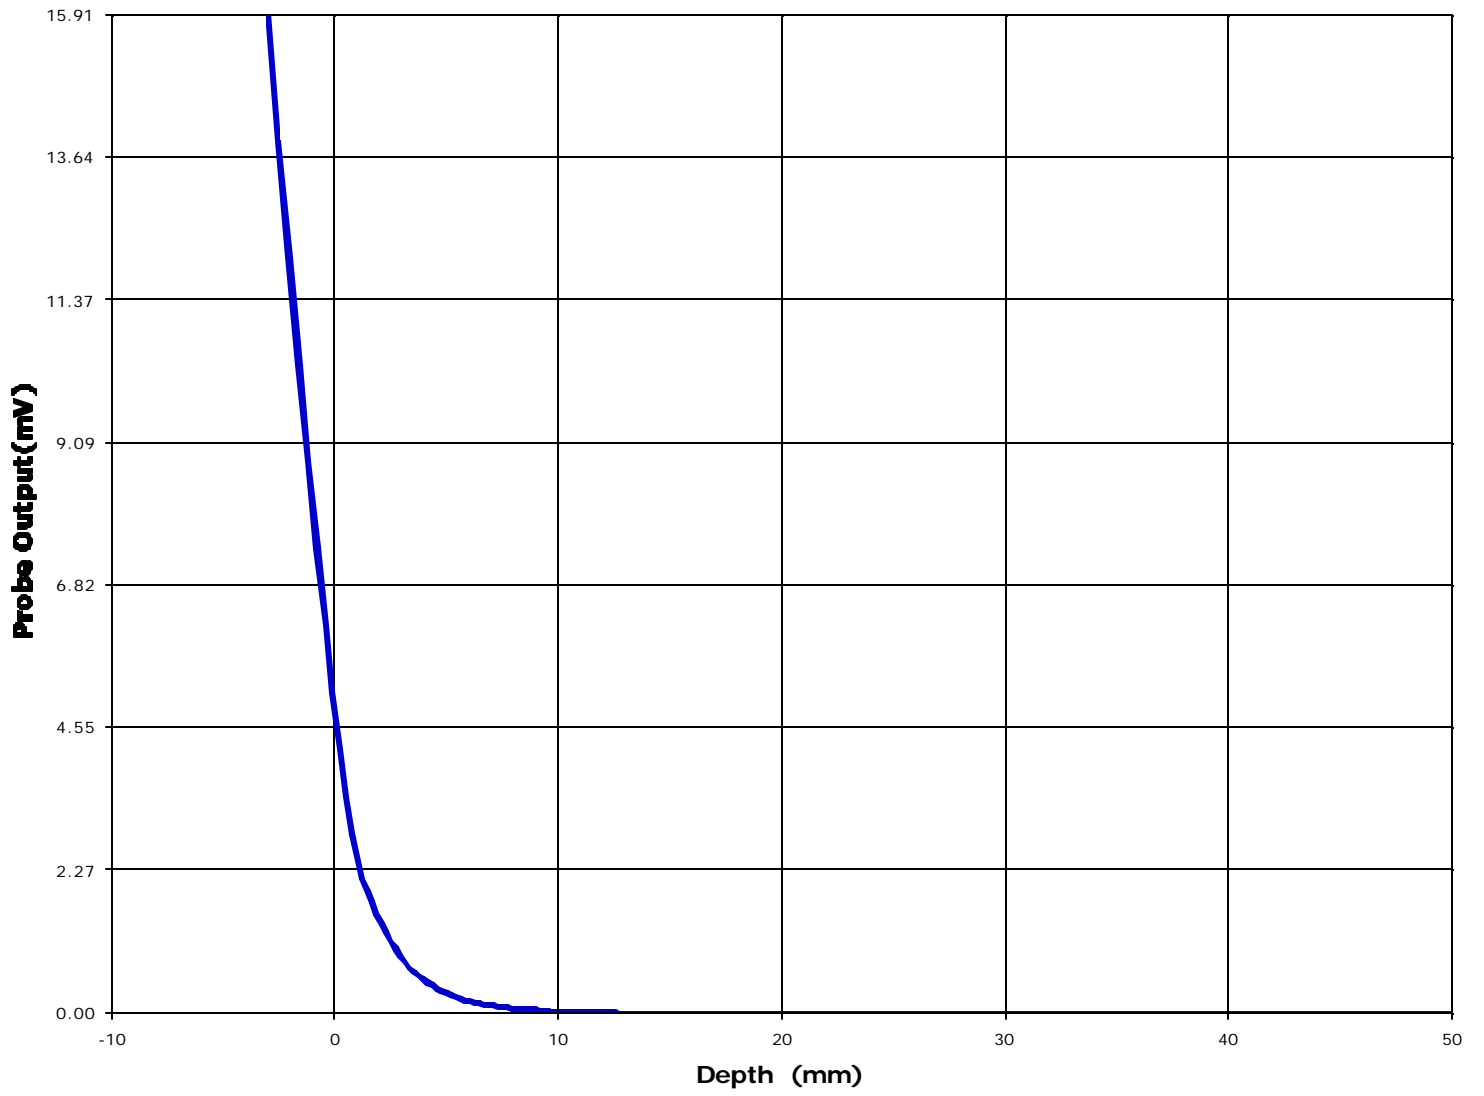



Test Information

Date : 6/8/00  
Time : 3:10:24 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.7 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.8 avg

Amplifier Setting :  
Channel 1 : .00418      Channel 2 : .00386      Channel 3 : .00299


Location of Maximum Field :


X = -2                      Y = 7


Measured Values (mV) :


3.85	1.98	1.24	0.83	0.57	0.42
0.30	0.22	0.15	0.08	0.04	


Peak Voltage (mV) : 17.41      1 Cm Voltage (mV) : 0.09      SAR (W/Kg) : 0.17

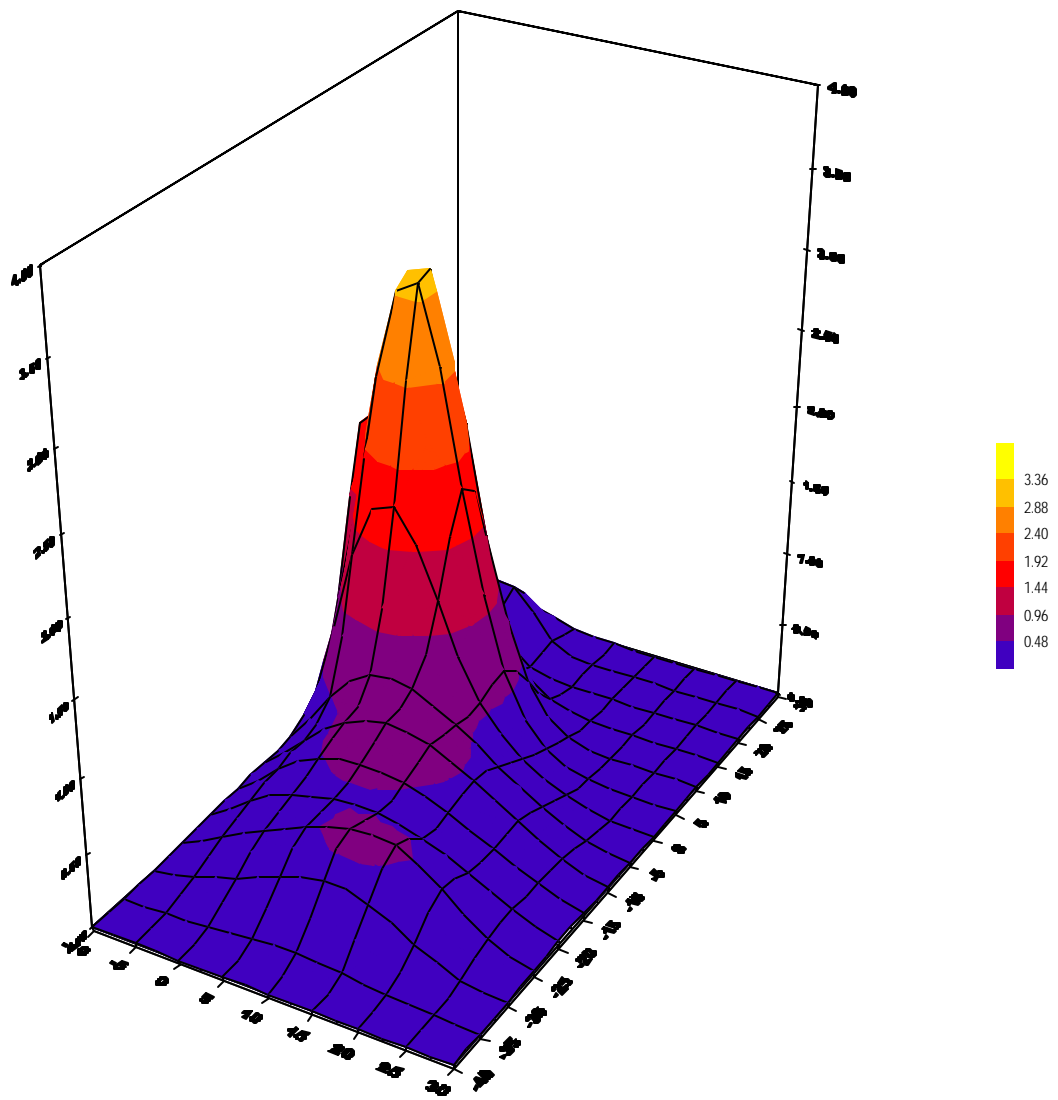


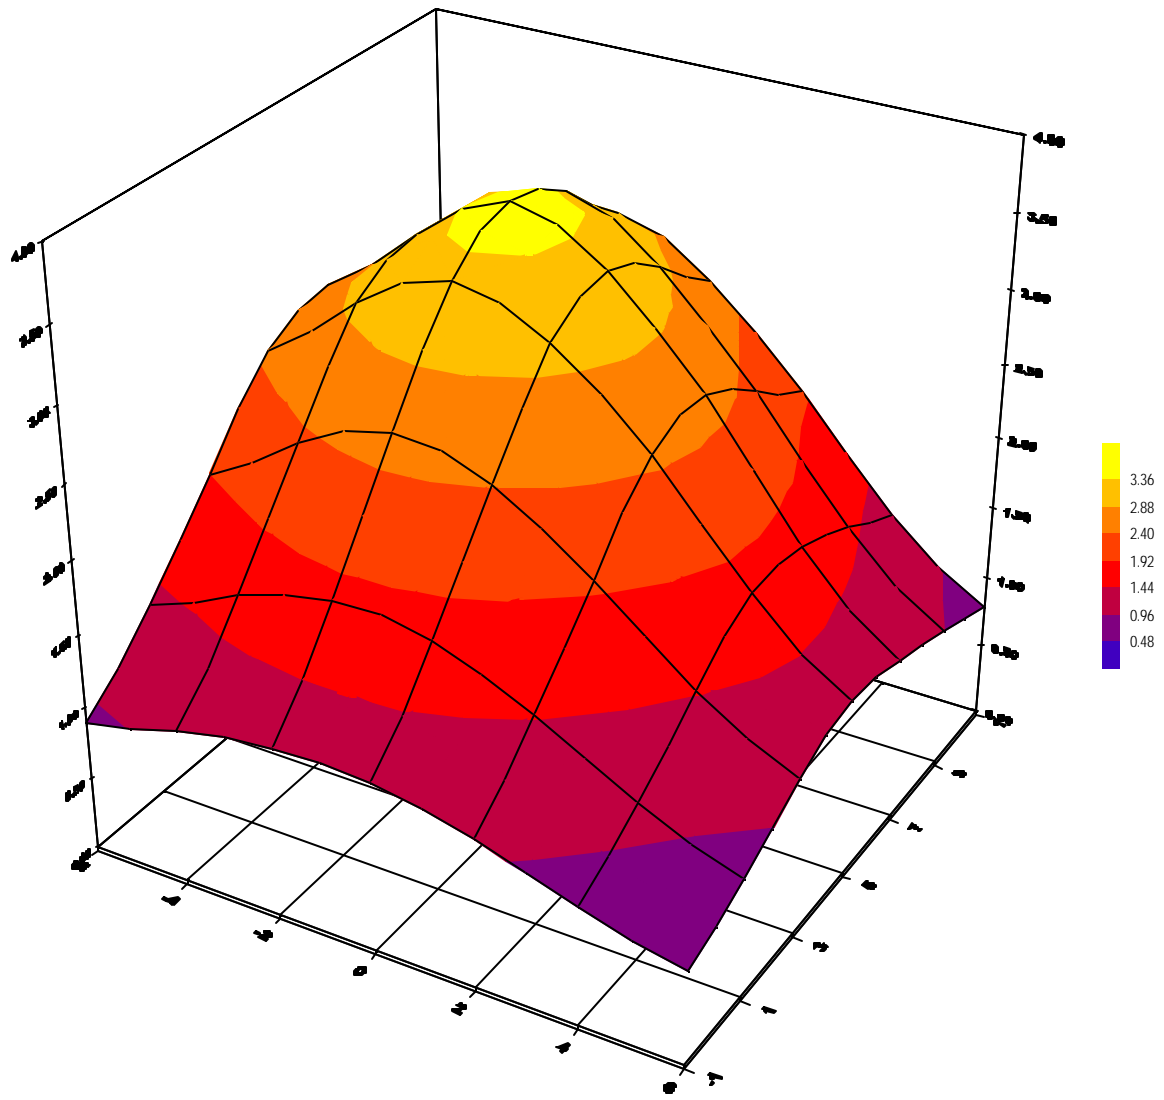

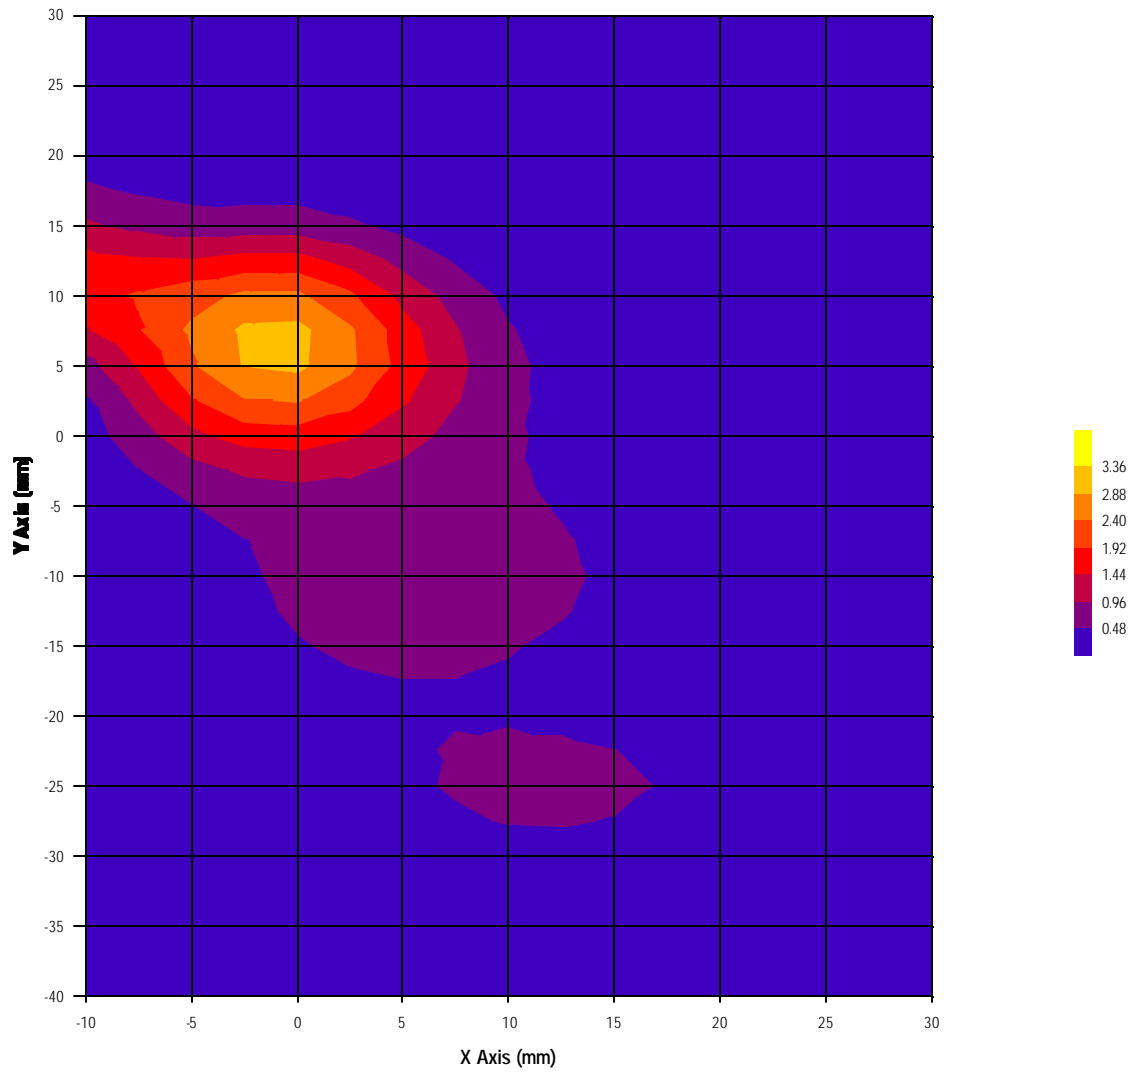

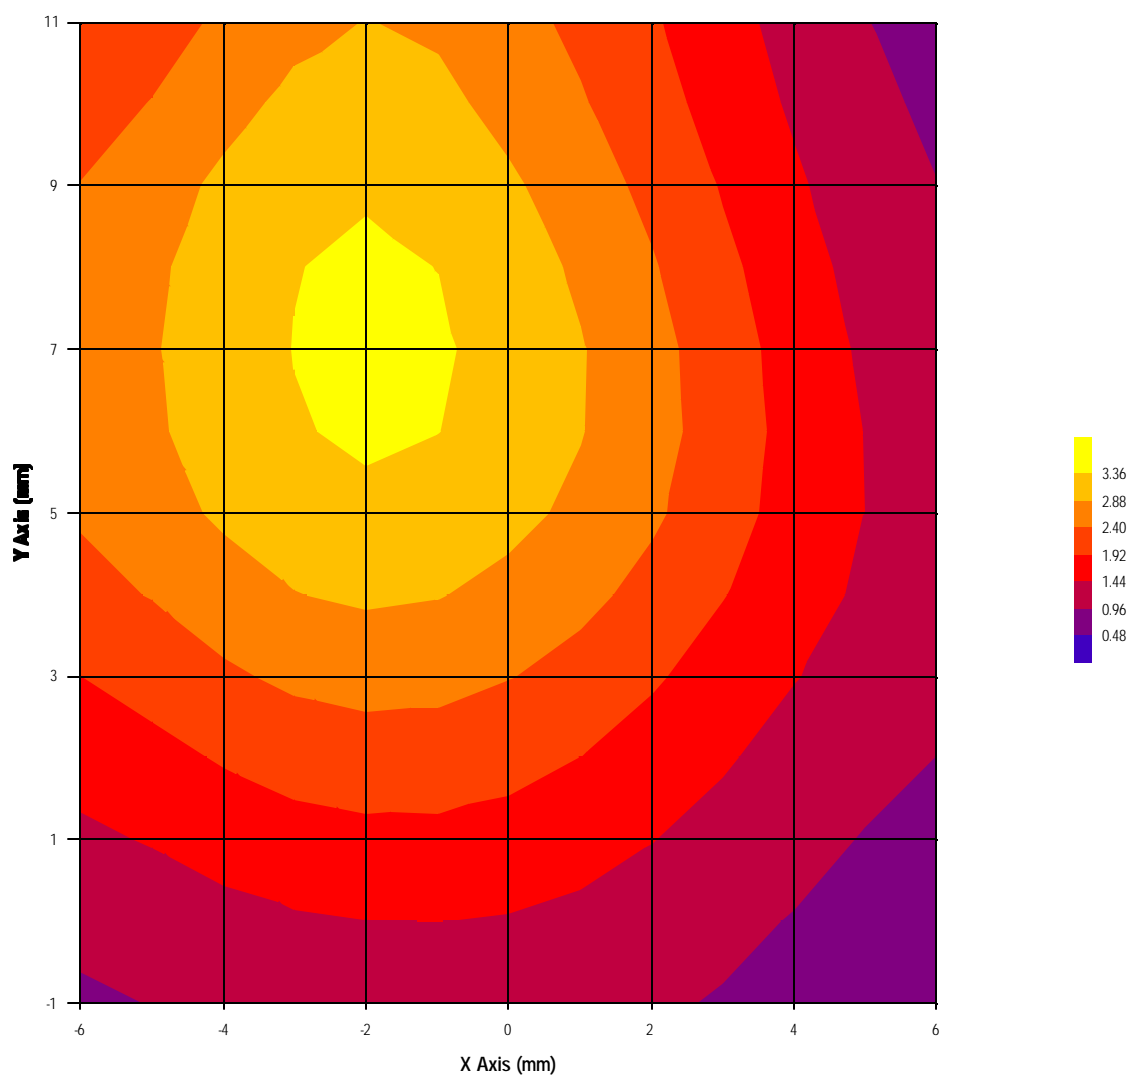

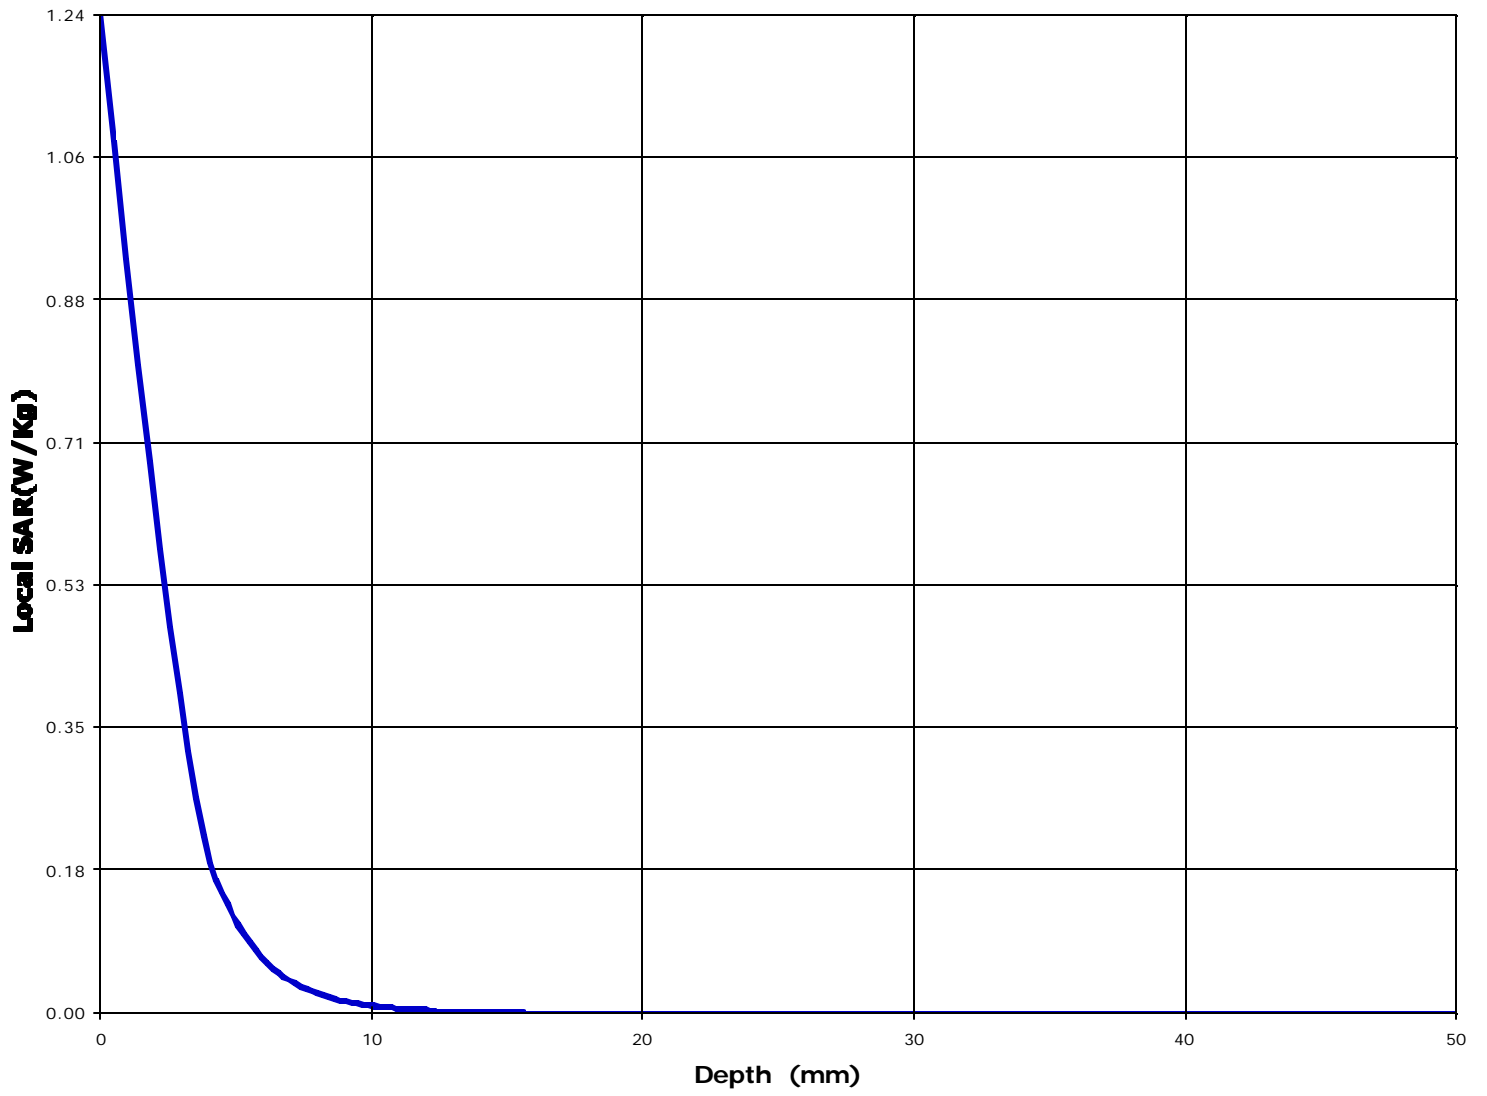

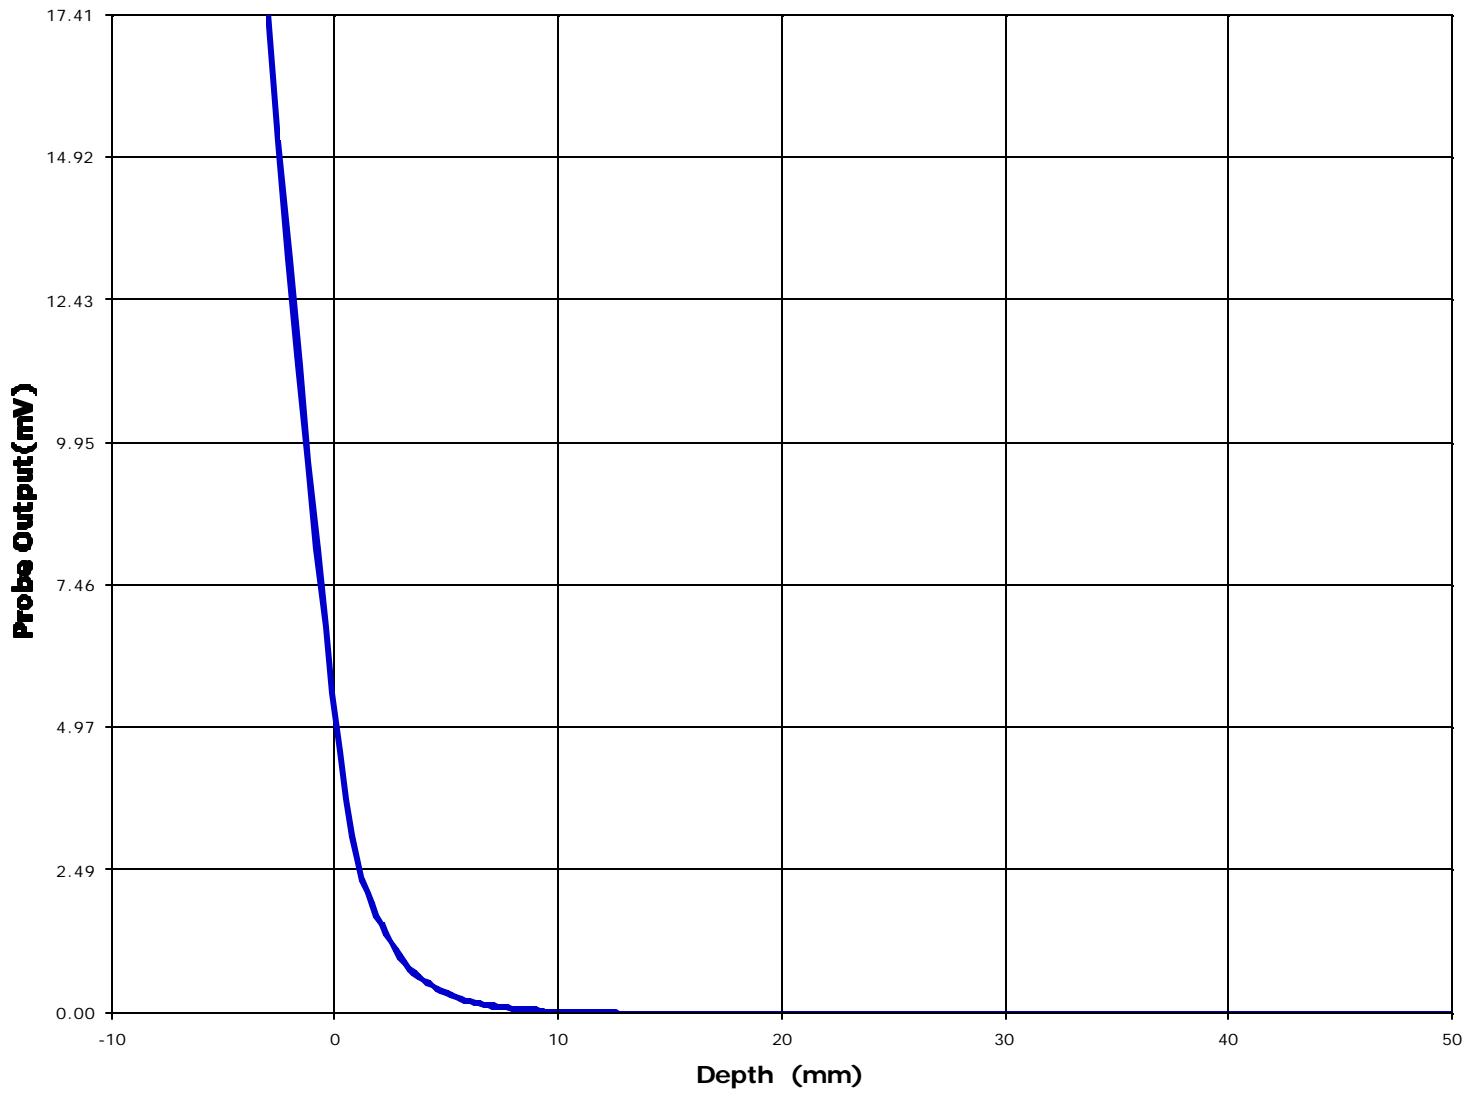

Test Information

Date : 6/8/00  
Time : 1:45:04 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co.,	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 53.1
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 1.03

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.3 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.77	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.4 avg

Amplifier Setting :  
Channel 1 : .00418      Channel 2 : .00386      Channel 3 : .00299

Location of Maximum Field :


X = 0                      Y = 7


Measured Values (mV) :


3.39	1.79	1.07	0.71	0.50	0.36
0.25	0.17	0.10	0.05	0.01	


Peak Voltage (mV) : 16.94      1 Cm Voltage (mV) : 0.07      SAR (W/Kg) : 0.17




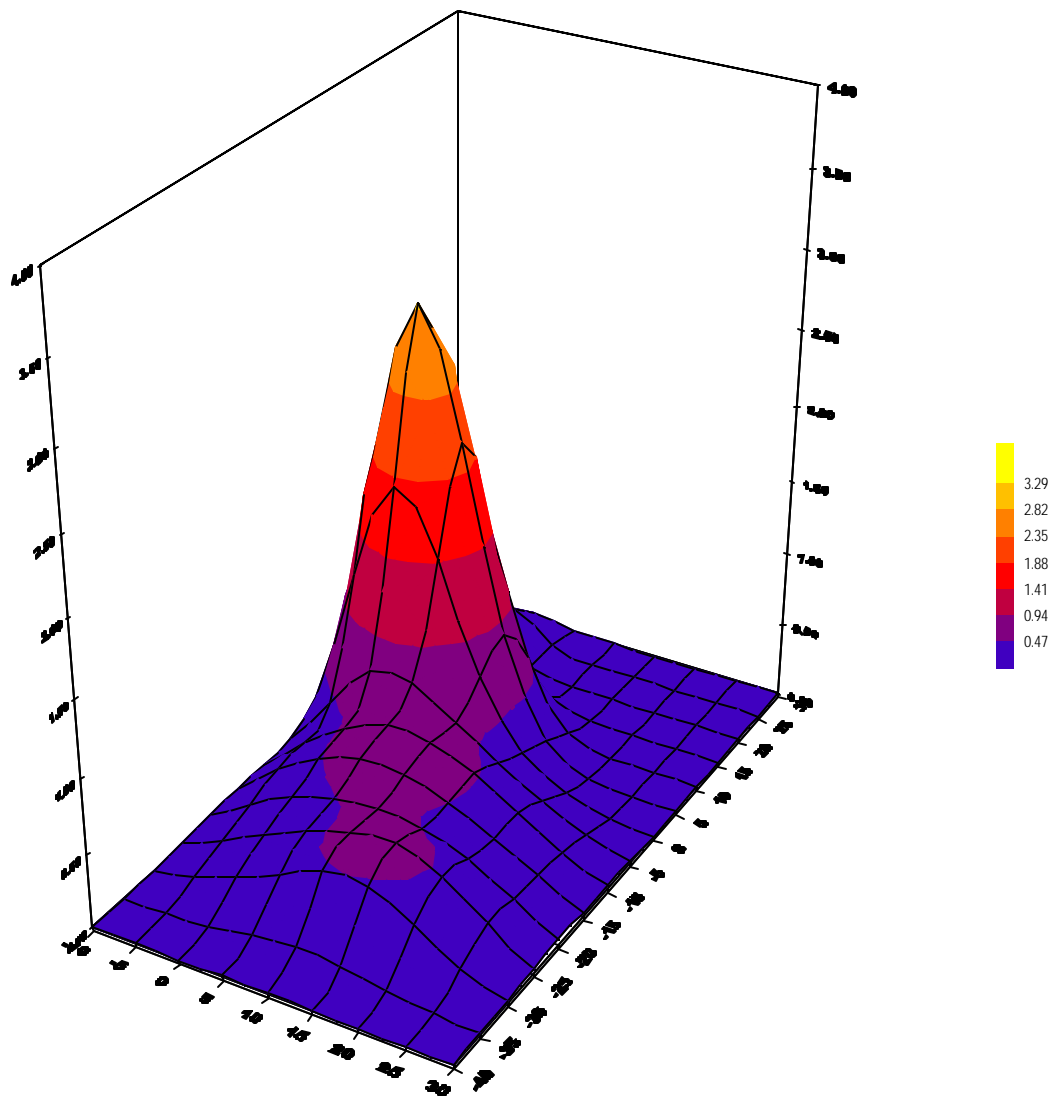


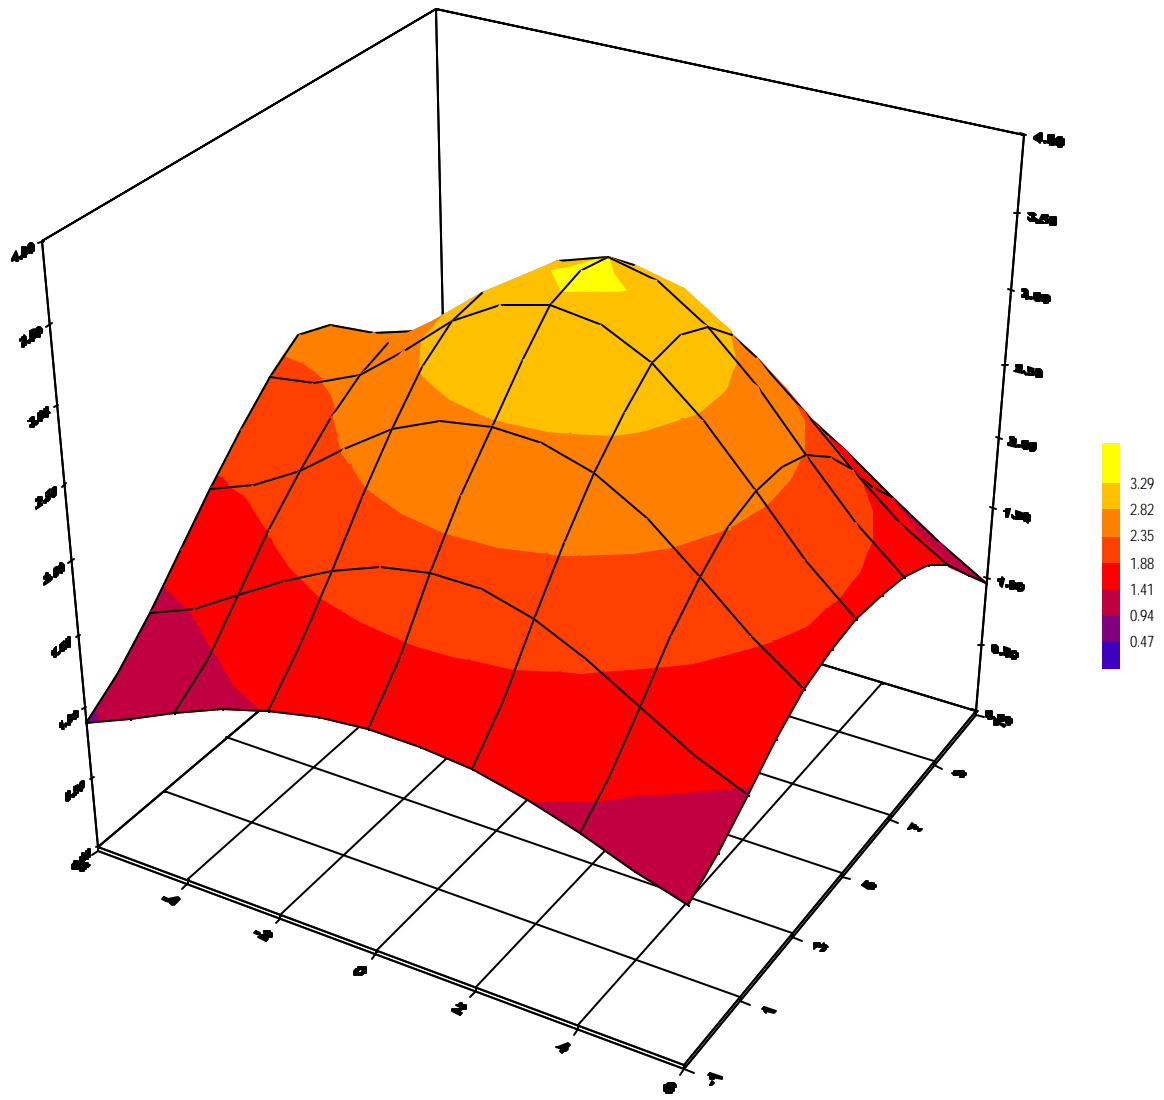

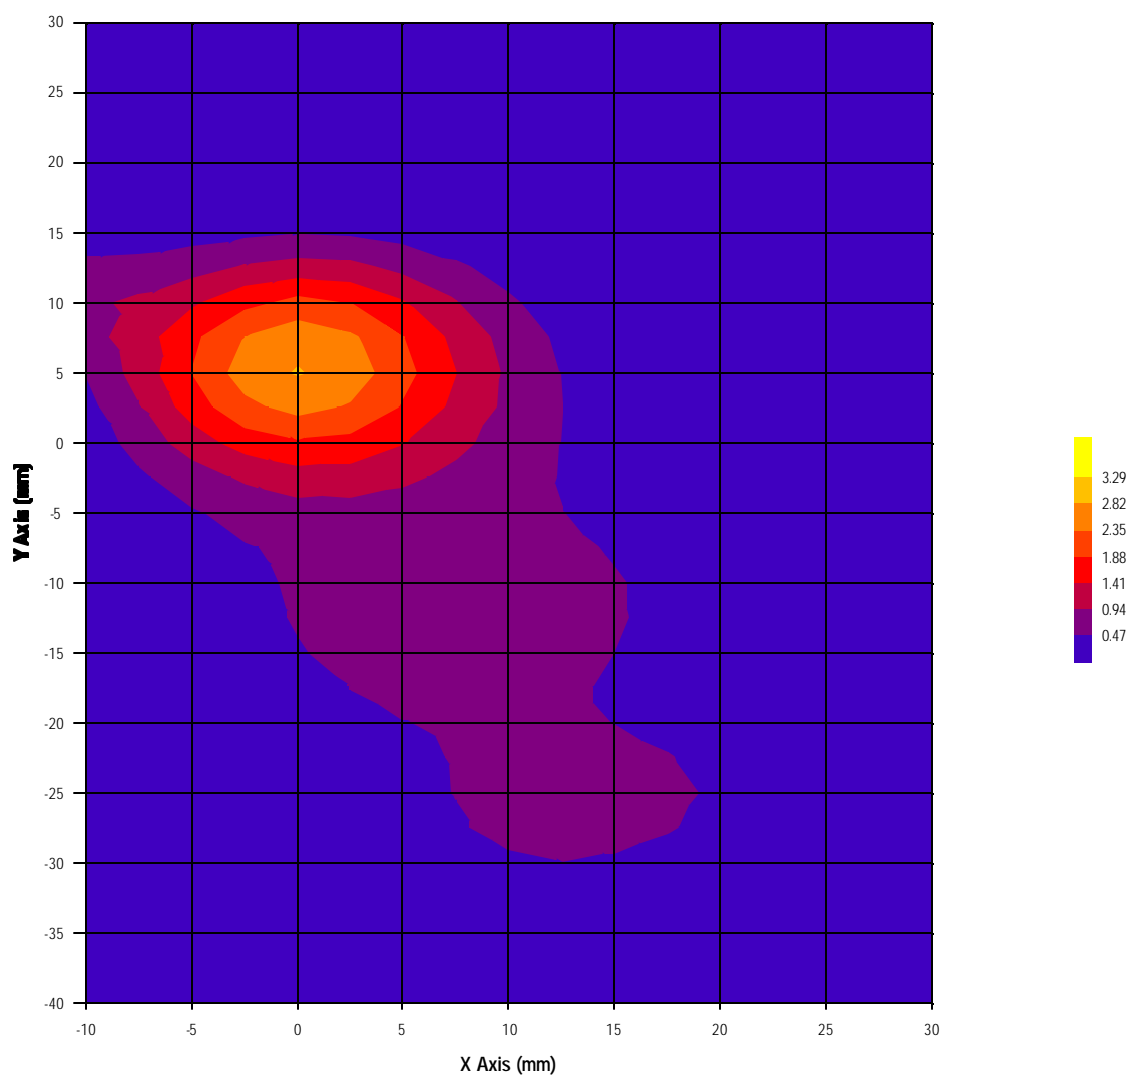

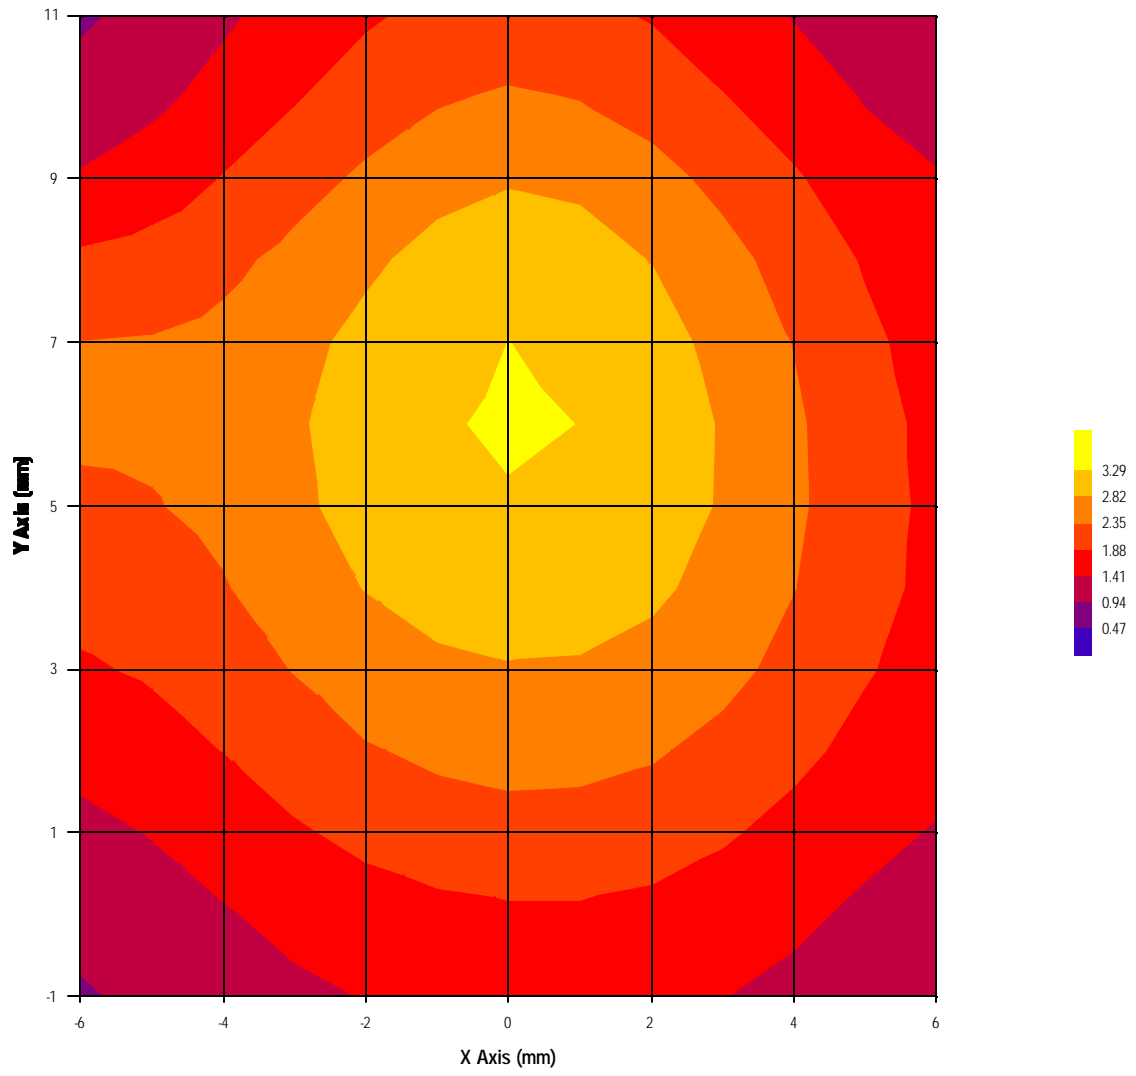

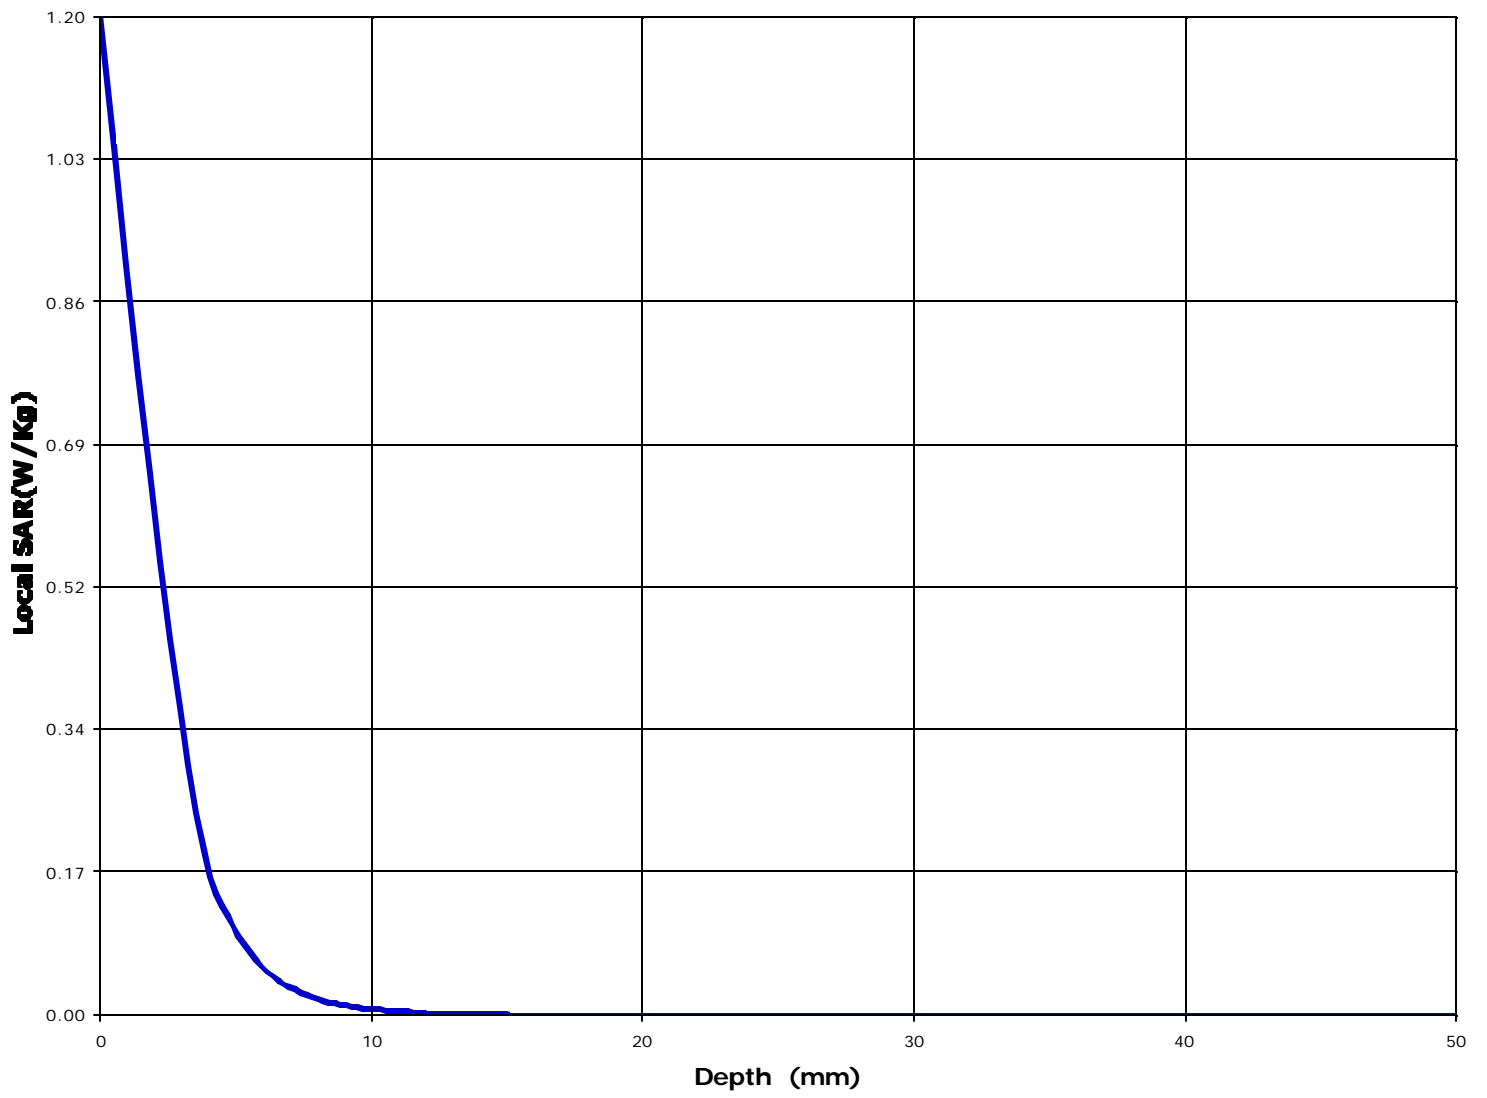

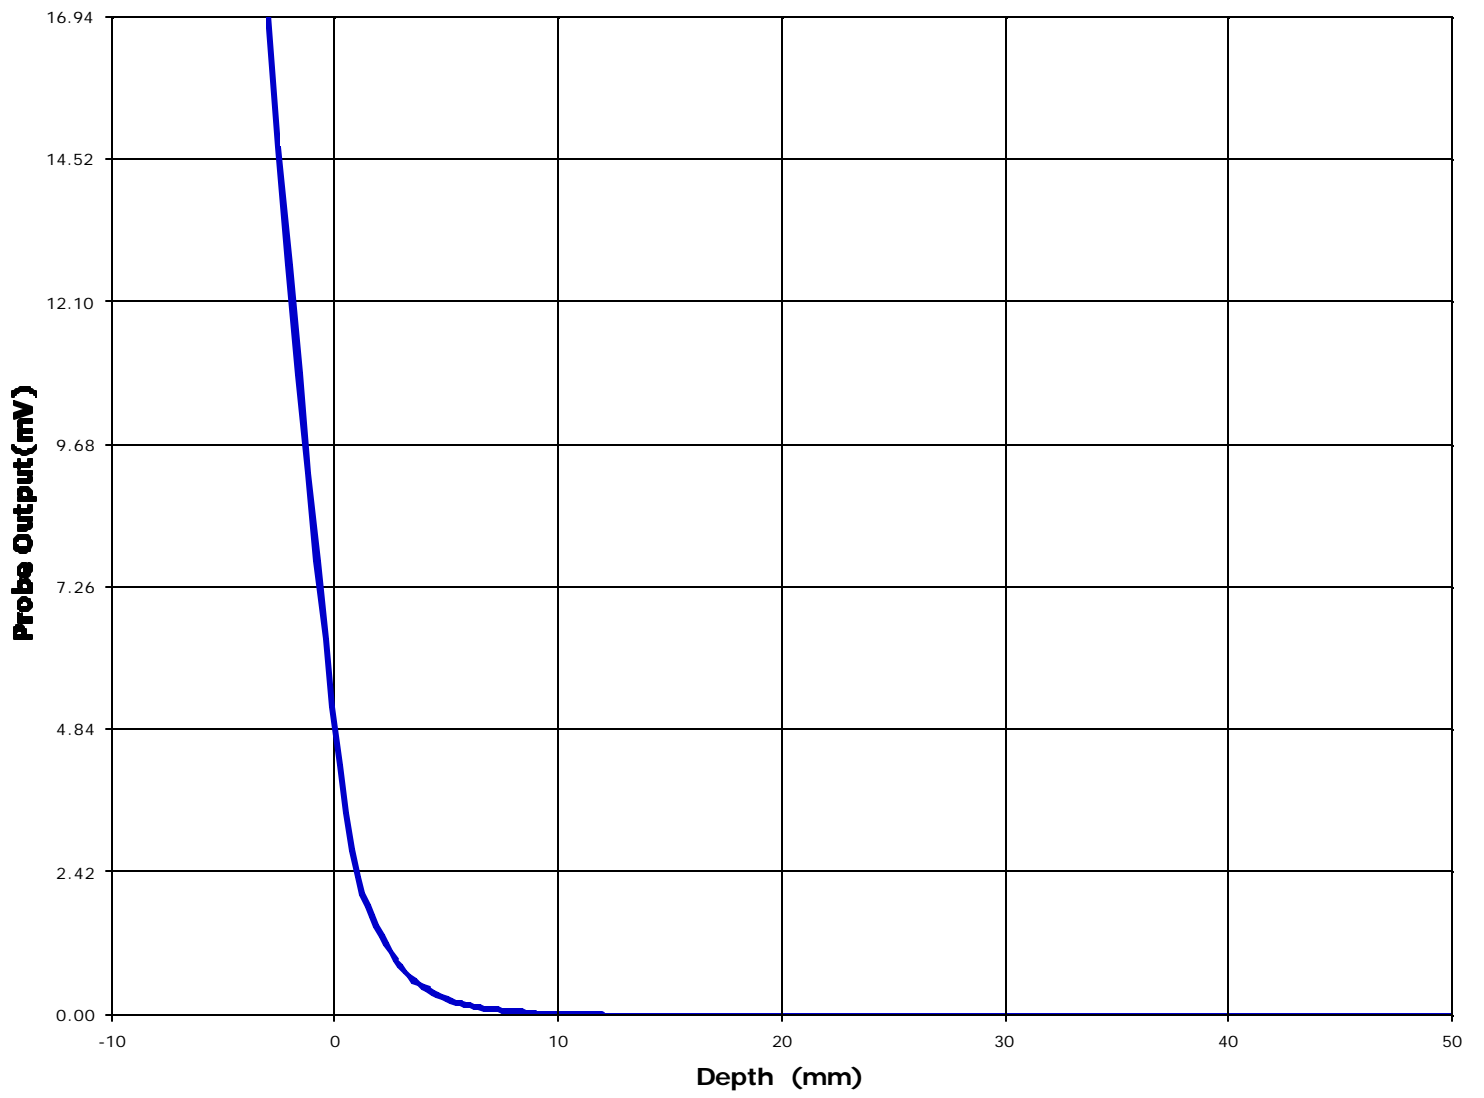

## ANNEX D: Head left ear with fixed antenna SAR MEASUREMENT

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q

June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 5/23/00  
Time : 11:31:31 AM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.2 avg
<u>Sensor Factor (mV)</u>	: 10.8		(conducted)
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.3 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------

Location of Maximum Field :


X = 15                      Y = -45


Measured Values (mV) :


4.17	3.82	3.38	3.12	3.03	3.00
2.85	2.66	2.54	2.40	2.36	


<u>Peak Voltage (mV)</u>	: 4.96	<u>1 Cm Voltage (mV)</u>	: 2.54	<u>SAR (W/Kg)</u>	: 0.22
--------------------------	--------	--------------------------	--------	-------------------	--------




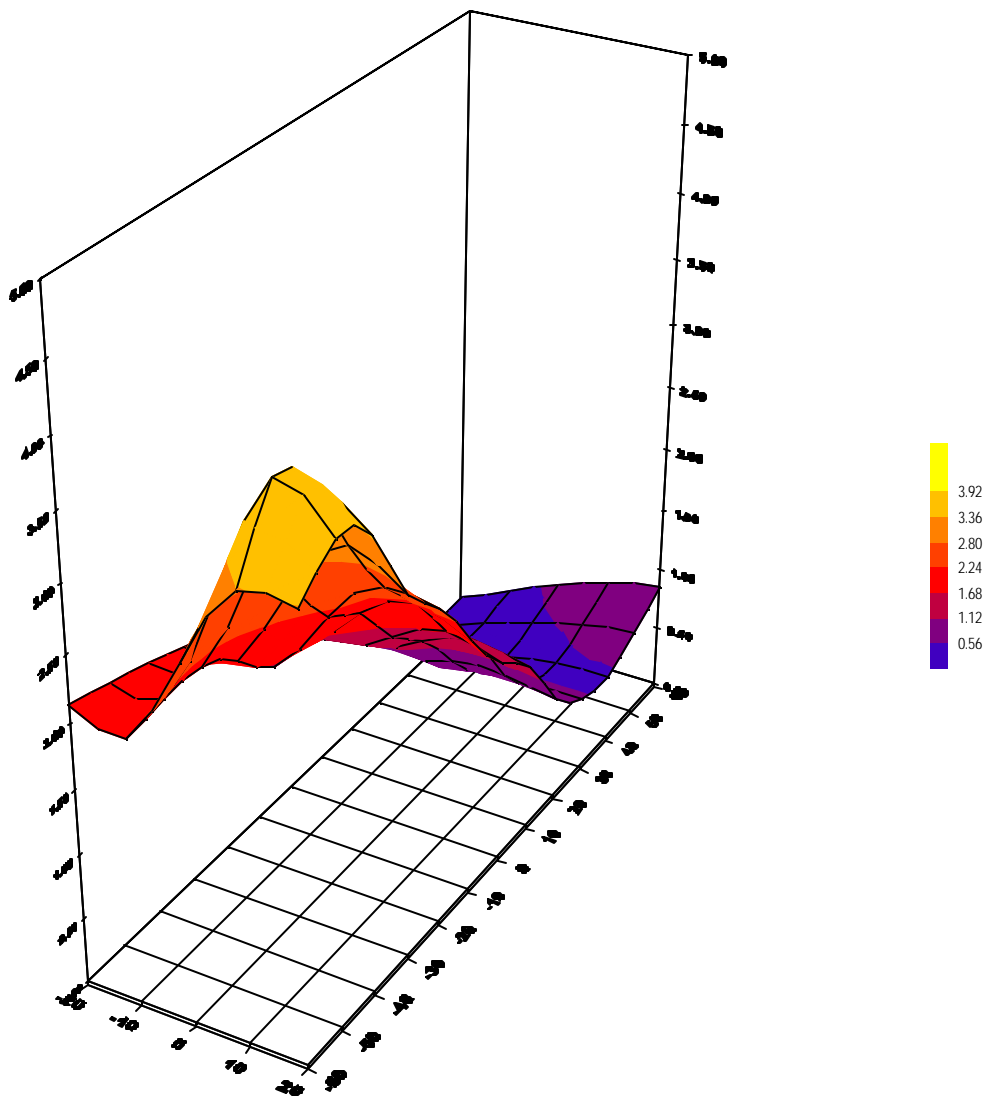


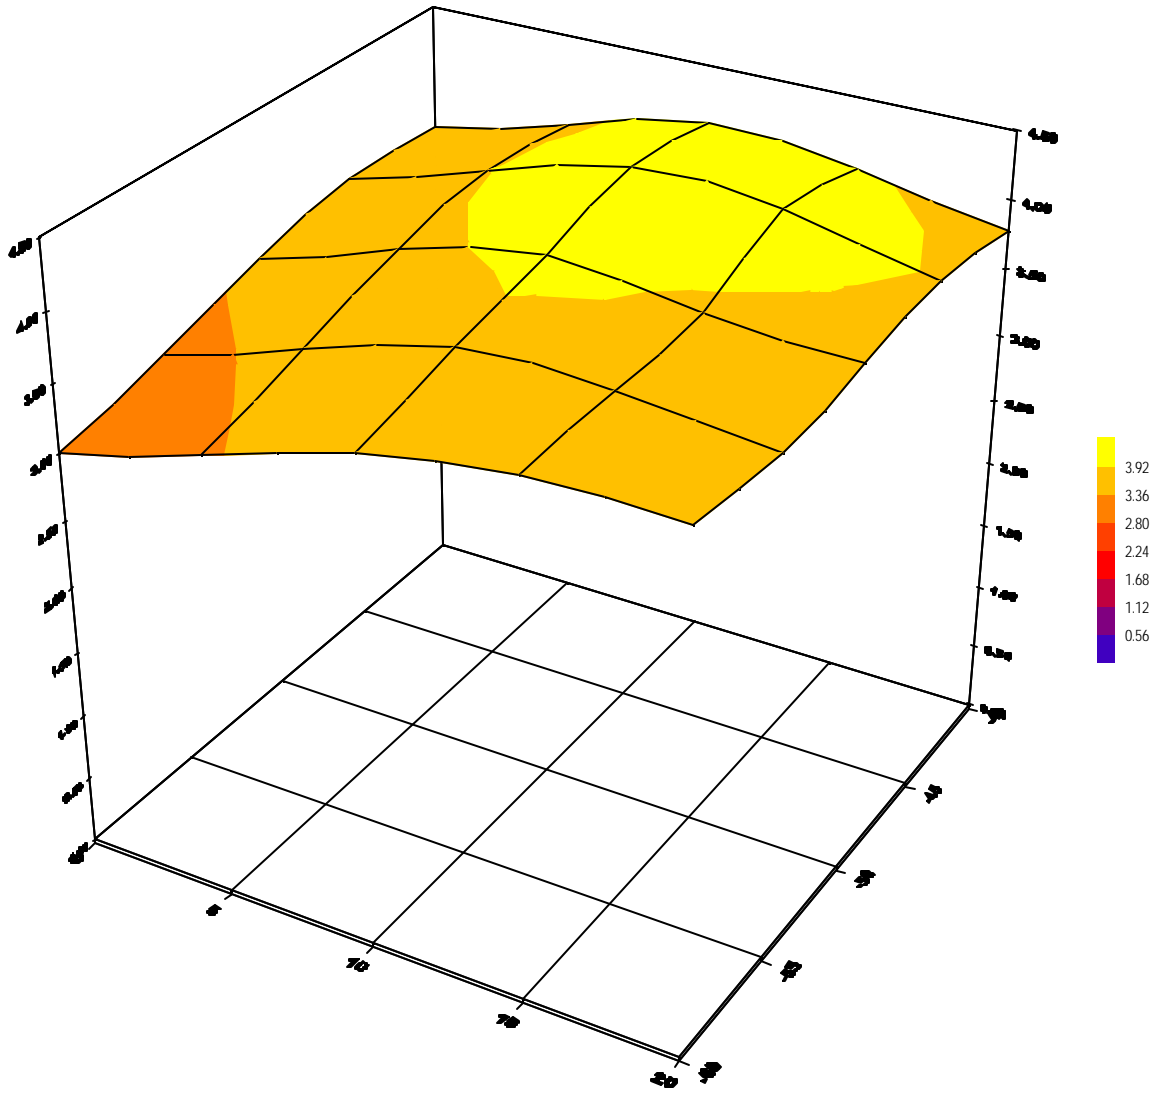

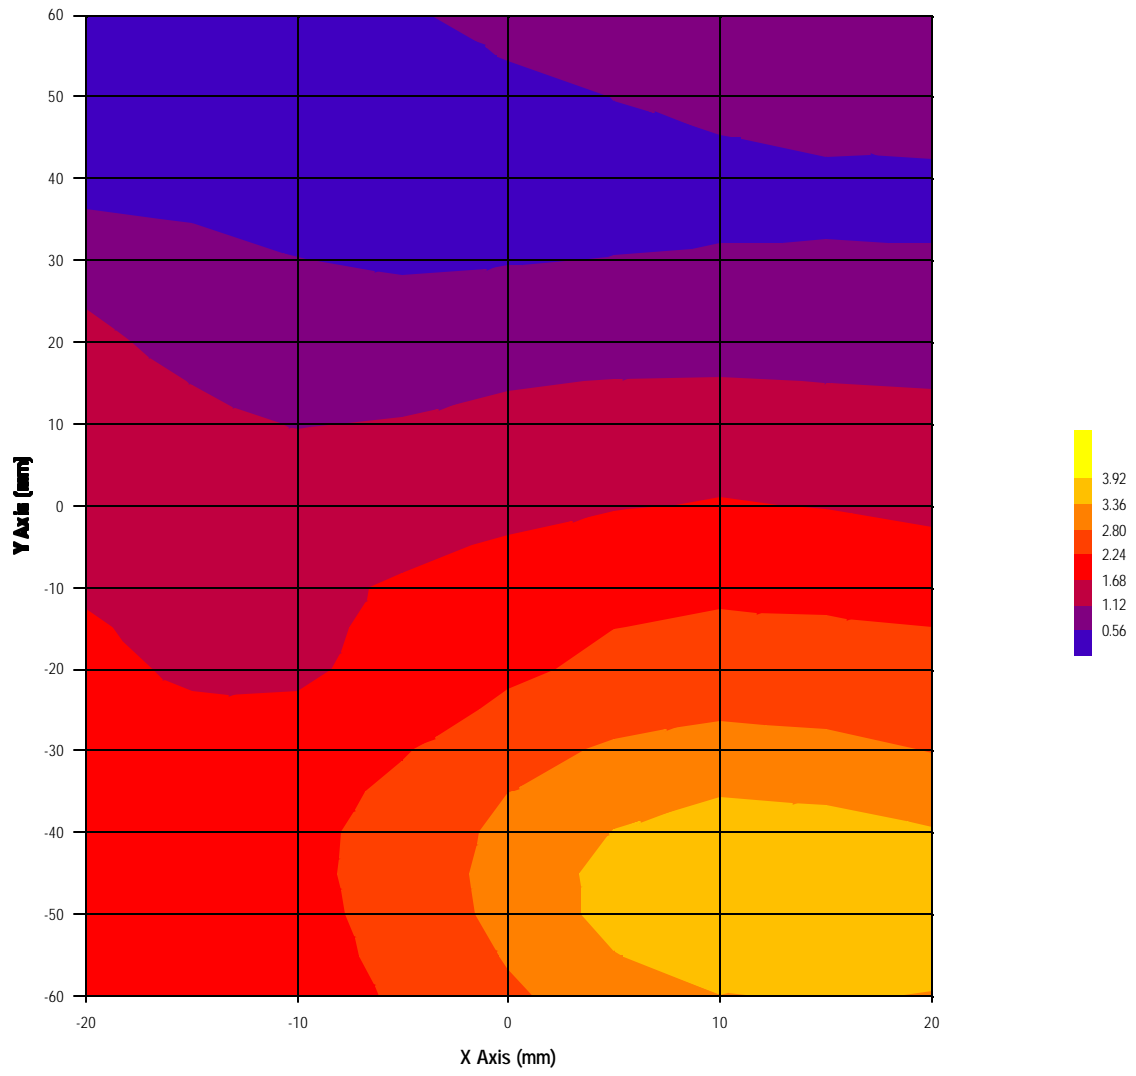

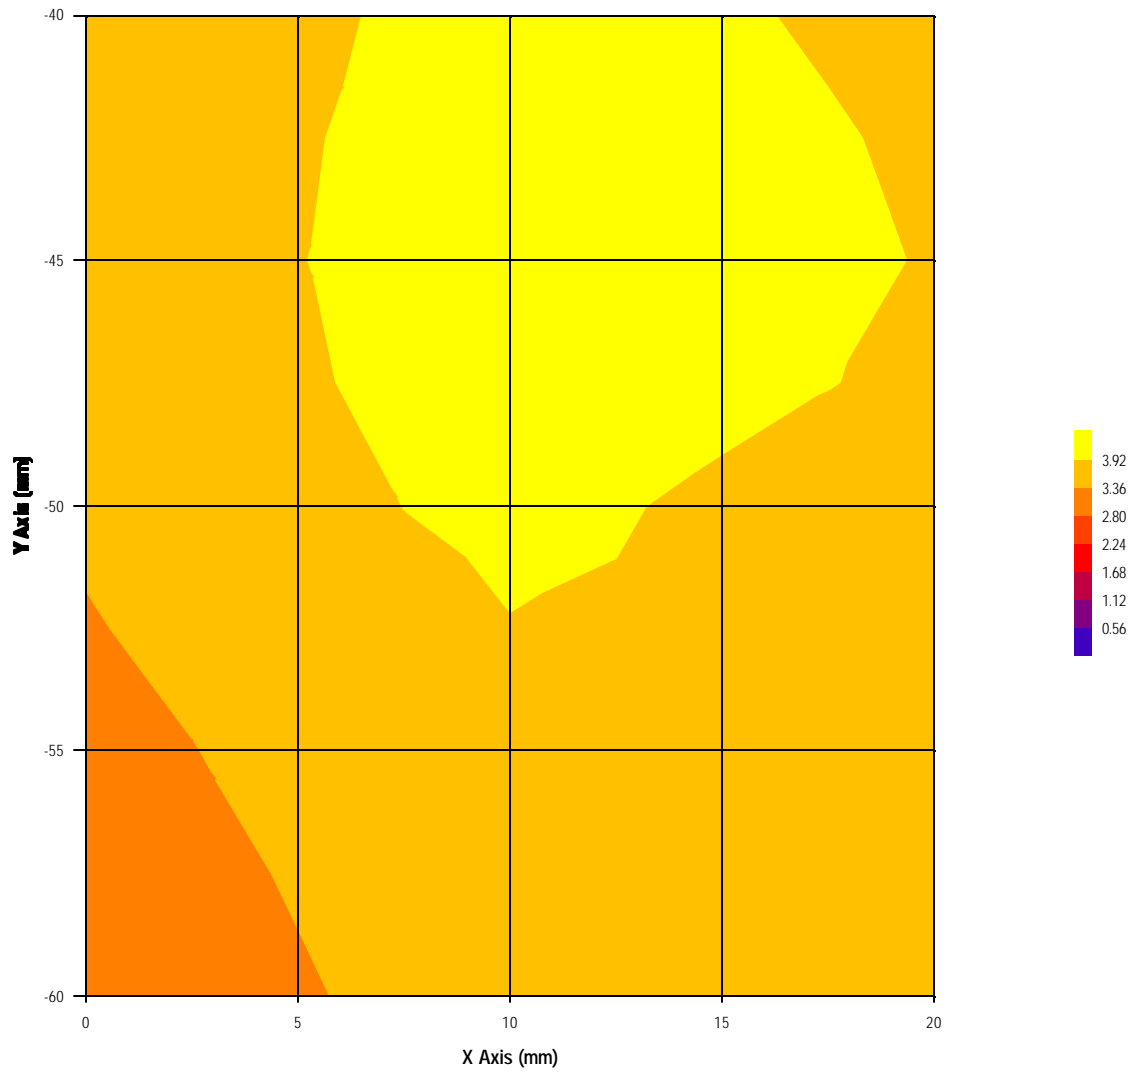

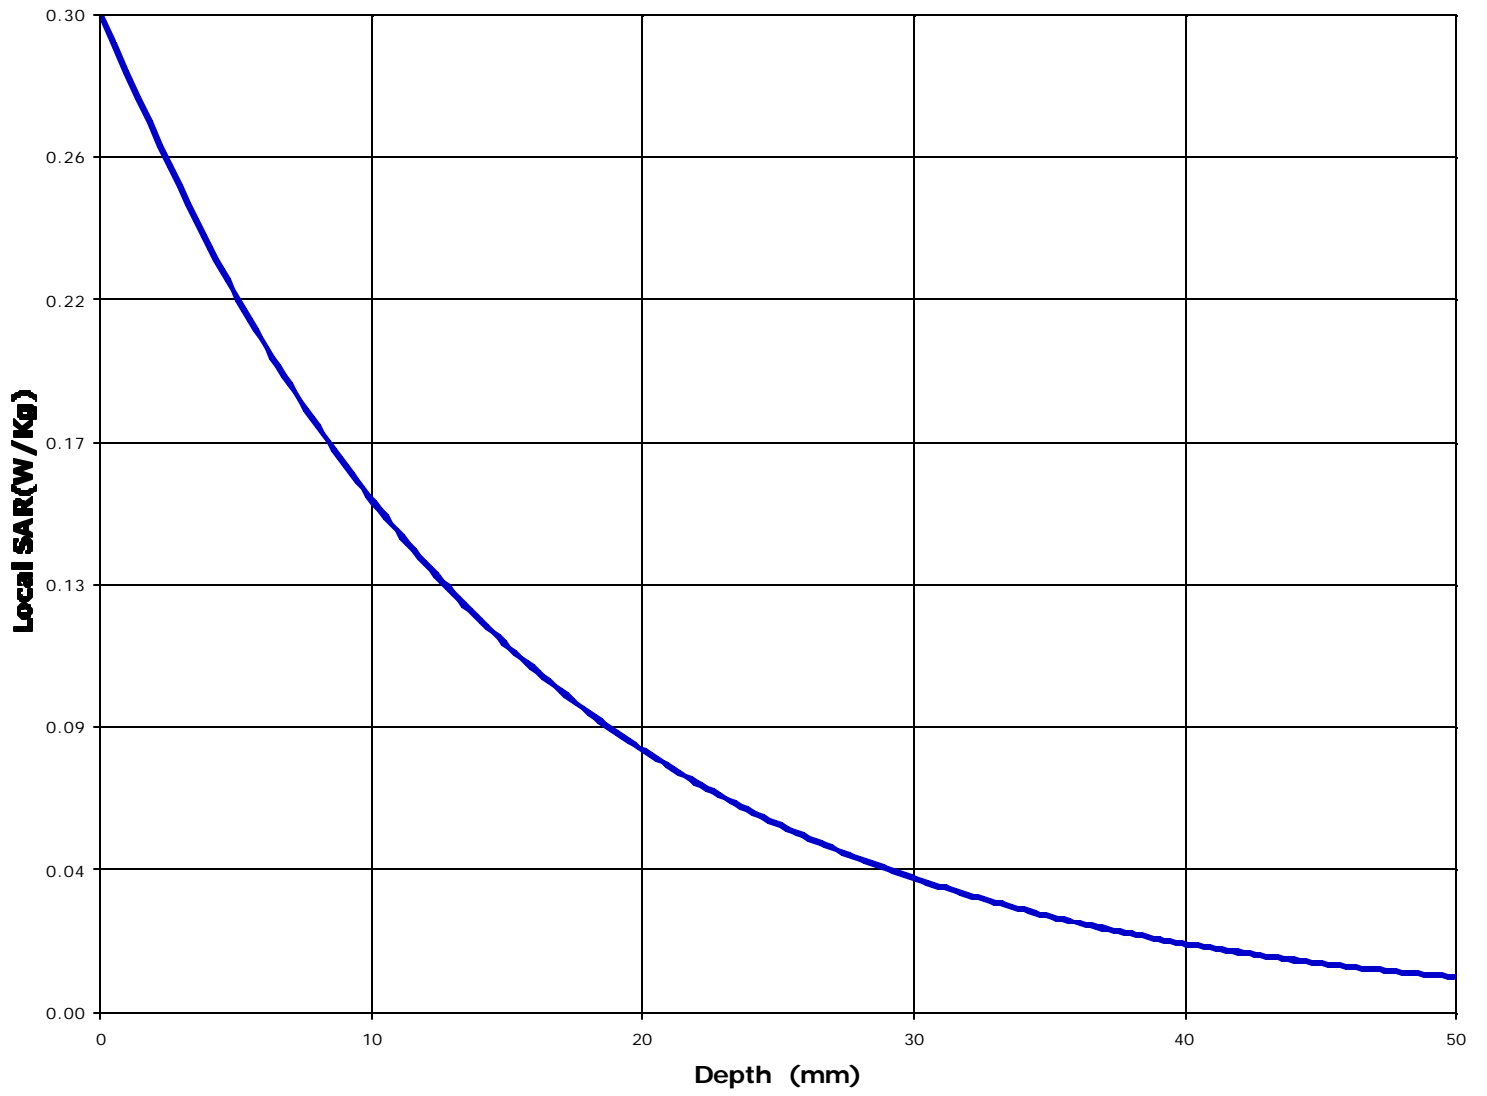

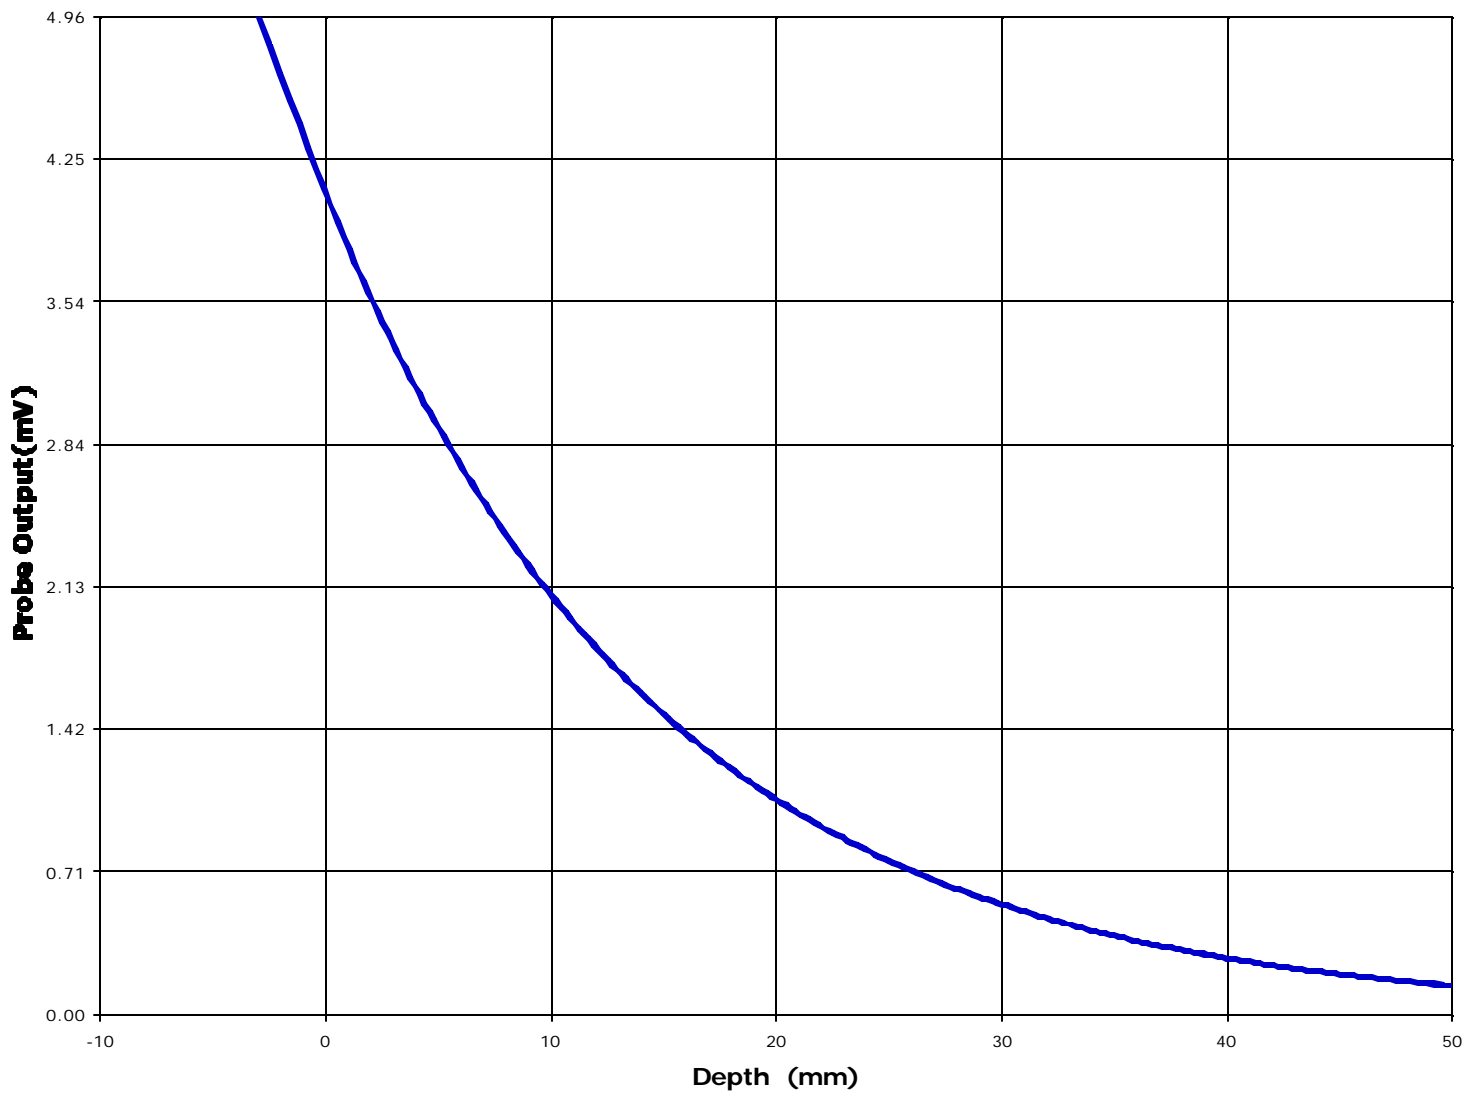

Test Information

Date : 5/23/00  
Time : 11:46:41 AM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :

X = 10                      Y = -50


Measured Values (mV) :


3.64	3.26	3.02	2.91	2.79	2.69
2.60	2.51	2.44	2.35	2.23	


<u>Peak Voltage (mV)</u>	: 4.16	<u>1 Cm Voltage (mV)</u>	: 2.36	<u>SAR (W/Kg)</u>	: 0.21
--------------------------	--------	--------------------------	--------	-------------------	--------

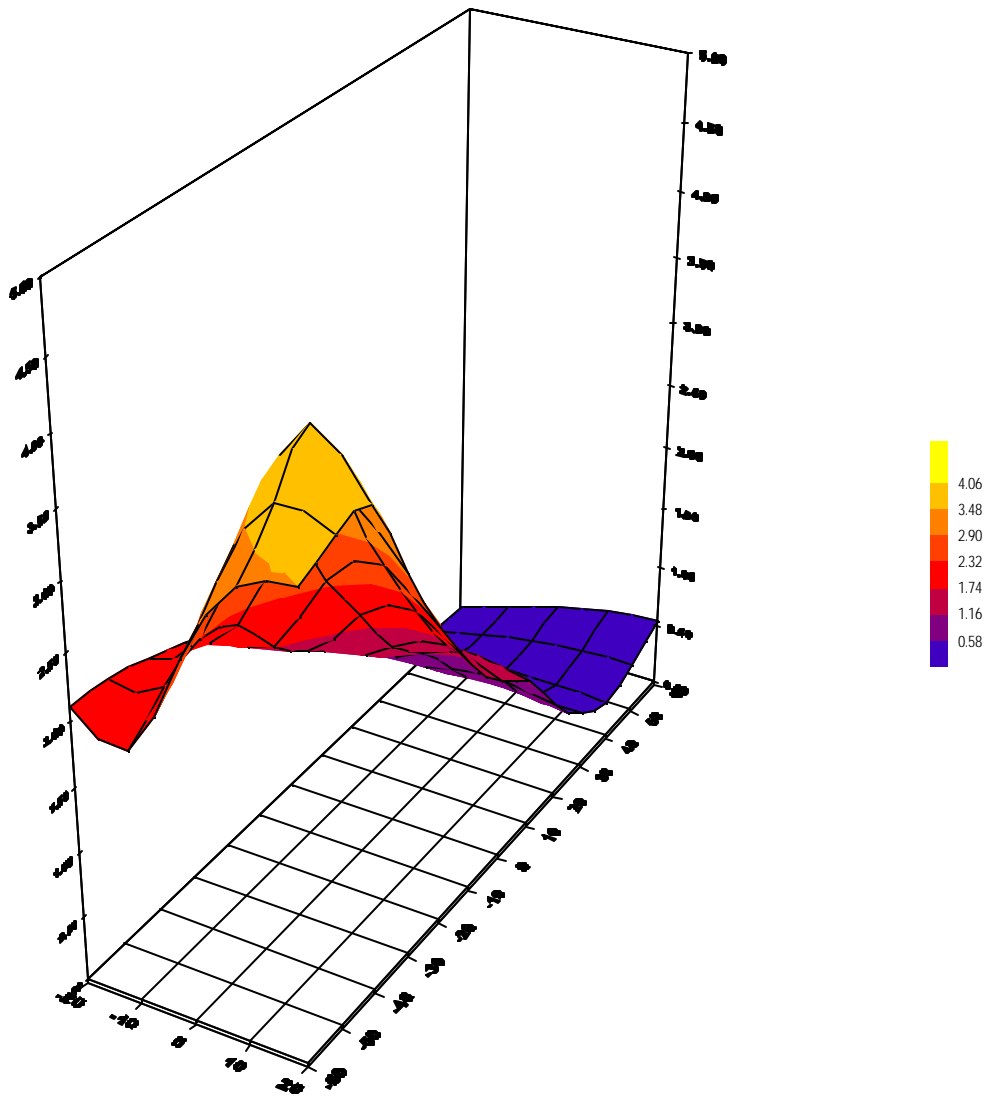





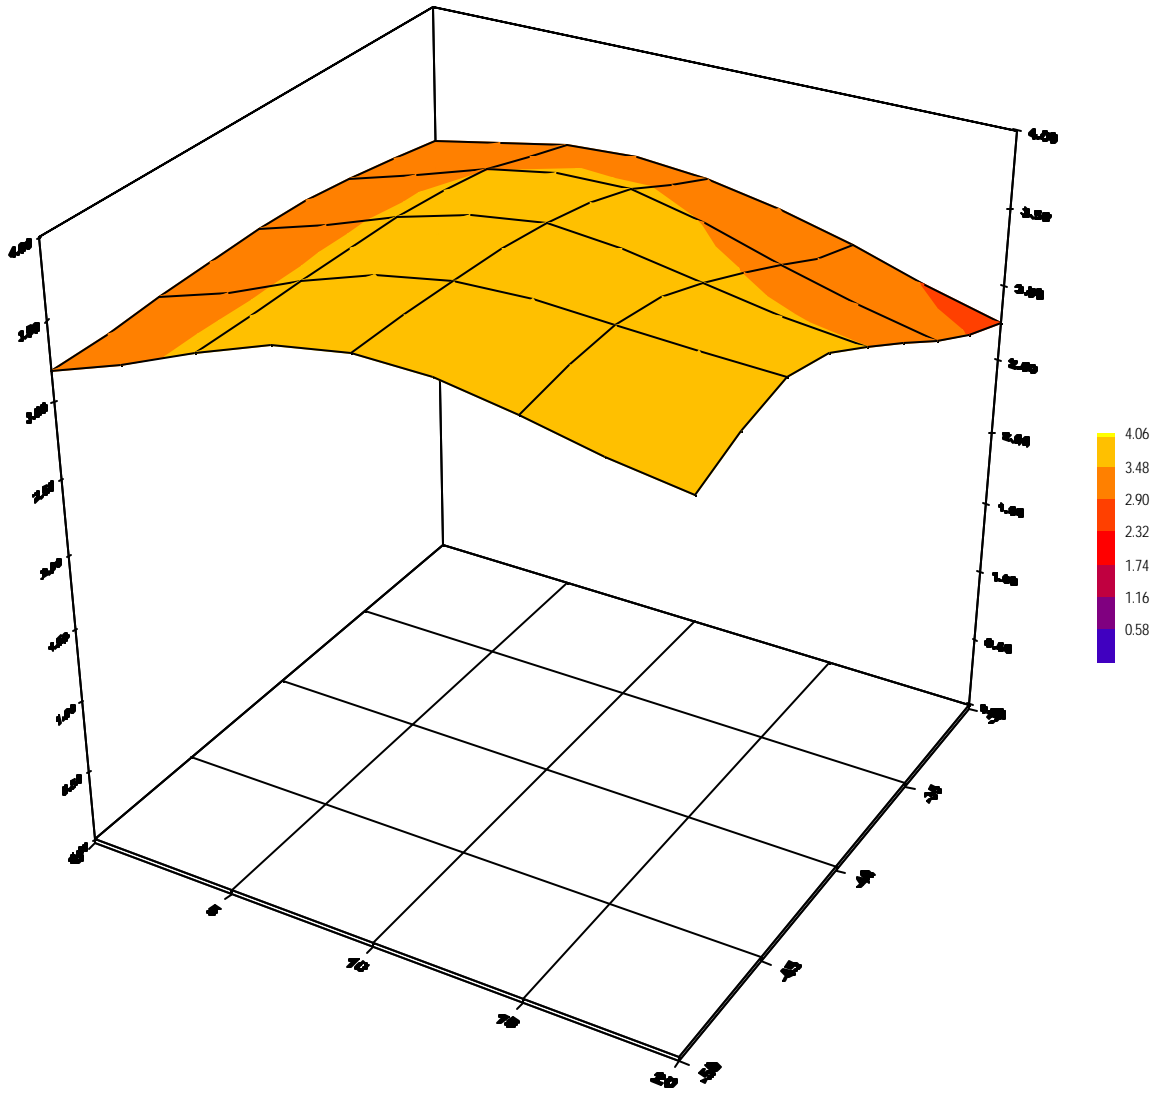

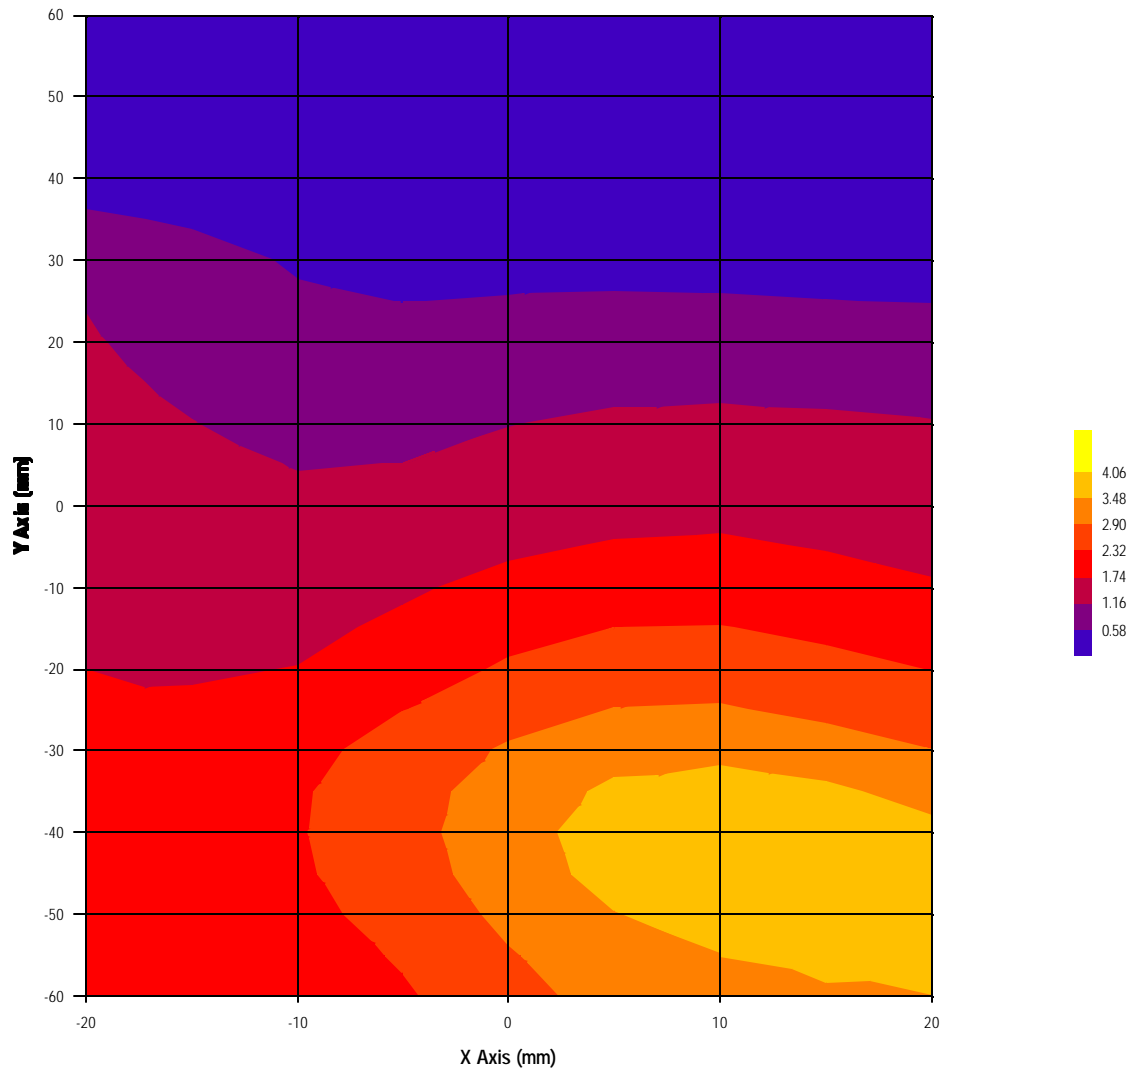

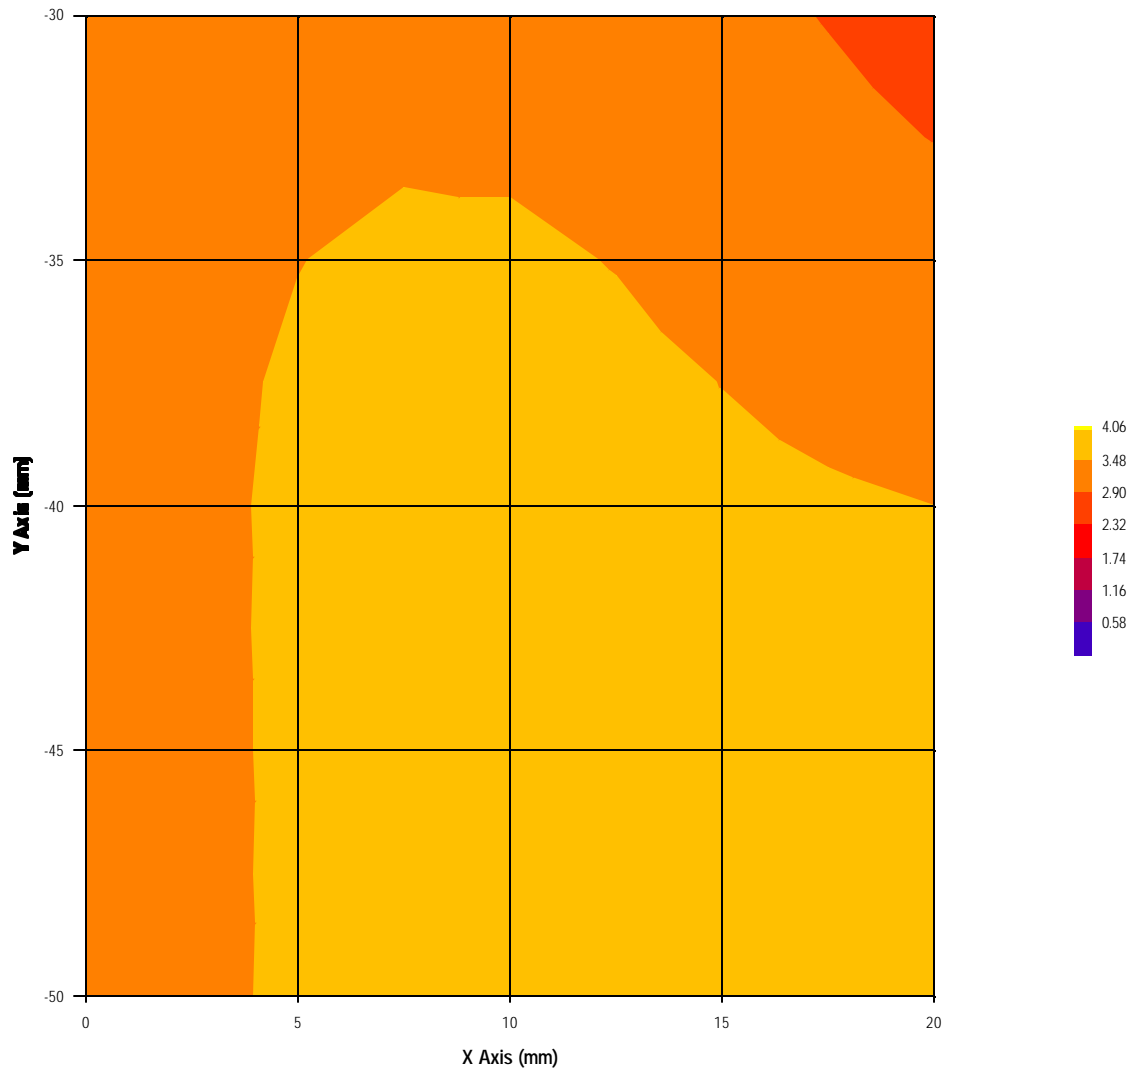

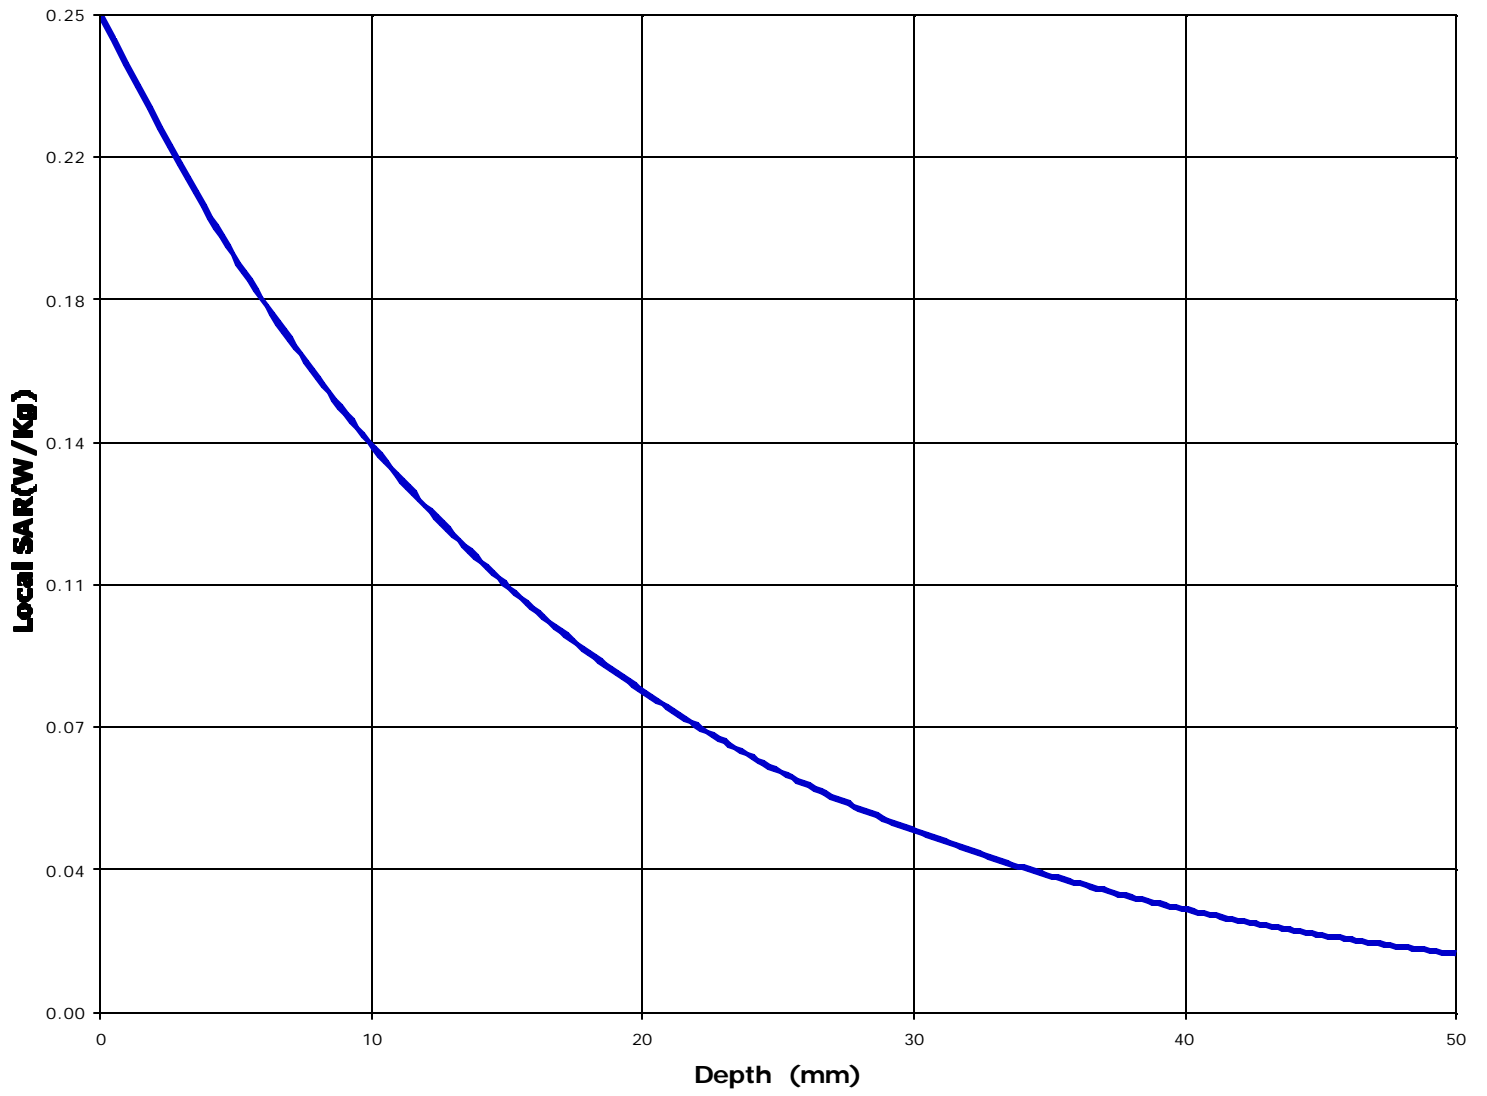

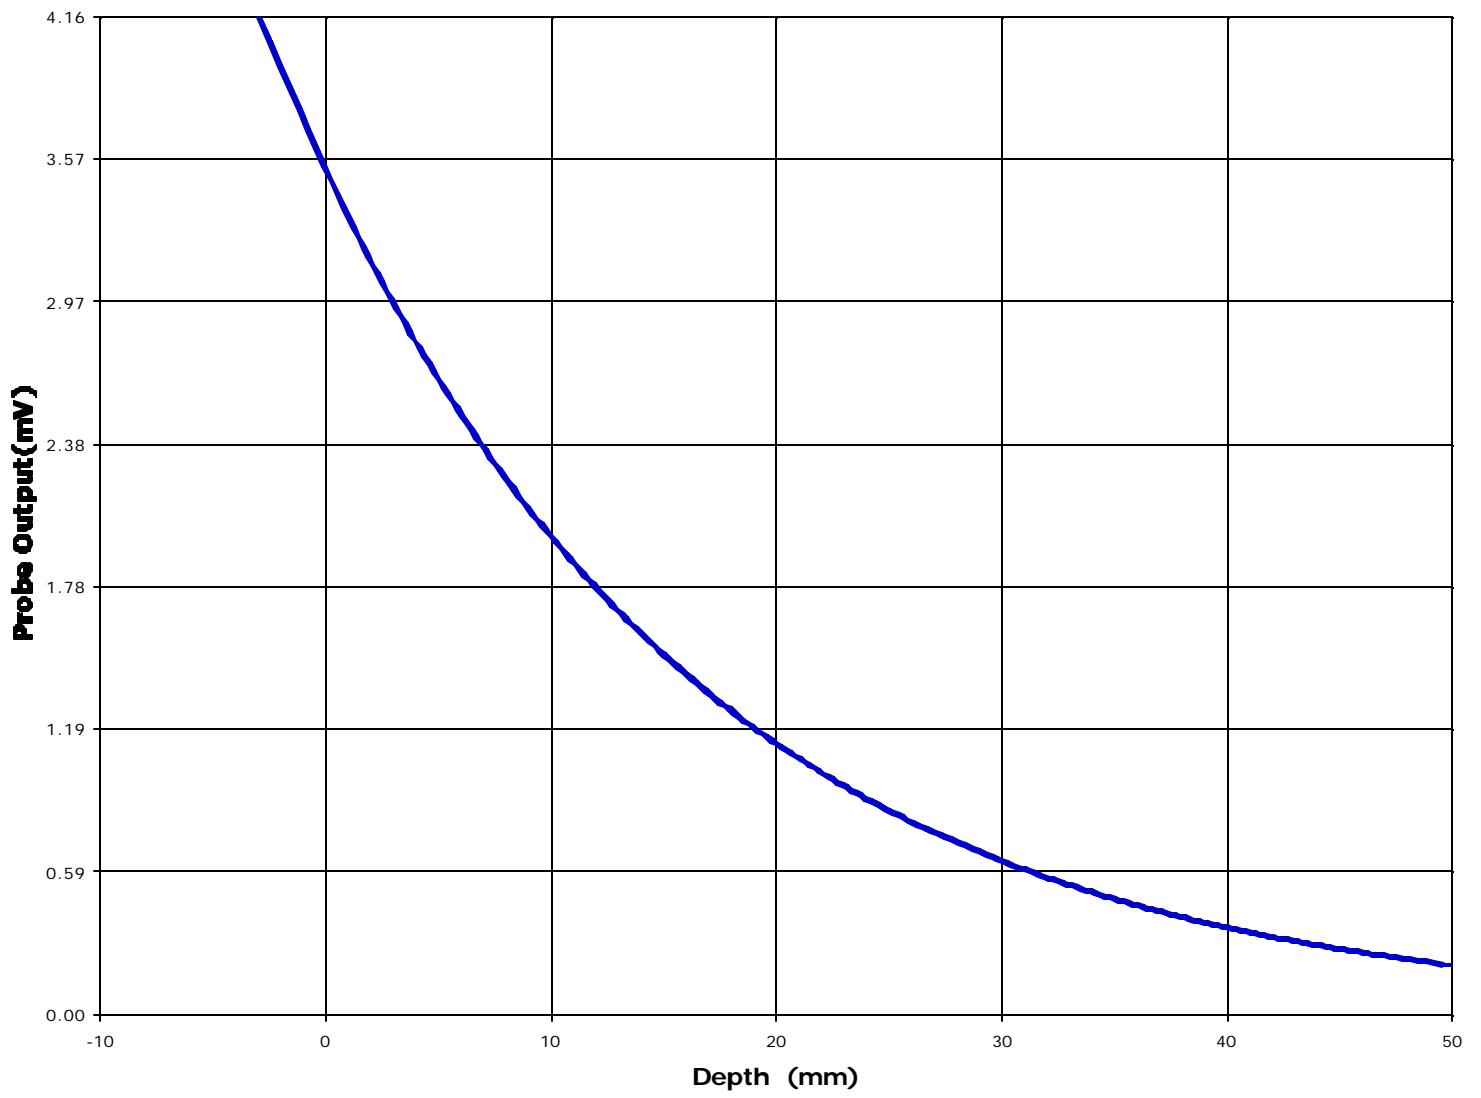

Test Information

Date : 5/23/00  
Time : 12:13:40 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 20                      Y = -45

Measured Values (mV) :


4.03	3.51	3.23	3.00	2.89	2.76
2.69	2.74	2.63	2.51	2.43	


<u>Peak Voltage (mV)</u>	: 4.60	<u>1 Cm Voltage (mV)</u>	: 2.50	<u>SAR (W/Kg)</u>	: 0.26
--------------------------	--------	--------------------------	--------	-------------------	--------

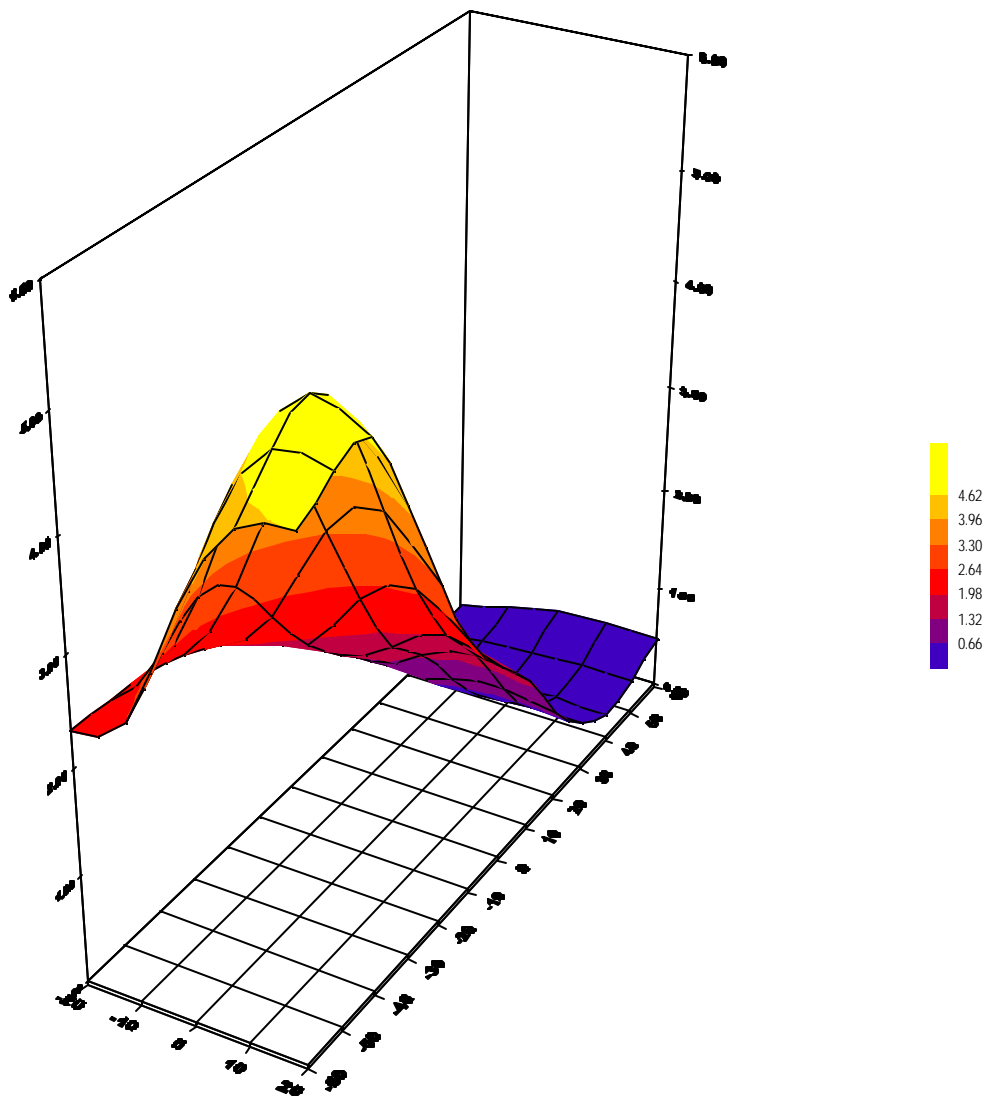


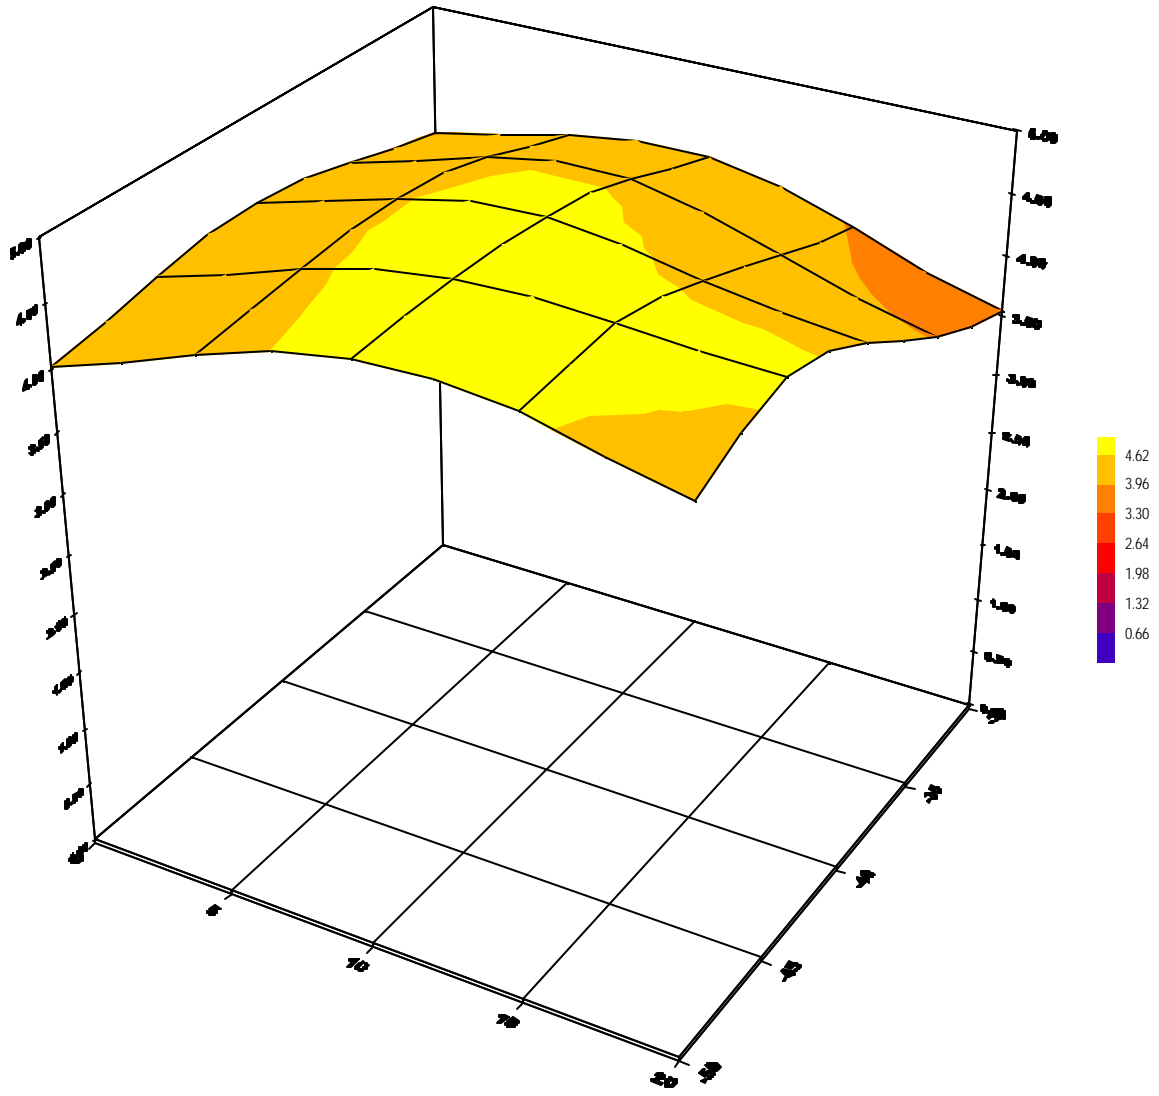




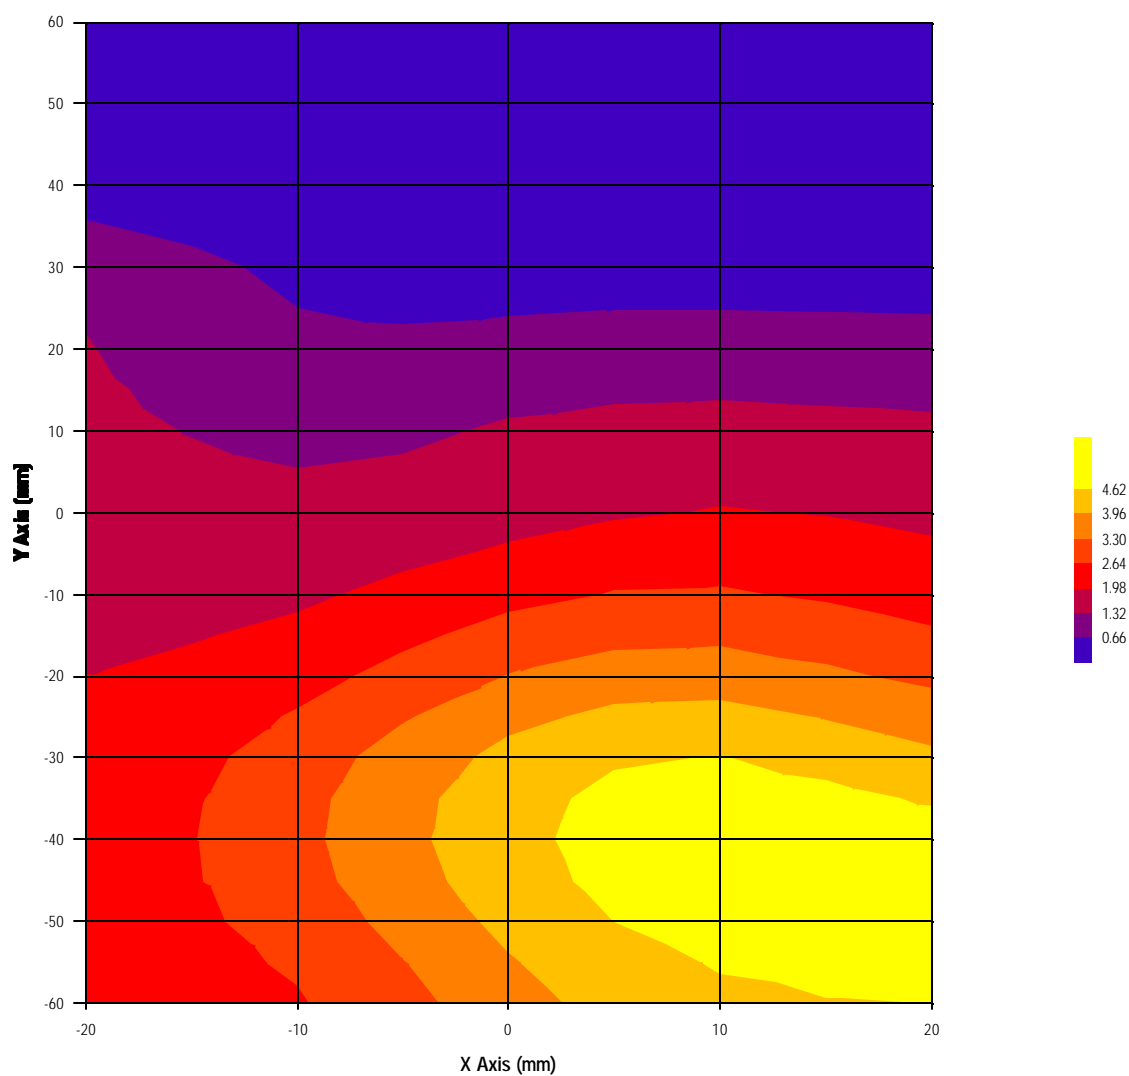

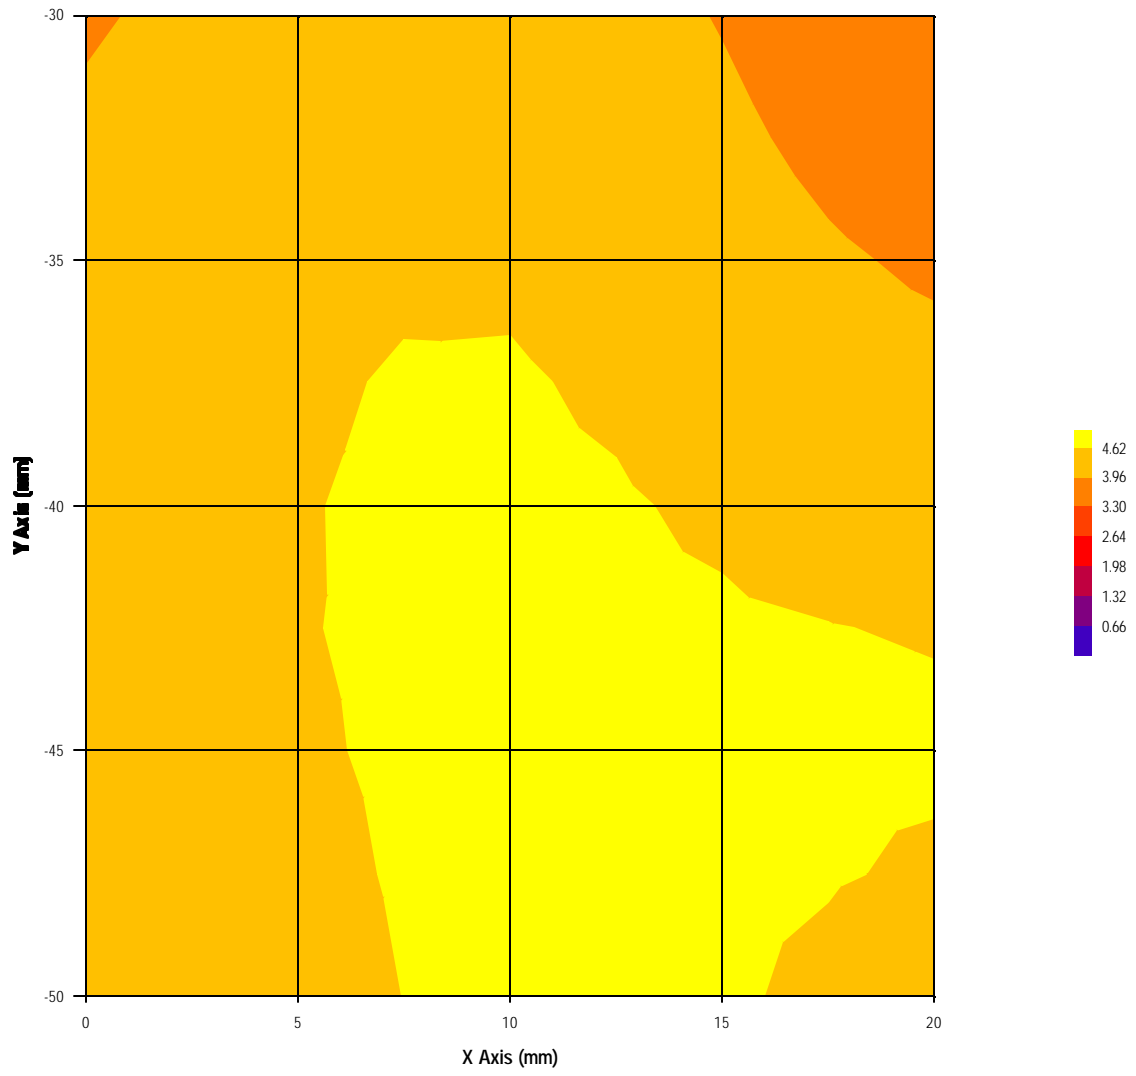

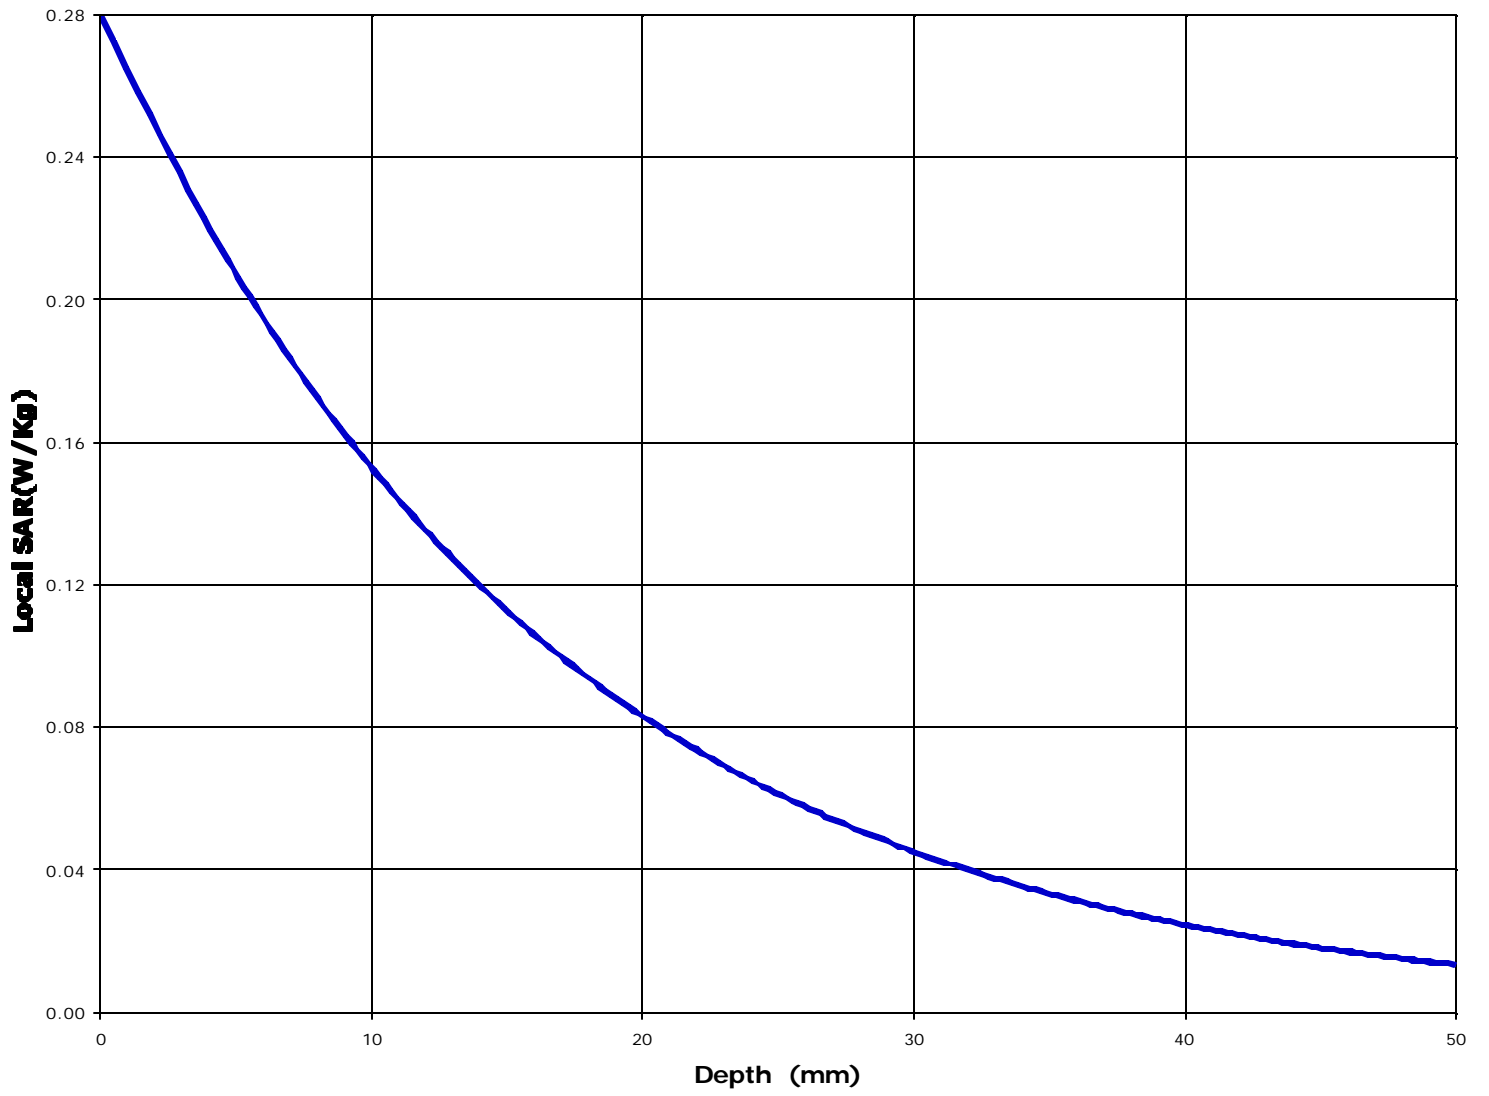

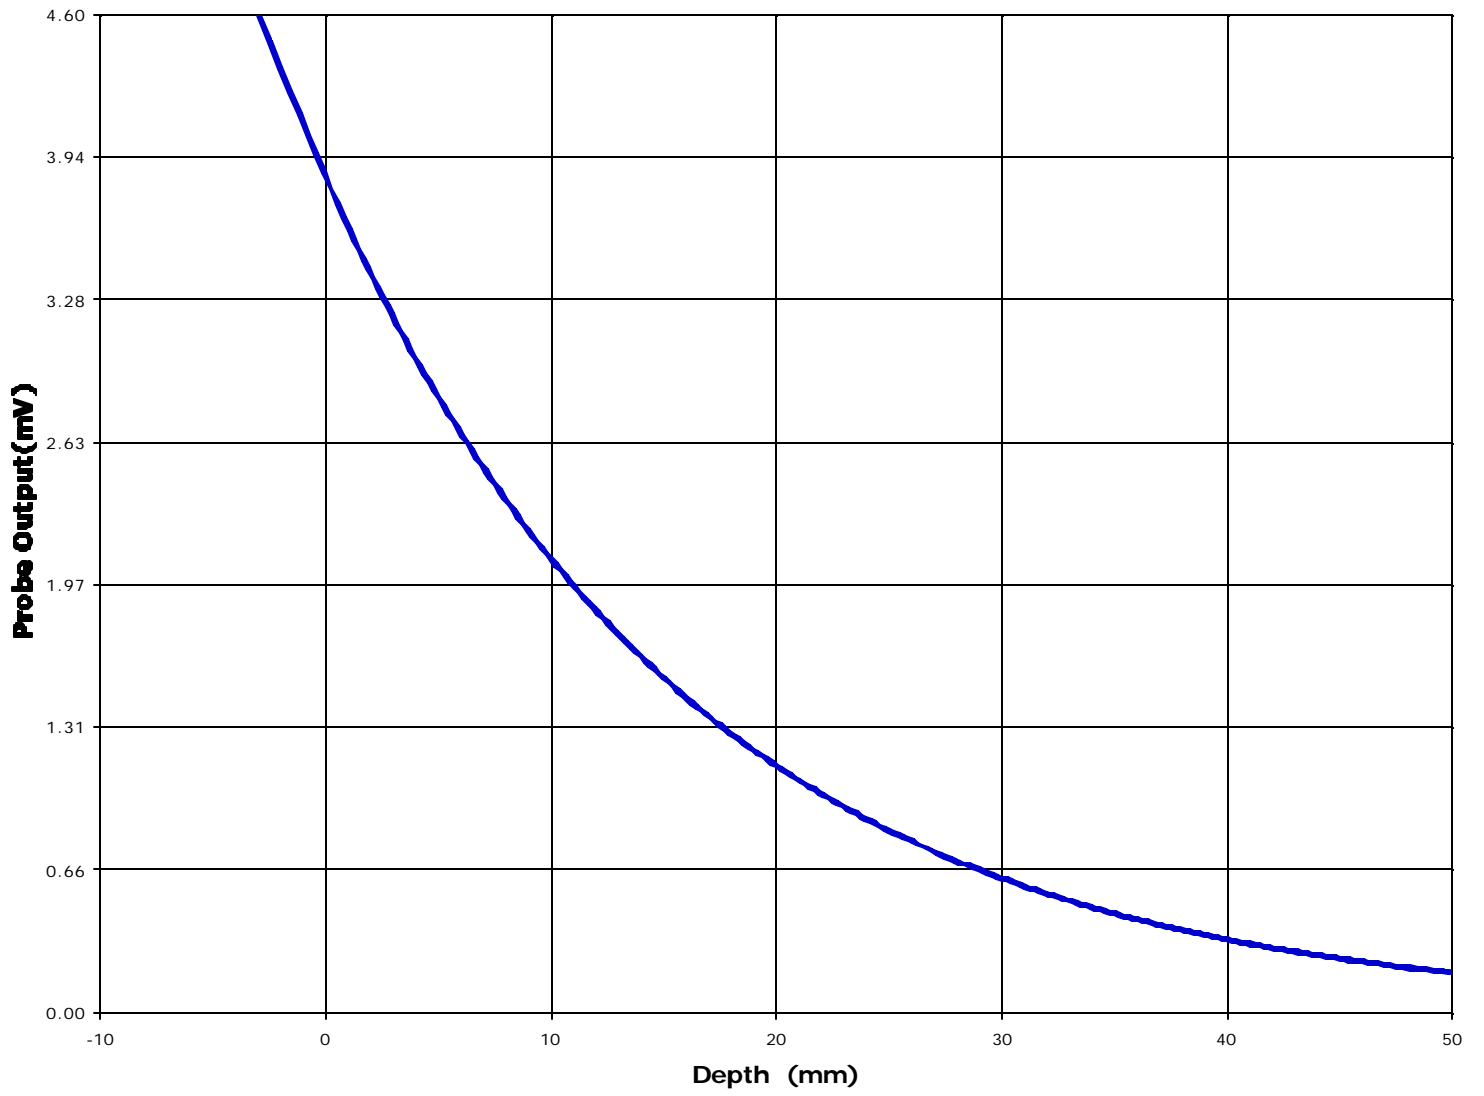

## **ANNEX E: Head left ear with retractable antenna fully extended SAR MEASUREMENT**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ELT-002Q**  
**June 12, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 5/23/00  
Time : 1:32:32 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.6 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.7 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 15                      Y = -45

Measured Values (mV) :


20.92	18.51	17.14	15.92	15.06	14.51
13.84	13.29	12.80	12.38	11.89	


<u>Peak Voltage (mV)</u>	: 23.94	<u>1 Cm Voltage (mV)</u>	: 13.29	<u>SAR (W/Kg)</u>	: 1.10
--------------------------	---------	--------------------------	---------	-------------------	--------

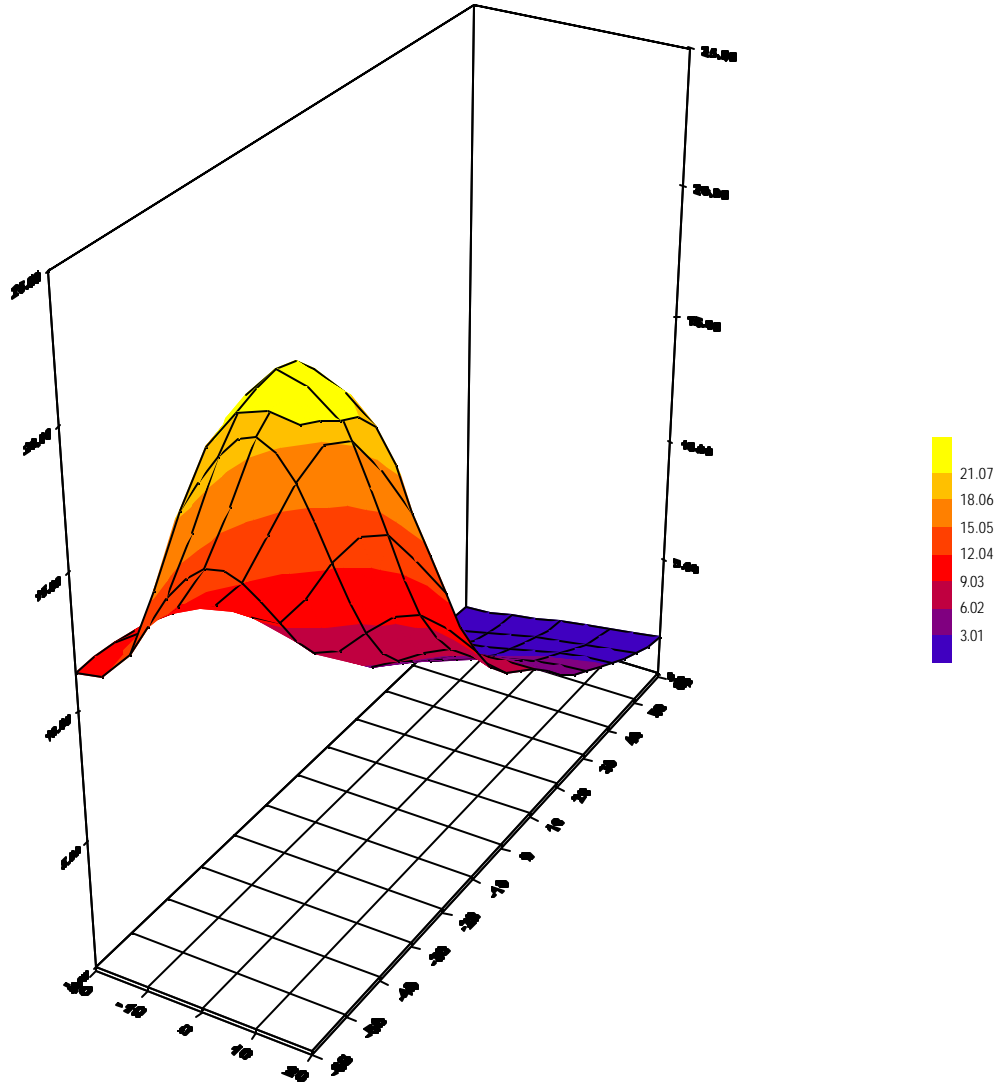


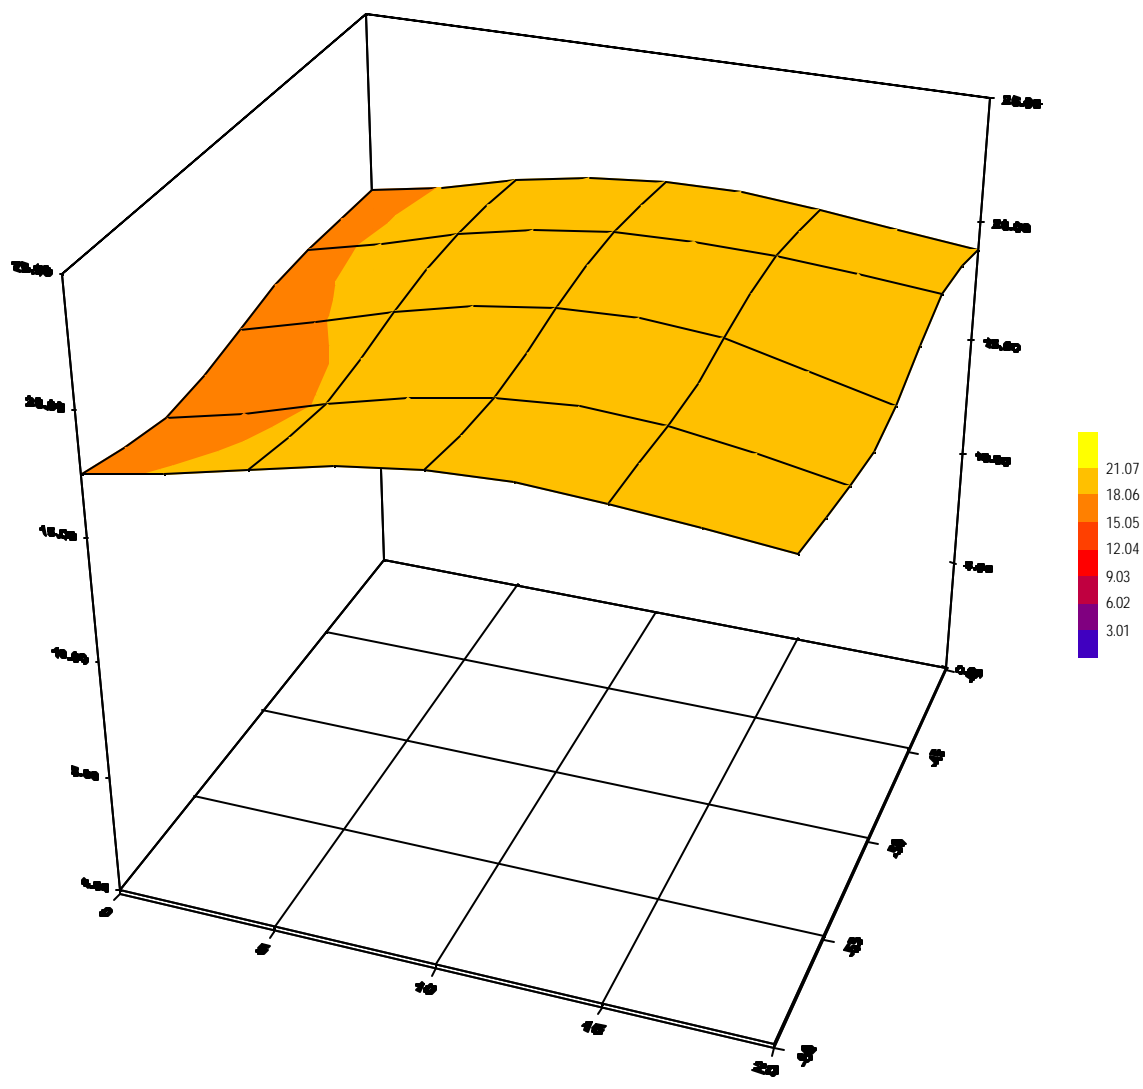




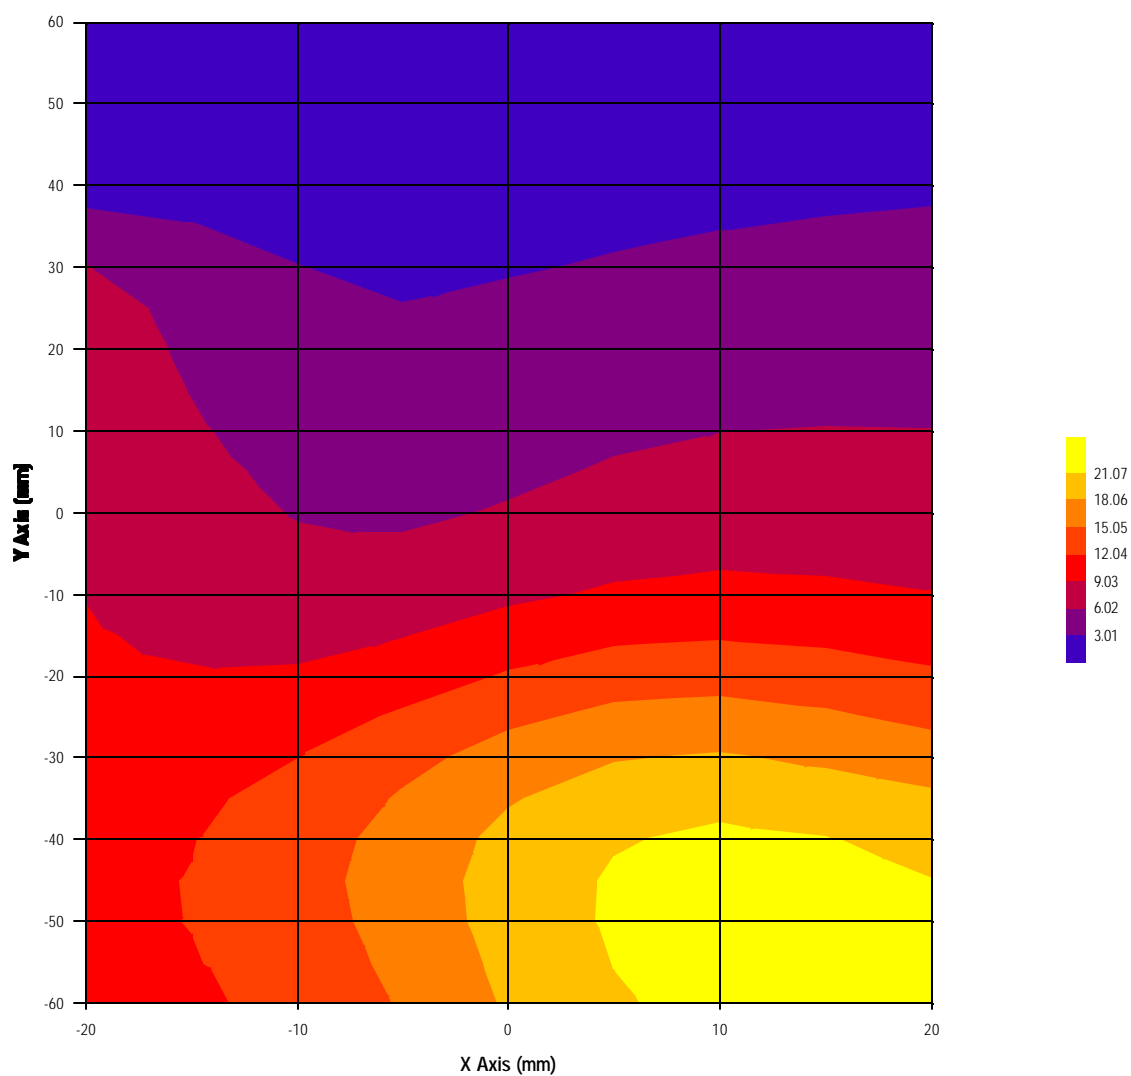

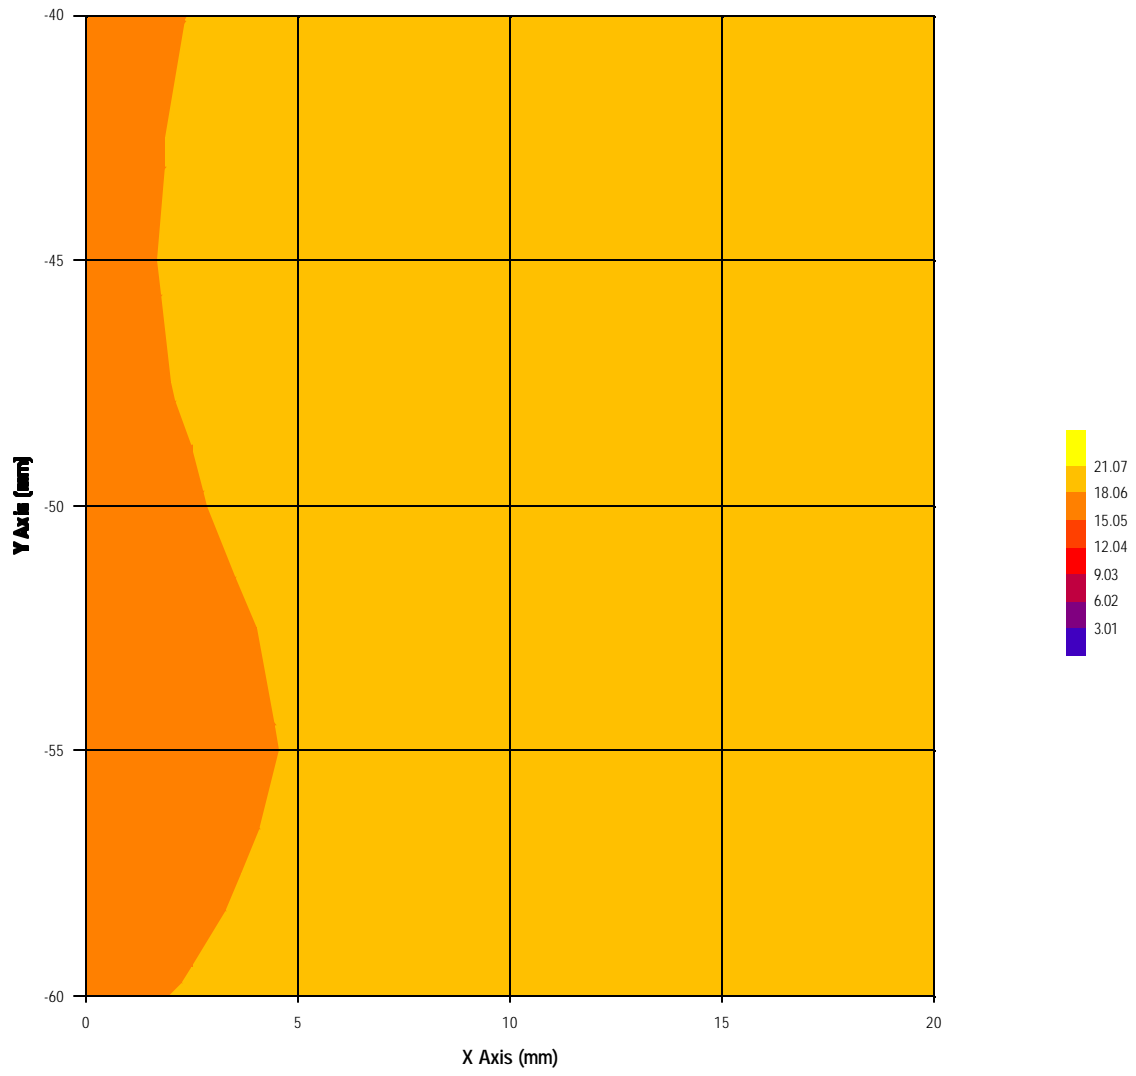

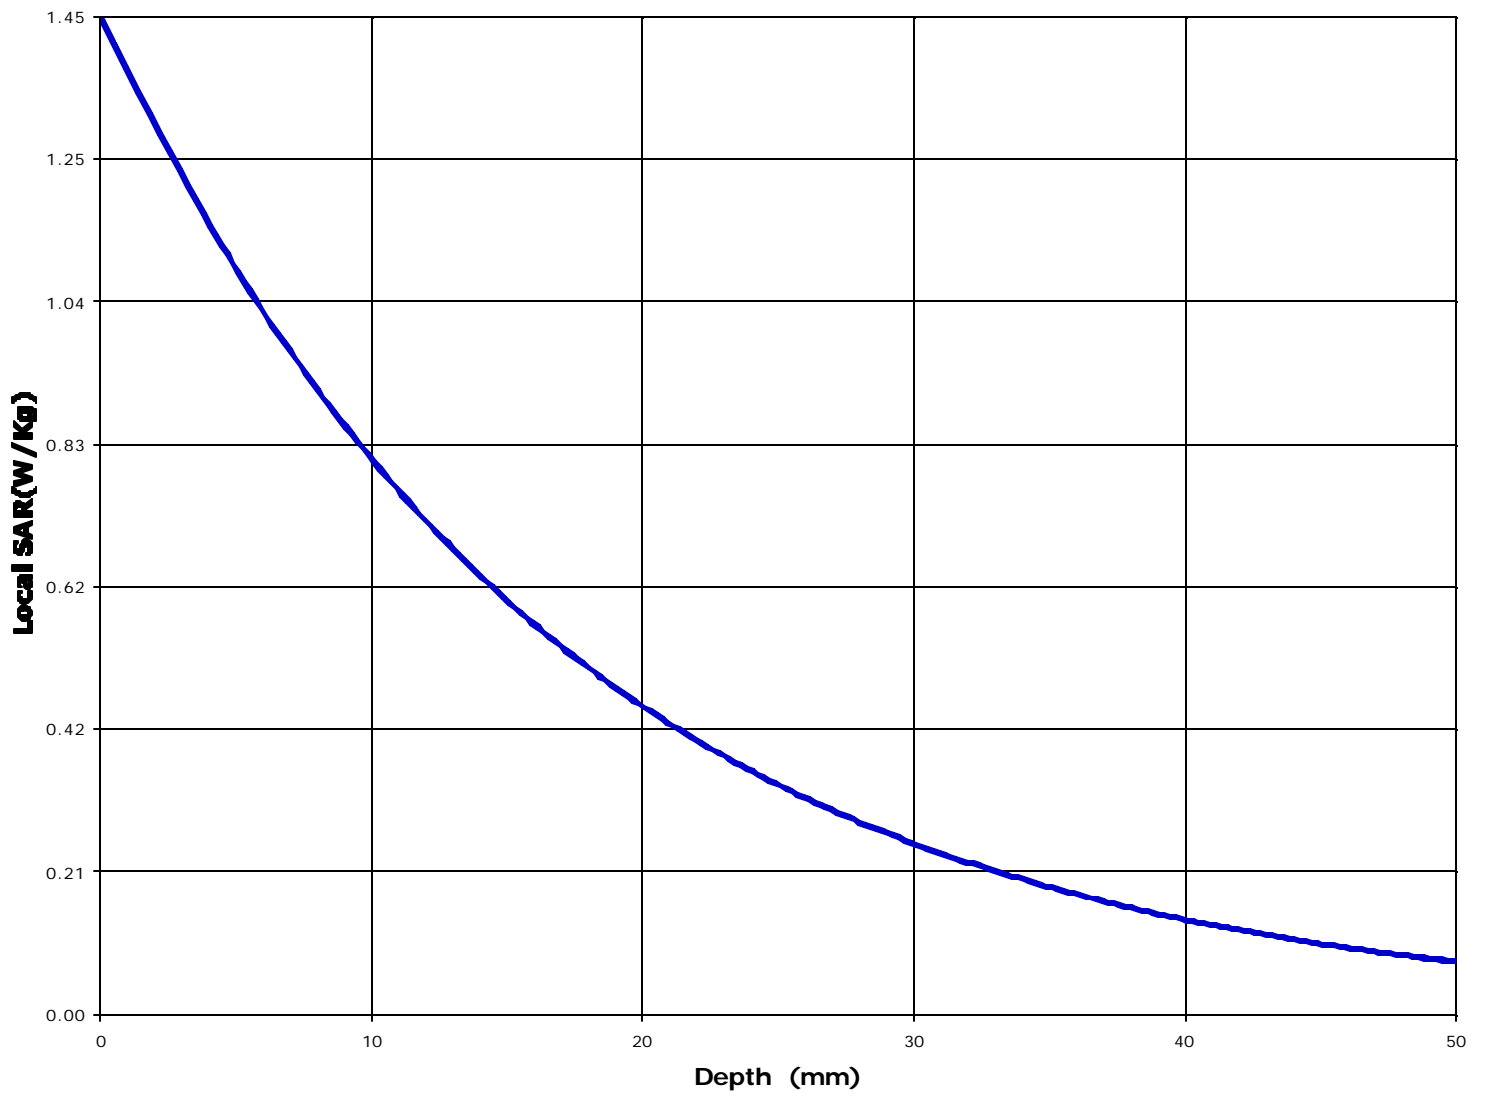

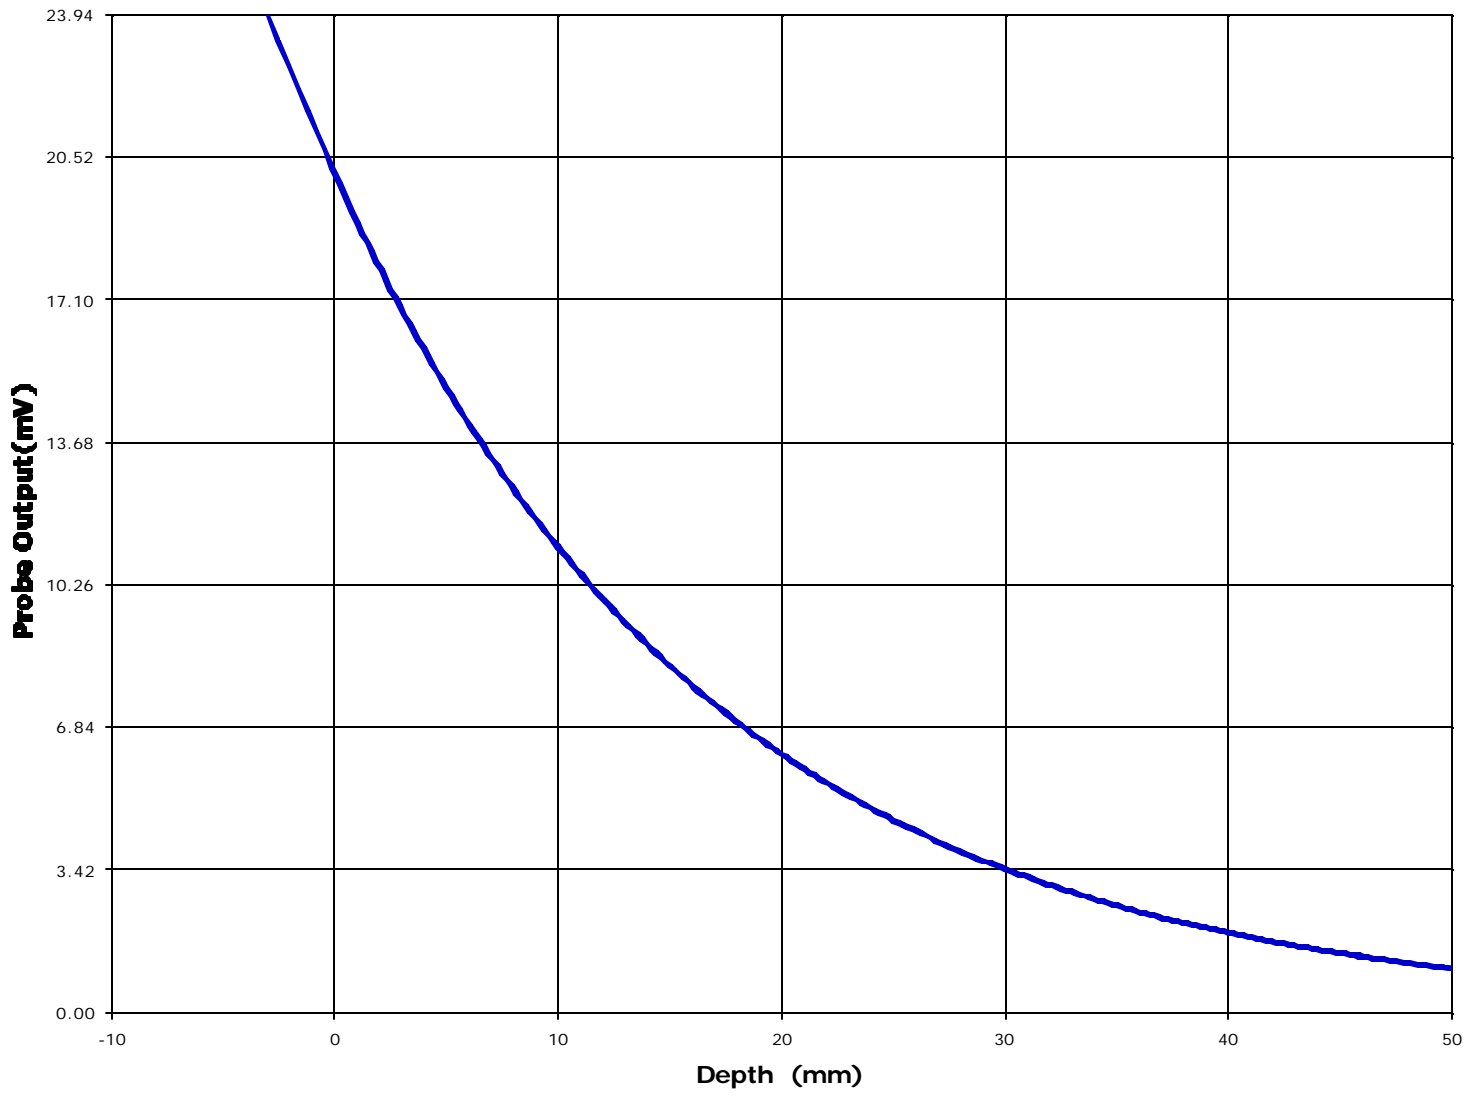

Test Information

Date : 5/23/00  
Time : 1:45:58 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.7 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.8 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------



Location of Maximum Field :


X = 10                      Y = -50


Measured Values (mV) :

21.86	20.10	18.77	17.68	16.98	16.18
15.58	15.14	14.57	13.94	13.45	


<u>Peak Voltage (mV)</u>	: 24.88	<u>1 Cm Voltage (mV)</u>	: 14.93	<u>SAR (W/Kg)</u>	: 1.23
--------------------------	---------	--------------------------	---------	-------------------	--------

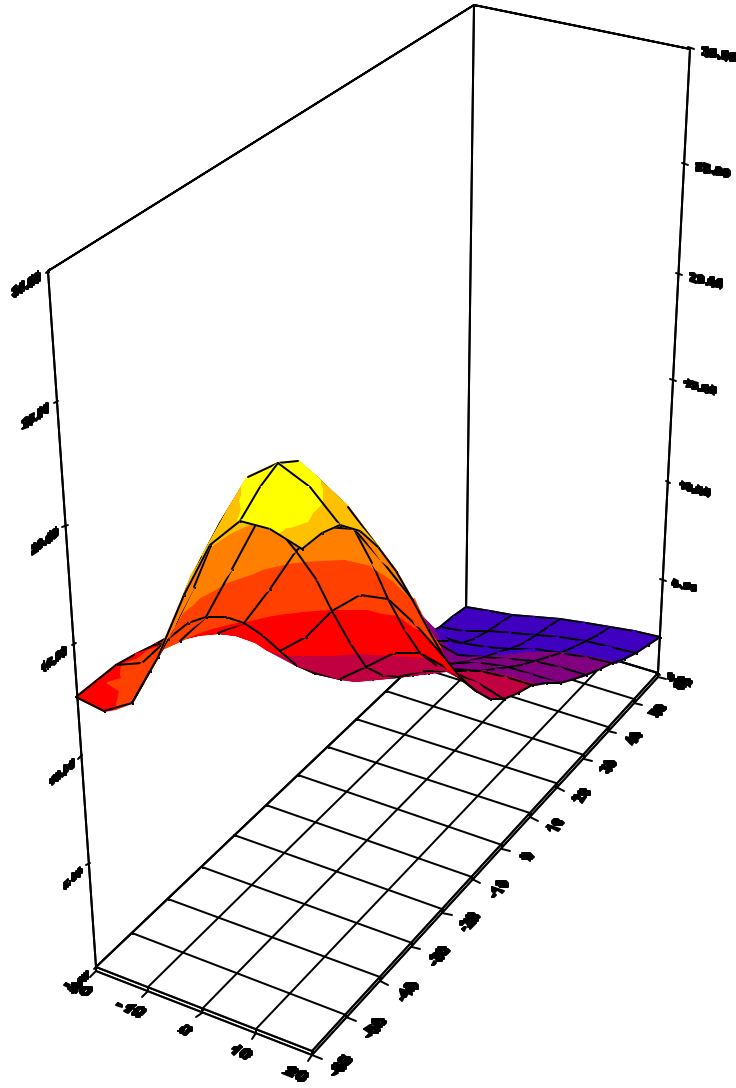


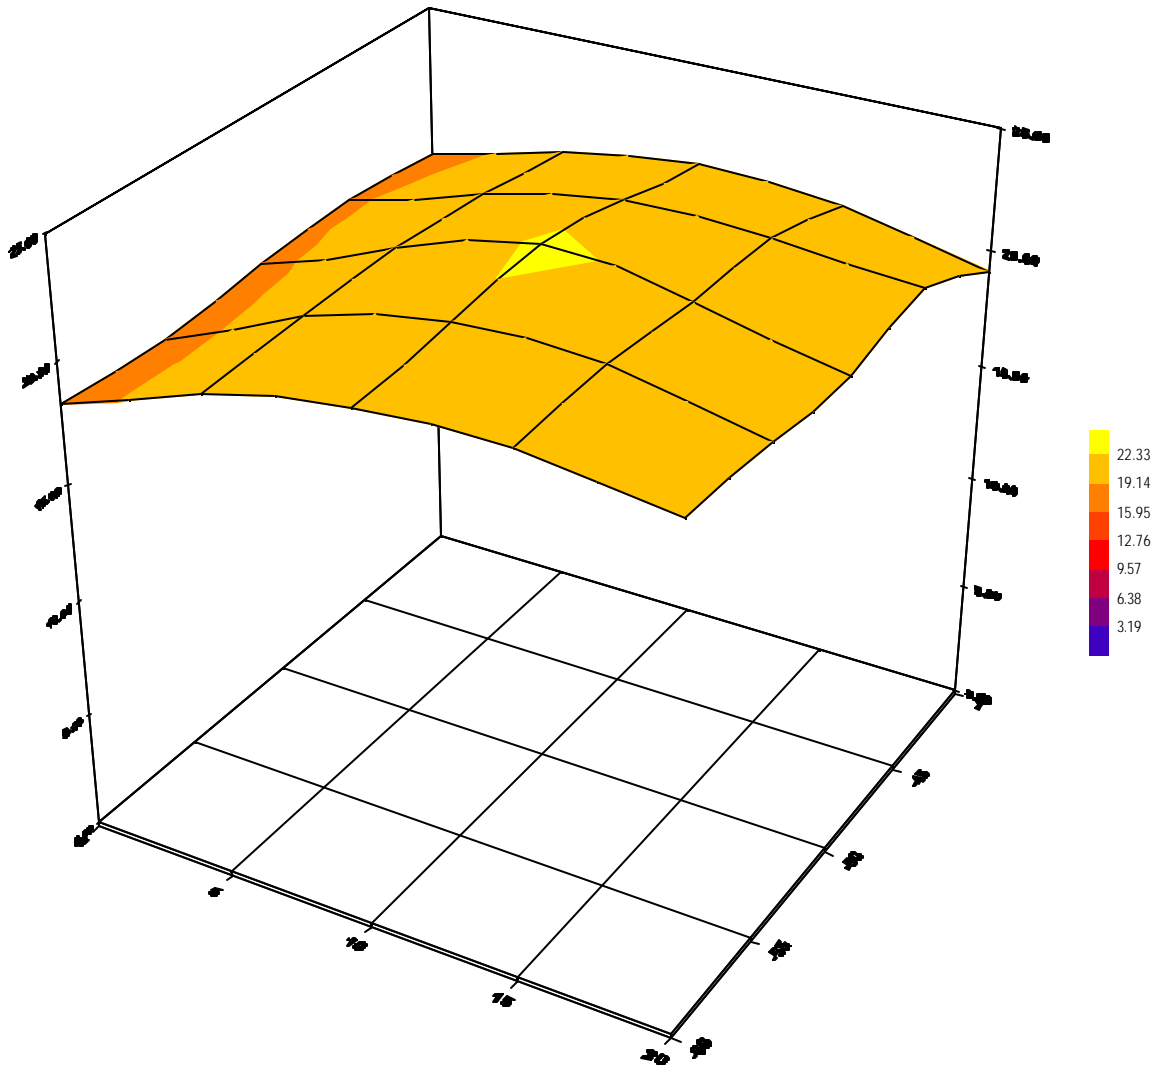


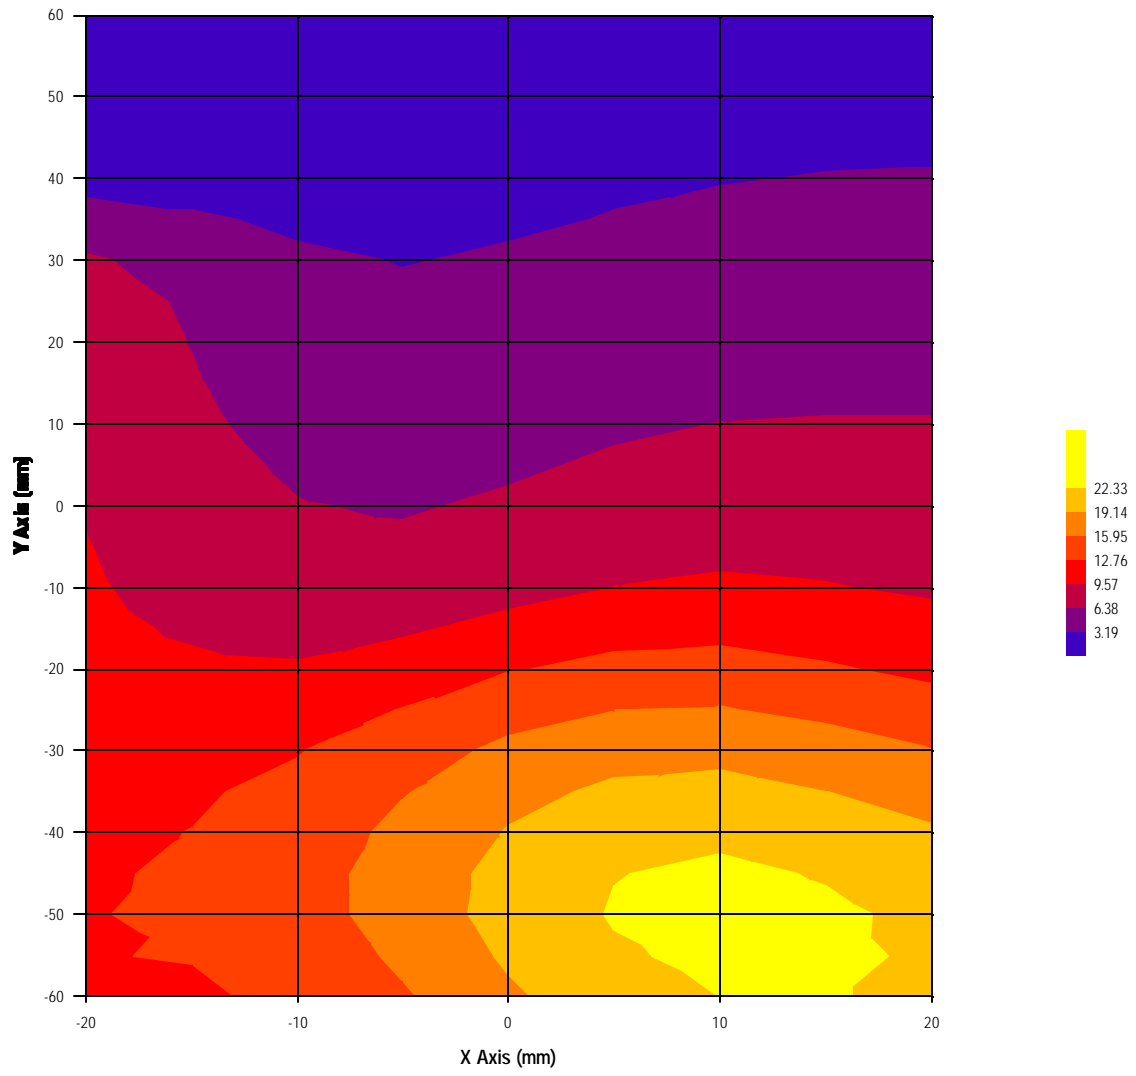



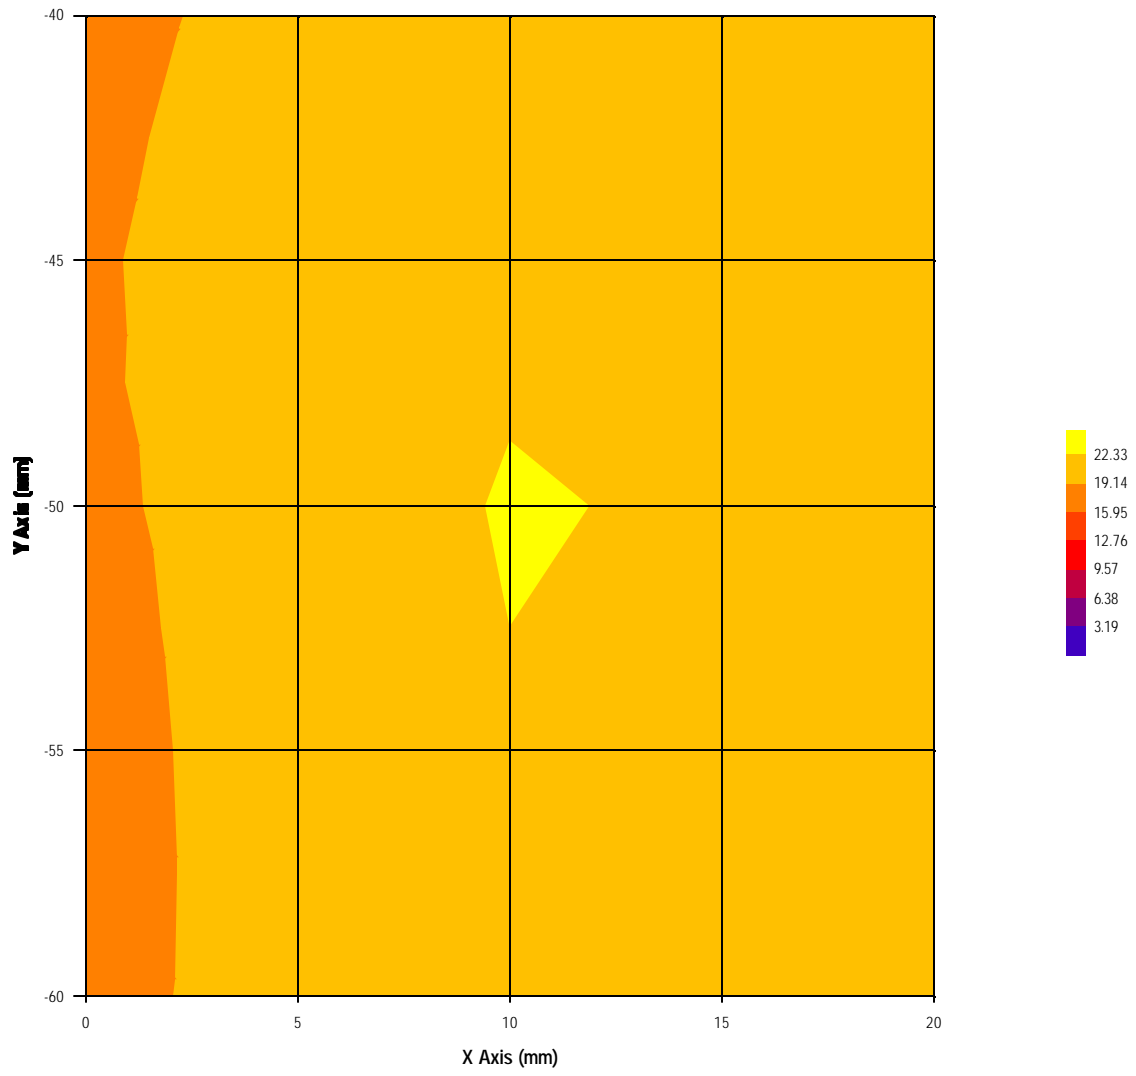

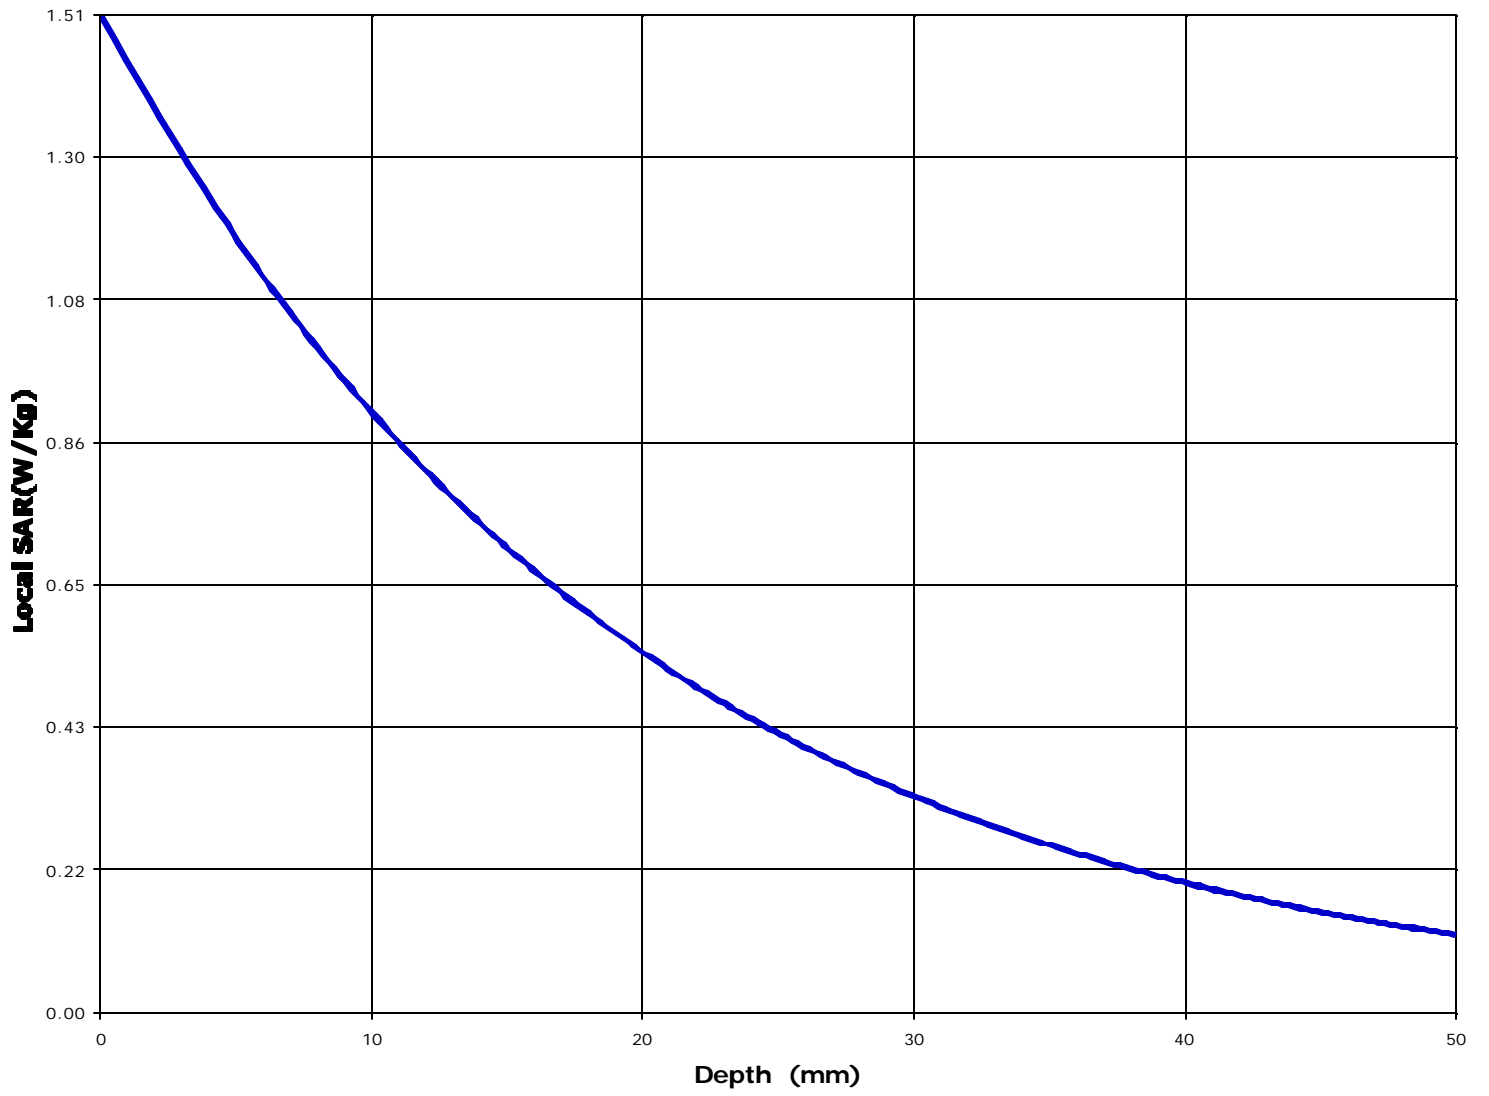

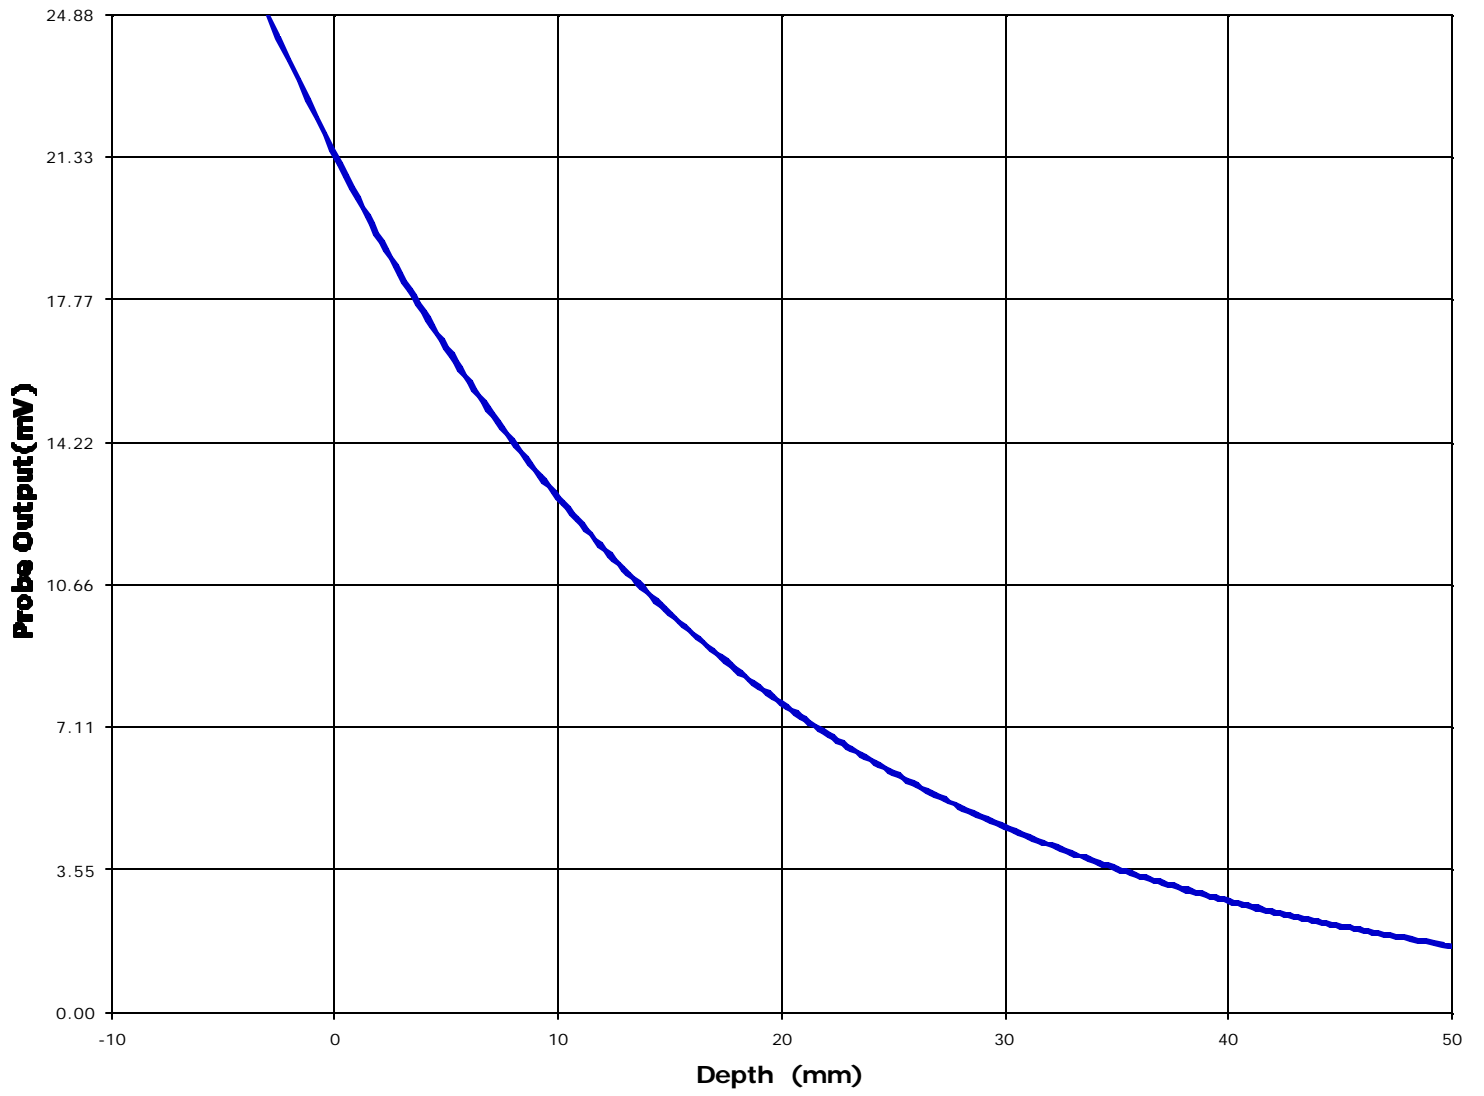

Test Information

Date : 5/23/00  
Time : 1:59:12 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: OUT
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.5 avg
<u>Sensor Factor (mV)</u>	: 10.8		(conducted)
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.6 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------



Location of Maximum Field :


X = 15                      Y = -55


Measured Values (mV) :


18.65	18.01	17.14	15.90	14.70	14.07
13.42	12.80	12.23	11.80	11.20	

<u>Peak Voltage (mV)</u>	: 21.58	<u>1 Cm Voltage (mV)</u>	: 13.52	<u>SAR (W/Kg)</u>	: 1.10
--------------------------	---------	--------------------------	---------	-------------------	--------

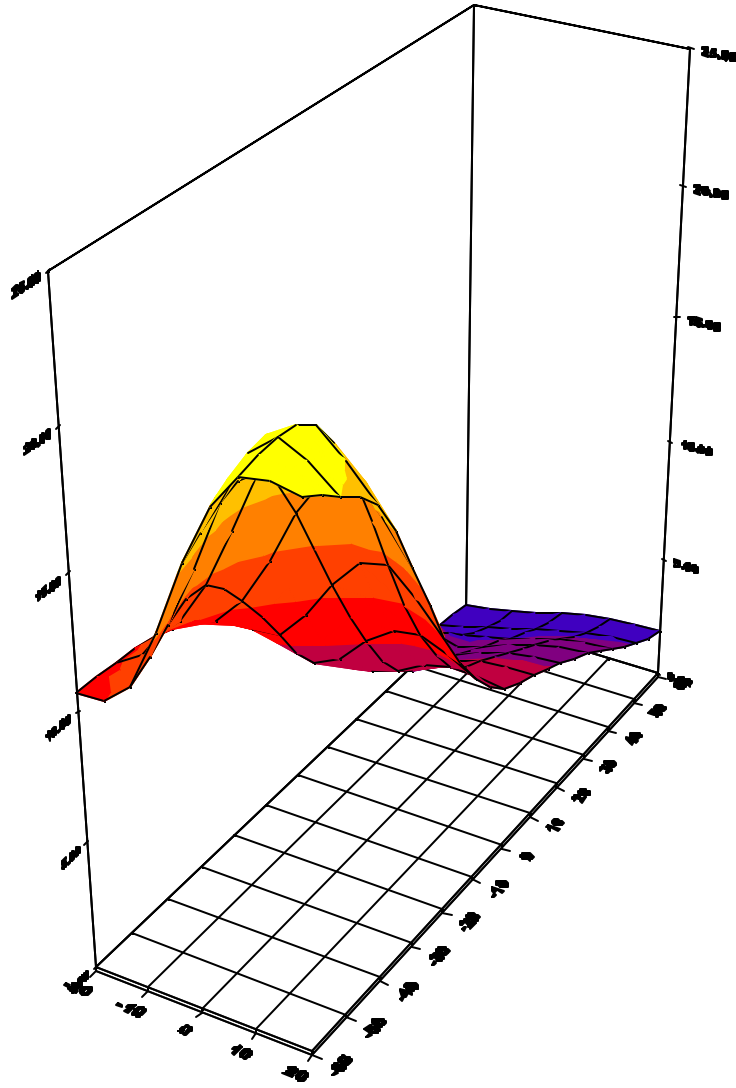


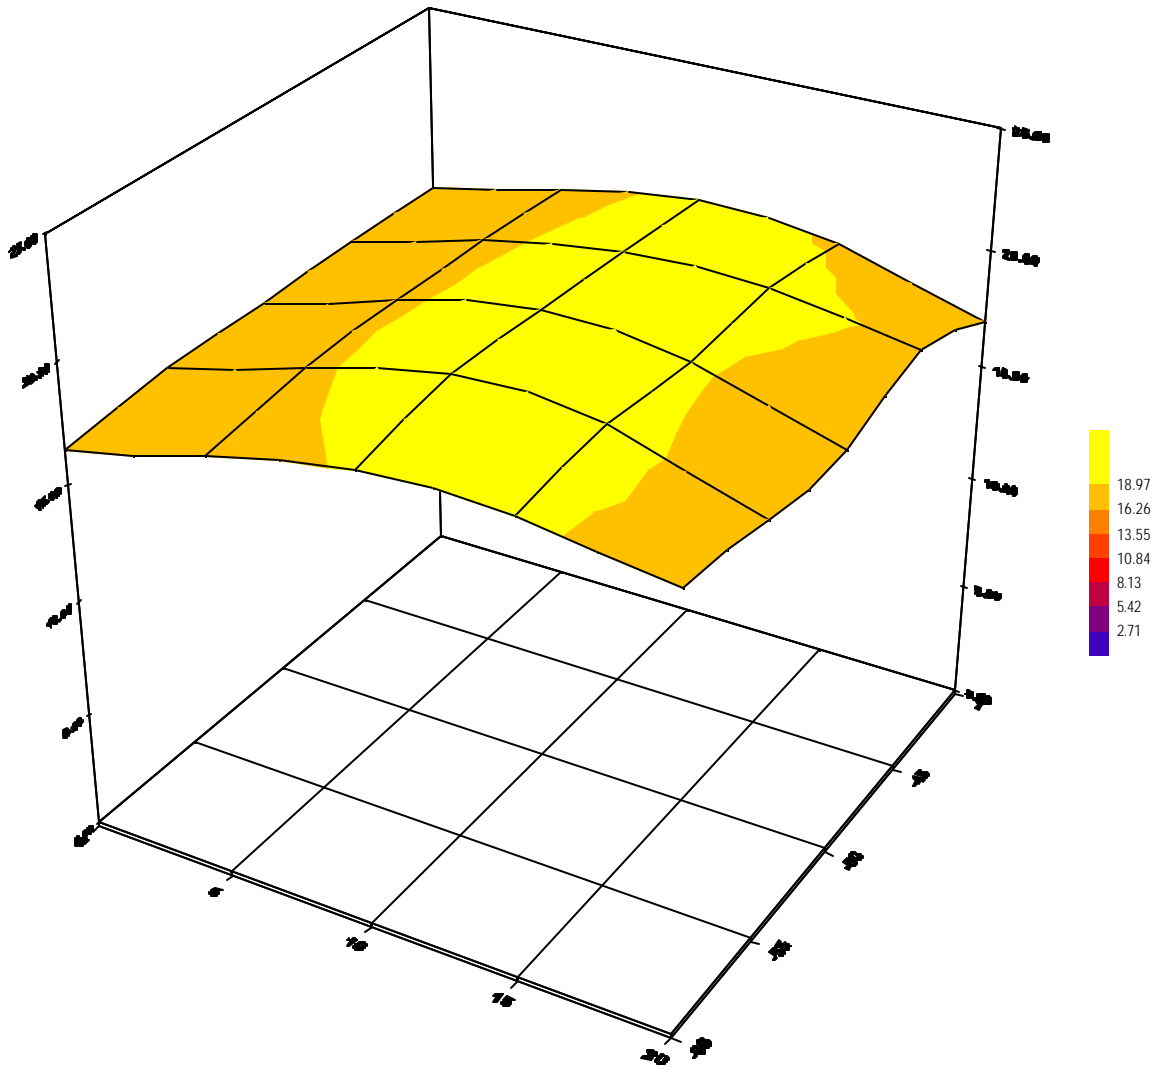


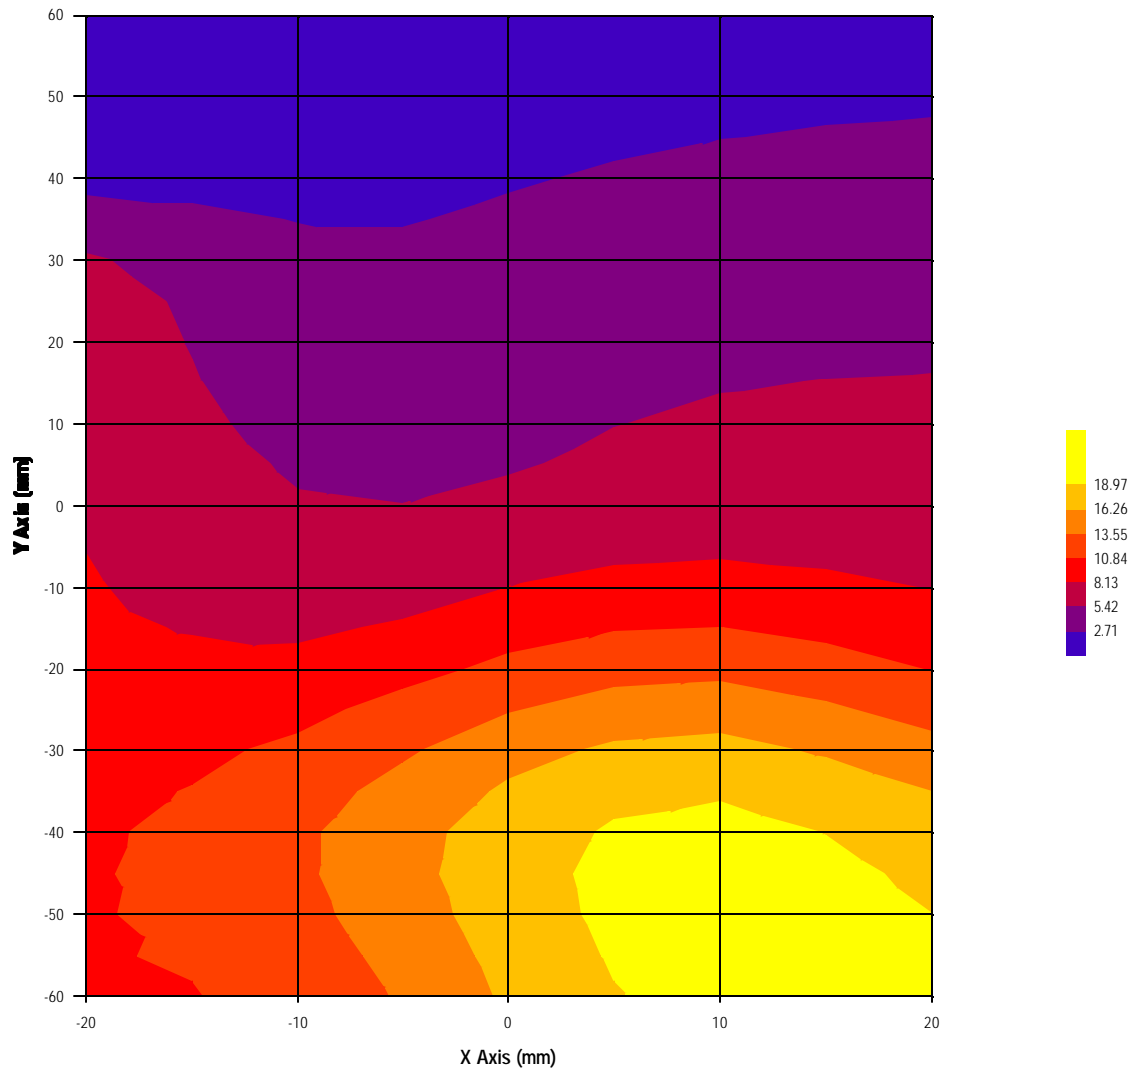

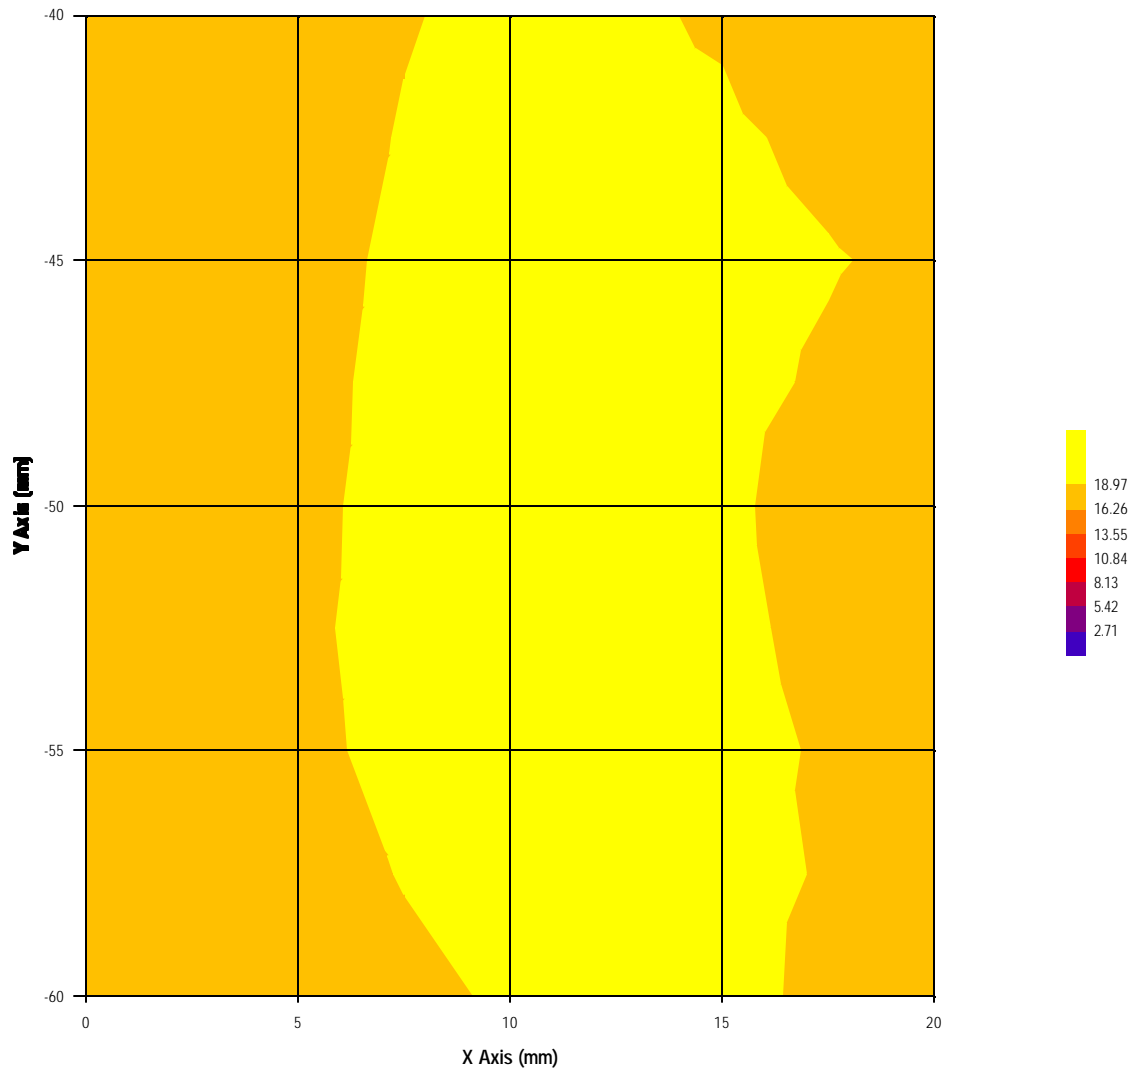



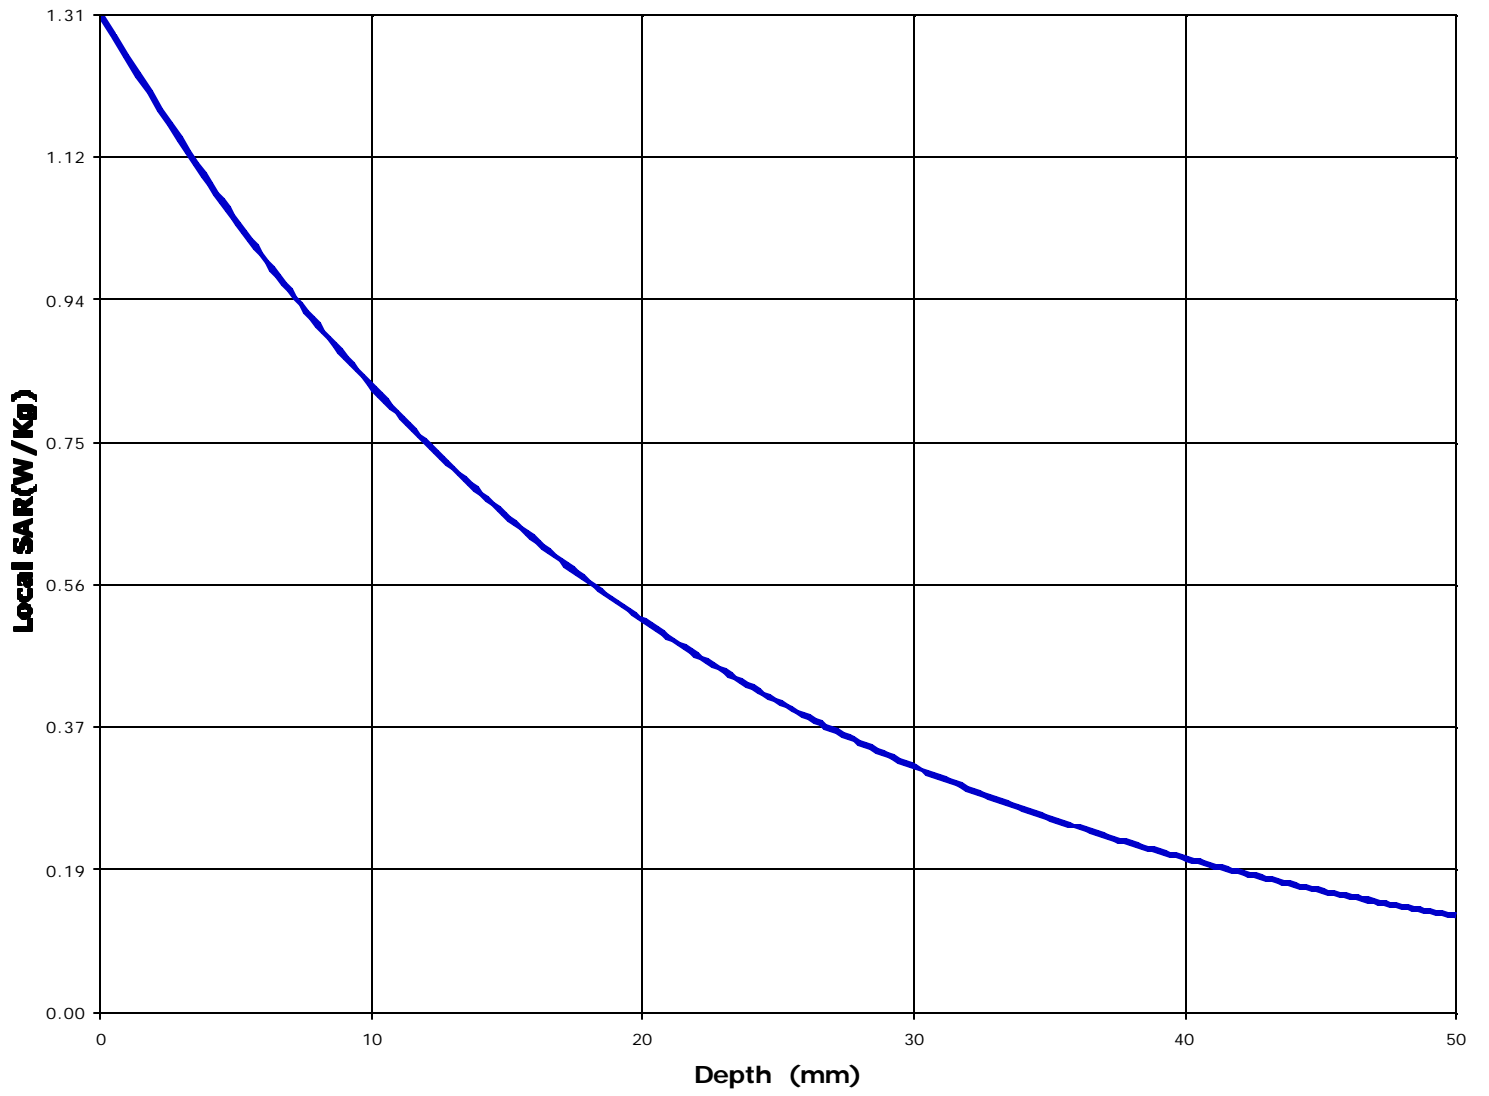

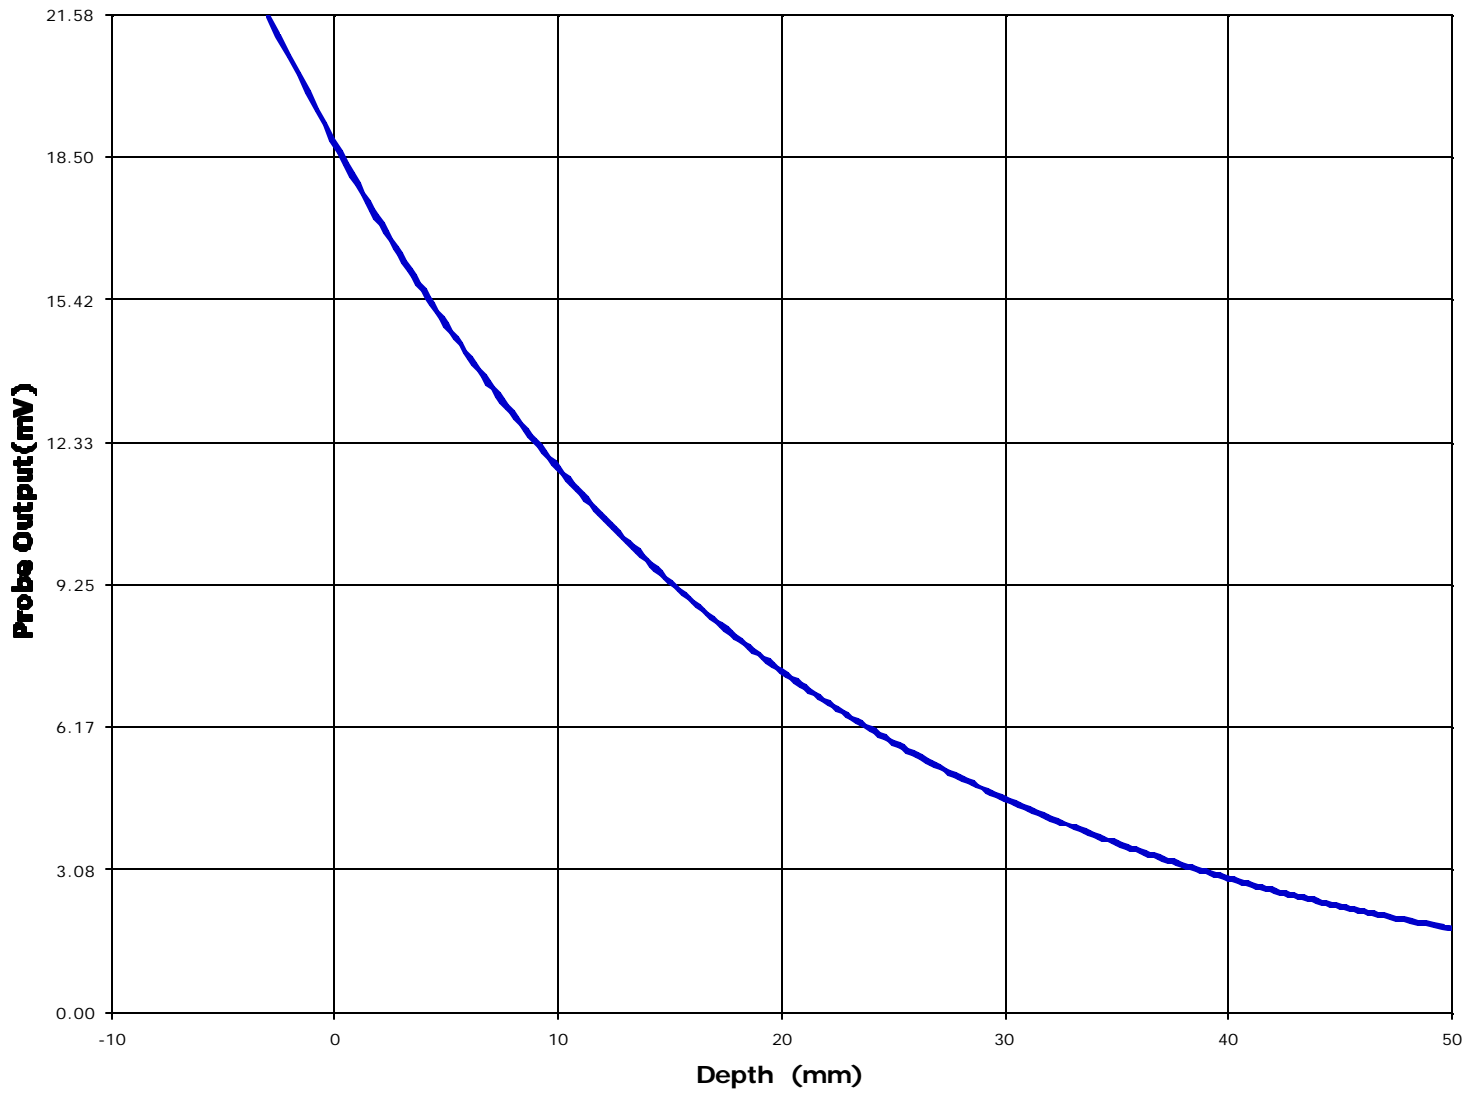

## **ANNEX F: Head left ear with retractable antenna fully retracted SAR MEASUREMENT**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ELT-002Q**  
**June 12, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Test Information

Date : 5/23/00  
Time : 4:35:33 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 902
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.9 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 25.0 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 15                      Y = -45


Measured Values (mV) :


0.08	0.05	0.04	0.02	0.01	0.00
0.00	0.00	0.00	0.00	0.00	

<u>Peak Voltage (mV)</u>	: 0.25	<u>1 Cm Voltage (mV)</u>	: 0.00	<u>SAR (W/Kg)</u>	: 0.00
--------------------------	--------	--------------------------	--------	-------------------	--------

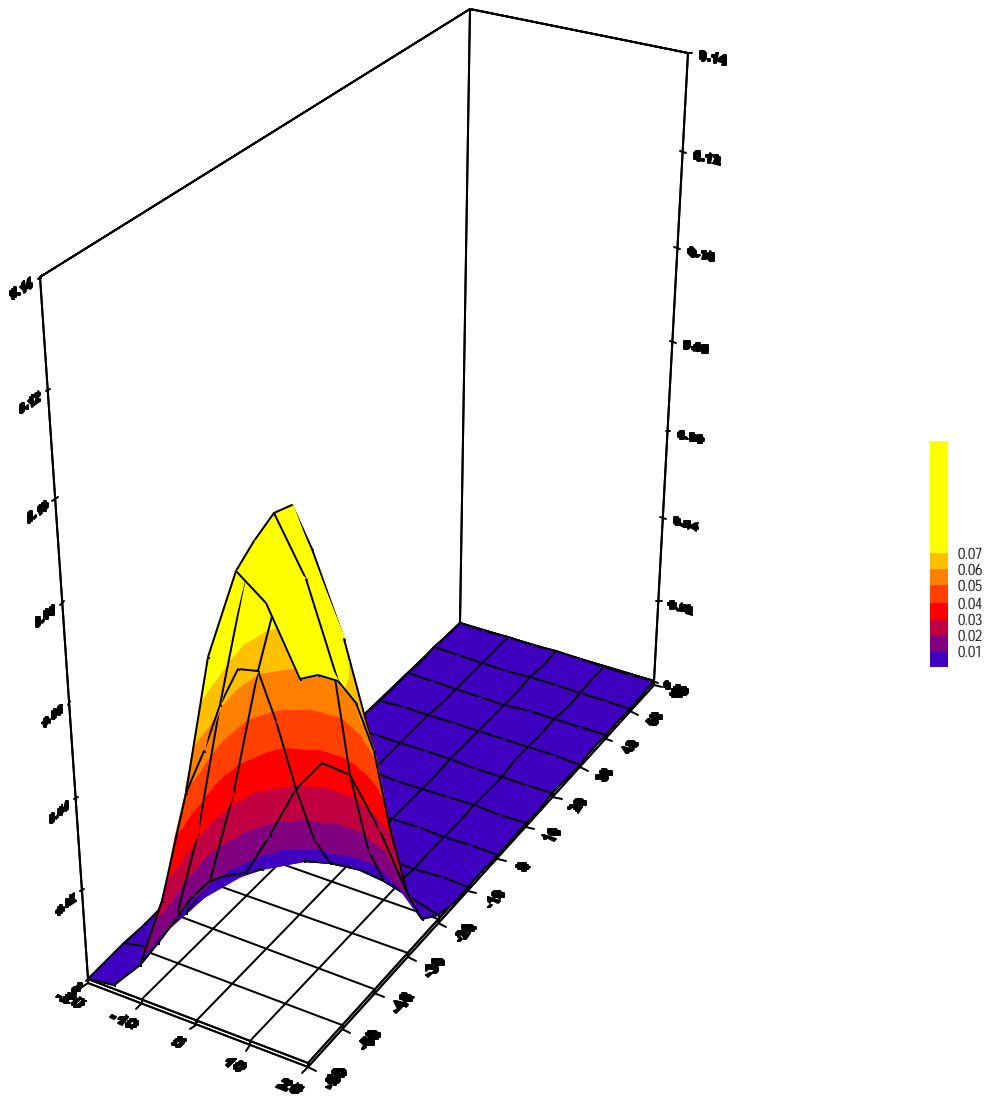


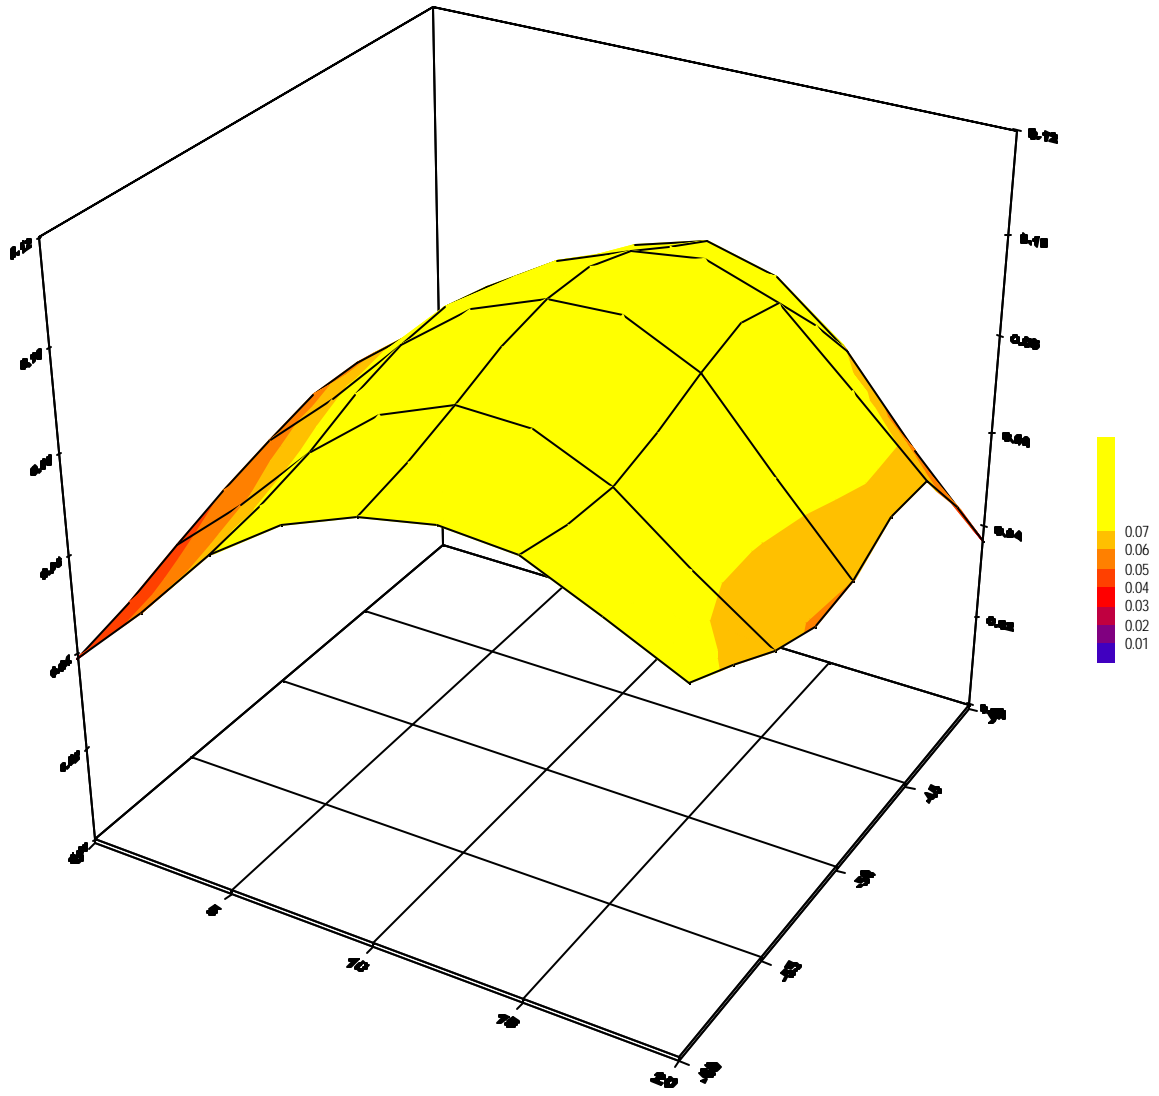


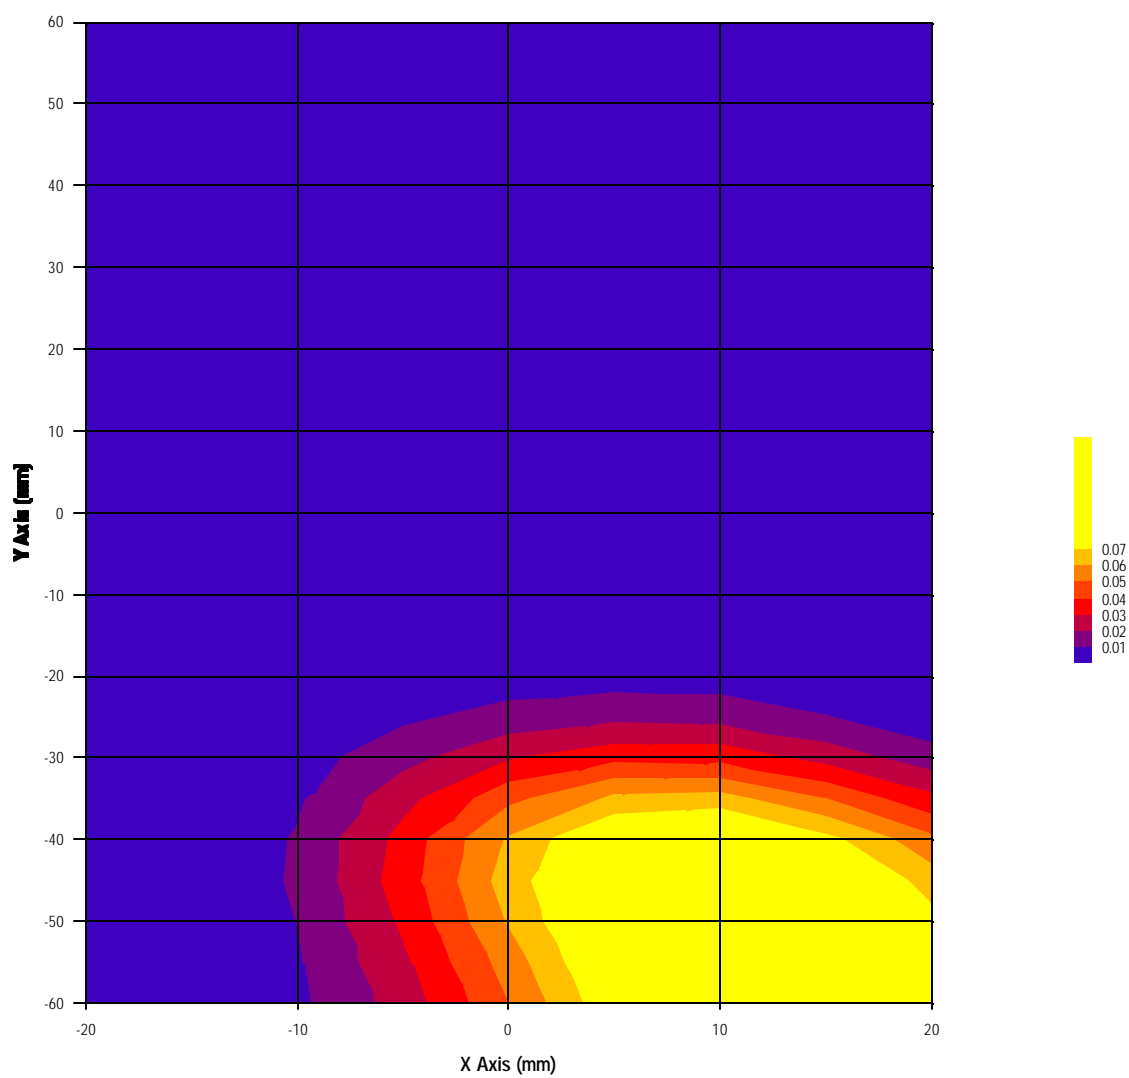

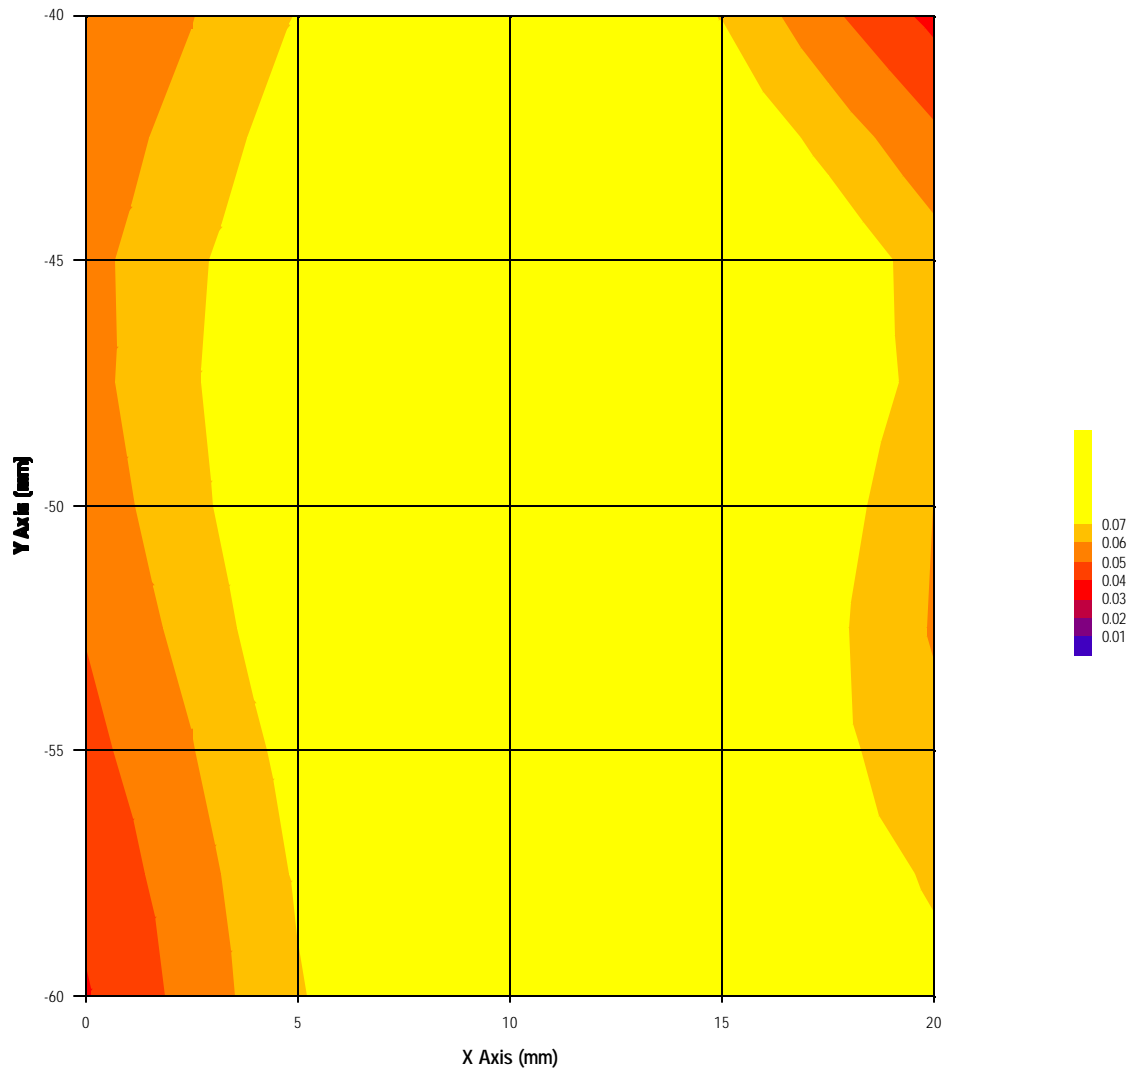



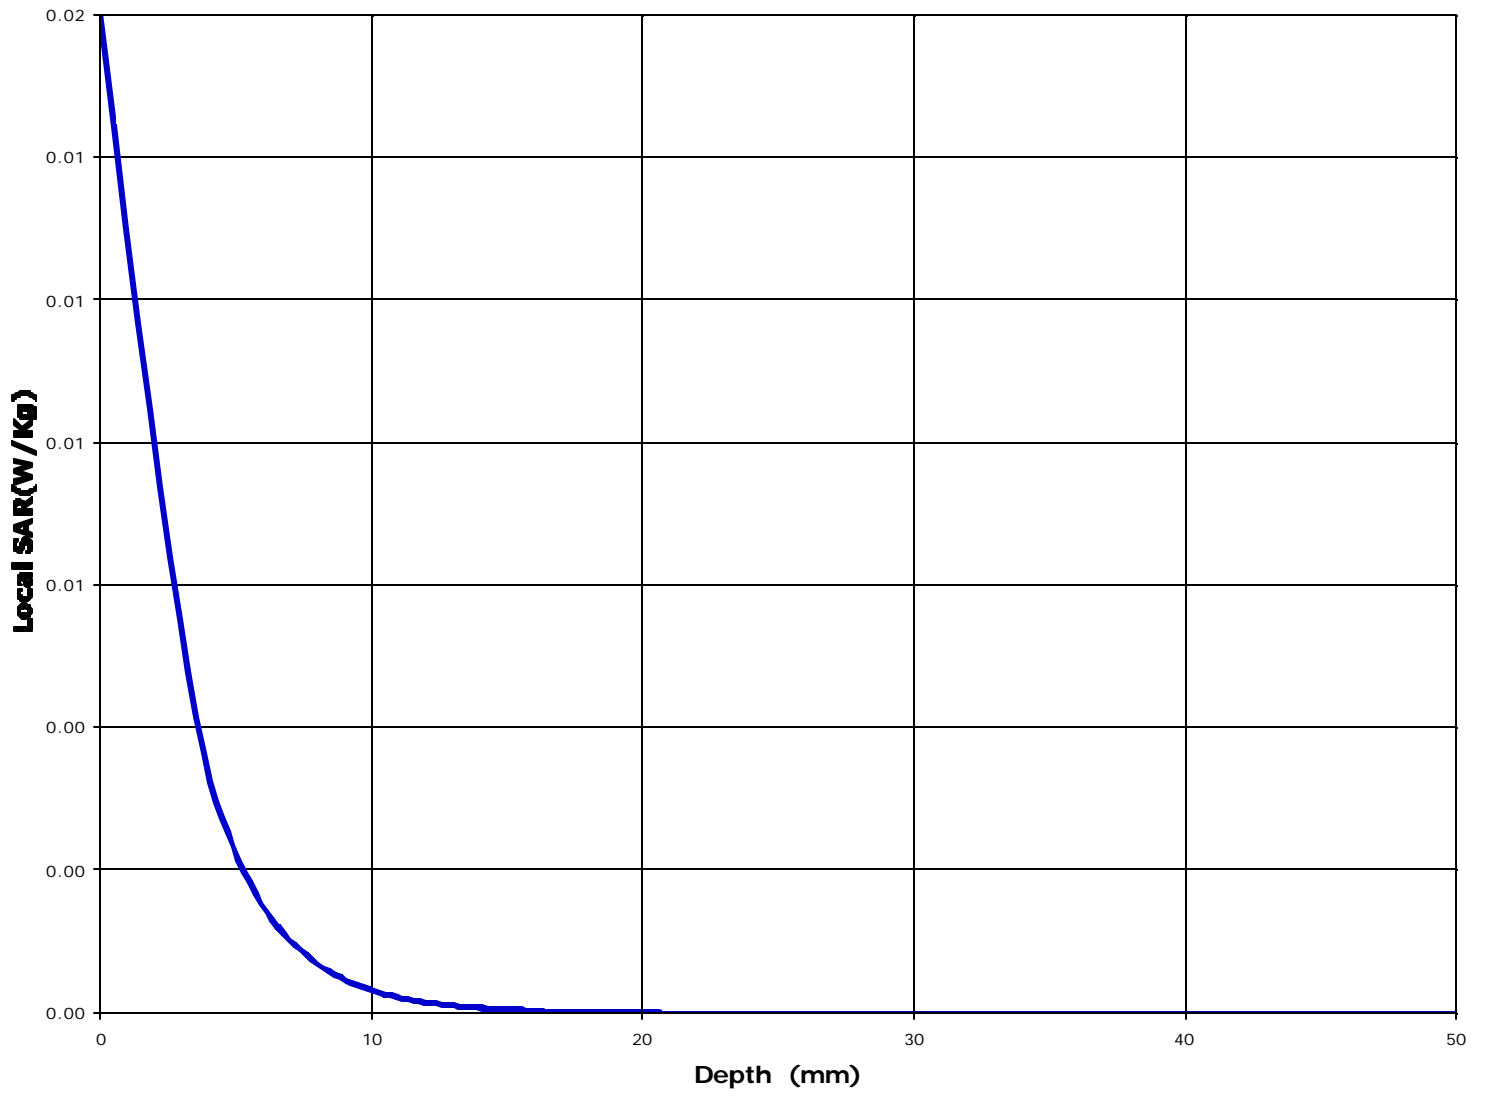

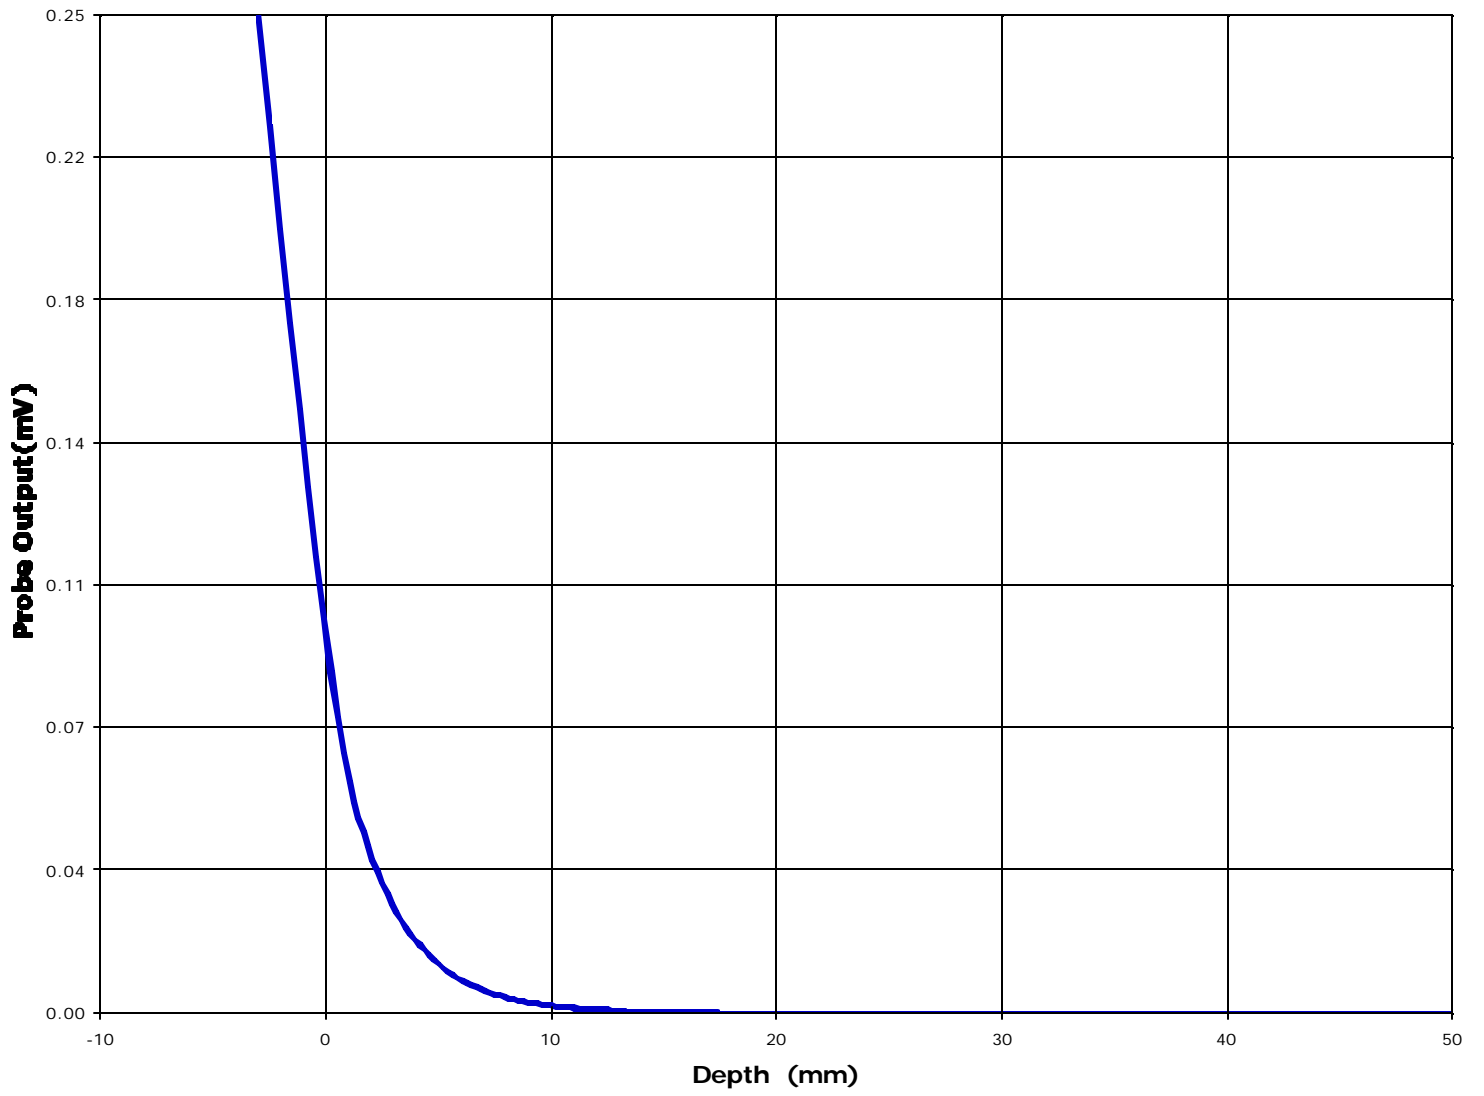

Test Information

Date : 5/23/00  
Time : 3:36:25 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 915
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.7 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.8 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 10                      Y = -50


Measured Values (mV) :


0.09	0.07	0.06	0.04	0.03	0.02
0.01	0.01	0.00	0.00	0.00	


<u>Peak Voltage (mV)</u>	: 0.20	<u>1 Cm Voltage (mV)</u>	: 0.01	<u>SAR (W/Kg)</u>	: 0.00
--------------------------	--------	--------------------------	--------	-------------------	--------

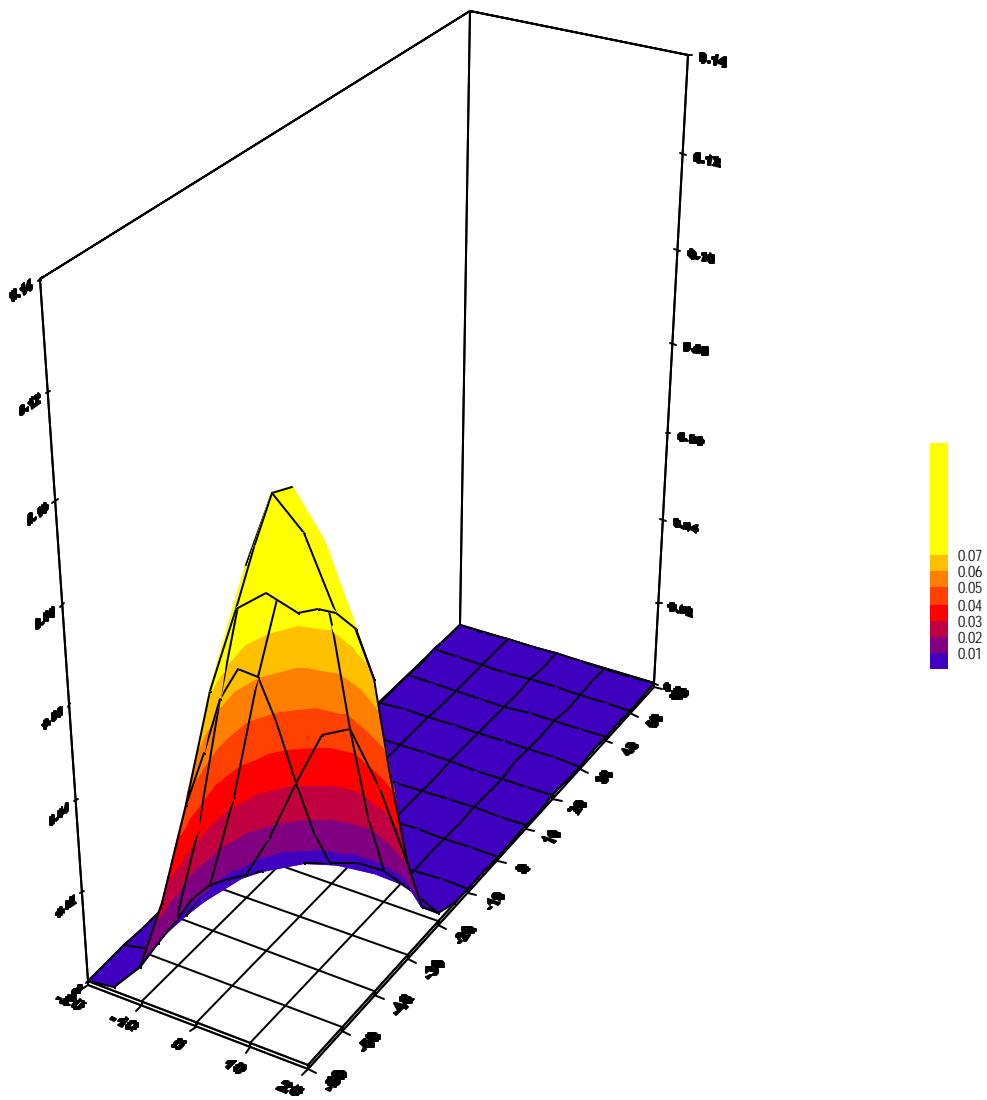

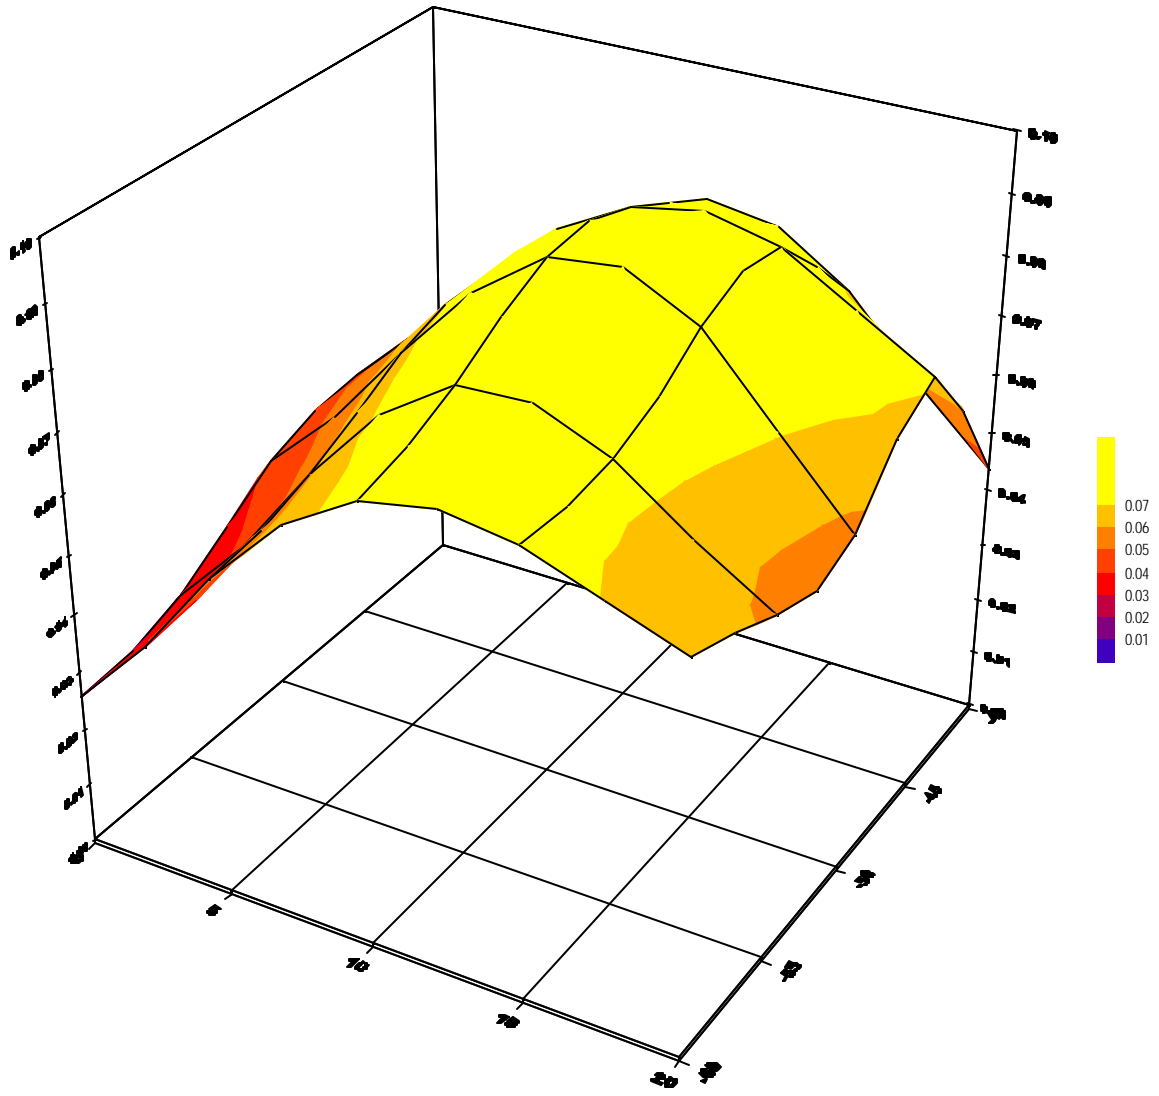


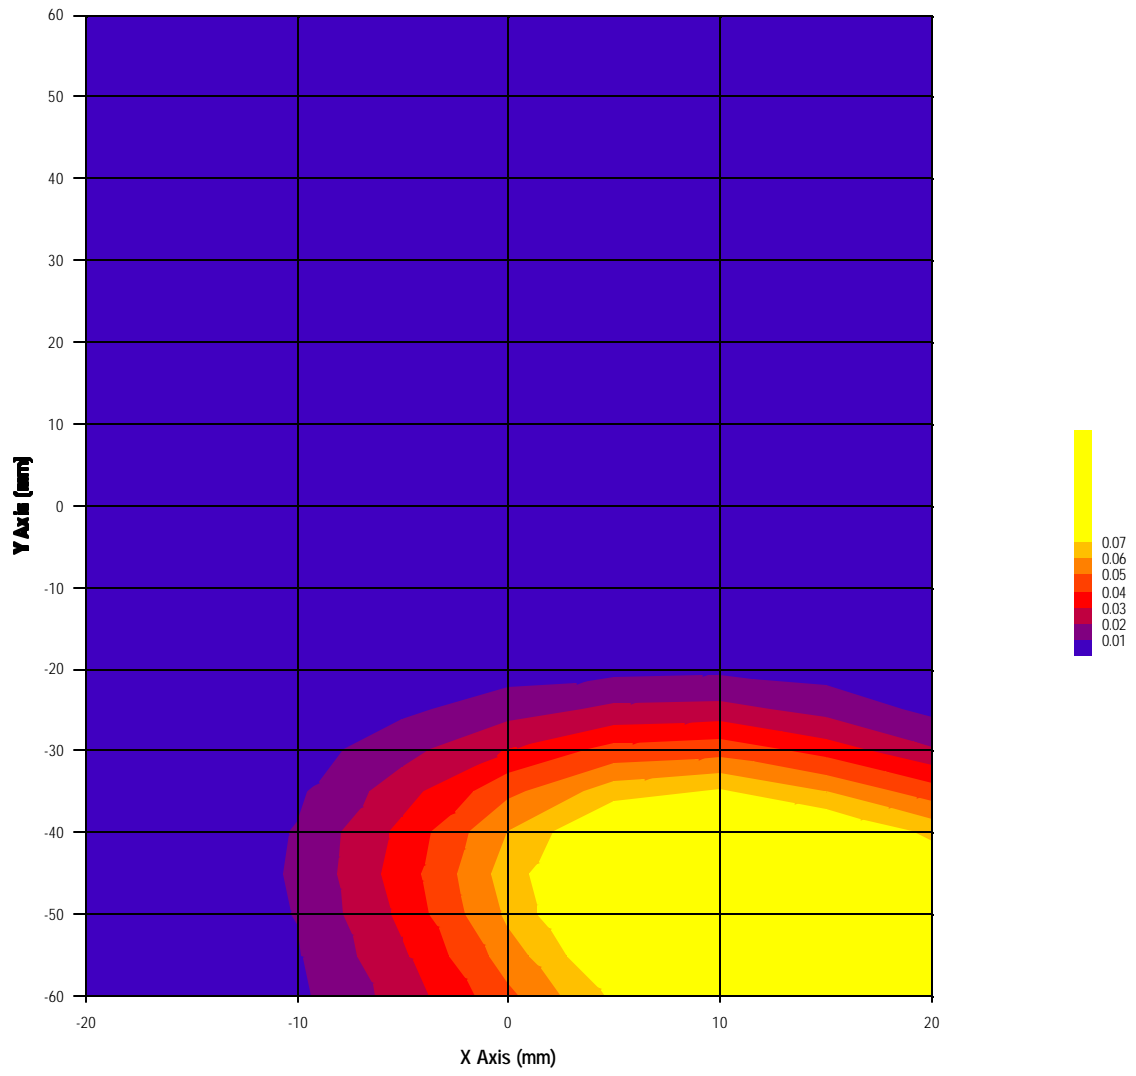

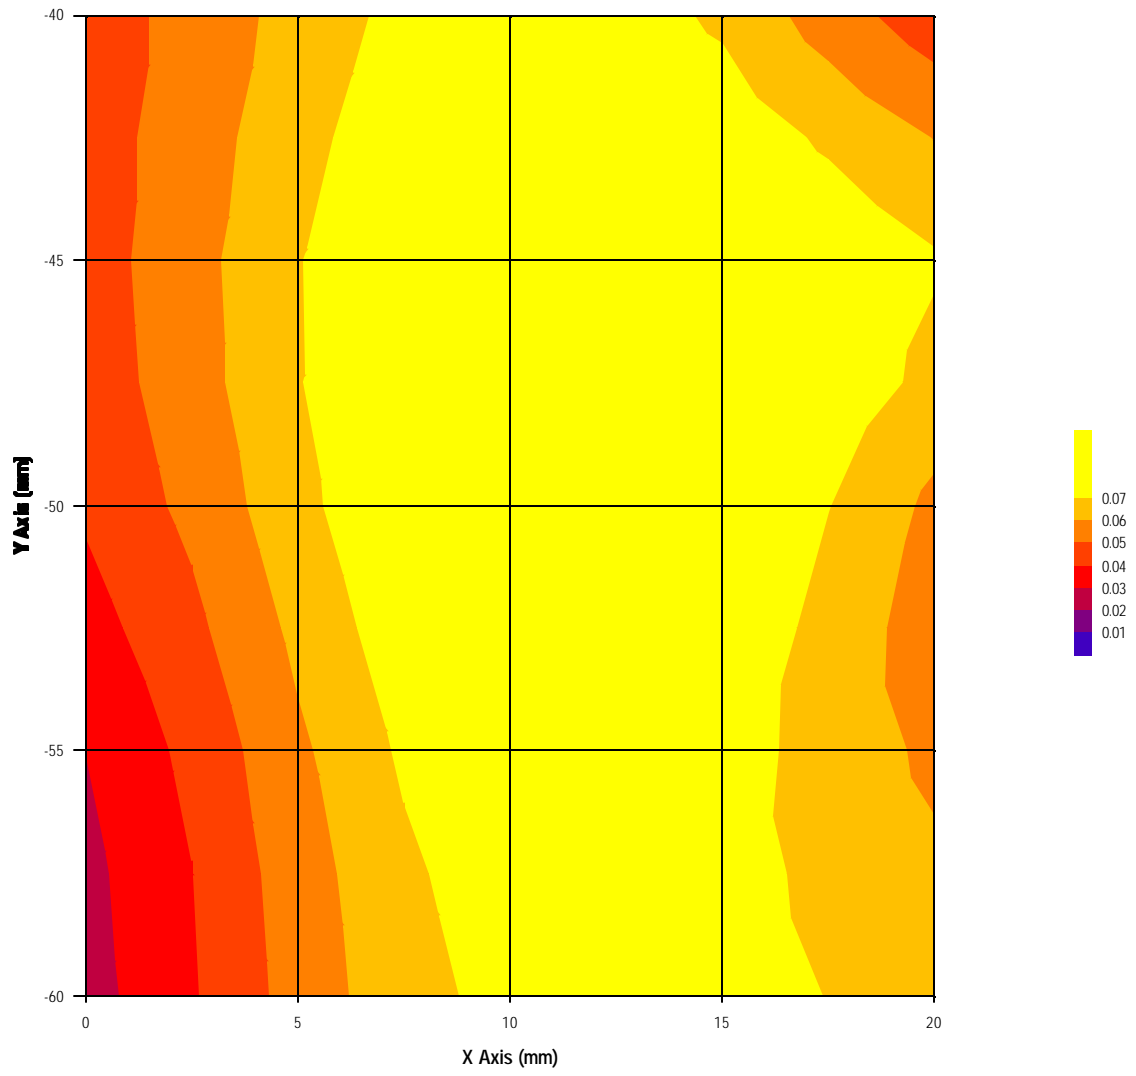

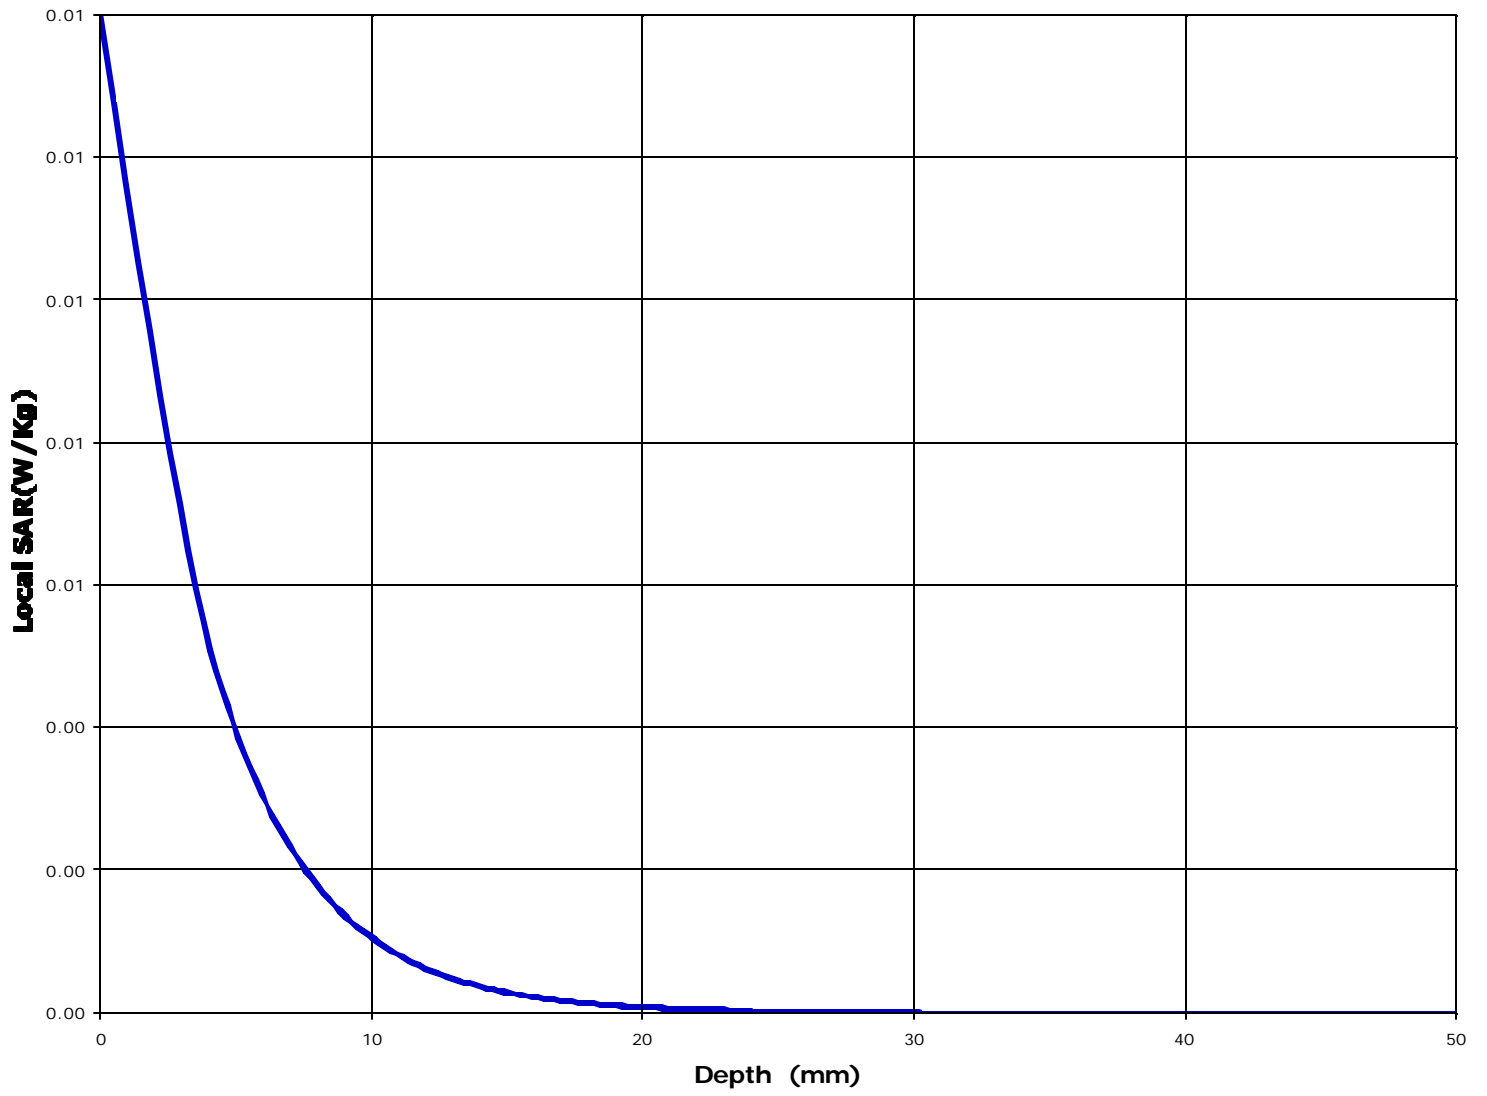



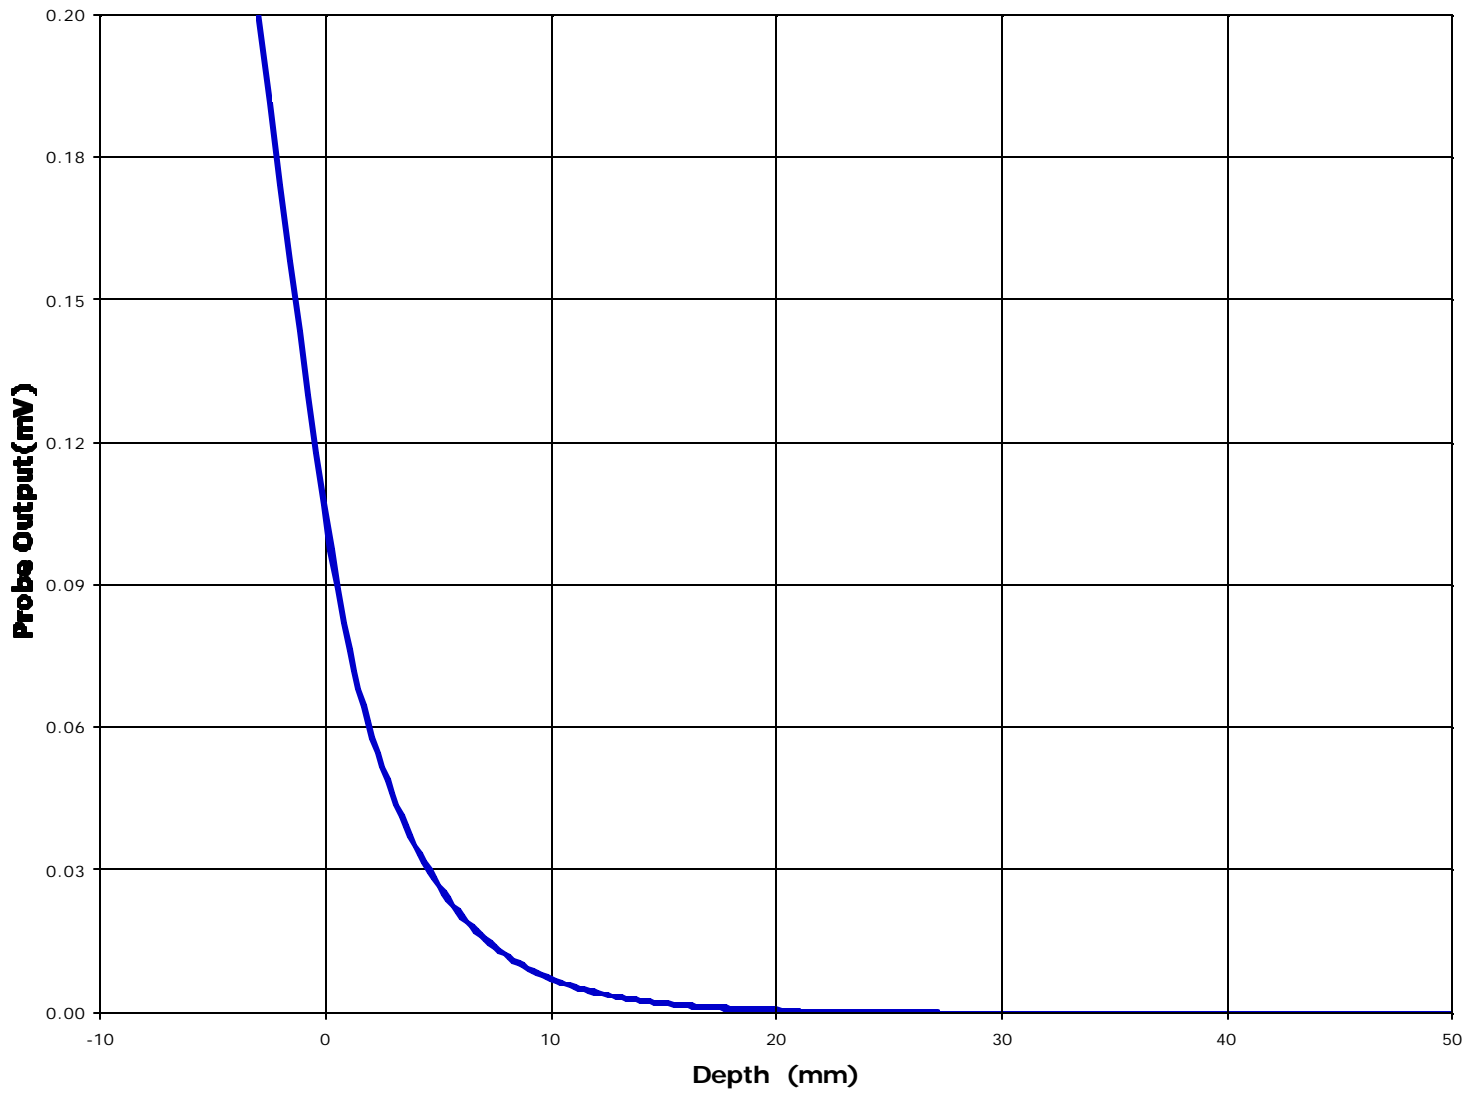

Test Information

Date : 5/23/00  
Time : 3:16:30 PM

<u>Product</u>	: SST Cordless Phone	<u>Test</u>	: SAR
<u>Manufacturer</u>	: Senao International Co., LTD	<u>Frequency (MHz)</u>	: 928
<u>Model Number</u>	: SN-920 ULTRA	<u>Nominal Output Power (W)</u>	: 0.9 pk
<u>Serial Number</u>	: No. 27	<u>Antenna Type</u>	: Dipole
<u>FCC ID Number</u>	: NI3-SN-920U	<u>Signal</u>	: Spread Spectrum

<u>Phantom</u>	: Head - Left Ear	<u>Dielectric Constant</u>	: 45.50
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.80

<u>Probe</u>	: E	<u>Antenna Position</u>	: IN
<u>Probe Offset (mm)</u>	: 3.00	<u>Measured Power (dBm)</u>	: 24.3 avg
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.66	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 3/24/99	<u>Compensated Power (dBm)</u>	: 24.4 avg

Amplifier Setting :

Channel 1 : .00446	Channel 2 : .00409	Channel 3 : .00324
--------------------	--------------------	--------------------


Location of Maximum Field :


X = 10                      Y = -50


Measured Values (mV) :


0.14	0.11	0.09	0.07	0.06	0.05
0.04	0.03	0.02	0.01	0.00	


<u>Peak Voltage (mV)</u>	: 0.27	<u>1 Cm Voltage (mV)</u>	: 0.03	<u>SAR (W/Kg)</u>	: 0.01
--------------------------	--------	--------------------------	--------	-------------------	--------

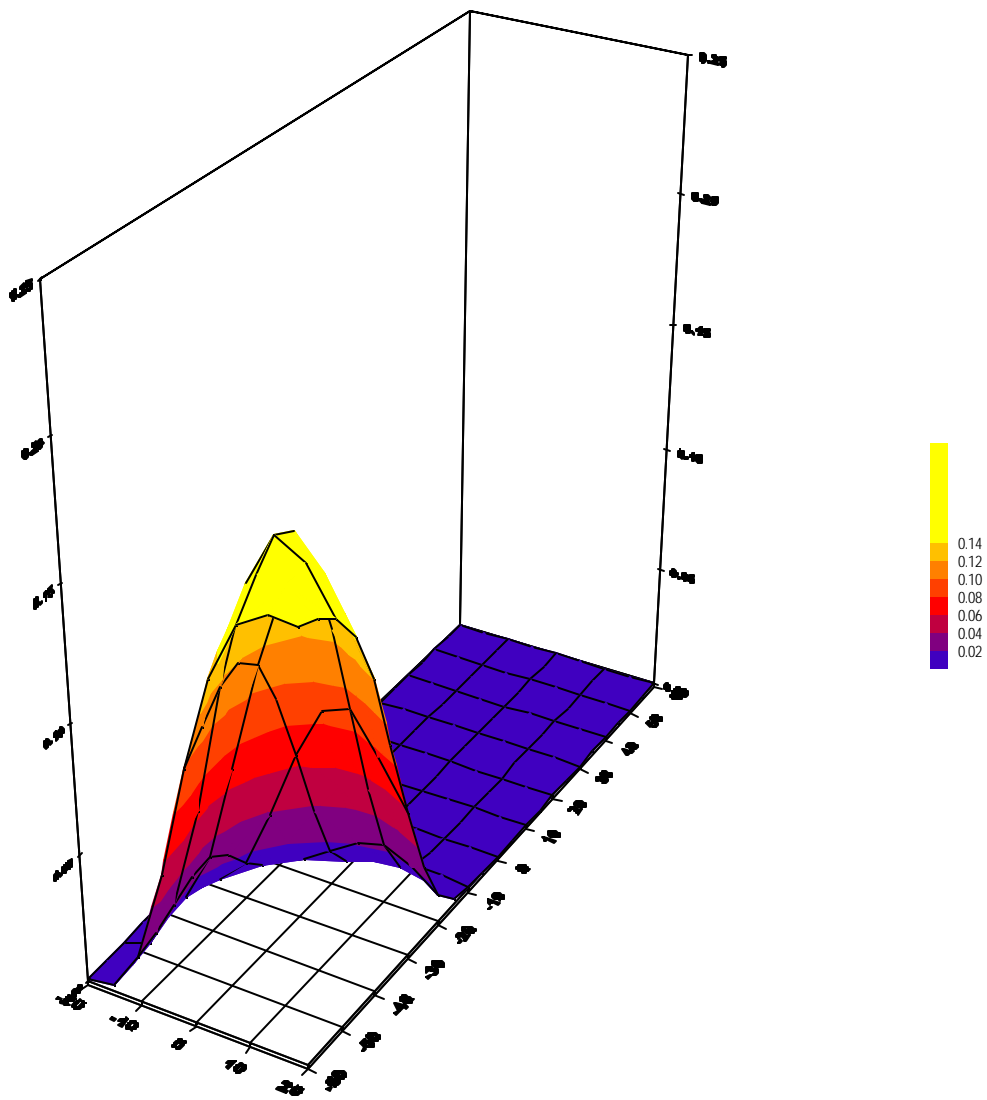


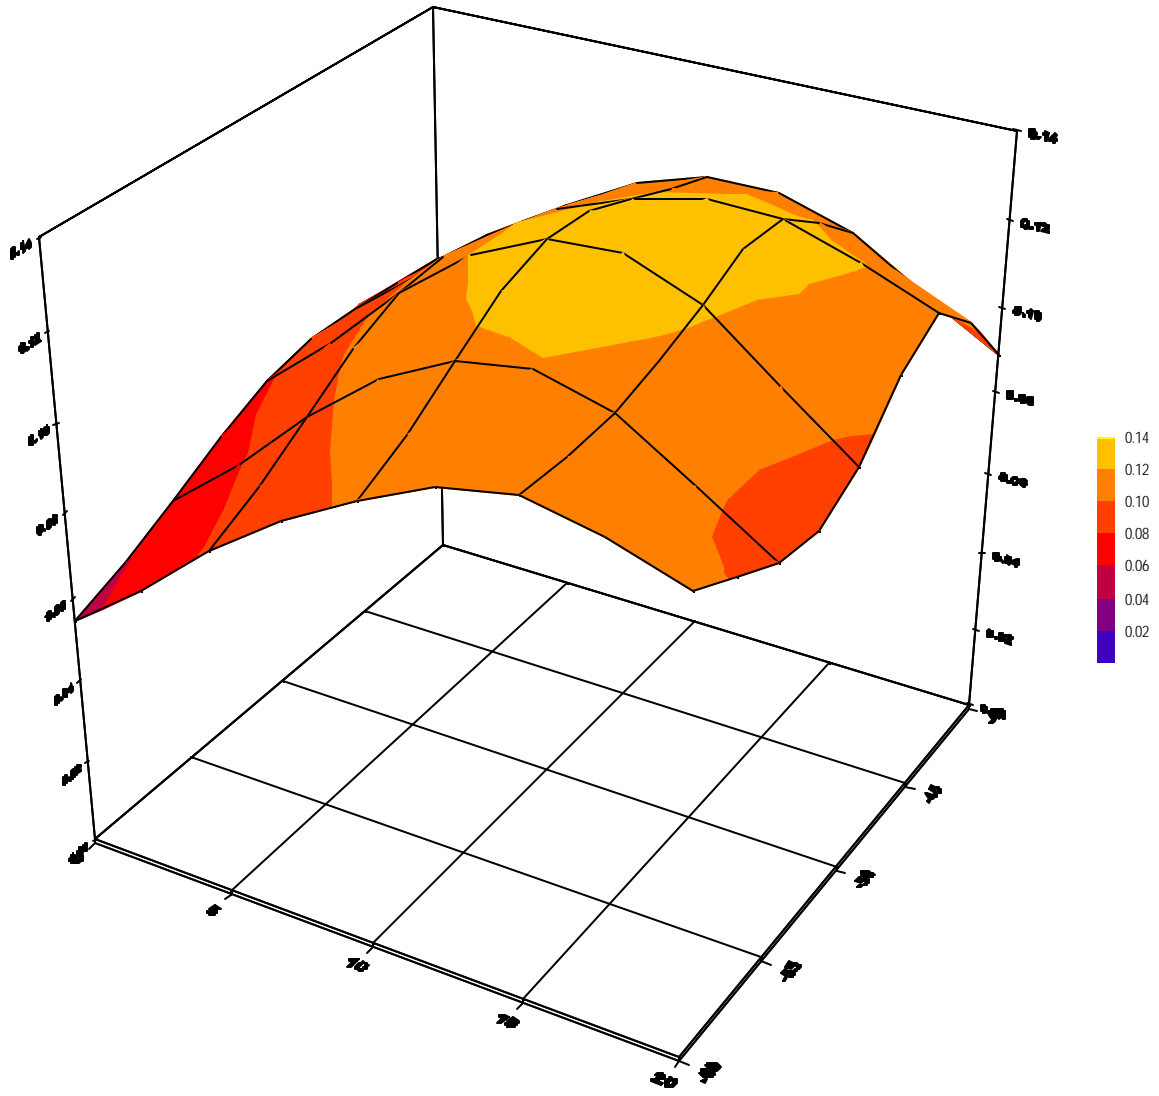

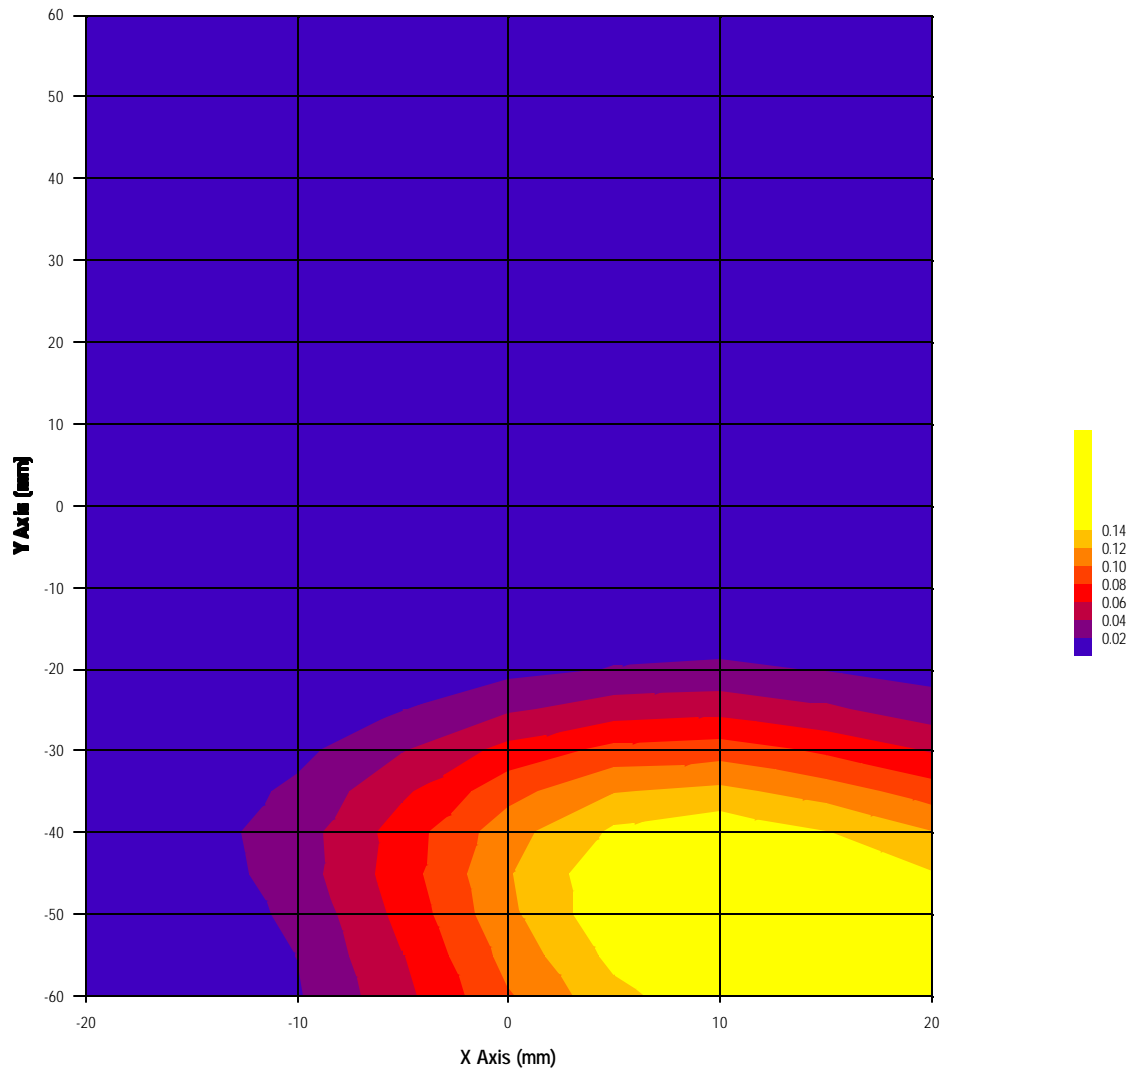

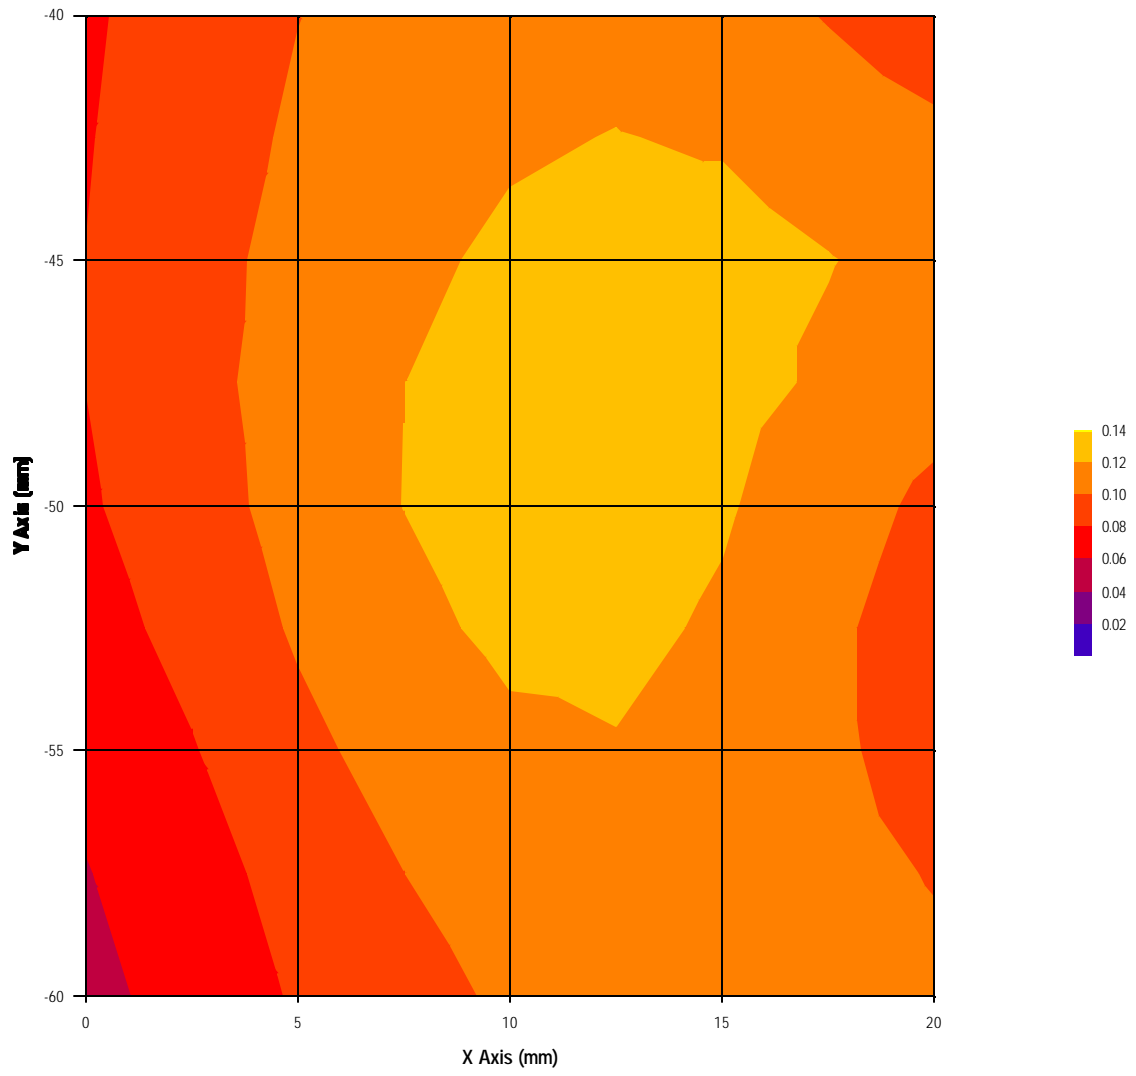

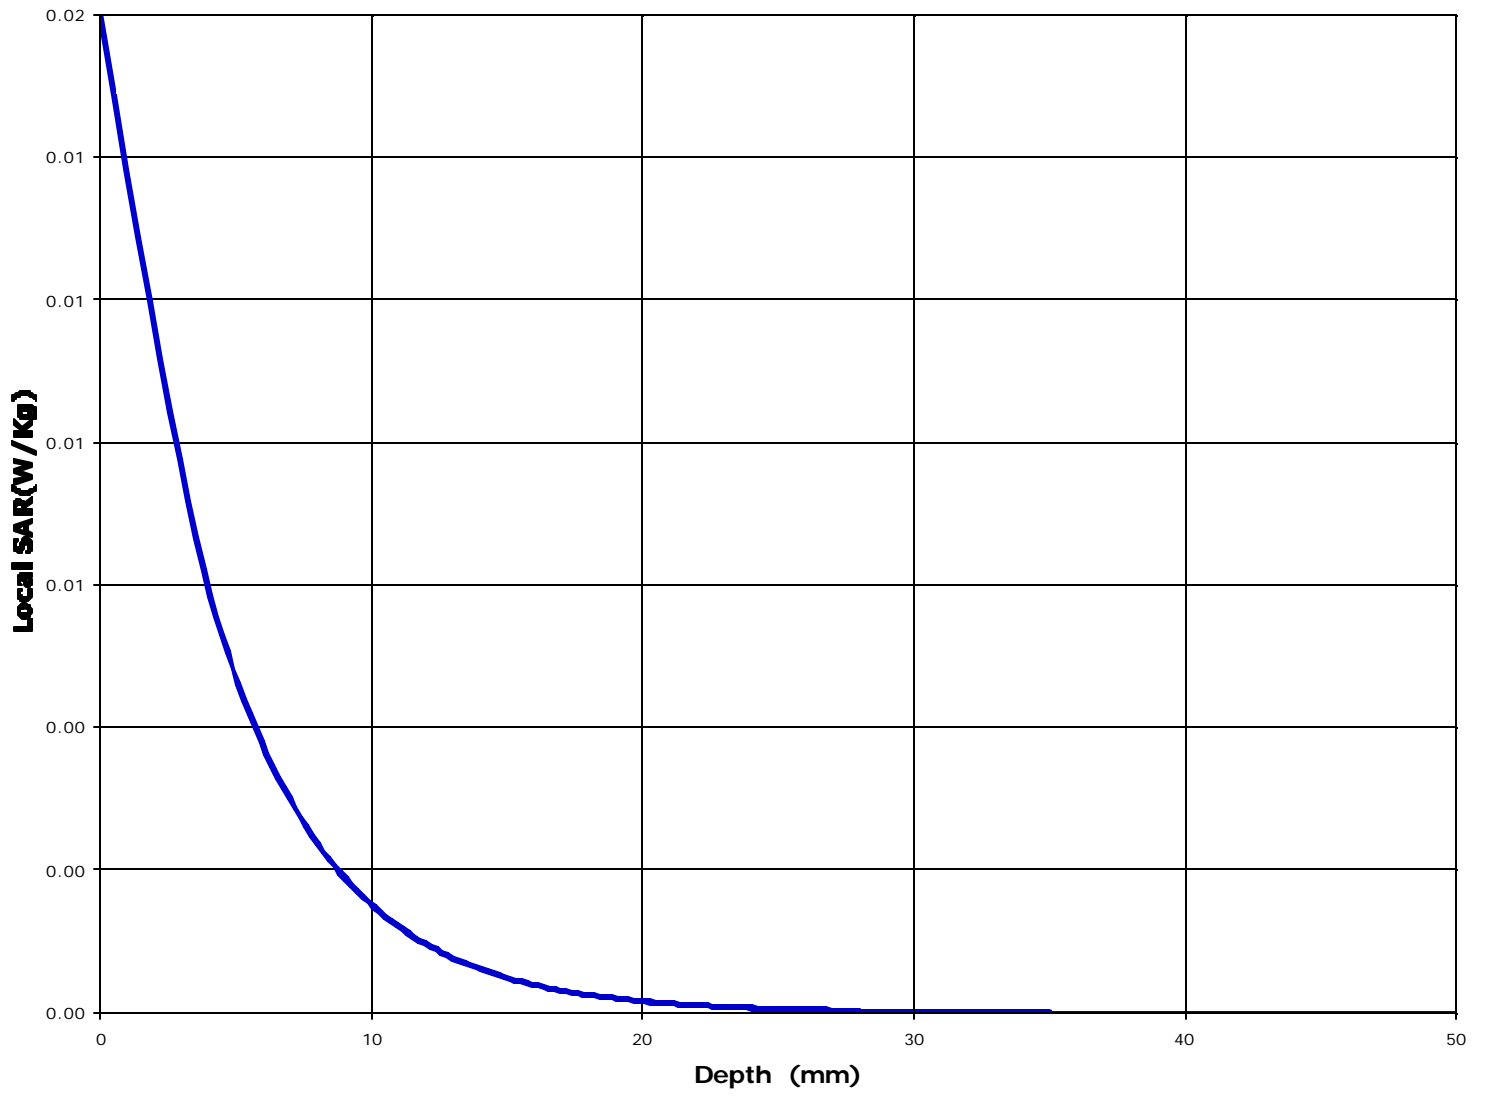

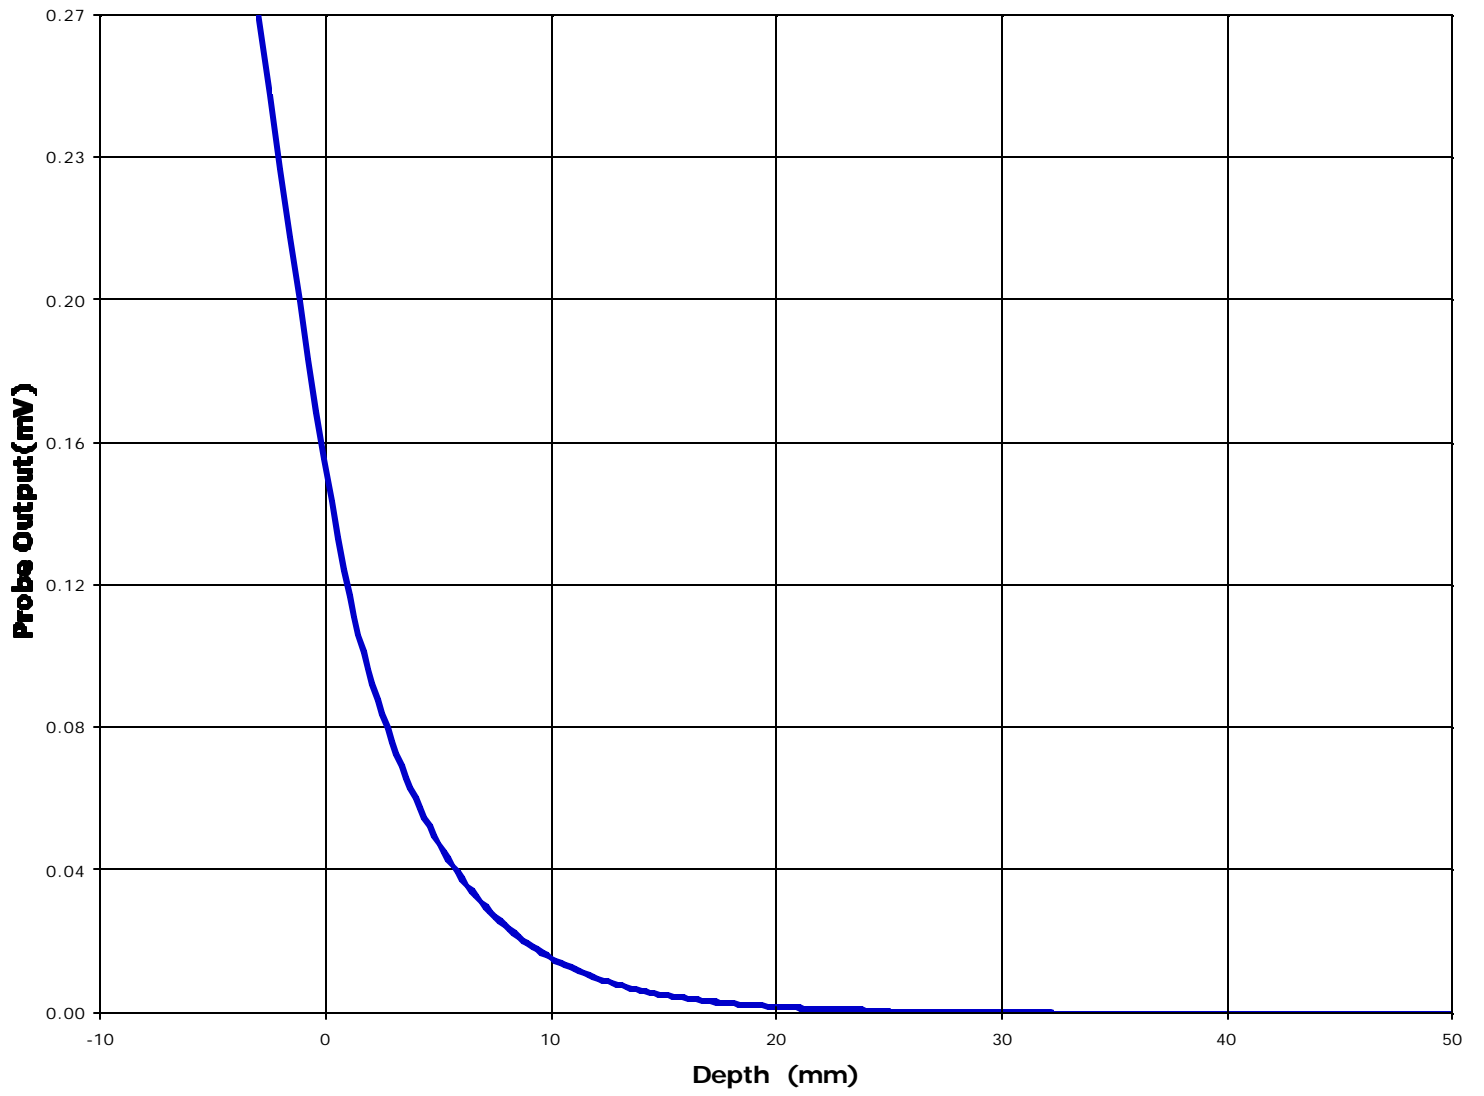



## ANNEX G: Tissue Calibration

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ELT-002Q  
June 12, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Date: 5/17/2000

Frequency: 915 MHz

Composition					
Tap Water(%)	DI Water(%)	Sugar(%)	Salt(%)	HEC(%)	Bactericide(%)
0.00	55.03	44.40	0.51	0.05	0.01

Mixture: Muscle ('Brain' or 'Muscle')

# of Points: 11

Point Dist: 1 cm.


Room Temp 24.5

Point	Amplitude	Phase
1	-23.90	107.50
2	-25.50	27.30
3	-27.70	-54.30
4	-29.80	-136.50
5	-32.00	138.20
6	-34.00	62.50
7	-36.00	-18.10
8	-38.00	-102.80
9	-40.10	174.00
10	-42.10	92.00
11	-44.00	-8.00

-49.9	
-51.6	
-53.5	-2.040909091
-55.3	-21.67272727
-56.9	-82.57
	193.7654545

Omega:	5749114556	rad/sec
Epsilon 0:	8.85E-14	F/m
mu:	1.26E-08	H/m
alpha avg:	-0.234968342	Np/cm
beta avg:	-1.441118363	rad/cm

Results:	Target	Low Limit	High Limit	% Off Target	
D. Const:	55.0	55.9	53.124795	58.7168789	-1.71
Cond:	0.94	0.97	0.9258263	1.0232817	-3.88

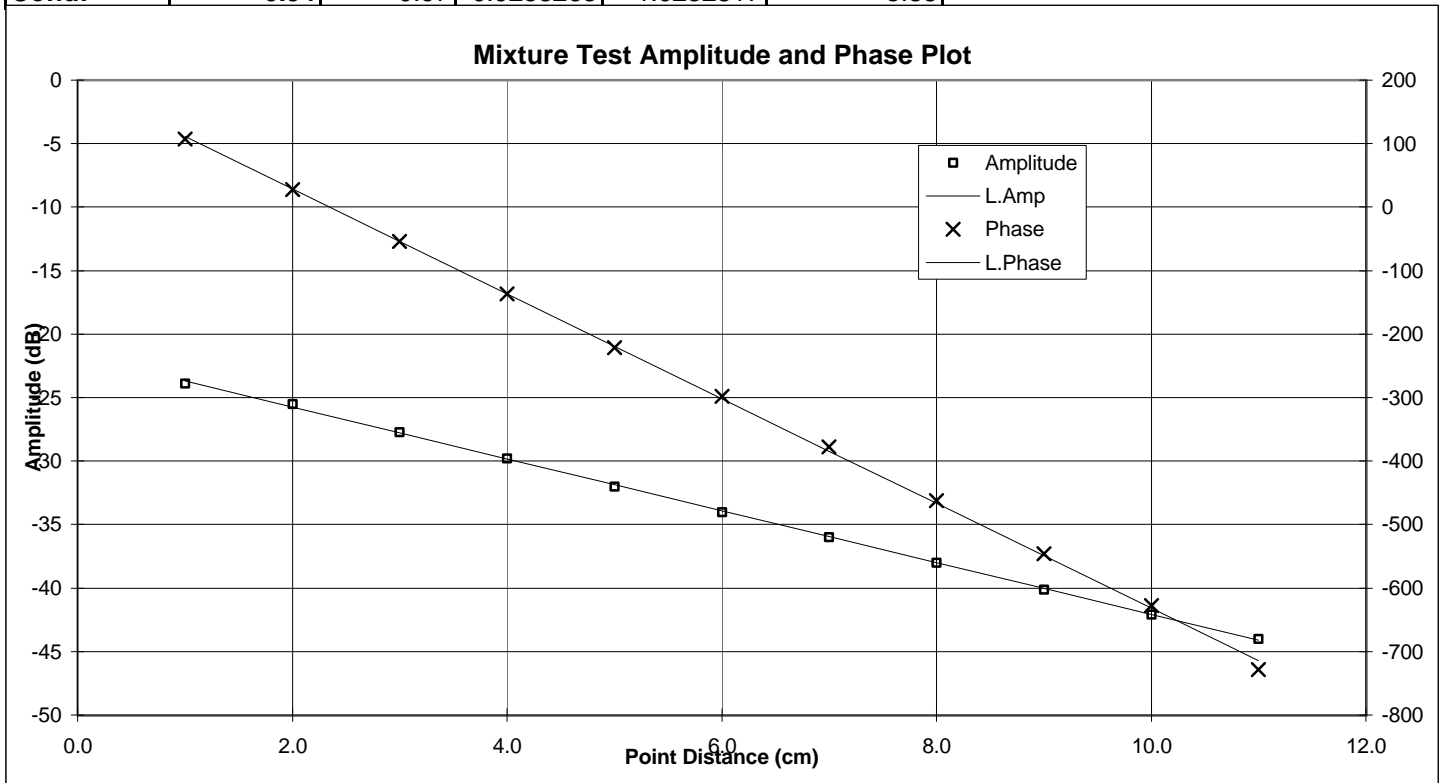

Date: 5/17/2000

Frequency: 915 MHz

Composition					
Tap Water(%)	DI Water(%)	Sugar(%)	Salt(%)	HEC(%)	Bactericide(%)
0.00	44.01	55.93	0.00	0.05	0.01

Mixture: Brain ('Brain' or 'Muscle')

# of Points: 11

Point Dist: 1 cm.

Room Temp 24.5

Point	Amplitude	Phase
1	-18.70	-109.00
2	-20.40	173.00
3	-22.10	95.70
4	-24.30	25.80
5	-26.00	-52.30
6	-28.00	-126.30
7	-30.00	159.50
8	-31.30	83.30
9	-33.80	6.90
10	-35.70	-68.70
11	-37.60	-142.50

-49.9	
-51.6	
-53.5	-1.898181818
-55.3	-16.60181818
-56.9	-75.21727273
	-35.47818182

Omega:	5749114556	rad/sec
Epsilon 0:	8.85E-14	F/m
mu:	1.26E-08	H/m
alpha avg:	-0.218536258	Np/cm
beta avg:	-1.312789063	rad/cm

Results:	Target	Low Limit	High Limit	% Off Target	
D. Const:	45.6	45.7	43.457949	48.0324695	-0.39
Cond:	0.79	0.77	0.7333953	0.81059475	2.84

